




GEARHEADS

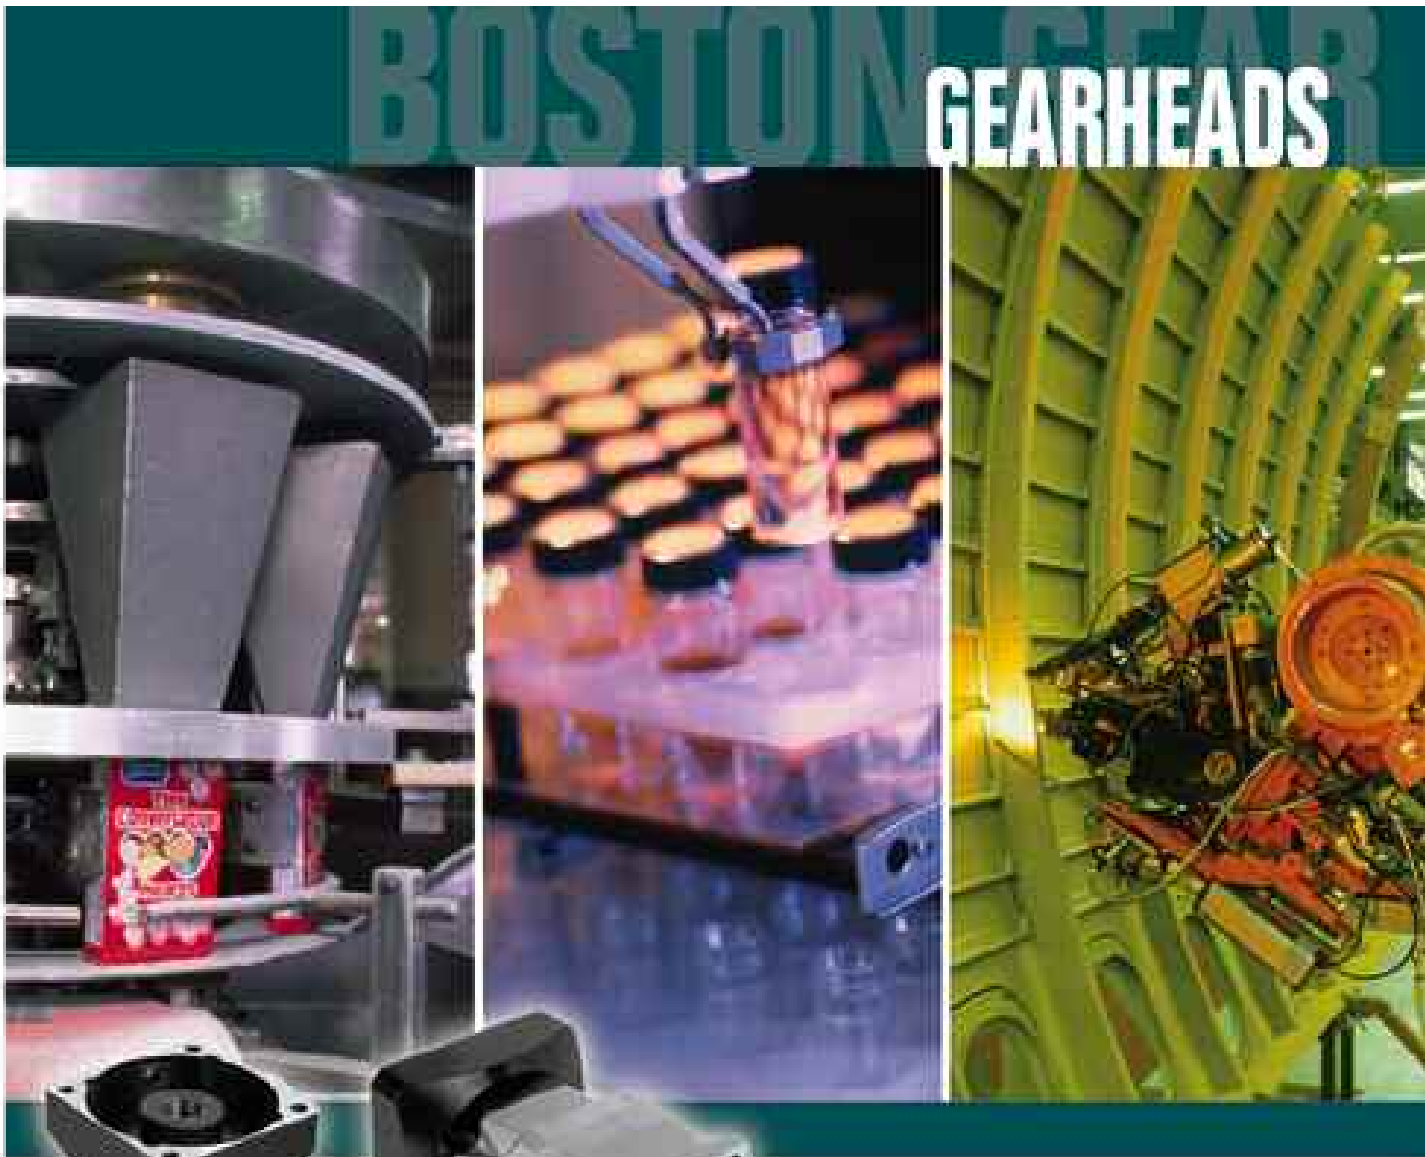

**High Precision
Planetary
Gearheads**

 **Boston**
Gear

Page 1 Applications

Pages 2 - 3 Features

Page 4 Selection Guide

Page 5 - 10

PL2 Series



Page 11 - 16

PR2 Series



Page 17 - 22

PL6 Series



Page 23 - 28

PR6 Series



Page 29 - 34

PL5 Series



Boston gearheads provide precise, durable and long-lasting performance

The Boston Gear line of servo gearheads has been designed for direct attachment to popular servomotors. Power is transmitted from the motor to a sun gear which drives three planet gears contained within an internal toothed ring gear. The planet gears are mounted in a carrier with double wall supports. The output shaft automatically rotates as the planet gears and carrier rotate.

Due to the load sharing attributes of multiple tooth contacts, planetary gearboxes provide the highest torque and stiffness for any given envelope. Balanced planetary kinematics at high speeds combined with the associated load sharing make planetary-type gearheads ideal for servo applications. Other significant advantages include:

- True helical technology provides increased tooth to tooth contact ratio by 33% vs spur gearing
 - 12° helix angle produces smooth and quiet operation
- One piece planet carrier and output shaft design reduces backlash
 - Single step machining process
 - Assures 100% concentricity
 - Increases torsional rigidity
- Efficient lubrication for life


Boston Planetary Gearheads are designed for a wide variety of applications



Many applications typically associated with conventional power transmission solutions are beginning to utilize servo control and precision gearheads to meet production requirements. Servo-driven solutions can achieve faster speeds with more precise accuracy while providing greater flexibility and quicker changeover.

Boston gearheads... the most robust gearheads available.


Superior engineering and design combined with the latest technology have resulted in the creation of a full line of gearheads loaded with enhanced features. Patented planet carrier design, patented input and output sealing designs and special heat and surface treatments are just a few of the unique features that give Boston gearheads a competitive edge.

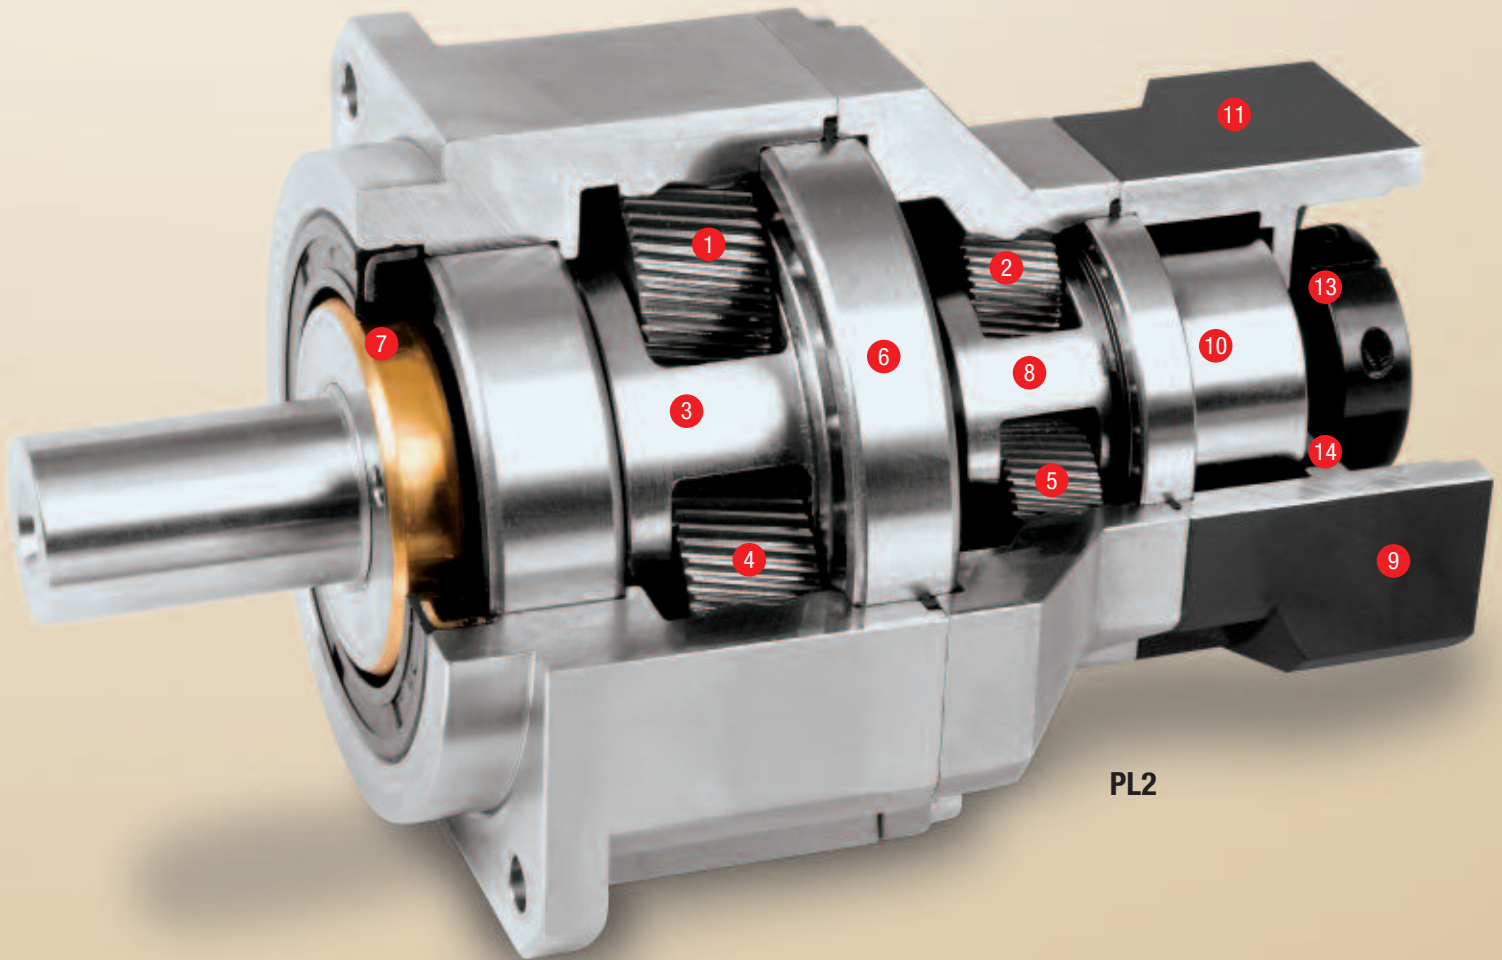

PR2



PL5

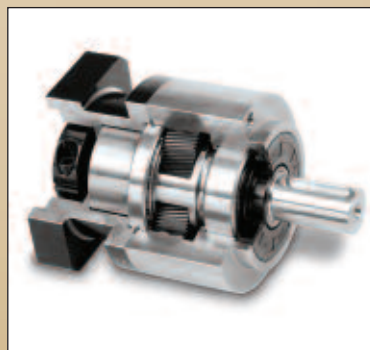

Equipped with **solid uncaged needle roller bearings**, provides maximum contact points to increase stiffness and generates high output torque.



A high setting gear performance is achieved by using **advanced gearing technology**, by **easing off the tooth profile** and **crowning the lead of each tooth**. This optimizes the gear mesh alignment and overlap to achieve maximum tooth surface contact.



Single piece planet carrier with an extended, tapered roller bearing provides maximum radial load capacity (up to 50,000 NM) and increases system reliability and stiffness.



Plasma nitriding heat treatment process maintains the tooth surface hardness at **840Hv** for superior wear-resistance and a core hardness at **30HRC** for toughness.



True Helical Gear Design
Precision helical gearing increases tooth to tooth contact ratio by over 33% versus spur gearing. The helix angle produces smooth and quiet operation with decreased backlash (less than 1 arc-minute and less than or equal to 56dB).



Precision tapered roller bearing support to increase radial and axial loading capacity.



Patented output sealing systems design eliminates friction and heat generation which is accomplished by applying a hi-tech Titanium Carbon Nitride coating to all output contact surfaces. The TiCN coating reaches a hardness of 3000Hv and is ground to Ra 0.2µm finish to ensure sealing.




Patented planet carrier design places the sun gear bearing directly into the planet carrier. This ingenious concept eliminates gear misalignment and gains the highest accuracy on the market. Less than 1 arc-minute backlash!



A special non-electrolysis nickel surface treatment on the output housing and **black anodized** aluminum input adapter are provided for the most extreme environmental conditions to achieve an IP65 Rating.



Solid, single-piece sun gear construction obtains precise concentricity with increased strength and rigidity.



The unique **motor adapter** and **bushing module system design** allows for quick and easy mounting of any motor.




Triple split collet with dynamic balanced set collar clamping system provides backlash free power transmission and eliminates slippage. 100% concentricity allows for smooth rotation and higher input speed capability.



Patented input sealing system design eliminates breakaway torque and decreases friction/heat. The TiCN coated bushings (1700 Hv, Ra 0.2µm finish) interface with a proprietary seal which decreases wear and erosion of both sealing surfaces. This new design prevents leakage and has a service life of over 30,000 hours.

Selection of the Optimum Gearbox

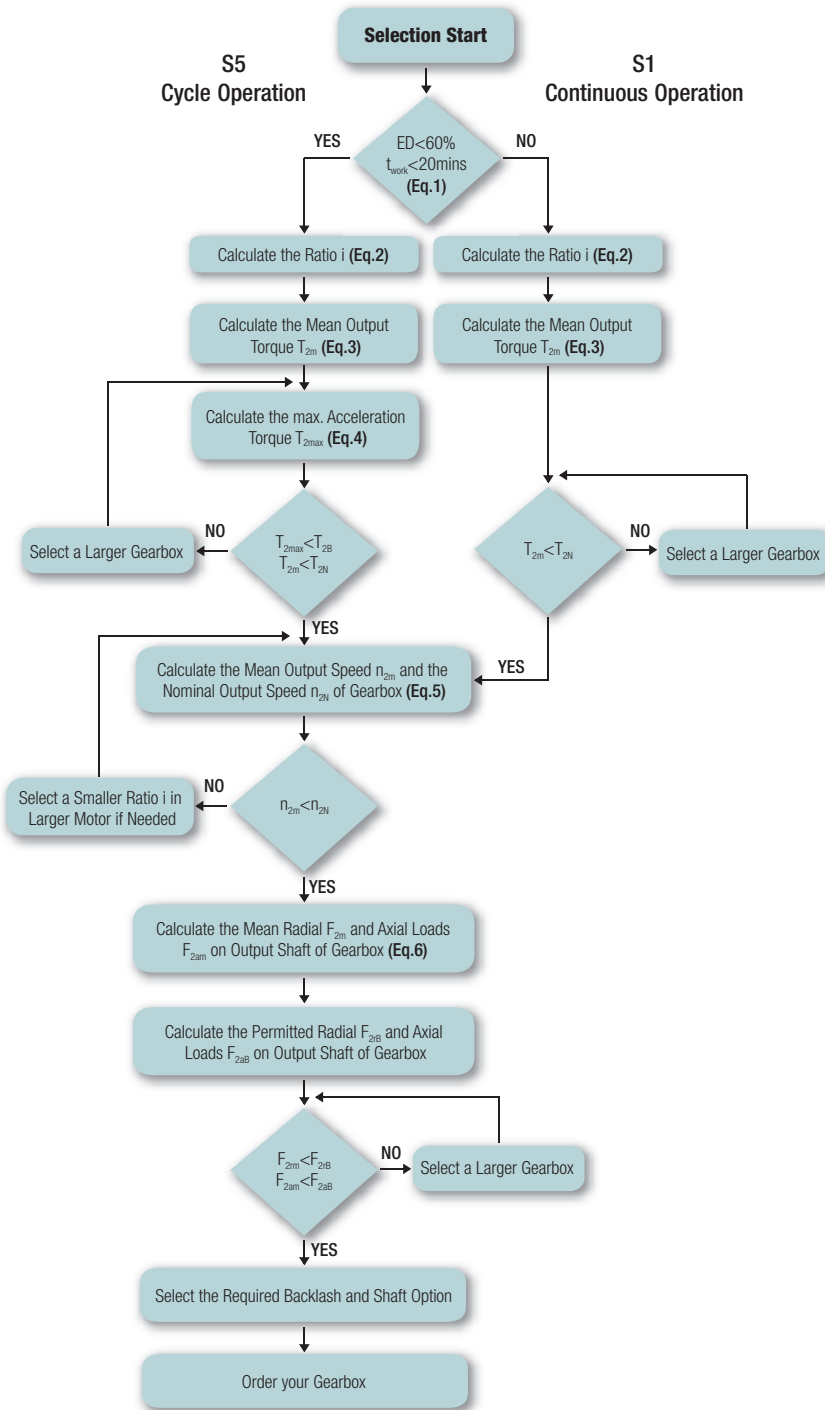

Recommended (for S5 Cycle Operation)

The general design is given for


$$\frac{J_L}{i^2} < 4 \times J_m$$

The optimal design is given for

$$\frac{J_L}{i^2} \sim J_m$$

J_L Load Inertia

J_m Motor Inertia

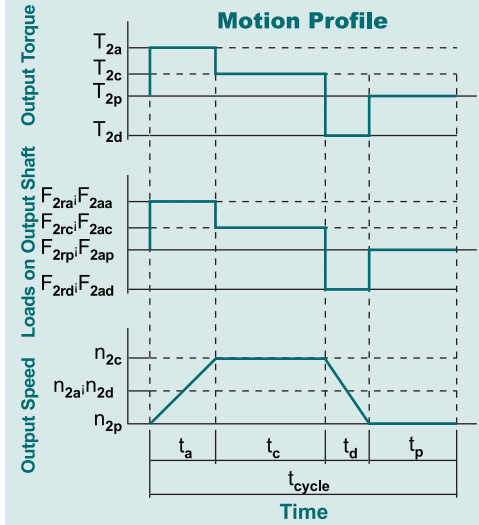

Eq. 1

$$ED = \frac{t_a + t_c + t_d}{t_{cycle}} \times 100\%, t_{work} = t_a + t_c + t_d$$

Index : a. Acceleration, c. Constant,
d. Deceleration, p. Pause

Eq. 2

$$i \cong \frac{n_m}{n_{work}}$$

n_m Output Speed of the Motor

n_{work} Working Speed

Eq. 3

$$T_{2m} = 3 \sqrt{\frac{n_{2a} \times t_a \times T_{2a}^3 + n_{2c} \times t_c \times T_{2c}^3 + n_{2d} \times t_d \times T_{2d}^3}{n_{2a} \times t_a + n_{2c} \times t_c + n_{2d} \times t_d}}$$

Eq. 4

$$T_{2max} = T_{mB} \times i \times k_s \times \eta$$

where K_s is

K_s	No. of Cycles / hr
1.0	0 ~ 1,000
1.1	1,000 ~ 1,500
1.3	1,500 ~ 2,000
1.6	2,000 ~ 3,000
1.8	3,000 ~ 5,000

T_{mB} Max. Output Torque of the Motor

η Efficiency of the Gearbox

Eq. 5

$$n_{2a} = n_{2d} = \frac{1}{2} \times n_{2c}$$

$$n_{2m} = \frac{n_{2a} \times t_a + n_{2c} \times t_c + n_{2d} \times t_d}{t_a + t_c + t_d}$$

$$n_{2N} = \frac{n_{1N}}{i}$$


Eq. 6

$$F_{2rm} = 3 \sqrt{\frac{n_{2a} \times t_a \times F_{2ra}^3 + n_{2c} \times t_c \times F_{2rc}^3 + n_{2d} \times t_d \times F_{2rd}^3}{n_{2a} \times t_a + n_{2c} \times t_c + n_{2d} \times t_d}}$$

$$F_{2am} = 3 \sqrt{\frac{n_{2a} \times t_a \times F_{2aa}^3 + n_{2c} \times t_c \times F_{2ac}^3 + n_{2d} \times t_d \times F_{2ad}^3}{n_{2a} \times t_a + n_{2c} \times t_c + n_{2d} \times t_d}}$$


Stainless Steel High Precision Inline Planetary Gearboxes

Dimensional drop-in
for Bayside Stealth
PS Series

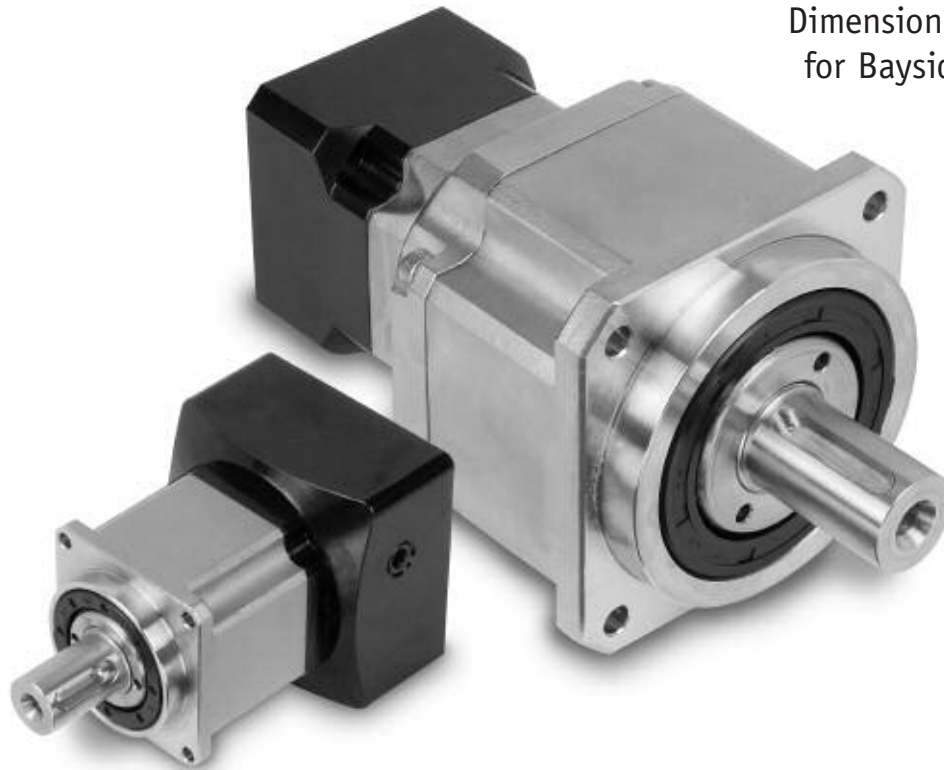


Ordering Number System for PL2 Models

Example: PL2060-005-KS-M-0000-00.0

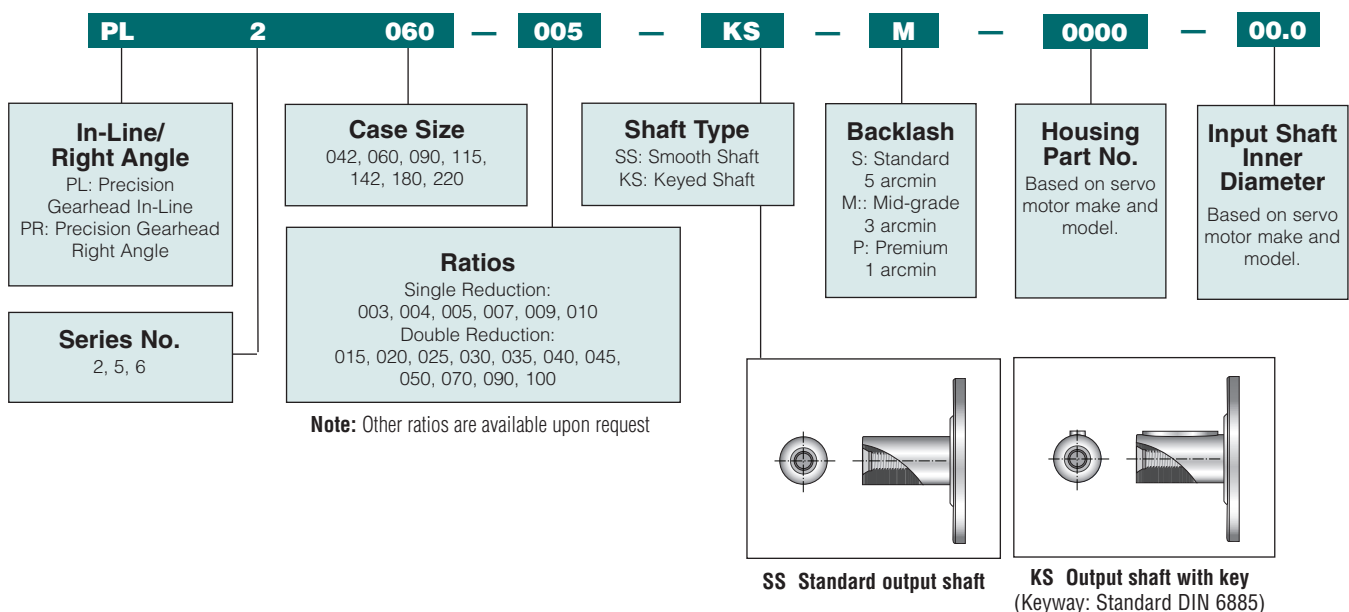

PL2 Series

Features

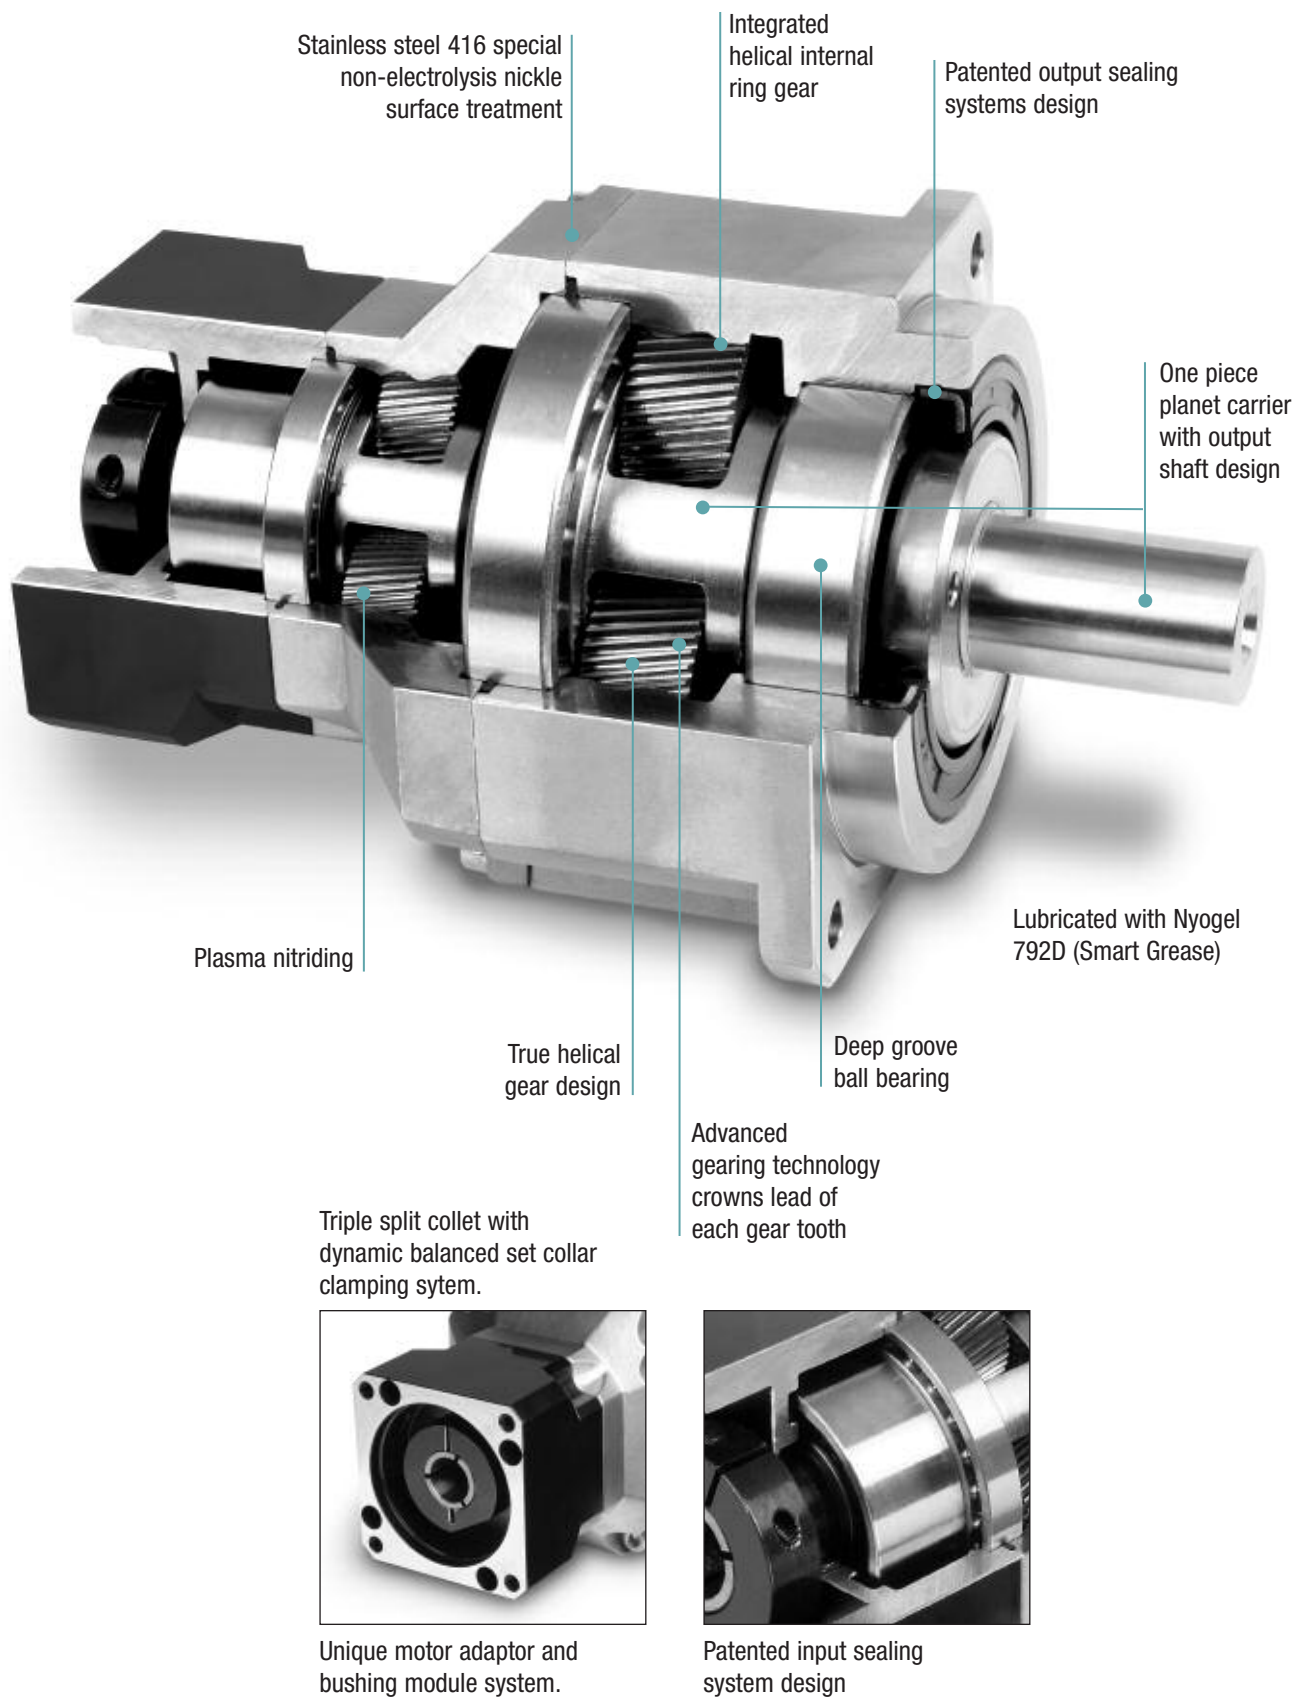

Specifications		Model No.								
		Stages	Ratio ¹	PL2042	PL2060	PL2090	PL2115	PL2142	PL2180	PL2220
Nominal Output Torque T_{2N}	Nm	1	3	20	55	130	208	342	588	1,140
			4	19	50	140	290	542	1,050	1,700
			5	22	60	160	330	650	1,200	2,000
			7	19	50	140	300	550	1,100	1,800
			9	14	40	100	230	450	900	1,500
			10	14	40	100	230	450	900	1,500
		2	15	20	55	130	208	342	588	1,140
			20	19	50	140	290	542	1,050	1,700
			25	22	60	160	330	650	1,200	2,000
			30	20	55	150	310	600	1,100	1,900
			35	19	50	140	300	550	1,100	1,800
			40	17	45	120	260	500	1,000	1,600
			45	14	40	100	230	450	900	1,500
			50	22	60	160	330	650	1,200	2,000
			70	19	50	140	300	550	1,100	1,800
			90	14	40	100	230	450	900	1,500
			100	14	40	100	230	450	900	1,500
Max. Output Torque T_{2B}	Nm	1,2	3~100	3 times of Nominal Output Torque						
Nominal Input Speed n_{1N}	rpm	1,2	3~100	5,000	5,000	4,000	4,000	3,000	3,000	2,000
Max. Input Speed n_{1B}	rpm	1,2	3~100	10,000	10,000	8,000	8,000	6,000	6,000	4,000
Premium Backlash P	arcmin	1	3~10	—	—	≤1	≤1	≤1	≤1	≤1
		2	15~100	—	—	—	≤3	≤3	≤3	≤3
Mid-grade Backlash M	arcmin	1	3~10	≤3	≤3	≤3	≤3	≤3	≤3	≤3
		2	15~100	≤5	≤5	≤5	≤5	≤5	≤5	≤5
Standard Backlash S	arcmin	1	3~10	≤5	≤5	≤5	≤5	≤5	≤5	≤5
		2	15~100	≤7	≤7	≤7	≤7	≤7	≤7	≤7
Torsional Rigidity	Nm/arcmin	1,2	3~100	3	7	14	25	50	145	225
Max. Radial Load F_{21B} ²	N	1,2	3~100	780	1,530	3,250	6,700	9,400	14,500	50,000
Max. Axial Load F_{2aB} ²	N	1,2	3~100	390	765	1,625	3,350	4,700	7,250	25,000
Service Life	hr	1,2	3~100	20,000*						
Efficiency η	%	1	3~10	≥97%						
		2	15~100	≥94%						
Weight	kg	1	3~10	0.5	1.3	3.7	7.8	14.5	29	48
		2	15~100	0.8	1.5	4.1	9	17.5	33	60
Operating Temp	°C	1,2	3~100	-10°C ~ + 90°C						
Lubrication		1,2	3~100	synthetic gear grease (NYOGEL 792D)						
Degree of Gearbox Protection		1,2	3~100	IP65						
Mounting Position		1,2	3~100	all directions						
Noise Level ($n_s=3000$ rpm)	dB	1,2	3~100	≤56	≤58	≤60	≤63	≤65	≤67	≤70


Gearbox Inertia		Model No.								
		Stages	Ratio	PL2042	PL2060	PL2090	PL2115	PL2142	PL2180	PL2220
Mass Moments of Inertia J ,	kg • cm ²	1	3	0.05	0.24	1.04	5.05	14.61	46.76	118.39
			4	0.04	0.18	0.71	3.67	10.57	33.53	81.87
			5	0.04	0.17	0.64	3.34	9.66	30.31	73.00
			7	0.03	0.15	0.52	2.85	8.24	25.57	59.89
			9	0.03	0.14	0.48	2.66	7.65	23.63	54.51
			10	0.03	0.14	0.47	2.62	7.54	23.23	53.40
		2	15	0.04	0.04	0.22	0.70	3.50	10.19	31.69
			20	0.04	0.04	0.21	0.66	3.39	9.84	30.66
			25	0.04	0.04	0.21	0.66	3.37	9.76	30.43
			30	0.04	0.04	0.21	0.65	3.34	9.66	30.15
			35	0.04	0.04	0.21	0.64	3.32	9.62	30.02
			40	0.04	0.04	0.21	0.64	3.31	9.58	29.92
			45	0.04	0.04	0.20	0.64	3.30	9.56	29.85
			50	0.03	0.03	0.15	0.52	2.63	7.56	23.26
			70	0.03	0.03	0.15	0.52	2.61	7.53	23.16
			90	0.03	0.03	0.15	0.52	2.61	7.51	23.11
			100	0.03	0.03	0.15	0.52	2.61	7.51	23.11

1. Ratio ($i=N_{in}/N_{out}$)
 *S1 service life 10,000 hrs

2. F_{2B} F_{2aB} applied to the output shaft center @ 100 rpm

PL2 Series

Dimensions (1-stage, Ratio i = 3-10)

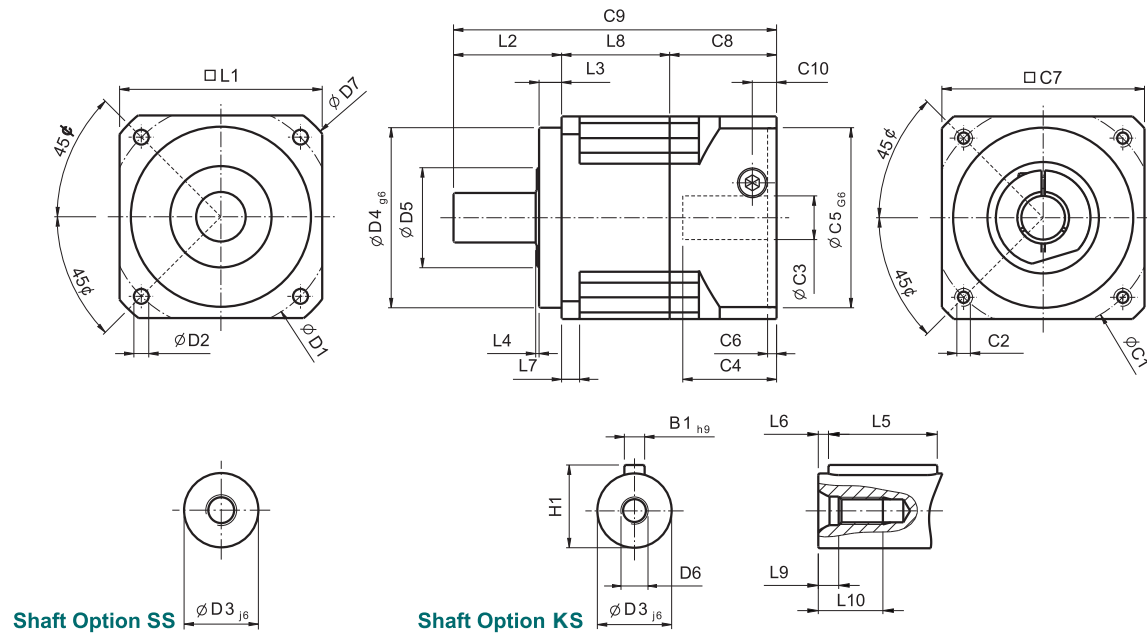

Shaft Option SS

Shaft Option KS


Note: Dimensions shown in mm

Dimension	PL2042	PL2060	PL2090	PL2115	PL2142	PL2180	PL2220
D1	50	70	100	130	165	215	250
D2	3.4	5.5	6.6	9	11	13	17
D3 ^{j6}	13	16	22	32	40	55	75
D4 ^{g6}	35	50	80	110	130	160	180
D5	22	30	45	60	75	95	115
D6	M4 x 0.7P	M5 x 0.8P	M8 x 1.25P	M12 x 1.75P	M16 x 2P	M20 x 2.5P	M20 x 2.5P
D7	56	80	116	152	185	240	292
L1	42	60	90	115	142	180	220
L2	26	37	48	65	97	105	138
L3	5.5	7	10	12	15	20	30
L4	1	1.5	1.5	2	3	3	3
L5	16	25	32	40	63	70	90
L6	2	2	3	5	5	6	7
L7	4	6	8	10	12	15	20
L8	31	35	48	61	71.5	84.5	93
L9	3.2	4	6	9.5	12	15	15
L10	10	12.5	19	28	36	42	42
C1 ³	46	70	100	130	165	215	235
C2 ³	M4 x 0.7P	M5 x 0.8P	M6 x 1P	M8 x 1.25P	M10 x 1.5P	M12 x 1.75P	M12 x 1.75P
C3 ³	≤11	*≤14 / ≤16	*≤19 / ≤24	≤32	≤38	≤48	≤55
C4 ³	25	30	40	50	60	82	82
C5 ^{g6}	30	50	80	110	130	180	200
C6 ³	3.5	4	4	5	6	6	6
C7 ³	42	60	90	115	142	190	220
C8 ³	29.5	41.5	48	61	71	96	100
C9 ³	86.5	113.5	144	187	239.5	285.5	331
C10 ³	8.75	10	11.25	13.5	16	18.25	20
B1 ^{h9}	5	5	6	10	12	16	20
H1	15	18	24.5	35	43	59	79.5

3. C1-C10 are motor specific dimensions (metric std shown).

* PL2060 ratio 5,10 provides C3 ≤ 16 option. * PL2090 ratio 3-10 provides C3 = 24 option.

Dimensions (2-stage, Ratio i = 15-100)

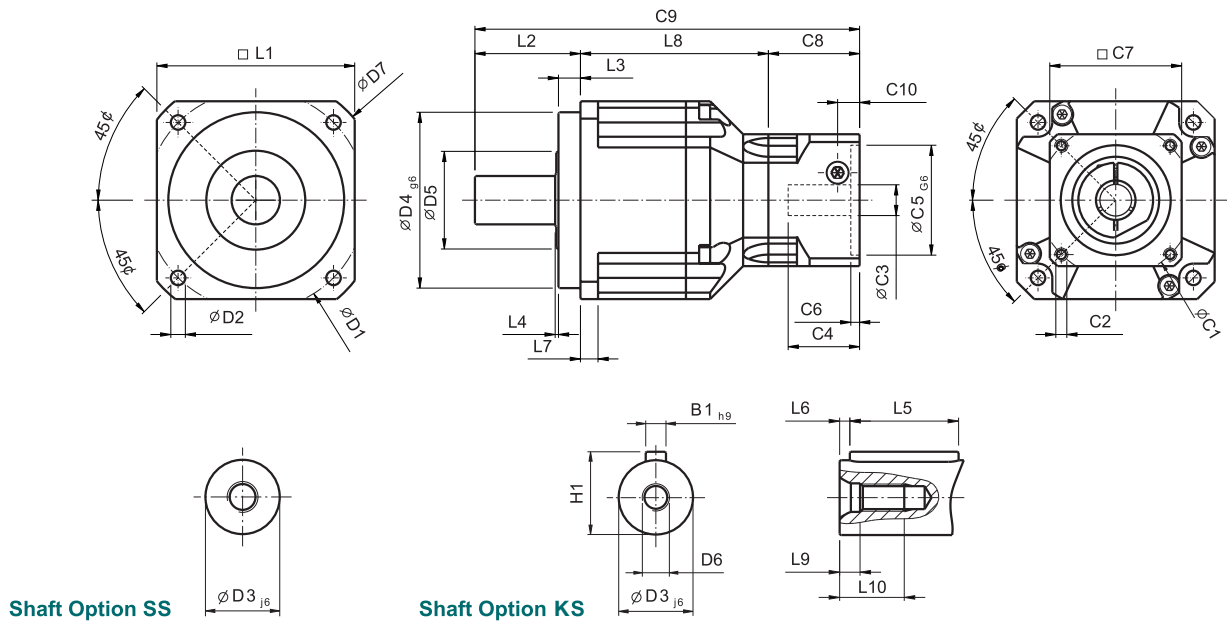

Note: Dimensions shown in mm



Dimension	PL2042	PL2060	PL2090	PL2115	PL2142	PL2180	PL2220
D1	50	70	100	130	165	215	250
D2	3.4	5.5	6.6	9	11	13	17
D3^{j6}	13	16	22	32	40	55	75
D4^{g6}	35	50	80	110	130	160	180
D5	22	30	45	60	75	95	115
D6	M4 x 0.7P	M5 x 0.8P	M8 x 1.25P	M12 x 1.75P	M16 x 2P	M20 x 2.5P	M20 x 2.5P
D7	56	80	116	152	185	240	292
L1	42	60	90	115	142	180	220
L2	26	37	48	65	97	105	138
L3	5.5	7	10	12	15	20	30
L4	1	1.5	1.5	2	3	3	3
L5	16	25	32	40	63	70	90
L6	2	2	3	5	5	6	7
L7	4	6	8	10	12	15	20
L8	58.5	72	85.5	113	135	161.5	178.5
L9	3.2	4	6	9.5	12	15	15
L10	10	12.5	19	28	36	42	42
C1⁴	46	46	70	100	130	165	215
C2⁴	M4 x 0.7P	M4 x 0.7P	M5 x 0.8P	M6 x 1P	M8 x 1.25P	M10 x 1.5P	M12 x 1.75P
C3⁴	≤11	*≤11 / ≤12	*≤14/≤16	*≤19 / ≤24	≤32	≤38	≤48
C4⁴	25	25	30	40	50	60	82
C5^{4 G6}	30	30	50	80	110	130	180
C6⁴	3.5	3.5	4	4	5	6	6
C7⁴	42	42	60	90	115	142	190
C8⁴	29.5	29.5	41.5	48	61	71	96
C9⁴	114	138.5	175	226	293	337.5	412.5
C10⁴	8.75	8.75	10	11.25	13.5	16	18.25
B1^{h9}	5	5	6	10	12	16	20
H1	15	18	24.5	35	43	59	79.5

4. C1-C10 are motor specific dimensions (metric std shown).

* PL2060 ratio 15-50 provides C3 ≤ 12 option. * PL2090 ratio 15-50 provides C3 ≤ 16 option. * PL2115 ratio 15-100 provides C3 = 24 option.

Radial and axial loads allowed on the output shaft

The permitted radial and axial loads on the output shaft of the gearbox is dependent upon the design of the gearbox supporting bearings. The Boston Gear PL2 Series uses an oversized, straddle mount, ball bearing design, which can take heavy loads from both axes.

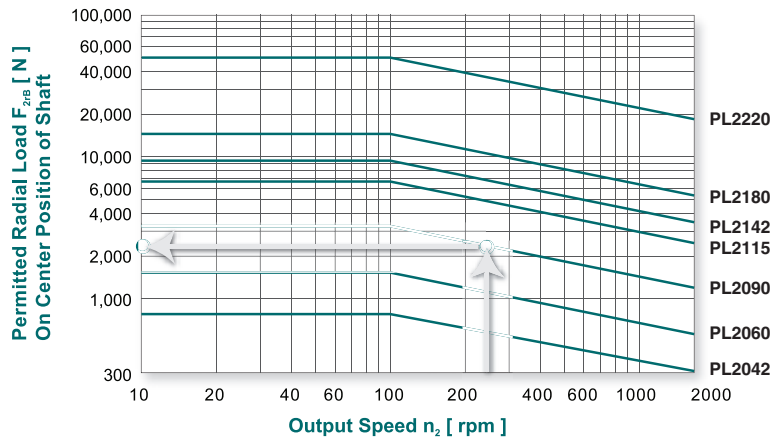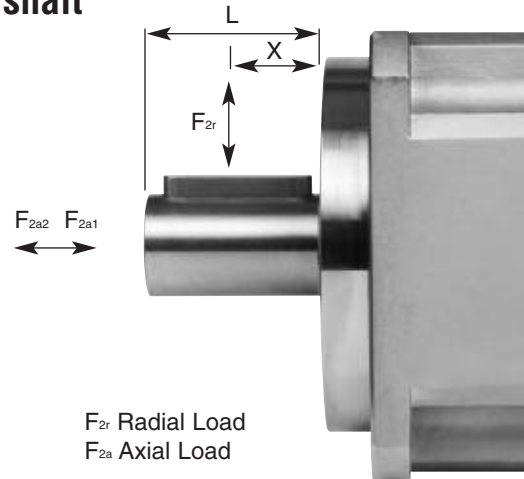


If the radial force F_{2r} **is** exerted on the center of the output shaft, then $X=0.5 \times L$.

Under these conditions the permitted radial load can be determined from the graph on the left.

The permitted axial load can then be calculated by using the following formulas:

$$F_{2a1B} = 0.2 \times F_{2rB} \text{ (axial force towards the gearhead)}$$

$$F_{2a2B} = 0.1 \times F_{2rB} \text{ (axial force away from the gearhead)}$$

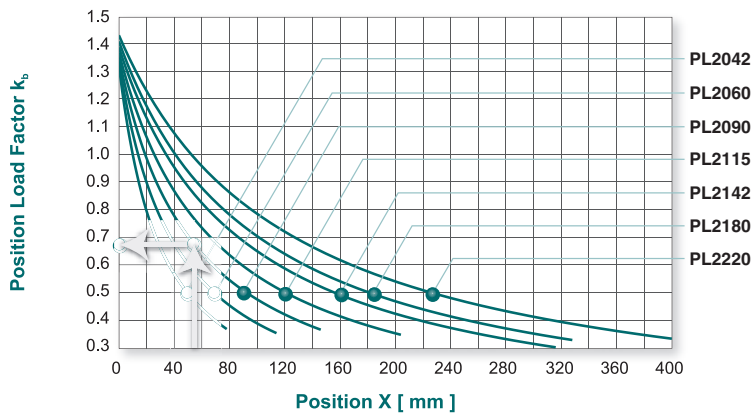

If the radial force F_{2r} **is not** exerted on the center of the output shaft then X is the distance measured from the output seal.

The position load factor k_b can then be determined by the graph to the left.

Under these conditions the radial and axial loads can be calculated by using the following formulas:

Radial Load:

$$F'_{2rB} = k_b \times F_{2rB}$$

Axial Load:

$$F'_{2a1B} = 0.2 \times F'_{2rB}$$

$$F'_{2a2B} = 0.1 \times F'_{2rB}$$

* Continuous running reduces service life by 50%.


Stainless Steel High Precision Right Angle Planetary Gearboxes

Dimensional drop-in
for Bayside Stealth
RS Right Angle
Series



Ordering Number System for PR2 Models


Example: PR2060-005-SS-M-0000-00.0

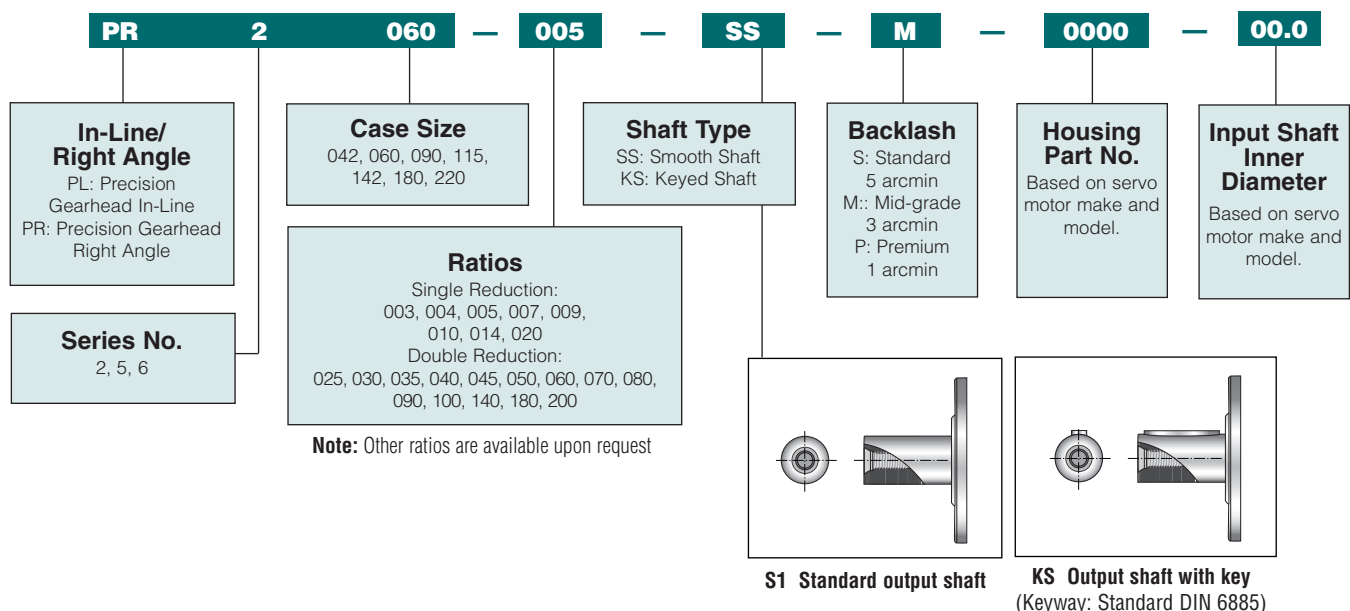


PR2 Series

Features


- Higher output torque rating by using spiral bevel gear design. 30% more than straight bevel gear.
- Allows input speeds up to 8 times than with straight bevel gearing.
- Improved load sharing through precision tooth design and longer service life.
- Ground gears verified with sophisticated software, ensures smooth, quiet operation with reduced backlash (≤ 2 arcmin).
- High tensile low weight single piece aluminum alloy housing for highest stiffness.
- Maintenance free lifetime lubrication.
- Patented sealing design for high speed and continuous running.
- High efficiency up to 95%. Low noise level down to 61dB.
- Most ratios available from 3~200.

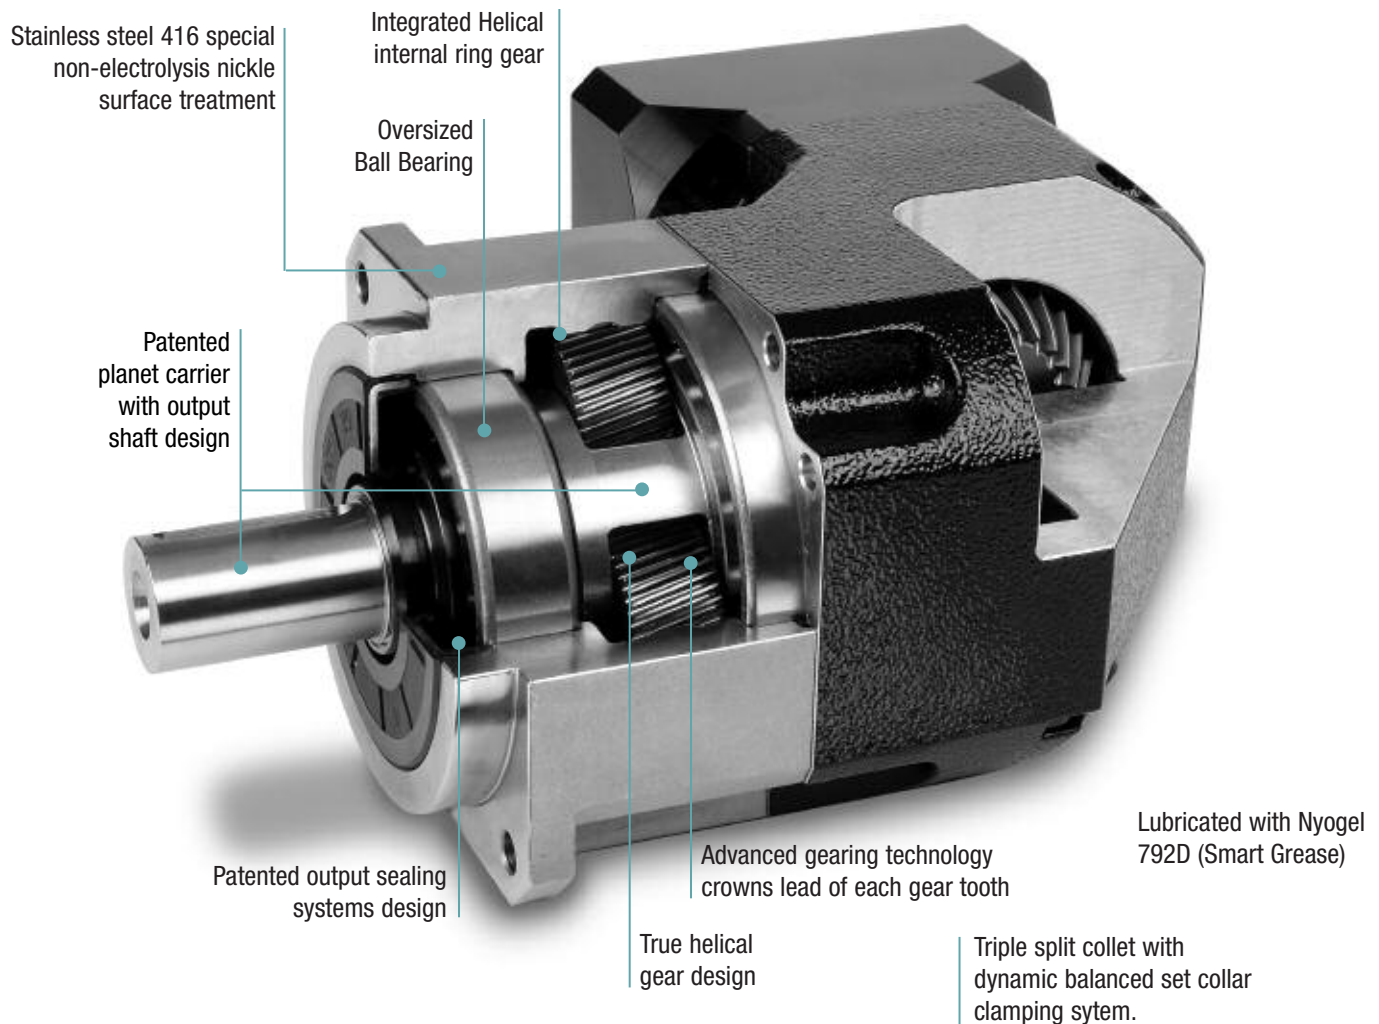

Plasma nitriding

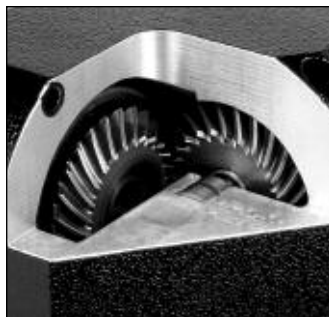

Spiral Bevel gear design

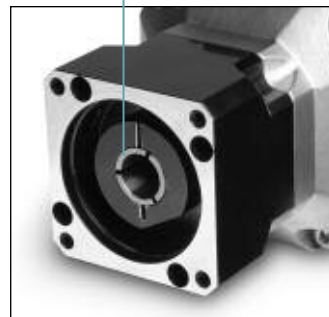

Unique motor adaptor and bushing module system.

Specifications		Model No.								
		Stages	Ratio ¹	PR2042	PR2060	PR2090	PR2115	PR2142	PR2180	PR2220
Nominal Output Torque T_{2N}	Nm	1	3	9	36	90	195	342	588	1,140
			4	12	48	120	195	520	1,040	1,680
			5	15	60	150	260	650	1,200	2,000
			7	19	50	140	310	550	1,100	1,800
			9	14	40	100	260	450	900	1,500
			10	14	40	100	230	450	900	1,500
			14	-	42	140	300	550	1,100	1,800
			20	-	40	100	230	450	900	1,500
		2	25	15	60	150	325	650	1,200	2,000
			30	20	55	150	310	600	1,100	1,900
			35	19	50	140	300	550	1,100	1,800
			40	17	45	120	260	500	1,000	1,600
			45	14	40	100	230	450	900	1,500
			50	14	60	100	230	650	1,200	2,000
			70	19	50	140	300	550	1,100	1,800
			90	14	40	100	230	450	900	1,500
			100	14	40	100	230	450	900	1,500
			140	-	-	140	300	550	1,100	1,800
			180	-	-	100	230	450	900	1,500
			200	-	-	100	230	450	900	1,500
Max. Output Torque T_{2B}	Nm	1,2	3-200	3 times of Nominal Output Torque						
Nominal Input Speed n_{1N}	rpm	1,2	3-200	5,000	5,000	4,000	4,000	3,000	3,000	2,000
Max. Input Speed n_{1B}	rpm	1,2	3-200	10,000	10,000	8,000	8,000	6,000	6,000	4,000
Premium Backlash P	arcmin	1	3-20	-	-	≤2	≤2	≤2	≤2	≤2
		2	25-200	-	-	≤4	≤4	≤4	≤4	≤4
Mid-grade Backlash M	arcmin	1	3-20	≤4	≤4	≤4	≤4	≤4	≤4	≤4
		2	25-200	≤7	≤7	≤7	≤7	≤7	≤7	≤7
Standard Backlash S	arcmin	1	3-20	≤6	≤6	≤6	≤6	≤6	≤6	≤6
		2	25-200	≤9	≤9	≤9	≤9	≤9	≤9	≤9
Torsional Rigidity	Nm/arcmin	1,2	3-200	3	7	14	25	50	145	225
Max. Radial Load F_{2B}	N	1,2	3-200	780	1,530	3,250	6,700	9,400	14,500	50,000
Max. Axial Load F_{2B}	N	1,2	3-200	390	765	1,625	3,350	4,700	7,250	25,000
Service Life	hr	1,2	3-200	20,000*						
		1	3-20	≥95%						
Efficiency η	%	2	25-200	≥92%						
Weight	kg	1	3-20	0.9	2.1	6.4	13	24.5	51	83
		2	25-200	1.2	1.5	7.8	14.2	27.5	54	95
Operating Temp	C	1,2	3-200	-10°C~+90°C						
Lubrication		1,2	3-200	synthetic gear grease (NYOGEL 792D)						
Degree of Gearbox Protection		1,2	3-200	IP65						
Mounting Position		1,2	3-200	all directions						
Noise Level ($n_1=3000$ rpm)	dB	1,2	3-200	≤61	≤63	≤65	≤68	≤70	≤72	≤74

Gearbox Inertia		Model No.								
		Stages	Ratio	PR2042	PR2060	PR2090	PR2115	PR2142	PR2180	PR2220
Mass Moments of Inertia J1	kg • cm2	1	3-10	0.09	0.35	2.25	6.84	23.4	68.9	135.4
			14	-	0.07	1.87	6.25	21.8	65.6	119.8
			20	-	0.07	1.87	6.25	21.8	65.6	119.8
		2	25-100	0.09	0.09	0.35	2.25	6.84	23.4	66.9
			140-200	-	-	0.31	1.87	6.25	21.8	65.6


1. Ratio ($i=N_1/N_2$)

*S1 service life 10,000 hrs

2. F_{2B} applied to the output shaft center @ 100 rpm

PR2 Series

Dimensions (1-stage, Ratio i = 3-20)

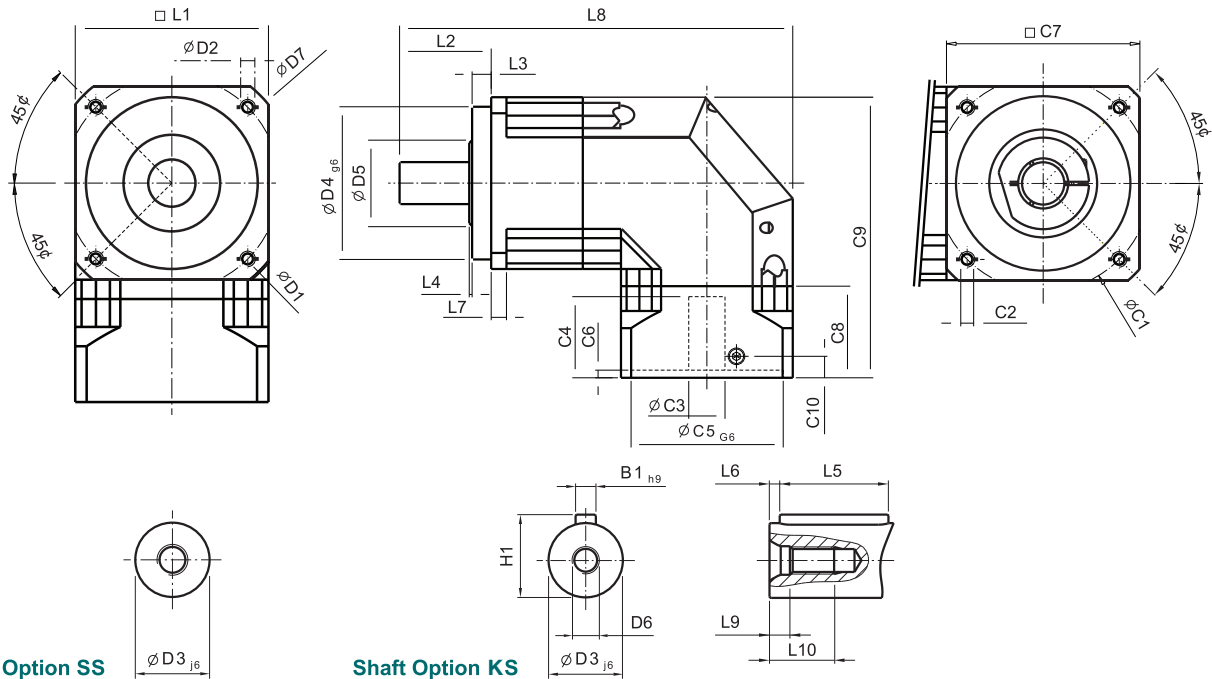


Note: Dimensions shown in mm

Dimension	PR2042	PR2060	PR2090	PR2115	PR2142	PR2180	PR2220
D1	50	70	100	130	165	215	250
D2	3.4	5.5	6.6	9	11	13	17
D3 _{j6}	13	16	22	32	40	55	75
D4 _{g6}	35	50	80	110	130	160	180
D5	22	30	45	60	75	95	115
D6	M4 x 0.7P	M5 x 0.8P	M8 x 1.25P	M12 x 1.75P	M16 x 2P	M20 x 2.5P	M20 x 2.5P
D7	56	80	116	152	185	240	292
L1	42	60	90	115	142	180	220
L2	26	37	48	65	97	105	138
L3	5.5	7	10	12	15	20	30
L4	1	1.5	1.5	2	3	3	3
L5	16	25	32	40	63	70	90
L6	2	2	3	5	5	6	7
L7	4	6	8	10	12	15	20
L8	111.5	145	203	259	333	394	484
L9	3.2	4	6	9.5	12	15	15
L10	10	12.5	19	28	36	42	42
C1 ³	46	70	100	130	165	215	235
C2 ³	M4 x 0.7P	M5 x 0.8P	M6 x 1P	M8 x 1.25P	M10 x 1.5P	M12 x 1.75P	M12 x 1.75P
C3 ³	≤11	≤14/≤16	*≤19/≤24	≤32	≤38	≤48	≤55
C4 ³	25	30	40	50	60	82	82
C5 _{g6} ³	30	50	80	110	130	180	200
C6 ³	3.5	4	4	5	6	6	6
C7 ³	42	60	90	115	142	190	220
C8 ³	29.5	41.5	48	61	71	96	100
C9 ³	90.5	108	153	192	236	301	345
C10 ³	8.75	10	11.25	13.5	16	18.25	20
B1 h9	5	5	6	10	12	16	20
H1	15	18	24.5	35	43	59	79.5

3. C1-C10 are motor specific dimensions (metric std shown).

* PR2090 C3 option = 24 option.

Dimensions (2-stage, Ratio i = 25-200)

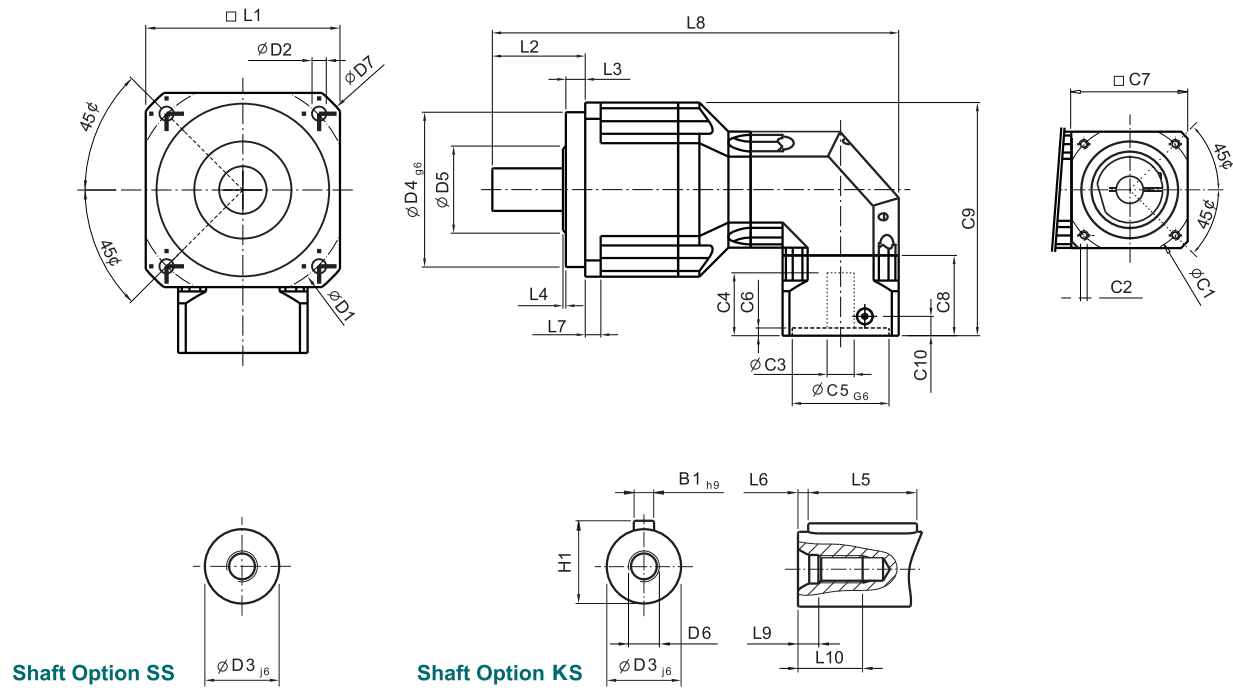

Note: Dimensions shown in mm



Dimension	PR2042	PR2060	PR2090	PR2115	PR2142	PR2180	PR2220
D1	50	70	100	130	165	215	250
D2	3.4	5.5	6.6	9	11	13	17
D3 _{j6}	13	16	22	32	40	55	75
D4 _{g6}	35	50	80	110	130	160	180
D5	22	30	45	60	75	95	115
D6	M4 x 0.7P	M5 x 0.8P	M8 x 1.25P	M12 x 1.75P	M16 x 2P	M20 x 2.5P	M20 x 2.5P
D7	56	80	116	152	185	240	292
L1	42	60	90	115	142	180	220
L2	26	37	48	65	97	105	138
L3	5.5	7	10	12	15	20	30
L4	1	1.5	1.5	2	3	3	3
L5	16	25	32	40	63	70	90
L6	2	2	3	5	5	6	7
L7	4	6	8	10	12	15	20
L8	139	163.5	206.5	285	365	431	521
L9	3.2	4	6	9.5	12	15	15
L10	10	12.5	19	28	36	42	42
C1 ⁴	46	70	70	100	130	165	215
C2 ⁴	M4 x 0.7P	M4 x 0.7P	M5 x 0.8P	M6 x 1P	M8 x 1.25P	M10 x 1.5P	M12 x 1.75P
C3 ⁴	≤11	*≤11/≤12	*≤14/≤16	*≤19/≤24	≤32	≤38	≤48
C4 ⁴	25	25	30	40	50	60	82
C5 _{G6} ⁴	30	30	50	80	110	130	180
C6 ⁴	3.5	3.5	4	4	5	6	6
C7 ⁴	42	42	60	90	115	142	190
C8 ⁴	29.5	29.5	41.5	48	61	71	96
C9 ⁴	90.5	99.5	123	165.5	205.5	255	321
C10 ⁴	8.75	8.75	10	11.25	13.5	16	18.25
B1 _{h9}	5	5	6	10	12	16	20
H1	15	18	24.5	35	43	59	79.5

4. C1-C10 are motor specific dimensions (metric std shown).
 * PR2115 C3 option = 24 option.

PR2 Series

Radial and axial loads allowed on the output shaft

The permitted radial and axial loads on the output shaft of the gearbox is dependent upon the design of the gearbox supporting bearings. The Boston Gear PR2 series uses an oversized, straddle mount, ball bearing design, which can take heavy loads from both axes.

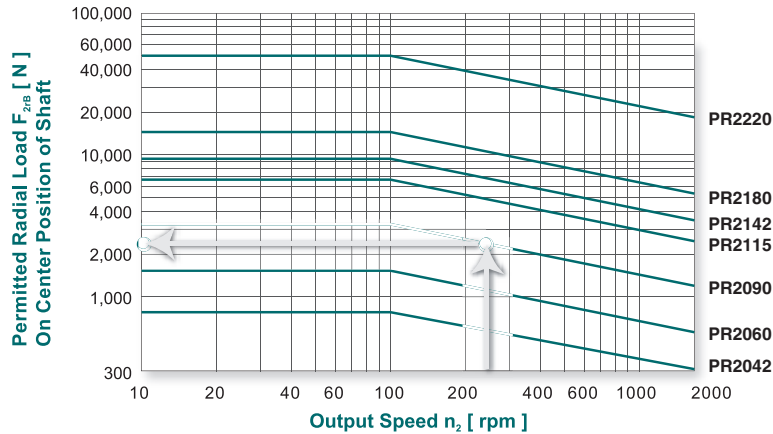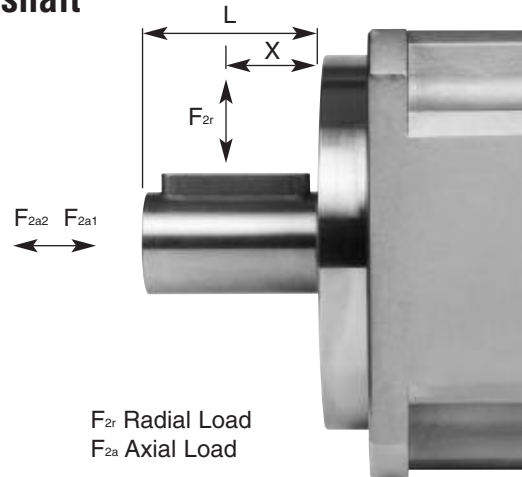


If the radial force F_{2r} **is** exerted on the center of the output shaft, then $X=0.5 \times L$.

Under these conditions the permitted radial load can be determined from the graph on the left.

The permitted axial load can then be calculated by using the following formulas:

$$F_{2a1B} = 0.2 \times F_{2rB} \text{ (axial force towards the gearhead)}$$

$$F_{2a2B} = 0.1 \times F_{2rB} \text{ (axial force away from the gearhead)}$$

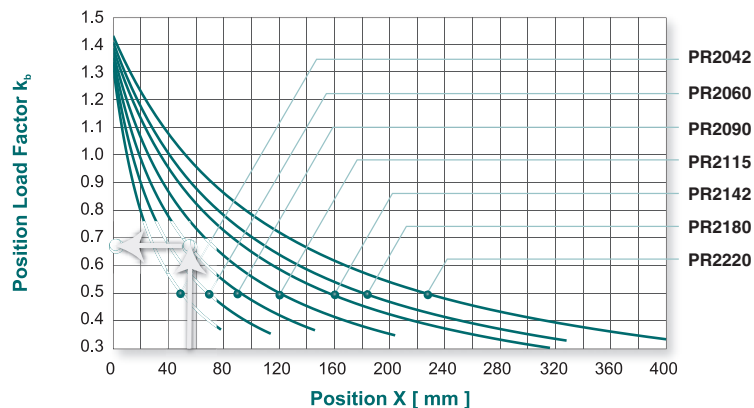

If the radial force F_{2r} **is not** exerted on the center of the output shaft, then X is the distance measured from the output seal.

The position load factor K_b can then be determined by the graph to the left.

Under these conditions the radial and axial loads can be calculated by using the following formulas:

Radial Load:

$$F'_{2rB} = K_b \times F_{2rB}$$

Axial Load:

$$F'_{2a1B} = 0.2 \times F'_{2rB}$$

$$F'_{2a2B} = 0.1 \times F'_{2rB}$$

* Continuous running reduces service life by 50%.


Stainless Steel High Precision Inline Planetary Gearboxes

Dimensional drop-in for
Alpha SP, Alpha SP+,
Stober Servofit P
and Micron
UltraTrue
Series




Ordering Number System for PL6 Models

Example: PL6180-009-KS-P-0000-00.0

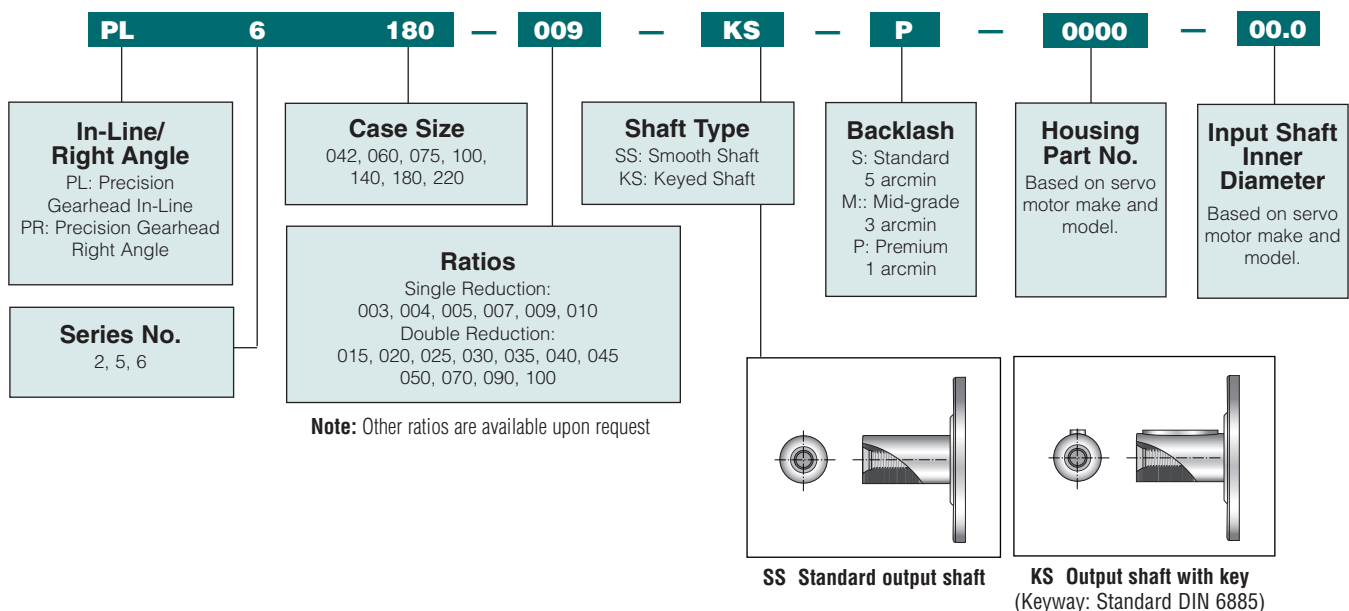

PL6 Series

Features

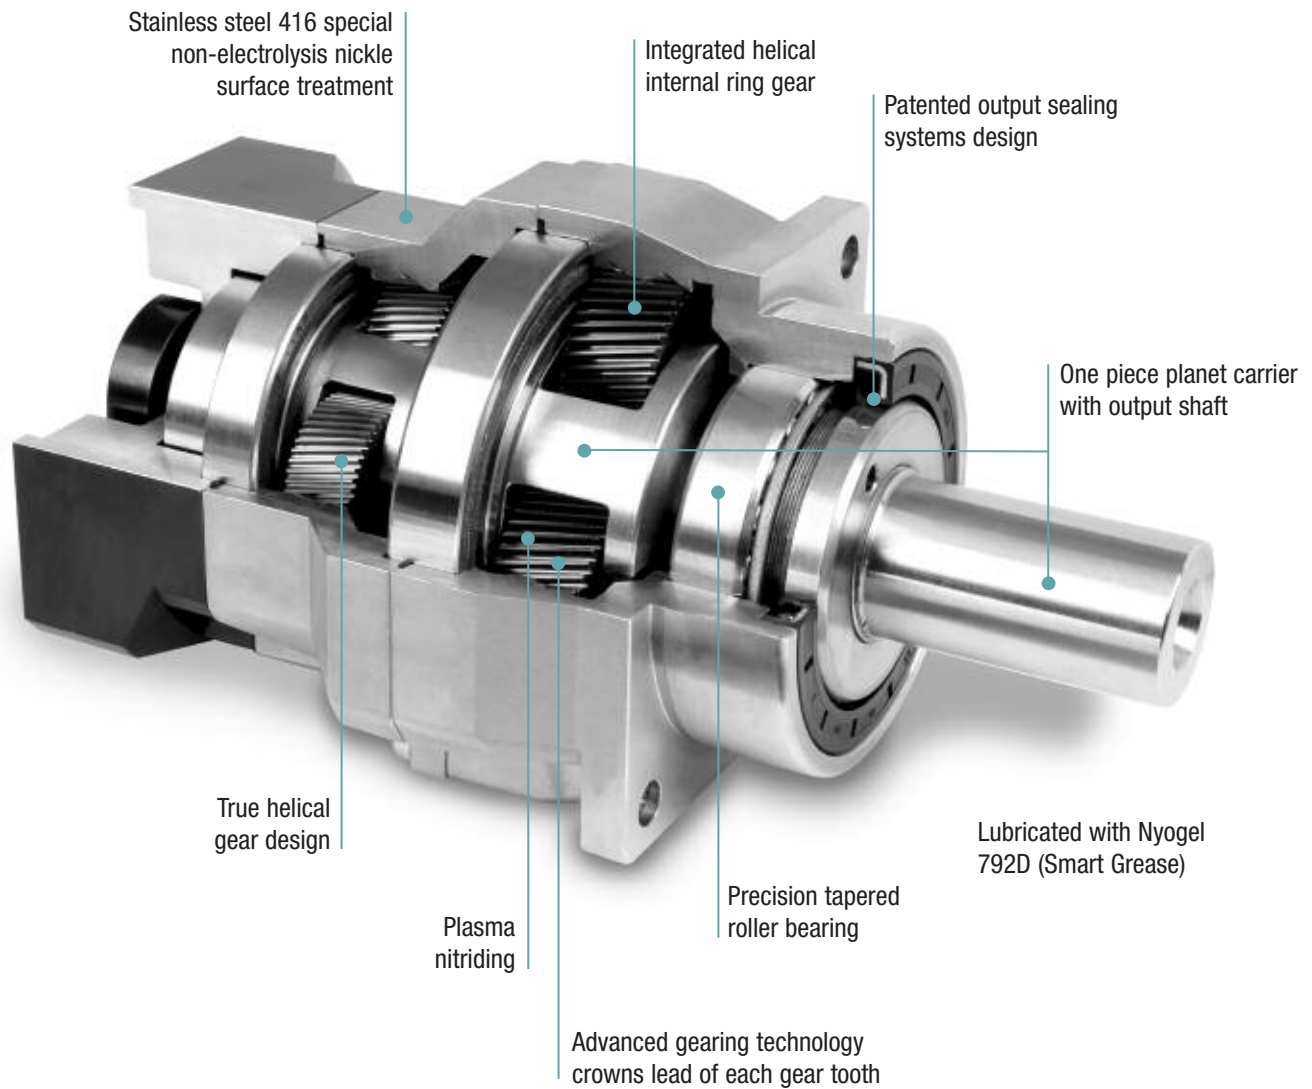

Unique motor adaptor and bushing module system.



Triple split collet with dynamic balanced set collar clamping system.



Precision tapered roller bearing support for increased radial and axial loading capacity

Specifications		Model No.								
		Stages	Ratio ¹	PL6042	PL6060	PL6075	PL6100	PL6140	PL6180	PL6220
Nominal Output Torque T_{2N}	Nm	1	3	20	55	130	208	342	588	1,140
			4	19	50	140	290	542	1,050	1,700
			5	22	60	160	330	650	1,200	2,000
			7	19	50	140	300	550	1,100	1,800
			9	14	40	100	230	450	900	1,500
			10	14	40	100	230	450	900	1,500
		2	15	20	55	130	208	342	588	1,140
			20	19	50	140	290	542	1,050	1,700
			25	22	60	160	330	650	1,200	2,000
			30	20	55	150	310	600	1,100	1,900
			35	19	50	140	300	550	1,100	1,800
			40	17	45	120	260	500	1,000	1,600
			45	14	40	100	230	450	900	1,500
			50	22	60	160	330	650	1,200	2,000
			70	19	50	140	300	550	1,100	1,800
			90	14	40	100	230	450	900	1,500
			100	14	40	100	230	450	900	1,500
Max. Output Torque T_{2B}	Nm	1,2	3~100	3 times of Nominal Output Torque						
Nominal Input Speed n_{1N}	rpm	1,2	3~100	5,000	5,000	4,000	4,000	3,000	3,000	2,000
Max. Input Speed n_{1B}	rpm	1,2	3~100	10,000	10,000	8,000	8,000	6,000	6,000	4,000
Premium Backlash P	arcmin	1	3~10	-	-	≤1	≤1	≤1	≤1	≤1
		2	15~100	-	-	-	≤3	≤3	≤3	≤3
Mid-grade Backlash M	arcmin	1	3~10	≤3	≤3	≤3	≤3	≤3	≤3	≤3
		2	15~100	≤5	≤5	≤5	≤5	≤5	≤5	≤5
Standard Backlash S	arcmin	1	3~10	≤5	≤5	≤5	≤5	≤5	≤5	≤5
		2	15~100	≤7	≤7	≤7	≤7	≤7	≤7	≤7
Torsional Rigidity	Nm/arcmin	1,2	3~100	3	7	14	25	50	145	225
Max. Radial Load F_{2B}	N	1,2	3~100	610	1,400	4,100	9,200	14,000	18,000	49,000
Max. Axial Load F_{2aB}	N	1,2	3~100	302	605	3,700	5,800	11,400	19,500	13,200
Service Life	hr	1,2	3~100	30,000*						
Efficiency η	%	1	3~10	≥97%						
		2	15~100	≥94%						
Weight	kg	1	3~10	0.6	1.3	3.7	6.9	13.7	28	48
		2	15~100	0.8	1.5	4.1	8.1	16.6	33	59
Operating Temp	°C	1,2	3~100	-10°C~+90°C						
Lubrication		1,2	3~100	synthetic gear grease (NYOGEL 792D)						
Degree of Gearbox Protection		1,2	3~100	IP65						
Mounting Position		1,2	3~100	all directions						
Noise Level ($n_1=3000$ rpm)	dB	1,2	3~100	≤56	≤58	≤60	≤63	≤65	≤67	≤70

Gearbox Inertia		Model No.								
		Stages	Ratio	PL6042	PL6060	PL6075	PL6100	PL6140	PL6180	PL6220
Mass Moments of Inertia J_1	kg • cm ²	1	3	0.05	0.24	1.04	4.94	14.35	46.39	117.96
			4	0.04	0.18	0.70	3.56	10.29	33.02	87.79
			5	0.04	0.16	0.63	3.24	9.43	29.95	72.06
			7	0.03	0.14	0.51	2.77	8.00	25.19	58.48
			9	0.03	0.13	0.46	2.58	7.42	23.26	53.13
			10	0.03	0.13	0.45	2.54	7.31	22.87	52.05
		2	15	0.04	0.04	0.18	0.68	3.39	9.89	31.16
			20	0.04	0.04	0.17	0.65	3.28	9.57	30.22
			25	0.04	0.04	0.17	0.64	3.27	9.51	30.03
			30	0.04	0.04	0.17	0.63	3.24	9.43	29.78
			35	0.04	0.04	0.17	0.63	3.23	9.39	29.67
			40	0.04	0.04	0.16	0.62	3.22	9.35	29.57
			45	0.04	0.04	0.16	0.62	3.21	9.33	29.51
			50	0.03	0.03	0.13	0.45	2.54	7.33	22.89
			70	0.03	0.03	0.13	0.45	2.53	7.30	22.80
			90	0.03	0.03	0.13	0.45	2.53	7.29	22.76
			100	0.03	0.03	0.13	0.45	2.53	7.29	22.76


1. Ratio ($i=N_1/N_{10}$)

*S1 service life 15,000 hrs

2. F_{2B} , F_{2aB} applied to the output shaft center @ 100 rpm

PL6 Series

Dimensions (1-stage, Ratio i = 3-10)

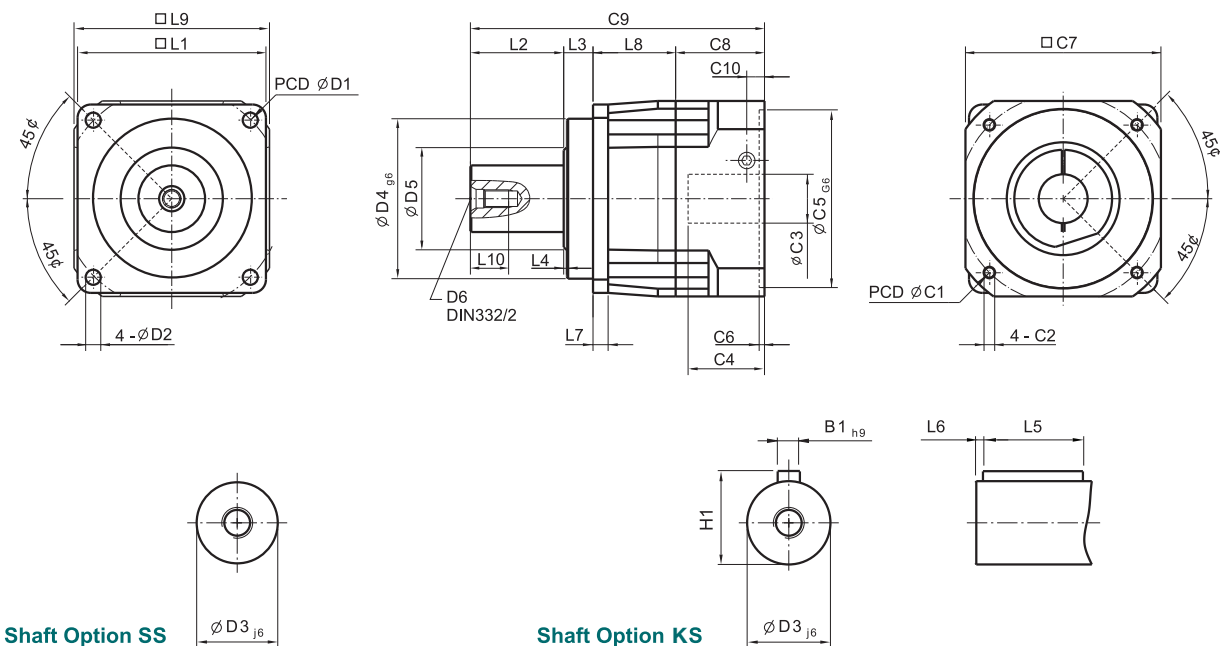

Shaft Option SS

Shaft Option KS


Note: Dimensions shown in mm

Dimension	PL6042	PL6060	PL6075	PL6100	PL6140	PL6180	PL6220
D1	50	68	85	120	165	215	250
D2	3.4	5.5	6.8	9	11	13	17
D3 _{H6}	13	16	22	32	40	55	75
D4 _{H6}	35	60	70	90	130	160	180
D5	22	30	45	60	75	95	115
D6	M4 x 0.7P	M5 x 0.8P	M8 x 1.25P	M12 x 1.75P	M16 x 2P	M20 x 2.5P	M20 x 2.5P
L1	42	62	76	105	142	180	220
L2	19.5	28.5	36	58	82	82	105
L3	6.5	20	20	30	30	30	33
L4	1	1.5	2	2	3	3	3
L5	16	25	32	40	63	70	90
L6	2	2	3	5	5	6	7
L7	4	6	7	10	12	15	20
L8	31	23.5	56	48.5	62	80.5	93
L9	42	60	90	115	142	180	220
L10	10	12.5	19	28	36	42	42
C1 ³	46	70	100	130	165	215	235
C2 ³	M4 x 0.7P	M5 x 0.8P	M6 x 1P	M8 x 1.25P	M10 x 1.5P	M12 x 1.75P	M12 x 1.75P
C3 ³	≤11	≤16	*≤19/≤24	≤32	≤38	≤48	≤55
C4 ³	25	30	40	50	60	82	82
C5 ³ _{H6}	30	50	80	110	130	180	200
C6 ³	3.5	4	4	5	6	6	6
C7 ³	42	60	90	115	142	190	220
C8 ³	29.5	41.5	48	61	71	96	100
C9 ³	86.5	113.5	160	197.5	245	288.5	331
C10 ³	8.75	10	11.25	13.5	16	18.25	20
B1 _{H9}	5	5	6	10	12	16	20
H1	15	18	24.5	35	43	59	79.5

3. C1-C10 are motor specific dimensions (metric std shown).

* PL6075 ratio 3-10 provides C3 = 24 option.

Dimensions (2-stage, Ratio i = 15-100)

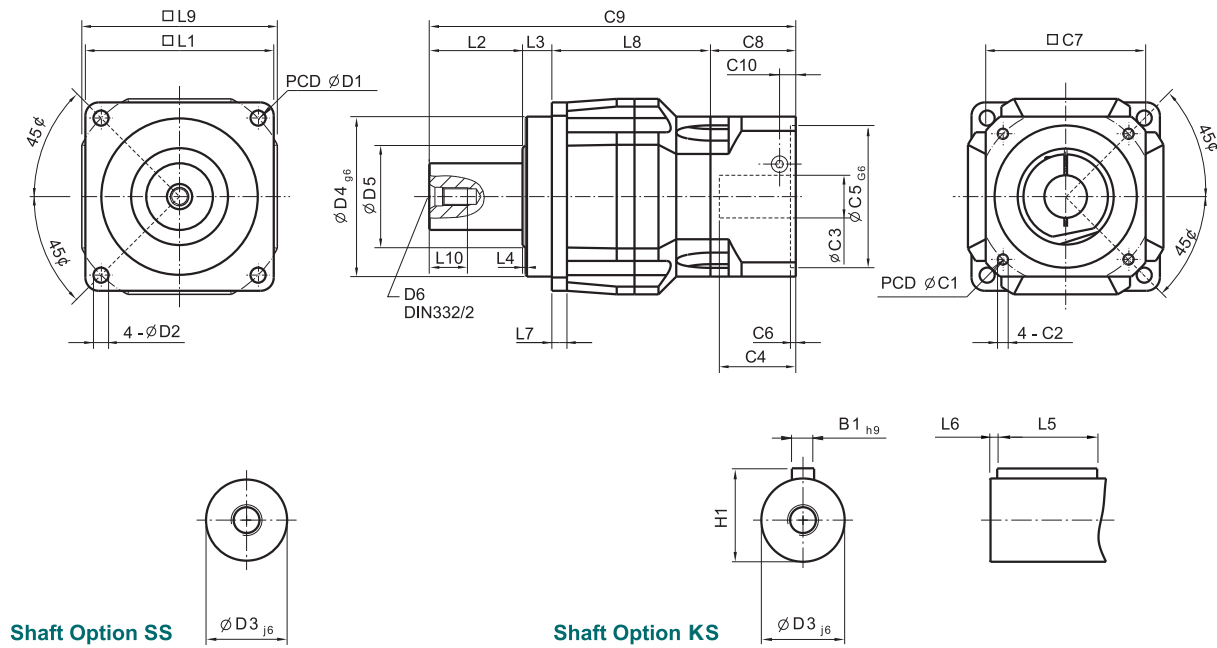

Shaft Option SS

Shaft Option KS

Note: Dimensions shown in mm



Dimension	PL6042	PL6060	PL6075	PL6100	PL6140	PL6180	PL6220
D1	50	68	85	120	165	215	250
D2	3.4	5.5	6.8	9	11	13	17
D3 _{j6}	13	16	22	32	40	55	75
D4 _{g6}	35	60	70	90	130	160	180
D5	22	30	45	60	75	95	115
D6	M4 x 0.7P	M5 x 0.8P	M8 x 1.25P	M12 x 1.75P	M16 x 2P	M20 x 2.5P	M20 x 2.5P
L1	42	62	76	105	142	180	220
L2	19.5	28.5	36	58	82	82	105
L3	6.5	20	20	30	30	30	33
L4	1	1.5	2	2	3	3	3
L5	16	25	32	40	63	70	90
L6	2	2	3	5	5	6	7
L7	4	6	7	10	12	15	20
L8	58.5	60.5	93.5	100.5	125.5	157.5	178.5
L9	42	60	90	115	142	180	220
L10	10	12.5	19	28	36	42	42
C1 ⁴	46	46	70	100	130	165	215
C2 ⁴	M4 x 0.7P	M4 x 0.7P	M5 x 0.8P	M6 x 1P	M8 x 1.25P	M10 x 1.5P	M12 x 1.75P
C3 ⁴	≤11	*≤11/≤12	*≤14/≤16	*≤19 / ≤24	≤32	≤38	≤48
C4 ⁴	25	25	30	40	50	60	82
C5 ⁴ _{g6}	30	30	50	80	110	130	180
C6 ⁴	3.5	3.5	4	4	5	6	6
C7 ⁴	42	42	60	90	115	142	190
C8 ⁴	29.5	29.5	41.5	48	61	71	96
C9 ⁴	114	138.5	191	236.5	298.5	340.5	412.5
C10 ⁴	8.75	8.75	10	11.25	13.5	16	18.25
B1 _{h9}	5	5	6	10	12	16	20
H1	15	18	24.5	35	43	59	79.5

4. C1-C10 are motor specific dimensions (metric std shown).

* PL6060 ratio 15-50 provides C3 ≤ 12 option. * PL6075 ratio 15-50 provides C3 ≤ 16 option * PL6100 ratio 15-100 provides C3 = 24 option.

Radial and axial loads allowed on the output shaft

The permitted radial and axial loads on the output shaft of the gearbox is dependent upon the design of the gearbox supporting bearings. The oversized, tapered roller bearing, straddle mount design for the PL6 Series accommodates high radial and axial loads with extended life. This design enables a 50% more load capacity than a standard angular contact bearing design.

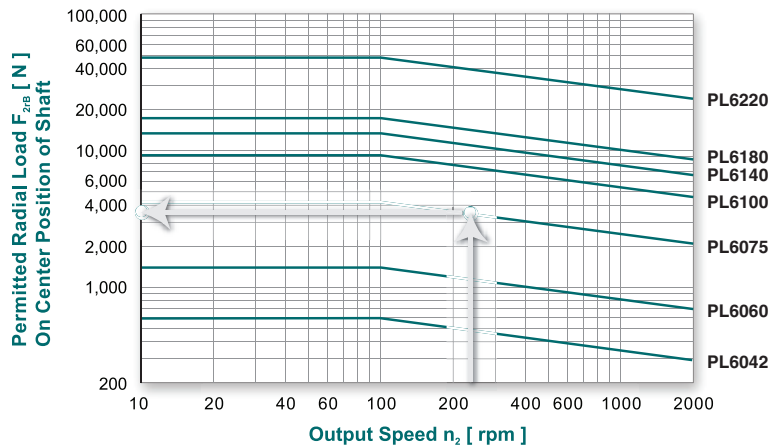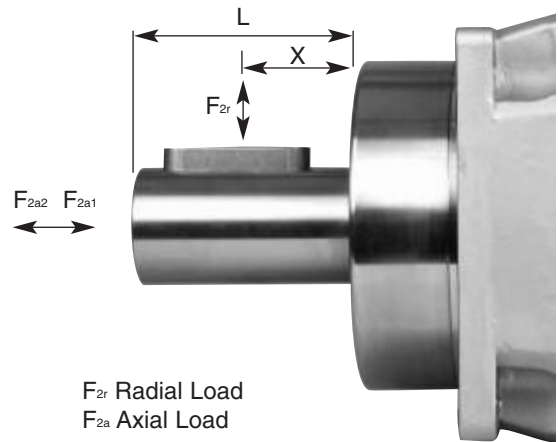


If the radial force F_{2r} **is** exerted on the center of the output shaft, then $X=0.5 \times L$.

Under these conditions the permitted radial load can be determined from the graph on the left.

The permitted axial load can then be calculated by using the following formulas:

$$F_{2a1B} = 0.2 \times F_{2rB} \text{ (axial force towards the gearhead)}$$

$$F_{2a2B} = 0.1 \times F_{2rB} \text{ (axial force away from the gearhead)}$$

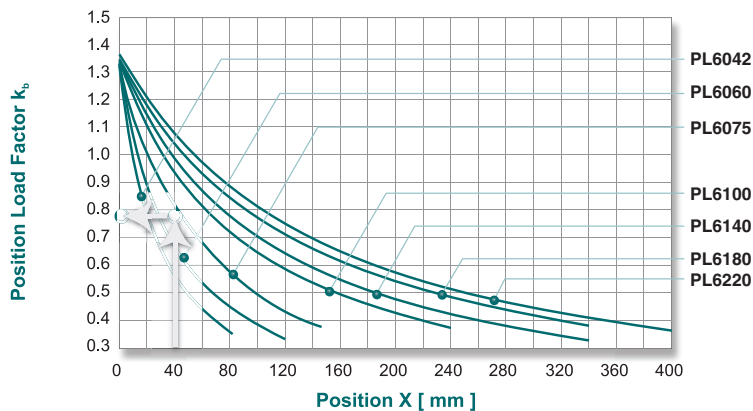

If the radial force F_{2r} **is not** exerted on the center of the output shaft, then X is the distance measured from the output seal.

The position load factor k_b can then be determined by the graph to the left.

Under these conditions the radial and axial loads can be calculated by using the following formulas:

Radial Load:

$$F'_{2rB} = k_b \times F_{2rB}$$

Axial Load:

$$F'_{2a1B} = 0.2 \times F'_{2rB}$$

$$F'_{2a2B} = 0.1 \times F'_{2rB}$$

* Continuous running reduces service life by 50%.


Stainless Steel High Precision Right Angle Planetary Gearboxes

Dimensional drop-in
for Alpha SPK, Stober
Servofit PKS and
Micron UltraTrue 90
Right Angle
Series



Ordering Number System for PR6 Models



Example: PR6220-045-SS-P-0000-00.0

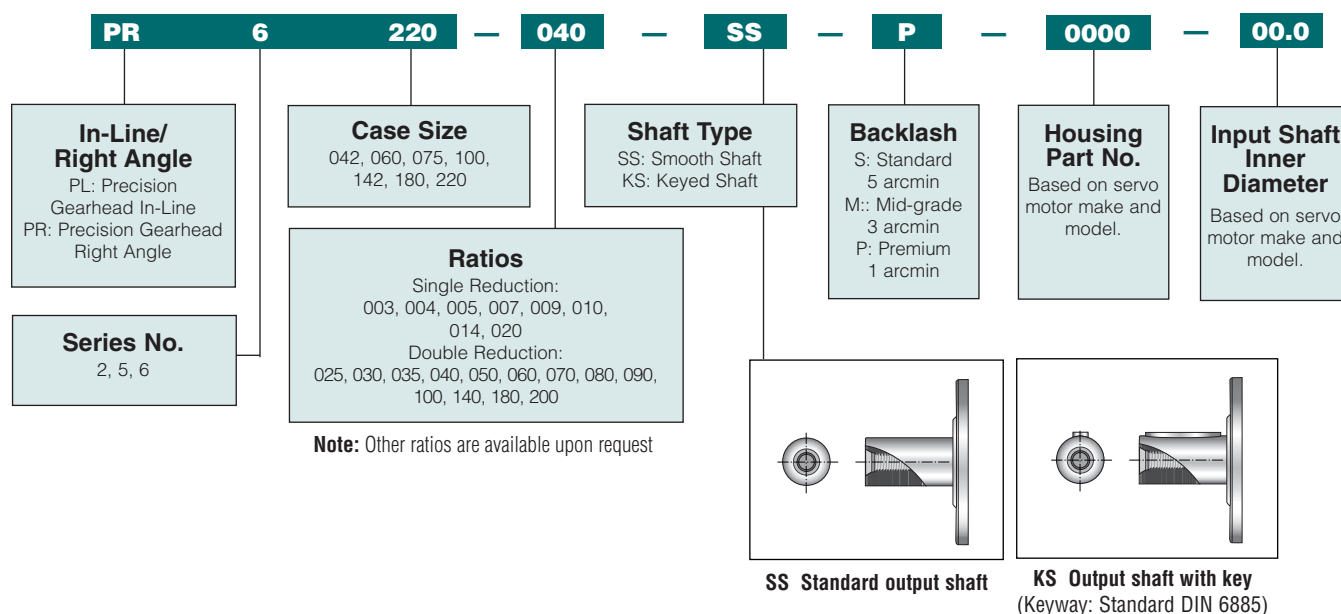

PR6 Series

Features

- Higher output torque rating by using spiral bevel gear design. 30% more than straight bevel gear.
- Allows input speeds up to 8 times than with straight bevel gearing.
- Improved load sharing through precision tooth design and longer service life.
- Ground gears verified with sophisticated software, ensures smooth, quiet operation with reduced backlash (≤ 2 arcmin).
- High tensile low weight single piece aluminum alloy housing for highest stiffness.
- Maintenance free lifetime lubrication.
- Patented sealing design for high speed and continuous running.
- High efficiency up to 95%. Low noise level down to 61dB.
- Most ratios available from 3~200.

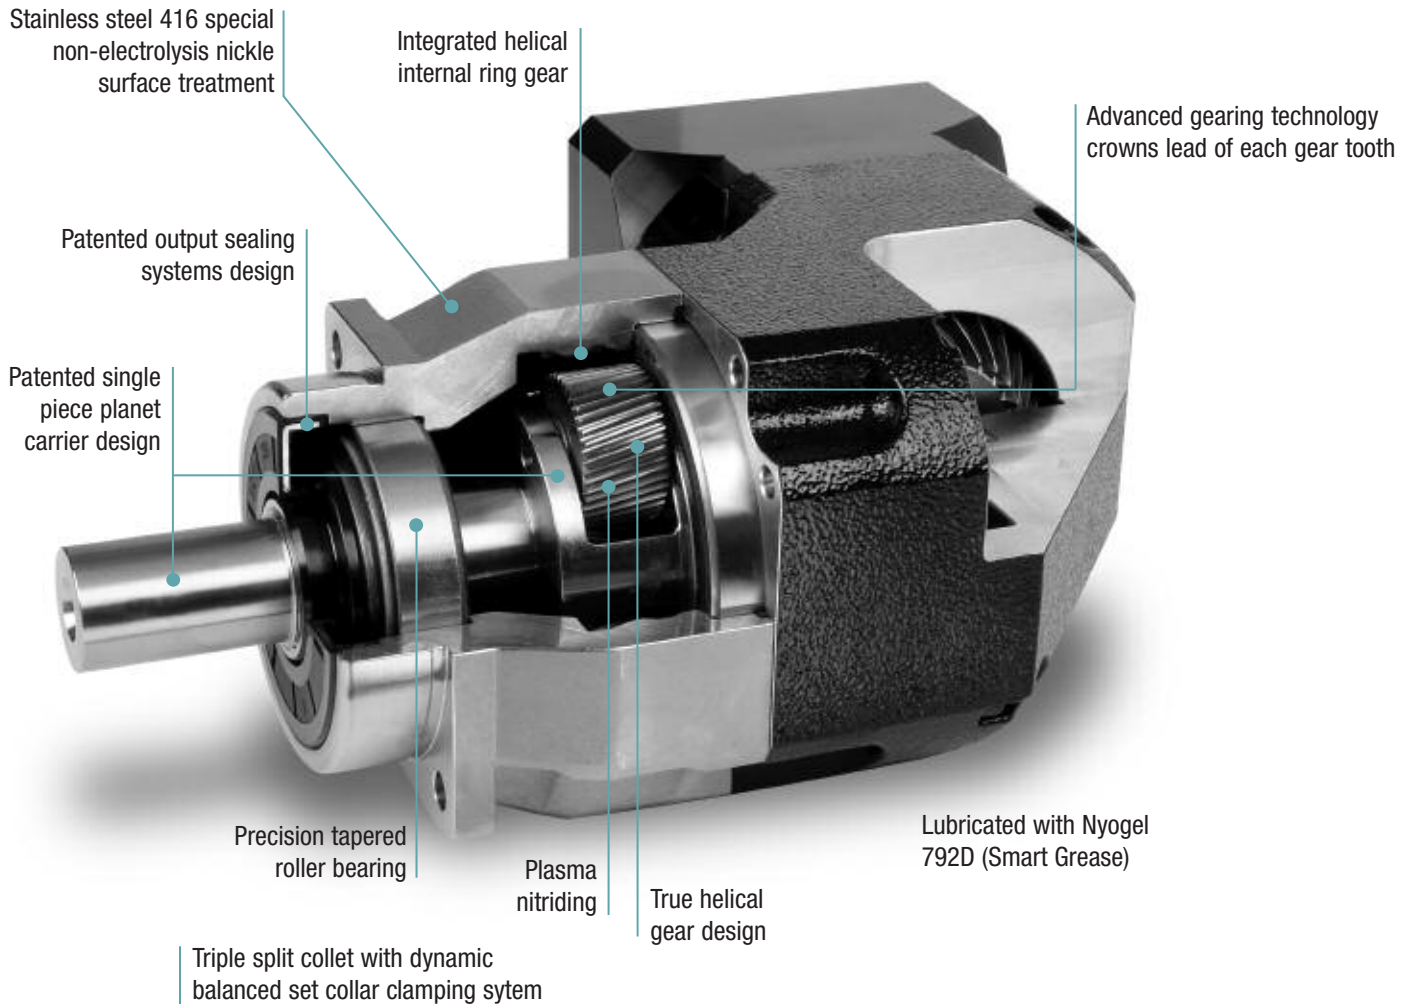

Unique motor adaptor and bushing module system



Spiral Bevel gear design



Precision tapered roller bearing support for increased radial and axial loading capacity

Specifications		Model No.								
		Stages	Ratio ¹	PR6042	PR6060	PR6075	PR6100	PR6140	PR6180	PR6220
Nominal Output Torque T_{2N}	Nm	1	3	9	36	90	195	342	588	1,140
			4	12	48	120	260	520	1,040	1,680
			5	15	60	150	325	650	1,200	2,000
			7	19	50	140	300	550	1,100	1,800
			9	14	40	100	230	450	900	1,500
			10	14	40	100	230	450	900	1,500
			14	-	42	140	300	550	1,100	1,800
			20	-	40	100	230	450	900	1,500
		2	25	15	60	150	325	650	1,200	2,000
			30	20	55	150	310	600	1,100	1,900
			35	19	50	140	300	550	1,100	1,800
			40	17	45	120	260	500	1,000	1,600
			45	14	40	100	230	450	900	1,500
			50	14	60	100	230	650	1,200	2,000
			70	19	50	140	300	550	1,100	1,800
			90	14	40	100	230	450	900	1,500
			100	14	40	100	230	450	900	1,500
			140	-	-	140	300	550	1,100	1,800
			180	-	-	100	230	450	900	1,500
			200	-	-	100	230	450	900	1,500
Max. Output Torque T_{2B}	Nm	1,2	3~200	3 times of Nominal Output Torque						
Nominal Input Speed n_{1N}	rpm	1,2	3~200	5,000	5,000	4,000	4,000	3,000	3,000	2,000
Max. Input Speed n_{1B}	rpm	1,2	3~200	10,000	10,000	8,000	8,000	6,000	6,000	4,000
Premium Backlash P	arcmin	1	3~20	-	-	≤2	≤2	≤2	≤2	≤2
		2	25~200	-	-	≤4	≤4	≤4	≤4	≤4
Mid-grade Backlash M	arcmin	1	3~20	≤4	≤4	≤4	≤4	≤4	≤4	≤4
		2	25~200	≤7	≤7	≤7	≤7	≤7	≤7	≤7
Standard Backlash S	arcmin	1	3~20	≤6	≤6	≤6	≤6	≤6	≤6	≤6
		2	25~200	≤9	≤9	≤9	≤9	≤9	≤9	≤9
Torsional Rigidity	Nm/arcmin	1,2	3~200	3	7	14	25	50	145	225
Max. Radial Load F 2rB2	N	1,2	3~200	610	1,400	4,100	9,200	14,000	18,000	49,000
Max. Axial Load F 2aB2	N	1,2	3~200	302	605	3,700	5,800	11,400	19,500	13,200
Service Life	hr	1,2	3~200	30,000*						
Efficiency η	%	1	3~20	≥95%						
		2	25~200	≥92%						
Weight	kg	1	3~20	0.9	2.1	6.4	13.9	23.7	50	83
		2	25~200	1.2	1.5	7.8	15.1	26.7	54	94
Operating Temp	°C	1,2	3~200	-10°C~+90°C						
Lubrication		1,2	3~200	synthetic gear grease (NYOGEL 792D)						
Degree of Gearbox Protection		1,2	3~200	IP65						
Mounting Position		1,2	3~200	all directions						
Noise Level ($n_1=3000$ rpm)	dB	1,2	3~200	≤61	≤63	≤65	≤68	≤70	≤72	≤74

Gearbox Inertia		Model No.								
		Stages	Ratio	PR6042	PR6060	PR6075	PR6100	PR6140	PR6180	PR6220
Mass Moments of Inertia J1	kg • cm ²	1	3~10	0.09	0.35	2.25	6.84	23.4	68.9	135.4
			14	-	0.07	1.87	6.25	21.8	65.6	119.8
			20	-	0.07	1.87	6.25	21.8	65.6	119.8
		2	25~100	0.09	0.09	0.35	2.25	6.84	23.4	66.9
			140~200	-	-	0.31	1.87	6.25	21.8	65.6


1. Ratio ($i=N_1/N_2$)

*S1 service life 15,000 hrs

2. F_{2B} F_{2B} applied to the output shaft center @ 100 rpm

PR6 Series

Dimensions (1-stage, Ratio i = 3-20)

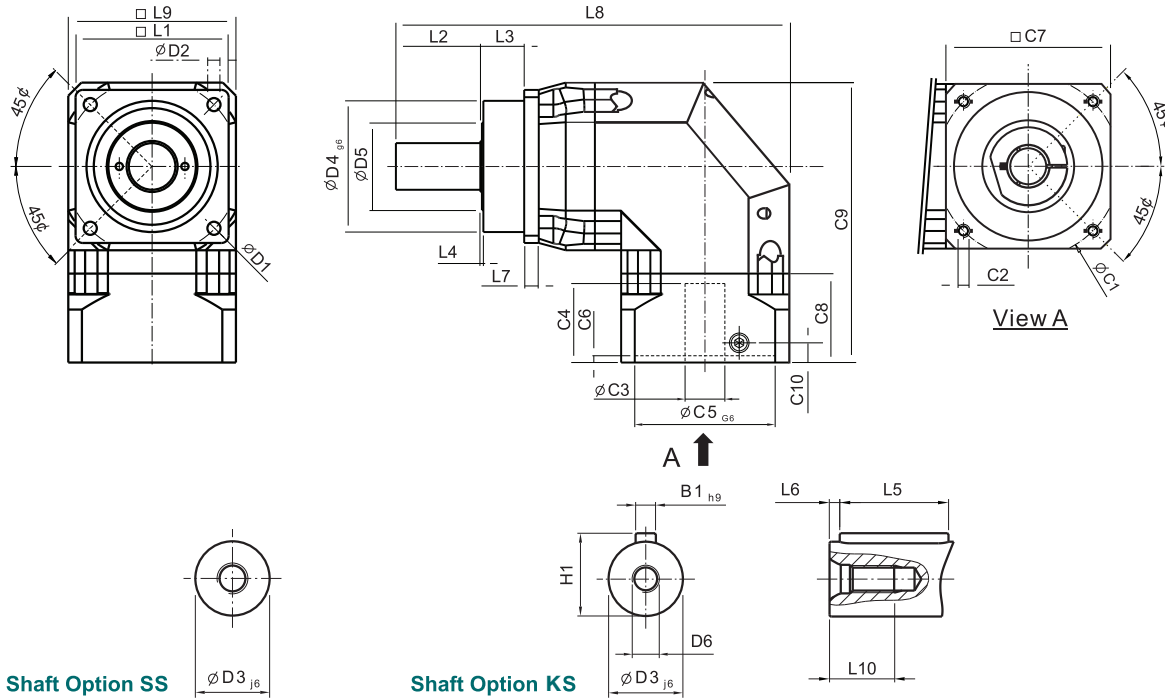


Note: Dimensions shown in mm

Dimension	PR6042	PR6060	PR6075	PR6100	PR6140	PR6180	PR6220
D1	50	68	85	120	165	215	250
D2	3.4	5.5	6.8	9	11	13	17
D3_{j6}	13	16	22	32	40	55	75
D4_{g6}	35	60	70	90	130	160	180
D5	22	30	45	60	75	95	115
D6	M4 x 0.7P	M5 x 0.8P	M8 x 1.25P	M12 x 1.75P	M16 x 2P	M20 x 2.5P	M20 x 2.5P
L1	42	62	76	105	142	180	220
L2	19.5	28.5	36	58	82	82	105
L3	6.5	20	20	30	30	30	33
L4	1	1.5	2	2	3	3	3
L5	16	25	32	40	63	70	90
L6	2	2	3	5	5	6	7
L7	4	6	7	10	12	15	20
L8	111.5	145	219	269.5	338.5	397	484
L9	42	60	90	115	142	180	220
L10	10	12.5	19	28	36	42	42
C1³	46	70	100	130	165	215	235
C2³	M4 x 0.7P	M5 x 0.8P	M6 x 1P	M8 x 1.25P	M10 x 1.25P	M12 x 1.75P	M12 x 1.75P
C3³	≤11	≤16	*≤19/≤24	≤32	≤38	≤48	≤55
C4³	25	30	40	50	60	82	82
C5³_{G6}	30	50	80	110	130	180	200
C6³	3.5	4	4	5	6	6	6
C7³	42	60	90	115	142	190	220
C8³	29.5	41.5	48	61	71	96	100
C9³	90.5	108	153	192	236	301	345
C10³	8.75	10	11.25	13.5	16	18.25	20
B1_{H9}	5	5	6	10	12	16	20
H1	15	18	24.5	35	43	59	79.5

3. C1-C10 are motor specific dimensions (metric std shown).

* PR6075 C3 option = 24 option.

Dimensions (2-stage, Ratio i = 25-200)

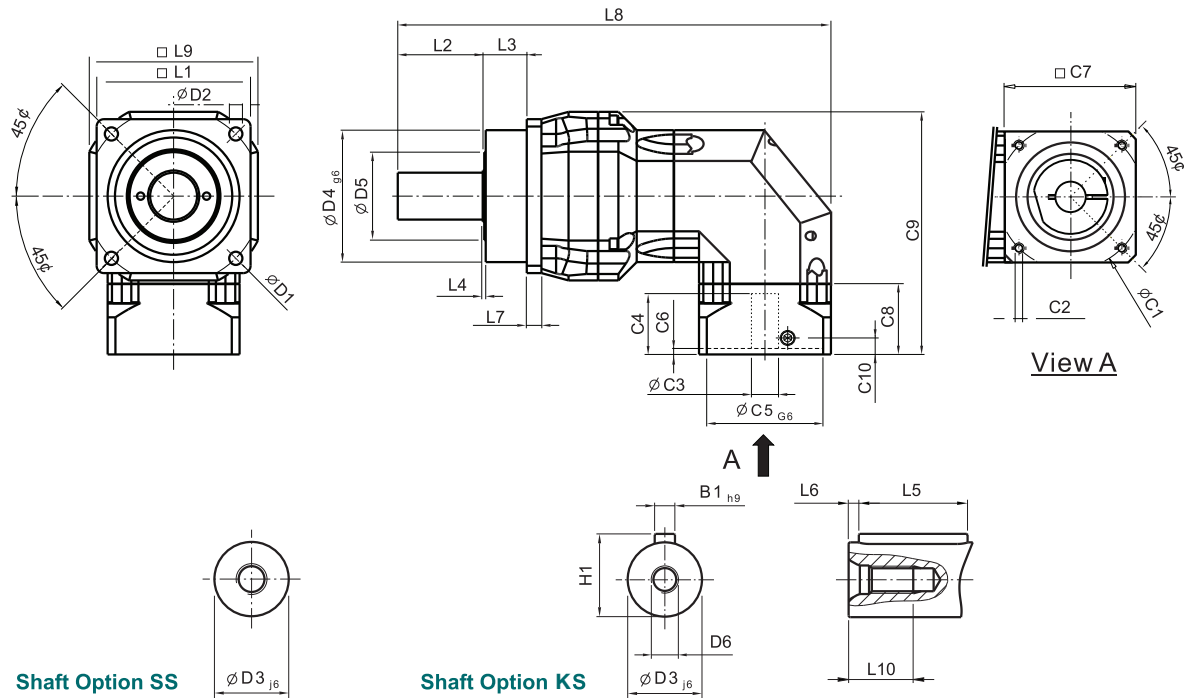

Note: Dimensions shown in mm

Dimension	PR6042	PR6060	PR6075	PR6100	PR6140	PR6180	PR6220
D1	50	68	85	120	165	215	250
D2	3.4	5.5	6.8	9	11	13	17
D3_{j6}	13	16	22	32	40	55	75
D4_{g6}	35	60	70	90	130	160	180
D5	22	30	45	60	75	95	115
D6	M4 x 0.7P	M5 x 0.8P	M8 x 1.25P	M12 x 1.75P	M16 x 2P	M20 x 2.5P	M20 x 2.5P
L1	42	62	76	105	142	180	220
L2	19.5	28.5	36	58	82	82	105
L3	6.5	20	20	30	30	30	33
L4	1	1.5	2	2	3	3	3
L5	16	25	32	40	63	70	90
L6	2	2	3	5	5	6	7
L7	4	6	7	10	12	15	20
L8	139	63.5	222.5	295.5	370.5	434	521
L9	42	60	90	115	142	180	220
L10	10	12.5	19	28	36	42	42
C1⁴	46	46	70	100	130	165	215
C2⁴	M4 x 0.7P	M4 x 0.7P	M5 x 0.8P	M6 x 1P	M8 x 1.25P	M10 x 1.5P	M12 x 1.75P
C3⁴	≤11	*≤11/≤12	*≤14/≤16	*≤19/≤24	≤32	≤38	≤48
C4⁴	25	25	30	40	50	60	82
C5_{g6}⁴	30	30	50	80	110	130	180
C6⁴	3.5	3.5	4	4	5	6	6
C7⁴	42	42	60	90	115	142	190
C8⁴	29.5	29.5	41.5	48	61	71	96
C9⁴	90.5	99.5	123	165.5	205.5	255	321
C10⁴	8.75	8.75	10	11.25	13.5	16	18.25
B1_{h9}	5	5	6	10	12	16	20
H1	15	18	24.5	35	43	59	79.5



4. C1-C10 are motor specific dimensions (metric std shown).

* PR6075 C3 option ≤ 16. * PR6100 C3 option = 24 option.

PR6 Series

Radial and axial loads allowed on the output shaft

The permitted radial and axial loads on the output shaft of the gearbox is dependent upon the design of the gearbox supporting bearings. The oversized, tapered roller bearing, straddle mount design for the PR6 Series accommodates high radial and axial loads with extended life. This design enables a 50% more load capacity than a standard angular contact bearing design.

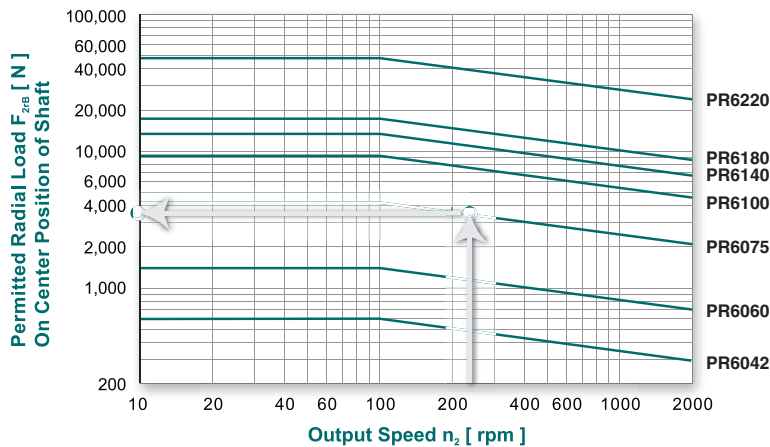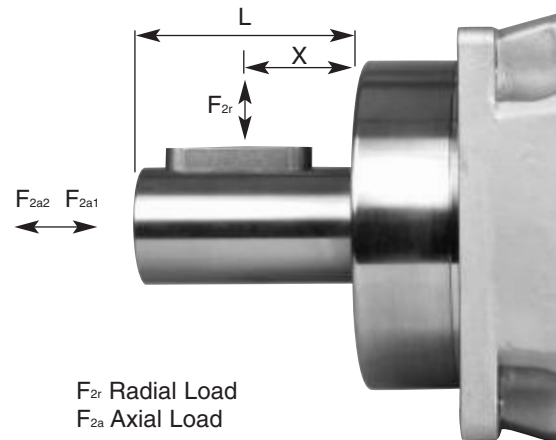


If the radial force F_{2r} **is** exerted on the center of the output shaft, then $X=0.5 \times L$.

Under these conditions the permitted radial load can be determined from the graph on the left.

The permitted axial load can then be calculated by using the following formulas:

$$F_{2a1B} = 0.2 \times F_{2rB} \text{ (axial force towards the gearhead)}$$

$$F_{2a2B} = 0.1 \times F_{2rB} \text{ (axial force away from the gearhead)}$$

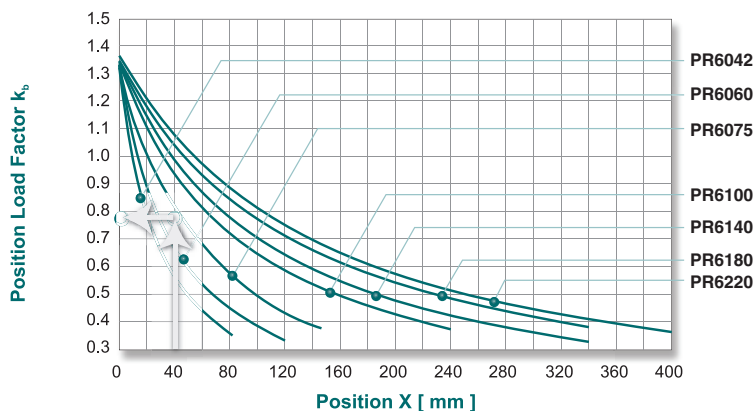

If the radial force F_{2r} **is not** exerted on the center of the output shaft then X is the distance measured from the output seal.

The position load factor K_b can then be determined by the graph to the left.

Under these conditions the radial and axial loads can be calculated by using the following formulas:

Radial Load:

$$F'_{2rB} = K_b \times F_{2rB}$$

Axial Load:

$$F'_{2a1B} = 0.2 \times F'_{2rB}$$

$$F'_{2a2B} = 0.1 \times F'_{2rB}$$

* Continuous running reduces service life by 50%.

Stainless Steel High Precision Economy Inline Planetary Gearboxes




Dimensional drop-in
for Alpha LP and
Stober PE Series

*Can be modified to replace
Bayside PX and PV Series,
Micron NT & DT Series
(Dimensions may not be
exact in all cases).

Ordering Number System for PL5 Models


Example: PL5120-070-0000-00.0

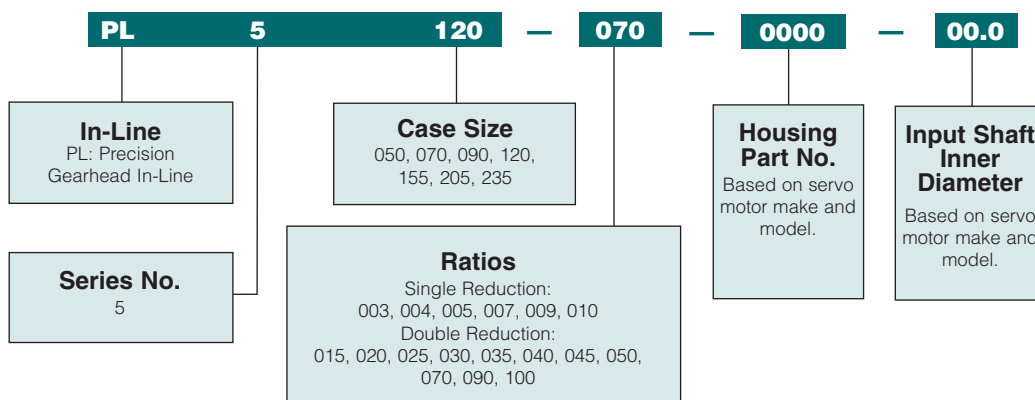

Note: Other ratios are available upon request

PL5 Series

Features

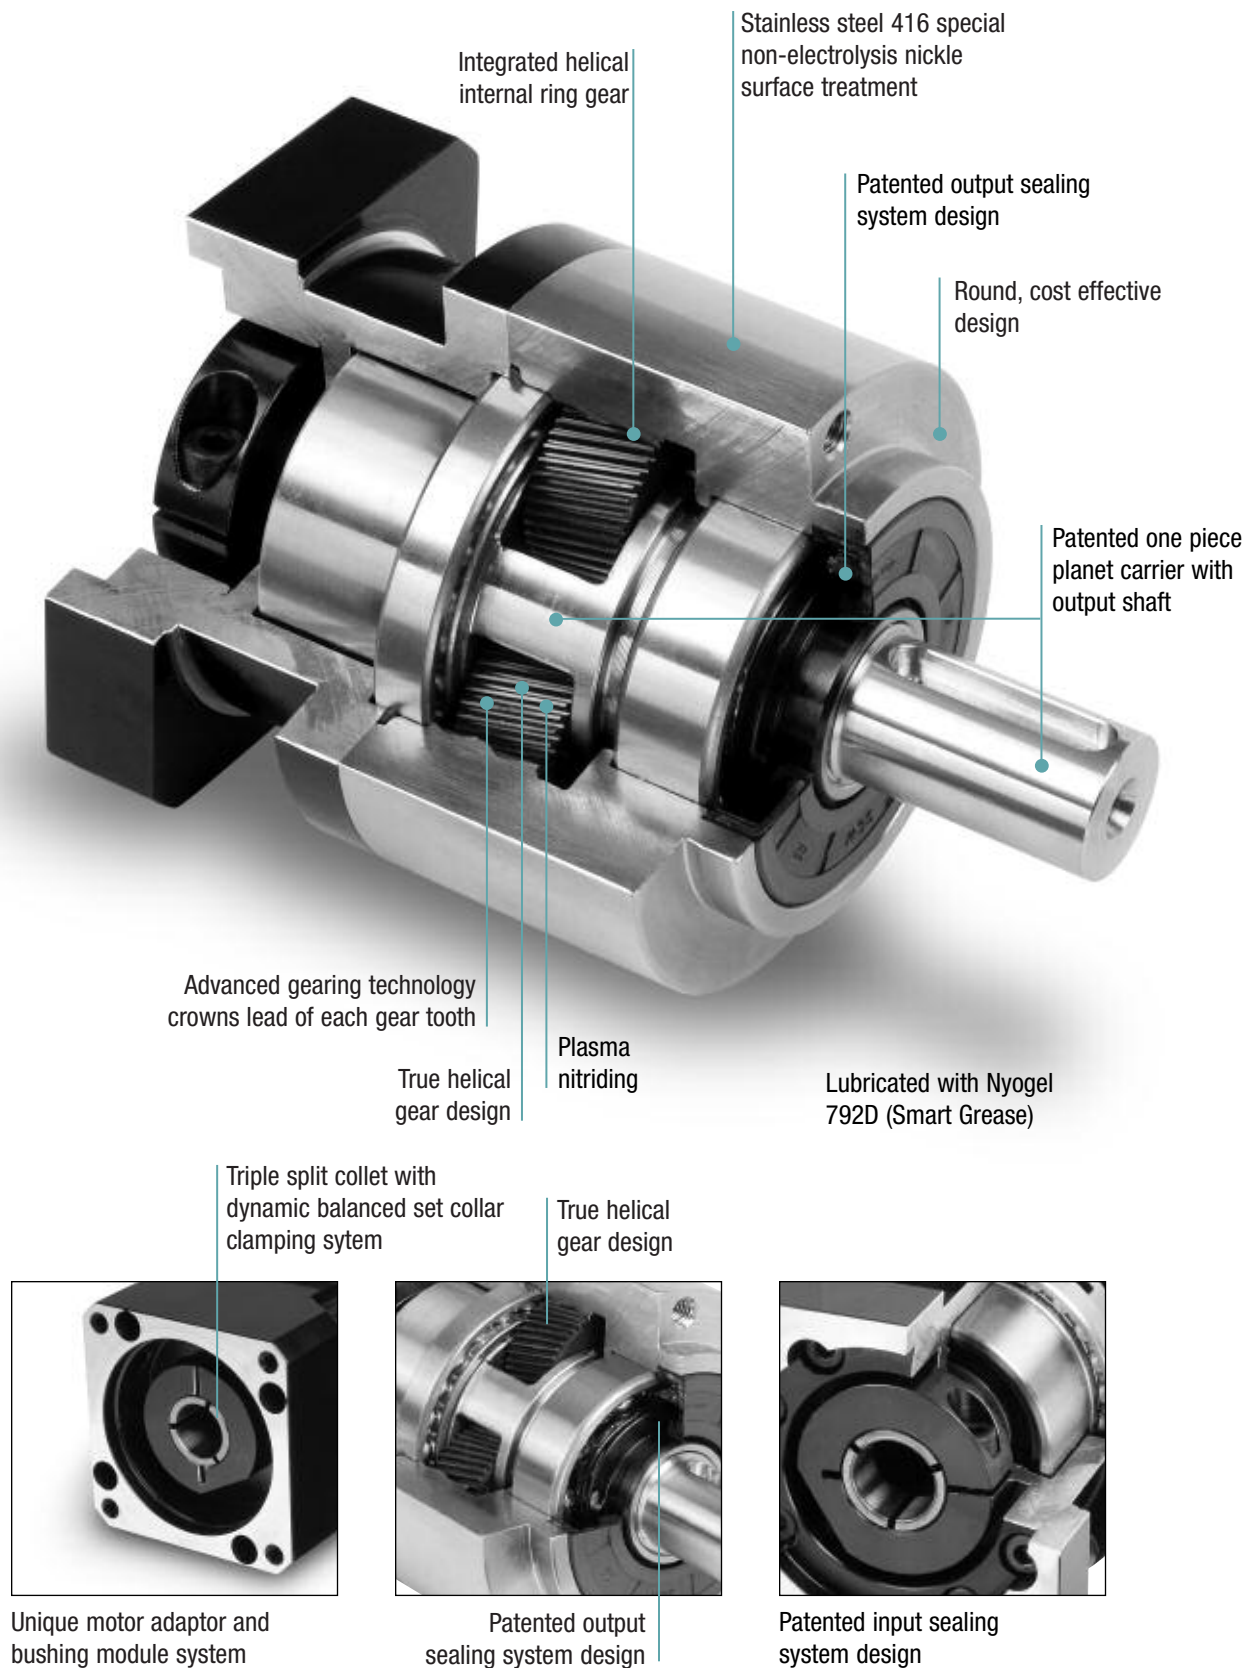

Specifications		Model No.								
		Stages	Ratio ¹	PL5050	PL5070	PL5090	PL5120	PL5155	PL5205	PL5235
Nominal Output Torque T_{2N}	Nm	1	3	20	55	130	208	342	588	1,140
			4	19	50	140	290	542	1,050	1,700
			5	22	60	160	330	650	1,200	2,000
			7	19	50	140	300	550	1,100	1,800
			9	14	40	100	230	450	900	1,500
			10	14	40	100	230	450	900	1,500
		2	15	20	55	130	208	342	588	1,140
			20	19	50	140	290	542	1,050	1,700
			25	22	60	160	330	650	1,200	2,000
			30	20	55	150	310	600	1,100	1,900
			35	19	50	140	300	550	1,100	1,800
			40	17	45	120	260	500	1,000	1,600
			45	14	40	100	230	450	900	1,500
			50	22	60	160	330	650	1,200	2,000
			70	19	50	140	300	550	1,100	1,800
			90	14	40	100	230	450	900	1,500
			100	14	40	100	230	450	900	1,500
Max. Output Torque T_{2B}	Nm	1,2	3~100	3 times of Nominal Output Torque						
Nominal Input Speed n_{1N}	rpm	1,2	3~100	5,000	5,000	4,000	4,000	3,000	3,000	2,000
Max. Input Speed n_{1B}	rpm	1,2	3~100	10,000	10,000	8,000	8,000	6,000	6,000	4,000
Backlash	arcmin	1	3~10	≤8	≤8	≤8	≤8	≤8	≤8	≤8
		2	15~100	≤12	≤12	≤12	≤12	≤12	≤12	≤12
Torsional Rigidity	Nm/arcmin	1,2	3~100	3	7	14	25	50	145	225
Max. Radial Load F_{2B}^2	N	1,2	3~100	702	1,377	2,985	6,100	8,460	13,050	8,700
Max. Axial Load F_{2B}^2	N	1,2	3~100	390	765	1,625	2,350	4,700	7,250	4,800
Service Life	hr	1,2	3~100	20,000*						
Efficiency η	%	1	3~10	≥97%						
		2	15~100	≥94%						
Weight	kg	1	3~10	0.6	1.4	3.3	6.9	13	31	53
		2	15~100	0.9	1.6	4.7	8.7	17	35	66
Operating Temp	°C	1,2	3~100	-10°C~+90°C						
Lubrication		1,2	3~100	synthetic gear grease (NYOGEL 792D)						
Degree of Gearbox Protection		1,2	3~100	IP65						
Mounting Position		1,2	3~100	all directions						
Noise Level ($n_1 = 3000$ rpm)	dB	1,2	3~100	≤56	≤58	≤60	≤63	≤65	≤67	≤70


Gearbox Inertia		Model No.								
		Stages	Ratio	PL5050	PL5070	PL5090	PL5120	PL5155	PL5205	PL5235
Mass Moments of Inertia J_1	kg • cm ²	1	3	0.03	0.16	0.61	3.25	9.21	28.98	69.61
			4	0.03	0.14	0.48	2.74	7.54	23.67	54.37
			5	0.03	0.13	0.47	2.71	7.42	23.29	53.27
			7	0.03	0.13	0.45	2.62	7.14	22.48	50.97
			9	0.03	0.13	0.44	2.57	7.04	22.53	50.63
			10	0.03	0.13	0.44	2.57	7.03	22.51	50.56
		2	15	0.03	0.03	0.13	0.47	2.71	7.42	23.29
			20	0.03	0.03	0.13	0.47	2.71	7.42	23.29
			25	0.03	0.03	0.13	0.47	2.71	7.42	23.29
			30	0.03	0.03	0.13	0.47	2.71	7.42	23.29
			35	0.03	0.03	0.13	0.47	2.71	7.42	23.29
			40	0.03	0.03	0.13	0.47	2.71	7.42	23.29
			45	0.03	0.03	0.13	0.47	2.71	7.42	23.29
			50	0.03	0.03	0.13	0.44	2.57	7.03	22.51
			70	0.03	0.03	0.13	0.44	2.57	7.03	22.51
			90	0.03	0.03	0.13	0.44	2.57	7.03	22.51
			100	0.03	0.03	0.13	0.44	2.57	7.03	22.51

1. Ratio ($i = N_{in}/N_{out}$)
 *S1 service life 10,000 hrs

2. F_{2B} F_{2B} applied to the output shaft center @ 100 rpm

PL5 Series

Dimensions (1-stage, Ratio i = 3-10)

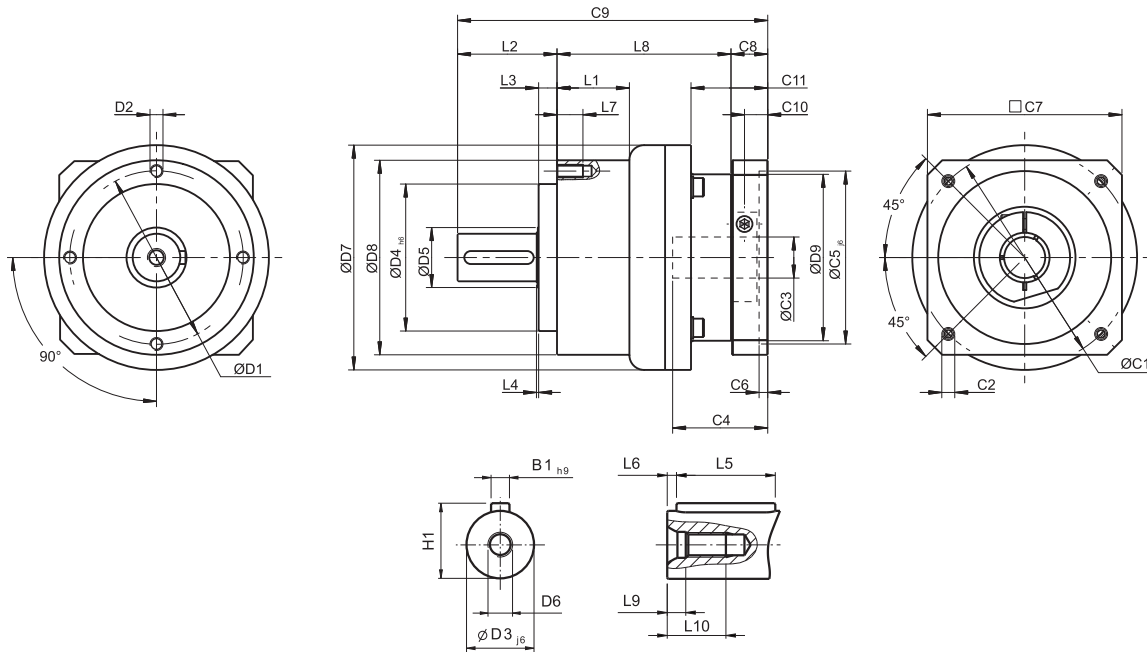


Note: Dimensions shown in mm

Dimension	PL5050	PL5070	PL5090	PL5120	PL5155	PL5205	PL5235
D1	44	62	80	108	140	184	210
D2	M4 x 0.7P	M5 x 0.8P	M6 x 1P	M8 x 1.25P	M10 x 1.5P	M12 x 1.75P	M16 x 2P
D3 _{j6}	12	16	22	32	40	55	75
D4 _{h6}	35	52	68	90	120	160	180
D5	22	22	30	40	75	95	115
D6	M4 x 0.7P	M5 x 0.8P	M8 x 1.25P	M12 x 1.75P	M16 x 2P	M20 x 2.5P	M20 x 2.5P
D7	53	70	104	130	162	205	260
D8	50	70	90	120	155	205	235
D9	45.5	53.4	77	102	125	160	205
L1	34.5	-	33.5	38	50	-	70
L2	24.5	36	46	70	97	100	126
L3	4	6.5	8.5	17.5	15	15	18
L4	1	1	1	1.5	3	3	3
L5	14	25	32	40	63	70	90
L6	2	2	3	5	5	6	7
L7	8	10	12	16	20	22	28
L8	47	62	80.5	97	119.5	159	175.5
L9	3.2	4	6	9.5	12	15	15
L10	10	12.5	19	28	36	42	42
C1 ³	46	70	100	130	165	200	235
C2 ³	M4 x 0.7P	M4 x 0.7P	M6 x 1P	M8 x 1.25P	M10 x 1.5P	M12 x 1.75P	M12 x 1.75P
C3 ³	≤11	*≤14/≤16	≤19/≤24	≤32	≤38	≤48	≤55
C4 ³	30	30	40	50	60	113	116
C5 ³ _{g6}	30	50	80	110	130	114.3	200
C6 ³	3.5	4	4	5	6	6	6
C7 ³	48	60	90	115	142	180	220
C8 ³	19.5	15	17	19.5	22.5	57	63
C9 ³	91	113	143.5	186.5	239	316	364.5
C10 ³	13.25	9.5	10.75	13	15.5	48.75	53.5
C11 ³	19.5	33	35.5	46	53.5	107.5	106.5
B1 _{h9}	4	5	6	10	12	16	20
H1	14	18	24.5	35	43	59	79.5

3. C1-C10 are motor specific dimensions (metric std shown).

* PL5070 ratio 5.10 provides C3 ≤ 16 option.

Dimensions (2-stage, Ratio i = 15-100)

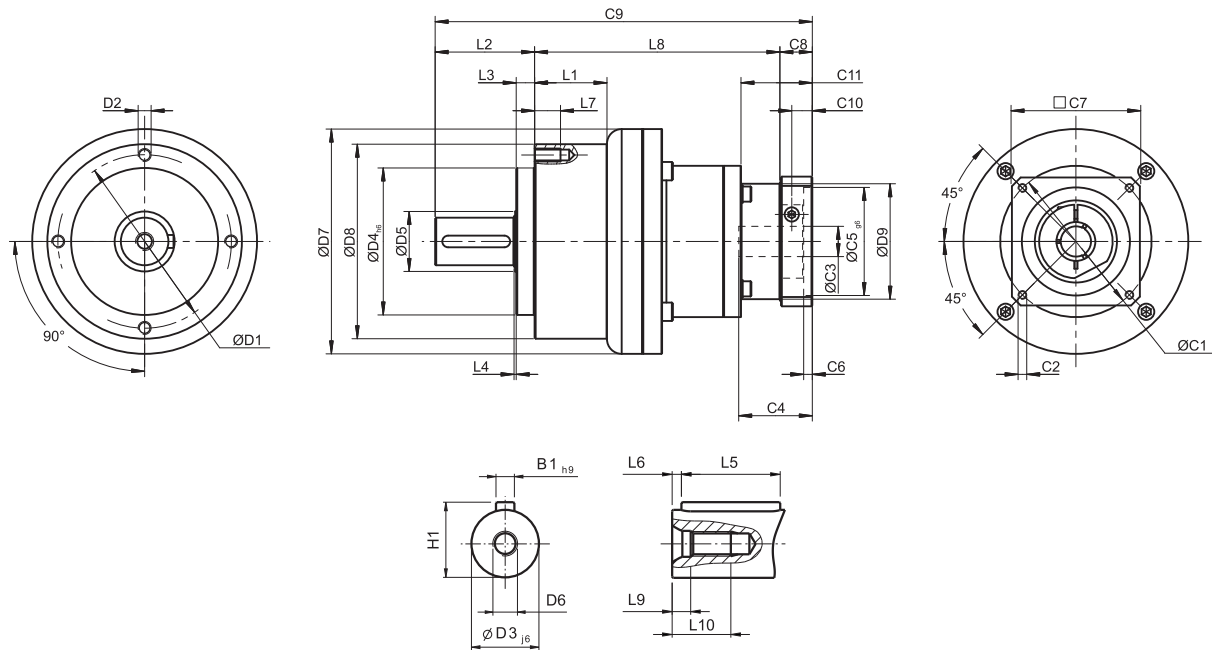

Note: Dimensions shown in mm

Dimension	PL5050	PL5070	PL5090	PL5120	PL5155	PL5205	PL5235
D1	44	62	80	108	140	184	210
D2	M4 x 0.7P	M5 X 0.8P	M6 x 1P	M8 x 1.25P	M10 x 1.5P	M12 x 1.75P	M16 x 2P
D3 _{i6}	12	16	22	32	40	55	75
D4 _{h6}	35	52	68	90	120	160	180
D5	22	22	30	40	75	95	115
D6	M4 x 0.7P	M5 x 0.8P	M8 x 1.25P	M12 x 1.75P	M16 x 2P	M20 x 2.5P	M20 x 2.5P
D7	53	70	104	130	162	205	260
D8	50	70	90	120	155	205	235
D9	45.5	45.5	53.4	77	102	125	160
L1	61.5	-	33.5	38	50	-	70
L2	24.5	36	46	70	97	100	126
L3	4	6.5	8.5	17.5	15	15	18
L4	1	1	1	1.5	3	3	3
L5	14	25	32	40	63	70	90
L6	2	2	3	5	5	6	7
L7	8	10	12	16	20	22	28
L8	74	87.5	113.5	138.5	176	214.5	260
L9	3.2	4	6	9.5	12	15	15
L10	10	12.5	19	28	36	42	42
C1 ⁴	46	46	70	100	130	165	200
C2 ⁴	M4 x 0.7P	M4 x 0.7P	M4 x 0.7P	M6 x 1P	M8 x 1.25P	M10 x 1.5P	M12 x 1.75P
C3 ⁴	≤11	*≤11/≤12	*≤14/≤16	≤19/≤24	≤32	≤38	≤48
C4 ⁴	30	30	30	40	50	60	113
C5 ⁴ _{g6}	30	30	50	80	110	130	114.3
C6 ⁴	3.5	3.5	4	4	5	6	6
C7 ⁴	48	48	60	90	115	142	180
C8 ⁴	19.5	19.5	15	17	19.5	22.5	57
C9 ⁴	118	143	174.5	225.5	292.5	337	443
C10 ⁴	13.25	13.25	9.5	10.75	13	15.5	48.75
C11 ⁴	19.5	19.5	33	35.5	46	53.5	107.5
B1 _{h9}	4	5	6	10	12	16	20
H1	14	18	24.5	35	43	59	79.5

4. C1-C10 are motor specific dimensions (metric std shown).



* PL5070 ratio 15-50 provides C3 ≤ 12 option. * PL5090 ratio 15-50 provides C3 ≤ 16 option.

PL5 Series

Front Plate Option

Note: Dimensions shown in mm

Dimension	D1	D2	D3	D4 ^{h6}	L1	L2	L3	L4
PL5050-NEMA 23	66.675	6	77	38.15	57.2	2	8	18.5
PL5050-PX60	70	5.6	80.5	50	60	2.5	8.5	18.5
PL5070-Metric	90	6.6	106	50	80	3	11	28
PL5070-NEMA 34	98.425	5.6	115	73.08	86	2.5	8	30.5
PL5070-DT90/PX90	100	6.6	120	80	90	3	8	31
PL5090-IEC 63D5 B5	115	9	140	95	105	3	10.5	38.5
PL5090-NEMA 42	125.73	7	144	55.58	107	4	14.5	35.5
PL5120-NEMA 56	149.225	6.6	170	114.3	127	3	17.5	55.5
PL5155-B5	175	11	196	130	160	5	20	82
PL5205-B5	230	13	277	180	210	5	23	82
PL5235-B5	275	17	317	235	240	5	23	108

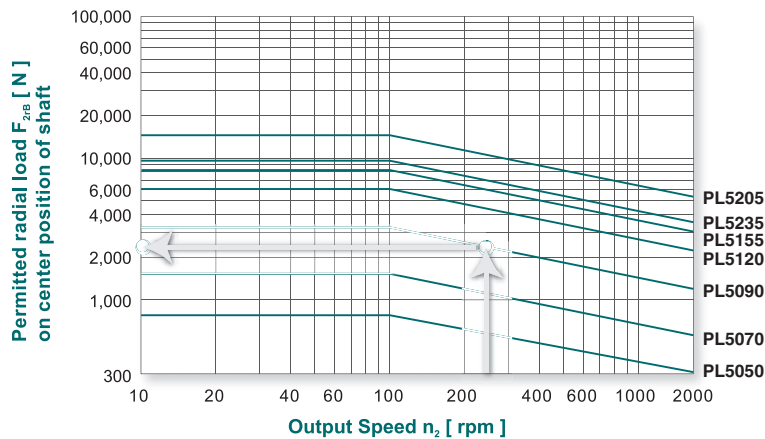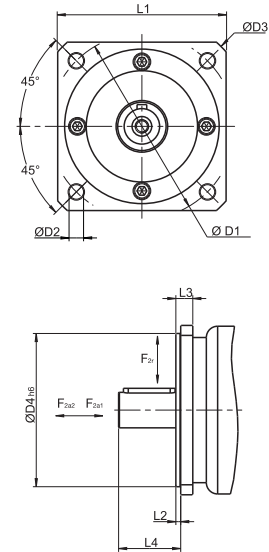


If the radial force F_{2r} is exerted on the center of the output shaft, then $X=0.5 \times L$.

Under these conditions the permitted radial load can be determined from the graph on the left.

The permitted axial load can then be calculated by using the following formulas:

$$F_{2a1B} = 0.2 \times F_{2rB} \text{ (axial force towards the gearhead)}$$

$$F_{2a2B} = 0.1 \times F_{2rB} \text{ (axial force away from the gearhead)}$$

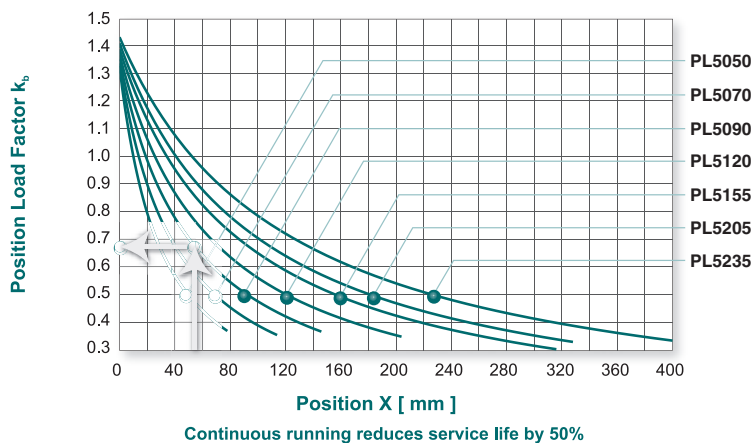

If the radial force F_{2r} is **not** exerted on the center of the output shaft, then X is the distance measured from the output seal.

The position load factor K_b can then be determined by the graph to the left.

Under these conditions the radial and axial loads can be calculated by using the following formulas:

Radial Load:

$$F'_{2rB} = K_b \times F_{2rB}$$

Axial Load:

$$F'_{2a1B} = 0.2 \times F'_{2rB}$$

$$F'_{2a2B} = 0.1 \times F'_{2rB}$$

* Continuous running reduces service life by 50%.

Tightening Torque Recommendations

For Motor Mounting Bolt


Bolt Size	Width Across Flats (mm)	Strength 8.8 Tightening Torque		Strength 10.9 Tightening Torque		Strength 12.9 Tightening Torque	
		(Nm)	(In-lbs)	(Nm)	(In-lbs)	(Nm)	(In-lbs)
M3 x 0.5P	2.5	1.3	12	1.8	16	2.1	19
M4 x 0.7P	3	3	27	4.1	37	4.9	44
M5 x 0.8P	4	6.1	55	8.2	73	9.8	87
M6 x 1P	5	11	98	14	124	17	151
M8 x 1.25P	6	25	222	34	302	41	364
M10 x 1.5P	8	49	434	67	594	80	709
M12 x 1.75P	10	85	753	116	1028	139	1232
M14 x 2P	12	137	1214	186	1648	223	1976
M16 x 2P	14	210	1860	286	2534	343	3038

For Set Collar Bolt

Gearbox Size		Motor Shaft Dia. (mm)	Bolt Size (mm)	Width Across Flats (mm)	Tightening Torque	
					(Nm)	(In-lbs)
PL2042 / PR2042 PL6042 / PR6042	1 stage	≤11	M3 x 0.5P x 8L	2.5	2.1	19
	2 stage	≤11	M3 x 0.5P x 8L	2.5	2.1	19
PL2060 / PR2060 PL6060 / PR6060	1 stage	≤14	M4 x 0.7 x 12L	3	4.9	44
	2 stage	≤11	M3 x 0.5P x 8L	2.5	2.1	19
PL2090 / PR2090 PL6075 / PR6075	1 stage	≤19	M5 x 0.8P x 14L	4	9.8	87
	2 stage	≤14	M4 x 0.7P x 12L	3	4.9	44
PL2115 / PR2115 PL6100 / PR6100	1 stage	≤32	M6 x 1P x 16L	5	17	151
	2 stage	≤19	M5 x 0.8P x 14L	4	9.8	87
PL2142 / PR2142 PL6140 / PR6140	1 stage	≤38	M8 x 1.25P x 20L	6	41	364
	2 stage	≤32	M6 x 1P x 16L	5	17	151
PL2180 / PR2180 PL6180 / PR6180	1 stage	≤48	M10 x 1.5P x 25L	8	80	709
	2 stage	≤38	M8 x 1.25P x 20L	6	41	364
PL2220 / PR2220 PL6220 / PR6220	1 stage	≤55	M12 x 1.75P x 30L	10	139	1232
	2 stage	≤48	M10 x 1.5P 25L	8	80	709

Motor Mounting Instructions


1. Double-check the motor and gearbox size.
Clean the mounting surface.

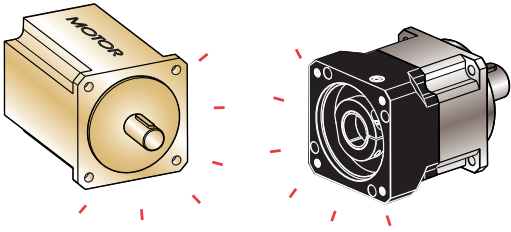


2. Remove the plug on the adapter plate.
Rotate the set collar until the bolt is aligned with the hole.




3. Remove motor key.

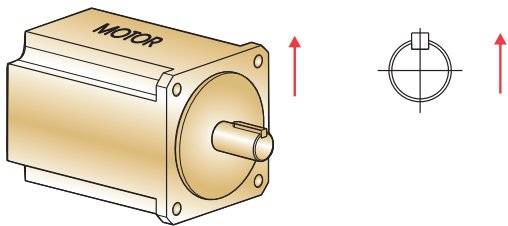


4. Check motor shaft size and insert bushing if necessary.

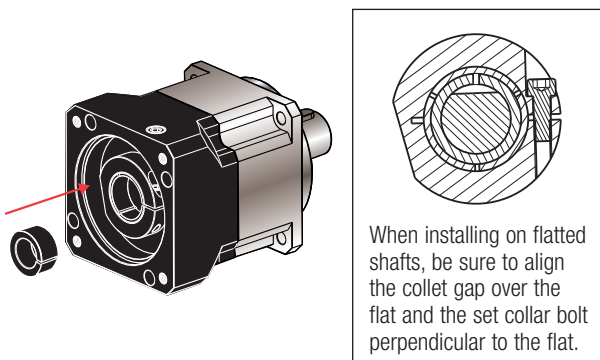


5. Attach the motor. Tighten to 5% of the recommended torque shown in Table 2.




6. Tighten the mounting bolt (including washer) in 1~4 order with torque wrench to specified torque. (See Table 1)

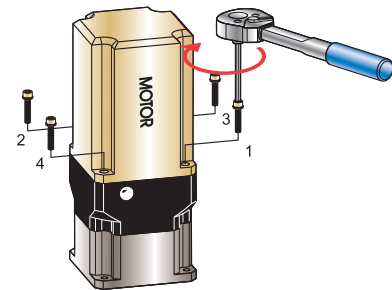

7. Tighten the set collar bolt with torque wrench to specified torque. (See Table 2)

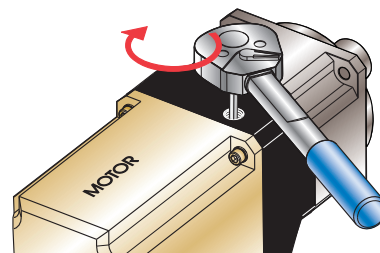

8. Tighten back the screw plug.



Other products available from Altra Industrial Motion



Clutches and Brakes

Warner Electric designed and patented the first electromagnetic clutch/brake over seventy years ago, and has led every major innovation since. Every product in Warner Electric's extensive offering is designed for long life, exceptional reliability, and low cost of operation. Models are available to meet the demands of applications throughout the world.



Enclosed Gear Drives

Boston Gear's comprehensive line of enclosed gear drives, including worm, in-line and parallel-shaft helical, miter, and bevel, provides the product variety you need to get the job done. Boston Gear's speed reducers are preferred by manufacturers worldwide. In fact, every time you specify a Boston Gear product, you incorporate quality, responsiveness, and Boston Gear's 123-year reputation into your design.



Electrically Released Brakes

Spring-set designs are available for stopping or holding a load in the event of a power failure; or choose permanent magnet designs for dynamic stopping or cycling moving loads. Choose from C-face, UniModule or Electro Module series brakes available in shaft mounted or flange mounted designs with a torque range from 35 lb. in. to 400 lb. ft.



Precision Couplings

Huco is recognized as the world leader in the specialized field of precision couplings. By engineering plastics in combination with metals, to develop a full range of innovative misalignment couplings, Huco has achieved an enviable record of application engineering success and a reputation for quality products and service.



Linear Actuators

Rugged, energy efficient A-Track linear actuators from Warner Electric have been carefully designed to provide long-lasting, maintenance free operation in light, moderate and heavy-duty applications both in-plant and mobile in all types of conditions worldwide. Models are available with Acme and Ball Screw drives to meet specific requirements.



Open Gearing

Boston Gear has been a leader and pioneer in manufacturing gearing products since 1877, when we introduced the concept of gear standardization and stock gears - innovations of enormous benefit to power transmission system designers, specifiers, and users. Today, Boston Gear manufactures a wide range of open gearing solutions to meet your specific needs.



Magnetic Headsets

The Precision Tork™ line of hysteresis capping clutches from Warner Electric, utilize the most efficient torque control technology on the market to provide extremely smooth, consistent application of torque with less adjustment and downtime.



Bearing Products

When you want the freedom to select from the widest range of the highest quality bearings, come to the power transmission specialists at Boston Gear. Everything from plain sleeve bearings, ball bearings, rod ends, and spherical bearings to linear bearings, pillow blocks and flanged units are in stock.



Electrical Products

From fractional horsepower AC and DC motor controllers to a complete offering of complementary motors, Boston Gear is prepared to meet the broad spectrum of your adjustable speed needs.

ALTRA INDUSTRIAL MOTION

Warner Electric

*Electromagnetic Clutches
and Brakes and Linear
Actuators - USA*

South Beloit, IL 61080
815-389-3771

For application assistance:
1-800-825-9050

*Electromagnetic Clutches
and Brakes - Europe*

Allonnes, France
+33 (0)2 43 43 63 63

*Precision Electric Coils and
Electromagnetic Clutches and
Brakes - USA*

Columbia City, IN 46725
260-244-6183

Inertia Dynamics

*Spring Set Brakes; Power On and
Wrap Spring Clutch/Brakes*

Torrington, CT 06790
860-482-4444

Matrix International

*Electromagnetic Clutches
and Brakes, Pressure Operated
Clutches and Brakes*

Brechin, Scotland
+44 (0) 1356 602000

Huco Dynatork

*Precision Couplings
and Air Motors*

Hertford, UK
+44 (0) 1992 501900

Boston Gear

*Enclosed and Open Gearing,
Electrical and Mechanical P.T.
Components*

Quincy, MA 02171
617-328-3300

For Customer Service:
1-888-999-9860

For Application Assistance:
1-800-816-5608

Formsprag Clutch

*Overrunning Clutches
and Holdbacks*

Warren, MI 48089
586-758-5000

For application assistance:
1-800-927-3262

Marland Clutch

*Roller Ramp and Sprag Type
Overrunning Clutches
and Backstops*

Burr Ridge, IL 60527
630-455-1752

Stieber Clutch

*Overrunning Clutches
and Holdbacks*

Heidelberg, Germany
+49 (0)6221 30 47 0

Saftek Friction

*Non-asbestos Brake and Clutch
Materials*

Telford, Shropshire UK
01952 581122

Wichita Clutch and Industrial Clutch

*Pneumatic and Oil Immersed
Clutches and Brakes - USA*

Wichita Falls, TX 76302
940-723-3400

*Pneumatic Clutches
and Brakes - Europe*

Bedford, UK
+44 (0)1234 350311

Twiflex Limited

Caliper Brakes and Thrusters

Twickenham, Middlesex UK
+44 (0) 20 8894 1161

Ameridrives Couplings

*Gear Couplings, Mill Spindles,
Universal Joints*

Erie, PA 16512
814-480-5000

Bibby Transmissions

*Disc, Gear, Grid Couplings,
Overload Clutches*

West Yorkshire, UK
+44 (0) 1924 460801

Nuttall Gear and Delroyd Worm Gear

*Worm Gear and
Helical Speed Reducers*

Niagara Falls, NY 14302
716-298-4100

Altra Industrial Motion - Asia Pacific and Africa

China	852 2615 9313
Taiwan	886 2 2577 8156
Singapore	65 487 4464
Thailand	66 2 322 0481
Australia	612 9894 0133
S. Africa	27 11 918 4270

www.bostongear.com



Boston Gear

14 Hayward Street • Quincy, MA 02171
617-328-3300 • Fax: 617-479-6238
www.bostongear.com