

Biometric Fingerprint Access Control System Terminal

These are widely used Access Control in the office. Choosing a lot of stable original parts, strictly follow the national security product standard . They are suitable for the entrances and exits of office, factory, hotel, school, etc. All input /output are using anti-jamming protection and over-voltage/circuit protection. The product experiences the strict degradation test before leaving factory. The greatest advantage of ACM9800 Series is easy to install, with multifunctional & elegant design and reasonable price



ACM9800

Elegant design Access Control Terminal



ACM9800B

HOT Wiegand in/out Access Control



ACM9800T

Biometric Combination
Touch Keypad Technology A&C

Features

- * Elegant design, One fingerprint develop the whole world, High identification speed and accurate attendance management.
- * Easy to install all the cable connection EM lock installation are the same to the traditional IC/ID Access control
- * One-way alarm output: dismantlement alarm, threatens alarm, unlock illegally alarm, not block alarm
- * Adopt high reliable industrial component parts and optical sensor, watchdog monitor to avoid unit hang , unique reset key keeps the unit well work

Technical Specification

	ACM9800	ACM9800B/9800T
User Capacity	500/1500	1500
Transaction Storage	30000/100000	50000
LCD	LCD with 80 character and figure keypad	
Operation System	Linux, FRR: <=1% • FAR: <=0.0001%	
Communications	TCP/IP/ RS232/RS485	TCP/IP/ RS232/RS485, USB
Language	English,Chinese	
Power	12V ,1A	
Size(mm)	180(L)*82(W)*55(H)	
Operating Temperature	0℃ - 45℃	
Standard Function	Wire Doorbell, Wiegand Out	Wire Doorbell, Wiegand OUT/ IN
Optional	Printer	ID/HID/Mifare card, Webserver, USB host, Short message, Workcode, RIS, Antipass-back
Access Control	50 Time Zone, 5 Grouping, 10 Combination, Holiday Management, support many fingerprints access, support standalone work,	



Access Control Management

Shenzhen Goldbridge Industrial Co.,Ltd.

Tel: +86-755-83260520 Fax: +86-755-88391348
E-mail: sales@goldbridgesz.com, lilyjiang_06@163.com
Website: <http://www.goldbridgesz.com>

STANDALONE FINGERPRINT TIME AND ATTENDANCE PRODUCTS

Standalone Fingerprint Time and Attendance Machine , Combination Touch Screen Keypad and Intergrated CCTV Camera Technology



ACM820 Fingerprint Combined Touch Keypad Technology T&A



ACM680 3.5" TFT Screen T&A and A&C Terminal Fingerprint & Intergrated CCTV Camera Machine

Features

- * 3.5" TFT screen and integrated camera which make T&A application more visible
- * Photo-ID function enables user-friendly with user's photo displayed
- * Rugged scratch-resisitant optical sensor, English ,Spanish,French, etc language for optional
- * Multi authentications:FP,PIN,FP+PIN,optional could up to 14 combinations, 8 user-defined function keys
- * Embedded webserver, support via browser to inquire data at local or remote
- * Built-in USB port allows for manual data transfer when network not available
- * More helpful function like work code, T9 input method, short message,bell scheduling,daylight saving, self-service inquiry all standard

Technical Specification

	ACM820	ACM680
Register capacity	3000	3,000
Record capacity	100,000	100,000
Display	128X64 Green background light	3.5 inch TFT,320*240
Operating System	Linux	Linux
Communications	RS232,RS485,TCP/IP,USB-host	RS232,RS485,TCP/IP,USB-host, USB-client
Language	Chinese,English	English ,Spanish,French, etc
Size(mm)	183(L)X139(W)X54(H)	205(L)*150(W)*42(H)
Operating Temperature	0°C-45°C	0°C-45°C
Standard Function	Workcode, SMS, DLST, Scheduled-bell Self-Service Query, Automatic Status Switch	photo-ID,webserver,work code, SMS,Schedule Bell,Daylight saving,T9 input,function keys
Optional	ID/Mifare/HID,Webserver,printer,9 digit user ID Elegant Touch keypad,1 touch a-second user recognition	WIFI,GPRS,ID Card,Mifare Card,HID Card, HID iClass Card,12V UPS Access control: Wiegand 26 I/O, TTL I/O



Access Control Management

Shenzhen Goldbridge Industrial Co.,Ltd.

Tel: +86-755-83260520 Fax: +86-755-88391348
E-mail: sales@goldbridgesz.com, lilyjiang_06@163.com
Website: <http://www.goldbridgesz.com>

NEW Fingerprint & Integrated CCTV Camera Time and Attendance System



Model#: ACM819



Features & Advantages:

- 1, 3.5 inch TFT LCD Screen with Linux Operating System, Fingerprint + CCTV camera +PIN.
- 2, TCP/IP + USB + USB disk + SD Card Communication
3. Finger User capacity: 5,000, and available customize make 10000 to 30000, Records Capacity: 100,000. Application: Time and Attendance for Employees in office, School, Factory, Hotel, Club, Etc...

Technical Specification

TFT	3.5inch TFT, Color screen
Fingerprint Sensor Resolution	500DPI
Hardware Platform	ARM9
Operating System	Built-in Linux Operating System
Rotational Angle	Total Rotational Angle
FRR	≤0.1%
FAR	≤0.0001%
Identification Time	≤1 S
Query Record	Available
Real Time Fingerprint Picture Display	Available
Operating Mode	Off-line/On-line
Authentication Mode	1:1, 1:N
Identification Mode	Fingerprint, Password, Card(Optional)
Fingerprint Capacity	5,000(10,000 Optional)
Log Capacity	100,000 events (photo logs are stored in SD card)
Proximity Card	Available (ID Card)
Communication	USB; TCP/IP
DHCP	Available
U disk up/download	Available
SD Card Up/Download	Available
Language	Chinese, English, Korean
Voice prompt	Available
Message notification	Available
Capacity notification	Alarm when log capacity is full
Bell	Built-in timing bell
Camera	Integrated built in CCTV Camera
Power	DC 12V/1A
Operating environment	Operating Temp: 0°C-50°C, Humidity:80%
Size of the Terminal	190(L)*140(W)*37(H)mm



Access Control Management

Shenzhen Goldbridge Industrial Co.,Ltd.

Tel: +86-755-83260520 Fax: +86-755-88391348
 E-mail: sales@goldbridgesz.com, lilyjiang_06@163.com
 Website: <http://www.goldbridgesz.com>

NEW Fingerprint & RF ID Smart Card Time and Attendance System



ACM808



ACM810

Features & Advantages:

- 1, 2.8 inch TFT LCD Screen, Fingerprint + RF ID Smart Card + PIN.
 - 2, TCP/IP + USB disk + SD Card Communication
 - 3, Finger User capacity: 1,000, Records Capacity: 100,000.
 - 4, Strictly follow the national security product standard. Suitable for the entrances and exits of office, factory, hotel, school, etc
 - 5, Adopting the Energy-saving fingerprint sensor and power management function, makes the product perfect
- Application: Time and Attendance for Employees in office, School, Factory, Hotel, Club, Etc...

Technical Specification

Model	ACM808/ACM810	ACM816
TFT	2.8 inch TFT (320*240)	LCD Resolution :128*64
Fingerprint Sensor	(Energy-saving)Optical Fingerprint Sensor (Resolution:500DPI)	500DPI
CPU	32bit CPU	Built-in firmware program
Fingerprint Capacity	1,000	2,000
Log Capacity	100,000 events	50,000 events
Communication	USB (TCP/IP Optional)	USB
Identification Mode	Fingerprint, Password, Proximity Card	Fingerprint
Proximity Card	125Khz, EM4100 or other Compatible Contactless ID Card	Fingerprint
USB Flash Drive Up/Download	Available	
Record Query	Available (people can query their own attendance record after authentication)	
Rotational Angle	Total Rotational Angle	
Identification Time	≤1s	
FRR	≤0.1%	
FAR	≤0.0001%	
Operating Mode	Off-line / Online	
Authentication Mode	1:1, 1:N	
Language	Chinese, English, Korean	
Voice Prompt	Available	
Bell	Built-in Timing Bell	
Self Test	Available	
Power Management	Auto Sleep Time, Auto Power Off Time	
Power Adapter	DC 12V/1A	
Operating Environment	Operating Temp:-10℃ ~ +60℃, Humidity (RH) :20%~80%	
Size of the Terminal	180(L) × 134(W) × 36(H) mm	180(L) × 134(W) × 36(H) mm

UHF Long Range Integrative Reader & Writer

Product Features:

- ◎Fully Compatible ISO 18000-6B, EPC C1 G2(ISO 18000-6C) Protocol;
- ◎All-in-One design, quick reading speed, strong multi-tags anti-collision;
- ◎Waterproof desing, applied in outdoor, Durable and cost effectives;
- ◎High gain linear polarization antenna, long range reading.



Model# ACM801A,
Reading range under 12Meter


Brief Introduction

The products can be compatible with multi-protocol,integrated design ,quickly read, multi-tag read,proof-water,can be used widely in RFID systems,the mainly applying site is:

- 1.Logistics and warehouse Management:Goods flow,warehouse management,and the flowing management of mail,parcel,luggage.
- 2.Intelligent parking Management :Parking management and automatic charge
- 3.Productive lines Management: Production process fixed identification;
- 4.Product counterfeit-proof inspection:Using memory's write-protect functions inside tags,and identifying with true- false of products
5. Other fields:Used widely in club management,library,student ' school,consumption management,time management,dinner management,pool management

Technical Parameters:

Scanner Model	ACM801A
Protocol	ISO18000-6C (EPC GEN2) ,or ISO18000-6B
Frequency Range	ISM 902~928MHZ (FCC) or 865~868MHZ
Operation Mode	Fixed Frequency or FHSS Software Programmable
RF Power Output	0~30dBm
Reading Rate	Software Programmable, can identify fast-moving electronic lables whose speed is greater than 120km/h
Reading Mode	Auto And Touch or Software Programmable
Communication	RS232
Interface	RS485 (Syris485) Wiegand26/34 Software Programmable
Data Input	Input One Team
Reading Range	reading/writing range is not less than12M, the longest reading range is 30M
Reading Clue	Buzzer
Antenna	Built-in Antenna, 12dbi level polarization
Power Consumed	DC-9V±0.5V Adapter, less than 3 Amps
Dimension	460X460X45MM
Avoirdupois	6 Kg
Operation Temp	-35℃~+65℃, Storage temp.: -45℃~+95℃

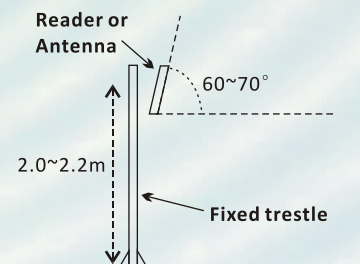

Installation Drawing on the Spot



Car Parking Management Application



Access Control Management

Shenzhen Goldbridge Industrial Co.,Ltd.

Tel: +86-755-83260520 Fax: +86-755-88391348
E-mail: sales@goldbridgesz.com, lilyjiang_06@163.com
Website: <http://www.goldbridgesz.com>

UHF Long Range Integrative Reader & Writer

Product Features:

- ©Fully Compatible ISO 18000-6B, EPC C1 G2(ISO 18000-6C) Protocol;
- ©All-in-One design, quick reading speed, strong multi-tags anti-collision;
- ©Waterproof desing, applied in outdoor, Durable and cost effectives;
- ©High gain linear polarization antenna, long range reading.



**Model# ACM812A,
Reading range 2-5Meter**

Brief Introduction

The products can be compatible with multi-protocol,integrated design ,quickly read, multi-tag read,proof-water, can be used widely in RFID systems,the mainly applying site is:

- 1.Logistics and warehouse Management:Goods flow,warehouse management,and the flowing management of mail, parcel,luggage.
- 2.Intelligent parking Management :Parking management and automatic charge
- 3.Productive lines Management: Production process fixed identification;
- 4.Product counterfeit-proof inspection:Using memory's write-protect functions inside tags,and identifying with true-false of products
- 5.Other fields:Used widely in club management,library,student's school,consumption management,time management, dinner management,pool management

Technical Parameters:


Scanner Model	ACM812A
Protocol	ISO18000-6C (EPC GEN2) ,or ISO18000-6B
Frequency Range	ISM 902~928MHZ (FCC) or 865~868MHz
Operation Mode	Fixed Frequency or FHSS Software Programmable
RF Power Output	0~30dBm
Reading Rate	Software Programmable, can identify fast-moving electronic lables whose speed is greater than 120km/h
Reading Mode	Auto And Touch or Software Programmable
Communication	RS232
Interface	RS485 (Syris485) Wiegand26/34 Software Programmable
Data Input	Input One Team
Reading Range	reading/writing range is not less than12M, the longest reading range is?30M
Reading Clue	Buzzer
Antenna	Built-in Antenna, 12dbi level polarization
Power Consumed	DC-9V±0.5V Adapter, less than 3 Amps
Dimension	460X460X45MM
Avoidrupois	6 Kg
Operation Temp	-35℃~+65℃,Storage temp.: -45℃~+95℃




Installation Drawing on the Spot



Smart Card Holder



UHF PVC Card Tag



UHF Wind shield Paper Tag



UHF Wind shield Tag



UHF Metal Tag



Access Control Management

Shenzhen Goldbridge Industrial Co.,Ltd.

Tel: +86-755-83260520 Fax: +86-755-88391348
E-mail: sales@goldbridgesz.com, lilyjiang_06@163.com
Website: <http://www.goldbridgesz.com>

Fingerprint and RFID Smart Card Time Attendance & Access Control System



Model#: ACM809

Features & Advantages:

1. Identification Mode: Fingerprint and RFID smart card and PIN.
2. Support TCP/IP, USB, USB disk and RS232/485 Communication Interface
3. Finger User capacity: 3,000, Records Capacity: 80,000.
4. Twin-CPU hardware design, Can work online and offline
5. No need to stick the prism film, easy to identify dry, damaged and incomplete fingerprints; supports 360 degree rotation identification

Application: Time and Attendance for Employees in office, School, Factory, Hotel, Club, Bank, etc...

Technical Parameters:

Item	Specification
Effective Reader Area	16mm*16mm
Fingerprint Capacity	3,000 templates
Transaction Storage	80,000
Management Records	1,000
Records Storage	80,000
E, [; puee Number	1-999999 any number
Authenticate Ways	Fingerprint, password, EM/Mifare Card
LCD	128*64 blue backlight, high definition and quality
FAR	0.1%
FRR	0.01%
Response Time	<0.7 seconds
Compare Type	1:N or 1:1
Anti-static Strength	<15KV
Communication	TCP/IP, USB, USB disc, RS485
Show Language	Chinese, English, Spanish, Korean, Portuguese, Arabic, German, French, Russian and so on.
Software Language	Chinese, English, Spanish, Korean, Portuguese, Arabic, German, French, Russian and so on.
Temperature	-10°C~55°C
Humidity	0%-99%
Power Supply	DC 9V-12V 1.5A



Access Control Management

Shenzhen Goldbridge Industrial Co., Ltd.

Tel: +86-755-83260520 Fax: +86-755-88391348
E-mail: sales@goldbridgesz.com, lilyjiang_06@163.com
Website: <http://www.goldbridgesz.com>

New Fingerprint and RFID Smart Card Access Control System Terminal



ACM9700



ACM9700A


Features & Advantages:

- 1.Support identification mode: Fingerprint / Card / Password / Fingerprint+Card / Fingerprint+Password / Card+Password / Fingerprint+Card+Password
- 2.Support TCP/IP , USB , and RS485 Communication Interface
- 3.Finger User capacity: 2,000,Records Capacity: 30,000.
- 4.Anti-dismantlement alarm, threatens alarm, unlock illegally alarm,not block alarm are available.
- 5.Strictly follow the national security product standard. Suitable for the entrances and exits of apartment, multi-family houses,office, factory, hotel, school, etc.

Technical Parameters:

Model	ACM9700/ACM9700A
LCD Resolution	128*64
Fingerprint Sensor Resolution	500DPI
Rotational Angle	Total Rotational Angle
FRR	≤0.1%
FAR	≤0.0001%
Identification Time	≤0.1 S
Query Record	Available
Real Time Fingerprint Picture Display	Available
Operating Mode	Off-line/On-line
Authentication Mode	1:1、1:N
Identification Mode	Fingerprint/ID Card/Password
Fingerprint Capacity	2,000
Log Capacity	30,000 events
Communication	TCP/IP,RS485
U disk up/download	Available
Language	Chinese, English, Korean
Voice prompt	Available
Capacity notification	Alarm when log capacity is full
Bell	Built-in timing bell
Lock Output	Normal Open / Normal Closed
Door Open Button	Can connect the common button, or the wireless remote controlled button
Doorbell Output	Can connect the doorbell in every voltages
Access Control Interface	Wiegand 26/34 Optional, Input/ Output Optional
Anti-passback	Available
Alarm	Threatens Alarm, Anti-dismantlement Alarm, Unlock Illegally Alarm, Circumscribed Alarm, Time-out Alarm
Power	DC 12V/1A
Operating environment	Operating Temp: 0℃-50℃, Humidity:80%
Size of the Terminal	181(L)*91(W)*36(H)mm

Access Control System Installing Sketch Map

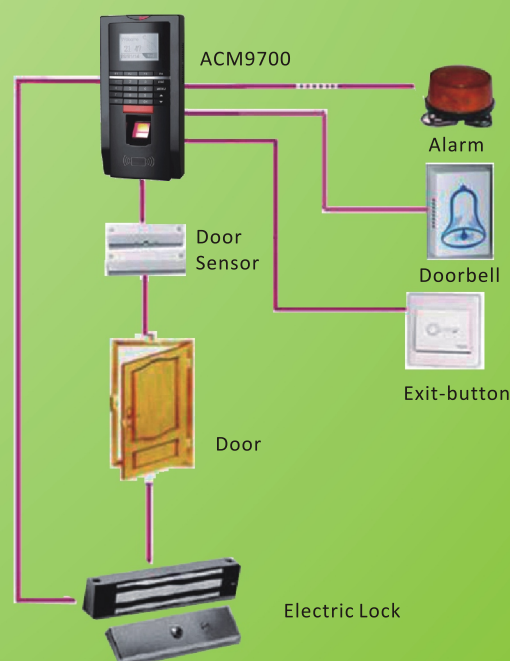

Access Control Management

Shenzhen Goldbridge Industrial Co.,Ltd.

Tel: +86-755-83260520 Fax: +86-755-88391348
 E-mail: sales@goldbridgesz.com, lilyjiang_06@163.com
 Website: <http://www.goldbridgesz.com>

2.45G Long Range Directional Integrated Reader


Active RFID Home-School Communication System

Brief Introduction

These directional integrated reader adopts the industry grade design, integrating 2.45G antenna and read module, and it is dustproof and waterproof, suitable for severe outdoor environment.



ACM09G



ACM08G

Active RFID Home-School Communication System Introduction

Every student wears a 2.45G RFID dual-frequency card. The 2.45G card can be automatically identified when students enter/leave school.

Then the system will send safety SMS to the pre-defined mobile phone numbers (The mobile phones of parents).

When students leave school, the 2.45G reader automatically identifies the cards, and then sends SMS to the parents.

When the students in the school need to call their parents, they can read the card in the terminal.

After that the students choose the number in the terminal, and call their parents.

Technical Parameters:

Scanner Model	ACM08G	ACM09G
Frequency Range	2.4GHz-2.45GHz ISM Microwave band	
Communication Interface	Dynamically encrypt mode	
Wireless Transmission Rate	1 MBps	
Operation Mode	Read tag only	
Identify Mode	Directional identification, horizontal 60 degree, vertical 60 degree	
Reading Range	0~80m (Depends on tag power)	
Sound Indication	Buzzer built-in	
Data Interface	Standard: RS232, RS485, Wiegand	
Power Consumed	DC-9V±0.5V Adapter, less than 3 Amps	
Dimension	285*205*77(mm)	90mm (L) × 58mm (W) × 7mm (T)
Weight	2Kg	2kg
Operation Temp	-35°C~+65°C, Storage temp.: -45°C~+95°C	-35°C~+65°C, Storage temp.: -45°C~+95°C



2.45G Smart Card



2.45G Smart Tag



2.45G directional reader



2.45G dual-frequency card (student card)



Home-School Communication Terminal

RFID Management System:



Home-School Communication System Sketch



Access Control Management

Shenzhen Goldbridge Industrial Co., Ltd.


Tel: +86-755-83260520 Fax: +86-755-88391348

E-mail: sales@goldbridgesz.com, lilyjiang_06@163.com

Website: <http://www.goldbridgesz.com>

RFID Mid-distance Series Of Card Reader (70-100MM)


Main Application: parking lot, elevator, logistics industry

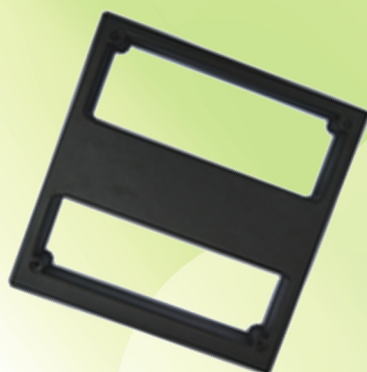

Model#: ACM26C



Model#: ACM08Y

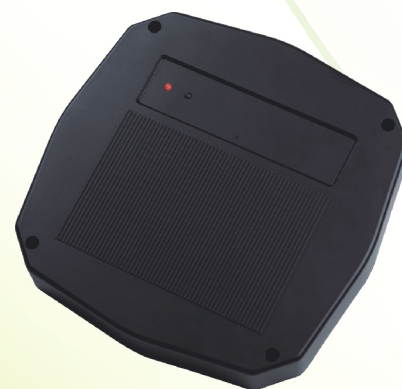

Model#: ACM08Z

Features:

- ◎ Read indication, LED display, buzzer, digital signals management
- ◎ Protections function for output, water proof and damp proof design, suitable for outside environment.
- ◎ Glass discharge tube and semiconductor discharge circuit for output.
- ◎ RS485 output adopting multilevel thunder protection, bearing 15KV static strike
- ◎ Excellent material for all products with strict examination, good consistency and steady capability

Card Reader Specification:

Model	ACM26C	ACM08Y	ACM08Z
size	230*230*35(mm)	260*260*35(mm)	230*230*35(mm)
color	Dark Grey	Dark Grey	Dark Grey
Voltage	DC 12V	DC 12V	DC 12V
Current	≤100MA	≤100MA	≤100MA
Reading Range	70~100CM	70~100CM	70~100CM
Output Format	Standard is Wiegand 26/34, Optional is RS232 or RS485		
Card Type	EM-ID Mid-distance Card	EM-ID Mid-distance Card	EM-ID Mid-distance Card
Communication Distance	≥100M	≥100M	≥100M

Guard Tour Patrol Management System Products

Brief Introduction

Guard tour system can supervise human's activities especially for security guards to check whether they fulfill the patrolling work according to certain plan and rules. It is easy and effective to control and track security guards' activities

Main Application

The product can be widely used in guard tour, security tour, line tour, train road tour, pipe line tour, bank note transfer, bus transfer and so on. Guard Security People Time Attendance in Buildings, Storehouses, Factories, etc as well as.



Model#: ACM650




Model#: ACM600

Guard Tour System (Contactless Waterproof Bar with Rechargeable Battery)



Model#: ACM620

Guard Tour System (RFID Contactless)



Model#: ACM630

Contact I-Button Guard Tour System

Completed System Consists Parts:

1. Downloader

Micro-computer design; used for connection between guard tour reader and computer, and for information tag register, guard tour reader setting, data- collection/clearance from the reader, etc.

2. Guard Tour Reader

Memory integrated chip of information is comprised of stainless steel case of waterproof. There are only ordinal numbers in the whole world to memory patrol site and system command etc.

3. Information Attendance Tag(checkpoint), Used for Mark the checkpoint

It's a RF Tag to record site information with checkpoint's No. in it; glass or plastic shell; Used with guard tour reader and downloader


4. ID Button Tag, Used for Store guarder's information

Used with guard tour reader and downloader

5. Guard Tour System Management Software

It is of use for setting up system parameters, patrol site, personnel management, user's work status and data read and processor. The operation system is WINDOWS98/2000/XP/vista

Schematic Diagram for Use of Guard Tour Wand

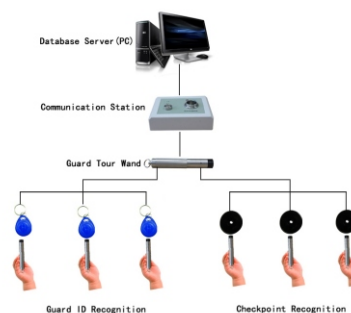

System Sketch

Technical Specification

Product Model	ACM600	ACM620	ACM630	ACM650
Working Mode	RFID	RFID	I-Button Contact	RFID
Capacity	7200 records	2,000 records	2,000 records	1,000 records
Communication	Collect data by downloader Bar	Collect data by downloader	Collect data by downloader	Collect data by hand downloader
Shell	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Dimension	L140 × 26 (mm)	L163 × 25 (mm)	L163 × 25 (mm)	L168 × 55 (mm)
Weight	250g	555g	555g	500g
Power Supply	One cell of 3.6V 800mAh Lithium battery	One cell of 3V Lithium battery	One cell of 3V Lithium battery	One cell of 3.6V 900mAh Lithium battery



Access Control Management

Shenzhen Goldbridge Industrial Co.,Ltd.

Tel: +86-755-83260520 Fax: +86-755-88391348
E-mail: sales@goldbridgesz.com, lilyjiang_06@163.com
Website: <http://www.goldbridgesz.com>

RFID Cashless Catering Meal Charge POS System (Network TCP/IP, Desktop)



Model#: ACMB3P-1

POS Charge System Stand alone Machine



Model#: ACMB3P-3

POS RFID Recharge Card Reader&Writer

Product Features

LCD and Server Mode,TCP/IP and Standalone work,With Back-up battery,Built-in E-Wallet

1. RFID Smart-card?meal Service can issue card,recharge,consume,subsidize,return card,count,enquire,register the loss,etc. and provide all kinds of report sheets with user-friendly operation and perfect functions.
2. Achieve multiple pay modes such as Normal, Fixed Deduction, Number Key to Set Value,Transaction Times; optional setting of maximum spending amount,limited transaction times or limited amount according to the need.
3. Built-in E-wallet; support offline mode, consumption by amount or times
- 4.Double encryption for Mifare/IC card to ensure secure and reliable consumption
5. Hi-definition LCD screen; employee name and card's expiry date can be displayed
6. Back-up battery so that it can still work properly when power failure occurs

One-card system combined charging, attendance and access control; applying to restaurant,club, parking lot,school,factory,hotel and so on.

Mian Application

Catering Meal Charge,School,Factory,Hotel,Club,Car Parking,etc...

Technology Specifications:

- 【Appearance】 Wall-mounted
- 【Pay Mode】 Mifare/IC mode
- 【Working Mode】 Offline
- 【Capacity】 8,000 records, 200,000 blacklists
- 【Communication Protocol】 RS485 and TCP/IP
- 【Communication Port】 Wire or RJ45 plug (optional)
- 【Card Supported】 Mifare/IC card
- 【Power Supply】 DC9V~12V, 500mA
- 【Average Power Consumption】 < 3W
- 【Temperature & Humidity】 -10° C ~ 55° C, 0%-90%
- 【Dimension】 210mm×140mm×42 mm
- 【Response Time】 < 1 second
- 【Response Distance】 > 3cm
- 【LCD】 Hi-definition LCD screen

Software Functions

- ◆Different cards with different consumption rights
- ◆Optional setting of limited consumption per meal or per day
- ◆Optional setting of cards authorized for consumption & maximum spending amount
- ◆Cashier management
- ◆Recharge by online mode or recharge machine
- ◆Cancelling previous incorrect operation
- ◆Register the loss of card, re-issue card, change card, return card and cancel card
- ◆Record enquiry of recharge, withdrawal, loss-register and card-change
- ◆Check consumption details
- ◆Enquiry for balance, daily report sheet, monthly report sheet and personal report sheet.



Access Control Management

Shenzhen Goldbridge Industrial Co.,Ltd.

Tel: +86-755-83260520 Fax: +86-755-88391348

E-mail: sales@goldbridgesz.com, lilyjiang_06@163.com

Website: <http://www.goldbridgesz.com>

BUSWAY Mobile DVR With Built-in 3G,GPS and WIFI

Model#: ACM-G3-GPS

Brief Introduction

ACM-G3-GPS Mobile DVR adopt highly integrated H.264 ASIC, its image quality is excellent.

In addition to using the hard disk as a video storage medium Net model and Wireless model Can use SD card as a video storage medium to improve the stability of record data.

Through the built-in USB port the video data can be backed up quickly.

In addition to integrated vehicle status monitor,Wireless model can support built-in GPS,2G/3G modules.

ACM-G3-GPS can be widely used in buses,taxis,police cars,law enforcement vehicles, and other various types of vehicles.

Product Features

- ◎H.264 Compression,Record Resolution Up to D1
- ◎Dual Stream for Recording and Network transmit
- ◎Support Hard disk and SD card recording,USB and Network Backup
- ◎Pluggable hard disk 2.5"HDD tray,with mature vibration reduction technology
- ◎Independent 6 vehicle status monitor interface,of which one can speed
- ◎DC6-36V power input,Vent-free enclosure design



Mobile DVR



Model#: ACM-716A
7" TFT Monitor LCD Display For Bus

Technical Parameters:

Model	ACM-G3-GPS (4 Channel)		
Video Input	4Ch	Audio Output Parameter	3Vp-p, 600ohms, Shard the Aviation plug with video output
Video Input Parameter	1.0Vp-p,75 Ohms,Aviation plug	Mobile Embedded Module	Optional(Wireless model)
Video Output	1 Ch	Communication Port	1 Ethernet, 1RS232, 1RS485, 1RS422 (Optional for basic model)
Video Output Parameter	1.0Vp-p,75 Ohms,Aviation plug	Memory Port	1 USB2.0, 1 SD(optiona for basic model)
Video Compression	H.264	Vehicle Status Monitor	6,1 for speed
Preview	D1 resolution(PAL:704×576, NTSC:704×480)	port	
Resolution		Alarm Input	4Ch,5V@10mA
Dual Stream-Main	120FPS@CIF(NTSC),100FPS@CIF(PAL)	Alarm Output	2Ch,1A@110V
Dual Stream-Aux	30FPS@CIF(NTSC)	Record mode	Continuous, Cycle, Schedule, Alarm, Motion detection
Record Resolution	25FPS@CIF(PAL)	Video search method	By Channel, time, record time, storage location
Dual Stream	CIF	Text Overlay	Yes(plate number, time, Vehicle status)
Network transmission	Independent 4CIF(MDR86-01D/02D Only), CIF OR QCIF	Power On mode	Schedule, ignition on, delay
Playback Frame rate		Power Off mode	Schedule, delay after ignition off
Record band rate	PAL: 1~25 fps ,NTSC: 1~30 fps 16K~2M adjustable, Customizable (unit: bps)	Power Input	DC6-36V
Audio Input	4Ch	Power Output	DC12V 2A, 5V 2A
Audio Input Parameter	2Vp-p Line,10K Ohm , Shard the Aviation plug with video input	Power Consumption	12W(with out hard disk and communication module)
Audio Output	1Ch	Temperature	0°C ~ +60° C (Customizable)
Wi-Fi Module	Optional(Wireless model)	Humidity	10%~95%
3G Module	Optional(Wireless model)	Protection Level	IP54
GPS Module	Optional(Wireless model)	Dimension	175mm (W) X 190mm (D) x 40mm (H) w/o bracket



Access Control Management

Shenzhen Goldbridge Industrial Co.,Ltd.

Tel: +86-755-83260520 Fax: +86-755-88391348
E-mail: sales@goldbridgesz.com, lilyjiang_06@163.com
Website: <http://www.goldbridgesz.com>

BUSWAY CCTV SYSTEM - 3G,GPS AND WIFI MANAGEMENT SOLUTION

System Introduction

The Busway CCTV system consists of a public transport network of many busway as needed, Monitored CCTV covers the stations and safety points have been installed in their buses and shelters as a way to prevent sexual harassment and petty crimes committed by passengers

The surveillance cameras would help passengers who fall victim to such crimes to bring their cases to trial. The CCTV recordings can be used as evidence for the police to follow up reports from the victims

Purpose

Driver operated control, evidence of irregularities to the driver, to further standardize and drivers. Ticketed my supervision, prevent and passengers ticketed private collection, or relatives without a ticket. Evidence of public safety after the incident.

Main Application


- ◎ Bus Vehicle Management
- ◎ Long, Medium and Short-distance Car Management
- ◎ Logistics Vehicle Management
- ◎ Law Enforcement Vehicle Management
- ◎ School Bus Management
- Train Management
- ◎ Escort Vehicle Management
- ◎ Management of Private Vehicles



CCTV Surveillance Cameras

Busway CCTV System Completed Hardware Include:

Mobile DVR with 3G and GPS
CCTV Video Camera
Pickup
Monitor
LED display
Installation Cable
Voice Announcement
Suitable 3G Frequency Range: 800MHz-2200MHz

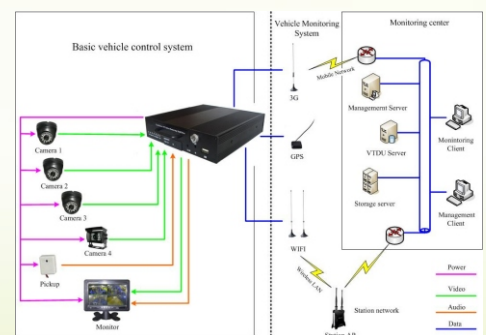

BUSWAY CCTV SYSTEM SKETCH



3G Real-Time Video Preview Sketch



Access Control Management

Shenzhen Goldbridge Industrial Co.,Ltd.

Tel: +86-755-83260520 Fax: +86-755-88391348
E-mail: sales@goldbridgesz.com, lilyjiang_06@163.com
Website: http://www.goldbridgesz.com



UHF Handheld RFID Reader - RFID Data Collection System



Model#: ACM319A

Brief Introduction

UHF handheld reader ACM319A is the 5th generation product developed by our company.

It can read/write the electronic labels on the tags, which complies with UHF EPC Gen2 (ISO18000-6C), and ISO18000-6B standards.

This handheld reader can be widely applied to data collection systems, such as Vehicle Access Control Management, Personnel Access Control Management, Electronic Anti-counterfeiting, Logistics Supervise, Auto-production Management, etc.

Product Features:

- ◎Support UHF RFID;
- ◎Support WiFi, Communicate with LAN by wireless network;
- ◎Outdoor user can keep in touch with Headquarters at any time by GPRS;
- ◎Integrated Long Range Laser Barcode Scanner;
- ◎Handwrite input, support signature capture function;
- ◎Industry IP54 Hardware design and can be used in Harsh environment;
- ◎Good Performance and Cost-effective.

Technical Parameters:

ITEM	TYPE	REMARK
Operation System	Microsoft Windows CE 5.0	
Processor	SAMSUNG 400 MHz CPU	
Memory	ROM128MB, RAM 128MB SDRAM	expandable by SD card slot with maximum capacity to 1GB
Screen	3.5 inch QVGA (240*320pixel) color	Transflective TFT-LCD with LED backlight
Keypad	25+1 digital backlight keypad	soft keys, support handwritten input
Standard Battery	3.7V 2800mAh/3200mAh Li-ion Battery	Inside backup battery: 17mAh
Standard Communication	USB1.1, RS232	
WiFi	IEEE802.11b/g, 11Mb/s~54Mb/s	Built-in
GSM/GPRS communication	900/1800/1900MHz	
Audio	built-in speaker	Mini earphone slot (2.5mm Stereo)
Information collection	RFID, Barcode Scanner, Input board, Stylus	
Support RFID Protocol	EPC Gen2(ISO18000-6C), ISO18000-6B	
RFID Reading Distance	ISO18000-6C: 500~1200mm ISO18000-6B: 500~1200mm	Reading distance depends on protocol, antenna, tag and working environment.
Barcode Scan/Decode Speed	100 times/s	Barcode Recognition Angle: 54° Effective Read Angle: 44°
Support Barcode type	China Post code, Code 39, Code 93, Code 128, EAN-8, EAN-13, UPC, Cross 25 code, etc.	
Laser Light Security standard	IEC 825	

Under $T_A = 25^{\circ}\text{C}$ unless specified.



Access Control Management

Shenzhen Goldbridge Industrial Co., Ltd.

Tel: +86-755-83260520 Fax: +86-755-88391348

E-mail: sales@goldbridgesz.com, lilyjiang_06@163.com

Website: <http://www.goldbridgesz.com>

UHF 4-Antenna Channels Technical Grade Fixed Reader&Writer

Brief Introduction

ACM918Z is a high performance UHF RFID fixed reader. It is designed upon fully self-intellectual property.

Based on proprietary efficient digital signal processing algorithm, it supports fast tag read/write operation with high identification rate.

It can be widely applied in many RFID application systems such as logistics, access control, anti-counterfeit and industrial production process control system.

Product Features:

- ◎ Self-intellectual property;
- ◎ Support ISO18000-6C (EPC C1G2), ISO18000-6B protocol tag;
- ◎ 902~928MHz frequency band (frequency customization optional); FHSS or Fixed Frequency transmission;
- ◎ RF output power up to 30dbm (adjustable); 4 TNC antenna port;
- ◎ Support auto-running, answer and trigger work mode; Support EPC and TID inventory;
- ◎ Low power dissipation with single +9 DC power supply;
- ◎ Support RS232, RS485, TCP/IP with other interface optional;
- ◎ Built-in LED, Buzzer, GPIO and Relay; High reliability design.



Model#: ACM918Z

UHF Desktop Reader&Writer (USB, TCP/IP, RS232 Communication)

Brief Introduction

UHF Desktop reader&writer is a high performance Multiple Protocol UHF RFID Reader. It is designed upon fully self-intellectual property.

Based on proprietary efficient digital signal processing algorithm, it supports fast tag read/write operation with high identification rate.

It can be widely applied in many RFID application systems such as logistics, access control, attendance system, anti-counterfeit and industrial production process control system.



Model#: ACM217
USB Communication



Model#: ACM218
RS232, TCP/IP Communication

Technical Parameters:

Scanner Model	ACM217	ACM218	ACM918Z
Protocol	ISO18000-6B, ISO18000-6C (EPC GEN2)	ISO18000-6B, ISO18000-6C (EPC GEN2)	ISO18000-6B, ISO18000-6C (EPC GEN2)
Frequency Range	ISM 902~928MHz (FCC) or 865~868MHz	ISM 902~928MHz (FCC) or 865~868MHz	ISM 902~928MHz (FCC) or 865~868MHz
Operation Mode	Fixed Frequency or FHSS Software Programmable	Fixed Frequency or FHSS Software Programmable	Fixed Frequency or FHSS Software Programmable
RF Power Output	0~27dBm	0~27dBm	0~30dBm
Reading Rate	Software Programmable, Average Reading per 64Bits: <10ms	Software Programmable, Average Reading per 64Bits: <10ms	Software Programmable, Average Reading per 64Bits: <10ms
Reading Mode	Auto And Touch or Software Programmable	Auto And Touch or Software Programmable	Auto And Touch or Software Programmable
Communication Ports	USB	Standard port: RS232; Custom-made port: RS485, Wiegand 26/34, WIFI interface, TCP/IP	RS232, RS485, TCP/IP
Data Input	Input One Team	Input One Team	Input Four Team
Reading Range	Reading Tag >0.2m	Reading Tag >0.2m	Reading Tag >2m
Reading Clue	Buzzer and LED	Buzzer and LED	Buzzer and LED, GPIO and Relay;
Antenna	Built-in small round polarization Antenna	Built-in small round polarization Antenna	Built-in round polarization Antenna
Power Consumed	DC +5V (Power Adapter)	DC +5V (Power Adapter)	DC +9V (Power Adapter)
Dimension	140mm × 110mm × 30mm	140mm × 110mm × 30mm	160mm × 186mm × 50mm
Net weight	0.5 Kg	0.5 Kg	2kg
Operation Temp	-10℃~+60℃	-10℃~+60℃	-10℃~+60℃



Access Control Management

Shenzhen Goldbridge Industrial Co., Ltd.

Tel: +86-755-83260520 Fax: +86-755-88391348

E-mail: sales@goldbridgesz.com, lilyjiang_06@163.com

Website: <http://www.goldbridgesz.com>



RFID Stand alone Access Control and Time Attendance System

The Bright Star Of Security

High Speed network Version: Proximity Access Control and Time Attendance Machine Adopt American Intel high performance flash memory, and Can run in high speed for a lot time. Contactless, Remote and sensitive card reader.



Model#: ACM100

Waterproof and IP-based Access Control



Model#: ACM103

Network Anti-Pass Back Access Control



Model#: ACM403

HOT Standalone Access control
and Time attendance

Product Introduction

These products developed in LINUX system. It could use USB flash disk to download the data.


It has the message function which will be shown at the certain date; after setting, when the certain person checks in, the message will show a reminding message on the LCD.

It have inner background light for LCD and keypad. It could work stand alone and keep the records. Meanwhile, through RS232, RS485 or TCP/IP, it could be managed the system by PC.

These are certificated by CE, UL, FCC and MIC, they're the best choice for the users who require safe, high quality, reliable and steady.

Technical Specifications

Card Holders	30000 cards
Transaction Capacity	50000 records
Access Mode	Card Only, PIN Only, Card+PIN
Read Range	10-15 cm, Ethernet: 10/100M, Wiegand I/O: any bit, USB: Mini-USB 2.0 port,
I/O Interface	RS232 (10M)/ 485(1.2km), .Baud Rate: 9600-115Kbps programmable
Communication Interface	Standalone or contacted PC with RS232 or RS485 or TCP/IP,USB, USB disk
Access Control Function	50time zones, 5groups, 10 open door combination, supports multi-users enter, TTL for connecting to lock, door sensor, exit button, alarm
LCD Panel	4 line, 16 character each ling (User name, ID number, time, date, states)
Keypad	4x4 metal keypad with 4 function keys, Users can set up threatened alarm and code by themselves.
Audio Visual Indicator	Red LED (Access denied)/Gree LED(Access granted)with Audible Beep
Power Requirement	12V DC, 400mA,.Housing Material: ABS
Operated in night with 16	bits backlight keyboard, With 10 cm Proximity Reader and LCD inside
Standard	ID card, Wire doorbell, Weigand OUT and Weigand IN, USB host, Short message
Optional	HID/Mifare card, Webserver, Workcode, Printer, Antipass-back
Product Size	ACM100: 15x10.5x4.8 (cm)/ ACM103: 12x9.5x4.1 (cm)/ ACM403: 14x9.5x3.8 (cm)

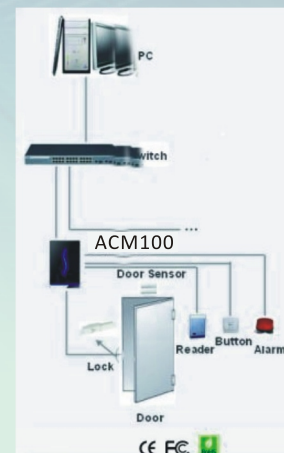

Door Access Control
Sketch Diagram



Access Control Management

Shenzhen Goldbridge Industrial Co.,Ltd.

Tel: +86-755-83767678 Fax: +86-755-88391348

E-mail: sales@goldbridgesz.com, lilyjiang_06@163.com

Website: <http://www.goldbridgesz.com>

Network TCP/IP Access Control System Board

Completely Support Real Data Transfer Via Internet
B/S Structure "Internet & Explorer" Server Mode

Product Introduction

- ◎ ACM Series Access Controllers fits any type of installations, up to 10,000 users, 30000 in and out records. from single buildings to multiple sites spread over remote locations and linked via TCP/IP
- ◎ The user-friendly Access software (B/S Structure or called 'Internet & Explorer Server' Mode) programs the system within a few minutes, from a non-dedicated PC.
- ◎ Access Software provides numerous access control and alarm monitoring features: expiry date for clubs, automatic activation, interlock between two doors, time zones, supervision, anti-pass back, activity reports
- ◎ Each alarm input is programmable: operating mode (NO or NC), time zones, local reflex (activation of outputs according to input status).
- ◎ Specific alarms are triggered according to the number of unsuccessful attempts, the time limit for door closing (door alarm), the duress code...
- ◎ Whenever required, the data stored in the controllers is transferred to the computer and activity reports are printed. Each controller works independently and keeps its own database



ACM01 1door /2 reader Board



ACM02 2door/4 reader
Access Control Board



ACM04 4door/4reader
Access Control Board



ACM3A 3A Power Supply

Product Features

- ◎ Build-in browser software, Completely adapt to internet and Lan, Management system
- ◎ Build-in TCP/IP Protocol and Dial-up (PPP) Protocol, It can directly connect Internet with the Broad Band, CATV, ADSL, Dial-up, GPRS, CDMA
- ◎ Support the dynamic IP Inter-connection
- ◎ Real-time data transfer exchange with Internet and Remoting Server
- ◎ Adopt the B/S configuration software, that is the "Browser+Server" Mode
- ◎ There have SQL SERVER background database
- ◎ Be the same with all kinds of operation system and interface program of Database
- ◎ Can be connect with the WG26/WG32/WG34 Card Reader, can realized for the single door two door and four door in/out, and can be compatible Motorola, HID, TI, EM and Mifare card reader and so on !

ACM01/02/04 Access Control Board Specifications

CPU	32 Bit Microprocessor
Power	DV 12V
Work Current	200mA
Offline Capacity	10000 Proximity cards, 30000 records
Communication	100M Ethernet Port, Real time transfer
LED Indication	Red, Green, Blue
Door Quantity	1 Door/ 2Door / 4 Door

Stand Alone Offline Single Door Access Controller (EM Card + PIN)

Product Features

StandAlone offline single Access Controller that is specially design for the Office building, Factory employee dormitory, and building commonality passage, offer a access controller solution with simpleness directly and competitive low costs for consumer



Model#: ACM2000C



Model#: ACM08E



Model#: ACM207B



Model#: ACM207C

Technical Specifications

	Model#: ACM2000C	Model#: ACM08E	Model#: ACM207B	Model#: ACM207C
Capacity	200 card and 1000 PIN	200 card and PIN	200 card and PIN	200 card and PIN
Color	Inory	Dark Gray	Black	Black or White
Size(mm)	117(W)x21(D)x117(H)	88(W)x32(D)x108(H)	144(W)x80(D)x23(H)	128(W)x82(D)x23(H)
Communication	Wiegand 26	Wiegand 26	Wiegand 26	Wiegand 26



Access Control Management

Shenzhen Goldbridge Industrial Co.,Ltd.

Tel: +86-755-83767678 Fax: +86-755-88391348
E-mail: sales@goldbridgesz.com, lilyjiang_06@163.com
Website: <http://www.goldbridgesz.com>

Multimodel Face Identification Time Attendance and Access Control Terminal

Introduction

It's new new generation multiple biometric identification product, standard integrating with Face, Fingerprint, PIN recognition and optional with RFID mode, as to facial identification algorithm, it captures the relative position, size, and shape of user's eyes, nose, cheekbones, and jaw features, these feature templates are used to be matching feature data, when users verify on device, it distills captured features into value and compares with templates to eliminate variance.

ACM905 may hold 3000 faces with out dividing groups, its default identification mode is Fingerprint & Face, additionally, as it is a kind of professional access control facial device, it may work with the third party such as electric lock, alarm, door belling, sensor and so on, In order to improve security for human life and enterprise information



Model#: ACM900



Model#: ACM905


Features & Advantages

- ◎Elegant ergonomic design
- ◎Default verification mode is Fingerprint&Face, available to choose other 19 modes, such as RFID&Face, Face&PIN, Fingerprint only, RFID only, may hold 3000 face templates.
- ◎TCP/IP, RS232/485 communication and USB Host.
- ◎3.0 inch TFT touch screen, T9 Input, 9 Digit User ID.
- ◎2 user-defined function keys, the left one is for door belling, the right one is for shift of identification mode.
- ◎Infra-red optical system enables user-identification in poorly lit environments.
- ◎Wiegand input for working with wiegand reader, wiegand output for connecting to access control panel.
- ◎Optional with ID card module or Mifare card module - Professional access control compatible with the 3rd party door sensor, alarm, exit button, wired bell and electric lock.
- ◎50 time zones, 99 groups and 10 unlock combinations, anti-pass back and dismantle function.

Technical Specification

Model	ACM905	ACM900
CPU	Multi-Bio CPU 630MHz	Multi-Bio 600
Memory	256M Flash, 64M SDRAM	
Hardware	Platform: ZEM600	
Fingerprint Sensor	Optical Sensor	
Camera	High Resolution Infrared Camera	
Display	3" Inch Touch Screen	4.3" TFT touch screen
Face Capacity	400 (optional 3000)	700
Fingerprint Capacity	2000 (optional 5000)	-
ID Card Capacity	10,000(optional function)	10,000
Logs Capacity	10,000	100,000
2000mAh Backup Battery	N/A	Yes
Communication	TCP/IP, RS232/485, USB Host	TCP/IP, RS232/485
Access Control	3rd party electric lock, door sensor, alarm, wired bell	
Interfaces for	and exit button	
Wiegand Signal	Wiegand in and out	
Optional Functions	ID Card, Mifare card.	
Power Supply	12V/3A	
Verification Speed	≤2S	
Operating temperature	0°C-45°C	
Operating Humidity	20%-80%	
Dimensions	275(L)x100(H)x195(W) mm	193.6x165.2x86 (mm)
Gross Weight	0.87 kg	1.5 kg

Configuration

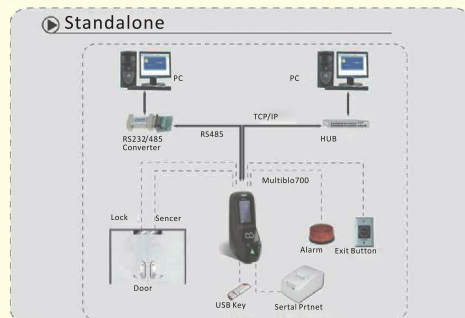

Access Control Management

Shenzhen Goldbridge Industrial Co.,Ltd.

Tel: +86-755-83767678 Fax: +86-755-88391348
E-mail: sales@goldbridgesz.com, lilyjiang_06@163.com
Website: <http://www.goldbridgesz.com>

NEW Multimodel Face Identification Time Attendance and Access Control Terminal

Enterprise Type Time and Attendance System

Product Introduction

Enterprise attendance system standard series, with friendly GUI, 100% touchpad operation, vivid voice prompt, convenient web client management as well as 7x24 working endurance, is the best partner for enterprise users. Furthermore, active auxiliary illumination technologies make the systems strongly robust against light-changing environments;

It's the first genuine "Outdoor" face recognition attendance system on the earth. As for the functionalities, self-studying intelligence, USB import/export, web-based management, unlimited users support, multiple recognition modes, and built-in powerful attendance management software, it provides a "Convenient and Effective" attendance management solution



Model#: ACM903
3.5" TFT Face Identification T&A



Model#: ACM906
2.8" TFT Face Identification T&A



Model#: ACM902
3.5" TFT Face Identification T&A

Features & Advantages

©Latest face recognition algorithm

Exclusive Face Image+ V4.0 algorithm, bound with "multiple light face recognition technology" and high performance DSP processor, excellent accuracy, fast analysis speed.

©Genuine outdoor fitness

First outdoor workable face recognition product on earth, superb adaptability for changing illumination; Robust against race, complexion, gender, facial expression, beard and hair style difference

©Easy to use, friendly user interface

TFT touch screen, user friendly GUI and WEB management software, local operation supported, real-time display and vivid sound provided

©Multiple recognition modes supported


Face recognition only; password + face recognition; ID/IC card + face recognition, and so on.

©Huge storage capacity, USB backup supported

Large storage SD card embedded. USB massive storage device data import/export supported

Technical Specification

Model	ACM903	ACM906	ACM902
CPU	Multi-Bio 600		
Memory	256M Flash, 64M SDRAM		
Fingerprint Sensor	Optical Sensor		
Camera	High Resolution Infrared Dual- Camera		
LCD Display	TFT,3.5 Inch LCD 320x240	TFT,2.8 Inch LCD	TFT,3 Inch LCD
Face Capacity	800	500	500
ID Card Capacity	optional function		
Logs Capacity	2G SD Card (Support up to 250,000 records) 32G SD Card (Support up to 5,000,000 records)		
2000mAh Backup Battery	N/A	Yes	
Communication	TCP/IP, RS232/485, USB ,SD Card		
Access Control	electric lock, door sensor, alarm, wired bell and exit button		Time attendance
Interfaces for			
Wiegand Signal	Wiegand in and out		N/A
Power Supply	12V/3A		
Verification Speed	≤2S		
Operating temperature	0℃-45℃		
Operating Humidity	20%-80%		
Dimensions	207x158x43(mm)	206x108x93(mm)	215x150x52(mm)
Gross Weight	1 kg		
	Built-in webserver		

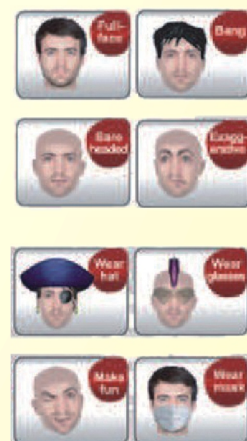

Access Control Management

Shenzhen Goldbridge Industrial Co., Ltd.

Tel: +86-755-83767678 Fax: +86-755-88391348
E-mail: sales@goldbridgesz.com, lilyjiang_06@163.com
Website: <http://www.goldbridgesz.com>

RFID HOTEL DOOR LOCK SYSTEM

Application for apartment ,hotel,office,etc

Product Features

- 1、 It is forged by zink alloy(stainless steel or copper) once, with high security and solidty nature.
- 2、 Intellectual ultrathin little core of lock,This makes the breakage to the door as little as possible when making holes.
- 3、 Free handle, to prevent the external stress from ruining the internal structure. The working life is long.
- 4、 We test every circuit board to ensure its lifespan.
- 5、 Lack of voltage indication to clew users should change batteries in time.
- 6、 Emergency Cards or mechanical keys are used to open doors in special situations.
- 7、 Preserve the latest 256 records of door opening circularly. Knowing about the dynamic at any moment.
- 8、 Ending the open functions of lost or oppointed cards.
- 9、 Indication of not cloisng doors. There are clocks in internal parts of locks to control the using time of key cards and preventing clients owing charges.
- 10、 Our software can clarify the administration classes of general manager, buildings, floors, service areas and rooms. Authority purview is really clear



Model#: ACM-I/R500
Newest RFID Lock



Model#:ACM-R100YS-GOLD
Material:Stainless Steel Zink
Color:Gold



Model#:ACM-R100YS-SLIVER
Material:Stainless Steel Zink
Color:Sliver



Model#:ACM-I/R300
Material:Stainless Steel Zink
Color:Gold



Model#: ACM-I/R400
Material:Copper
Color:Gold

Hotel Door Lock System Products



Model#: ACM-T07
Room Card issue reader&writer, with hotel management software



Model#: ACM-K7
RFID Smart Card Power Switch



Model#: ACM-MF1
RFID Hotel Room Card

Fingerprint Door Lock



Model#: ACM4398



Model#: ACM3398

Features

- ◎Luxurious, elegant, fashionable pattern, alloy lock body. Compact and artistic state designed by Germany experts.
- ◎The Lock Adopts advanced plating technique and Nanometer technique, it is robust and unfadable.
- ◎This Fingerprint Door lock are mainly used in office, hotels, police office, banks, Customs, multifarious organizations, villas, apartments, house and etc.



Access Control Management


Shenzhen Goldbridge Industrial Co.,Ltd.

Tel: +86-755-83767678 Fax: +86-755-88391348
E-mail: sales@goldbridgesz.com, lilyjiang_06@163.com
Website: <http://www.goldbridgesz.com>

Access Control Door Lock and Accessories




Y100 Electric Bolt Lock

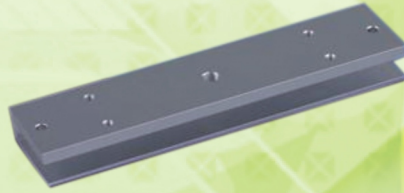

Y180UL U Bracket for Y180/Y280 magnetic Door lock



Y801 Power supply Controller

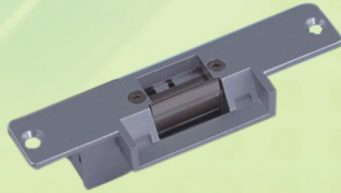


Y130 Electric Standard type Strike Lock



Y180L L Bracket for Y180/Y280 magnetic Door lock



Y802 12V 7ah Backup Battery (work 10hours)

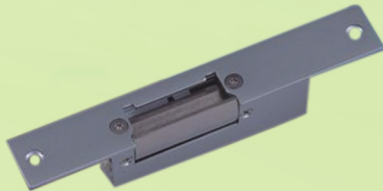

Y131 Short-Type Electric Strike Lock



Y280ZL The ZL Bracket is for inward Door



K1 Exit Door Release Button



Y132 Long-Type Electric Strike Lock



Y600 The Stainless Steel Bracket is for Frameless Glass Door



K2 No Touch Door Release Exit Sensor



Y180/Y280 Single Door Magnetic Lock




Y180/Y280 Double Door Magnetic Lock



K3 FIRE Alarm Break Glass



Y806 3A/5A Backup power supply

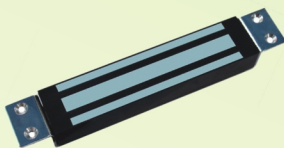

Y280N Built-in Voltage Spike Suppressor Lock



ACM-M60 Door Closer



Y485 RS232/RS485 Converter



Access Control Management

Shenzhen Goldbridge Industrial Co.,Ltd.

Tel: +86-755-83767678 Fax: +86-755-88391348

E-mail: sales@goldbridgesz.com, lilyjiang_06@163.com

Website: <http://www.goldbridgesz.com>

Security Burglar Alarm System

Car Alarm System



Model#:	ACM8602
Description:	Wireless Telephone Network Burglar Alarm System

Function and Features

8 wireless zones, 6 wired zones and 1 output for alarm centre, Auto-dial 6 groups of phones which preset. Can auto set 1, 2 grade to arm / disarm



Model#:	ACM8501
Description:	Two-way Car Alarm system

Function and Features

- 1) New two-way TFT LCD code-jumping transmitters
- 2) Adopt Hi-tech Master Control chip imported from the USA
- 3) Basic Function For Car: Warning of being under these status: shocked when in the arming state, ever being unclenched when the car door is opened in the state of disarm, ever being shocked or bumped when the car door is opened in the state of disarm, improperly closing the door 15 seconds after startup of the engine or 5 seconds after alertness.
- 4) Waterproof, Dustproof & Anti-electrostatic
- 5) Real time clock and parking timer function
- 6) Password to unlock the door even without transmitter or key



Model#:	ACM8805
Description:	GSM Alarm System (Single GSM Network)

Function and Features

16 wireless defense zones and 3 wired zones. Can store 5 group telephone numbers. Onsite voice Monitoring through telephone from long distance, Send SMS to arm, disarm, scene monitor, remote output, main unit setting;



Model#:	ACM8801
Description:	GSM Alarm System (Single GSM Network)

Function and Features

4 wired zone, 6 wireless zone, 6 groups of phone numbers for voice calling and 3 groups for SMS Messages, Telephone (phone) long-distance telecontrol for arming, disarming, monitoring, talkbacking, shouting, and controlling appliances

Motorcycle Alarm System



Model#:	ACM8701
Description:	Motorcycle Alarm System

Function and Features

- 1) Remote arm/disarm/startup/flame-out/help
- 2) The host power: DC10-16V
Electric current in static state: $\leq 4\text{mA}$
Remote control power: DC10-12V
Remote control emission current: 3mA
- 3) Emission receive frequency: 315MHz/±75KHz
- 4) Remote control distance $\geq 70\text{m}$ (in the open air)



Model#:	ACM8808
Description:	GSM/PSTN Dual Network Burglar Alarm System

Function and Features

16-Wireless Zone; 2-Wired Zones; 1-Emergency Zone; GSM module is siemens industrial-grade; Frequency 900 and 1800MHz; Built-in auto-dialer sends voice /SMS notification to 6 telephone numbers; Supports GSM and PSTN network to send alarm information out; Automatic switch between GSM network and PSTN network when network failure;



Model#: F4
Smoke Detector



Model#: F2
Wireless PIR Detector



Model#: F3
Wireless Door Sensor



Model#: ACM-W03
Infrared Outdoor Detector
(2,3,4 Beam for chose)



Access Control Management

Shenzhen Goldbridge Industrial Co., Ltd.

Tel: +86-755-83767678 Fax: +86-755-88391348
E-mail: sales@goldbridgesz.com, lilyjiang_06@163.com
Website: <http://www.goldbridgesz.com>

Professional Security Video Door Phone (Main Application for Villa)

We are provide a full range security video door phone, it's professional, newest and speediness, satisfaction.
We are welcome to make OEM .



Model#:	ACM-D9P-A
Description:	2 Wire 7" TFT Video Door phone

Function and Features

The 2 wire video door phone system including a 7" TFT colour screen indoor monitor and one vandal waterproof outdoor station which are suitable for villa.
2 wire video door phone kit easy and simple installation for DIY market. Non-Polar connection easy as ABC or 123.
Hands free communication. Outdoor camera intercom with indoor monitor available.
Outdoor camera or indoor monitor door release function.
Colour 420 TVL CCD with 4 meters IR night vision function.

New 7" TFT Video Door phone Handfree Monitor



Model#:	ACM-D5P-S
Description:	New 7" TFT Video Doorphone, Handfree Monitor
Color:	Sliver, Red, Blue, White available to chose

Function and Features

7 inch TFT monitor. luxury cast iron camera, good design, CMOS or CCD sensor. 6 LED lights, night vision, handfree indoor monitor, 7 inch CRT, clear image, Camera angle: 92 C degrees wide-angle, handfree audio and video communication. unlock, intercom, call other monitors, Brightness, chroma and ring adjustable, monitor dimension: 230(L)X180(W)X18(H)mm, camera dimension: 120(L)X185(W)X50(H)mm, Input AC100-240V 50Hz-60Hz, Output AC14.5V 1200mA



Model#:	ACM-D5P-F
Description:	7" TFT Ultra thin Video Doorphone, Handfree Monitor

Function and Features

Super Thin 7" TFT monitor. only 1.85cm. luxury cast iron camera, can take photo, save 300 pcs photos. CMOS camera, handfree, audio and video communication. unlock, intercom, call other monitors, monitor outside, 6 LED lights, External power adaptor. Connection: 4 wire (Up to 4 monitors), Input AC100-240V 50Hz-60Hz, Output AC14.5V 1200mA



Model#:	ACM-D4P-A
Description:	7" TFT Video Doorphone, Handfree Monitor

Function and Features

7" TFT monitor. ABS camera, CMOS camera, handfree, audio and video communication. unlock, intercom, call other monitors, monitor outside, 6 LED lights, External power adaptor. Connection: 4 wire (Up to 4 monitors), Input AC100-240V 50Hz-60Hz, Output AC14.5V 1200mA



Model#: ACM-D5P-R



Model#:	ACM-D3P-B 3.5" TFT/ACM-D2P-B 4" TFT
Description:	3.5" or 4" TFT Video Doorphone, Handset Monitor

Function and Features

3.5 inch or 4 inch TFT monitor. ABS camera, CMOS camera, handset audio and video communication. unlock, intercom, call other monitors, monitor outside, 6 LED lights, External power adaptor. Connection: 4 wire (Up to 4 monitors), AC100-240V 50Hz-60Hz



Model#: ACM-D5P-W



Model#:	ACM-D1P-A 3.5" Color/ACM-D7P-A 4" B/W
Description:	3.5" or 4" TFT Video Doorphone, Handfree Monitor

Function and Features

3.5 inch TFT monitor. pin-hole metal camera, CMOS camera, handfree audio and video communication. unlock, intercom, call other monitors, monitor outside, 6 LED lights, External power adaptor. Connection: 4 wire (Up to 4 monitors), AC100-240V 50Hz-60Hz

Wireless 3.5" TFT Video Doorphone



Model#:	ACM-WD10P
Description:	Wireless 3.5" TFT Video Doorphone

Function and Features

3.5 inch TFT monitor. ABS camera, wireless, 300M in spare place, CMOS waterproof camera, handfree audio and video communication. unlock, intercom, call other monitors, monitor outside, 6 LED lights, External power adaptor for camera. Connection: wireless (Up to 4 monitors), 300M is OK. Input AC100-240V 50Hz-60Hz, Output AC14.5V 1200mA



Model#:	ACM-D10P
Description:	2 Wire Economy Door phone

Function and Features

2-wire connection. unlock, intercom, Anti-oxidation, wearable aluminum outdoor unit. Easy DIY installation, Talking distance is above 100m (2X0.75mm2).



Access Control Management

Shenzhen Goldbridge Industrial Co., Ltd.

Tel: +86-755-83767678 Fax: +86-755-88391348
E-mail: sales@goldbridgesz.com, lilyjiang_06@163.com
Website: <http://www.goldbridgesz.com>

Parking Lot Management System Products

Product Features

- ◎ Car hitting avoidance & Car striking Avoidance,Compatible with "Magnetic" Barrier
- ◎ High speed 1.4s or 1.8s suitable to use for high way project , 3meter arm
- ◎ Normal speed 3s to 6s suitable for normal car parking lot,3~6 meter arm
- ◎ Application for Parking Lot Control Mall, Office Building, Hotel, Airport, etc



ACM703 Single Loop Detector
Sensitivity: 3 Grades adjustment
Working power: AC220V/50 Hz,2.5W



ACM704 Double Loop Detector
Sensitivity: 9 Grades adjustment
Working power: AC220V/50 Hz,2.5W



Model#: ACM707
High Speed Gate Barrier

Bridge-Type Bevel and Turnstile Access Control System Products

Main Application

Subway station, docks, tourism spots, exhibition, swimming hall, residence area, enterprise's entrance and exit attendance, gateway guard, charge management, special access control



ACM701 Bridge-type bevel smart block gate



ACM702 Bridge-type Turnstile

Technical Specifications

Model#	ACM701	ACM702	ACM707 Gate Barrier
Power Supply Input	AC220V $\pm$ 10V, 50Hz	AC220V $\pm$ 10V, 50Hz	Power Supply Input: 220V $\pm$ 10%, AC 50/60 Hz
Passing speed:	50 persons / min (normally-opened mode). 30 persons / min (normally-closed mode).	40 persons / min (IC card)	Max Straight Arm:6 meters
Motor rotational speed:	1600rpm	0.5NM/24V (fully automatic)	Arm Speed:1.2 sec - 5 sec
Temperature	-15 Celsius - 60 Celsius	-15 Celsius - 60 Celsius	Temperature: -15 Celsius - 60 Celsius
Relative Humidity	<90%	$\leq$ 90%	Relative Humidity:<90%
Input Interface	+12V level signal, or pulse width > 100ms pulse signal, drive current $\leq$ 10 mA	+12V level signal, or pulse width > 100ms pulse signal, drive current $\leq$ 10 mA	Input Interface:+12V level signal, or pulse width > 100ms pulse signal, drive current $\leq$ 10 mA
Transfer Interface	Rs485	Rs485	Transfer Interface:RS485
Driven motor:	DC brushless motor (standard edition)、 DC brush motor(simple edition)140W/36V	Access width: $\leq$ 600mm stainless steel hair line finish or powder coating,other colour is optional	Features:Car hitting avoidance & Car striking Avoidance, Remote control, counter, Normally open / closed
Color	Optional		
Features	Single and Double core available	Fully automatic tripod turnstile	



Access Control Management

Shenzhen Goldbridge Industrial Co.,Ltd.

Tel: +86-755-83767678 Fax: +86-755-88391348
E-mail: sales@goldbridgesz.com, lilyjiang_06@163.com
Website: <http://www.goldbridgesz.com>


EAS System For Supermarket

Products Introduction

EAS sensor it's Latest high-speed DSP core, real-time sending & receiving dual channels and two loops 3D pedestal design, plexiglass panel, with durable, stylish and transparent characteristics; Ideal for high-grade garment stores and upscale supermarkets



Model#: ACM-EAS
RF EAS Sensor



Model#: ACM-EAS-DT
Golf Detacher use for Hard Tag



Model#: ACM-EAS-DS
RFID Deactivator use for Soft Label



RFID Hard Tag



RFID Soft Label

RFID HF Time and Attendance Gate Device



Model#: ACM-HFGATE

Product Introduction:

The HF Gate Device "ACM-HFGATE" are designed for high performance channel management applications. The series support fast tag anti-collision and read/write operations (include EAS function of NXP tag). Equipped with main/auxiliary channel antenna, 4 line infrared motion detection sensor, control board and standard RS232, RS485 serial communication ports and RJ45 (TCP/IP) network port, the series are top choice for open mass flow RFID applications, such as: Conference Attendance, Access Control, Library Entrance Control, Process Control, etc

Fingerprint Reader (Finger Regesiter Reader & Password Reader)



Model#: ACM500-B
Fingerprint Password Reader

Product Introduction:

It's PC/LAN security products. Identity Reader is versatile in applications in family, organization with network members, accountant office, welfare department, police office, bank, stock exchange, etc.



Model#: ACM500-A
Fingerprint Regesiter Reader

Product Introduction:

It's a USB fingerprint reader, the user simply places his or her finger on the glowing reader window, and the reader quickly and automatically scans the fingerprint. On-board electronics calibrate the reader and encrypt the scanned data before sending it over the USB interface. Use with the Biometric time attendance and access control machine.

ID Card Passport Scanner




Model#: ACM901

Product Introduction:

High-Speed ID card passport scanner ACM901, it captures ID information by "Snapshot+OCR" in about one second and shows the data immediately. It's used for scanning of Passports, driver's licenses, ID cards, insurance cards and other documents. It can be applied in areas of airport, police, bank, hotel, custom, and army so as to make the work more easily and fast

PVC Card Embosser



Model#: ACM399

Product Introduction:

PVC card embosser ACM399 is the necessary and specialties for printing convex characters on PVC cards. It is used for beating characters on the PVC cards to make the cards with high recognition. The convex word makes the card look wonderful. It is widely used in the medium or min-factory, and it is an indispensability equipment for PVC card making.

RFID EM 125 KHz & MF 13.56 Mhz Card Reader

These Module Series RFID Card Reader are first choice for office, office building, Employee Dormitory, Public passage, home access control system.

Product Features

- ◎ Sound & Light Indication, Stable quality, with ability of anti metal disturbance
- ◎ With Protection function for upper Voltage and wrong wire connection
- ◎ International interface: Standard is Wiegand 26 (34), Optional for RS485, RS232

Access Control Card Reader



ACM26M
New RFID Reader



ACM01A



ACM01B



ACM01C



ACM26



ACM26A



ACM26B



ACM26D



ACM26G



ACM26J



ACM26P
Metal Case Waterproof

Stand alone Keyboard Card Reader



ACM207B



ACM08A



ACM08D



ACM08E



ACM2000D
Metal Case Waterproof

RFID Reader Specification

Model NO:	ACM01A	ACM01B	ACM01C	ACM26	ACM26A	ACM26B	ACM26D	ACM26P
Size(mm)	80x43x16(mm)	43.5x56x23(mm)	102x43x16(mm)	114x75x17(mm)	120x75x21(mm)	122x46x23(mm)	126x86x23(mm)	80x43x16(mm)
Color	Black, white	Black, white	Black, white	Black	Black	Black	Black, white	Sliver

Model NO:	ACM26G	ACM26J	ACM207B	ACM08A	ACM08D	ACM08E	ACM26M	ACM2000D
Size(mm)	126x86x23(mm)	126x86x23(mm)	144x80x23(mm)	122x86x20(mm)	122x86x20(mm)	108x88x32(mm)	80x43x16(mm)	120x80x25(mm)
Color	Black	Black	Black	Black	Black or White	Black	Black or White	Sliver
Output Format	Standard is Wiegand26/34, Communication distance <100M, Reading Range 3~15CM, optional for RS232 and RS485							
Card Type	125 KHz or 13.56 Mhz							



Access Control Management

Shenzhen Goldbridge Industrial Co.,Ltd.


Tel: +86-755-83767678 Fax: +86-755-88391348
E-mail: sales@goldbridgesz.com, lilyjiang_06@163.com
Website: <http://www.goldbridgesz.com>

Locating System - 2.4G Locator Reader & Writer

Locating System Products Introduction

These Reader & Locator Suit for the "Non-Directional Identify" open door environment, it's also suit for the "Directional Identify" application when the reader connect with the directional antenna. Applying in far distance, quick identification, meeting the special demand of identification, can identify, track and orientate more then 100 active tags simultaneity.

Locator no need to connect with reader, just put the locator power up, it will be working. One reader can work with about 200pcs locator. RFID 2.4G Tag activate by locator, then tag send signal to reader, reader read the tag ID and Locator ID and then send this data to host. So host can find where is the tag (person) location.

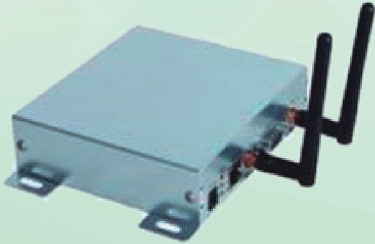

Model#: ACM301A
2.4G Microwave Reader omni directional
(Read & Write)



Model#: ACM301B
2.4G Microwave Reader omni directional
(Read only)




Model#: ACM301C
2.4G Locator

HF Handheld Reader & Writer with Extend Antenna

This HF handheld reader and Antenna can be widely used in many RFID system such as logistics, personnel identification, conference attendance, access control and industrial process control. Can be extend the distance to read the tags from the goods of the store warehouse.



Model: ACM319A-HF
HF Handheld Reader & Writer, Support ISO14443A/B/15693 Tags

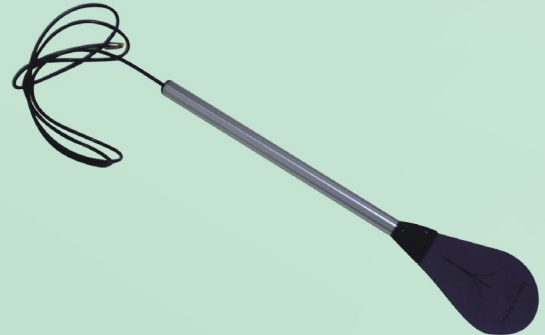

Model#: ACM319A-HF-Antenna
HF Handheld Reader Antenna, 1.5m RF cable with SMA socket

TCP/IP,USB,RS232 and PS/2 RFID Card Reader



Model#: ACN26N
LF/HF USB RFID Reader
Size(mm):110x80x25



Model#: ACM09A
LF/HF USB, PS/2 RFID Reader
Size(mm): 140x100x25



Model#: ACM218-HF
Rs232 or TCP/IP Reader&Writer
Size(mm): 120x73x 20

NEW AND HOT CCTV ANALOG DOME CAMERA

IR Vandalproof Metal Dome Cameras, Waterproof IP66



Model#: GBD3 -IR Dome Features

2.5" Vandalproof IR Metal Dome Camera
SONY/SHARP Color CCD optional 420TVL-700TVL optional
IR LED: $\varnothing$ 5X23PCS, IR Distance: 20M, 3.6mm Board Lens
IR CUT: Optional MechaGBal IR CUT Function
OEM Color option: grey white, black silver, Standard Black and White

Model#: GBD3 -Zoom Dome Features

3.5" Vandalproof IR Dome Camera
SONY/SHARP Color CCD optional 420TVL-700TVL optional
IR LED: $\varnothing$ 5X36PCS, IR Distance: 30M 2.8-10mm Manual Zoom Lens, External lens adjusting
IR CUT: Optional MechaGBal IR CUT Function
OEM Color option: grey white, black silver, Standard Black and White

Model#: GBXIR -Zoom Dome Features

4.5" Vandalproof IR Dome Camera
SONY/SHARP Color CCD optional 420TVL-700TVL optional
IR LED: $\varnothing$ 5X21PCS, IR Distance: 20M 2.8-10mm Manual Zoom Lens Color CCD 420TVL
IR CUT: Optional MechaGBal IR CUT Function

Plastic Dome Cameras



Model#: GBMIR23

Features
2.5" Plastic Dome IR Camera SONY/SHARP Color CCD optional 420TVL-700TVL optional
IR LED: $\varnothing$ 5X23PCS IR Distance: 20M 3.6mm Board Lens

Model#: GBOH

Features
4.5" Plastic Dome Camera SONY / SHARP CCD Optional Providing 420TVL-700TVL-definition options Standard 4-9mm manual zoom lens
OEM Color option: white black

Model#: GBS

Features
2.5" Plastic Dome Camera SONY / SHARP CCD Optional Providing 420TVL-600TVL-definition options Standard 3.6mm Fixed Lens

NEW MINI CCTV CAMERA



Model#: AMCM

Features
Mini Camera
SONY / SHARP CCD Optional Providing 420TVL-520TVL-definition options Standard 3.6mm Lens
Easy installation with bracket

Model#: APRC

Features
Mini Camera
SONY / SHARP CCD Optional Providing 420TVL-520TVL-definition options Standard 3.7mm Pinhole Lens

Model#: ASDC

Features
Mini Camera
SONY / SHARP CCD Optional Providing 420TVL-600TVL-definition options Standard 3.6mm Lens



Model#: AUF1 Features

UFO Shape camera
SONY / SHARP CCD optional
Choose to provide 420TVL-600TVL resolution
Standard 3.7mm pinhole lens
Installation of escalators and corridors for



Model#: AIRE Features

2.5" IR Vandalproof Dome Camera
Sony/Sharp CCD 420-700TVL is optional
IR Led: $\varnothing$ 5X23pcs IR Range: 20m
Standard match 3.6mm fixed lens
Cable OSD is optional



Access Control Management

Shenzhen Goldbridge Industrial Co., Ltd.

Tel: +86-755-83767678 Fax: +86-755-88391348
E-mail: sales@goldbridgesz.com, lilyjiang_06@163.com
Website: <http://www.goldbridgesz.com>

NEW AND HOT CCTV ANALOG WATERPROOF CAMERA

We provide full range of CCTV analog cameras: IR Waterproof fixed lens Camera, Varifocal Lens Cameras, Multifunction Cameras, Vandalproof and Plastic Dome Cameras, Box Camera, Waterproof IR Zoom camera, Mini Cameras, PTZ high speed dome camera, ANPR/LPR camera, etc. Also supply the DVR, Housings, Power supply, Bracket, etc.

New Vandalproof Dome Camera



Model#:GBETC

Features

3.5"IR Vandalproof Dome Camera
Sony/Sharp CCD 420-700TVL is optional
IR Led: $\varnothing$ 5X36 pcs IR Range: 30m
Standard match 4-9 manual varifocal lens
(2.8-10mm is optional) Zoom Focus outside
Cable OSD is optional
Match 3-Axis cable built-in bracket, double chassis
suitable for wall and ceiling installing.

Waterproof IR Cameras (Outdoor IR Cameras), IP66, Varifocal Lens Cameras



Model#:GBG23N

Features

IR Weatherproof Camera
SONY/SHARP Color CCD optional
420TVL-600TVL optional
IR LED: $\varnothing$ 5X23PCS
IR Distance: 20M
3.6mm Board Lens
3 Axis Bracket
OEM Color option Silver: Grey and Silver & Blue



Model#:GBS23N

Features

IR Weatherproof Camera
SONY/SHARP Color CCD optional
420TVL-600TVL optional
IR LED: $\varnothing$ 5X23PCS
IR Distance: 20M
3.6mm Board Lens
3 Axis Bracket



Model#:GBG40T

Features

Weatherproof IR Camera
SONY/SHARP Color CCD optional
420TVL-700TVL optional
IR LED: $\varnothing$ 5X36PCS
IR Distance: 30M
2.8-10mm Manual Zoom Lens
External lens adjusting
3 Axis Bracket
OEM Color option Silver: Grey and Silver & Blue

New Weatherproof IR Camera



Model: GBR40N (36IR)

Features

Weatherproof IR Camera
SONY/SHARP Color CCD optional 420TVL-700TVL optional
IR LED: $\varnothing$ 5X36PCS
IR Distance: 30M
2.8-10mm Manual Zoom Lens
External lens adjusting
3 Axis Bracket



Model#:GB90E

Features

Weatherproof IR Camera
SONY/SHARP Color CCD optional
420TVL-700TVL optional
IR LED: $\varnothing$ 8X35PCS
IR Distance: 50M
9-22mm Manual Zoom Lens
External lens adjusting
Cable built-in Bracket, Varifocal lens outdoor
OEM Color option: White and Silver



Model#:GBC40T

Features

Weatherproof IR Camera
SONY/SHARP Color CCD optional
420TVL-700TVL optional
IR LED: $\varnothing$ 5X72PCS
IR Distance: 80M
4-9mm Manual Zoom Lens
External lens adjusting
Cable built-in Bracket, Varifocal lens outdoor
OEM Color option: White and Grey

IP CCTV CAMERA

We are Provide full range IP CCTV Camera Products, The relevant products have gradually passed CCC, CE & FCC certification:

- 1), CCD /CMOS megapixels IP camera of box IP camera, waterproof IR network camera, IR dome network camera, high speed dome PTZ IP camera, support 2 Megapixels high definition ;
- 2), Wired & wireless IP cameras of box camera, waterproof IR IP camera, P/T IR dome camera, PTZ high speed dome camera, support WiFi wireless, USB, SD card,RTSP, 3G wireless, PoE;

IR Waterproof IP Box Camera



Model#:ACM-M101

Description:Waterproof Box IP Camera
Dimensions: 185x75x53mm

Features :Wire IR waterproof IP camera,
CMOS 300,000 pixel, Motion-JPEG 36 φ 5 ,
Nightvision 30m, DC5V 2A .



Model#:ACM-FM106A HOT

Description:Waterproof Box IP Camera
Dimensions: 185x75x53mm

Features :Wire IR waterproof IP camera,
CMOS 300,000 pixel, Motion-JPEG 36 φ 5 ,
Nightvision 30m, DC5V 2A .
Sell unit include: Power adaptor, CD software,
manual, screw and bracket



Model#:ACM-FM106B

Description:Wireless Waterproof Box IP Camera
Dimensions:185x75x53mm

Features :Wireless IR waterproof IP camera,
CMOS 300,000 pixel, Motion-JPEG 36 φ 5 ,
420TVL CCD,Nightvision 30m, DC5V 2A .

H.264 Explosion-proof Outdoor IP Camera



Model#:ACM-FM07LB

Dimensions: 180x155x130mm

Features :Explosion-proof outdoor IP camera,H.264,dual opsiton
voice,cmos milimion pixel, support 32G local memory,1/3 sony
CCD 420TVL, 4 times zoom lens, DC12V 1A . Sell unit include:
Power adaptor, CD software, manual, screw and bracket



Model#:ACM-FM001

Description:Wireless Indoor Box IP Camera
Dimensions:141x74x48mm

Features :Wireless inddor IP Box camera,
CMOS 300,000 pixel, Motion-JPEG 36 φ 5 ,
420TVL CCD,DC5V 1A .



Model#:ACM-FM505B

Description:H.264 Wireless Waterproof Box IP Camera
Dimensions:230x102x100mm

Features :Wireless IR waterproof IP camera,
H.264,dual oposition voice,support 32G local
memory,1/3 sony CCD 420TVL, 12mm lens, 30 φ 8 ,
Nightvision 50m, DC1V 2A .

Network Video Server



**Model#: ACM-504IP 1 Channel, 2 Channel, 4
Channel Video Server**

Features: G.726 Audio compression format, support one or
two-way audio, Built-in Web server, IE client support, it fully
supports IE monitoring, configuration and updating, so that I
t is characterized by simple and convenient operation



Model#:ACM-FM071A

Description:H.264 Wireless Box IP Camera
Dimensions: 240x179x97mm

Features :Wireless IR Box IP camera,H.264,
dual opsiton voice,support 32G local memory,
1/3 sony CCD 420TVL, 12mm lens,30 φ 8 ,
Nightvision 50m, DC12V 2A .



Access Control Management

Shenzhen Goldbridge Industrial Co.,Ltd.

Tel: +86-755-83767678 Fax: +86-755-88391348

E-mail: sales@goldbridgesz.com, lilyjiang_06@163.com

Website: <http://www.goldbridgesz.com>

IP CCTV CAMERA

NEW AND HOT IP DOME CCTV CAMERA



Model#:ACM-FM191

Description:Economical Box IP Camera (Indoor)
Dimensions: 100x59x52mm
Features :Wire cable indoor IR box camera, CMOS 300,000 pixel, 420TVL CCD, 8 Φ5 LED IR distance: 10m. Less then 10Lux, IR auto-open, 4mm Lens, DC5V 2A.



Model#:ACM-FM102

Description:Economical Dome IP Camera (Indoor)
Dimensions: 131x116x131mm
Features :Indoor wire IR dome camera, CMOS 300,000 pixel,420TVL CCD, Motion-JPEG 10 Φ5 DC5V 2A



Model#:ACM-FM136A

Description:Dome IR IP Camera
Dimensions: 125x105x130mm
Features :Wire inddor IR Dome IP camera, CMOS 300,000 pixel, Motion-JPEG ,10Φ5 , 420TVL CCD,,Nightvision 10m, DC5V 2A . Sell unit include: Power adpator, CD software, manual, screw and bracket



Model#:ACM-FM136B

Description:Wireless Dome IR IP Camera (Exclusive NAT Technology)
Dimensions: 125x105x130mm
Features :Wireless inddor IR Dome IP camera, CMOS 300,000 pixel, Motion-JPEG ,10Φ5 , 420TVL CCD,,Nightvision 10m, DC5V 2A . Sell unit include: Power adpator, CD software, manual, screw and bracket



Model#:ACM-FM976

Description:Wireless indoor Constant speed Dome IP Camera (Indoor camera, H.264)
Dimensions: 151x125x130mm
Features :Wireless indoor Constant speed Dome IP camera, H.264 , support 32G local memory, dual opstion voice, CMOS 300,000 pixel, IR-CUT day and nightvison 15meter,, 6mm lens, 10Φ5 , IR 10meter, 420TVL CCD 1/3 sony, DC12V 2A . 64 preset, 355 degree horizontal rotation, 180 degrees vertical, rotating speed 15 degree/seconded.

NEW Wireless IP Alarm Camera

Integrate with alarm equipment and monitoring equipment, break through the traditional way. Real-Time Monitor, timed phot, guest flow statistics, one-key alarm, auto-cruise, preset postion, alarm photo, door sensor, IR, Smoke alarm, gas alarm.



Model#: ACM-FM966

Product Features :

IP Alarm security camera, live view via PC or cell phone at anytime and anywhere, support: 1 Video surveillance 2 Burglar alarm 3 Mobile surveillance 4 Guest flow statistics.

Product Benefits :

It's Specially designed for family, store and warehouse, with which you could live view via PC or cell phone at anytime and anywhere.Besides, the camera is connected external wireless devices, the system will automatically be alarmed when have external inbreak, and will take a real time video record for 24-hour gurantee

Specifications:CMOS 300,000 pixel, Motion-JPEG ,10Φ5 , 420TVL CCD,,Nightvision 10m, DC5V 2A .

High Resolution Network DVR - 4/8/16 Channel



Product Features :

Real time CIF high resolution network DVR, Professional real time CIF recording . Resolution/frame rate/image quality adjustable per channel, Full channel simultaneously playback with audio,VGA 1280x1024, HDMI 1080p video out Professional CMS and Client software



Access Control Management

Shenzhen Goldbridge Industrial Co.,Ltd.

Tel: +86-755-83767678 Fax: +86-755-88391348
E-mail: sales@goldbridgesz.com, lilyjiang_06@163.com
Website: <http://www.goldbridgesz.com>