

FUJI SERVO SYSTEM

# ALPHA<sup>5</sup> Smart



# ALPHA<sup>5</sup> Smart

# Smart servo for smart users

## High Performance

High-speed, high-precision positioning

- Frequency response 1500Hz
- Max motor speed 6000r/min
- High-resolution encoder
  - 18-bit ABS/INC 262,144 pulses
  - 20-bit INC 1,048,576 pulses

**ALPHA5**  
Smart



## High Value

Higher cost-performance with original main features.

## High Usability

New servo operator offers improved usability.

High Performance

High Value

High Usability

- Smart adjustment**    Advanced auto-tuning function and robust performance for unprecedented smart adjustment.
- Smart design**        Inherits the main features of ALPHA5. Highly adaptable smart design.
- Smart operation**     The new Servo Operator allows smart operation anytime anywhere.

## C O N T E N T S

Smart Concept _____	2	External Dimensions _____	15
ALPHA5 Smart Features _____	3	Configuration Diagram/Peripheral Equipment ____	22
Application Examples _____	6	Option _____	23
ALPHA5 Product Family _____	7	Model List _____	24
Model Codes _____	8	Service Network _____	27
Combination Table _____	9	Software _____	28
Servo Amplifier Specifications _____	10	Capacity Adoption _____	29
Connection Diagram _____	11	Product Warranty _____	30
Servomotor Specifications _____	12	Reference Material/Related product(V8) ____	31


## Feature 1 | Smart Adjustment

## New auto-tuning function

Optimal tuning even with low-rigidity devices.




Easy adjustment even for long belt mechanisms, gears with considerable backlash, and rack and pinion mechanisms.

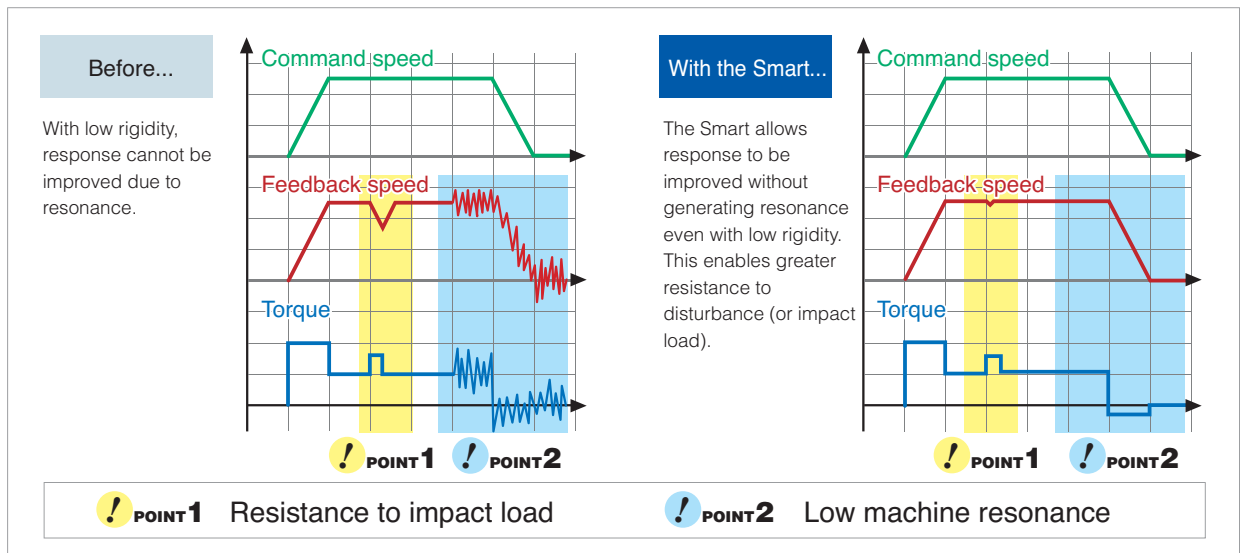

## Superior stability

Smooth, stable operation even with changes due to wear or variation\* among devices.

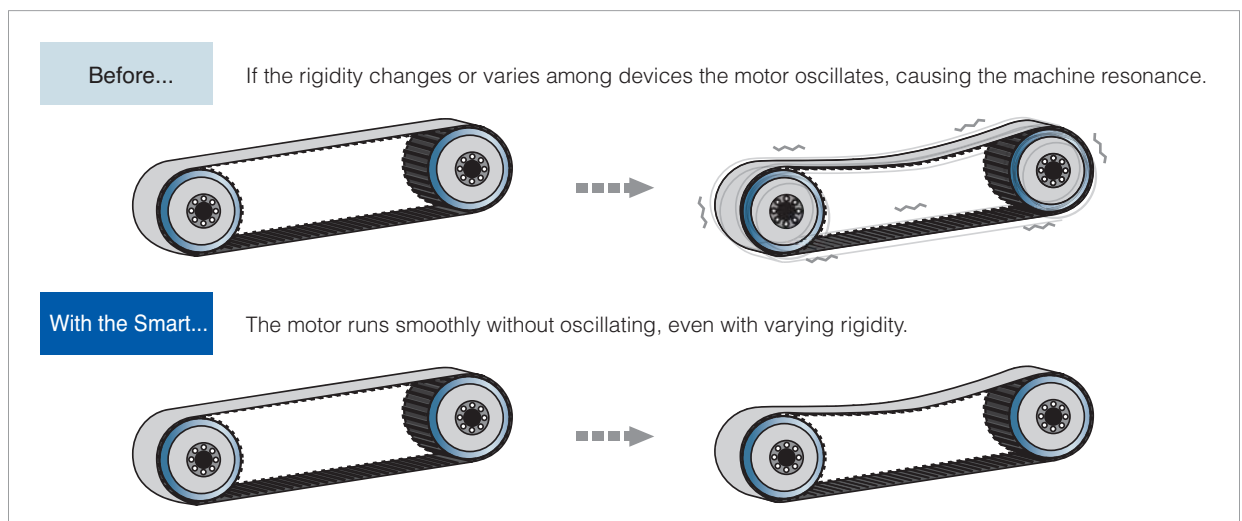


\* Variations in device rigidity such as belt tension or parts.

## Feature 2 | Smart Design

### PTP positioning


- Positioning function built in as standard
- No external units or special equipment required for positioning

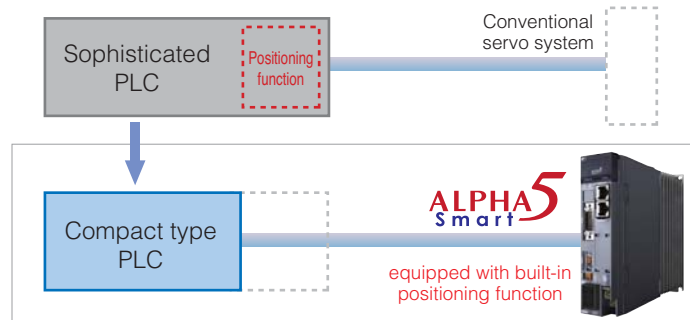

### 3-in1 functionality


Three operations via one unit:

- Positioning via Modbus-RTU communications (immediate value data)
- Positioning via Di/Do signal (positioning data 15 points\*)
- Position, speed, and torque control via pulse/analog input

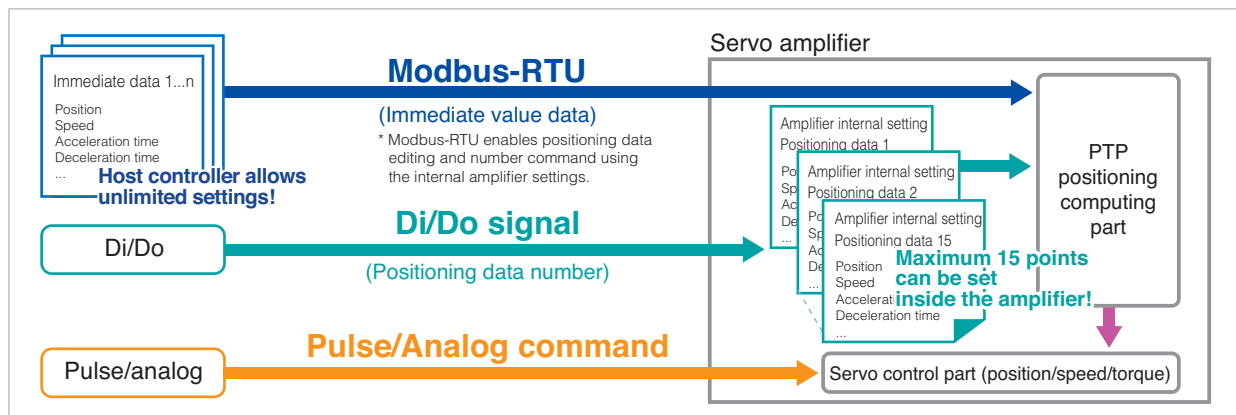

### Simple operation via Modbus-RTU communications

Modbus-RTU communications enables PTP positioning, parameter editing, and the use of various monitors. Just connect an HMI, general-purpose PLC, or PC controller directly to the servo amplifier.

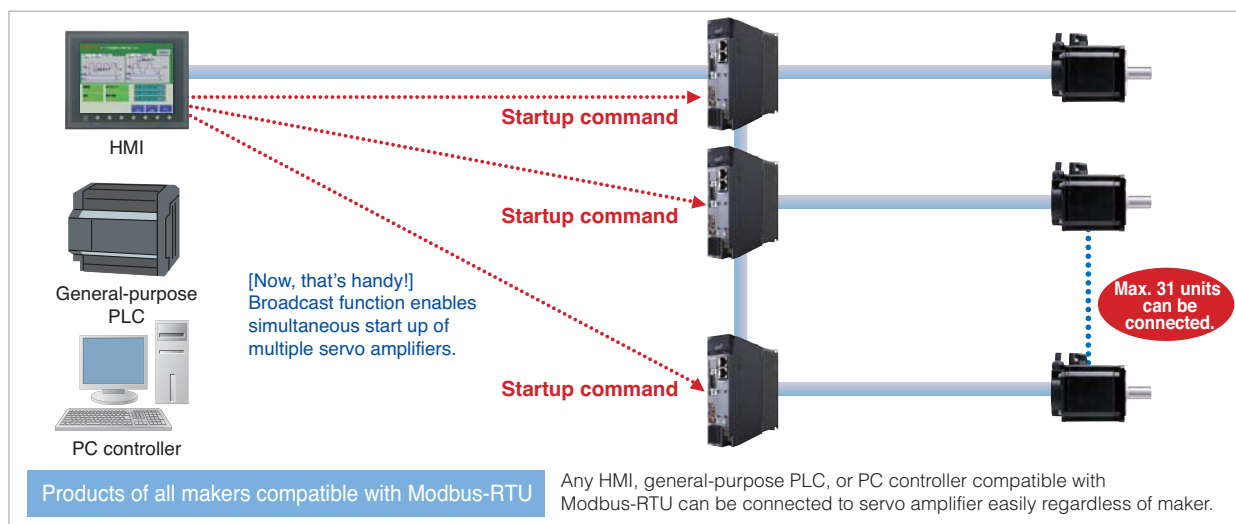

Any HMI, general-purpose PLC, or PC controller compatible with Modbus-RTU can be connected to servo amplifier easily regardless of maker.

## Long-life design

### Servo amplifier parts designed to last longer

Electrolytic capacitor: 10 years

Cooling fan: 10 years

- \* Operating conditions
- Ambient temperature: Average 30°C/year
  - Load factor: Within 80%
  - Operation rate: Within 20 hours/day

## Easy ABS battery replacement

### ABS backup battery can be mounted on front face of servo amplifier for easy replacement

## Regulatory compliance

### CE marking and UL/cUL

The standard model complies with CE marking and UL/cUL.



### RoHS Directive

Compliant with the European Restriction of Hazardous Substances (ROHS) Directive. The use of six hazardous substances has been reduced for a more environmentally-friendly servo system.


<Six hazardous materials>

Lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyl (PBB), polybrominated diphenylether (PBDE)


## Feature 3 | Smart Operation

## New servo operator

### New handy-sized portable servo operator now available

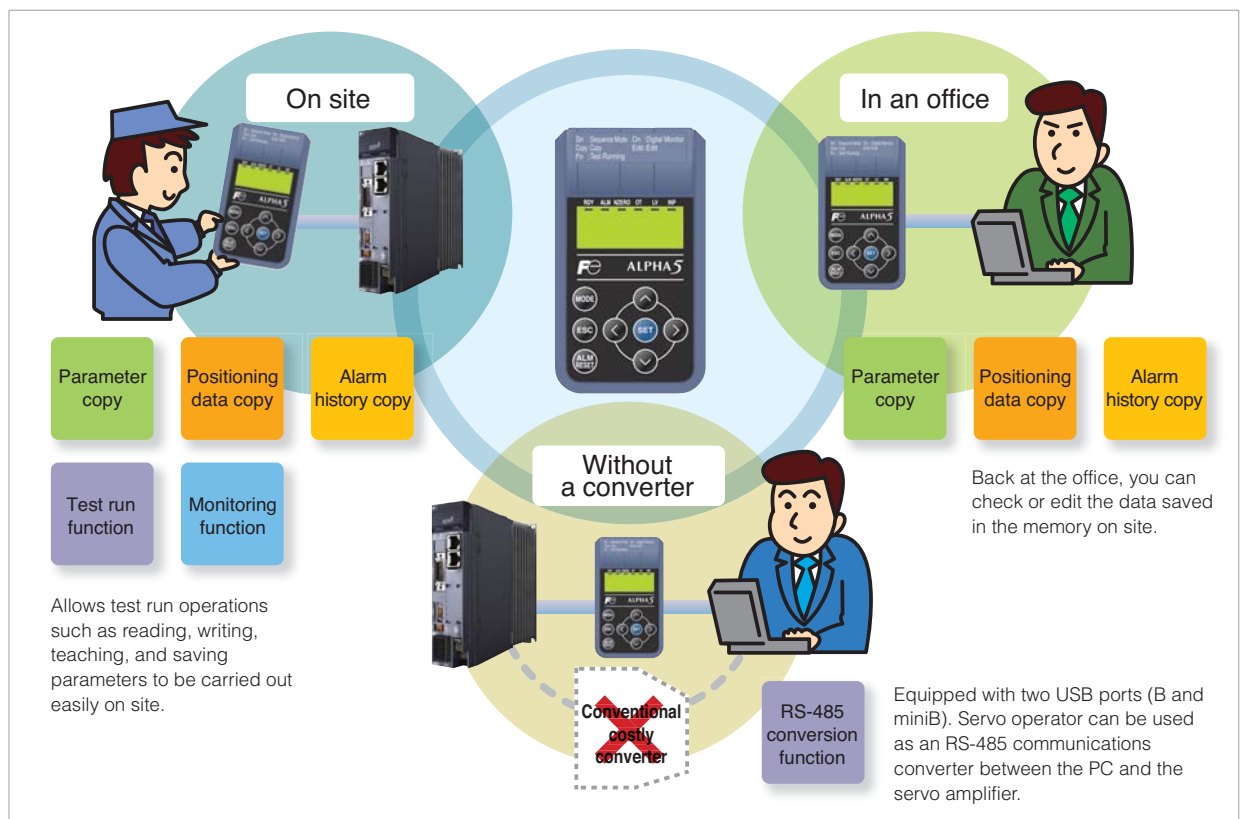

## Packaging Machine

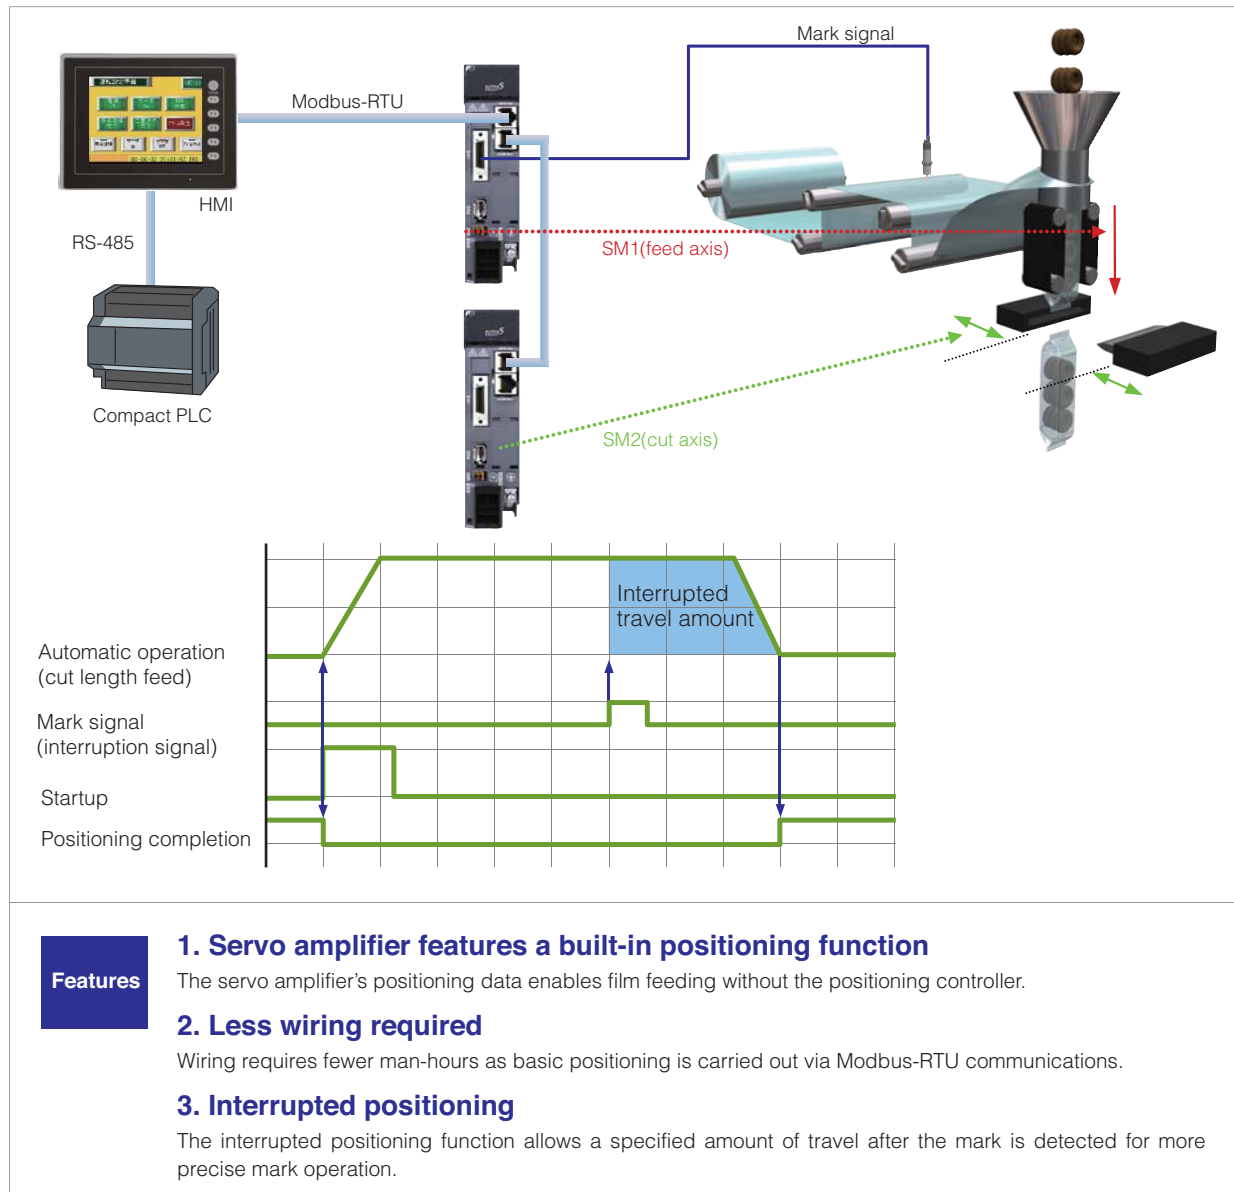


## Conveyor

Workpiece feeder,  
carrier, etc.

<Key Points>

- The positioning data enables positioning without a PLC.
- Enables simultaneous operation.
- Enables rapid acceleration/deceleration and high-speed operation.
- Enables high-accuracy positioning.
- High-tact operation mode allows high-frequency operation.

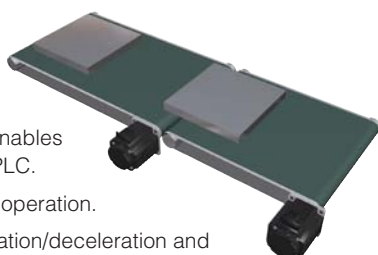

## XY Table








Engraving machine,  
2D positioning unit, etc.

<Key Points>

- The positioning data enables positioning without a PLC.
- Enables rapid acceleration/deceleration and high-speed operation.
- Enables high-accuracy positioning.
- Trace operation mode allows optimal operation.



## ALPHA5 Series Lineup

Type			Voltage(V)	Applicable motor capacity(kW)													
				0.05	0.1	0.2	*0.4 (0.375)	0.5	0.75	0.85	1.0	1.3	1.5	2.0	3.0	4.0	5.0
Servo Amplifier																	
	ALPHA5 Smart	3-phase 200V															
		Single-phase 200V															
 General-purpose interface	ALPHA5 VV type	3-phase 200V															
		Single-phase 200V															
		Single-phase 100V															
 High speed serial bus (SX bus)	ALPHA5 VS type/ ALPHA5 LS type	3-phase 200V															
		Single-phase 200V															
		Single-phase 100V															
Servomotor																	
 GYS motor Ultra-low inertia	GYS motor 3000r/min Max. speed (0.75kW or less: 6000r/min 1.0kW or more: 5000r/min)	200V series (11 models)															
		100V series (4 models)															
 GYC motor Low inertia	GYC motor 3000r/min Max. speed (0.75kW or less: 6000r/min 1.0kW or more: 5000r/min)	200V series (7 models)															
 GYG motor Middle inertia	GYG motor 2000r/min (Max. speed 3000r/min)	200V series (5 models)															
 GYG motor Middle inertia	GYG motor 1500r/min (Max. speed 3000r/min)	200V series (3 models)															

\* The capacity applies 0.375kW for 100V and 0.4kW for 200V.

## Servo Amplifier

**RYH 201 F 5 - V V 2**

Code	[Basic type]
RYH	ALPHA5 Smart series

Code	[Applicable motor output]
201	$20 \times 10^1 = 200\text{W}$ , 100W, 50W
401	$40 \times 10^1 = 400\text{W}$
751	$75 \times 10^1 = 750\text{W}$ , 500W
152	$15 \times 10^2 = 1.5\text{kW}$ , 1.0kW, 850W

Code	[Series]
F	1500 to 3000r/min series

Code	[Order of development]
5	5

Code	[Input voltage]
2	3-phase 200V

Code	[Upper interface]
V	General-purpose interface (pulse, analog voltage)

Code	[Major functions]
V	Position, speed and torque control

## Servomotor

**GYS 500 D 5 - H B 2 - B**

Code	[Basic type]
GYS	Slim type (Ultra-low inertia)
GYC	Cubic type (Low inertia)
GYG	Middle inertia type

Code	[Rated output]
500	$50 \times 10^0 = 0.05\text{kW}$
101	$10 \times 10^1 = 0.1\text{kW}$
201	$20 \times 10^1 = 0.2\text{kW}$
401	$40 \times 10^1 = 0.4\text{kW}$ , 0.375kW
501	$50 \times 10^1 = 0.5\text{kW}$
751	$75 \times 10^1 = 0.75\text{kW}$
851	$85 \times 10^1 = 0.85\text{kW}$
102	$10 \times 10^2 = 1.0\text{kW}$
132	$13 \times 10^2 = 1.3\text{kW}$
152	$15 \times 10^2 = 1.5\text{kW}$

Code	[Rated speed]
D	3000r/min series
C	2000r/min series
B	1500r/min series

Code	[Order of development]
5	5

Code	[Brake]
Blank	Not provided
B	Provided

Code	[Input voltage]
2	3-phase 200V

Code	[Oil seal/shaft]	Applicable motor GYS, GYC, GYG
A	Without an oil seal, straight shaft with a key	△ (*O)
B	Without an oil seal, straight shaft without a key	◎
C	Without an oil seal, straight shaft with a key, tapped	○
E	With an oil seal, straight shaft with a key	△
F	With an oil seal, straight shaft without a key	△
G	With an oil seal, straight shaft with a key, tapped	△

◎ : Standard item   ○ : Semi-standard item

△ : Made-to-order item

\* Applicable with GYS and GYC motors of 0.1kW or less

Code	[Encoder]
H	18-bit ABS/INC
R	20-bit INC

## Combination Table

## Combination Table

# Servo Amplifier Specifications

## Common specifications

Applicable motor rated speed		3000r/min							2000r/min				1500r/min			
Applicable motor output [kW]		0.05	0.1	0.2	0.4	0.75	1.0	1.5	0.5	0.75	1.0	1.5	0.5	0.85		
Amplifier type	RYH□□□F5-VV2	201			401	751		152		751		152		751		152
Outer frame number		1a			1b	2a		2b		2a		2b		2a		2b
Mass [kg]		0.8			1.2		1.3		1.2		1.3		1.2		1.3	
Protective construction / cooling		Open / natural cooling					Open / mechanical cooling									
Power supply	Phase	Single-phase, 3-phase					3-phase		Single-phase, 3-phase		3-phase		Single-phase, 3-phase		3-phase	
	Voltage / frequency	200 to 240VAC 50/60Hz														
	Allowable voltage fluctuation	3-phase : 170 to 264 VAC, Single-phase : 180 to 264 VAC														
Control system		Fully-digital sinusoidal PWM drive														
Max voltage for regenerative resistance [W]	Built-in resistor	-				20			20				20			
	External resistor	17				50			50				50			
Feedback		INC 20bit/rev, ABS 18bit/rev														
Overload capability		300% / 3 sec.														
Speed fluctuation ratio	Load fluctuation	Within ± 1 r/min (load fluctuation 0 to 100%)														
	Power supply fluctuation	Within ± 1 r/min (power supply fluctuation -10 to +10%)														
	Temperature fluctuation	Within ± 0.2% (25 ± 10°C at rated operation speed)														
Capability and function VV type	Speed control	Closed loop control with speed adjuster, acceleration/deceleration time setting, manual feed rate/max. rotation speed, speed command zero clamp, etc.														
	Number of position data sets	15-point (position, speed, acceleration/deceleration time setting, timer, M code and various statuses)														
	Position control	Closed loop control with position adjuster, electronic gear, output pulse setting, feed forward, homing, interrupt positioning, auto startup, etc.														
	Torque control	Closed loop control with current adjuster (proportional open loop control of current and torque), torque limit, speed limit at torque control, etc.														
	Accessory functions	Easy tuning, profile operation, sequence test mode, auto tuning, auto notch filter, vibration suppressing online learning, etc.														
Protective function (Alarm display)		Over Current (oc1, oc2), Over Speed (oS), High Voltage (Hu), Encoder Trouble (Et1, Et2), Circuit Trouble (ct), Data Error (dE), Combination Error (cE), Resistor Tr Heat (tH), Encoder Communication Error (Ec), Cont (CONTROL signal) Error (ctE), Over Load (oL1, oL2), Power Low Voltage (LuP), Resistor Heat (rH1, rH2, rH3), Over Flow (oF), Amp Heat (AH), Encoder Heat (EH), Absolute Data Lost (dL1, dL2, dL3), Absolute Data Over Flow (AF), Initial Error (iE)														
Operation and display section of main body(keypad)		4-digit alphanumeric display with 7-segment LED 4 operation switches (MODE, SET, UP and DOWN)														
Working conditions	Installation place	Indoors at altitude ≤ 1000m, free from dust, corrosive gases and direct sunlight In case of compliance with CE marking: pollution degree 2, over voltage category III														
	Temperature / humidity	-10 to 55°C/10 to 90%RH (without condensation)														
	Vibration / shock resistance	Vibration resistance: 3mm: 2 to 9Hz or less, 9.8m/s²: 9 to 20Hz or less, 2m/s²: 20 to 55Hz or less, 1m/s²: 55 to 200Hz or less Shock resistance: 19.6m/s² (2G)														
Standards		UL/cUL (UL508c), Listed compliant, Low Voltage Directive (IEC61800-5-1 2007/2nd compliant), CE marking														


## Interface specifications

Item		Specifications
Command interface	Positioning function	RS-485 (Modbus-RTU), Di/Do
	Position control	Pulse input
	Speed control	Analog voltage input
	Torque control	Analog voltage input
Communication interface		Two RS-485 ports (for parameter editing and monitor)
		Fuji's original protocol Modbus-RTU
		9600/19200/38400/115200 bps, connection of max. 31 units
Terminal name	Symbol	Specifications
Pulse input	CA,*CA CB,*CB	Differential input: max. input frequency $\leq$ 1.0MHz Open collector input: max. input frequency $\leq$ 200kHz (in case of signals at 90-degree phase difference, the above relationship is true for the four-fold frequency.) Pulse format      Command pulse/Command direction Forward/Reverse pulse Two signals at 90-degree phase difference } Select one of these formats with a parameter setting.
	PPI	Pull-up power input at open collector input (24VDC $\pm$ 5%)
Pulse output	FFA,*FFA FFB,*FFB	Differential output: max. output frequency $\leq$ 1MHz Two signals at 90-degree phase difference Pulse output count setting n (pulses/rev): 16 $\leq$ n $\leq$ 262144
	FFZ,*FFZ	Differential output: 1 pulse/rev
	FZ	Open collector output: 1 pulse/rev
	M5	Reference potential (0V)
Analog monitor voltage output	MON1 MON2	0V to $\pm$ 10VDC Resolution: 14bits / $\pm$ full scale The output data depends on internal parameter.
	M5	Reference potential (0V)
Common for sequence I/O	COMIN	Common for sequence input signal
	COMOUT	Common for sequence output signal
Sequence input signal	CONT1 to CONT5	12VDC-10% to 24VDC+10% Current consumption 8mA (per contact; used at circuit voltage of 12 to 24VDC) Function of each signal depends on parameter setting Compatible with both sink and source input methods
	COMIN	Reference potential
Sequence output signal	OUT1 to OUT3	30VDC / 50mA (max.) Function of each signal depends on parameter setting Compatible with both sink and source output methods
	COMOUT	Reference potential
Analog voltage input (for speed and torque control)	VREF	Speed command voltage input Input range: from -10 to 0 to -10V, input impedance 20k $\Omega$ Resolution: 15 bits / $\pm$ full scale
	TREF	Torque command voltage input Input range: from -10 to 0 to +10V, input impedance 20k $\Omega$ Resolution: 14 bits / $\pm$ full scale
	M5	Reference potential (0V)

## Connection Diagram

### VV type

Sample: frame 1

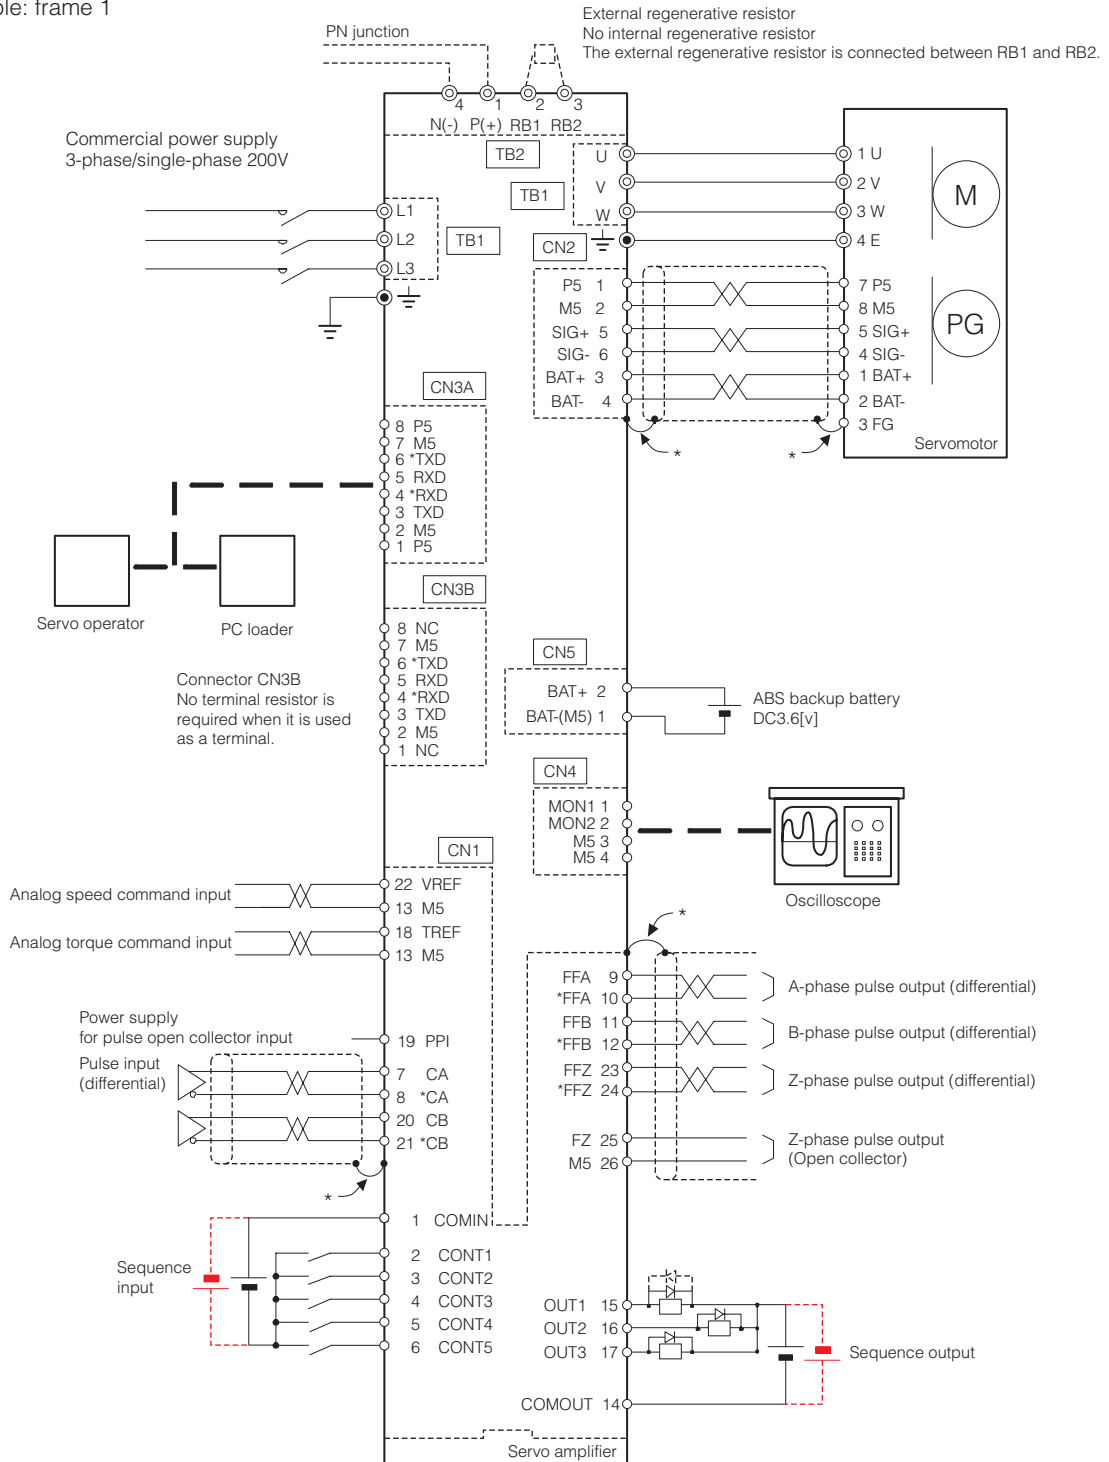

\*: Connect the shield to the connector shell of CN1 and CN2. The connector shell is at the ground potential.



**Caution**

The diagram shown above is given as a reference for model selection.  
When actually using the selected servo system, make wiring connections according to the connection diagram and instructions described in the user's manual.

# Servomotor Specifications

## ■ GYS motor

### ■ Standard specifications

Motor type (-B) indicates the brake-incorporated type.	GYS500D5 -□□2(-B)	GYS101D5 -□□2(-B)	GYS201D5 -□□2(-B)	GYS401D5 -□□2(-B)	GYS751D5 -□□2(-B)	GYS102D5 -□□2(-B)	GYS152D5 -□□2(-B)
Rated output [kW]	0.05	0.1	0.2	0.4	0.75	1.0	1.5
Rated torque [N · m]	0.159	0.318	0.637	1.27	2.39	3.18	4.78
Rated speed [r/min]	3000						
Max. speed [r/min]	6000 * <sup>1</sup>					5000	
Max. torque [N · m]	0.478	0.955	1.91	3.82	7.17	9.55	14.3
Inertia [kg · m <sup>2</sup> ] ( ) indicates brake-incorporated type.	0.0192×10 <sup>-4</sup> (0.0223×10 <sup>-4</sup> )	0.0371×10 <sup>-4</sup> (0.0402×10 <sup>-4</sup> )	0.135×10 <sup>-4</sup> (0.159×10 <sup>-4</sup> )	0.246×10 <sup>-4</sup> (0.270×10 <sup>-4</sup> )	0.853×10 <sup>-4</sup> (0.949×10 <sup>-4</sup> )	1.73×10 <sup>-4</sup> (2.03×10 <sup>-4</sup> )	2.37×10 <sup>-4</sup> (2.67×10 <sup>-4</sup> )
Recommended load inertia ratio	30 times or less * <sup>2</sup>					20 times or less * <sup>2</sup>	
Rated current [A]	0.85	0.85	1.5	2.7	4.8	7.1	9.6
Max. current [A]	2.55	2.55	4.5	8.1	14.4	21.3	28.8
Winding insulation class	Class B					Class F	
Rating	Continuous						
Degree of enclosure protection	Totally enclosed, self-cooled (IP 67, excluding the shaft-through and connectors)					Totally enclosed, self-cooled (IP 67, excluding the shaft-through)* <sup>3</sup>	
Terminals (motor)	Cable 0.3m (with connector)					Cannon connector	
Terminals (encoder)	Cable 0.3m (with connector)					Cannon connector	
Overheat protection	Not provided (The servo amplifier detects temperature.)						
Mounting method	By securing motor flange IMB5 (L51), IMV1 (L52), IMV3 (L53)						
Shaft extension	Straight shaft						
Paint color	N1.5						
Encoder	18-bit serial encoder (absolute/incremental), 20-bit serial encoder (incremental)						
Vibration level	V5 or below					Up to rated rotation speed: V10 or below Over rated rotation speed and up to 5000r/min: V15 or below	
Installation place, altitude and environment	For indoor use (free from direct sunlight), 1000m or below, locations without corrosive and flammable gases, oil mist and dust						
Ambient temperature, humidity	-10 to +40°C, within 90% RH (without condensation)						
Vibration resistance [m/s <sup>2</sup> ]	49					24.5	
Mass [kg] ( ) indicates brake-incorporated type.	0.45 (0.62)	0.55 (0.72)	1.2 (1.7)	1.8 (2.3)	3.4 (4.2)	4.4 (5.9)	5.2 (6.8)
Compliance with standards	UL/cUL (UL1004), CE marking (EN60034-1, EN60034-5), RoHS directive						

\*<sup>1</sup> The maximum rotation speed is 5000r/min when using the motor in combination with Fuji's gear head.

\*<sup>2</sup> The load inertia ratio to the inertia of servo motor. If the moment of load inertia ratio value exceeds the list value, please contact us.





\*<sup>3</sup> If the motor is used in the environment rated to IP67 protection degree, use the wiring connector suitable for the protection degree.

### ■ Brake specifications (motor equipped with a brake)




Motor type	GYS500D5 -□□2-B	GYS101D5 -□□2-B	GYS201D5 -□□2-B	GYS401D5 -□□2-B	GYS751D5 -□□2-B	GYS102D5 -□□2-B	GYS152D5 -□□2-B
Static friction torque [N · m]	0.34		1.27		2.45	6.86	
Rated DC voltage [V]	DC24±10%						
Attraction time [ms]	35		40		60	100	
Release time [ms]	10		20		25	40	
Power consumption [W]	6.1 (at 20 °C)		7.3 (at 20 °C)		8.5 (at 20 °C)	17.7 (at 20 °C)	

### ■ Torque characteristics diagrams (at 3-phase 200 [V] or single-phase 230 [V] source voltage)

GYS500D5-□□2	GYS101D5-□□2	GYS201D5-□□2	GYS401D5-□□2
0.05kW	0.1kW	0.2kW	0.4kW

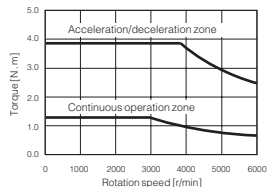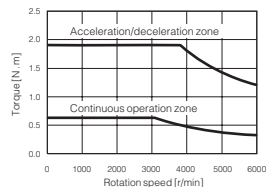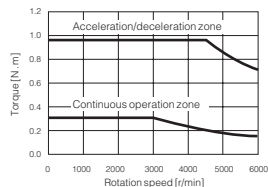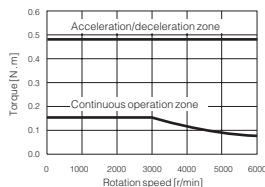

GYS751D5-□□2	GYS102D5-□□2	GYS152D5-□□2
0.75kW	1.0kW	1.5kW

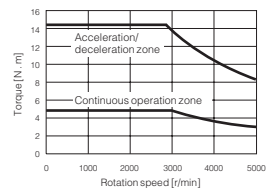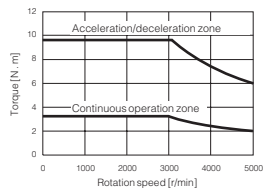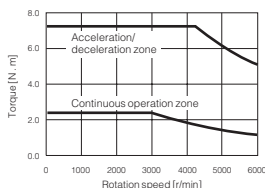

These characteristics indicate typical values of each servomotor combined with the corresponding servo amplifier.

The rated torque indicates the value obtained when the servo amplifier is installed to the following aluminum heat sink.

- Model GYS500D, 101D : 200×200×6 [mm]
- Model GYS201D, 401D : 250×250×6 [mm]
- Model GYS751D : 300×300×6 [mm]
- Model GYS102D, 152D : 350×350×8 [mm]

## Servomotor Specifications

### GYC motor

#### Standard specifications

Motor type (-B) indicates the brake-incorporated type.	GYC101D5 -□□2(-B)	GYC201D5 -□□2(-B)	GYC401D5 -□□2(-B)	GYC751D5 -□□2(-B)	GYC102D5 -□□2(-B)	GYC152D5 -□□2(-B)
Rated output [kW]	0.1	0.2	0.4	0.75	1.0	1.5
Rated torque [N · m]	0.318	0.637	1.27	2.39	3.18	4.78
Rated speed [r/min]	3000					
Max. speed [r/min]	6000 * <sup>1</sup>				5000	
Max. torque [N · m]	0.955	1.91	3.82	7.17	9.55	14.3
Inertia [kg · m <sup>2</sup> ] ( ) indicates brake-incorporated type.	0.0577×10 <sup>-4</sup> (0.0727×10 <sup>-4</sup> )	0.213×10 <sup>-4</sup> (0.288×10 <sup>-4</sup> )	0.408×10 <sup>-4</sup> (0.483×10 <sup>-4</sup> )	1.21×10 <sup>-4</sup> (1.66×10 <sup>-4</sup> )	3.19×10 <sup>-4</sup> (5.29×10 <sup>-4</sup> )	4.44×10 <sup>-4</sup> (6.54×10 <sup>-4</sup> )
Recommended load inertia ratio	30 times or less * <sup>2</sup>				20 times or less * <sup>2</sup>	
Rated current [A]	1.0	1.5	2.6	4.8	6.7	9.6
Max. current [A]	3.0	4.5	7.8	14.4	20.1	28.8
Winding insulation class	Class B				Class F	
Rating	Continuous					
Degree of enclosure protection	Totally enclosed, self-cooled (IP 67, excluding the shaft-through and connectors)				Totally enclosed, self-cooled (IP 67, excluding the shaft-through) * <sup>3</sup>	
Terminals (motor)	Cable 0.3m (with connector)				Cannon connector	
Terminals (encoder)	Cable 0.3m (with connector)				Cannon connector	
Overheat protection	Not provided (The servo amplifier detects temperature.)					
Mounting method	By securing motor flange IMB5 (L51), IMV1 (L52), IMV3 (L53)					
Shaft extension	Straight shaft					
Paint color	N1.5					
Encoder	18-bit serial encoder (absolute/incremental), 20-bit serial encoder (incremental)					
Vibration level	V5 or below				Up to rated rotation speed: V10 or below Over rated rotation speed and up to 5000r/min: V15 or below	
Installation place, altitude and environment	For indoor use (free from direct sunlight), 1000m or below, locations without corrosive and flammable gases, oil mist and dust					
Ambient temperature, humidity	-10 to +40°C, within 90% RH (without condensation)					
Vibration resistance [m/s <sup>2</sup> ]	49				24.5	
Mass [kg] ( ) indicates brake-incorporated type.	0.75 (1.0)	1.3 (1.9)	1.9 (2.6)	3.5 (4.3)	5.7 (8.0)	7.0 (9.8)
Compliance with standards	UL/cUL (UL 1004), CE marking (EN60034-1, EN60034-5), RoHS directive					

\*<sup>1</sup> The maximum rotation speed is 5000r/min when using the motor in combination with Fuji's gear head.


\*<sup>2</sup> The load inertia ratio to the inertia of servo motor. If the moment of load inertia ratio value exceeds the list value, please contact us.

\*<sup>3</sup> If the motor is used in the environment rated to IP67 protection degree, use the wiring connector suitable for the protection degree.

#### Brake specifications (motor equipped with a brake)

Motor type	GYC101D5 -□□2-B	GYC201D5 -□□2-B	GYC401D5 -□□2-B	GYC751D5 -□□2-B	GYC102D5 -□□2-B	GYC152D5 -□□2-B
Static friction torque [N · m]	0.318	1.27		2.39	17	
Rated DC voltage [V]	DC24±10%					
Attraction time [ms]	60	80		50	120	
Release time [ms]		40		80	30	
Power consumption [W]	6.5 (at 20 °C)	9.0 (at 20 °C)		8.5 (at 20 °C)	12 (at 20 °C)	

#### Torque characteristics diagrams (at 3-phase 200 [V] or single-phase 230 [V] source voltage)

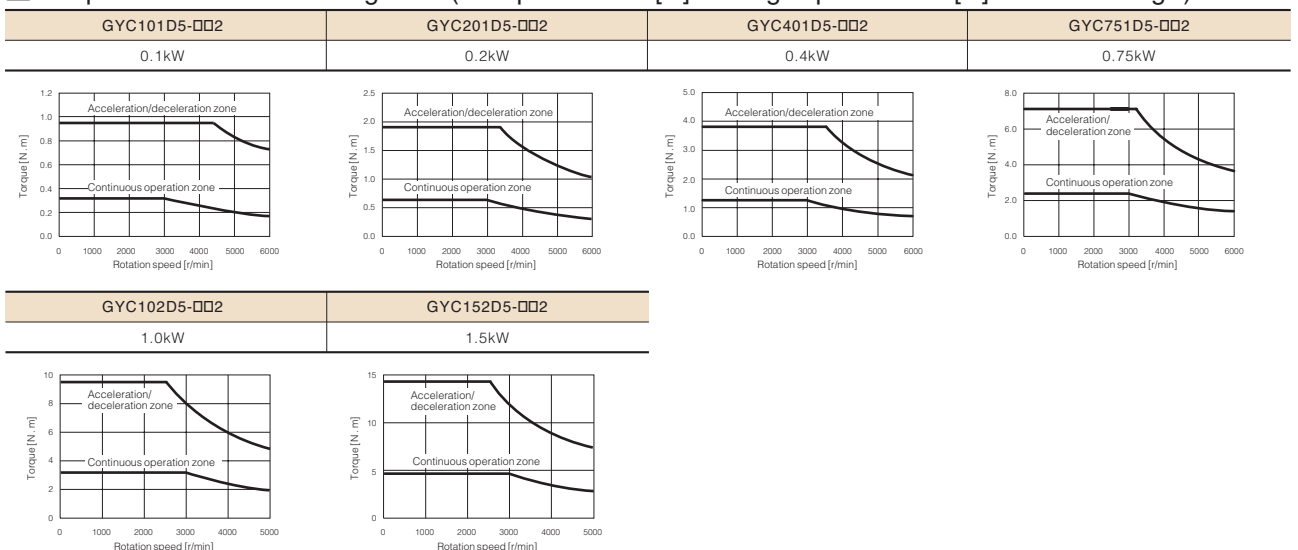

These characteristics indicate typical values of each servomotor combined with the corresponding servo amplifier.

The rated torque indicates the value obtained when the servo amplifier is installed to the following aluminum heat sink.

- Model GYC101D, 201D, 401D : 250×250×6 [mm]
- Model GYC751D : 300×300×6 [mm]
- Model GYC102D : 300×300×12 [mm]
- Model GYC152D : 400×400×12 [mm]

## Servomotor Specifications

### GYG motor [2000r/min, 1500r/min]

#### Standard specifications

	2000r/min				1500r/min	
Motor type (-B) indicates the brake-incorporated type.	GYG501C5 -□□2(-B)	GYG751C5 -□□2(-B)	GYG102C5 -□□2(-B)	GYG152C5 -□□2(-B)	GYG501B5 -□□2(-B)	GYG851B5 -□□2(-B)
Rated output [kW]	0.5	0.75	1.0	1.5	0.5	0.85
Rated torque [N · m]	2.39	3.58	4.77	7.16	3.18	5.41
Rated speed [r/min]	2000				1500	
Max. speed [r/min]	3000					
Max. torque [N · m]	7.2	10.7	14.3	21.5	9.5	16.2
Inertia [kg · m <sup>2</sup> ] ( ) indicates brake-incorporated type.	7.96×10 <sup>-4</sup> (10.0×10 <sup>-4</sup> )	11.55×10 <sup>-4</sup> (13.6×10 <sup>-4</sup> )	15.14×10 <sup>-4</sup> (17.2×10 <sup>-4</sup> )	22.33×10 <sup>-4</sup> (24.4×10 <sup>-4</sup> )	11.55×10 <sup>-4</sup> (13.6×10 <sup>-4</sup> )	15.15×10 <sup>-4</sup> (17.3×10 <sup>-4</sup> )
Recommended load inertia ratio	10 times or less *1					
Rated current [A]	3.5	5.2	6.4	10.0	4.7	7.3
Max. current [A]	10.5	15.6	19.2	30.0	14.1	21.9
Winding insulation class	Class F					
Rating	Continuous					
Degree of enclosure protection	Totally enclosed, self-cooled (IP 67, excluding the shaft-through)*2					
Terminals (motor)	Cannon connector					
Terminals (encoder)	Cannon connector					
Overheat protection	Not provided (The servo amplifier detects temperature.)					
Mounting method	By securing motor flange IMB5 (L51), IMV1 (L52), IMV3 (L53)					
Shaft extension	Straight shaft					
Paint color	N1.5					
Encoder	18-bit serial encoder (absolute/incremental), 20-bit serial encoder (incremental)					
Vibration level	V10 or below					
Installation place, altitude and environment	For indoor use (free from direct sunlight), 1000m or below, locations without corrosive and flammable gases, oil mist and dust					
Ambient temperature, humidity	-10 to +40°C, within 90% RH (without condensation)					
Vibration resistance [m/s <sup>2</sup> ]	24.5					
Mass [kg] ( ) indicates brake-incorporated type.	5.3 (7.5)	6.4 (8.6)	7.5 (9.7)	9.8 (12.0)	6.4 (8.6)	7.5 (9.7)
Compliance with standards	UL/cUL (UL1004), CE marking (EN60034-1, EN60034-5), RoHS directive					

\*1 The load inertia ratio to the inertia of servo motor. If the moment of load inertia ratio value exceeds the list value, please contact us.





\*2 If the motor is used in the environment rated to IP67 protection degree, use the wiring connector suitable for the protection degree.

#### Brake specifications (motor equipped with a brake)



Motor type	GYG501C5 -□□2-B	GYG751C5 -□□2-B	GYG102C5 -□□2-B	GYG152C5 -□□2-B	GYG501B5 -□□2-B	GYG851B5 -□□2-B
Static friction torque [N · m]	17					
Rated DC voltage [V]	DC24±10%					
Attraction time [ms]	120					
Release time [ms]	30					
Power consumption [W]	12 (at 20°C)					

#### Torque characteristics diagrams (at 3-phase 200 [V] or single-phase 230 [V] source voltage)

GYG501C5-□□2	GYG751C5-□□2	GYG102C5-□□2	GYG152C5-□□2
0.5kW	0.75kW	1.0kW	1.5kW

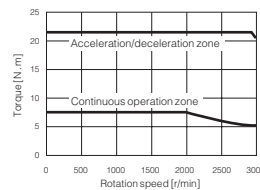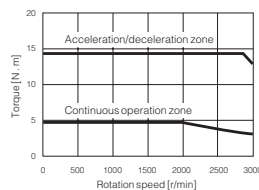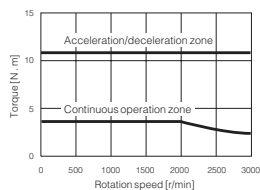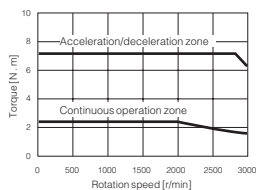

GYG501B5-□□2	GYG851B5-□□2
0.5kW	0.85kW

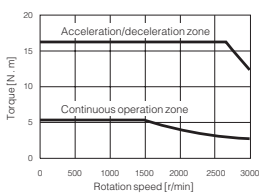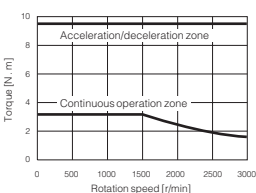

These characteristics indicate typical values of each servomotor combined with the corresponding servo amplifier.


The rated torque indicates the value obtained when the servo amplifier is installed to the following aluminum heat sink.

- Model GYG501C, 751C, 102C : 300 × 300 × 12 [mm]
- Model GYG152C : 400 × 400 × 12 [mm]
- Model GYG501B, 851B : 300 × 300 × 12 [mm]


## External Dimensions

### ■ Servo amplifier

#### ■ Frame 1

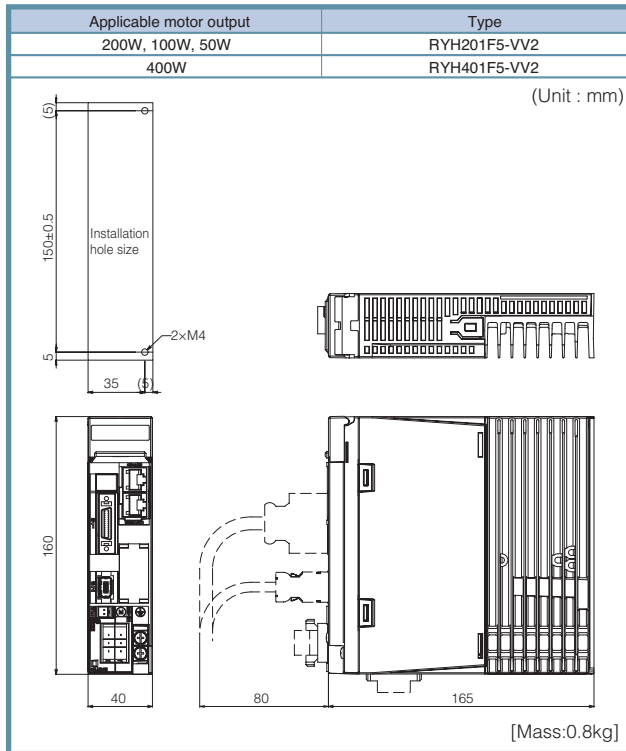

#### ■ Frame 2

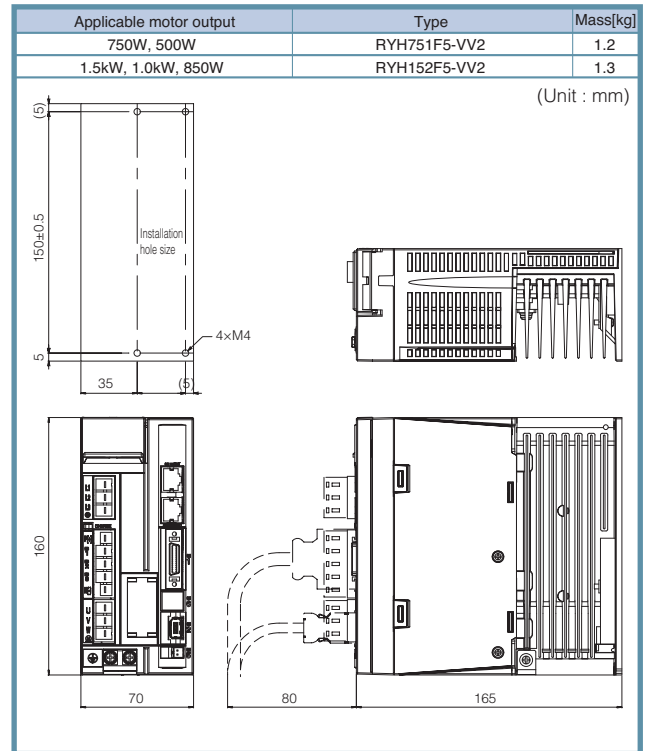


## External Dimensions

### GY S motor


Rated speed	Rated output	Type	Shaft shape	Overall length L	Dimensions (flange) LL	Mass [kg]
3000r/min	0.05kW	GY S500D5-DB2	Fig. A	89	64	0.45
	0.1kW	GY S101D5-DB2	Fig. B	107	82	0.55

(Unit : mm)

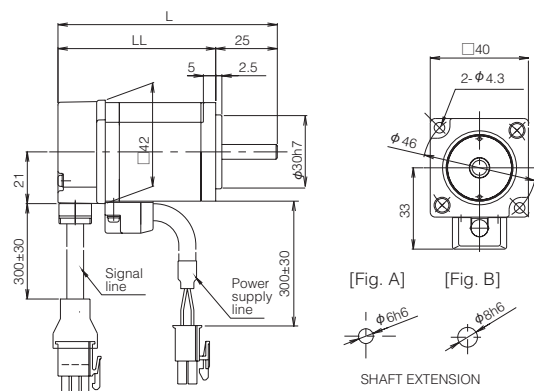


Rated speed	Rated output	Type	Overall length L	Dimensions (flange) LL	Mass [kg]
3000r/min	0.2kW	GY S201D5-DB2	107.5	77.5	1.2
	0.4kW	GY S401D5-DB2	135.5	105.5	1.8

(Unit : mm)

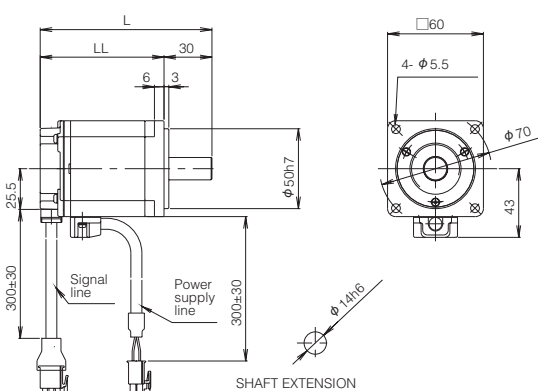

Rated speed	Rated output	Type
3000r/min	0.75kW	GY S751D5-DB2


(Unit : mm)

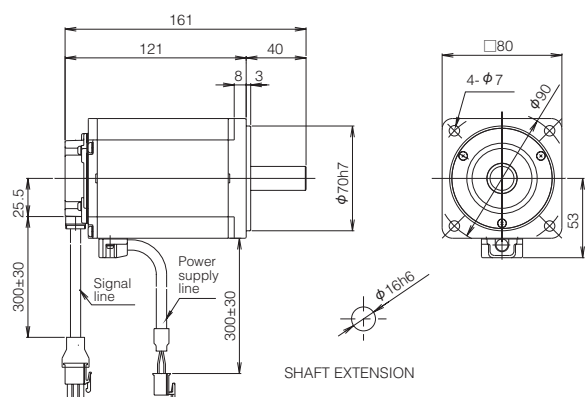

[Mass:3.4kg]

Rated speed	Rated output	Type	Overall length L	Dimensions (flange) LL	Terminal KB1	Mass [kg]
3000r/min	1kW	GY S102D5-DB2	198	153	77	4.4
	1.5kW	GY S152D5-DB2	220.5	175.5	99.5	5.2

(Unit : mm)

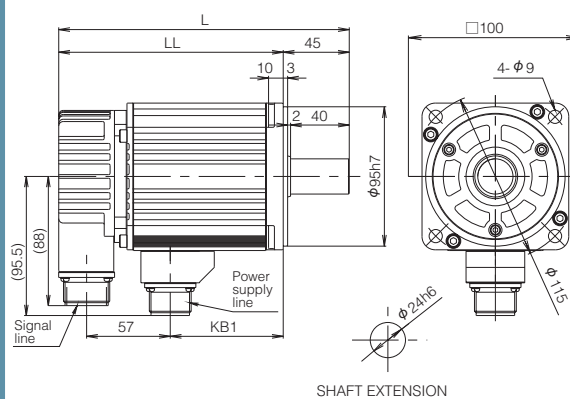


\* See page 21 for the shaft extension specifications of the motor with a key.

## External Dimensions

### ■ GYS motor (with a brake)


Rated speed	Rated output	Type	Shaft shape	Overall length L	Dimensions (flange) LL	Mass [kg]
3000r/min	0.05kW	GYS500D5-DB2-B	Fig. A	123.5	98.5	0.62
	0.1kW	GYS101D5-DB2-B	Fig. B	141.5	116.5	0.72

(Unit : mm)

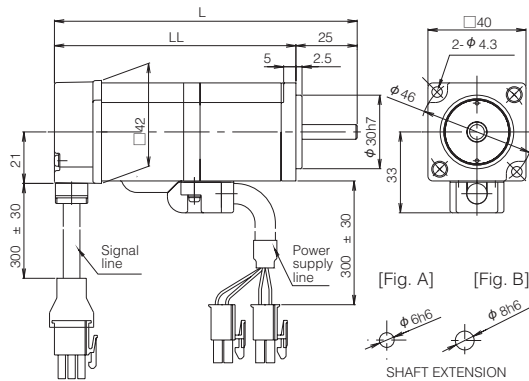


Rated speed	Rated output	Type	Overall length L	Dimensions (flange) LL	Mass [kg]
3000r/min	0.2kW	GYS201D5-DB2-B	145.5	115.5	1.7
	0.4kW	GYS401D5-DB2-B	173.5	143.5	2.3

(Unit : mm)

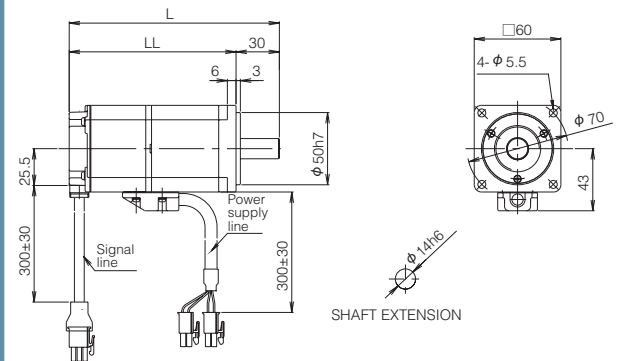

Rated speed	Rated output	Type
3000r/min	0.75kW	GYS751D5-DB2-B


(Unit : mm)

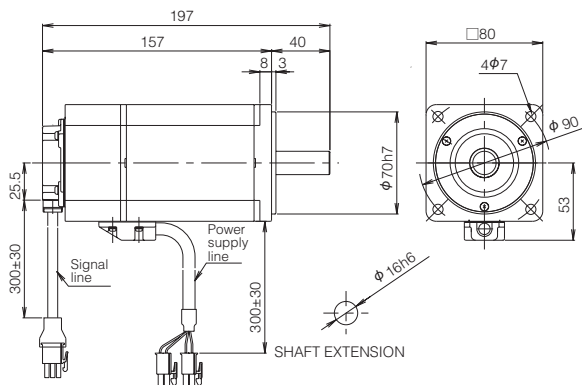

[Mass:4.2kg]

Rated speed	Rated output	Type	Overall length L	Dimensions (flange) LL	Terminal KB1	Mass [kg]
3000r/min	1kW	GYS102D5-DB2-B	239	194	79	5.9
	1.5kW	GYS152D5-DB2-B	261.5	216.5	101.5	6.8





(Unit : mm)

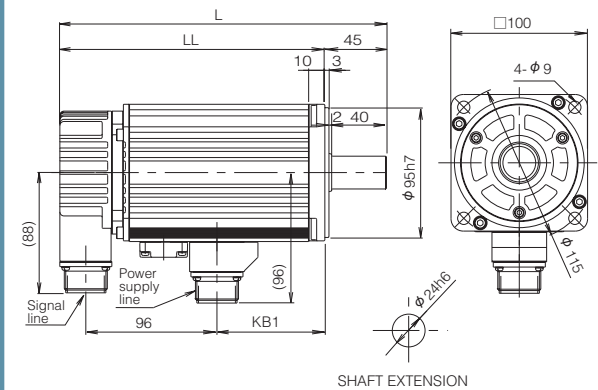

\* See page 21 for the shaft extension specifications of the motor with a key.

External Dimensions





GYC motor

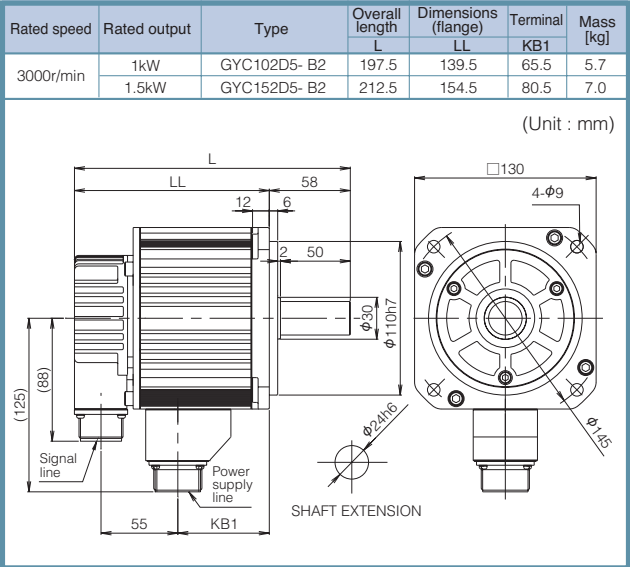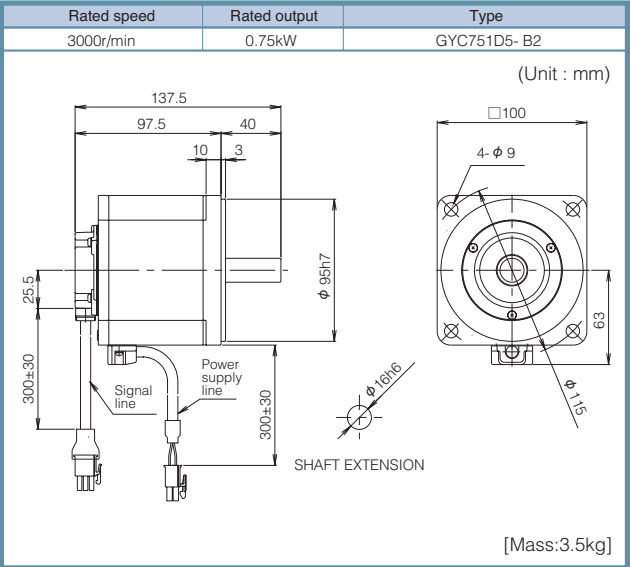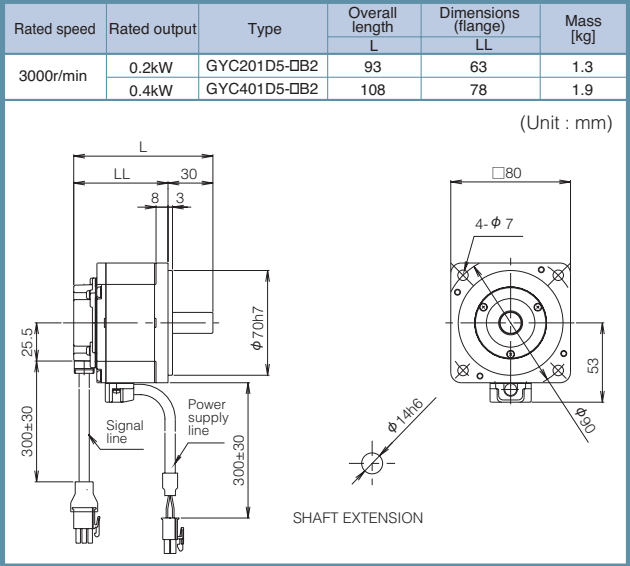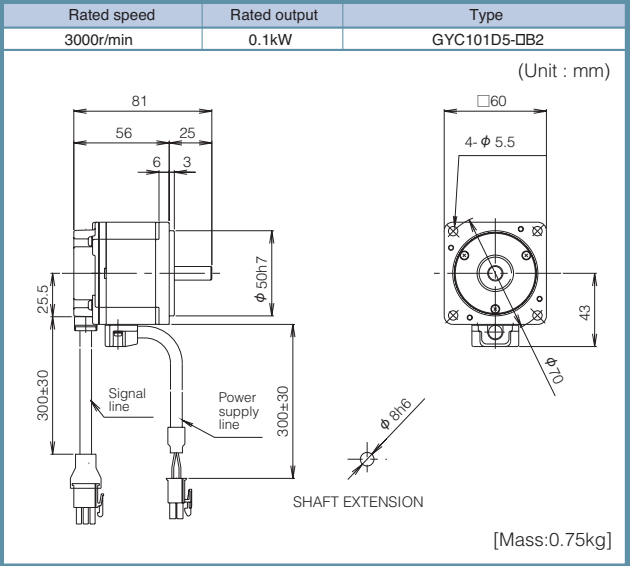

\* See page 21 for the shaft extension specifications of the motor with a key.

## External Dimensions

### GYC motor (with a brake)

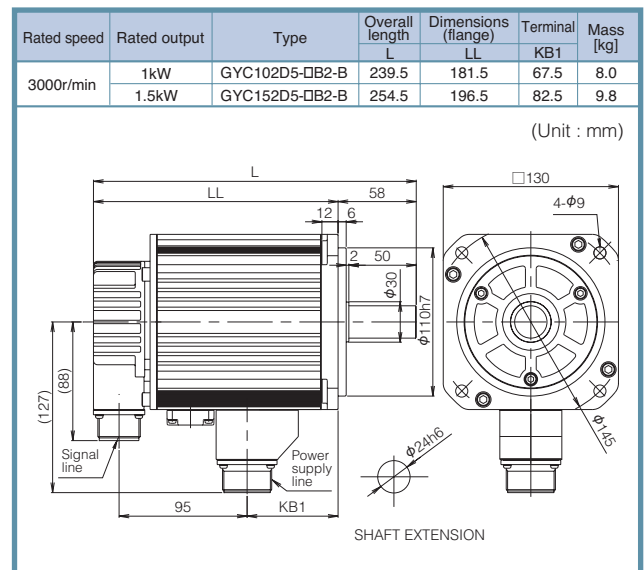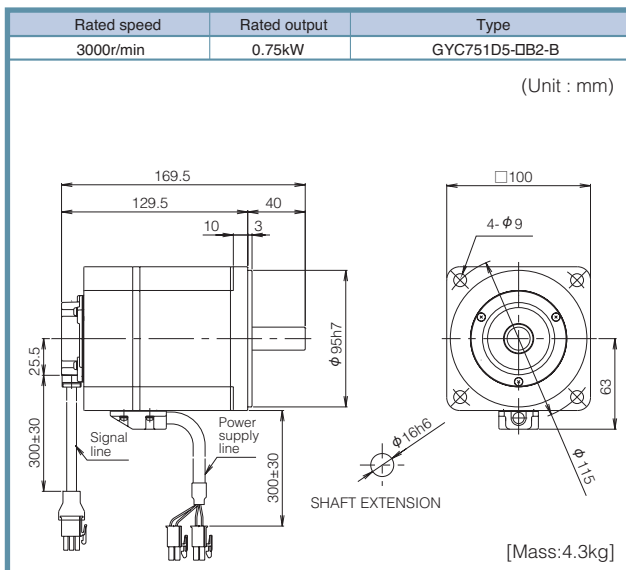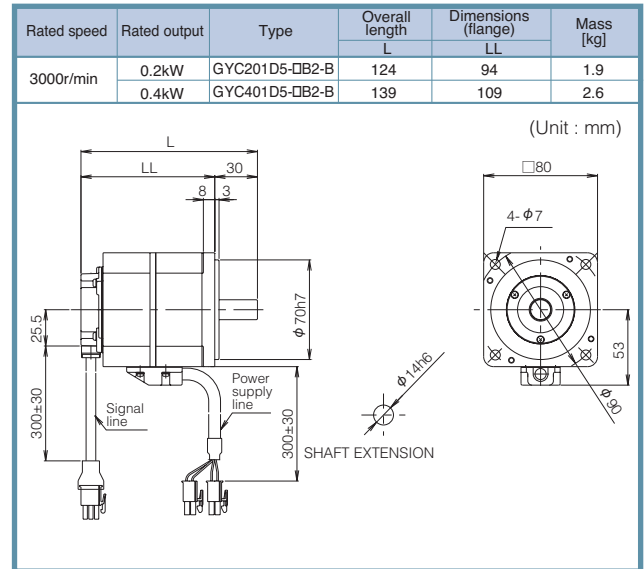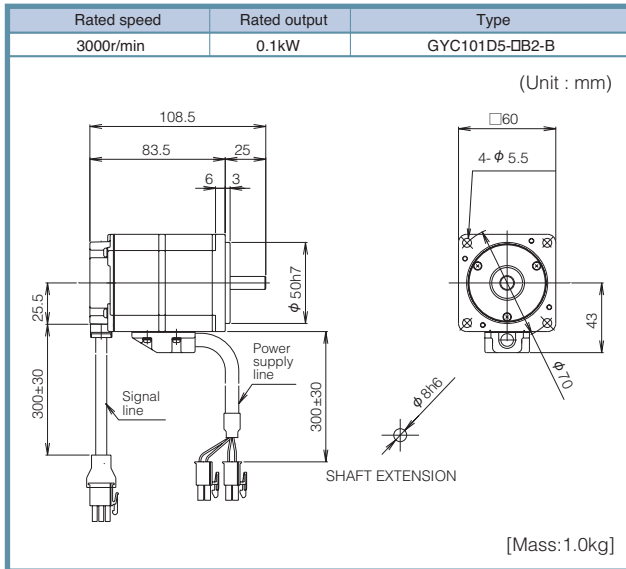


\* See page 21 for the shaft extension specifications of the motor with a key.

External Dimensions

GYG motor [2000r/min]


Rated speed	Rated output	Type	Overall length	Dimensions (flange)	Terminal	Mass [kg]
			L	LL	KB1	
2000r/min	0.5kW	GYG501C5-DB2	175	120	47.5	5.3
	0.75kW	GYG751C5-DB2	187.5	132.5	60	6.4

(Unit : mm)

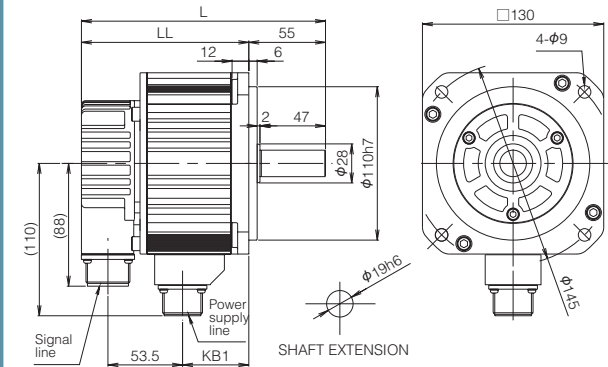

Rated speed	Rated output	Type	Overall length	Dimensions (flange)	Terminal	Mass [kg]
			L	LL	KB1	
2000r/min	1kW	GYG102C5-DB2	200	145	72.5	7.5
	1.5kW	GYG152C5-DB2	225	170	97.5	9.8

(Unit : mm)

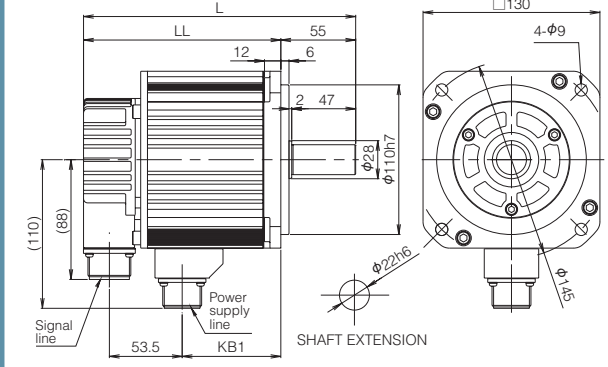


\* See page 21 for the shaft extension specifications of the motor with a key.

GYG motor [2000r/min] (with a brake)


Rated speed	Rated output	Type	Overall length	Dimensions (flange)	Terminal	Mass [kg]
			L	LL	KB1	
2000r/min	0.5kW	GYG501C5-DB2-B	217.5	162.5	52	7.5
	0.75kW	GYG751C5-DB2-B	230	175	64.5	8.6

(Unit : mm)

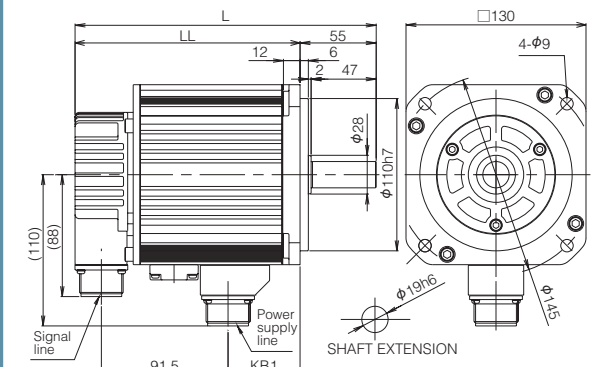

Rated speed	Rated output	Type	Overall length	Dimensions (flange)	Terminal	Mass [kg]
			L	LL	KB1	
2000r/min	1kW	GYG102C5-DB2-B	242.5	187.5	77	9.7
	1.5kW	GYG152C5-DB2-B	267.5	212.5	102	12

(Unit : mm)

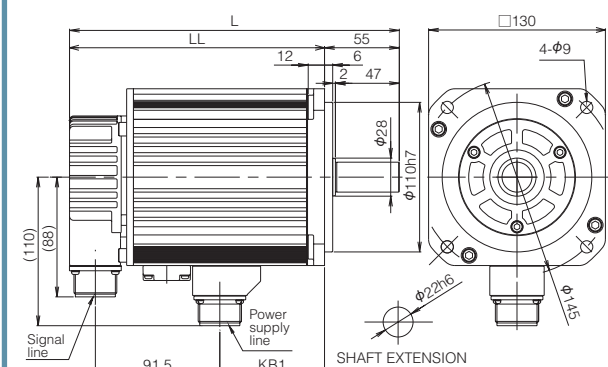


\* See page 21 for the shaft extension specifications of the motor with a key.

## External Dimensions

### GYG motor [1500r/min]

Rated speed	Rated output	Type	Overall length	Dimensions (flange)	Terminal	Mass [kg]
			L	LL	KB1	
1500r/min	0.5kW	GYG501B5-DB2	190.5	132.5	60	6.4
	0.85kW	GYG851B5-DB2	203	145	72.5	7.5

(Unit : mm)

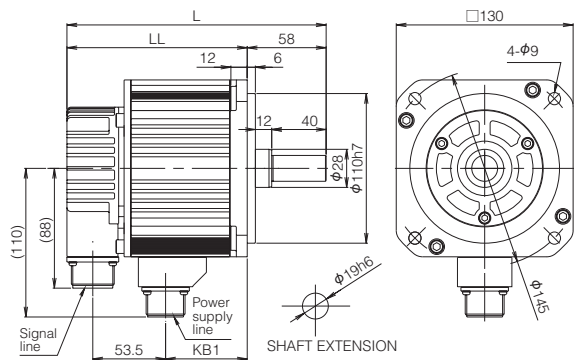


\* See page 21 for the shaft extension specifications of the motor with a key.

### GYG motor [1500r/min] (with a brake)



Rated speed	Rated output	Type	Overall length	Dimensions (flange)	Terminal	Mass [kg]
			L	LL	KB1	
1500r/min	0.5kW	GYG501B5-DB2-B	233	175	64.5	8.6
	0.85kW	GYG851B5-DB2-B	245.5	187.5	77	9.7

(Unit : mm)

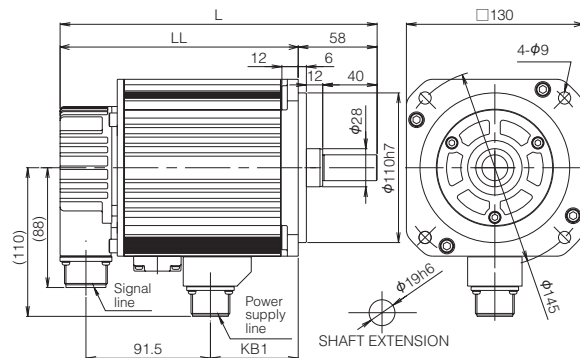

\* See page 21 for the shaft extension specifications of the motor with a key.

### Optional shaft extension specifications (with a key, tapped)

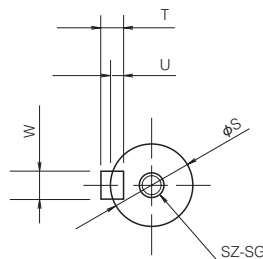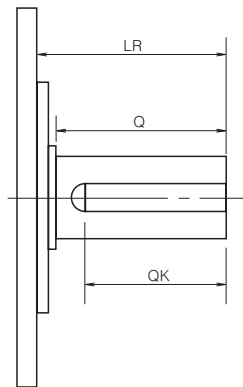


Motor type	LR	Q	QK	S	T	U	W	SZ	SG
GYG motor									
GYG500D5-□A□-□*1	25	-	14	φ6h6	2	1.2	2	-	-
GYG101D5-□A□-□*1	30		20	φ8h6	3	1.8	3	-	-
GYG201D5-□C□-□				5	3	5	M5	8	
GYG401D5-□C□-□									φ16h6
GYG751D5-□C2-□	40	40	30	φ24h6	7	4	8	M8	16
GYG102D5-□C2-□	45		32						
GYG152D5-□C2-□									
GYC motor									
GYC101D5-□A2-□*1	25	-	14	φ8h6	3	1.8	3	-	-
GYC201D5-□C2-□	30		16	φ14h6	5	3	5	M5	8
GYC401D5-□C2-□	40		22	φ16h6	7	4	8	M8	16
GYC751D5-□C2-□									
GYC102D5-□C2-□		58		40					
GYC152D5-□C2-□		50							
GYG motor 2000r/min									
GYG501C5-□C2-□	55	47	35	φ19h6	6	3.5	6	M6	12
GYG751C5-□C2-□	58			φ22h6	7	4	8	M8	16
GYG102C5-□C2-□									
GYG152C5-□C2-□									
GYG motor 1500r/min									
GYG501B5-□C2-□	58	40	30	φ19h6	6	3.5	6	M6	12
GYG851B5-□C2-□									

\*1 The shaft extension of the GYS and GYC motors of 0.1kW or less is not tapped.

## Configuration Diagram/Peripheral Equipment

### Configuration diagram

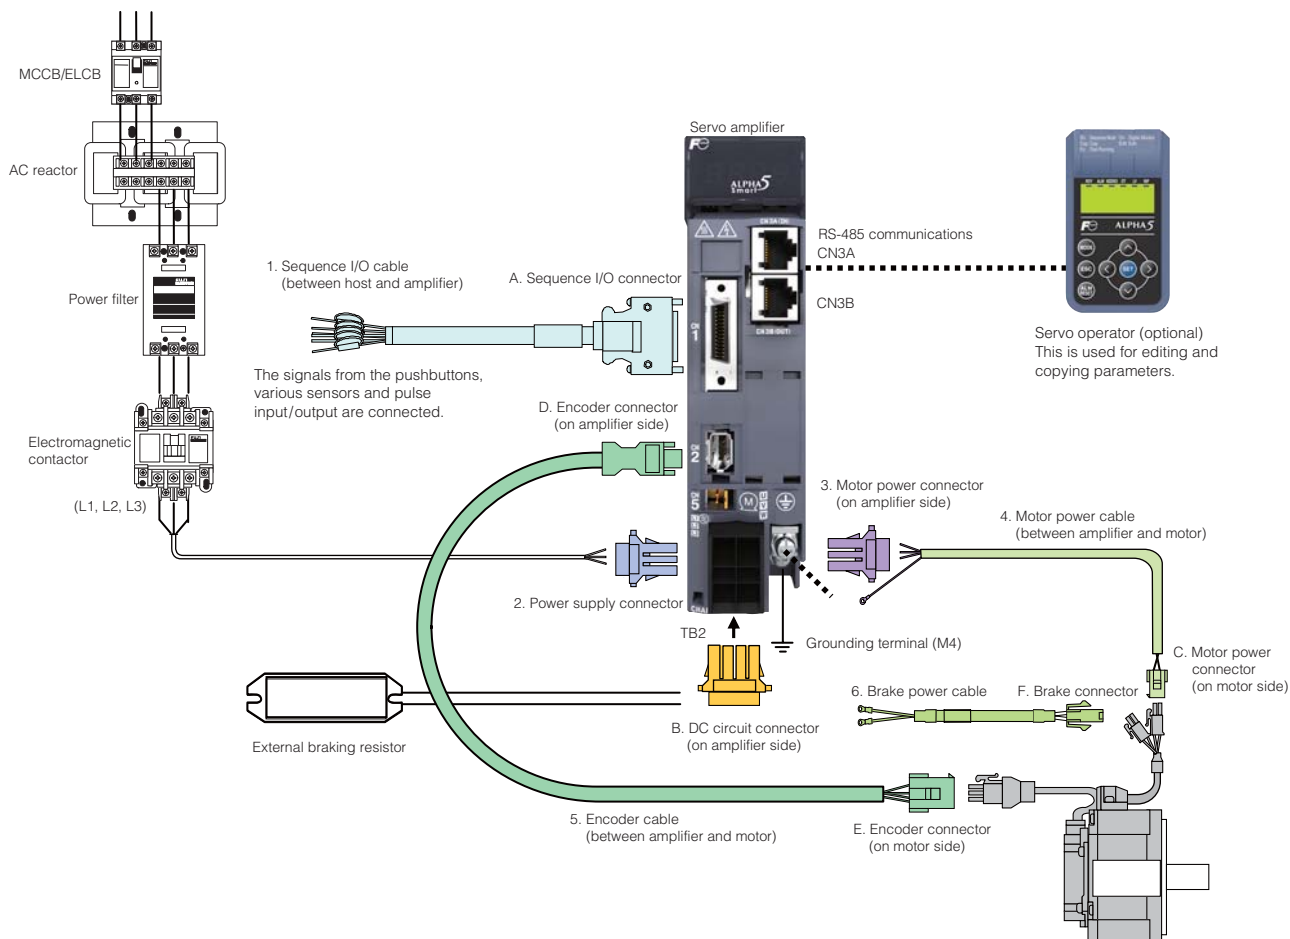

### Peripheral equipment

Input power	Rated speed	Motor output [kW]	Applicable servo amplifier type	Power capacity [kVA]	Input current [A]	Power filter	AC reactor	Wiring breaker MCCB	Earth leakage breaker ELCB	Electromagnetic contactor MC
Single-phase 200V	3000r/min	0.05	RYH201F5-VV2	0.1	0.7	RNFTC06-20	ACR2-0.4A	EA32AC/3	EG32AC/3	SC-03
		0.1		0.2	1.3			EA32AC/5	EG32AC/5	
		0.2		0.4	2.4			EA32AC/10	EG32AC/10	
		0.4	RYH401F5-VV2	0.8	4.7			EA32AC/15	EG32AC/15	
		0.75	RYH751F5-VV2	1.5	8.6			EA32AC/20	EG32AC/20	
	2000r/min	0.5	RYH751F5-VV2	1.0	5.8	RNFTC10-20	ACR2-1.5A	EA32AC/10	EG32AC/10	SC-03
		0.75		1.5	8.6			EA32AC/15	EG32AC/15	
	1500r/min	0.5	RYH751F5-VV2	1.0	5.8	RNFTC10-20	ACR2-1.5A	EA32AC/10	EG32AC/10	SC-03
		0.75		1.5	8.6			EA32AC/15	EG32AC/15	
		1.0		2.0	9.8			EA32AC/20	EG32AC/20	
3-phase 200V	3000r/min	0.05	RYH201F5-VV2	0.1	0.4	RNFTC06-20	ACR2-0.4A	EA33AC/3	EG33AC/3	SC-03
		0.1		0.2	0.7			EA33AC/5	EG33AC/5	
		0.2		0.4	1.4			EA33AC/10	EG33AC/10	
		0.4	RYH401F5-VV2	0.8	2.7			EA33AC/15	EG33AC/15	
		0.75	RYH751F5-VV2	1.5	5.0			EA33AC/20	EG33AC/20	
	2000r/min	0.5	RYH751F5-VV2	1.0	3.3	RNFTC06-20	ACR2-0.75A	EA33AC/10	EG33AC/10	SC-03
		0.75		1.5	5.0			EA33AC/10	EG33AC/10	
		1.0		2.0	6.6			EA33AC/15	EG33AC/15	
		1.5	RYH152F5-VV2	2.9	9.8			EA33AC/20	EG33AC/20	
		1.5	RYH152F5-VV2	2.9	9.8			EA33AC/20	EG33AC/20	
	1500r/min	0.5	RYH751F5-VV2	1.0	3.3	RNFTC06-20	ACR2-0.75A	EA33AC/10	EG33AC/10	SC-03
		0.75		1.5	5.0			EA33AC/10	EG33AC/10	
		1.0		2.0	6.6			EA33AC/15	EG33AC/15	
		1.5	RYH152F5-VV2	2.9	9.8			EA33AC/20	EG33AC/20	
		1.5	RYH152F5-VV2	2.9	9.8			EA33AC/20	EG33AC/20	
		1.5	RYH152F5-VV2	2.9	9.8			EA33AC/20	EG33AC/20	

## Option

### Option

#### Basic option

\* Prepare the optional items below when using the ALPHA5 Smart series.

Motor series	Rated speed	Rated output	Brake	1. Sequence I/O cable (between host and amplifier)	2. Power supply connector	B. DC circuit connector (on amplifier side)	3. Motor power connector (on amplifier side)	4. Motor power cable (between amplifier and motor)	5. Encoder cable (between amplifier and motor)	6. Brake power cable			
GYS motor	3000r/min	0.05kW to 0.4kW	W/o	WSC-D26P03	WSK-S06P-F	WSK-R04P-F	*1	WSC-M04P02-E(2m) WSC-M04P05-E(5m) WSC-M04P10-E(10m) WSC-M04P20-E(20m)	WSC-P06P02-E(2m) WSC-P06P05-E(5m) WSC-P06P10-E(10m) WSC-P06P20-E(20m)	—			
			W/							WSC-M02P02-E(2m) WSC-M02P05-E(5m) WSC-M02P10-E(10m) WSC-M02P20-E(20m)			
		0.75kW	W/o		WSK-S03P-F	*2	WSK-M03P-F			—			
			W/							WSC-M02P02-E(2m) WSC-M02P05-E(5m) WSC-M02P10-E(10m) WSC-M02P20-E(20m)			
		1.0kW to 1.5kW	W/o				Prepared by the customer.	WSC-P06P05-C(5m) WSC-P06P10-C(10m) WSC-P06P20-C(20m)	—				
			W/						Prepared by the customer.				
		GYC motor	3000r/min		0.05kW to 0.4kW	W/o	WSC-D26P03	WSK-S06P-F	WSK-R04P-F	*1	WSC-M04P02-E(2m) WSC-M04P05-E(5m) WSC-M04P10-E(10m) WSC-M04P20-E(20m)	WSC-P06P02-E(2m) WSC-P06P05-E(5m) WSC-P06P10-E(10m) WSC-P06P20-E(20m)	—
						W/							WSC-M02P02-E(2m) WSC-M02P05-E(5m) WSC-M02P10-E(10m) WSC-M02P20-E(20m)
0.75kW	W/o			WSK-S03P-F	*2	WSK-M03P-F		—					
	W/							WSC-M02P02-E(2m) WSC-M02P05-E(5m) WSC-M02P10-E(10m) WSC-M02P20-E(20m)					
1.0kW to 1.5kW	W/o					Prepared by the customer.		WSC-P06P05-C(5m) WSC-P06P10-C(10m) WSC-P06P20-C(20m)	—				
	W/								Prepared by the customer.				
GYG motor	2000r/min			0.5kW to 1.5W	W/o						Prepared by the customer.	WSC-P06P05-C(5m) WSC-P06P10-C(10m) WSC-P06P20-C(20m)	—
GYG motor	1500r/min			0.5kW to 0.85kW	W/o								—
		W/							Prepared by the customer.				

#### Connector kit options

\* If the cables are fabricated by the customer use the connectors below.

Motor series	Rated speed	Rated output	Brake	A. Sequence I/O connector	2. Power supply connector	B. DC circuit connector (on amplifier side)	3. Motor power connector (on amplifier side)	C. Motor power connector (on motor side)	Encoder connector		F. Brake connector
									D. on amplifier side	E. on motor side	
GYS motor	3000r/min	0.05kW	W/o	WSK-D26P	WSK-S06P-F	WSK-R04P-F	*1	WSK-M04P-E	WSK-P06P-M	WSK-P09P-D	-
		0.4kW to 0.75kW	W/o		WSK-S03P-F	*2	WSK-M03P-F				WSK-M02P-E
		0.75kW	W/o					WSK-M02P-E			
		1.0kW to 1.5kW	W/o		WSK-M04P-CA						
GYC motor	3000r/min	0.05kW	W/o		WSK-S06P-F	WSK-R04P-F	*1	WSK-M04P-E	WSK-P06P-M	WSK-P09P-D	-
		0.4kW to 0.75kW	W/o		WSK-S03P-F	*2	WSK-M03P-F				WSK-M02P-E
		0.75kW	W/o					WSK-M02P-E			
		1.0kW to 1.5kW	W/o		WSK-M04P-CB						
GYG motor	2000r/min	0.5kW	W/o	WSK-S03P-F	*2	WSK-M03P-F	WSK-M06P-CB	WSK-P06P-C	-		
		0.5kW to 1.5W	W/o				WSK-M04P-CA		-		
			W/o				WSK-M06P-CA		-		
GYG motor	1500r/min	0.5kW	W/o				WSK-M04P-CA		-		
		0.5kW to 0.85kW	W/o				WSK-M06P-CA		-		

\*1: The connector is shared by the motor power (on the amplifier side) and the power supply.

\*2: The connector is not necessary as it is included in the package of servo amplifier.

#### External regenerative resistor options

Amplifier frame	Built-in	External braking resistor type	Applicable resistance value [Ω]
RYH201F5-VV2	-	WSR-401	17W/68 Ω
RYH401F5-VV2	-		39 to 180
RYH751F5-VV2	20W/40 Ω	WSR-152	50W/15 Ω
RYH152F5-VV2	20W/15 Ω		13 to 47
			8.2 to 27

#### ABS backup battery

Amplifier	Optional battery type
	W/ battery case
All	WSB-SC
	Individual battery
	WSB-S

## Model List

### Servo amplifier

Specifications						Type
Model	Control mode	Command interface	Input voltage	Applicable motor	Applicable motor output	
VV type	Position, speed and torque control (With built-in linear positioning function)	General-purpose interface (pulse or analog voltage) (Modbus-RTU)	Single-phase or 3-phase	GYS/GYC/GYG motor	0.2kW, 0.1kW, 0.05kW	RYH201F5-VV2
			200 to 240V		0.4kW	RYH401F5-VV2
			3-phase 200 to 240V		0.75kW, 0.5kW	RYH751F5-VV2
					1.5kW, 1.0kW, 0.85kW	RYH152F5-VV2

### Servomotor

Specifications							Type
Model	Voltage	Rated speed	Oil seal/shaft	Encoder	Brake	Rated output	
GYS motor (ultra low inertia)	200V	3000r/min	Without an oil seal and a key (*1)	18-bit ABS/INC	Without a brake	0.05kW	GYS500D5-HB2
						0.1kW	GYS101D5-HB2
						0.2kW	GYS201D5-HB2
						0.4kW	GYS401D5-HB2
						0.75kW	GYS751D5-HB2
						1.0kW	GYS102D5-HB2
						1.5kW	GYS152D5-HB2
					With a brake	0.05kW	GYS500D5-HB2-B
						0.1kW	GYS101D5-HB2-B
						0.2kW	GYS201D5-HB2-B
						0.4kW	GYS401D5-HB2-B
						0.75kW	GYS751D5-HB2-B
						1.0kW	GYS102D5-HB2-B
						1.5kW	GYS152D5-HB2-B
				20-bit INC	Without a brake	0.05kW	GYS500D5-RB2
						0.1kW	GYS101D5-RB2
						0.2kW	GYS201D5-RB2
						0.4kW	GYS401D5-RB2
						0.75kW	GYS751D5-RB2
						1.0kW	GYS102D5-RB2
						1.5kW	GYS152D5-RB2
					With a brake	0.05kW	GYS500D5-RB2-B
						0.1kW	GYS101D5-RB2-B
						0.2kW	GYS201D5-RB2-B
						0.4kW	GYS401D5-RB2-B
						0.75kW	GYS751D5-RB2-B
						1.0kW	GYS102D5-RB2-B
						1.5kW	GYS152D5-RB2-B

\*1: The motor without an oil seal, with a key and tapped is available as a semi-standard item.  
The other specifications are handled as an order-made item.

## Model List

### Servomotor

Specifications							Type
Model	Voltage	Rated speed	Oil seal/shaft	Encoder	Brake	Rated output	
GYC motor (low inertia)	200V	3000r/min	Without an oil seal and a key (*1)	18-bit ABS/INC	Without a brake	0.1kW	GYC101D5-HB2
						0.2kW	GYC201D5-HB2
						0.4kW	GYC401D5-HB2
						0.75kW	GYC751D5-HB2
						1.0kW	GYC102D5-HB2
						1.5kW	GYC152D5-HB2
					With a brake	0.1kW	GYC101D5-HB2-B
						0.2kW	GYC201D5-HB2-B
						0.4kW	GYC401D5-HB2-B
						0.75kW	GYC751D5-HB2-B
						1.0kW	GYC102D5-HB2-B
						1.5kW	GYC152D5-HB2-B
				20-bit INC	Without a brake	0.1kW	GYC101D5-RB2
						0.2kW	GYC201D5-RB2
						0.4kW	GYC401D5-RB2
						0.75kW	GYC751D5-RB2
						1.0kW	GYC102D5-RB2
						1.5kW	GYC152D5-RB2
					With a brake	0.1kW	GYC101D5-RB2-B
						0.2kW	GYC201D5-RB2-B
						0.4kW	GYC401D5-RB2-B
						0.75kW	GYC751D5-RB2-B
						1.0kW	GYC102D5-RB2-B
						1.5kW	GYC152D5-RB2-B
GYG motor (medium inertia)	200V	2000r/min	Without an oil seal and a key (*1)	18-bit ABS/INC	Without a brake	0.5kW	GYG501C5-HB2
						0.75kW	GYG751C5-HB2
						1.0kW	GYG102C5-HB2
						1.5kW	GYG152C5-HB2
					With a brake	0.5kW	GYG501C5-HB2-B
						0.75kW	GYG751C5-HB2-B
				20-bit INC	Without a brake	1.0kW	GYG102C5-HB2-B
						1.5kW	GYG152C5-HB2-B
					With a brake	0.5kW	GYG501C5-RB2-B
						0.75kW	GYG751C5-RB2-B
					With a brake	1.0kW	GYG102C5-RB2-B
						1.5kW	GYG152C5-RB2-B
GYG motor (medium inertia)	200V	1500r/min	Without an oil seal and a key (*1)	18-bit ABS/INC	Without a brake	0.5kW	GYG501B5-HB2
						0.85kW	GYG851B5-HB2
					With a brake	0.5kW	GYG501B5-HB2-B
						0.85kW	GYG851B5-HB2-B
				20-bit INC	Without a brake	0.5kW	GYG501B5-RB2
						0.85kW	GYG851B5-RB2
					With a brake	0.5kW	GYG501B5-RB2-B
						0.85kW	GYG851B5-RB2-B

\*1: The motor without an oil seal, with a key and tapped is available as a semi-standard item.  
The other specifications are handled as an order-made item.

## Model List

### Option

#### Connector and cable

Name			Specifications		Type
For main circuit of amplifier	Power supply connector (for main amplifier power)		0.05 to 0.4kW	1 set	WSK-S06P-F
			0.5 to 1.5kW	1 set	WSK-S03P-F
			DC circuit connector (wiring of external regenerative resistor and DC link circuit)	1 set	WSK-R04P-F
			0.05 to 0.4kW	1 set	WSK-R05P-F *1
			Motor power connector (wiring of main motor power)	1 set	WSK-S06P-F
For sequence I/O (between host and amplifier)	Sequence I/O cable		0.5 to 1.5kW	1 set	WSK-S03P-F
			Sequence I/O connector kit *4	1 set	WSK-D26P
For encoder (between amplifier and motor)	Encoder cable		3000r/min 0.05 to 0.75kW	2m (bare wires on one side)	WSC-D26P03
				3m (bare wires on one side)	WSC-D26P03
				5m (connector at both ends)	WSC-P06P02-E
				10m (connector at both ends)	WSC-P06P05-E
			3000r/min 1.0 to 1.5kW 2000r/min 0.5 to 1.5kW 1500r/min 0.5 to 0.85kW	10m (connector at both ends)	WSC-P06P10-E
				20m (connector at both ends)	WSC-P06P20-E
				5m (connector at both ends)	WSC-P06P05-C
				10m (connector at both ends)	WSC-P06P10-C
			Encoder connector kit *4	20m (connector at both ends)	WSC-P06P20-C
				1 set	WSK-P06P-M
For motor power (between amplifier and motor)	Motor power cable	For main motor power	0.05 to 0.75kW *2	1 set	WSK-P09P-D
				1 set	WSK-P09P-D
				1 set	WSK-P06P-C
				1 set	WSK-P06P-C
		For brake power *3	0.05 to 0.75kW	2m (bare wires on one side)	WSC-M04P02-E
				5m (bare wires on one side)	WSC-M04P05-E
				10m (bare wires on one side)	WSC-M04P10-E
				20m (bare wires on one side)	WSC-M04P20-E
	Motor power connector kit	For main motor power *4	Motor side : GYS/GYC 0.05 to 0.75kW	2m (bare wires on one side)	WSC-M02P02-E
			Motor side : GYS 1.0 to 1.5kW GYG 0.5 to 1.5kW	5m (bare wires on one side)	WSC-M02P05-E
			Motor side : GYC 1.0 to 1.5kW	10m (bare wires on one side)	WSC-M02P10-E
		For brake power *4	Motor side : 0.05 to 0.75kW	20m (bare wires on one side)	WSC-M02P20-E
			Motor side : GYS 1.0 to 1.5kW GYG 0.5 to 1.5kW	1 set	WSK-M04P-E
		For main motor power + brake power	Motor side : GYS 1.0 to 1.5kW GYG 0.5 to 1.5kW	1 set	WSK-M04P-CA
			Motor side : GYC 1.0 to 1.5kW	1 set	WSK-M04P-CB

\*1: One connector is included in the accessory of the main body of the servo amplifier.

\*2: Use this cable with motor power connector (on amplifier side) WSK-M03P-E.

\*3: Use this cable as a brake cable of the motor equipped with a brake.

\*4: Use this connector when the customer fabricates a cable at arbitrary length.

#### Common option

Specifications				Type
ABS backup battery	Set of battery and case (*With case)		1 set	WSB-SC
	Battery (*Discrete replacement battery)		1 piece	WSB-S
External regenerative resistor	3000r/min for 0.05 to 0.4kW			WSR-401
	3000r/min for 0.75 to 1.5kW, 2000r/min for 0.5 to 1.0kW, 1500r/min for 0.5 to 0.85kW			WSR-152
For PC loader connection	RS-232C - RS-485 conversion adaptor	For connection of RS-485 port of VV type servo amplifier *1	—	NW0H-CNV
	Cable		2m (connector at both ends)	WSC-PCL
Servo operator *1	—			WSP-51

\*1: Use a commercially-available USB cable (USB-A : USB-B, or USB-A : mini-B) when connecting the servo operator to PC.

To connect to the body, use a commercially-available LAN cable.

## Service Network



### Fuji FA Service Centers

- Overseas Service Center  
[Service Area: Far East Asia]  
5520, Minami Tamagaki-cho, Suzuka-city, Mie, 513-8633, JAPAN  
Phone: (059)340-0288
- USA Service Center  
[Service Area: USA, Canada, Central & South America]  
47520 Westinghouse Drive Fremont, CA 94539, USA  
Phone: (510)440-1060
- CHICAGO Service Station  
1827 Walden Office Square.Suite 300 Schaumburg, IL60173, USA  
Phone: (847)397-8040
- EU Service Center  
[Service Area: Europe, Middle East & Africa]  
Goethering 58, 63067 Offenbach / Main Germany  
Phone: (69)669029-0
- South East Asia & Oceania Service Center  
[Service Area: South East Asia, Oceania]  
171 Chin Swee Road, #12-01 San Centre, Singapore 169877  
Phone: 6533-0014
- FUJII-ELECTRIC TECHNOLOGY AND SERVICE (SHENZHEN) CO., LTD.  
[Service Area: China]  
5F., Liming Bldg., No.144, Zhongxing Rd., Luohu District, Shenzhen  
Phone: (0755)8220-2745, 8218-4287

### Contracted Service Companies

- USA, Canada, Central & South America Area
  - ① USA (LOS ANGELES)  
OESS CORPORATION (Head Office: NEW JERSEY)  
5550 Cerritos Ave. Suite H, Cypress, CA 90630 USA  
Phone: (714)220-1878
- Far East Asia Area
  - ② KOREA  
GAIUS INDUSTRIES CO., LTD.  
Cana Bldg., 10-59, Yangjae-Dong, Seocho-Gu, Seoul, 137-887 KOREA  
Phone: (02)3463-0766
  - ③ TAIWAN  
ELTA Electric Co., Ltd.  
4F., No.32, Sec.3, Cheng TehRoad, Taipei, Taiwan  
Phone: (02)2597-6458
  - ④ TAIWAN  
Full Key International Technology Ltd.  
12F., No.111-8, Hsing Teh. RD., San-Chung City, Taipei, Taiwan  
Phone: (02)2995-2008
- Europe, Middle East & Africa Area
  - ① U.K.  
CMTS LIMITED  
Unit 7 the Cloisters Church Field Road Sudbury Suffolk CO10 2YA,U.K.  
Phone: (1787)-468685


## PC loader

The following features can be readily accessible by connecting the servo amplifier to a PC: waveform trace, parameter editing, various monitor display, alarm history, maintenance information, test run, and machine characteristic analysis, etc.

The PC loader software can be downloaded for free from Fuji's website.

FES URL [http://www.fujielectric.com/fes/products\\_services/power\\_drive/sv/alpha5smart/index](http://www.fujielectric.com/fes/products_services/power_drive/sv/alpha5smart/index)

### Waveform trace

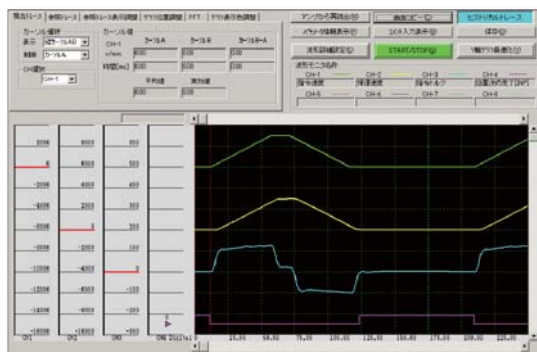

### Parameter editing



### Alarm history




### Maintenance information



### Test run



### Machine characteristics analysis

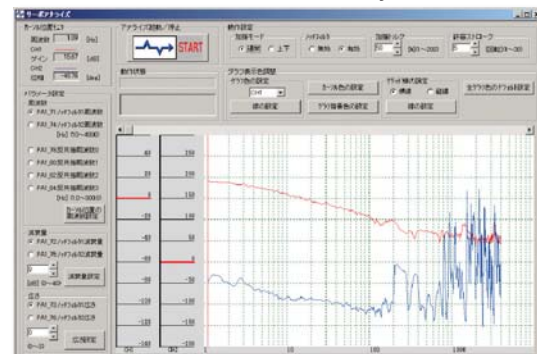


## Capacity Adoption

### Capacity adoption software

In this software the items including optimal capacity and regenerative braking resistor can be automatically adopted by inputting the machine specifications and operation patterns. The capacity adoption software can be downloaded for free from Fuji's website.

FES URL [http://www.fujielectric.com/fes/products\\_services/power\\_drive/sv/alpha5smart/index](http://www.fujielectric.com/fes/products_services/power_drive/sv/alpha5smart/index)

### How to adopt the capacities

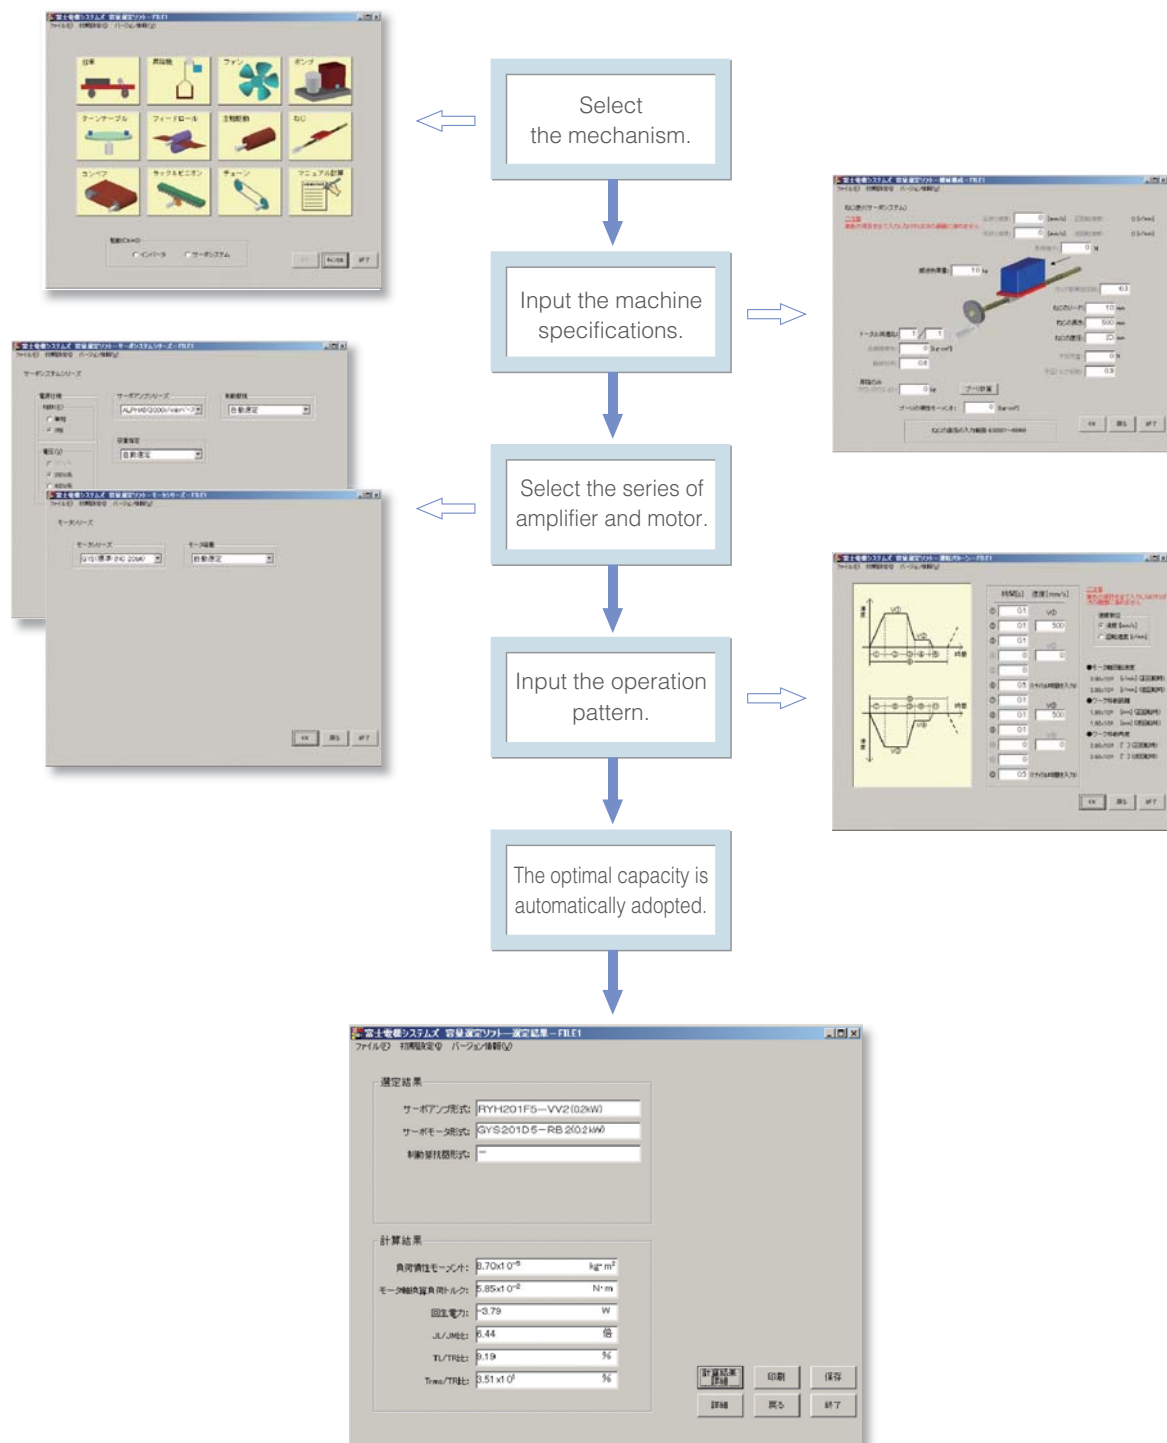

## Product Warranty

### Please take the following items into consideration when placing your order.

When requesting an estimate and placing your orders for the products included in these materials, please be aware that any items such as specifications which are not specifically mentioned in the contract, catalog, specifications or other materials will be as mentioned below.

In addition, the products included in these materials are limited in the use they are put to and the place where they can be used, etc., and may require periodic inspection. Please confirm these points with your sales representative or directly with this company.

Furthermore, regarding purchased products and delivered products, we request that you take adequate consideration of the necessity of rapid receiving inspections and of product management and maintenance even before receiving your products.

### 1. Free of Charge Warranty Period and Warranty Range

#### 1-1 Free of charge warranty period

- (1) The product warranty period is "1 year from the date of purchase" or 24 months from the manufacturing date imprinted on the name place, whichever date is earlier.
- (2) However, in cases where the use environment, conditions of use, use frequency and times used, etc., have an effect on product life, this warranty period may not apply.
- (3) Furthermore, the warranty period for parts restored by Fuji Electric's Service Department is "6 months from the date that repairs are completed."

#### 1-2 Warranty range

- (1) In the event that breakdown occurs during the product's warranty period which is the responsibility of Fuji Electric, Fuji Electric will replace or repair the part of the product that has broken down free of charge at the place where the product was purchased or where it was delivered. However, if the following cases are applicable, the terms of this warranty may not apply.
  - 1) The breakdown was caused by inappropriate conditions, environment, handling or use methods, etc. which are not specified in the catalog, operation manual, specifications or other relevant documents.
  - 2) The breakdown was caused by the product other than the purchased or delivered Fuji's product.
  - 3) The breakdown was caused by the product other than Fuji's product, such as the customer's equipment or software design, etc.
  - 4) Concerning the Fuji's programmable products, the breakdown was caused by a program other than a program supplied by this company, or the results from using such a program.
  - 5) The breakdown was caused by modifications or repairs affected by a party other than Fuji Electric.
  - 6) The breakdown was caused by improper maintenance or replacement using consumables, etc. specified in the operation manual or catalog, etc.
  - 7) The breakdown was caused by a chemical or technical problem that was not foreseen when making practical application of the product at the time it was purchased or delivered.
  - 8) The product was not used in the manner the product was originally intended to be used.
  - 9) The breakdown was caused by a reason which is not this company's responsibility, such as lightning or other disaster.
- (2) Furthermore, the warranty specified herein shall be limited to the purchased or delivered product alone.
- (3) The upper limit for the warranty range shall be as specified in item (1) above and any damages (damage to or loss of machinery or equipment, or lost profits from the same, etc.) consequent to or resulting from breakdown of the purchased or delivered product shall be excluded from coverage by this warranty.

#### 1-3. Trouble diagnosis

As a rule, the customer is requested to carry out a preliminary trouble diagnosis. However, at the customer's request, this company or its service network can perform the trouble diagnosis on a chargeable basis. In this case, the customer is asked to assume the burden for charges levied in accordance with this company's fee schedule.

### 2. Exclusion of Liability for Loss of Opportunity, etc.

Regardless of whether a breakdown occurs during or after the free of charge warranty period, this company shall not be liable for any loss of opportunity, loss of profits, or damages arising from special circumstances, secondary damages, accident compensation to another company, or damages to products other than this company's products, whether foreseen or not by this company, which this company is not be responsible for causing.

### 3. Repair Period after Production Stop, Spare Parts Supply Period (Holding Period)

Concerning models (products) which have gone out of production, this company will perform repairs for a period of 7 years after production stop, counting from the month and year when the production stop occurs. In addition, we will continue to supply the spare parts required for repairs for a period of 7 years, counting from the month and year when the production stop occurs. However, if it is estimated that the life cycle of certain electronic and other parts is short and it will be difficult to procure or produce those parts, there may be cases where it is difficult to provide repairs or supply spare parts even within this 7-year period. For details, please confirm at our company's business office or our service office.

### 4. Transfer Rights

In the case of standard products which do not include settings or adjustments in an application program, the products shall be transported to and transferred to the customer and this company shall not be responsible for local adjustments or trial operation.


### 5. Service Contents

The cost of purchased and delivered products does not include the cost of dispatching engineers or service costs. Depending on the request, these can be discussed separately.

### 6. Applicable Scope of Service

Above contents shall be assumed to apply to transactions and use of the country where you purchased the products. Consult the local supplier or Fuji for the detail separately.

## Reference Material

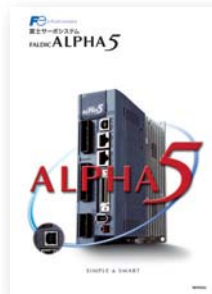

### ALPHA 5 Series

The ALPHA 5 Series is the all-round type servo system which supports the system allowing the motion control via high-speed serial bus.



### Programmable operation display MONITOUCH V8 Series

Various product types ranging from 5.7" (QVGA) to 15" (XGA) are included in the product line.  
Equipped with industry's first high-quality video with 1677-million colors supporting 8-way communications.







### Compact size speed reducer for servo motors

The compact size motor speed reducer for GYS and GYC motors.  
Smooth and quiet operation with low-pulsation can be achieved by the helical gear.  
Backlash: 0.25°  
Reduction ratio: 1/5, 1/9, 1/15, 1/25

## Easy operation! The contents of the Monitouch

The Monitouch (V8) can be connected directly to the servo amplifier via Modbus-RTU communications.  
The dedicated Monitouch contents (screens) have been prepared for operations.

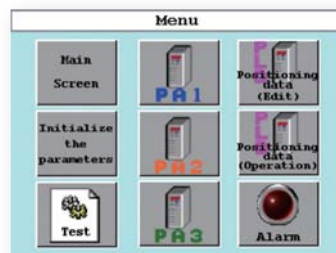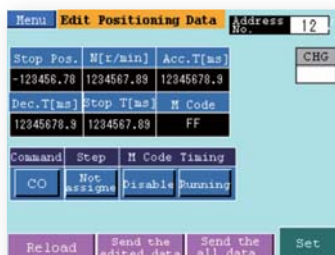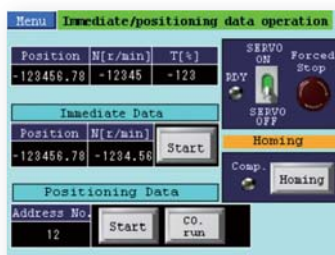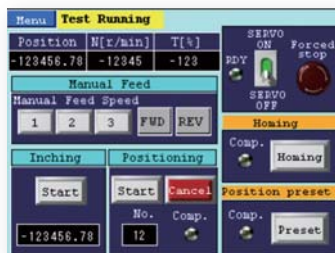

MONITOUCH V8



Servo operations are accessible readily by using the Monitouch contents.

- Parameter editing
- Test run
- Positioning
- Positioning data editing, etc.

\* The Monitouch contents are planned to be registered to the Monitouch (V8) Editor.



## SAFETY PRECAUTIONS

1. This catalog is intended for use in selecting required servo systems. Before actually using these products, carefully read their instruction manuals and understand their correct usage.
2. Products described in this catalog are neither designed nor manufactured for combined use with a system or equipment that will affect human lives.  
If you are considering using these products for special purposes, such as atomic energy control, aerospace, medical application, or traffic control, please consult our sales office.
3. If you use our product with equipment that is expected to cause serious injury or damage to your property in case of failure, be sure to take appropriate safety measures for the equipment.

The Inverter Value Engineering Center (Suzuka Area) has acquired environment management system ISO14001 and quality management system ISO9001 certifications.



## Fuji Electric Systems Co., Ltd.

Starzen Shinagawa Bldg.,  
2-4-13, Konan, Minato-ku, Tokyo 108-0075, Japan  
Phone: +81-3-6717-0611 Fax: +81-3-6717-0585  
URL <http://www.fesys.co.jp/eng/index.html>

Printed on recycled paper

Information in this catalog is subject to change without notice.

Printed in Japan 2010-07 (G10/G10) CM