

Table of Contents

230 kV Aluminum Welded

230 kV Welded Table of Contents	367
Pictorial Index	369

Welded Bus Supports

Type HPS-AA, HPS-CH-AA	371
Type PLHS-AA, PLHS-CH-AA	372
Type PLHSO-AA	373
Type WPS-AA	374
Type WPSO-AA	375
Type WPSSL-AA	376
Type WPSV-AA	377
Type WXBC-AA	378

Welded Couplers

Type 14700	379
Type 15100	381
Type WS-AA, WS-E-AA	383
Type WSXL-SI-AA	384
Type WWC-AA, WWC-E-AA	385
Type WWCR-AA, WWCR-E-AA	386
Type WWSC-AA	387
Type XWWC-AA, XWWC-E-AA	388
Type XWWCT-AA	389

Welded End Bells

Type 14400	390
Type WCI-AA, WCI-E-AA	391
Type WP-AA, WP-E-AA	392

Welded Elbows

Type WEPI-AA, WEPI-30-AA, WEPI-45-AA, WEPI-60-AA	393
--	-----

Welded Pipe Taps and Extensions

Type WGPB-AA	394
Type WTC-N-AA	395
Type WTF-N-AA	396

Welded Tee and Vee Connectors


Type 1000 Series	397
Type A-Frame Connectors, 14500 & 14600 Series	399
Type WT-AA, WTA-75-AA, WTA-80-AA	401
Type WVBP-20-AA, WVBP-30-AA	403




Welded Terminal Connectors


Type 15950, 15960 Series	405
Type 34300	406
Type WP2C-N-AA, WP2CA-N-45-AA, WP2CA-N-90-AA	407
Type WPC-N-AA, WPCA-N-45-AA, WPCA-N-90-AA	410
Type WTP-AA, WTPA-45-AA, WTPA-90-AA	413
Type WTPC-N-AA	415
Type WTPI-AA, WTPIA-45-AA, WTPIA-90-AA	416
Type WTPIC-N-AA	418
Type WTPO-N-AA, WTPOA-N-45-AA, WTPOA-N-90-AA	419
Type WTPOC-AA	421
Type WWSC-N-AA	422
Type WXL-90V-AA	423
Type WXL-AA, WXL-E-AA	424
Type WXLO-AA, WXLO-E-AA	425




230 kV or Less Aluminum Welded



230 kV Aluminum Welded Bus Supports	
	HPS-AA, HPS-CH-AA
	PG. 371
	PLHS-AA, PLHS-CH-AA
	PG. 372
	PLHSO-AA SERIES
	PG. 373
	WPS-AA SERIES
	PG. 374
	WPSO-AA
	PG. 375
	WPSSL-AA SERIES
	PG. 376
	WPSV-AA
	PG. 377
	WXBC-AA SERIES
	PG. 378

230 kV Aluminum Welded Couplers	
	14700 SERIES
	PG. 379
	15100 SERIES
	PG. 381
	WS-AA, WS-E-AA SERIES
	PG. 383
	WSXL-SI-AA SERIES
	PG. 384
	SWWC-AA, WWC-E-AA SERIES
	PG. 385
	WWCR-AA, WWCR-E-AA SERIES
	PG. 386
	WWSC-AA SERIES
	PG. 387
	XWWC-AA, XWWC-E-AA SERIES
	PG. 388
	XWWCT-AA SERIES
	PG. 389

230 kV Aluminum Welded End Bells	
	14400 SERIES
	PG. 390
	WCI-AA, WCI-E-AA SERIES
	PG. 391
	WP-AA, WP-E-AA SERIES
	PG. 392
230 kV Aluminum Welded Elbows	
	WEPI-AA SERIES
	PG. 393
230 kV Aluminum Welded Pipe Taps & Extensions	
	WGPH-AA SERIES
	PG. 394
	WTC-N-AA SERIES
	PG. 395
	WTF-N-AA SERIES
	PG. 396

230 kV Aluminum Welded Tee and Vee Connectors	
	1000 SERIES
	PG. 397
	A-FRAME, 14500, 14600 SERIES
	PG. 399
	WT-AA, WTA-75-AA, -80 SERIES
	PG. 401
	WVBP-20-AA, WVBP-30-AA SERIES
	PG. 403
230 kV Aluminum Welded Terminal Connectors	
	15950, 15960 SERIES
	PG. 405
	34300 SERIES
	PG. 406
	WP2C-N-AA, WP2CA-N-45-AA, -90 SERIES
	PG. 407

	WPC-N-AA, WPCA-N-45-AA, -90 SERIES
	PG. 410
	WTP-AA, WTPA-45-AA, -90 SERIES
	PG. 413
	WTPC-N-AA SERIES
	PG. 415
	WTPI-AA, WTPIA-45-AA, -90 SERIES
	PG. 416
	WTPIC-N-AA SERIES
	PG. 418
	WTPO-N-AA, WTPOA-N-45-AA, -90 SERIES
	PG. 419
	WTPOC-AA SERIES
	PG. 421
	WWSC-N-AA SERIES
	PG. 422

	WXL-90V-AA SERIES
	PG. 423
	WXL-AA, WXL-E-AA SERIES
	PG. 424
	WXLO-AA, WXLO-E-AA SERIES
	PG. 425

DOSSERT® TYPE HPS-AA, HPS-CH-AA

HPS is a horizontal support for a rigid fit and the HPS-CH is a for a horizontal support for a slip fit. Horizontal type support for pipe or tube to insulator. Slip or rigid fit.

Material


Aluminum Alloy

Hardware


Galvanized steel hardware supplied for base mounting.

Notes



1. For a slip fit bus support add suffix '-CH'. Ex: HPS100-3B-CH-AA.
2. For base mounting dimensions and hardware see page 3 in the general catalog index.

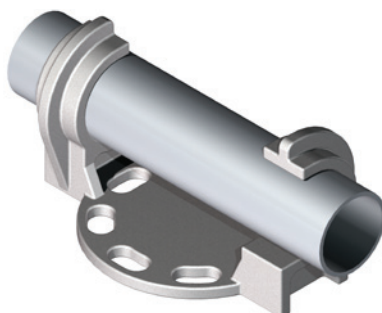

HPS-AA

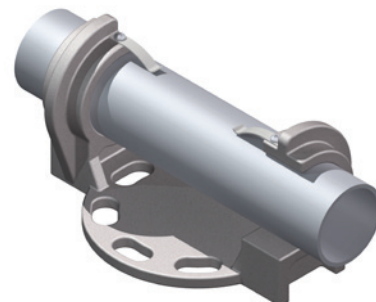

HPS-CH-AA

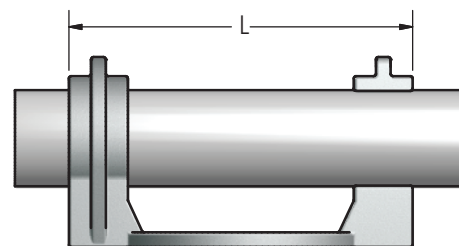

Ordering Information

CATALOG NUMBER		SPS	BOLT CIRCLE	DIMENSIONS IN INCHES			
STANDARD	WITH CHATTER SPRING			A	F	L	T
HPS100-3-AA	HPS100-3-CH-AA	1	3	2	4 1/4	5 3/4	3/8
HPS100-5-AA	HPS100-5-CH-AA	1	5	2	6 1/4	8	3/8
HPS125-3-AA	HPS125-3-CH-AA	1 1/4	3	2 1/4	4 1/4	5 3/4	3/8
HPS125-5-AA	HPS125-5-CH-AA	1 1/4	5	2 3/8	6 1/4	8	3/8
HPS150-3-AA	HPS150-3-CH-AA	1 1/2	3	2 1/2	4 1/4	5 3/4	3/8
HPS150-5-AA	HPS150-5-CH-AA	1 1/2	5	2 1/2	6 1/4	8 1/2	3/8
HPS200-3-AA	HPS200-3-CH-AA	2	3	2 3/4	4 1/4	6 1/4	3/8
HPS200-5-AA	HPS200-5-CH-AA	2	5	2 3/4	6 1/4	8 1/2	3/8
HPS250-3-AA	HPS250-3-CH-AA	2 1/2	3	3 1/8	4 1/4	6 5/8	3/8
HPS250-5-AA	HPS250-5-CH-AA	2 1/2	5	3 1/8	6 1/4	8 7/8	3/8
HPS300-3-AA	HPS300-3-CH-AA	3	3	3 5/8	4 1/4	6 5/8	3/8
HPS300-5-AA	HPS300-5-CH-AA	3	5	3 5/8	6 1/4	8 7/8	3/8
HPS350-3-AA	HPS350-3-CH-AA	3 1/2	3	4	4 1/4	7 1/4	7/16
HPS350-5-AA	HPS350-5-CH-AA	3 1/2	5	4	6 1/4	9 1/2	7/16
HPS400-3-AA	HPS400-3-CH-AA	4	3	4 1/2	4 1/4	7 5/8	1/2
HPS400-5-AA	HPS400-5-CH-AA	4	5	4 1/2	6 1/4	8 1/4	1/2
HPS400-7-AA	HPS400-7-CH-AA	4	7	4 1/2	8 1/2	10 3/4	1/2
HPS500-3-AA	HPS500-3-CH-AA	5	3	5	4 1/4	8 1/4	1/2
HPS500-5-AA	HPS500-5-CH-AA	5	5	5	6 1/4	10	1/2
HPS500-7-AA	HPS500-7-CH-AA	5	7	5	8 1/2	12 1/4	1/2
HPS600-3-AA	HPS600-3-CH-AA	6	3	5 1/2	4 1/4	8 1/4	1/2
HPS600-5-AA	HPS600-5-CH-AA	6	5	5 1/2	6 1/4	10	1/2
HPS600-7-AA	HPS600-7-CH-AA	6	7	5 1/2	8 1/2	12 1/4	1/2

DOSSERT® TYPE PLHS-AA, PLHS-CH-AA

Slip or Fixed Bus Support

Can be used as a slip or fixed bus support or fixed support by being welded into position.

Material

Aluminum Alloy

Hardware



Galvanized steel hardware supplied for base mounting.

Notes

1. For base mounting dimensions and hardware see page 3 in the general catalog index.



PLHS-AA

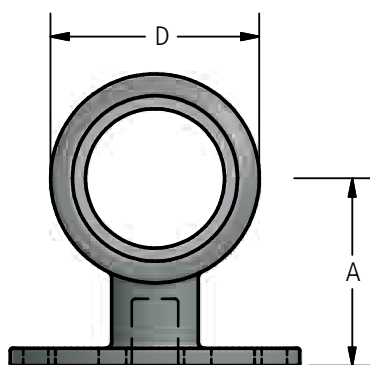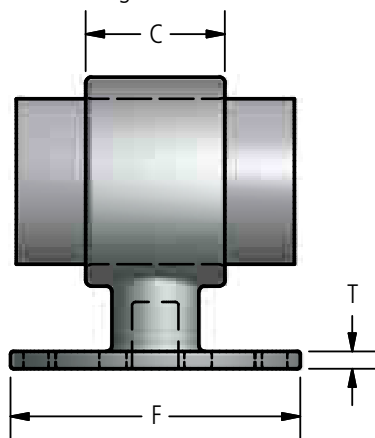

Ordering Information

CATALOG NUMBER		SPS	BOLT CIRCLE	DIMENSIONS IN INCHES				
STANDARD	WITH CHATTER SPRING			A	C	D	T	F
PLHS75-3-AA	PLHS75-3-CH-AA	3/4	3	2	1-1/4	1-9/16	3/8	4-1/4
PLHS75-5-AA	PLHS75-5-CH-AA	3/4	5	2-1/4	1-1/4	1-9/16	3/8	6-1/4
PLHS100-3-AA	PLHS100-3-CH-AA	1	3	2	1-1/4	1-7/8	3/8	4-1/4
PLHS100-5-AA	PLHS100-5-CH-AA	1	5	2-1/4	1-1/4	1-7/8	3/8	6-1/4
PLHS125-3-AA	PLHS125-3-CH-AA	1-1/4	3	2-1/4	1-1/2	2-1/4	3/8	4-1/4
PLHS125-5-AA	PLHS125-5-CH-AA	1-1/4	5	2-3/8	1-1/2	2-1/4	3/8	6-1/4
PLHS150-3-AA	PLHS150-3-CH-AA	1-1/2	3	2-1/2	1-1/2	2-5/8	3/8	4-1/4
PLHS150-5-AA	PLHS150-5-CH-AA	1-1/2	5	2-1/2	1-1/2	2-5/8	3/8	6-1/4
PLHS200-3-AA	PLHS200-3-CH-AA	2	3	2-3/4	2	3-1/4	3/8	4-1/4
PLHS200-5-AA	PLHS200-5-CH-AA	2	5	2-3/4	2	3-1/4	3/8	6-1/4
PLHS250-3-AA	PLHS250-3-CH-AA	2-1/2	3	3-1/8	2	3-11/16	3/8	4-1/4
PLHS250-5-AA	PLHS250-5-CH-AA	2-1/2	5	3-1/8	2	3-11/16	3/8	6-1/4
PLHS300-3-AA	PLHS300-3-CH-AA	3	3	3-5/8	3	4-1/2	7/16	4-1/4
PLHS300-5-AA	PLHS300-5-CH-AA	3	5	3-5/8	3	4-1/2	7/16	6-1/4
PLHS350-3-AA	PLHS350-3-CH-AA	3-1/2	3	4	3	5	7/16	4-1/4
PLHS350-5-AA	PLHS350-5-CH-AA	3-1/2	5	4	3	5	7/16	6-1/4
PLHS400-3-AA	PLHS400-3-CH-AA	4	3	4-1/2	3	5-1/2	7/16	4-1/4
PLHS400-5-AA	PLHS400-5-CH-AA	4	5	4-1/2	3	5-1/2	7/16	6-1/4
PLHS450-3-AA	PLHS450-3-CH-AA	4-1/2	3	4-3/4	3	6	7/16	4-1/4
PLHS450-5-AA	PLHS450-5-CH-AA	4-1/2	5	4-3/4	3	6	7/16	6-1/4
PLHS500-3-AA	PLHS500-3-CH-AA	5	3	5	3	6-9/16	7/16	4-1/4
PLHS500-5-AA	PLHS500-5-CH-AA	5	5	5	3	6-9/16	7/16	6-1/4
PLHS600-3-AA	PLHS600-3-CH-AA	6	3	5-1/2	4	7-5/8	7/16	4-1/4
PLHS600-5-AA	PLHS600-5-CH-AA	6	5	5-1/2	4	7-5/8	7/16	6-1/4

DOSSERT® TYPE PLHSO-AA


Bus Support for Pipes, Slip or Fixed

Material

Aluminum Alloy

Hardware

Galvanized steel hardware supplied for base mounting.

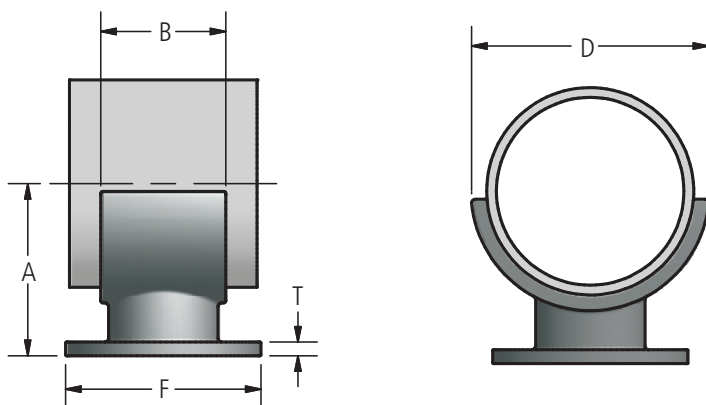

Ordering Information

CATALOG NUMBER	SPS	BOLT CIRCLE	DIMENSIONS IN INCHES				
			A	B	D	F	T
PLHS075-3-AA	3/4	3	2	1-1/4	1-9/16	4-1/4	3/8
PLHS075-5-AA	3/4	5	2-1/4	1-1/4	1-9/16	6-1/4	3/8
PLHS0100-3-AA	1	3	2	1-1/4	1-7/8	4-1/4	3/8
PLHS0100-5-AA	1	5	2-1/4	1-1/4	1-7/8	6-1/4	3/8
PLHS0125-3-AA	1-1/4	3	2-1/4	1-1/2	2-1/4	4-1/4	3/8
PLHS0125-5-AA	1-1/4	5	2-3/8	1-1/2	2-1/4	6-1/4	3/8
PLHS0150-3-AA	1-1/2	3	2-1/2	1-1/2	2-5/8	4-1/4	3/8
PLHS0150-5-AA	1-1/2	5	2-1/2	1-1/2	2-5/8	6-1/4	3/8
PLHS0200-3-AA	2	3	2-3/4	2	3-1/4	4-1/4	3/8
PLHS0200-5-AA	2	5	2-3/4	2	3-1/4	6-1/4	3/8
PLHS0250-3-AA	2-1/2	3	3-1/8	2	3-11/16	4-1/4	3/8
PLHS0250-5-AA	2-1/2	5	3-1/8	2	3-11/16	6-1/4	3/8
PLHS0300-3-AA	3	3	3-5/8	3	4-1/2	4-1/4	7/16
PLHS0300-5-AA	3	5	3-5/8	3	4-1/2	6-1/4	7/16
PLHS0350-3-AA	3-1/2	3	4	3	5	4-1/4	7/16
PLHS0350-5-AA	3-1/2	5	4	3	5	6-1/4	7/16
PLHS0400-3-AA	4	3	4-1/2	3	5-1/2	4-1/4	7/16
PLHS0400-5-AA	4	5	4-1/2	3	5-1/2	6-1/4	7/16
PLHS0450-3-AA	4-1/2	3	4-3/4	3	6	4-1/4	7/16
PLHS0450-5-AA	4-1/2	5	4-3/4	3	6	6-1/4	7/16
PLHS0500-3-AA	5	3	5	3	6-9/16	4-1/4	7/16
PLHS0500-5-AA	5	5	5	3	6-9/16	6-1/4	7/16
PLHS0600-3-AA	6	3	5-1/2	4	7-5/8	4-1/4	7/16
PLHS0600-5-AA	6	5	5-1/2	4	7-5/8	6-1/4	7/16

DOSSERT® TYPE WPS-AA

Aluminum Welded Bus Support

Horizontal type support for pipe or tube to insulator. Slip or rigid fit applications.

Material



Aluminum Alloy

Hardware

Galvanized steel mounting hardware.

Notes

1. For base mounting dimensions and hardware see page 3 in the general catalog index.

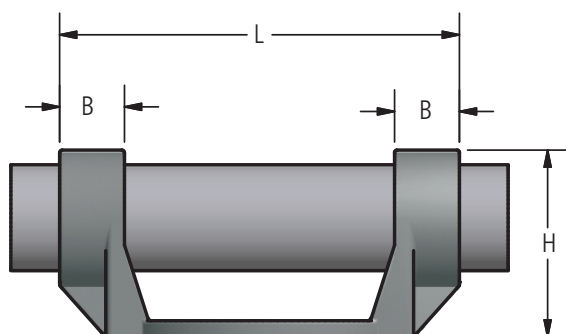

Ordering Information

CATALOG NUMBER		SPS	BOLT CIRCLE	DIMENSIONS IN INCHES					
STANDARD	WITH CHATTER SPRING			A	B	F	H	L	W
WPS100-3-AA	WPS100-3-CH-AA	1	3	2	1	4 1/4	2 31/32	6 1/4	1 29/32
WPS100-5-AA	WPS100-5-CH-AA	1	5	2 1/4	1	6 1/4	3 7/32	7 27/32	1 29/32
WPS125-3-AA	WPS125-3-CH-AA	1 1/4	3	2 1/4	1	4 1/4	3 3/8	6 1/4	2 9/32
WPS125-5-AA	WPS125-5-CH-AA	1 1/4	5	2 3/8	1	6 1/4	3 17/32	8 1/8	2 9/32
WPS150-3-AA	WPS150-3-CH-AA	1 1/2	3	2 1/2	1 1/4	4 1/4	3 3/4	6 3/4	2 9/32
WPS150-5-AA	WPS150-5-CH-AA	1 1/2	5	2 1/2	1 1/4	6 1/4	3 3/4	8 3/4	2 9/32
WPS200-3-AA	WPS200-3-CH-AA	2	3	2 3/4	1 1/2	4 1/4	4 1/4	7 1/4	3 5/32
WPS200-5-AA	WPS200-5-CH-AA	2	5	2 3/4	1 1/2	6 1/4	4 1/4	9 1/8	3 5/32
WPS250-3-AA	WPS250-3-CH-AA	2 1/2	3	3 1/8	1 1/2	4 1/4	5	7 1/4	3 13/16
WPS250-5-AA	WPS250-5-CH-AA	2 1/2	5	3 1/8	1 1/2	6 1/4	5	9 3/16	3 13/16
WPS250-7-AA	WPS250-7-CH-AA	2 1/2	7	3 1/8	1 1/2	8 1/2	5	12	3 13/16
WPS300-3-AA	WPS300-3-CH-AA	3	3	3 5/8	1 3/4	4 1/4	5 25/32	7 3/4	4 5/16
WPS300-5-AA	WPS300-5-CH-AA	3	5	3 5/8	1 3/4	6 1/4	5 25/32	9 3/4	4 5/16
WPS350-3-AA	WPS350-3-CH-AA	3 1/2	3	4	1 3/4	4 1/4	6 1/2	7 3/4	5
WPS350-5-AA	WPS350-5-CH-AA	3 1/2	5	4	1 3/4	6 1/4	6 1/2	9 3/4	5
WPS400-3-AA	WPS400-3-CH-AA	4	3	4 1/2	2	4 1/4	7 1/4	8 1/8	5 15/32
WPS400-5-AA	WPS400-5-CH-AA	4	5	4 1/2	2	6 1/4	7 1/4	10 1/4	5 15/32
WPS400-7-AA	WPS400-7-CH-AA	4	7	4 1/2	2	8 1/2	7 1/4	12 1/2	5 15/32
WPS450-3-AA	WPS450-3-CH-AA	4 1/2	3	4 3/4	2	4 1/4	7 1/4	8 1/4	5 31/32
WPS450-5-AA	WPS450-5-CH-AA	4 1/2	5	4 3/4	2	6 1/4	7 1/4	10 1/4	5 31/32
WPS450-7-AA	WPS450-7-CH-AA	4 1/2	7	4 3/4	2	8 1/2	7 1/4	12 1/2	5 15/32
WPS500-3-AA	WPS500-3-CH-AA	5	3	5	2 1/4	4 1/4	8 9/16	8 7/8	6 5/8
WPS500-5-AA	WPS500-5-CH-AA	5	5	5	2 1/4	6 1/4	8 9/16	10 7/8	6 5/8
WPS500-7-AA	WPS500-7-CH-AA	5	7	5	2 1/4	8 1/2	8 9/16	13 1/8	6 5/8
WPS600-3-AA	WPS600-3-CH-AA	6	3	5 1/2	2 1/4	4 1/4	9 23/32	8 7/8	7 7/8
WPS600-5-AA	WPS600-5-CH-AA	6	5	5 1/2	2 1/4	6 1/4	9 23/32	10 7/8	7 7/8
WPS600-7-AA	WPS600-7-CH-AA	6	7	5 1/2	2 1/4	8 1/2	9 23/32	13 1/8	7 7/8

DOSSERT® TYPE WPSO-AA

Aluminum Welded Bus Support

Open saddle horizontal type support for pipe to insulator. Rigid applications only. Pipe lays into support and is welded in the field.

Material




Aluminum Alloy

Hardware

Galvanized steel base mounting hardware.

Note

- For base mounting dimensions and hardware see page 3 in the general catalog index.

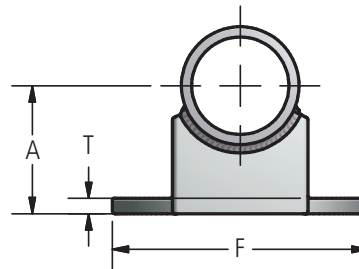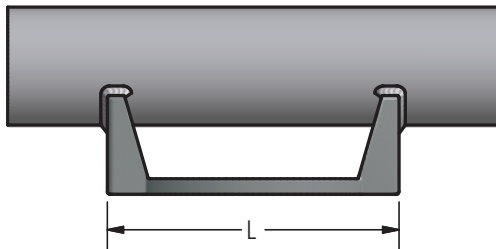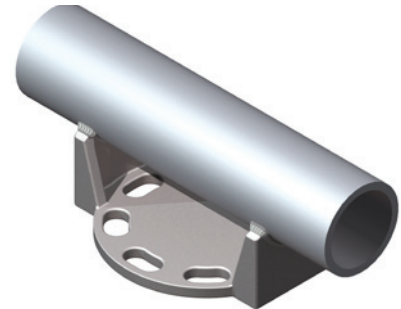

Ordering Information

CATALOG NUMBER	SPS	BOLT CIRCLE	DIMENSIONS IN INCHES			
			A	F	L	T
WPS075-3-AA	3/4	3	2	4 1/4	4 3/4	3/8
WPS075-5-AA	3/4	5	2 1/4	6 1/4	6 7/8	3/8
WPS0100-3-AA	1	3	2	4 1/4	4 3/4	3/8
WPS0100-5-AA	1	5	2 1/4	6 1/4	6 7/8	3/8
WPS0125-3-AA	1 1/4	3	2 1/4	4 1/4	4 7/8	3/8
WPS0125-5-AA	1 1/4	5	2 3/8	6 1/4	7	3/8
WPS0150-3-AA	1 1/2	3	2 1/2	4 1/4	4 7/8	3/8
WPS0150-5-AA	1 1/2	5	2 1/2	6 1/4	7	3/8
WPS0200-3-AA	2	3	2 3/4	4 1/4	5	3/8
WPS0200-5-AA	2	5	2 3/4	6 1/4	7 1/8	3/8
WPS0250-3-AA	2 1/2	3	3 1/8	4 1/4	5	3/8
WPS0250-5-AA	2 1/2	5	3 1/8	6 1/4	7 1/8	3/8
WPS0300-3-AA	3	3	3 5/8	4 1/4	5 1/8	3/8
WPS0300-5-AA	3	5	3 5/8	6 1/4	7 1/4	3/8
WPS0350-3-AA	3 1/2	3	4	4 1/4	5 1/8	1/2
WPS0350-5-AA	3 1/2	5	4	6 1/4	7 1/4	1/2
WPS0400-3-AA	4	3	4 1/2	4 1/4	5 1/8	1/2
WPS0400-5-AA	4	5	4 1/2	6 1/4	7 1/4	1/2
WPS0500-3-AA	5	3	5	4 1/4	5 3/8	1/2
WPS0500-5-AA	5	5	5	6 1/4	7 1/2	1/2
WPS0600-3-AA	6	3	5 1/2	4 1/4	5 3/8	1/2
WPS0600-5-AA	6	5	5 1/2	6 1/4	7 1/2	1/2
WPS0400-7-AA	4	7	4 1/4	8 5/8	9 5/8	1/2
WPS0500-7-AA	5	7	5	8 5/8	9 5/8	1/2
WPS0600-7-AA	6	7	5 1/2	8 5/8	9 5/8	1/2





DOSSERT® TYPE WPSSL-AA Welded Slide Bus Support

Material


Aluminum Alloy

Hardware


Galvanized steel hardware supplied for base mounting.

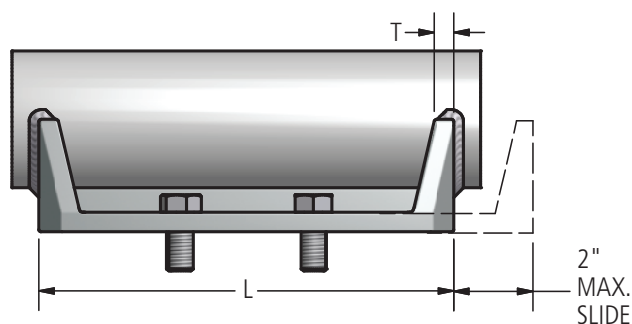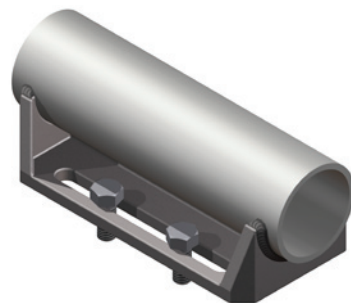

SLIDE BUS SUPPORT
ASSEMBLY 1



FIXED BUS SUPPORT
ASSEMBLY 2

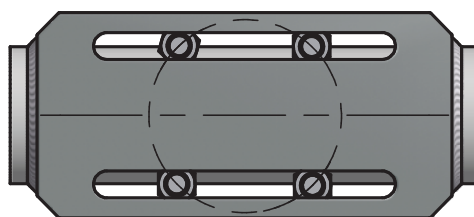

Ordering Information

CATALOG NUMBER		SPS	BOLT CIRCLE					
SLIP FIT	RIGID FIT			H	L	T	W	BOLT SIZE
WPSSL100-3-AA	WPSSL100-3-R-AA	1	3	2	8 1/2	1/2	3 1/4	1/2
WPSSL100-5-AA	WPSSL100-5-R-AA	1	5	2-1/4	10 1/2	1/2	5 3/8	5/8
WPSSL125-3-AA	WPSSL125-3-R-AA	1-1/4	3	2-1/4	8 1/2	1/2	3 1/4	1/2
WPSSL125-5-AA	WPSSL125-5-R-AA	1-1/4	5	2-3/8	10 1/2	1/2	5 3/8	5/8
WPSSL150-3-AA	WPSSL150-3-R-AA	1-1/2	3	2-1/2	8 1/2	1/2	3 1/4	1/2
WPSSL150-5-AA	WPSSL150-5-R-AA	1-1/2	5	2-1/2	10 1/2	1/2	5 3/8	5/8
WPSSL200-3-AA	WPSSL200-3-R-AA	2	3	2-3/4	8 1/2	1/2	3 1/4	1/2
WPSSL200-5-AA	WPSSL200-5-R-AA	2	5	2-3/4	10 1/2	1/2	5 3/8	5/8
WPSSL250-3-AA	WPSSL250-3-R-AA	2-1/2	3	3-1/8	8 1/2	1/2	3 1/4	1/2
WPSSL250-5-AA	WPSSL250-5-R-AA	2-1/2	5	3-1/8	10 1/2	1/2	5 3/8	5/8
WPSSL300-3-AA	WPSSL300-3-R-AA	3	3	3-5/8	8 1/2	1/2	3 3/4	1/2
WPSSL300-5-AA	WPSSL300-5-R-AA	3	5	3-5/8	10 1/2	5/8	5 1/2	5/8
WPSSL350-3-AA	WPSSL350-3-R-AA	3-1/2	3	4	8 1/2	1/2	4 1/4	1/2
WPSSL350-5-AA	WPSSL350-5-R-AA	3-1/2	5	4	10 1/2	5/8	5 1/2	5/8
WPSSL400-3-AA	WPSSL400-3-R-AA	4	3	4-1/2	8 1/2	1/2	4 1/2	1/2
WPSSL400-5-AA	WPSSL400-5-R-AA	4	5	4-1/2	10 1/2	5/8	5 1/2	5/8
WPSSL450-3-AA	WPSSL450-3-R-AA	4-1/2	3	4-3/4	8 1/2	1/2	4 1/2	1/2
WPSSL450-5-AA	WPSSL450-5-R-AA	4-1/2	5	2-3/4	10 1/2	5/8	5 1/2	5/8
WPSSL500-3-AA	WPSSL500-3-R-AA	5	3	5	8 1/2	1/2	5	1/2
WPSSL500-5-AA	WPSSL500-5-R-AA	5	5	5	10 1/2	5/8	5 1/2	5/8
WPSSL600-3-AA	WPSSL600-3-R-AA	6	3	5-1/2	8 1/2	1/2	5 3/4	1/2
WPSSL600-5-AA	WPSSL600-5-R-AA	6	5	5-1/2	10 1/2	5/8	6	5/8

DOSSERT® TYPE WPSV-AA

Vertical Welded Bus Support for Tubing or Pipe

Material

Aluminum Alloy

Hardware

Galvanized steel base mounting hardware.




FIG. 1

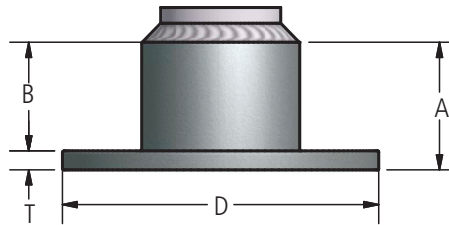


FIG. 2

Ordering Information

CATALOG NUMBER	SPS	BOLT CIRCLE	FIGURE NUMBER	DIMENSIONS IN INCHES			
				A	B	D	T
WPSV125-5-AA	1-1/4	5	2	1-3/8	3/4	6-1/4	3/8
WPSV150-3-AA	1-1/2	3	1	3	1-1/4	4-1/4	3/8
WPSV150-5-AA	1-1/2	5	2	1-7/8	1-1/4	6-1/4	3/8
WPSV200-3-AA	2	3	1	3-5/8	1-3/4	4-1/4	3/8
WPSV200-5-AA	2	5	2	2-1/8	1-3/4	6-1/4	3/8
WPSV250-3-AA	2-1/2	3	1	3-3/4	1-3/4	4-1/4	3/8
WPSV250-5-AA	2-1/2	5	2	2-1/8	1-3/4	6-1/4	3/8
WPSV300-7-AA	3	7	2	2-1/8	1-3/4	4-1/4	3/8
WPSV300-3-AA	3	3	1	3-7/8	1-3/4	6-1/4	3/8
WPSV300-5-AA	3	5	1	3-7/8	1-3/4	4-1/4	3/8
WPSV350-3-AA	3-1/2	3	1	3-7/8	1-3/4	6-1/4	3/8
WPSV350-5-AA	3-1/2	5	1	3-7/8	1-3/4	4-1/4	3/8
WPSV400-3-AA	4	3	1	3-7/8	1-3/4	6-1/4	3/8
WPSV400-5-AA	4	5	1	3-7/8	1-3/4	4-1/4	3/8
WPSV500-3-AA	5	3	1	2-3/4	2-3/4	6-1/4	7/16
WPSV500-5-AA	5	5	1	2-3/4	2-3/4	4-1/4	7/16
WPSV600-3-AA	6	3	1	3	3	6-1/4	7/16
WPSV600-5-AA	6	5	1	3	3	4-1/4	7/16

DOSSERT® TYPE WXBC-AA

Welded Expansion Bus Support can be used as a bus support for a continuous pipe or as a coupler for two pieces.

Material

Aluminum Alloy


Hardware

Galvanized steel hardware supplied for base mounting.



Note

- For Chatter Spring, add "-CH" to the part number.

EX: WXBC400-5-CH-AA

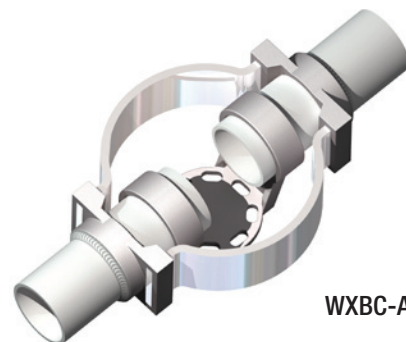

WXBC-AA

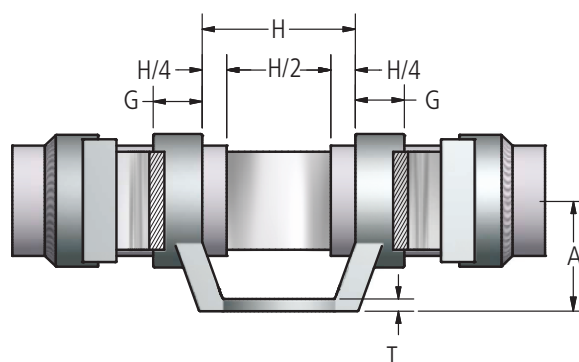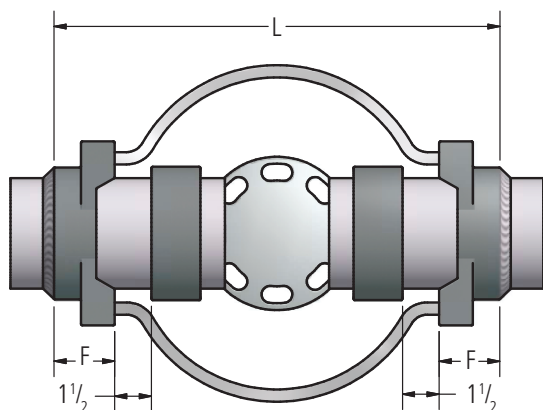

Ordering Information

CATALOG NUMBER		SPS	BOLT CIRCLE	DIMENSIONS IN INCHES					
SCHEDULE 40	SCHEDULE 80			A	T	F	G	H	L
WXBC100-3-AA	WXBC100E-3-AA	1	3	2	3/8	1 1/2	1 1/4	4 1/2	13
WXBC125-3-AA	WXBC125E-3-AA	1 1/4	3	2 1/4	3/8	1 1/2	1 1/4	4 1/2	13
WXBC125-5-AA	WXBC125E-5-AA	1 1/4	5	2 3/8	3/8	1 1/2	1 1/4	6 1/4	14 3/4
WXBC150-3-AA	WXBC150E-3-AA	1 1/2	3	2 1/2	3/8	1 3/4	1 1/4	4 1/2	13 1/2
WXBC150-5-AA	WXBC150E-5-AA	1 1/2	5	2 1/2	3/8	1 3/4	1 1/4	6 1/4	15 1/4
WXBC200-3-AA	WXBC200E-3-AA	2	3	2 3/4	3/8	2 3/16	1 1/4	4 1/2	14 3/8
WXBC200-5-AA	WXBC200E-5-AA	2	5	2 3/4	3/8	2 3/16	1 1/4	6 1/4	16 1/8
WXBC200-7-AA	WXBC200E-7-AA	2	7	2 3/4	3/8	2 3/16	1 1/4	8 3/4	18 3/4
WXBC250-3-AA	WXBC250E-3-AA	2 1/2	3	3 1/8	3/8	2 3/16	1 1/4	4 1/2	14 3/8
WXBC250-5-AA	WXBC250E-5-AA	2 1/2	5	3 1/8	3/8	2 3/16	1 1/4	6 1/4	16 1/8
WXBC250-7-AA	WXBC250E-7-AA	2 1/2	7	3 1/8	3/8	2 3/16	1 1/4	8 3/4	18 3/4
WXBC300-3-AA	WXBC300E-3-AA	3	3	3 5/8	7/16	2 5/16	1 5/8	4 1/2	14 5/8
WXBC300-5-AA	WXBC300E-5-AA	3	5	3 5/8	1/2	2 5/16	1 5/8	6 1/4	16 3/8
WXBC300-7-AA	WXBC300E-7-AA	3	7	3 5/8	7/16	2 5/16	1 5/8	8 3/4	19 3/4
WXBC350-3-AA	WXBC350E-3-AA	3 1/2	3	4	1/2	2 5/16	1 1/4	4 1/2	14 5/8
WXBC350-5-AA	WXBC350E-5-AA	3 1/2	5	4	1/2	2 1/4	1 1/4	7 1/8	17 1/8
WXBC350-7-AA	WXBC350E-7-AA	3 1/2	7	4	1/2	2 1/4	1 1/4	8 3/4	19 3/4
WXBC400-3-AA	WXBC400E-3-AA	4	3	4 1/2	1/2	2 1/2	2	4 1/2	15 1/2
WXBC400-5-AA	WXBC400E-5-AA	4	5	4 1/2	1/2	2 1/2	2	6 1/4	17 1/4
WXBC400-7-AA	WXBC400E-7-AA	4	7	4 1/2	1/2	2 1/2	2	8 1/2	20 1/2
WXBC500-3-AA	WXBC500E-3-AA	5	3	5	1/2	2 1/2	2	4 1/2	15 1/2
WXBC500-5-AA	WXBC500E-5-AA	5	5	5	1/2	2 1/2	2	6 1/4	18 1/4
WXBC500-7-AA	WXBC500E-7-AA	5	7	5	5/8	2 1/2	2	8 3/4	19 3/4
WXBC600-3-AA	WXBC600E-3-AA	6	3	5 1/2	1/2	2 1/2	2	4 1/2	15 1/2
WXBC600-5-AA	WXBC600E-5-AA	6	5	5 1/2	1/2	2 1/2	2	6 1/4	19 3/4
WXBC600-7-AA	WXBC600E-7-AA	6	7	5 1/2	5/8	2 1/2	2	8 3/4	22 3/4

DOSSERT® TYPE 14700

Straight Adapter Tube To Cable

Adapter is designed to make inline connection between pipe and stranded cable. Cable is "puddle" welded to connector; connector is then welded to tube. Not recommended for use on ACSR conductors due to difficulty welding steel core.

Material

Aluminum Alloy

Notes



1. Table 1 shows physical characteristics of each catalog series.
2. Table 2 shows specific catalog numbers.

Ordering Instructions

1. Determine Catalog Number

Determine the catalog number from Table 2 based on the bus conductor and the diameter of the stranded conductor being used.

Ex: A straight adapter for a run conductor of 3" Sch 40 and a stranded conductor diameter of 0.926" the complete catalog number is : 14708.100

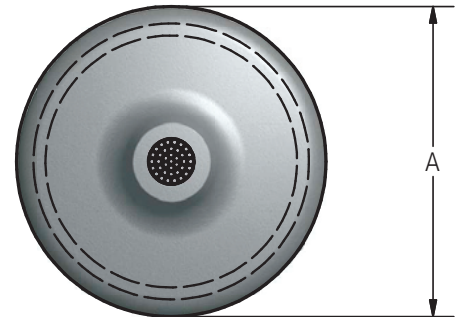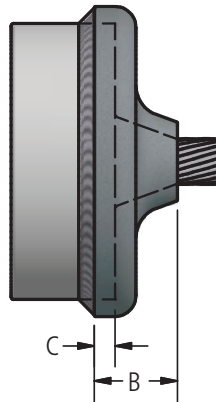

DOSSERT® TYPE 14700

Straight Adapter Tube To Cable

TABLE 1 (PHYSICAL CHARACTERISTICS BY SERIES)

CATALOG NUMBER	SPS	DIMENSIONS IN INCHES			NOMINAL WEIGHT
		A	B	C	LBS
14702	3/4	1.50	1.19	0.19	0.12
14703	1	1.84	1.44	0.19	0.19
14704	1 1/4	2.19	2.00	0.25	0.50
14705	1 1/2	2.56	2.44	0.44	0.56
14706	2	2.97	2.44	0.44	0.56
14707	2 1/2	3.53	2.00	0.44	0.81
14708	3	4.22	2.00	0.44	1.20
14709	3 1/2	4.66	2.00	0.44	1.30
14710	4	5.22	2.00	0.50	1.50
14712	5	6.38	2.00	0.50	1.90
14713	6	7.44	2.00	0.50	2.60

Ordering Information

TABLE 2

STANDARD CONDUCTOR DIAMETER RANGE INCH	CATALOG NUMBERS										
	RUN CONDUCTORS										
	3/4	1	1 1/4	1 1/2	2	2 1/2	3	3 1/2	4	5	6
.366-.394	14702.4	14703.4	14704.4	14705.4	14706.4	14707.4	14708.4	14709.4	14710.4	14712.4	14713.4
.395-.428	14702.44	14703.44	14704.44	14705.44	14706.44	14707.44	14708.44	14709.44	14710.44	14712.44	14713.44
.429-.459	14702.47	14703.47	14704.47	14705.47	14706.47	14707.47	14708.47	14709.47	14710.47	14712.47	14713.47
.460-.49	14702.5	14703.5	14704.5	14705.5	14706.5	14707.5	14708.5	14709.5	14710.5	14712.5	14713.5
.491-.521	14702.53	14703.53	14704.53	14705.53	14706.53	14707.53	14708.53	14709.53	14710.53	14712.53	14713.53
.522-.552	14702.56	14703.56	14704.56	14705.56	14706.56	14707.56	14708.56	14709.56	14710.56	14712.56	14713.56
.553-.599	14702.61	14703.61	14704.61	14705.61	14706.61	14707.61	14708.61	14709.61	14710.61	14712.61	14713.61
.600-.644	14702.66	14703.66	14704.66	14705.66	14706.66	14707.66	14708.66	14709.66	14710.66	14712.66	14713.66
.645-.691	-	14703.7	14704.7	14705.7	14706.7	14707.7	14708.7	14709.7	14710.7	14712.7	14713.7
.692-.738	-	14703.75	14704.75	14705.75	14706.75	14707.75	14708.75	14709.75	14710.75	14712.75	14713.75
.739-.800	-	14703.81	14704.81	14705.81	14706.81	14707.81	14708.81	14709.81	14710.81	14712.81	14713.81
.801-.863	-	14703.88	14704.88	14705.88	14706.88	14707.88	14708.88	14709.88	14710.88	14712.88	14713.88
.864-.925	-	-	14704.94	14705.94	14706.94	14707.94	14708.94	14709.94	14710.94	14712.94	14713.94
.926-.985	-	-	14704.1	14705.1	14706.1	14707.1	14708.1	14709.1	14710.1	14712.1	14713.1
.986-1.047	-	-	14704.106	14705.106	14706.106	14707.106	14708.106	14709.106	14710.106	14712.106	14713.106
1.048-1.110	-	-	14704.112	14705.112	14706.112	14707.112	14708.112	14709.112	14710.112	14712.112	14713.112
1.111-1.173	-	-	14704.119	14705.119	14706.119	14707.119	14708.119	14709.119	14710.119	14712.119	14713.119
1.174-1.235	-	-	14704.125	14705.125	14706.125	14707.125	14708.125	14709.125	14710.125	14712.125	14713.125
1.236-1.297	-	-	14704.131	14705.131	14706.131	14707.131	14708.131	14709.131	14710.131	14712.131	14713.131
1.298-1.360	-	-	14704.138	14705.138	14706.138	14707.138	14708.138	14709.138	14710.138	14712.138	14713.138
1.361-1.423	-	-	-	14705.144	14706.144	14707.144	14708.144	14709.144	14710.144	14712.144	14713.144
1.424-1.485	-	-	-	14705.15	14706.15	14707.15	14708.15	14709.15	14710.15	14712.15	14713.15
1.486-1.542	-	-	-	14705.156	14706.156	14707.156	14708.156	14709.156	14710.156	14712.156	14713.156


DOSSERT® TYPE 15100

Reducer Connector For Pipe



Reducer connector is designed to connect unequal pipe sizes with minimum amount of trouble. Connector is welded on outside of pipe allowing use on both schedule 40 and schedule 80 pipe.

Material

Aluminum Alloy

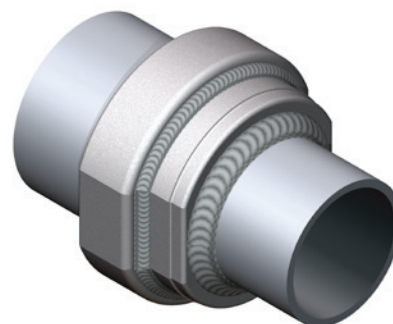

230 kV Aluminum
Welded Couplers

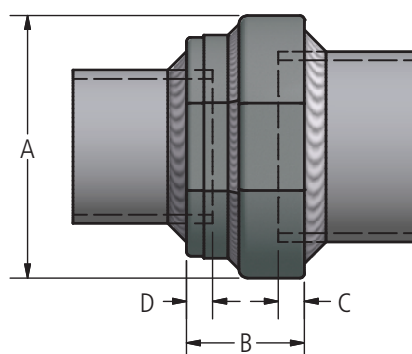

Ordering Information

CATALOG NUMBER	CONDUCTOR SIZE SCH40 & SCH80		DIMENSIONS IN INCHES				NOMINAL WEIGHT LBS
	RUN	BRANCH	A	B	C	D	
15103-2	1	3/4	1.88	0.84	0.15	0.19	0.20
15104-2	1 1/4	3/4	2.19	1.00	0.25	0.19	0.25
15104-3	1 1/4	1	2.19	1.09	0.25	0.19	0.29
15105-2	1 1/2	3/4	2.44	1.00	0.38	0.19	0.27
15105-3	1 1/2	1	2.44	1.09	0.38	0.19	0.33
15105-4	1 1/2	1 1/4	2.44	1.25	0.38	0.25	0.37
15106-2	2	3/4	2.94	1.12	0.44	0.19	0.39
15106-3	2	1	2.94	1.22	0.44	0.19	0.45
15106-4	2	1 1/4	2.94	1.38	0.44	0.25	0.49
15106-5	2	1 1/2	2.94	1.38	0.44	0.38	0.57
15107-2	2 1/2	3/4	3.50	1.19	0.44	0.19	0.52
15107-3	2 1/2	1	3.50	1.28	0.44	0.19	0.58
15107-4	2 1/2	1 1/4	3.50	1.44	0.44	0.25	0.62
15107-5	2 1/2	1 1/2	3.50	1.44	0.44	0.38	0.70
15107-6	2 1/2	2	3.50	1.56	0.44	0.44	0.82
15108-2	3	3/4	4.12	1.31	0.44	0.19	0.83
15108-3	3	1	4.12	1.41	0.44	0.19	0.89
15108-4	3	1 1/4	4.12	1.56	0.44	0.25	0.93
15108-5	3	1 1/2	4.12	1.56	0.44	0.38	1.00
15108-6	3	2	4.12	1.69	0.44	0.44	1.10
15108-7	3	2 1/2	4.12	1.75	0.44	0.44	1.30
15109-2	3.5	3/4	4.69	1.31	0.44	0.19	1.1
15109-3	3.5	1	4.69	1.41	0.44	0.19	1.1
15109-4	3.5	1 1/4	4.69	1.56	0.44	0.25	1.2
15109-5	3.5	1 1/2	4.69	1.56	0.44	0.38	1.3
15109-6	3.5	2	4.69	1.69	0.44	0.44	1.4
15109-7	3.5	2 1/2	4.69	1.75	0.44	0.44	1.5
15109-8	3.5	3	4.69	1.88	0.44	0.44	1.9

DOSSERT®

TYPE 15100

Reducer Connector For Pipe

Ordering Information

CATALOG NUMBER	CONDUCTOR SIZE SCH40 & SCH80		DIMENSIONS IN INCHES				NOMINAL WEIGHT LBS.
	RUN	BRANCH					
15110-2	4	3/4	5.19	1.38	0.5	0.19	1.3
15110-3	4	1	5.19	1.47	0.5	0.19	1.3
15110-4	4	1 1/4	5.19	1.62	0.5	0.25	1.4
15110-5	4	1 1/2	5.19	1.62	0.5	0.44	1.5
15110-6	4	2	5.19	1.75	0.5	0.44	1.6
15110-7	4	2 1/2	5.19	1.81	0.5	0.44	1.7
15110-8	4	3	5.19	1.94	0.5	0.44	2.1
15110-9	4	3 1/2	5.19	1.94	0.5	0.44	2.3
15112-2	5	3/4	6.25	1.38	0.5	0.19	1.8
15112-3	5	1	6.25	1.47	0.5	0.19	1.8
15112-4	5	1 1/4	6.25	1.62	0.5	0.25	1.9
15112-5	5	1 1/2	6.25	1.62	0.5	0.38	2
15112-6	5	2	6.25	1.75	0.5	0.44	2.1
15112-7	5	2 1/2	6.25	1.81	0.5	0.44	2.2
15112-8	5	3	6.25	1.94	0.5	0.44	2.6
15112-9	5	3 1/2	6.25	1.94	0.5	0.44	2.8
15112-10	5	4	6.25	2	0.5	0.5	3.1
15113-2	6	7/8	7.38	1.38	0.5	0.19	2.4
15113-3	6	1	7.38	1.47	0.5	0.19	2.4
15113-4	6	1 1/4	7.38	1.62	0.5	0.25	2.5
15113-5	6	1 1/2	7.38	1.62	0.5	0.38	2.6
15113-6	6	2	7.38	1.75	0.5	0.44	2.7
15113-7	6	2 1/2	7.38	1.81	0.5	0.44	2.8
15113-8	6	3	7.38	1.94	0.5	0.44	3.2
15113-9	6	3 1/2	7.38	1.94	0.5	0.44	3.4
15113-10	6	4	7.38	2	0.5	0.5	3.7
15113-12	6	5	7.38	2	0.5	0.5	4.3

DOSSERT® TYPE WS-AA, WS-E-AA

Aluminum Welded Coupler




A shorter version of the Type WWC coupler, also made to special lengths.

Material

Aluminum Tubing

Notes

- To order special lengths, add desired (L) dimension to the catalog number.
Example: WS500-15-AA for 15 inch coupler.

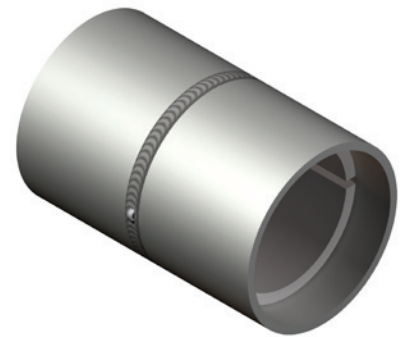

Ordering Information

CATALOG NUMBER		NOMINAL PIPE SIZE	DIMENSIONS IN INCHES	
SCH 40	SCH 80		B	L
WS100-AA	WS100E-AA	1	1-3/4	3-1/2
WS125-AA	WS125E-AA	1-1/4	2	4
WS150-AA	WS150E-AA	1-1/2	2	4
WS200-AA	WS200E-AA	2	2	4
WS250-AA	WS250E-AA	2-1/2	3	6
WS300-AA	WS300E-AA	3	3	6
WS350-AA	WS350E-AA	3-1/2	3	6
WS400-AA	WS400E-AA	4	3	6
WS450-AA	WS450E-AA	4-1/2	3	6
WS500-AA	WS500E-AA	5	3	6
WS600-AA	WS600E-AA	6	3	6
WS800-AA	WS800E-AA	8	3	6
WS1000-AA	WS1000E-AA	10	3	6

DOSSERT® TYPE WSXL-SI-AA

Aluminum To Bronze Angular Expansion Connector

Expansion connector is designed for expansion and contraction in long bus runs. Stud connector can be adjusted to suit customers application.

Material

Aluminum Alloy



Hardware

Stainless steel nuts, bolts and belleville washers on aluminum bus.

Notes

For a custom thread count change the number after the "T" in the catalog number. Ex: WSXL200C-350-SI-T0-AA

Additional sizes are available.

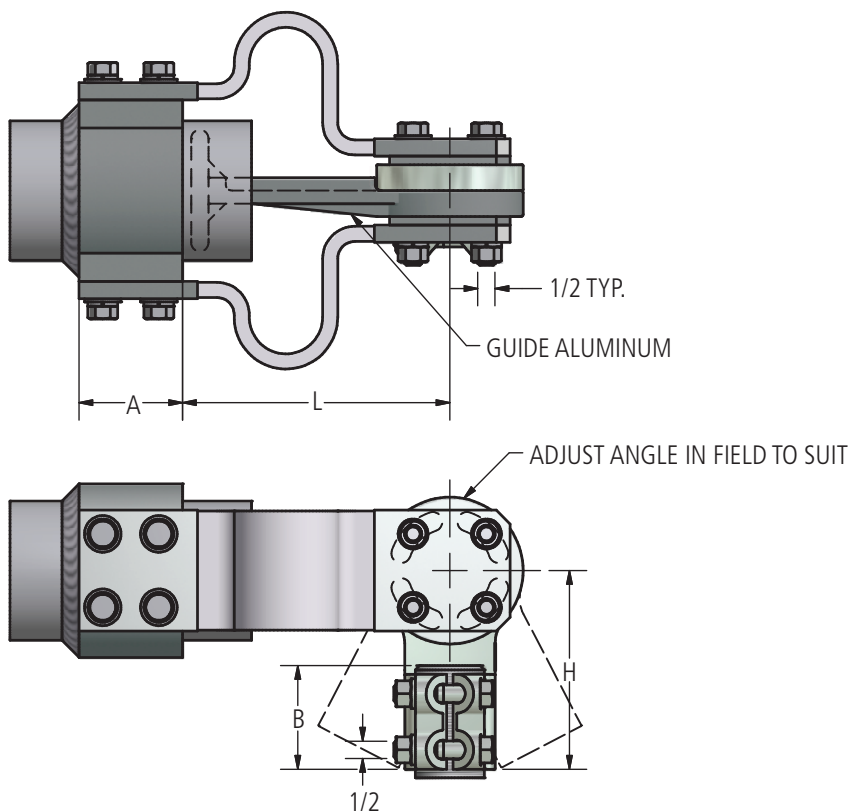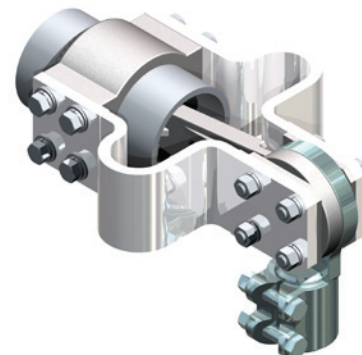

Ordering Information

STUD (S)	SPS	CATALOG NUMBER	DIMENSIONS IN INCHES			
			A	B	H	L
2"-12	2	WSXL200C-350-SI-T12-AA	3	2 3/4	5 3/4	7 3/4
2"-12	4E*	WSXL200C-400E-SI-T12-AA	3	2 3/4	5 3/4	9 5/16
3"-12	4E*	WSXL300C-400E-SI-T12-AA	3	3	6 5/8	9 5/16

* Suffix E indicates SCH 80.

DOSSERT® TYPE WWC-AA, WWC-E-AA

Aluminum Welded Coupler

Coupler is designed to make connections with high mechanical strength and high electrical conductivity.

Material



Aluminum Tubing

For pipe sizes greater than 6 inch or special I.D. and O.D. applications, please contact AFL.

A shorter version of this coupler is Type WS.



230 kV Aluminum
Welded Couplers

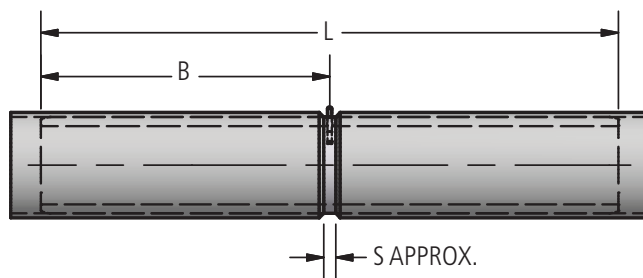

Ordering Information

CATALOG NUMBER		SPS	DIMENSIONS IN INCHES		
SCHEDULE 40	SCHEDULE 80		B	L	S
WWC75-AA	WWC75E-AA	3/4	2-1/4	4-1/2	1/4
WWC100-AA	WWC100E-AA	1	3	6	1/4
WWC125-AA	WWC125E-AA	1-1/4	3-3/4	7-1/2	3/8
WWC150-AA	WWC150E-AA	1-1/2	4-1/2	9	3/8
WWC200-AA	WWC200E-AA	2	6	12	3/8
WWC250-AA	WWC250E-AA	2-1/2	7-1/2	15	1/2
WWC300-AA	WWC300E-AA	3	9	18	1/2
WWC350-AA	WWC350E-AA	3-1/2	10-1/2	21	1/2
WWC400-AA	WWC400E-AA	4	12	24	1/2
WWC450-AA	WWC450E-AA	4-1/2	12	24	1/2
WWC500-AA	WWC500E-AA	5	12	24	1/2
WWC600-AA	WWC600E-AA	6	12	24	5/8
WWC600R38-AA	-	6 OD 3/8 WALL	19	38	5/8
WWC800-AA	WWC800E-AA	8	12	24	5/8
WWC800R38-AA	-	8 OD 3/8 WALL	19	38	5/8
WWC800R-AA	-	8 OD 1/2 WALL	12	24	5/8


DOSSERT[®] TYPE WWCR-AA, WWCR-E-AA

Reducing Coupler

A reducing coupler for joining aluminum pipe of different diameters. Provides maximum structural reinforcement at the joint as well as a neat and corona free installation. Pipe is easily aligned and held during welding.

Material

Aluminum-Silicon Alloy

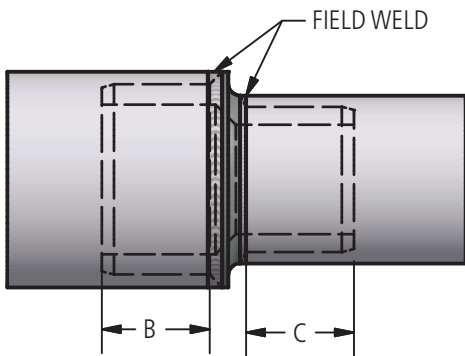

Ordering Information



CATALOG NUMBER		SPS		DIMENSIONS IN INCHES	
SCHEDULE 40	SCHEDULE 80	RUN	TAP	B	C
WWCR125-100-AA	WWCR125E-100-AA	1-1/4	1	1	3/4
WWCR150-100-AA	WWCR150E-100-AA	1-1/2	1	1	3/4
WWCR150-125-AA	WWCR150E-125-AA	1-1/2	1-1/4	1	1
WWCR200-100-AA	WWCR200E-100-AA	2	1	1-1/4	3/4
WWCR200-125-AA	WWCR200E-125-AA	2	1-1/4	1-1/4	1
WWCR200-150-AA	WWCR200E-150-AA	2	1-1/2	1-1/4	1
WWCR250-125-AA	WWCR250E-125-AA	2-1/2	1-1/4	1-1/2	1
WWCR250-150-AA	WWCR250E-150-AA	2-1/2	1-1/2	1-1/2	1
WWCR250-200-AA	WWCR250E-200-AA	2-1/2	2	1-1/2	1-1/4
WWCR300-100-AA	WWCR300E-100-AA	3	1	1-3/4	3/4
WWCR300-150-AA	WWCR300E-150-AA	3	1-1/2	1-3/4	1
WWCR300-200-AA	WWCR300E-200-AA	3	2	1-3/4	1-1/4
WWCR300-250-AA	WWCR300E-250-AA	3	2-1/2	1-3/4	1-1/2
WWCR350-200-AA	WWCR350E-200-AA	3-1/2	2	1-3/4	1-1/4
WWCR400-200-AA	WWCR400E-200-AA	4	2	2-1/4	1-1/4
WWCR400-250-AA	WWCR400E-250-AA	4	2-1/2	2-1/4	1-1/2
WWCR400-300-AA	WWCR400E-300-AA	4	3	2-1/4	1-3/4
WWCR450-400-AA	WWCR450E-400-AA	4-1/2	4	2-1/2	2-1/4
WWCR500-250-AA	WWCR500E-250-AA	5	2-1/2	2-3/4	1-1/2
WWCR500-300-AA	WWCR500E-300-AA	5	3	2-3/4	1-3/4
WWCR500-400-AA	WWCR500E-400-AA	5	4	2-3/4	2-1/4
WWCR500-350-AA	WWCR500E-350-AA	5	3-1/2	2-3/4	2
WWCR600-300-AA	WWCR600E-300-AA	6	3	3	1-3/4
WWCR600-400-AA	WWCR600E-400-AA	6	4	3	2-1/4
WWCR600-500-AA	WWCR600E-500-AA	6	5	3	2-3/4
WWCR800-400-AA	WWCR800E-400-AA	8	4	4	2-1/4
WWCR800-500-AA	WWCR800E-500-AA	8	5	4	2-3/4
WWCR800-600-AA	WWCR800E-600-AA	8	6	4	3-1/4

DOSSERT® TYPE WWSC-AA Weldment Spherical Coupler

WWSC-AA is a variable angle coupler for aluminum pipe conductor.

Material

Aluminum Alloy

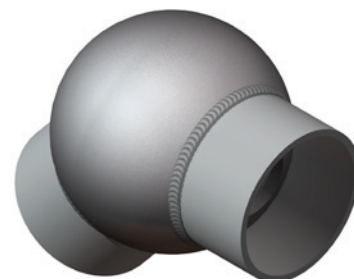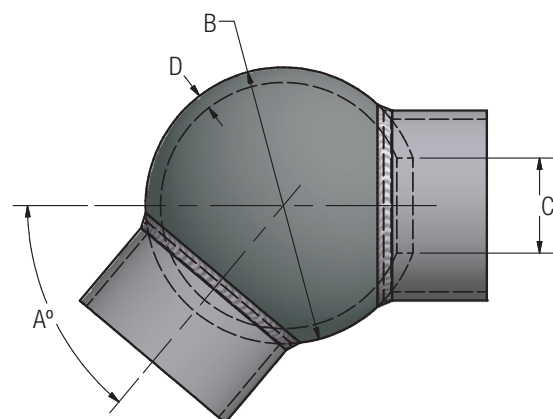

Ordering Information

CATALOG NUMBER	SPS	DIMENSIONS IN INCHES				MAX KV
		A° (MAX)	B	C	D	
WWSC500-AA	1 1/2	130	5	1 3/4	5/16	230
WWSC500-AA	2	115	5	1 3/4	5/16	230
WWSC500-AA	2 1/2	105	5	1 3/4	5/16	230
WWSC500-AA	3	90	5	1 3/4	5/16	230
WWSC500-AA	3 1/2	80	5	1 3/4	5/16	230
WWSC500-AA	4	50	5	1 3/4	5/16	230
WWSC800-AA	3 THROUGH 5	90	8	2 3/4	7/16	345
WWSC800-AA	6	60	8	2 3/4	7/16	345
WWSC800-AA	8 OD	40	8	2 3/4	7/16	345
WWSC1200-AA	3	140	12	2 3/4	3/8	500
WWSC1200-AA	3 1/2	135	12	2 3/4	3/8	500
WWSC1200-AA	4	130	12	2 3/4	3/8	500
WWSC1200-AA	5	120	12	2 3/4	3/8	500
WWSC1200-AA	6	100	12	2 3/4	3/8	500
WWSC1200-AA	8 OD	90	12	2 3/4	3/8	500

DOSSERT[®] TYPE XWWC-AA, XWWC-E-AA

Bus Expansion Coupler

Expansion coupler for aluminum pipe connections. Provided with alignment guide for field welds.

Material

Aluminum Alloy

Notes

- If alignment guide is not required, add "P" to the catalog number prefix.
EX: XWWCP100-AA.


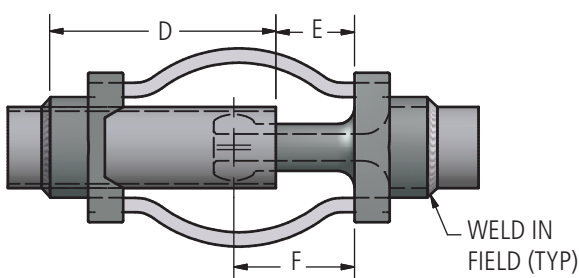
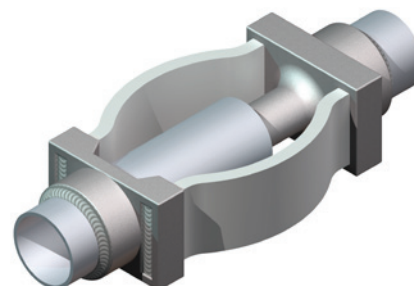


FIG. 1




FIG. 2

Ordering Information

CATALOG NUMBER		SPS	FIGURE NUMBER	DIMENSIONS IN INCHES					
SCH 40	SCH 80			D	E	F	H	L	W
XWWC100-AA	XWWC100E-AA	1	1	5 3/4	1 1/2	3 1/4	3	8 9/16	1 3/4
XWWC125-AA	XWWC125E-AA	1 1/4	1	6 3/4	1 1/2	3 1/4	3 1/4	9 1/2	2
XWWC150-AA	XWWC150E-AA	1 1/2	1	7 1/4	1 1/2	3 1/2	3 1/2	10 5/16	2 1/4
XWWC200-AA	XWWC200E-AA	2	1	7 7/16	2 1/8	4 3/4	3 3/4	11 3/4	3 13/16
XWWC250-AA	XWWC250E-AA	2 1/2	1	8 7/16	2 1/8	4 3/4	5 5/16	12 13/16	3 13/16
XWWC300-AA	XWWC300E-AA	3	1	9 5/16	2 1/8	4 3/4	6 3/16	13 3/4	3 13/16
XWWC350-AA	XWWC350E-AA	3 1/2	1	10	2 1/8	4 3/4	6 13/16	14 7/8	3 13/16
XWWC400-AA	XWWC400E-AA	4	2	10 7/16	2 1/8	4 3/4	7 1/8	15 13/16	7 1/8
XWWC500-AA	XWWC500E-AA	5	2	11 1/8	2 7/8	6 5/8	8 3/4	17 1/8	8 3/4
XWWC600-AA	XWWC600E-AA	6	2	11 1/8	2 7/8	6 5/8	9 9/16	18	9 9/16

DOSSERT® TYPE XWWCT-AA

Expansion Coupler


Expansion coupler is designed to compensate for expansion and contraction in long bus runs. An extruded pipe is provided to be field welded in place and provides alignment of bus.

Material


Aluminum Alloy

Notes

- For dimension "E", refer to drawing DOS-C-1808.

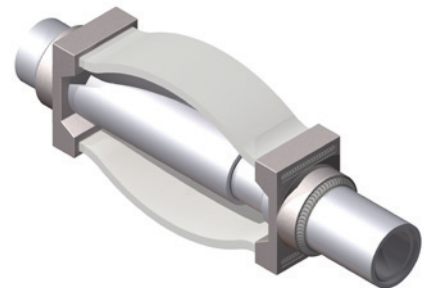

230 kV Aluminum
Welded Couplers

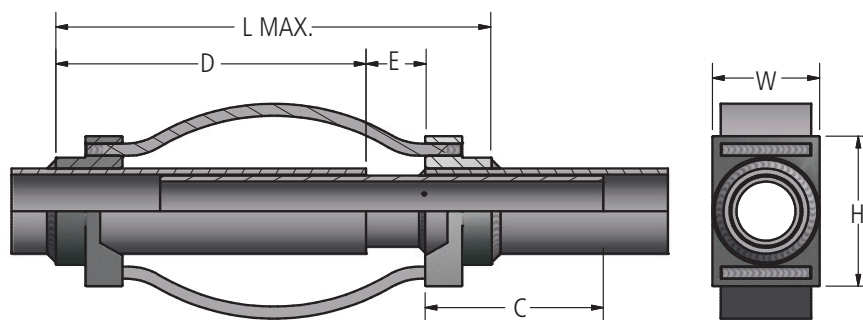

Ordering Information

CATALOG NUMBER		SPS / EHPS	DIMENSIONS IN INCHES				
SCH 40	SCH 80		C	D	H	L	W
XWWCT200-AA	XWWCT200E-AA	2	5 1/2	10 1/2	4 3/4	17 3/8	3 3/4
XWWCT250-AA	XWWCT250E-AA	2 1/2	6	10 1/2	5 1/16	17 1/2	3 5/8
XWWCT300-AA	XWWCT300E-AA	3	6 1/2	10 1/2	3 3/16	17 1/2	3 13/16
XWWCT350-AA	XWWCT350E-AA	3 1/2	7	10 1/2	6 7/8	17 1/2	3 11/16
XWWCT400-AA	XWWCT400E-AA	4	7 1/2	10 1/2	7 7/16	18	4 15/16
XWWCT500-AA	XWWCT500E-AA	5	8	10 1/2	9 1/8	18	6 1/16
XWWCT600-AA	XWWCT600E-AA	6	8	10 3/4	10	18	6 9/16

DOSSERT® TYPE 14400

Aluminum Welded, External Fit End Plug

Weld type end plug is designed for use on outside of pipe. Can be used on both Schedule 40 and Schedule 80 pipe. Used to minimize electrostatic losses and to prevent nesting of birds.



Material

Aluminum Alloy

Ordering Instructions

Step 1: Determine Catalog Number
Determine the catalog number based on bus conductor size.

Example: An end plug for 3" Schedule 40 bus conductor, the complete catalog number is: 14408.

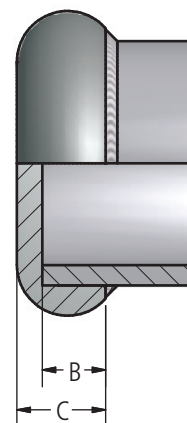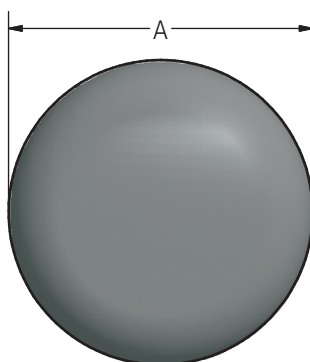

Ordering Information

CATALOG NUMBER	SPS	DIMENSIONS IN INCHES			NOMINAL WEIGHT LBS
		A	B	C	
14402	3/4	1.44	0.44	0.22	0.03
14403	1	1.81	0.53	0.28	0.06
14404	1-1/4	2.19	0.75	0.34	0.12
14405	1-1/2	2.38	0.78	0.38	0.13
14406	2	3.00	0.88	0.47	0.34
14407	2-1/2	3.69	1.12	0.59	0.44
14408	3	4.31	1.50	0.72	0.88
14409	3-1/2	4.97	1.62	0.81	1.40
14410	4	5.66	1.88	0.91	2.30
14412	5	6.72	2.22	1.12	3.50
14413	6	7.88	2.44	1.34	4.75

DOSSERT® TYPE WCI-AA, WCI-E-AA

Aluminum Welded, Internal Fit, Corona / End Bell



Internal fit corona or end bell for aluminum pipe or tube. Bell is inserted into pipe end and field welded.

Material

Aluminum Alloy



230 kV Aluminum
Welded End Bells

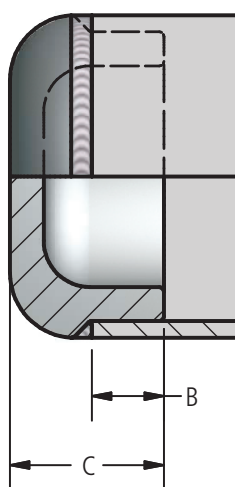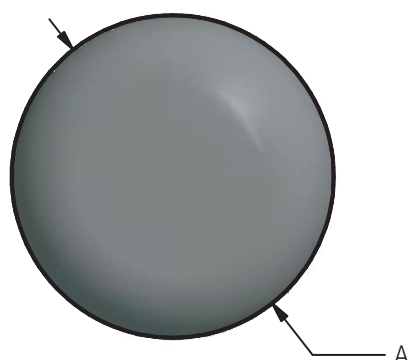

Ordering Information

CATALOG NUMBER		SPS	DIMENSIONS IN INCHES		
SCH 40	SCH 80		A	B	C
WCI75-AA	WCI75E-AA	3/4	1-1/16	7/16	7/8
WCI100-AA	WCI100E-AA	1	1-5/16	7/16	7/8
WCI125-AA	WCI125E-AA	1-1/4	1-21/32	1/2	1
WCI150-AA	WCI150E-AA	1-1/2	1-29/32	1/2	1-1/8
WCI200-AA	WCI200E-AA	2	2-3/8	1/2	1-1/8
WCI250-AA	WCI250E-AA	2-1/2	2-7/8	5/8	1-3/8
WCI300-AA	WCI300E-AA	3	3-1/2	3/4	1-1/2
WCI350-AA	WCI350E-AA	3-1/2	4	7/8	1-5/8
WCI400-AA	WCI400E-AA	4	4-1/2	1	2
WCI500-AA	WCI500E-AA	5	5-9/16	1	2
WCI600-AA	WCI600E-AA	6	6-5/8	1	2




DOSSERT[®] TYPE WP-AA, WP-E-AA

Aluminum Welded, Internal Fit, End Plug

Internal fit end plug for aluminum pipe or tube. End plug is inserted into pipe and field welded.

Material

Aluminum Alloy

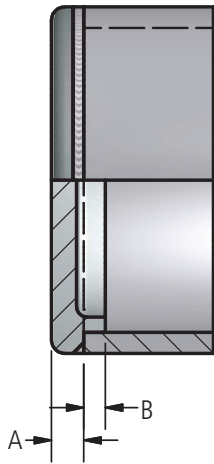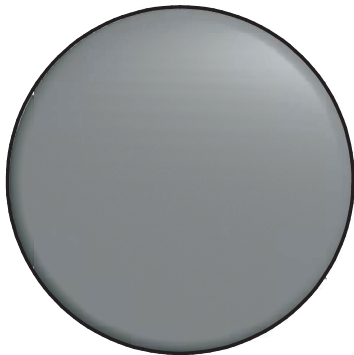

Ordering Information

CATALOG NUMBER		SPS	DIMENSIONS IN INCHES	
SCH 40	SCH 80		A	B
WP150-AA	WP150E-AA	1 1/2	1/4	3/16
WP200-AA	WP200E-AA	2	1/4	3/16
WP250-AA	WP250E-AA	2 1/2	1/4	3/16
WP300-AA	WP300E-AA	3	1/4	3/16
WP350-AA	WP350E-AA	3 1/2	1/4	3/16
WP400-AA	WP400E-AA	4	1/4	3/16
WP500-AA	WP500E-AA	5	3/8	1/4
WP600-AA	WP600E-AA	6	3/8	1/4
WP800-AA	WP800E-AA	8	3/8	1/4

DOSSERT® TYPE WEPI-AA, WEPI-30-AA, WEPI-45-AA, WEPI-60-AA

Aluminum Welded Pipe Elbow

Welded elbows offer economical method for field fabrication where angular turns are required. Elbows are designed with chamfer to provide ease of welding.

Material

Aluminum Alloy

Notes

- For a 30° add '-30', for a 45° add '-45', and for a 60° add '-60' to catalog number.
Ex: WEPI175-45-AA.



WEPI-AA



WEPIA-30-AA




WEPIA-45-AA



WEPIA-60-AA



WEPI-AA

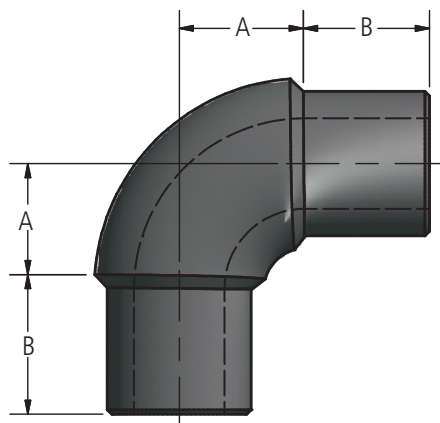

Ordering Information



CATALOG NUMBER		SPS	DIMENSIONS IN INCHES		
SCH 40	SCH 80		A	B	Y
WEPI75-AA	WEPI75E-AA	3/4	1	3/4	1/8
WEPI100-AA	WEPI100E-AA	1	1 3/16	3/4	3/16
WEPI125-AA	WEPI125E-AA	1 1/4	1 3/8	1	3/16
WEPI150-AA	WEPI150E-AA	1 1/2	1 9/16	1	3/16
WEPI200-AA	WEPI200E-AA	2	2	1 3/4	3/16
WEPI250-AA	WEPI250E-AA	2 1/2	2 5/16	1 3/4	1/4
WEPI300-AA	WEPI300E-AA	3	2 11/16	1 3/4	1/4
WEPI350-AA	WEPI350E-AA	3 1/2	2 15/16	1 3/4	1/4
WEPI400-AA	WEPI400E-AA	4	3 3/16	2	1/4
WEPI500-AA	WEPI500E-AA	5	3 7/8	2 1/2	1/4
WEPI600-AA	WEPI600E-AA	6	4 3/8	2 3/4	1/4

DOSSERT® TYPE WGPH-AA

Welded Extensions Connector

Material

Aluminum Alloy

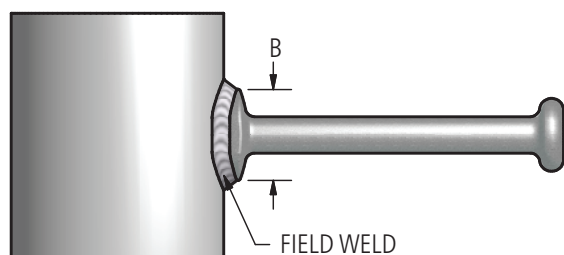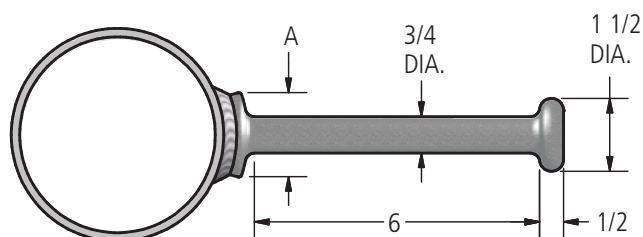

Ordering Information

CATALOG NUMBER	SPS RANGE	DIMENSIONS IN INCHES	
		A	B
WGPH250-AA	1 - 2 1/2	7/8	1 1/2
WGPH600-AA	3 - 6	1 1/2	2

DOSSERT® TYPE WTC-N-AA

Welded Tee to Flat

For welding a two, four, or six hole NEMA pad to a pipe.

Material



Aluminum Alloy

Notes

Add "U" for undrilled holes on pad.

EX: WTC250-2NU-AA

Add "F" for finish on both sides of the pad. EX: WTC250-2NF-AA.

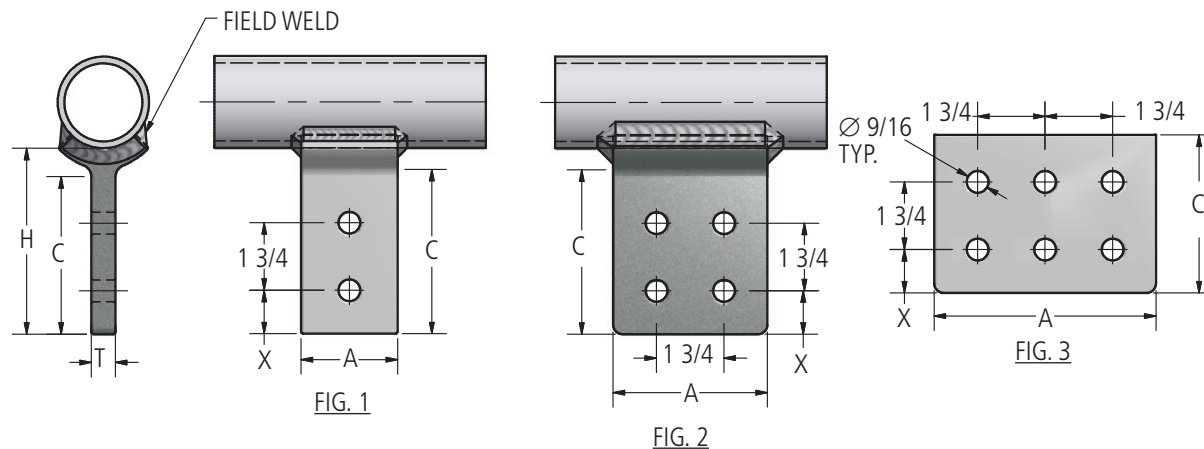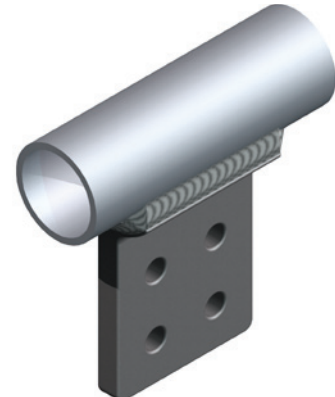

Ordering Information

CATALOG NUMBER	SPS RANGE	FIGURE NUMBER	DIMENSIONS IN INCHES				
			A	C	H	T	X
WTC250-2N-AA	1 THRU 2 1/2	1	2	3 1/4	3 7/8	5/8	5/8
WTC250-4N-AA	1 THRU 2 1/2	2	3	3 1/4	3 7/8	1/2	5/8
WTC250-4N4-AA	1 THRU 2 1/2	2	4	4 1/4	4 7/8	5/8	1 1/8
WTC600-2N-AA	3 THRU 6	1	2	3 1/4	4	3/4	5/8
WTC 600-4N-AA	3 THRU 6	2	3	3 1/4	4	3/4	5/8
WTC 600-4N4-AA	3 THRU 6	2	4	4 1/4	5	3/4	1 1/8
WTC 600-6N4-AA	3 THRU 6	3	6	4	5	3/4	1 1/8
WTC800R-4N4	8" OD	2	4	4 1/4	5	3/4	1 1/8





DOSSERT® TYPE WTF-N-AA

Perpendicular Pipe Tap

Transverse tee taps are designed to provide terminal connections in span on tubular bus. Pads have contact surfaces on both sides. Pads conform to NEMA standards.

Material

Aluminum Alloy

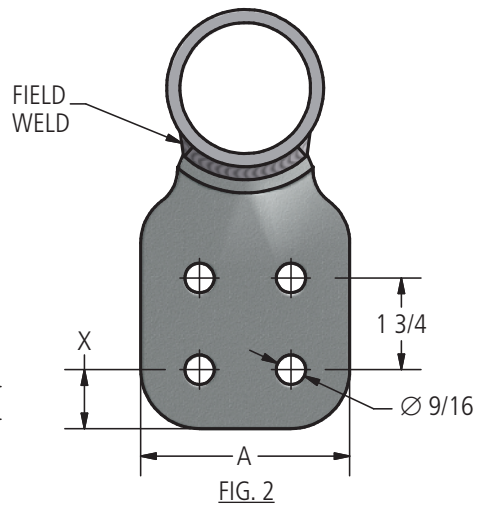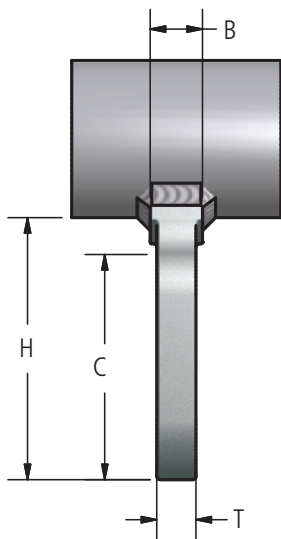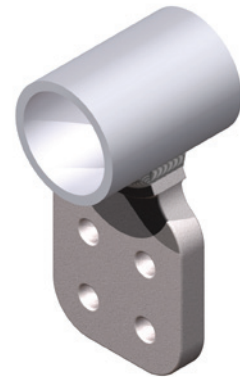

Ordering Information

CATALOG NUMBER	SPS		FIGURE NUMBER	DIMENSIONS IN INCHES					
	MIN	MAX		A	B	C	H	T	X
WTF250-2N-AA	1	2-1/2	1	2	7/8	3-1/8	3-3/4	1/2	5/8
WTF250-4N-AA	1	2-1/2	2	3	7/8	3-1/8	3-3/4	1/2	5/8
WTF250-4N4-AA	1	2-1/2	2	4	7/8	4-1/8	4-3/4	1/2	1-1/8
WTF600-2N-AA	3	6	1	2	1	3-1/8	3-3/4	3/4	5/8
WTF600-4N-AA	3	6	2	3	1	3-1/8	3-3/4	3/4	5/8
WTF600-4N4-AA	3	6	2	4	1	4-1/8	4-3/4	3/4	1-1/8

DOSSERT® TYPE 1000 SERIES

Tube to Cable Tee Adapter

Tee adapter is designed with saddle to allow connector to be clamped to bus tube during field welding. Stranded conductor is puddle welded to connector, then connector is welded to bus tube. Not recommended for use on ACSR conductors due to difficulty welding steel core.

Material




Aluminum Alloy

Ordering Instructions

Step 1: Determine Catalog Number

Determine the catalog number from Table 2 based on the bus conductor and the diameter of the stranded conductor being used.

Example: A tee adapter for a run conductor of 3" schedule 40 and a stranded conductor diameter of 0.926", the complete catalog number is: 1006.100

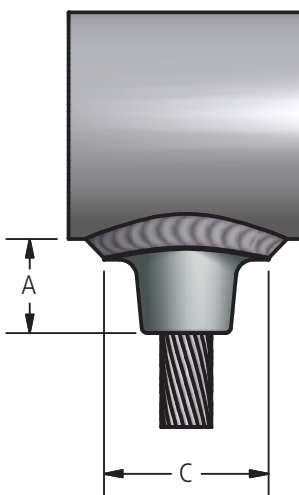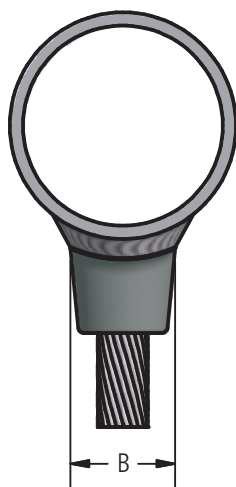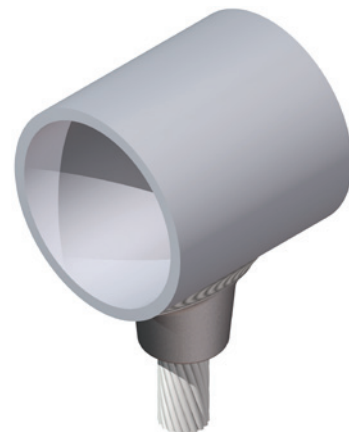

DOSSERT® TYPE 1000 SERIES

Tube to Cable Tee Adapter

Table 1 (Physical Characteristics of Series)

CATALOG NUMBER	DIMENSIONS IN INCHES			NOMINAL WEIGHT LBS
	A	B	C	
1000	0.75	0.81	1.75	0.06
1001	1.00	1.00	2.12	0.11
1002	1.00	1.00	2.12	0.11
1003	1.25	1.31	2.44	0.19
1004	1.25	1.31	2.44	0.19
1005	1.50	1.62	2.81	0.28
1006	1.50	1.62	2.81	0.28
1007	1.75	1.88	3.12	0.38
1008	1.75	1.88	3.12	0.38
1009	2.00	2.25	3.50	0.62
1010	2.00	2.25	3.50	0.62
1011	2.25	2.50	3.88	0.75
1012	2.25	2.50	3.88	0.75

Table 2 (Catalog Numbers)

STRANDED CONDUCTOR DIAMETER RANGE	CATALOG NUMBER									
	SPS									
	1	1 1/4	1 1/2	2	2 1/2	3	3 1/2	4	5	6
0.366 - 0.394	1000.40	1000.40	1000.40	1000.40	1000.40	1000.40	1000.40	1000.40	1000.40	1000.40
0.395 - 0.428	1000.44	1000.44	1000.44	1000.44	1000.44	1000.44	1000.44	1000.44	1000.44	1000.44
0.429 - 0.459	1000.47	1000.47	1000.47	1000.47	1000.47	1000.47	1000.47	1000.47	1000.47	1000.47
0.460 - 0.490	1001.50	1002.50	1002.50	1002.50	1002.50	1002.50	1002.50	1002.50	1002.50	1002.50
0.491 - 0.521	1001.53	1002.53	1002.53	1002.53	1002.53	1002.53	1002.53	1002.53	1002.53	1002.53
0.522 - 0.552	1001.56	1002.56	1002.56	1002.56	1002.56	1002.56	1002.56	1002.56	1002.56	1002.56
0.553 - 0.599	1001.61	1002.61	1002.61	1002.61	1002.61	1002.61	1002.61	1002.61	1002.61	1002.61
0.600 - 0.644	1001.66	1002.66	1002.66	1002.66	1002.66	1002.66	1002.66	1002.66	1002.66	1002.66
0.645 - 0.691	1003.70	1003.70	1003.70	1003.70	1004.70	1004.70	1004.70	1004.70	1004.70	1004.70
0.692 - 0.738	1003.75	1003.75	1003.75	1003.75	1004.75	1004.75	1004.75	1004.75	1004.75	1004.75
0.739 - 0.800	1003.81	1003.81	1003.81	1003.81	1004.81	1004.81	1004.81	1004.81	1004.81	1004.81
0.801 - 0.863	1003.88	1003.88	1003.88	1003.88	1004.88	1004.88	1004.88	1004.88	1004.88	1004.88
0.864 - 0.925	-	-	1005.94	1005.94	1005.94	1006.94	1006.94	1006.94	1006.94	1006.94
0.926 - 0.985	-	-	1005.100	1005.100	1005.100	1006.100	1006.100	1006.100	1006.100	1006.100
0.986 - 1.047	-	-	1005.106	1005.106	1005.106	1006.106	1006.106	1006.106	1006.106	1006.106
1.048 - 1.110	-	-	1005.112	1005.112	1005.112	1006.112	1006.112	1006.112	1006.112	1006.112
1.111 - 1.173	-	-	-	1007.119	1007.119	1008.119	1008.119	1008.119	1008.119	1008.119
1.174 - 1.235	-	-	-	1007.125	1007.125	1008.125	1008.125	1008.125	1008.125	1008.125
1.236 - 1.297	-	-	-	1007.131	1007.131	1008.131	1008.131	1008.131	1008.131	1008.131
1.298 - 1.360	-	-	-	1009.138	1009.138	1009.138	1010.138	1010.138	1010.138	1010.138
1.361 - 1.423	-	-	-	1009.144	1009.144	1009.144	1010.144	1010.144	1010.144	1010.144
1.424 - 1.485	-	-	-	1009.150	1009.150	1009.150	1010.150	1010.150	1010.150	1010.150
1.486 - 1.542	-	-	-	1009.156	1009.156	1009.156	1010.156	1010.156	1010.156	1010.156
1.543 - 1.605	-	-	-	1011.162	1011.162	1012.162	1012.162	1012.162	1012.162	1012.162
1.606 - 1.668	-	-	-	1011.169	1011.169	1012.169	1012.160	1012.169	1012.169	1012.169
1.669 - 1.730	-	-	-	1011.175	1011.175	1012.175	1012.175	1012.175	1012.175	1012.175
1.731 - 1.792	-	-	-	1011.181	1011.181	1012.181	1012.181	1012.181	1012.181	1012.181
1.793 - 1.855	-	-	-	1011.188	1011.188	1012.188	1012.188	1012.188	1012.188	1012.188

230 kV Aluminum Tee
and Vee Connectors

DOSSERT® A-Frame Connectors 14500 & 14600 Series

**Branch Connector (14500 Series) -
Vee Connector (14600 Series) - 30°**

ACA can supply prefabricated A-frame assemblies ready for field mounting and welding. Assemblies are factory fabricated from standard A-frame fittings and pipe carefully welded and inspected to insure accuracy and best performance.

A-frame fittings are designed to make fast, reliable A-frame assemblies. Fittings are designed to be welded on the outside of the pipe allowing use of both Schedule 40 and Schedule 80 pipe. Socket design allows for slight inaccuracies in field cut length of pipe.

To order include angle, top and bottom run sizes, leg size, centerline height and crossbrace size and spacing if required.

Ordering Instructions

Step 1: Determine Catalog Number

Determine the catalog number based on the bus conductor being used for the run and the branch.

Example: A 15° branch connector for a run conductor of 3" schedule 40 and a branch conductor of 2 1/2" schedule 40, the catalog number is: 14508-7



A 30° vee connector for a run conductor of 4" schedule 40 and a branch conductor of 2 1/2" schedule 40, the catalog number is: 14610-7

Notes


- For bus conductor information, see AFL Bus Conductor section.



A-Frame

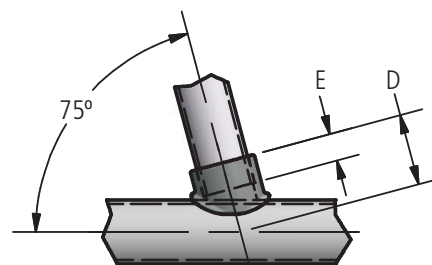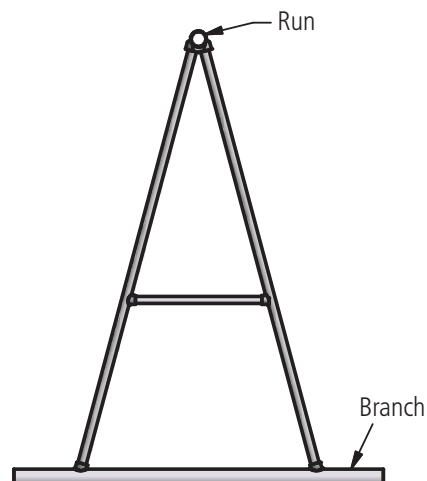

WTA-75-AA
WTA-80-AA



WVBP-20-AA
WVBP-30-AA

DOSSERT®

A-Frame Connectors 14500 & 14600 Series

Branch Connector (14500 Series) -
Vee Connector (14600 Series) - 30°

Ordering Information

CONDUCTOR SIZE		CATALOG NUMBER		DIMENSIONS IN INCHES				NOMINAL WEIGHT LBS	
SCH 40 & SCH80		BRANCH CONNECTOR	VEE CONNECTOR	D	E	F	G	BRANCH CONNECTOR	VEE CONNECTOR
RUN	BRANCH								
1 1/2	1	14504-3	14605-3	2.94	1.75	3.19	1.75	0.4	1
1 1/2	1 1/4	14500-4	14605-4	3.25	2.00	3.06	2	0.4	1.2
1 1/2	1 1/2	14500-5	14605-5	3.25	2.00	4.56	2	0.6	2.1
2	1	14504-3	14606-3	3.25	1.75	3.25	1.75	0.4	1.2
2	1 1/4	14506-4	14606-4	3.50	2.00	4.31	2	0.6	1.2
2	1 1/2	14500-5	14606-5	3.50	2.00	3.25	2	0.6	2.8
2	2	14506-6	14606-6	3.56	2.00	3.25	2	1.6	2.6
2 1/2	1	14507-3	14607-3	3.44	1.75	3.81	1.75	0.4	0.9
2 1/2	1 1/4	14506-4	14607-4	3.69	2.00	4.56	2	0.6	1.2
2 1/2	1 1/2	14507-5	14607-5	3.75	2.00	4.25	2	1.3	1.5
2 1/2	2	14507-6	14607-6	3.88	2.00	3.44	2	1.4	2.6
2 1/2	2 1/2	14500-7	14607-7	3.88	2.00	3.5	2.5	1	3.3
3	1	14507-3	14608-3	3.75	1.75	4.19	1.75	0.4	1.1
3	1 1/4	14506-4	14608-4	4.12	2.00	4.19	1	0.6	1.3
3	1 1/2	14507-5	14608-5	4.12	2.00	4.88	2	1.3	1.6
3	2	14508-6	14608-6	4.19	2.00	3.88	2.12	1.3	2.7
3	2 1/2	14508-7	14608-7	4.69	2.50	4.31	2.5	1.7	3.1
3	3	14508-8	14608-8	4.81	2.50	4.25	2.5	2.3	5
3 1/2	1 1/4	14509-4	14609-4	4.31	2.00	5	2	0.6	1.3
3 1/2	1 1/2	14507-5	14609-5	4.44	2.00	5.06	2	1.3	1.6
3 1/2	2	14509-6	14609-6	4.44	2.00	4.56	2	1.3	2.6
3 1/2	2 1/2	14508-7	14609-7	5.00	2.50	3.94	2	1.7	3.5
3 1/2	3	14508-8	14609-8	5.19	2.50	4.88	1.75	2.3	5.3
3 1/2	3 1/2	14509-9	14609-9	5.62	3.00	4.88	3	4.6	5.8
4	1 1/2	14510-5	14610-5	4.62	2.00	6.12	2	1.4	1.6
4	2	14509-6	14610-6	4.69	2.00	4.44	2	1.3	2.8
4	2 1/2	14510-7	14610-7	5.31	2.50	4.44	2	1.6	2.9
4	3	14510-8	14610-8	5.31	2.50	5.69	2.5	2.8	5.3
4	3 1/2	14500-9	14610-9	5.94	3.00	5.25	3	2.4	5.5
4	4	14500-10	14610-10	6.44	3.50	7.38	2.25	3.4	6.5
5	2 1/2	14510-7	14612-7	5.94	2.50	6.94	2.5	1.6	2.9
5	3	14511-8	14612-8	5.88	2.50	6.62	2.5	2.2	5.6
5	3 1/2	14500-9	14612-9	6.56	3.00	6.62	3	2.4	8.8
5	4	14500-10	14612-10	7.06	3.50	8	2.3	3.4	6.5
5	5	14500-12	14612-12	7.69	4.00	7.75	2.75	6	12
6	2 1/2	14500-7	14613-7	6.00	2.00	7.62	2.5	1	2.9
6	3	14511-8	14613-8	6.56	2.50	7.31	2.5	2.2	5.6
6	3 1/2	14500-9	14613-9	7.19	3.00	7.38	3	2.4	5.5
6	4	14500-10	14613-10	7.69	3.50	8.62	2.25	3.4	6.5
6	5	14500-12	14613-12	8.25	4.00	8.38	2.75	6	12
6	6	14500-13	14613-13	8.31	4.00	8.69	3.25	6.5	14.3

DOSSERT®

TYPE WT-AA, WTA-75-AA, WTA-80-AA

Welded Tee

Material

Aluminum Alloy

Notes


1. For a welded tee at 75° for 1" to 1" pipe order: WTA100-100-75-AA.
2. For a welded tee at 80° for 1" to 1" pipe order: WTA100-100-80-AA.



WT-AA



WT-AA

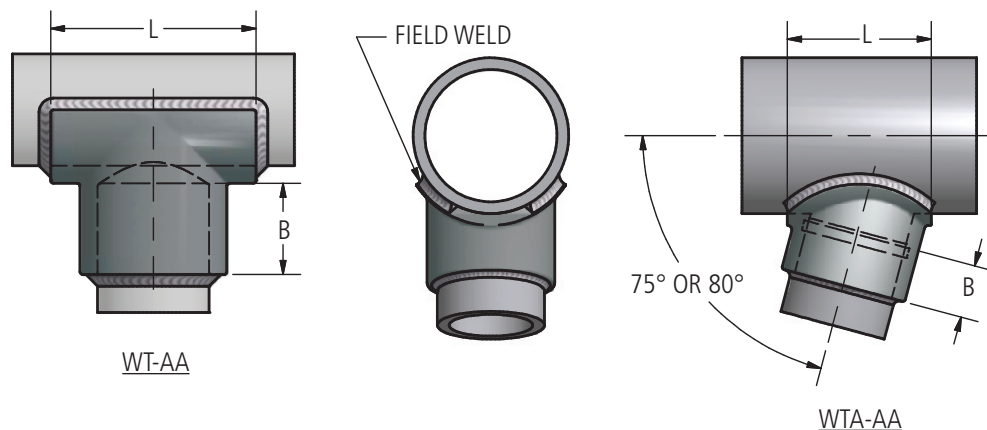

Ordering Information

CATALOG NUMBER			SPS		DIMENSIONS IN INCHES	
75 DEGREE	80 DEGREE	90 DEGREE	RUN	TAP	B	L
WTA75-75-75-AA	WTA75-75-80-AA	WT75-75-AA	3/4	3/4	3/4	2 1/8
WTA100-75-75-AA	WTA100-75-80-AA	WT100-75-AA	1	3/4	3/4	2 1/8
WTA100-100-75-AA	WTA100-100-80-AA	WT100-100-AA	1	1	3/4	2 1/4
WTA125-75-75-AA	WTA125-75-80-AA	WT125-75-AA	1 1/4	3/4	3/4	2 1/8
WTA125-100-75-AA	WTA125-100-80-AA	WT125-100-AA	1 1/4	1	3/4	2 1/4
WTA125-125-75-AA	WTA125-125-80-AA	WT125-125-AA	1 1/4	1 1/4	1	2 1/2
WTA125-250-75-AA	WTA125-250-80-AA	WT125-250-AA	1 1/4	2 1/2	1 1/2	3 1/2
WTA150-75-75-AA	WTA150-75-80-AA	WT150-75-AA	1 1/2	3/4	3/4	2 1/8
WTA150-100-75-AA	WTA150-100-80-AA	WT150-100-AA	1 1/2	1	3/4	2 1/4
WTA150-125-75-AA	WTA150-125-80-AA	WT150-125-AA	1 1/2	1 1/4	1	2 1/2
WTA150-150-75-AA	WTA150-150-80-AA	WT150-150-AA	1 1/2	1 1/2	1	2 3/4
WTA150-200-75-AA	WTA150-200-80-AA	WT150-200-AA	1 1/2	1 1/2	1 1/4	3 11/16
WTA200-75-75-AA	WTA200-75-80-AA	WT200-75-AA	2	3/4	3/4	2 1/8
WTA200-100-75-AA	WTA200-100-80-AA	WT200-100-AA	2	1	3/4	2 1/4
WTA200-125-75-AA	WTA200-125-80-AA	WT200-125-AA	2	1 1/4	1	2 1/2
WTA200-150-75-AA	WTA200-150-80-AA	WT200-150-AA	2	1 1/2	1	2 3/4
WTA200-200-75-AA	WTA200-200-80-AA	WT200-200-AA	2	2	1 1/4	3 1/4
WTA200-300-75-AA	WTA200-300-80-AA	WT200-300-AA	2	3	1 3/4	4 3/8
WTA200-400-75-AA	WTA200-400-80-AA	WT200-400-AA	2	4	2 1/4	4 7/8
WTA250-75-75-AA	WTA250-75-80-AA	WT250-75-AA	2 1/2	3/4	3/4	2 1/8
WTA250-100-75-AA	WTA250-100-80-AA	WT250-100-AA	2 1/2	1	3/4	2 1/4
WTA250-125-75-AA	WTA250-125-80-AA	WT250-125-AA	2 1/2	1 1/4	1	2 1/2



230 kV Aluminum Welded Tee and Vee Connectors

DOSSERT®

TYPE WT-AA, WTA-75-AA, WTA-80-AA

Welded Tee

Ordering Information

CATALOG NUMBER			SPS		DIMENSIONS IN INCHES	
75 DEGREE	80 DEGREE	90 DEGREE	RUN	TAP	B	L
WTA250-150-75-AA	WTA250-150-80-AA	WT250-150-AA	2 1/2	1 1/2	1	2 3/4
WTA250-200-75-AA	WTA250-200-80-AA	WT250-200-AA	2 1/2	2	1 1/4	3 1/4
WTA250-250-75-AA	WTA250-250-80-AA	WT250-250-AA	2 1/2	2 1/2	1 1/2	3 3/4
WTA300-75-75-AA	WTA300-75-80-AA	WT300-75-AA	3	3/4	3/4	2 1/8
WTA300-100-75-AA	WTA300-100-80-AA	WT300-100-AA	3	1	3/4	2 1/4
WTA300-125-75-AA	WTA300-125-80-AA	WT300-125-AA	3	1 1/4	1	2 1/2
WTA300-150-75-AA	WTA300-150-80-AA	WT300-150-AA	3	1 1/2	1	2 3/4
WTA300-200-75-AA	WTA300-200-80-AA	WT300-200-AA	3	2	1 1/4	3 1/4
WTA300-250-75-AA	WTA300-250-80-AA	WT300-250-AA	3	2 1/2	1 1/2	3 3/4
WTA300-300-75-AA	WTA300-300-80-AA	WT300-300-AA	3	3	1 3/4	4 3/8
WTA300-350-75-AA	WTA300-350-80-AA	WT300-350-AA	3	3 1/2	2	4 7/8
WTA300-400-75-AA	WTA300-400-80-AA	WT300-400-AA	3	4	2 1/4	5 3/8
WTA300-500-75-AA	WTA300-500-80-AA	WT300-500-AA	3	5	2 3/4	6 7/16
WTA350-75-75-AA	WTA350-75-80-AA	WT350-75-AA	3 1/2	3/4	3/4	2 1/8
WTA350-100-75-AA	WTA350-100-80-AA	WT350-100-AA	3 1/2	1	3/4	2 1/4
WTA350-125-75-AA	WTA350-125-80-AA	WT350-125-AA	3 1/2	1 1/4	1	2 1/2
WTA350-150-75-AA	WTA350-150-80-AA	WT350-150-AA	3 1/2	1 1/2	1	2 3/4
WTA350-200-75-AA	WTA350-200-80-AA	WT350-200-AA	3 1/2	2	1 1/4	3 1/4
WTA350-250-75-AA	WTA350-250-80-AA	WT350-250-AA	3 1/2	2 1/2	1 1/2	3 3/4
WTA350-300-75-AA	WTA350-300-80-AA	WT350-300-AA	3 1/2	3	1 3/4	4 3/8
WTA350-350-75-AA	WTA350-350-80-AA	WT350-350-AA	3 1/2	3 1/2	2	4 7/8
WTA400-75-75-AA	WTA400-75-80-AA	WT400-75-AA	4	3/4	3/4	2 1/8
WTA400-100-75-AA	WTA400-100-80-AA	WT400-100-AA	4	1	3/4	2 1/4
WTA400-125-75-AA	WTA400-125-80-AA	WT400-125-AA	4	1 1/4	1	2 1/2
WTA400-150-75-AA	WTA400-150-80-AA	WT400-150-AA	4	1 1/2	1	2 3/4
WTA400-200-75-AA	WTA400-200-80-AA	WT400-200-AA	4	2	1 1/4	3 1/4
WTA400-250-75-AA	WTA400-250-80-AA	WT400-250-AA	4	2 1/2	1 1/2	3 3/4
WTA400-300-75-AA	WTA400-300-80-AA	WT400-300-AA	4	3	1 3/4	4 3/8
WTA400-350-75-AA	WTA400-350-80-AA	WT400-350-AA	4	3 1/2	2	4 7/8
WTA400-400-75-AA	WTA400-400-80-AA	WT400-400-AA	4	4	2 1/4	5 3/8
WTA500-100-75-AA	WTA500-100-80-AA	WT500-100-AA	5	1	3/4	2 1/4
WTA500-125-75-AA	WTA500-125-80-AA	WT500-125-AA	5	1 1/4	1	2 1/2
WTA500-150-75-AA	WTA500-150-80-AA	WT500-150-AA	5	1 1/2	1	2 3/4
WTA500-200-75-AA	WTA500-200-80-AA	WT500-200-AA	5	2	1 1/4	3 1/4
WTA500-250-75-AA	WTA500-250-80-AA	WT500-250-AA	5	2 1/2	1 1/2	3 3/4
WTA500-300-75-AA	WTA500-300-80-AA	WT500-300-AA	5	3	1 3/4	4 3/8
WTA500-350-75-AA	WTA500-350-80-AA	WT500-350-AA	5	3 1/2	2	4 7/8
WTA500-400-75-AA	WTA500-400-80-AA	WT500-400-AA	5	4	2 1/4	5 3/8
WTA500-500-75-AA	WTA500-500-80-AA	WT500-500-AA	5	5	2 3/4	6 7/16
WTA600-100-75-AA	WTA600-100-80-AA	WT600-100-AA	6	1	3/4	2 1/4
WTA600-125-75-AA	WTA600-125-80-AA	WT600-125-AA	6	1 1/4	1	2 1/2
WTA600-150-75-AA	WTA600-150-80-AA	WT600-150-AA	6	1 1/2	1	2 3/4
WTA600-200-75-AA	WTA600-200-80-AA	WT600-200-AA	6	2	1 1/4	3 1/4
WTA600-250-75-AA	WTA600-250-80-AA	WT600-250-AA	6	2 1/2	1 1/2	3 3/4
WTA600-300-75-AA	WTA600-300-80-AA	WT600-300-AA	6	3	1 3/4	4 3/8
WTA600-350-75-AA	WTA600-350-80-AA	WT600-350-AA	6	3 1/2	2	4 7/8
WTA600-400-75-AA	WTA600-400-80-AA	WT600-400-AA	6	4	2 1/4	5 3/8
WTA600-500-75-AA	WTA600-500-80-AA	WT600-500-AA	6	5	2 3/4	6 7/16
WTA600-500-75-AA	WTA600-500-80-AA	WT600-500-AA	6	6	3 1/4	8 1/4
WTA800R-400-75-AA	WTA800R-400-80-AA	WT800R-400-AA	8	4	2 3/4	5 3/8
WTA800R-500-75-AA	WTA800R-500-80-AA	WT800R-500-AA	8	5	2 3/4	6 7/16
WTA800R-800R-75-AA	WTA800R-800R-80-AA	WT800R-800R-AA	8	8" O.D.	2 3/4	10



DOSSERT®

TYPE WVBP-20-AA, WVBP-30-AA

Welded Vee Connector for Aluminum Tubing

Material

Aluminum Alloy

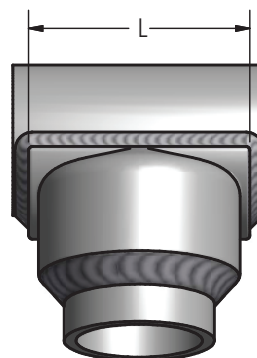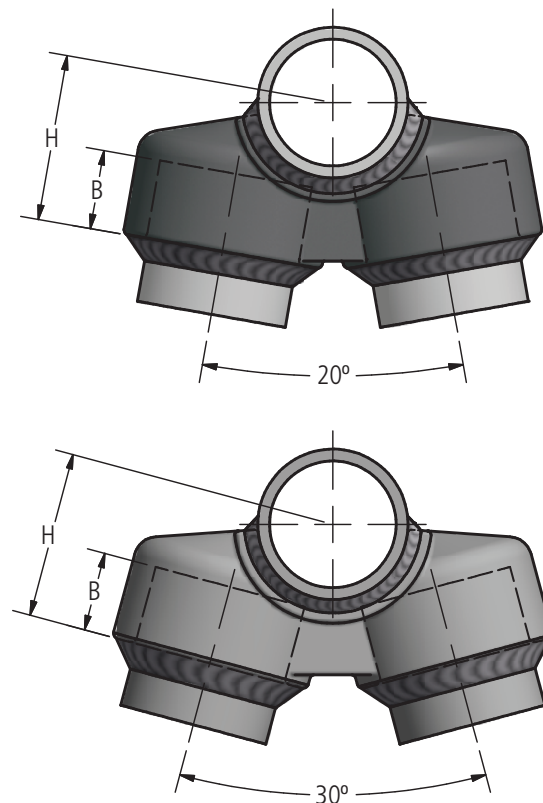

Ordering Information

CATALOG NUMBER		SPS		DIMENSIONS IN INCHES		
20 DEGREE	30 DEGREE	RUN	TAP	B	H	L
WVBP100-50-20-AA	WVBP100-50-30-AA	1	1/2	1/2	1-1/8	1-7/8
WVBP100-75-20-AA	WVBP100-75-30-AA	1	3/4	3/4	1-5/8	2-1/8
WVBP125-75-20-AA	WVBP125-75-30-AA	1-1/4	3/4	3/4	1-3/4	2-1/8
WVBP125-100-20-AA	WVBP125-100-30-AA	1-1/4	1	3/4	1-3/4	2-1/4
WVBP125-125-20-AA	WVBP125-125-30-AA	1-1/4	1-1/4	1	2	2-5/8
WVBP150-75-20-AA	WVBP150-75-30-AA	1-1/2	3/4	3/4	1-7/8	2-1/8
WVBP150-100-20-AA	WVBP150-100-30-AA	1-1/2	1	3/4	1-7/8	2-1/4
WVBP150-125-20-AA	WVBP150-125-30-AA	1-1/2	1-1/4	1	2-1/8	2-5/8
WVBP150-150-20-AA	WVBP150-150-30-AA	1-1/2	1-1/2	1	2-3/8	2-7/8
WVBP200-100-20-AA	WVBP200-100-30-AA	2	1	3/4	2-1/8	2-1/4
WVBP200-125-20-AA	WVBP200-125-30-AA	2	1-1/4	1	2-3/8	2-5/8
WVBP200-150-20-AA	WVBP200-150-30-AA	2	1-1/2	1	2-3/8	2-7/8
WVBP200-200-20-AA	WVBP200-200-30-AA	2	2	1-1/4	2-5/8	3-1/2
WVBP250-100-20-AA	WVBP250-100-30-AA	2-1/2	1	3/4	2-3/8	2-1/4
WVBP250-125-20-AA	WVBP250-125-30-AA	2-1/2	1-1/4	1	2-5/8	2-5/8
WVBP250-150-20-AA	WVBP250-150-30-AA	2-1/2	1-1/2	1	2-5/8	2-7/8

DOSSERT[®] TYPE WVBP-20-AA, WVBP-30-AA

Ordering Information

CATALOG NUMBER		SPS		DIMENSIONS IN INCHES		
20 DEGREE	30 DEGREE	RUN	TAP	B	H	L
WVB250-200-20-AA	WVB250-200-30-AA	2-1/2	2	1-1/4	2-7/8	3-1/2
WVB250-250-20-AA	WVB250-250-30-AA	2-1/2	2-1/2	1-1/2	3-1/8	4
WVB300-125-20-AA	WVB300-125-30-AA	3	1-1/4	1	2-15/16	2-5/8
WVB300-150-20-AA	WVB300-150-30-AA	3	1-1/2	1	2-15/16	2-7/8
WVB300-200-20-AA	WVB300-200-30-AA	3	2	1-1/4	3-3/16	3-1/2
WVB300-250-20-AA	WVB300-250-30-AA	3	2-1/2	1-1/2	3-7/16	4
WVB300-300-20-AA	WVB300-300-30-AA	3	3	1-3/4	3-11/16	4-5/8
WVB350-100-20-AA	WVB350-100-30-AA	3-1/2	1	3/4	2-5/8	2-1/4
WVB350-150-20-AA	WVB350-150-30-AA	3-1/2	1-1/2	1	3-1/4	2-7/8
WVB350-200-20-AA	WVB350-200-30-AA	3-1/2	2	1-1/4	3-1/2	3-1/2
WVB350-250-20-AA	WVB350-250-30-AA	3-1/2	2-1/2	1-1/2	3-3/4	4
WVB350-300-20-AA	WVB350-300-30-AA	3-1/2	3	1-3/4	4	4-5/8
WVB350-350-20-AA	WVB350-350-30-AA	3-1/2	3-1/2	2	4-1/4	5-1/8
WVB400-150-20-AA	WVB400-150-30-AA	4	1-1/2	1	3-1/2	2-7/8
WVB400-200-20-AA	WVB400-200-30-AA	4	2	1-1/4	3-3/4	3-1/2
WVB400-250-20-AA	WVB400-250-30-AA	4	2-1/2	1-1/2	4	4
WVB400-300-20-AA	WVB400-300-30-AA	4	3	1-3/4	4-1/4	4-5/8
WVB400-350-20-AA	WVB400-350-30-AA	4	3-1/2	2	4-1/2	5-1/8
WVB400-400-20-AA	WVB400-400-30-AA	4	4	2-1/4	4-3/4	5-7/8
WVB500-150-20-AA	WVB500-150-30-AA	5	1-1/2	1	4	2-7/8
WVB500-200-20-AA	WVB500-200-30-AA	5	2	1-1/4	4-1/4	3-1/2
WVB500-250-20-AA	WVB500-250-30-AA	5	2-1/2	1-1/2	4-1/2	4
WVB500-300-20-AA	WVB500-300-30-AA	5	3	1-3/4	4-3/4	4-5/8
WVB500-350-20-AA	WVB500-350-30-AA	5	3-1/2	2	5	5-1/8
WVB500-400-20-AA	WVB500-400-30-AA	5	4	2-1/4	5-1/4	5-7/8
WVB500-500-20-AA	WVB500-500-30-AA	5	5	2-3/4	5-3/4	6-15/16
WVB600-200-20-AA	WVB600-200-30-AA	6	2	1-1/4	4-13/16	3-1/2
WVB600-250-20-AA	WVB600-250-30-AA	6	2-1/2	1-1/2	5-1/16	4
WVB600-300-20-AA	WVB600-300-30-AA	6	3	1-3/4	5-5/16	4-5/8
WVB600-350-20-AA	WVB600-350-30-AA	6	3-1/2	2	5-9/16	5-1/8
WVB600-400-20-AA	WVB600-400-30-AA	6	4	2-1/4	5-13/16	5-7/8
WVB600-500-20-AA	WVB600-500-30-AA	6	5	2-3/4	6-5/16	6-15/16
WVB600-600-20-AA	WVB600-600-30-AA	6	6	3-1/4	6-13/16	8

DOSSERT® TYPE 15950, 15960 Flexible Rope Lay Assemblies

Aluminum flexible rope lay assemblies are designed to connect to aluminum or copper pads. Pads conform to NEMA standards. Lengths other than those shown can be supplied if required. Current ratings are based on 30°C rise over 40°C ambient.

Material

Aluminum Alloy

Ordering Instructions

- Determine the catalog number by terminal arrangement and current rating required.
Ex: For 90° terminals at 1660 amperes, the catalog number is: 15960.
- For pad sizes and location of holes note letter in catalog number and refer to page 3.



FIG. 1
STRAIGHT




FIG. 2
90°

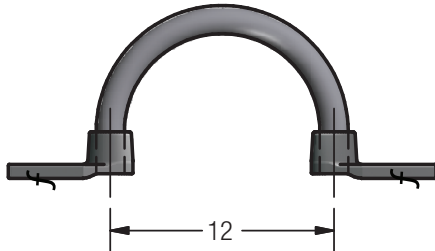


FIG. 3
LOOP







FIG. 4
STRAIGHT & 90°



Ordering Information

CATALOG NUMBER	FIG. NO.	CURRENT RATING AMPERES	ROPE LAY CONDUCTOR		PAD SIZE	PAD THICKNESS INCHES	NOMINAL WEIGHT LBS
			SIZE	NO.			
15950	1	600	636 KCMIL	1	B	0.69	1.40
15951	2	600	636 KCMIL	1	B	0.69	1.40
15952	3	600	636 KCMIL	1	B	0.69	1.70
15953	1	996	636 KCMIL	2	D	0.69	5.20
15954	2	996	636 KCMIL	2	D	0.69	5.20
15955	3	996	636 KCMIL	2	D	0.69	5.80
15956	1	1000	1272 KCMIL	1	D	0.69	3.10
15957	2	1000	1272 KCMIL	1	D	0.69	3.10
15958	3	1000	1272 KCMIL	1	D	0.69	3.70
15959	1	1660	1272 KCMIL	2	E	1.00	8.90
15960	2	1660	1272 KCMIL	2	E	1.00	8.90
15961	3	1660	1272 KCMIL	2	E	1.00	10.10
15962	1	2160	1272 KCMIL	3	G*	0.75	12.90
15963	2	2160	1272 KCMIL	3	G*	0.75	12.90
15964	3	2160	1272 KCMIL	3	G*	0.75	14.70
15965	4	600	636 KCMIL	1	B	0.69	1.40
15966	4	996	636 KCMIL	2	D	0.69	5.20
15967	4	1000	1272 KCMIL	1	D	0.69	3.10
15968	4	1660	1272 KCMIL	2	E	1.00	8.90
15969	4	2160	1272 KCMIL	3	G*	0.75	12.90

* Pad width is 6.75".

PAD DIMENSIONS			
PAD SIZE	DIMENSIONS IN INCHES		
	A	C	X
B	3 1/2	1 3/4	5/8
D	3 1/2	3	5/8
E	4 1/2	4	1 1/8
G	4 1/2	6	1 1/4



DOSSERT® TYPE 34300

Tube To Flat

Double terminal is designed to connect to aluminum or copper pads.

Material

Aluminum Alloy

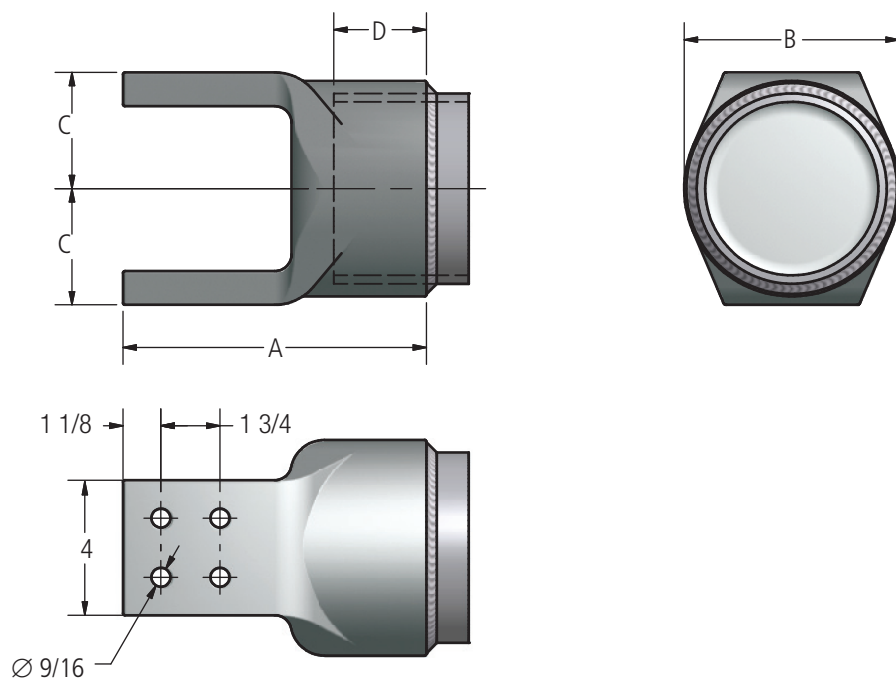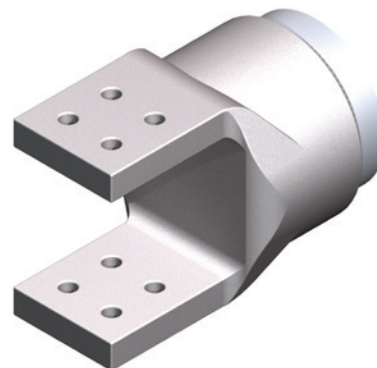

Ordering Information

CATALOG NUMBER	SPS	DIMENSIONS IN INCHES				NOMINAL WEIGHT LBS
		A	B	C	D	
34308E	3	7.62	4.12	2.62	1.75	5.20
34309E	3 1/2	8.19	4.69	2.94	2.00	5.90
34310E	4	8.44	5.19	3.25	2.25	6.20
34312E	5	9.00	6.38	3.44	2.75	8.30
34313E	6	9.50	7.56	4.25	3.25	9.50

DOSSERT® TYPE WP2C-N-AA, WP2CA-N-45-AA, WP2CA-N-90-AA


Welded Terminal to Two Cables

Material

Aluminum Alloy

Notes

1. Add "U" for undrilled. Ex: WP2C35-2NU-AA
2. Add "F" for finished on both sides
3. For a 45° add suffix '-45', and for a 90° add suffix '-90'. You must also add an 'A' after WP2C.
4. For a 350 MCM cable, with a 4 hole pad finished on both sides, with a 45° angle use WP2CA35-4NF-45-AA.




WP2C-N-AA



WP2CA-N-45-AA



WP2CA-N-90-AA

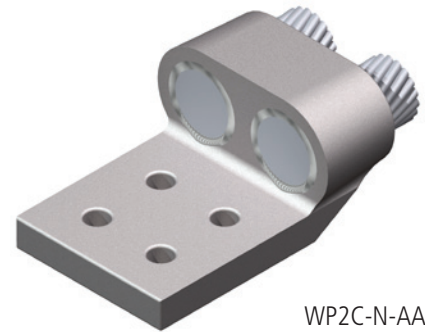

WP2C-N-AA



WP2CA-N-45-AA




FIG. 1


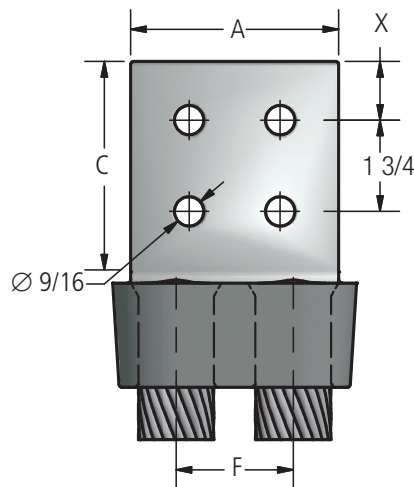


FIG. 2



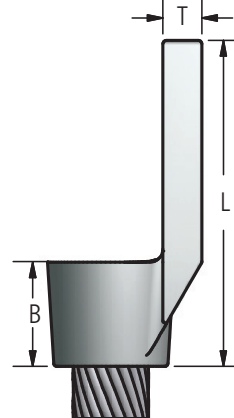

230 kV Aluminum Welded Terminal Connectors

DOSSERT®

TYPE WP2C-N-AA, WP2CA-N-45-AA, WP2CA-N-90-AA

Ordering Information

CATALOG NUMBER	FIG. NO.	CABLE RANGE		DIMENSIONS IN INCHES						
		AAC	ASCR	A	B	C	F	L	T	X
WP2C35-2N-AA	1	336.4 (19), 350 (19,37,61)	300 (26/7)	1 5/8	1 1/4	3	1 1/4	4 1/2	3/8	5/8
WP2C35-4N-AA	2	336.4 (19), 350 (19,37,61)	300 (26/7)	3	1 1/4	3	1 1/4	4 1/2	3/8	5/8
WP2C40-2N-AA	1	397.5 (19), 350 (19,37,61)	336.4 (18/1,26/7,30/7)	1 5/8	1 1/4	3	1 1/4	4 1/2	3/8	5/8
WP2C40-4N-AA	2	397.5 (19), 400 (19,37)	336.4 (18/1,26/7,30/7)	3	1 1/4	3	1 3/8	4 1/2	3/8	5/8
WP2C48-2N-AA	1	450 (19,37,61), 477 (19,37)	397.5 (18/1,24/7,26/7,30/18)	1 5/8	1 1/4	3	1 3/8	4 1/2	3/8	5/8
WP2C48-4N-AA	2	450 (19,37,61), 477 (19,37)	397.5 (18/1,24/7,26/7,30/18)	3	1 1/4	3	1 3/8	4 1/2	3/8	5/8
WP2C55-2N-AA	1	500 (19,37,61), 550 (61,91), 556.5 (19,37)	477 (18/1,24/7,26/7,30/7)	1 5/8	1 1/4	3	1 3/8	4 1/2	3/8	5/8
WP2C55-4N-AA	2	500 (19,37,61), 550 (61,91), 556.5 (19,37)	477 (18/1,24/7,26/7,30/7)	3	1 1/4	3	1 3/8	4 1/2	3/8	5/8
WP2C55-4N4-AA	2	500 (19,37,61), 550 (61,91), 556.5 (19,37)	477 (18/1,24/7,26/7,30/7)	4	1 1/4	4	1 3/8	5 1/2	3/8	1 1/8
WP2C65-2N-AA	1	600 (37,61,91), 636 (37), 650 (37,61,91)	556.5 (18/1,24/7,26/7)	1 5/8	1 1/2	3	1 5/8	4 3/4	1/2	5/8
WP2C65-4N-AA	2	600 (37,61,91), 636 (37), 650 (37,61,91)	556.5 (18/1,24/7,26/7)	3	1 1/2	3	1 5/8	4 3/4	1/2	5/8
WP2C65-4N4-AA	2	600 (37,61,91), 636 (37), 650 (37,61,91)	556.5 (18/1,24/7,26/7)	4	1 1/2	4	1 5/8	5 3/4	1/2	1 1/8
WP2C71-2N-AA	1	650 (37,61,91), 700 (37,61,91), 715.5 (37,61)	636 (24/7,26/7), 605 (24/7,26/7,30/19)	1 5/8	1 1/2	3	1 5/8	4 3/4	1/2	5/8
WP2C71-4N-AA	2	650 (37,61,91), 700 (37,61,91), 715.5 (37,61)	636 (24/7,26/7), 605 (24/7,26/7,30/19)	3	1 1/2	3	1 5/8	4 3/4	1/2	5/8
WP2C71-4N4-AA	2	650 (37,61,91), 700 (37,61,91), 715.5 (37,61)	636 (24/7,26/7), 605 (24/7,26/7,30/19)	4	1 1/2	4	1 5/8	5 3/4	1/2	1 1/8
WP2C80-2N-AA	1	750 (37,61,917), 795 (37,61), 715.5 (37,61)	636 (30/19), 666.6 (24/7,26/7), 715.5 (27/4)	1 3/4	1 1/2	3	1 5/8	4 3/4	1/2	5/8
WP2C80-4N-AA	2	750 (37,61,917), 795 (37,61), 715.5 (37,61)	636 (30/19), 666.6 (24/7,26/7), 715.5 (27/4)	3	1 1/2	3	1 5/8	4 3/4	1/2	5/8
WP2C80-4N4-AA	2	750 (37,61,917), 795 (37,61), 715.5 (37,61)	636 (30/19), 666.6 (24/7,26/7), 715.5 (27/4)	4	1 1/2	4	1 5/8	5 3/4	1/2	1 1/8
WP2C90-2N-AA	1	800 (61,91), 874.5 (37,61), 900 (37,61,91)	715.5 (30/19), 795 (36/1,45/7,24/7,54/7)	2	1 1/2	3	1 5/8	4 3/4	1/2	5/8
WP2C90-4N-AA	2	800 (61,91), 874.5 (37,61), 900 (37,61,91)	715.5 (30/19), 795 (36/1,45/7,24/7,54/7)	3	1 1/2	3	1 5/8	4 3/4	1/2	5/8
WP2C90-4N4-AA	2	800 (61,91), 874.5 (37,61), 900 (37,61,91)	715.5 (30/19), 795 (36/1,45/7,24/7,54/7)	4	1 1/2	4	1 5/8	5 3/4	1/2	1 1/8
WP2C95-2N-AA	1	900 (37,61), 954 (37,61)	795 (30/19), 874.5 (54/7), 900 (45/7,54/7)	2	1 3/4	3	1 5/8	5	1/2	5/8
WP2C95-4N-AA	2	900 (37,61), 954 (37,61)	795 (30/19), 874.5 (54/7), 900 (45/7,54/7)	3	1 3/4	3	1 5/8	5	1/2	5/8
WP2C95-4N4-AA	2	900 (37,61), 954 (37,61)	795 (30/19), 874.5 (54/7), 900 (45/7,54/7)	4	1 3/4	4	1 3/4	6	1/2	1 1/8
WP2C103-2N-AA	1	954 (37,61), 1000 (37,61,91), 1033.5 (37,61)	954,36/1,45/7,54/7)	2	1 3/4	3	1 3/4	5	1/2	5/8
WP2C103-4N-AA	2	954 (37,61), 1000 (37,61,91), 1033.5 (37,61)	954,36/1,45/7,54/7)	3	1 3/4	3	1 3/4	5	1/2	5/8
WP2C103-4N4-AA	2	954 (37,61), 1000 (37,61,91), 1033.5 (37,61)	954,36/1,45/7,54/7)	4	1 3/4	4	1 7/8	6	1/2	1 1/8
WP2C111-2N-AA	1	1100 (91,127), 1113 (61)	1033.5 (36/1,45/7,54/7)	2 1/2	1 3/4	3	1 7/8	5	1/2	5/8
WP2C111-4N-AA	2	1100 (91,127), 1113 (61)	1033.5 (36/1,45/7,54/7)	3	1 3/4	3	1 7/8	5	1/2	5/8
WP2C111-4N4-AA	2	1100 (91,127), 1113 (61)	1033.5 (36/1,45/7,54/7)	4	1 3/4	4	2 1/4	6	1/2	1 1/8
WP2C127R-4N-AA	2	1272MCM	NA	3	2	3	2 1/4	5 1/2	3/4	5/8
WP2C127R-4N4-AA	2	1272MCM	NA	4	2	4	2 1/4	6 1/2	3/4	1 1/8

DOSSERT® TYPE WP2C-N-AA, WP2CA-N-45-AA, WP2CA-N-90-AA

Ordering Information

CATALOG NUMBER	FIG. NO.	CABLE RANGE		DIMENSIONS IN INCHES						
		AAC	ASCR	A	B	C	F	L	T	X
WP2C135-2N-AA	1	1192.5 (61), 1200 (91,127), 1250 (91,127), 1272 (61), 1300 (91,127), 1351.5 (61)	1113 (45/7,54/19), 1192.5 (45/7,54/19)	2 1/2	2	3	2 1/4	5 1/4	3/4	5/8
WP2C135-4N-AA	2	1192.5 (61), 1200 (91,127), 1250 (91,127), 1272 (61), 1300 (91,127), 1351.5 (61)	1113 (45/7,54/19), 1192.5 (45/7,54/19)	3	2	3	2 1/4	5 1/4	3/4	5/8
WP2C135-4N4-AA	2	1192.5 (61), 1200 (91,127), 1250 (91,127), 1272 (61), 1300 (91,127), 1351.5 (61)	1113 (45/7,54/19), 1192.5 (45/7,54/19)	4	2	4	2 1/4	6 1/4	3/4	1 1/8
WP2C151-2N-AA	2	1400 (91,127), 1431 (61), 1500 (91,127), 1510.5 (61)	1272 (45/7,54/19), 1351.5 (45/7,54/19)	3	2	3	2 1/4	5 1/4	3/4	5/8
WP2C151-4N-AA	2	1400 (91,127), 1431 (61), 1500 (91,127), 1510.5 (61)	1272 (45/7,54/19), 1351.5 (45/7,54/19)	4	2	4	2 1/4	6 1/4	3/4	1 1/8
WP2C170-2N-AA	2	1590 (61), 1600 (127,169), 1700 (127,169)	1431 (45/7,54/19), 54/19)	3	2	3	2 1/4	5 1/4	3/4	5/8
WP2C170-4N4-AA	2	1590 (61), 1600 (127,169), 1700 (127,169)	1431 (45/7,54/19), 54/19)	4	2	4	2 1/4	6 1/4	3/4	1 1/8
WP2C190-4N-AA	2	1750 (127,169), 1800 (127,169), 1900 (127,169)	1590 (45/7,54/19), 1780 (84/19)	3	2 1/4	3	2 1/4	5 1/2	3/4	5/8
WP2C190-4N4-AA	2	1750 (127,169), 1800 (127,169), 1900 (127,169)	1590 (45/7,54/19), 1780 (84/19)	4	2 1/4	4	2 1/4	6 1/2	3/4	1 1/8
WP2C225-4N-AA	2	2000 (91,127,169), 2250 (91)	2167 (72/7)	3	2 1/4	3	2 1/2	5 1/2	3/4	5/8
WP2C225-4N4-AA	2	2000 (91,127,169), 2250 (91)	2167 (72/7)	4	2 1/4	4	2 1/2	6 1/2	3/4	1 1/8
WP2C250-4N-AA	2	2500 (91,127,169)	2456 (84/19)	3	2 1/4	3	2 3/4	5 1/2	3/4	5/8
WP2C250-4N4-AA	2	2500 (91,127,169)	2456 (84/19)	4	2 1/4	4	2 3/4	6 1/2	3/4	1 1/8
WP2C300-4N-AA	2	2750 (91), 3000 (127,169)	2870 ACSR	3	2 1/4	3	2 3/4	5 1/2	7/8	5/8
WP2C300-4N4-AA	2	2750 (91), 3000 (127,169)	2870 ACSR	4	2 1/4	4	2 3/4	6 1/2	7/8	1 1/8

DOSSERT® TYPE WPC-N-AA, WPCA-N-45-AA, WPCA-N-90-AA


Offset Welded Terminal to Cable

Material


Aluminum Alloy

Notes


1. Add "U" for undrilled
2. Add "F" for finished on both sides
3. For a 3" 4 hole NEMA pad at 45° angle to 450 MCM cable order: WPCA48-4N-45-AA
4. For a 3" 4 hole NEMA pad at 90° angle finished on both sides to 450 MCM cable order: WPCA48-4NF-90-AA

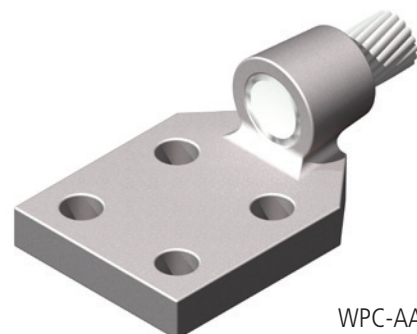


WPC-AA

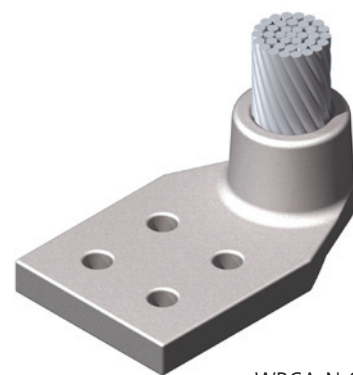

WPCA-N-90-AA



WPC-AA



WPCA-N-45-AA



WPCA-N-90-AA

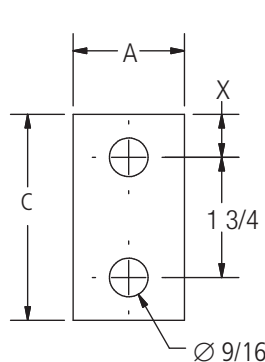


FIG. 1


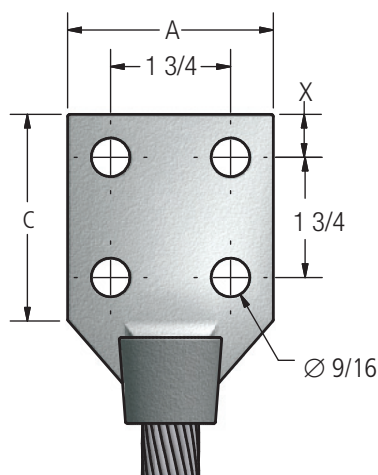


FIG. 2

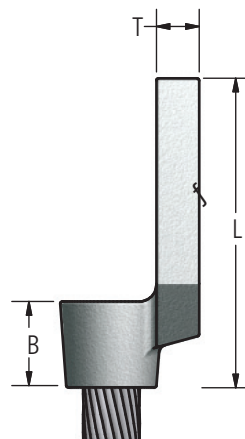

Ordering Information

CATALOG NUMBER	FIGURE NUMBER	CABLE RANGE		DIMENSIONS IN INCHES					
		AAC	ASCR	A	B	C	T	L	X
WPC10-2N-AA	1	1/0 (7,19)	1 (6/1), 1/0 (6/1)	1 1/4	3/4	3	5/16	4	5/8
WPC13-2N-AA	1	2/0 (7,19,37)	2/0, (6/1)	1 1/4	3/4	3	5/16	4	5/8
WPC17-2N-AA	1	3/0 (7,19,37)	101.8 (12/7), 3/0 (6/1)	1 1/4	1	3	5/16	4 1/4	5/8
WPC21-2N-AA	1	4/0 (7,19,37), 246.9 (7)	134.6 (12/7), 4/0 (6/1)	1 1/4	1	3	5/16	4 1/4	5/8
WPC31-2N-AA	1	250 (7,19,97,61)266.8 (7,19), 300 (19,37,61), 312.8 (19)	159 (12/7), 226.8 (19/1,26/7)	1 1/2	1	3	3/8	4 1/4	5/8

DOSSERT® TYPE WPC-N-AA, WPCA-N-45-AA, WPCA-N-90-AA

Ordering Information

CATALOG NUMBER	FIGURE NUMBER	CABLE RANGE		DIMENSIONS IN INCHES					
		AAC	ASCR	A	B	C	T	L	X
WPC31-4N-AA	2	250 (7,19,97,61)266.8 (7,19), 300 (19,37,61), 312.8 (19)	159 (12/7), 226.8 (19/1,26/7)	3	1	3	3/8	4 1/4	5/8
WPC35-2N-AA	1	336.4 (19), 350 (19,37,61)	300 (26/7)	1 5/8	1 1/4	3	3/8	4 1/2	5/8
WPC35-4N-AA	2	336.4 (19), 350 (19,37,61)	300 (26/7)	3	1 1/4	3	3/8	4 1/2	5/8
WPC40-2N-AA	1	397.5 (19), 400 (37,61)	336.4 (18/1,26/7,30/7)	1 5/8	1 1/4	3	3/8	4 1/2	5/8
WPC40-4N-AA	2	397.5 (19), 400 (37,61)	336.4 (18/1,26/7,30/7)	3	1 1/4	3	3/8	4 1/2	5/8
WPC48-2N-AA	1	450 (19,37,61), 477 (19,37)	397.5 (18/1,24/7,26/7,30/7)	1 5/8	1 1/4	3	3/8	4 1/2	5/8
WPC48-4N-AA	2	450 (19,37,61), 477 (19,37)	397.5 (18/1,24/7,26/7,30/7)	3	1 1/4	3	3/8	4 1/2	5/8
WPC21-4N-AA	2	4/0 (7,19,37), 246.9 (7)	134.6 (12/7), 4/0 (6/1)	3	1 1/4	3	5/16	4 1/4	5/8
WPC55-2N-AA	1	500 (19,37,61), 550 (61,91), 556.5 (19,37)	477 (18/1,24/7,26/7,30/7)	1 5/8	1 1/4	3	3/8	4 1/2	5/8
WPC55-4N-AA	2	500 (19,37,61), 550 (61,91), 556.5 (19,37)	477 (18/1,24/7,26/7,30/7)	3	1 1/4	3	3/8	4 1/2	5/8
WPC55-4N4-AA	2	500 (19,37,61), 550 (61,91), 556.5 (19,37)	477 (18/1,24/7,26/7,30/7)	4	1 1/4	4	3/8	5 1/2	1 1/8
WPC65-2N-AA	1	600 (37,61,91), 636 (37), 650 (37,61,91)	556.5 (18/1,24/7,26/7)	1 5/8	1 1/2	3	1/2	4 3/4	5/8
WPC65-4N-AA	2	600 (37,61,91), 636 (37), 650 (37,61,91)	556.5 (18/1,24/7,26/7)	3	1 1/2	3	1/2	4 3/4	5/8
WPC65-4N4-AA	2	600 (37,61,91), 636 (37), 650 (37,61,91)	556.5 (18/1,24/7,26/7)	4	1 1/2	4	1/2	5 3/4	1 1/8
WPC71-2N-AA	1	650 (37,61,91), 700 (37,61,91), 715.5 (37,61)	636 (24/7,26/7), 605 (24/7,26/7,30/19)	1 5/8	1 1/2	3	1/2	4 3/4	5/8
WPC71-4N-AA	2	650 (37,61,91), 700 (37,61,91), 715.5 (37,61)	636 (24/7,26/7), 605 (24/7,26/7,30/19)	3	1 1/2	3	1/2	4 3/4	5/8
WPC71-4N4-AA	2	650 (37,61,91), 700 (37,61,91), 715.5 (37,61)	636 (24/7,26/7), 605 (24/7,26/7,30/19)	4	1 1/2	4	1/2	5 3/4	1 1/8
WPC80-2N-AA	1	750 (37,61,91), 795 (37,61), 715.5 (37,61)	636 (30/19), 666.6 (24/7,26/7), 715.5 (27/4)	1 3/4	1 1/2	3	1/2	4 3/4	5/8
WPC80-4N-AA	2	750 (37,61,91), 795 (37,61), 715.5 (37,61)	636 (30/19), 666.6 (24/7,26/7), 715.5 (27/4)	3	1 1/2	3	1/2	4 3/4	5/8
WPC80-4N4-AA	2	750 (37,61,91), 795 (37,61), 715.5 (37,61)	636 (30/19), 666.6 (24/7,26/7), 715.5 (27/4)	4	1 1/2	4	1/2	5 3/4	1 1/8
WPC90-2N-AA	1	800 (61,91), 874.5 (37,61), 900 (37,61,91)	715.5 (30/19), 795 (36/1,45/7,24/7,54/7)	2	1 1/2	3	1/2	4 3/4	5/8
WPC90-4N-AA	2	800 (61,91), 874.5 (37,61), 900 (37,61,91)	715.5 (30/19), 795 (36/1,45/7,24/7,54/7)	3	1 1/2	3	1/2	4 3/4	5/8
WPC90-4N4-AA	2	800 (61,91), 874.5 (37,61), 900 (37,61,91)	715.5 (30/19), 795 (36/1,45/7,24/7,54/7)	4	1 1/2	4	1/2	5 3/4	1 1/8
WPC95-2N-AA	1	900 (37,61), 954 (37,61)	795 (30/19), 874.5 (54/7), 900 (45/7,54/7)	2	1 3/4	3	1/2	5	5/8
WPC95-4N-AA	2	900 (37,61), 954 (37,61)	795 (30/19), 874.5 (54/7), 900 (45/7,54/7)	3	1 3/4	3	1/2	5	5/8
WPC95-4N4-AA	2	900 (37,61), 954 (37,61)	795 (30/19), 874.5 (54/7), 900 (45/7,54/7)	4	1 3/4	4	1/2	6	1 1/8
WPC103-2N-AA	1	954 (37,61), 1000 (37,61,91), 1033.5 (37,61)	954,36/1,45/7,54/7)	2	1 3/4	3	1/2	5	5/8
WPC103-4N-AA	2	954 (37,61), 1000 (37,61,91), 1033.5 (37,61)	954,36/1,45/7,54/7)	3	1 3/4	3	1/2	5	5/8
WPC103-4N4-AA	2	954 (37,61), 1000 (37,61,91), 1033.5 (37,61)	954,36/1,45/7,54/7)	4	1 3/4	4	1/2	6	1 1/8
WPC111-2N-AA	1	1100 (91,127), 1113 (61)	1033.5 (36/1,45/7,54/7)	2 1/2	1 3/4	3	1/2	5	5/8
WPC111-4N-AA	2	1100 (91,127), 1113 (61)	1033.5 (36/1,45/7,54/7)	3	1 3/4	3	1/2	5	5/8



230 kV Aluminum Welded Terminal Connectors

DOSSERT[®] TYPE WPC-N-AA, WPCA-N-45-AA, WPCA-N-90-AA

Ordering Information

CATALOG NUMBER	FIGURE NUMBER	CABLE RANGE		DIMENSIONS IN INCHES					
		AAC	ASCR	A	B	C	T	L	X
WPC111-4N4-AA	2	1100 (91,127), 1113 (61)	1033.5 (36/1,45/7,54/7)	4	1 3/4	4	1/2	6	1 1/8
WPC135-2N-AA	1	1192.5 (61), 1200 (91,127), 1250 (91,127), 1272 (61), 1300 (91,127), 1351.5 (61)	1113 (45/7,54/19), 1192.5 (45/7,54/19)	2 1/2	2	3	9/16	5 1/4	5/8
WPC135-4N-AA	2	1192.5 (61), 1200 (91,127), 1250 (91,127), 1272 (61), 1300 (91,127), 1351.5 (61)	1113 (45/7,54/19), 1192.5 (45/7,54/19)	3	2	3	9/16	5 1/4	5/8
WPC135-4N4-AA	2	1192.5 (61), 1200 (91,127), 1250 (91,127), 1272 (61), 1300 (91,127), 1351.5 (61)	1113 (45/7,54/19), 1192.5 (45/7,54/19)	4	2	4	9/16	6 1/4	1 1/8
WPC151-4N-AA	2	1400 (91,127), 1431 (61), 1500 (91,127), 1510.5 (61)	1272 (45/7,54/19), 1351.5 (45/7,54/19)	3	2	3	11/16	5 1/4	5/8
WPC151-4N4-AA	2	1400 (91,127), 1431 (61), 1500 (91,127), 1510.5 (61)	1272 (45/7,54/19), 1351.5 (45/7,54/19)	4	2	4	11/16	6 1/4	1 1/8
WPC170-4N-AA	2	1590 (61), 1600 (127,169), 1700 (127,169)	1431 (45/7,54/19), 54/19)	3	2	3	11/16	5 1/4	5/8
WPC170-4N4-AA	2	1590 (61), 1600 (127,169), 1700 (127,169)	1431 (45/7,54/19), 54/19)	4	2	4	11/16	6 1/4	1 1/8
WPC190-4N-AA	2	1750 (127,169), 1800 (127,169), 1900 (127,169)	1590 (45/7,54/19), 1780 (84/19)	3	2 1/4	3	11/16	5 1/2	5/8
WPC190-4N4-AA	2	1750 (127,169), 1800 (127,169), 1900 (127,169)	1590 (45/7,54/19), 1780 (84/19)	4	2 1/4	4	11/16	6 1/2	1 1/8
WPC225-4N-AA	2	2000 (91,127,169), 2250 (91)	2167 (72/7)	3	2 1/4	3	3/4	5 1/2	5/8
WPC225-4N4-AA	2	2000 (91,127,169), 2250 (91)	2167 (72/7)	4	2 1/4	4	3/4	6 1/2	1 1/8
WPC250-4N-AA	2	2500 (91,127,169)	2456 (84/19)	3	2 1/4	3	3/4	5 1/2	5/8
WPC250-4N4-AA	2	2500 (91,127,169)	2456 (84/19)	4	2 1/4	4	3/4	6 1/2	1 1/8
WPC300-4N-AA	2	2750 (91), 3000 (127,169)	2870 ACSR	3	2 1/4	3	7/8	5 1/2	5/8
WPC300-4N4-AA	2	2750 (91), 3000 (127,169)	2870 ACSR	4	2 1/4	4	7/8	6 1/2	1 1/8

DOSSERT®

TYPE WTP-AA, WTPA-45-AA, WTPA-90-AA

Flush Welded Terminal


WWSC-AA is a variable angle coupler for aluminum pipe conductor.

Material

Aluminum Alloy

Notes


1. Add "U" for undrilled
2. Add "F" for finished on both sides. EX: WTP75-2NF-AA
3. For a WTPA 90 degree pad add -90 and for a WTPA 45 degree pad add -45.
EX: If you are ordering for a SPS 2" pipe, 4N pad, and 45 degree pad
Order: WTPA200-4N-45-AA.

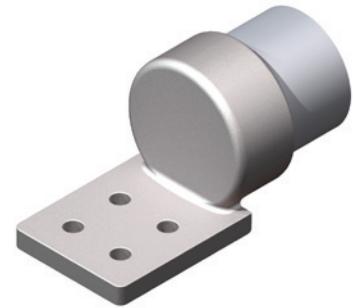


WTP-AA




WTPA-90-AA




WTP-AA



WTPA-45-AA



WTPA-90-AA

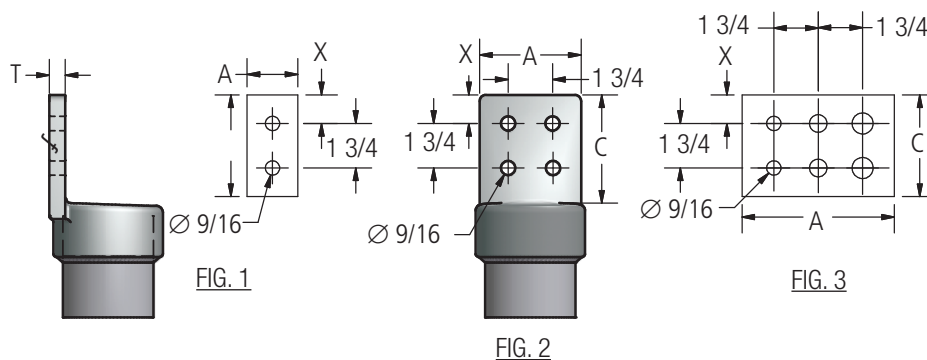



230 kV Aluminum Welded Terminal Connectors

DOSSERT®

TYPE WTP-AA, WTPA-45-AA, WTPA-90-AA

Flush Welded Terminal

Ordering Information

CATALOG NUMBER			SPS	FIGURE NUMBER	DIMENSIONS IN INCHES			
STRAIGHT	45 DEGREE	90 DEGREE			A	C	T	X
WTP75-2N-AA	WTP75-2N-45-AA	WTP75-2N-90-AA	3/4	1	2	3	3/8	5/8
WTP75-4N-AA	WTP75-4N-45-AA	WTP75-4N-90-AA	3/4	2	3	3	3/8	5/8
WTP100-2N-AA	WTP100-2N-45-AA	WTP100-2N-90-AA	1	1	2	3	3/8	5/8
WTP100-4N-AA	WTP100-4N-45-AA	WTP100-4N-90-AA	1	2	3	3	3/8	5/8
WTP100-4N4-AA	WTP100-4N4-45-AA	WTP100-4N4-90-AA	1	2	4	4	3/8	1-1/8
WTP125-2N-AA	WTP125-2N-45-AA	WTP125-2N-90-AA	1-1/4	1	2	3	1/2	5/8
WTP125-4N-AA	WTP125-4N-45-AA	WTP125-4N-90-AA	1-1/4	2	3	3	1/2	5/8
WTP125-4N4-AA	WTP125-4N4-45-AA	WTP125-4N4-90-AA	1-1/4	2	4	4	1/2	1-1/8
WTP150-2N-AA	WTP150-2N-45-AA	WTP150-2N-90-AA	1-1/2	1	2	3	5/8	5/8
WTP150-4N-AA	WTP150-4N-45-AA	WTP150-4N-90-AA	1-1/2	2	3	3	1/2	5/8
WTP150-4N4-AA	WTP150-4N4-45-AA	WTP150-4N4-90-AA	1-1/2	2	4	4	1/2	1-1/8
WTP200-2N-AA	WTP200-2N-45-AA	WTP200-2N-90-AA	2	1	2	3	1/2	5/8
WTP200-4N-AA	WTP200-4N-45-AA	WTP200-4N-90-AA	2	2	3	3	1/2	5/8
WTP200-4N4-AA	WTP200-4N4-45-AA	WTP200-4N4-90-AA	2	2	4	4	1/2	1-1/8
WTP250-2N-AA	WTP250-2N-45-AA	WTP250-2N-90-AA	2-1/2	1	2	3	1/2	5/8
WTP250-4N-AA	WTP250-4N-45-AA	WTP250-4N-90-AA	2-1/2	2	3	3	5/8	5/8
WTP250-4N4-AA	WTP250-4N4-45-AA	WTP250-4N4-90-AA	2-1/2	2	4	4	5/8	1-1/8
WTP300-2N-AA	WTP300-2N-45-AA	WTP300-2N-90-AA	3	1	2	3	5/8	5/8
WTP300-4N-AA	WTP300-4N-45-AA	WTP300-4N-90-AA	3	2	3	3	5/8	5/8
WTP300-4N4-AA	WTP300-4N4-45-AA	WTP300-4N4-90-AA	3	2	4	4	5/8	1-1/8
WTP300-5N4-AA	WTP300-5N4-45-AA	WTP300-5N4-90-AA	3	3	5	4	5/8	1-1/8
WTP300-6N4-AA	WTP300-6N4-45-AA	WTP300-6N4-90-AA	3	3	6	4	5/8	1-1/8
WTP350-4N-AA	WTP350-4N-45-AA	WTP350-4N-90-AA	3-1/2	2	3	3	3/4	5/8
WTP350-4N4-AA	WTP350-4N4-45-AA	WTP350-4N4-90-AA	3-1/2	2	4	4	3/4	1-1/8
WTP350-5N4-AA	WTP350-5N4-45-AA	WTP350-5N4-90-AA	3-1/2	3	5	4	3/4	1-1/8
WTP350-6N4-AA	WTP350-6N4-45-AA	WTP350-6N4-90-AA	3-1/2	3	6	4	3/4	1-1/8
WTP400-4N-AA	WTP400-4N-45-AA	WTP400-4N-90-AA	4	2	3	3	3/4	5/8
WTP400-4N4-AA	WTP400-4N4-45-AA	WTP400-4N4-90-AA	4	2	4	4	3/4	1-1/8
WTP400-5N4-AA	WTP400-5N4-45-AA	WTP400-5N4-90-AA	4	3	5	4	3/4	1-1/8
WTP400-6N4-AA	WTP400-6N4-45-AA	WTP400-6N4-90-AA	4	3	6	4	3/4	1-1/8
WTP500-4N-AA	WTP500-4N-45-AA	WTP500-4N-90-AA	5	2	3	3	7/8	5/8
WTP500-4N4-AA	WTP500-4N4-45-AA	WTP500-4N4-90-AA	5	2	4	4	7/8	1-1/8
WTP500-5N4-AA	WTP500-5N4-45-AA	WTP500-5N4-90-AA	5	3	5	4	7/8	1-1/8
WTP500-6N4-AA	WTP500-6N4-45-AA	WTP500-6N4-90-AA	5	3	6	4	7/8	1-1/8
WTP600-4N-AA	WTP600-4N-45-AA	WTP600-4N-90-AA	6	2	3	3	1	5/8
WTP600-4N4-AA	WTP600-4N4-45-AA	WTP600-4N4-90-AA	6	2	4	4	1	1-1/8
WTP600-5N4-AA	WTP600-5N4-45-AA	WTP600-5N4-90-AA	6	3	5	4	1	1-1/8
WTP600-6N4-AA	WTP600-6N4-45-AA	WTP600-6N4-90-AA	6	3	6	4	1	1-1/8

DOSSERT® TYPE WTPC-N-AA



External Center Form Welded Terminal

Material

Aluminum Alloy

Notes

1. Add "U" for undrilled
2. Add "F" for finished on both sides EX: WTPC75-2NF-AA

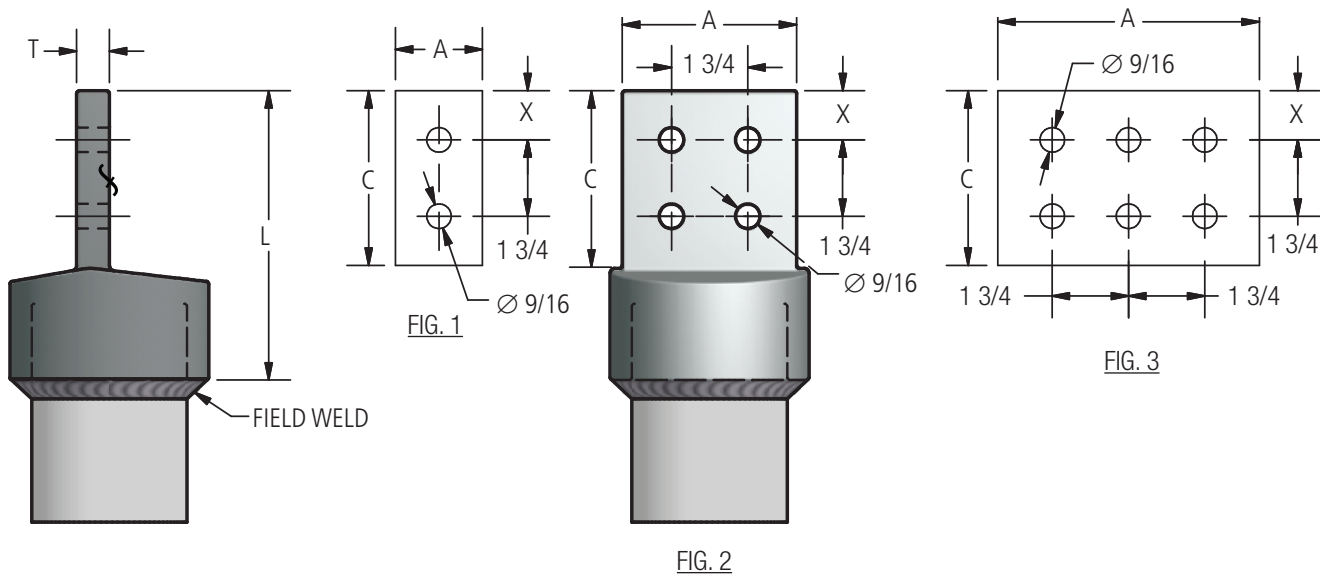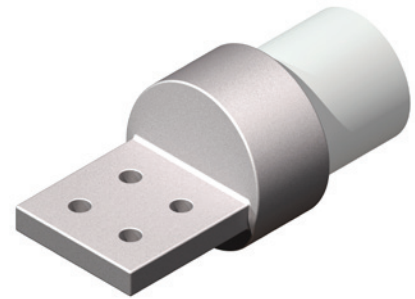

Ordering Information

CATALOG NUMBER	SPS	FIGURE NUMBER	DIMENSIONS IN INCHES				
			A	C	L	T	X
WTPC75-2N-AA	3/4	1	2	3	4 5/8	3/8	5/8
WTPC75-4N-AA	3/4	2	3	3	4 5/8	3/8	5/8
WTPC100-2N-AA	1	1	2	3	5	3/8	5/8
WTPC100-4N-AA	1	2	3	3	5	3/8	5/8
WTPC125-2N-AA	1 1/4	1	2	3	5	1/2	5/8
WTPC125-4N4-AA	1 1/4	2	4	4	6	1/2	1 1/8
WTPC125-4N-AA	1 1/4	2	3	3	5	1/2	5/8
WTPC150-2N-AA	1 1/2	1	2	3	5	1/2	5/8
WTPC150-4N4-AA	1 1/2	2	4	4	6	1/2	1 1/8
WTPC150-4N-AA	1 1/2	2	3	3	5	1/2	5/8
WTPC200-2N-AA	2	1	2 1/2	3	5	5/8	5/8
WTPC200-4N4-AA	2	2	4	4	6	5/8	1 1/8
WTPC200-4N-AA	2	2	3	3	5	5/8	5/8
WTPC250-2N-AA	2 1/2	1	2 1/2	3	5	5/8	5/8
WTPC250-4N4-AA	2 1/2	2	4	4	6	5/8	1 1/8
WTPC250-4N-AA	2 1/2	2	3	3	5	5/8	5/8
WTPC300-2N-AA	3	1	2 1/2	3	5 1/4	5/8	1 1/8
WTPC300-4N4-AA	3	2	4	4	6 1/4	5/8	1 1/8
WTPC300-4N-AA	3	2	3	3	5 1/4	5/8	5/8
WTPC350-4N4-AA	3 1/2	2	4	4	6 5/8	3/4	1 1/8
WTPC400-4N4-AA	4	2	4	4	6 3/4	3/4	1 1/8
WTPC400-4N-AA	4	2	3	3	5 3/4	3/4	5/8
WTPC400-5N4-AA	4	3	5	4	6 3/4	3/4	1 1/8
WTPC500-4N4-AA	5	2	4	4	7 3/8	7/8	1 1/8
WTPC500-5N4-AA	5	3	5	4	7 3/8	7/8	1 1/8
WTPC500-6N4-AA	5	3	6	4	7 3/8	7/8	1 1/8
WTPC600-4N4-AA	6	2	4	4	7 7/8	1	1 1/8

DOSSERT[®] TYPE WTPI-AA, WTPIA-45-AA, WTPIA-90-AA

Internal Welded Terminal


WTPI-AA the pad and pipe run parallel, WTPIA-45-AA the pad is at a 45° angle to the pipe, and WTPI-90-AA the pad is at a 90° angle to the pipe.

Material


Aluminum

Notes

1. Add "U" for undrilled
2. Add "F" for finished on both sides. EX: WTP75-2NF-AA
3. For a 1" SPS pipe to a 3" NEMA pad at 45°, order: WTPIA100-4N-45-AA
4. For a 2" SPS pipe to a 4" NEMA pad at 90°, order: WTPIA200-4N4-90-AA
5. For a 2" SPS pipe to a 4" NEMA pad finished on both sides, order: WTPI200-4N4F-AA
6. For a 1" SPS pipe to a 4" pad undrilled order: WTPI100-4N4U-AA

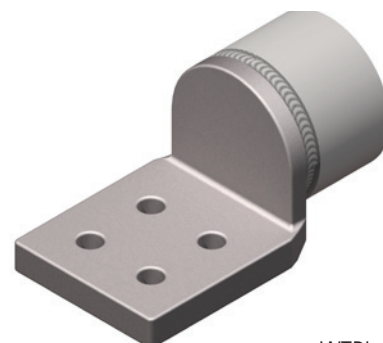

WTPI-AA

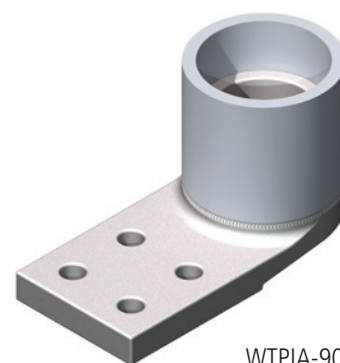

WTPIA-90-AA




WTPI-AA



WTPIA-45-AA



WTPIA-90-AA

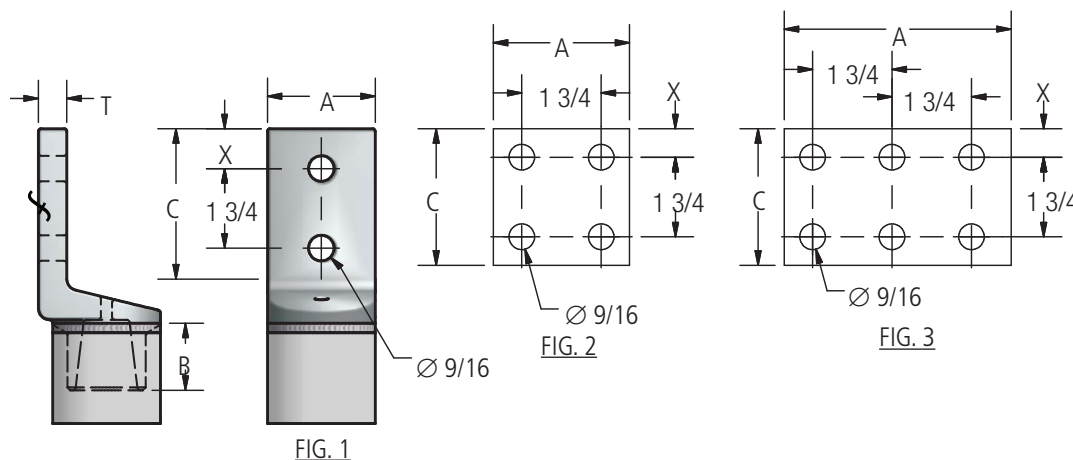

DOSSERT®

TYPE WTPI-AA, WTPIA-45-AA, WTPIA-90-AA

Internal Welded Terminal

Ordering Information

CATALOG NUMBER		SPS	FIG NUMBER	DIMENSIONS IN INCHES				
SCH 40	SCH 80			A	B	C	T	X
WTPI75-2N-AA	WTPI75-2N-AA	3/4	1	1-1/2	3/4	3	3/8	5/8
WTPI100-2N-AA	WTPI100E-2N-AA	1	1	1-1/2	3/4	3	3/8	5/8
WTPI100-4N-AA	WTPI100E-4N-AA	1	2	3	3/4	3	3/8	5/8
WTPI100-4N4-AA	WTPI100E-4N4-AA	1	2	4	3/4	4	3/8	1-1/8
WTPI150-2N-AA	WTPI150E-2N-AA	1-1/2	1	2	1	3	1/2	5/8
WTPI150-4N-AA	WTPI150E-4N-AA	1-1/2	2	3	1	3	1/2	5/8
WTPI150-4N4-AA	WTPI150E-4N4-AA	1-1/2	2	4	1	4	1/2	1-1/8
WTPI200-2N-AA	WTPI200E-2N-AA	2	1	2	1-1/4	3	5/8	5/8
WTPI200-4N-AA	WTPI200E-4N-AA	2	2	3	1-1/4	3	5/8	5/8
WTPI200-4N4-AA	WTPI200E-4N4-AA	2	2	4	1-1/4	4	5/8	1-1/8
WTPI250-2N-AA	WTPI250E-2N-AA	2-1/2	1	2	1-1/2	3	5/8	5/8
WTPI250-4N-AA	WTPI250E-4N-AA	2-1/2	2	3	1-1/2	3	5/8	5/8
WTPI250-4N4-AA	WTPI250E-4N4-AA	2-1/2	2	4	1-1/2	4	5/8	1-1/8
WTPI300-2N-AA	WTPI300E-2N-AA	3	1	2	1-3/4	3	5/8	5/8
WTPI300-4N-AA	WTPI300E-4N-AA	3	2	3	1-3/4	3	5/8	5/8
WTPI300-4N4-AA	WTPI300E-4N4-AA	3	2	4	1-3/4	4	5/8	1-1/8
WTPI350-4N-AA	WTPI350E-4N-AA	3-1/2	2	3	2	3	3/4	5/8
WTPI350-4N4-AA	WTPI350E-4N4-AA	3-1/2	2	4	2	4	3/4	1-1/8
WTPI400-6N6-AA	WTPI400E-6N6-AA	4	3	6	2-1/4	4	3/4	1-1/8
WTPI400-4N-AA	WTPI400E-4N-AA	4	2	3	2-1/4	3	3/4	5/8
WTPI400-4N4-AA	WTPI400E-4N4-AA	4	2	4	2-1/4	4	3/4	1-1/8
WTPI500-4N-AA	WTPI500E-4N-AA	5	2	3	2-7/8	3	7/8	5/8
WTPI500-4N4-AA	WTPI500E-4N4-AA	5	2	4	2-7/8	4	7/8	1-1/8
WTPI600-4N-AA	WTPI600E-4N-AA	6	2	3	3-3/8	3	1	5/8
WTPI600-4N4-AA	WTPI600E-4N4-AA	6	2	4	3-3/8	4	1	1-1/8

DOSSERT® TYPE WTPIC-N-AA

Internal Center Formed Welded Terminal

Material

Aluminum Alloy

Notes

1. Add "U" for undrilled. EX: WTPIC100-2NU-AA
2. Add "F" for finished on both sides. EX: WTPIC100-2NF-AA

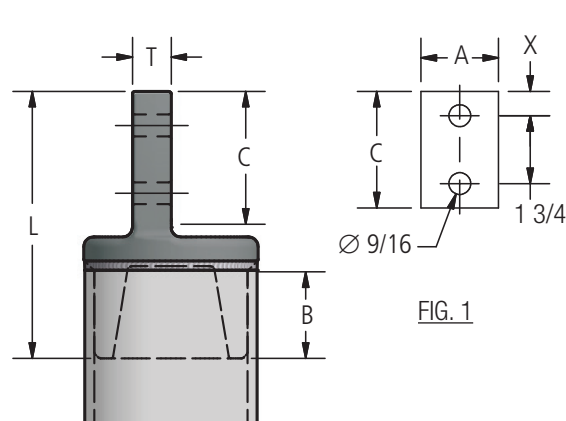


FIG. 1

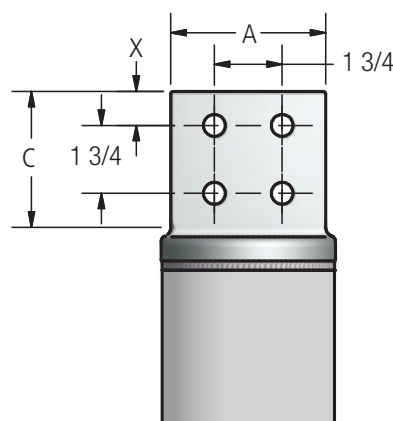


FIG. 2

Ordering Information

CATALOG NUMBER		SPS	FIGURE NUMBER	DIMENSIONS IN INCHES					
SCH 40	SCH 80			A	B	C	L	T	X
WTPIC100-2N-AA	WTPIC100E-2N-AA	1	1	2	3/4	3	4 1/4	3/8	5/8
WTPIC100-4N-AA	WTPIC100E-4N-AA	1	2	3	3/4	3	4 1/4	3/8	5/8
WTPIC150-2N-AA	WTPIC150E-2N-AA	1-1/2	2	2	1	3	4 1/2	1/2	5/8
WTPIC150-4N-AA	WTPIC150E-4N-AA	1-1/2	1	3	1	3	4 1/2	1/2	5/8
WTPIC200-2N-AA	WTPIC200E-2N-AA	2	2	2	1 1/4	3	4 3/4	5/8	5/8
WTPIC200-4N4-AA	WTPIC200E-4N4-AA	2	1	4	1 1/4	4	6 1/4	5/8	1 1/8
WTPIC200-4N-AA	WTPIC200E-4N-AA	2	2	3	1 1/4	3	4 3/4	5/8	5/8
WTPIC250-2N-AA	WTPIC250E-2N-AA	2-1/2	2	2	1 1/2	3	5 1/2	5/8	5/8
WTPIC250-4N4-AA	WTPIC250E-4N4-AA	2-1/2	1	4	1 1/2	4	6 1/2	5/8	1 1/8
WTPIC250-4N-AA	WTPIC250E-4N-AA	2-1/2	2	3	1 1/2	3	5 1/2	5/8	5/8
WTPIC300-4N4-AA	WTPIC300E-4N4-AA	3	2	4	1 3/4	4	6 3/4	5/8	1 1/8
WTPIC300-4N-AA	WTPIC300E-4N-AA	3	2	3	1 3/4	3	5 3/4	5/8	5/8
WTPIC350-4N4-AA	WTPIC350E-4N4-AA	3-1/2	2	4	2	4	7 1/4	3/4	1 1/8
WTPIC350-4N-AA	WTPIC350E-4N-AA	3-1/2	2	3	2	3	6 1/4	3/4	5/8
WTPIC400-4N4-AA	WTPIC400E-4N4-AA	4	2	4	2 1/4	4	7 1/4	3/4	1 1/8
WTPIC400-4N-AA	WTPIC400E-4N-AA	4	2	3	2 1/4	3	6 1/4	3/4	5/8
WTPIC500-4N4-AA	WTPIC500E-4N4-AA	5	2	4	2 1/2	4	8 1/8	7/8	1 1/8
WTPIC500-4N-AA	WTPIC500E-4N-AA	5	2	3	2 1/2	3	7 1/8	7/8	5/8
WTPIC600-4N4-AA	WTPIC600E-4N4-AA	6	2	4	3 3/8	4	8 3/4	1	1 1/8

DOSSERT® TYPE WTPO-N-AA, WTPOA-N-45-AA, WTPOA-N-90-AA


WTPO-N-AA flush half sleeve welded terminal, WTPOA-N-45-AA flush 45° half sleeve welded terminal, and WTPOA-N-90-AA flush 90° half sleeve welded terminal.

Material


Aluminum Alloy

Notes

1. To specify contact finish on top surface of pad in addition to bottom surface add letter "F" to the catalog number. Ex: 2NF - 4NF - 4N4F.
2. For a 45° flush half sleeve terminal, 2" SPS, and 4", 4 hole NEMA pad order: WTPOA200-4N4-45-AA.
3. For a 90° flush half sleeve terminal, 2" SPS, and 4", 4 hole NEMA pad finished on both sides order: WTPOA200-4N4-90-AA.

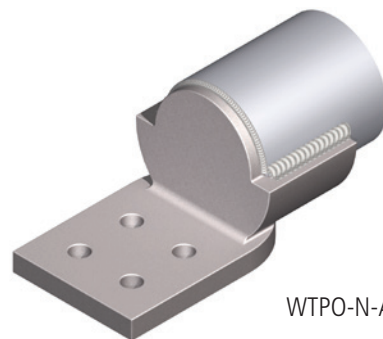


WTPO-N-AA

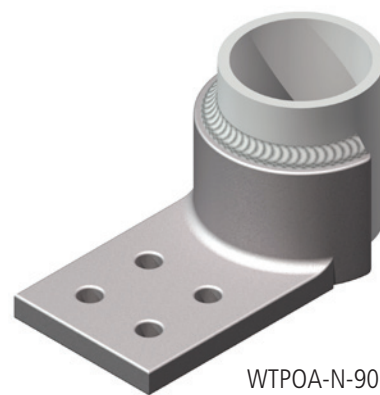


WTPOA-N-90-AA



WTPO-N-AA



WTPOA-N-45-AA



WTPOA-N-90-AA


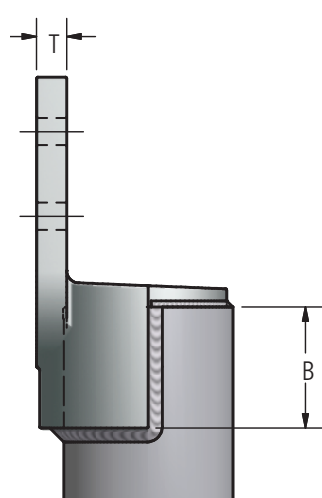


FIG. 1

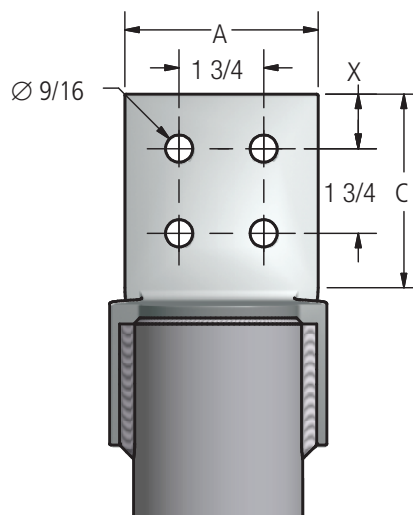


FIG. 2



230 kV Aluminum Welded Terminal Connectors

DOSSERT®

TYPE WTPO-N-AA, WTPOA-N-45-AA, WTPOA-N-90-AA

Ordering Information

CATALOG NUMBER	SPS	FIGURE NUMBER	DIMENSIONS IN INCHES				
			A	B	C	T	X
WTPO75-2N-AA	3/4	1	1 5/8	1	3	3/8	5/8
WTPO75-4N-AA	3/4	2	3	1	3	3/8	5/8
WTPO100-2N-AA	1	1	2	1 1/8	3	3/8	5/8
WTPO100-4N-AA	1	2	3	1 1/8	3	3/8	5/8
WTPO125-2N-AA	1 1/4	1	2	1 3/8	3	3/8	5/8
WTPO125-4N-AA	1 1/4	2	3	1 3/8	3	7/16	5/8
WTPO150-2N-AA	1 1/2	1	2	1 5/8	3	7/16	5/8
WTPO150-4N-AA	1 1/2	2	3	1 5/8	3	1/2	5/8
WTPO150-4N4-AA	1 1/2	2	4	1 5/8	4	1/2	1 1/8
WTPO200-2N-AA	2	1	2	1 7/8	3	7/16	5/8
WTPO200-4N-AA	2	2	3	1 7/8	3	1/2	5/8
WTPO200-4N4-AA	2	2	4	1 7/8	4	1/2	1 1/8
WTPO250-2N-AA	2 1/2	1	2	2 1/4	3	5/8	5/8
WTPO250-4N-AA	2 1/2	2	3	2 1/4	3	5/8	5/8
WTPO250-4N4-AA	2 1/2	2	4	2 1/4	4	5/8	1 1/8
WTPO300-2N-AA	3	1	2	2 1/2	3	5/8	5/8
WTPO300-4N-AA	3	2	3	2 1/2	3	5/8	5/8
WTPO300-4N4-AA	3	2	4	2 1/2	4	5/8	1 1/8
WTPO350-2N-AA	3 1/2	1	2	3	3	3/4	5/8
WTPO350-4N-AA	3 1/2	2	3	3	3	3/4	5/8
WTPO350-4N4-AA	3 1/2	2	4	3	4	3/4	1 1/8
WTPO400-2N-AA	4	1	2	3 1/2	3	3/4	5/8
WTPO400-4N-AA	4	2	3	3 1/2	3	3/4	5/8
WTPO400-4N4-AA	4	2	4	3 1/2	4	3/4	1 1/8
WTPO500-2N-AA	5	2	3	3 1/2	3	7/8	5/8
WTPO500-4N4-AA	5	2	4	3 1/2	4	7/8	1 1/8
WTPO600-4N4-AA	6	2	4	3 5/8	4	1	1 1/8

DOSSERT® TYPE WTPOC-AA

Welded Terminal Lug

Material

Aluminum Alloy

Notes

1. Add suffix "F" to the catalog number to add contact finish to both pad surfaces.
EX: WTPOC200-2NF-AA

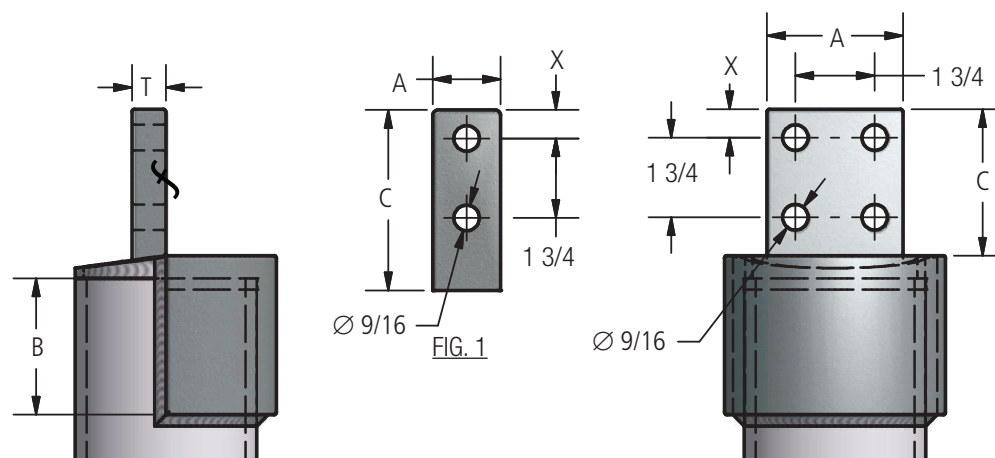
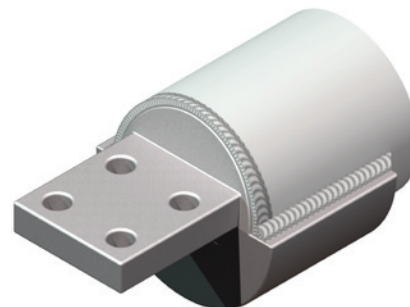


FIG. 2

Ordering Information

CATALOG NUMBER	SPS	FIGURE NUMBER	DIMENSIONS IN INCHES				
			A	B	C	T	X
WTPOC100-2N-AA	1	1	2	1 1/8	3	3/8	5/8
WTPOC100-4N-AA	1	2	3	1 1/8	3	3/8	5/8
WTPOC125-2N-AA	1-1/4	1	2	1 3/8	3	1/2	5/8
WTPOC125-4N-AA	1-1/4	2	3	1 3/8	3	1/2	5/8
WTPOC150-2N-AA	1-1/2	1	2	1 5/8	3	1/2	5/8
WTPOC150-4N-AA	1-1/2	2	3	1 5/8	3	1/2	5/8
WTPOC150-4N4-AA	1-1/2	2	4	1 5/8	4	1/2	1 1/8
WTPOC200-2N-AA	2	1	2	1 7/8	3	5/8	5/8
WTPOC200-4N-AA	2	2	3	1 7/8	3	5/8	5/8
WTPOC200-4N4-AA	2	2	4	1 7/8	4	5/8	1 1/8
WTPOC250-2N-AA	2-1/2	1	2	2 1/4	3	5/8	5/8
WTPOC250-4N-AA	2-1/2	2	3	2 1/4	3	5/8	5/8
WTPOC250-4N4-AA	2-1/2	2	4	2 1/4	4	5/8	1 1/8
WTPOC300-2N-AA	3	1	2	2 1/2	3	5/8	5/8
WTPOC300-4N-AA	3	2	3	2 1/2	3	5/8	5/8
WTPOC300-4N4-AA	3	2	4	2 1/2	4	5/8	1 1/8
WTPOC350-2N-AA	3-1/2	1	2	3	3	3/4	5/8
WTPOC350-4N-AA	3-1/2	2	3	3	3	3/4	5/8
WTPOC350-4N4-AA	3-1/2	2	4	3	4	3/4	1 1/8
WTPOC400-2N-AA	4	1	2	3 1/2	3	3/4	5/8
WTPOC400-4N-AA	4	2	3	3 1/2	3	3/4	5/8
WTPOC400-4N4-AA	4	2	4	3 1/2	4	3/4	1 1/8
WTPOC500-4N-AA	5	2	3	3 1/2	3	7/8	5/8
WTPOC500-4N4-AA	5	2	4	3 1/2	4	7/8	1 1/8
WTPOC600-4N4-AA	6	2	4	3 1/2	4	1	1 1/8

DOSSERT® TYPE WWSC-N-AA

WWSC-N-AA is a variable angle terminal for aluminum pipe conductor. The angle is limited based on conductor diameter.

Material

Aluminum Alloy


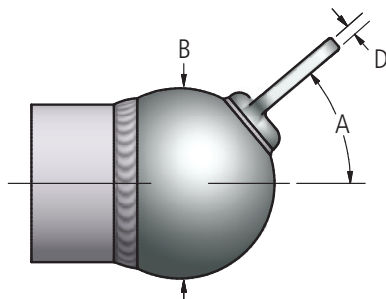
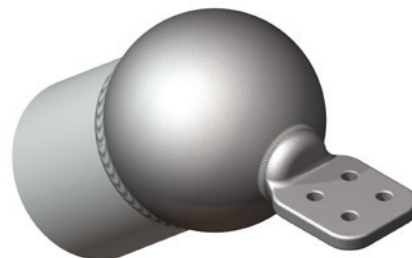


FIG. 1




FIG. 2

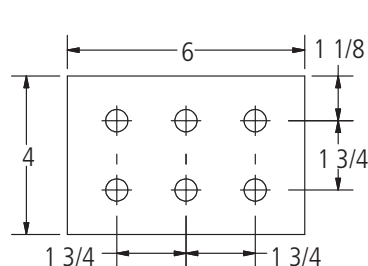


FIG. 3

Ordering Information

CATALOG NUMBER	FIG NUMBER	CATALOG NUMBER	FIG NUMBER	CATALOG NUMBER	FIG NUMBER	SPS	DIMENSIONS IN INCHES			MAX KV
							A° (MAX)	B	D	
WWSC500-4N-AA	1	WWSC500-4N4-AA	2	WWSC500-6N4-AA	3	1 1/2	130	5	5/16	230
WWSC500-4N-AA	1	WWSC500-4N4-AA	2	WWSC500-6N4-AA	3	2	125	5	5/16	230
WWSC500-4N-AA	1	WWSC500-4N4-AA	2	WWSC500-6N4-AA	3	2 1/2	120	5	5/16	230
WWSC500-4N-AA	1	WWSC500-4N4-AA	2	WWSC500-6N4-AA	3	3	110	5	5/16	230
WWSC500-4N-AA	1	WWSC500-4N4-AA	2	WWSC500-6N4-AA	3	3 1/2	100	5	5/16	230
WWSC500-4N-AA	1	WWSC500-4N4-AA	2	WWSC500-6N4-AA	3	4	90	5	5/16	230
WWSC800-4N-AA	1	WWSC800-4N4-AA	2	WWSC800-6N4-AA	3	3	120	8	7/16	345
WWSC800-4N-AA	1	WWSC800-4N4-AA	2	WWSC800-6N4-AA	3	3 1/2	120	8	7/16	345
WWSC800-4N-AA	1	WWSC800-4N4-AA	2	WWSC800-6N4-AA	3	4	110	8	7/16	345
WWSC800-4N-AA	1	WWSC800-4N4-AA	2	WWSC800-6N4-AA	3	5	110	8	7/16	345
WWSC800-4N-AA	1	WWSC800-4N4-AA	2	WWSC800-6N4-AA	3	6	100	8	7/16	345
WWSC800-4N-AA	1	WWSC800-4N4-AA	2	WWSC800-6N4-AA	3	8 OD	65	8	7/16	345
WWSC1200-4N-AA	1	WWSC1200-4N4-AA	2	WWSC1200-6N4-AA	3	4	140	12	3/8	500
WWSC1200-4N-AA	1	WWSC1200-4N4-AA	2	WWSC1200-6N4-AA	3	5	135	12	3/8	500
WWSC1200-4N-AA	1	WWSC1200-4N4-AA	2	WWSC1200-6N4-AA	3	6	130	12	3/8	500
WWSC1200-4N-AA	1	WWSC1200-4N4-AA	2	WWSC1200-6N4-AA	3	8 OD	120	12	3/8	500

DOSSERT® TYPE WXL-90V-AA


Expansion Terminal Connector

Material



Aluminum Alloy

Notes

1. If alignment guide is not needed add "P" to the catalog number.
EX: WXL200P-4N4-90V-AA

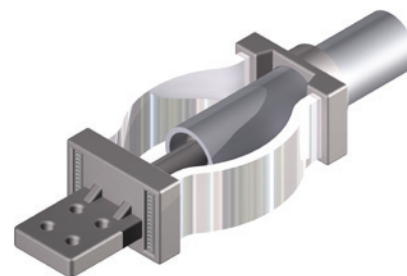

WXL-90V-AA

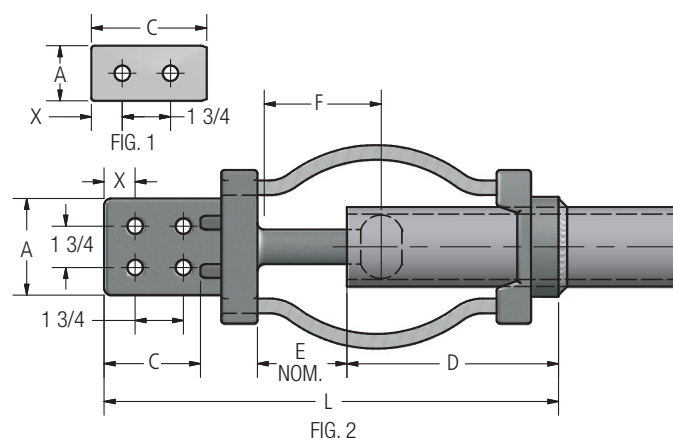

Ordering Information

CATALOG NUMBER	SPS	FIGURE NUMBER	DIMENSIONS IN INCHES							
			A	C	D	E	F	L	T	X
WXL100-2N-90V-AA	1	1	1 3/4	3	5 1/8	1 1/2	3 1/2	10 5/8	5/8	5/8
WXL100-4N-90V-AA	1	2	3	3	5 1/8	1 1/2	3 1/2	10 5/8	1/2	5/8
WXL125-2N-90V-AA	1 1/4	1	2 1/4	3	6	1 1/2	3 1/2	11 1/2	1/2	5/8
WXL125-4N-90V-AA	1 1/4	2	3	3	6	1 1/2	3 1/2	11 1/2	1/2	5/8
WXL150-2N-90V-AA	1 1/2	1	2 1/2	3	7 1/8	1 1/2	3 1/2	12 3/4	5/8	5/8
WXL150-4N-90V-AA	1 1/2	2	3	3	7 1/8	1 1/2	3 1/2	12 3/4	5/8	5/8
WXL200-2N-90V-AA	2	1	3	3	7 3/16	2 1/2	4 1/2	14 3/8	3/4	5/8
WXL200-4N-90V-AA	2	2	3	3	7 3/16	2 1/2	4 1/2	14 3/8	3/4	5/8
WXL200-4N4-90V-AA	2	2	4	4	7 3/16	2 1/2	4 1/2	15 3/8	3/4	1 1/8
WXL250-2N-90V-AA	2 1/2	1	3	3	7 11/16	2 1/2	4 1/2	14 7/8	3/4	5/8
WXL250-4N-90V-AA	2 1/2	2	3	3	7 11/16	2 1/2	4 1/2	14 7/8	3/4	5/8
WXL250-4N4-90V-AA	2 1/2	2	4	4	7 11/16	2 1/2	4 1/2	15 7/8	3/4	1 1/8
WXL300-2N-90V-AA	3	1	3	3	8 3/16	2 1/2	4 1/2	16	7/8	5/8
WXL300-4N-90V-AA	3	2	3	3	8 3/16	2 1/2	4 1/2	16	7/8	5/8
WXL300-4N4-90V-AA	3	2	4	4	8 3/16	2 1/2	4 1/2	17	7/8	1 1/8
WXL350-2N-90V-AA	3 1/2	1	3	3	9 3/4	2 1/2	4 1/2	17 5/16	7/8	5/8
WXL350-4N-90V-AA	3 1/2	2	3	3	9 3/4	2 1/2	4 1/2	17 5/16	7/8	5/8
WXL350-4N4-90V-AA	3 1/2	2	4	4	9 3/4	2 1/2	4 1/2	18 5/16	7/8	1 1/8
WXL400-2N-90V-AA	4	1	3	3	10	2 1/2	4 1/2	18	1	5/8
WXL400-4N-90V-AA	4	2	3	3	10	2 1/2	4 1/2	18	1	5/8
WXL400-4N4-90V-AA	4	2	4	4	10	2 1/2	4 1/2	19	1	1 1/8
WXL500-4N-90V-AA	5	2	3	3	10	2 1/2	4 1/2	18	1 1/4	5/8
WXL500-4N4-90V-AA	5	2	4	4	10	2 1/2	4 1/2	19	1 1/4	1 1/8
WXL600-4N-90V-AA	6	2	3	3	12	2 1/2	4 1/2	20 3/8	1 3/8	5/8
WXL600-4N4-90V-AA	6	2	4	4	12	2 1/2	4 1/2	21 3/8	1 3/8	1 1/8

DOSSERT® TYPE WXL-AA, WXL-E-AA Expansion Terminal Connector

WWSC-AA is a variable angle coupler for aluminum pipe conductor.

Material

Aluminum Alloy

Notes

1. Add "P" to suffix of WXL for no alignment guide. EX: WXL200-4N-AA
2. Add "F" to suffix of pad type for contact finish on both sides of the pad. EX: WXL200-4NF-AA

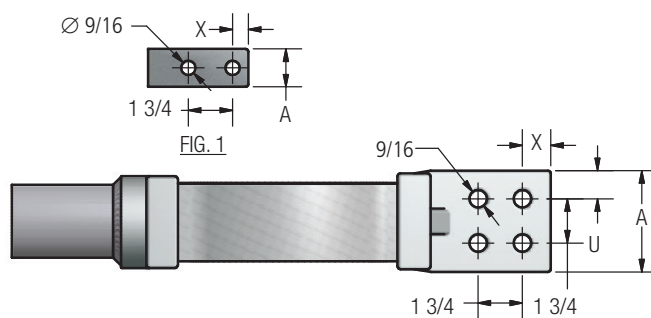
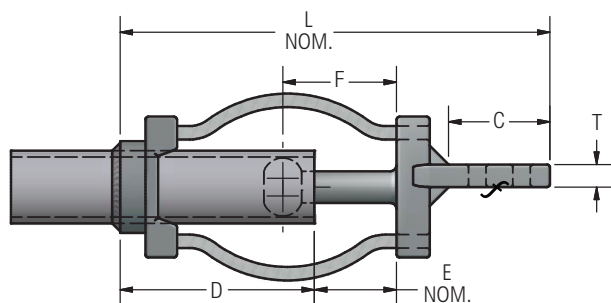
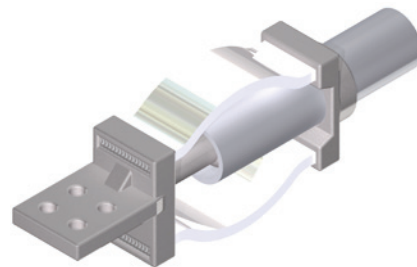


FIG. 2

Ordering Information

CATALOG NUMBER		SPS	FIGURE NUMBER	DIMENSIONS IN INCHES								
SCH 40	SCH 80			A	C	D	E	F	L	T	U	X
WXL100-2N-AA	WXL100E-2N-AA	1	1	1-3/4	3	5-1/8	1-1/2	3-1/2	10-5/8	1/2	NA	5/8
WXL100-4N-AA	WXL100E-4N-AA	1	2	3	3	5-1/8	1-1/2	3-1/2	10-5/8	1/2	5/8	5/8
WXL125-2N-AA	WXL125E-2N-AA	1-1/4	1	2-1/4	3	6	1-1/2	3-1/2	11-1/2	1/2	NA	5/8
WXL125-4N-AA	WXL125E-4N-AA	1-1/4	2	3	3	6	1-1/2	3-1/2	11-1/2	1/2	5/8	5/8
WXL125-4N4-AA	WXL125E-4N4-AA	1-1/4	2	4	4	6	1-1/2	3-1/2	11-1/2	1/2	1-1/8	1-1/8
WXL150-2N-AA	WXL150E-2N-AA	1-1/2	1	2-1/2	3	7-1/8	1-1/2	3-1/2	12-3/4	5/8	5/8	5/8
WXL150-4N-AA	WXL150E-4N-AA	1-1/2	2	3	3	7-1/8	1-1/2	3-1/2	12-3/4	5/8	5/8	5/8
WXL150-4N4-AA	WXL150E-4N4-AA	1-1/2	2	3	3	7-1/8	1-1/2	3-1/2	12-3/4	5/8	5/8	5/8
WXL200-2N-AA	WXL200E-2N-AA	2	1	3	3	7-3/16	2-1/2	4-1/2	14-3/8	3/4	NA	5/8
WXL200-4N-AA	WXL200E-4N-AA	2	2	3	3	7-3/16	2-1/2	4-1/2	14-3/8	3/4	5/8	5/8
WXL200-4N4-AA	WXL200E-4N4-AA	2	2	4	4	7-3/16	2-1/2	4-1/2	14-3/8	3/4	1-1/8	1-1/8
WXL250-2N-AA	WXL250E-2N-AA	2-1/2	1	3	3	7-11/16	2-1/2	4-1/2	14-7/8	3/4	NA	5/8
WXL250-4N-AA	WXL250E-4N-AA	2-1/2	2	3	3	7-11/16	2-1/2	4-1/2	14-7/8	3/4	5/8	5/8
WXL250-4N4-AA	WXL250E-4N4-AA	2-1/2	2	4	4	7-11/16	2-1/2	4-1/2	15-7/8	3/4	1-1/8	1-1/8
WXL300-2N-AA	WXL300E-2N-AA	3	1	3	3	8-3/16	2-1/2	4-1/2	16	7/8	NA	5/8
WXL300-4N-AA	WXL300E-4N-AA	3	2	3	3	8-3/16	2-1/2	4-1/2	16	7/8	5/8	5/8
WXL300-4N4-AA	WXL300E-4N4-AA	3	2	4	4	8-3/16	2-1/2	4-1/2	17	7/8	1-1/8	1-1/8
WXL350-2N-AA	WXL350E-2N-AA	3-1/2	1	3	3	9-3/4	2-1/2	4-1/2	17-5/16	7/8	NA	5/8
WXL350-4N-AA	WXL350E-4N-AA	3-1/2	2	3	3	9-3/4	2-1/2	4-1/2	17-5/16	7/8	5/8	5/8
WXL350-4N4-AA	WXL350E-4N4-AA	3-1/2	2	4	4	9-3/4	2-1/2	4-1/2	18-5/16	7/8	1-1/8	1-1/8
WXL400-2N-AA	WXL400E-2N-AA	4	1	3	3	10	2-1/2	4-1/2	18	1	NA	5/8
WXL400-4N-AA	WXL400E-4N-AA	4	2	3	3	10	2-1/2	4-1/2	18	1	5/8	5/8
WXL400-4N4-AA	WXL400E-4N4-AA	4	2	4	4	10	2-1/2	4-1/2	19	1	1-1/8	1-1/8
WXL500-4N-AA	WXL500E-4N-AA	5	2	3	3	10	2-1/2	4-1/2	18	1-1/4	5/8	5/8
WXL500-4N4-AA	WXL500E-4N4-AA	5	2	4	4	10	2-1/2	4-1/2	19	1-1/4	1-1/8	1-1/8
WXL600-4N-AA	WXL600E-4N-AA	6	2	3	3	12	2-1/2	4-1/2	20-3/8	1-3/8	5/8	5/8
WXL600-4N4-AA	WXL600E-4N4-AA	6	2	4	4	12	2-1/2	4-1/2	21-3/8	1-3/8	1-1/8	1-1/8





DOSSERT® TYPE WXLO-AA, WXLO-E-AA Expansion Terminal Connector

Material

Aluminum Alloy

Note

1. Add "P" to suffix of WXLO for no alignment guide. EX: WXLOP300-4N-AA
2. Add "F" to suffix of pad type for contact finish on both sides of the pad. EX: WXLO300-4NF-AA

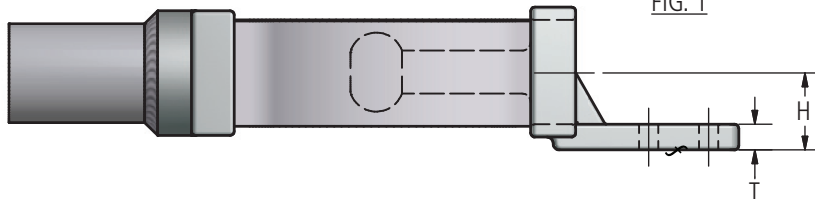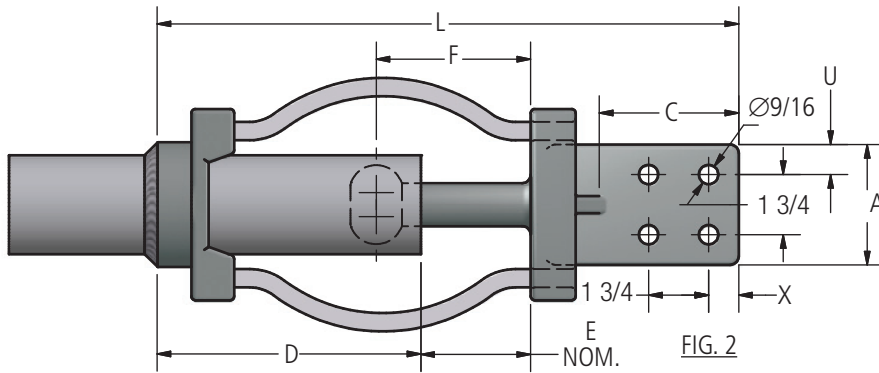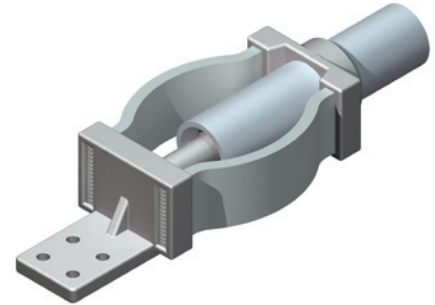



230 kV Aluminum Welded Terminal Connectors

DOSSERT® TYPE WXLO-AA, WXLO-E-AA

Ordering Information

CATALOG NUMBER		SPS/ EHPS	FIGURE NUMBER	DIMENSIONS IN INCHES									
SCH 40	SCH 80			A	C	D	E	F	H	L	T	U	X
WXLO100-2N-AA	WXLO100E-2N-AA	1	1	1 3/4	3	5 1/8	1 1/2	3 1/2	1 1/8	10 5/8	5/8	NA	5/8
WXLO100-4N-AA	WXLO100E-4N-AA	1	2	3	3	5 1/8	1 1/2	3 1/2	1 5/16	10 5/8	1/2	5/8	5/8
WXLO125-2N-AA	WXLO125E-2N-AA	1 1/4	1	2 1/4	3	6	1 1/2	3 1/2	1 5/16	11 1/2	1/2	NA	5/8
WXLO125-4N-AA	WXLO125E-4N-AA	1 1/4	2	3	3	6	1 1/2	3 1/2	1 5/16	11 1/2	1/2	5/8	5/8
WXLO125-4N4-AA	WXLO125E-4N4-AA	1 1/4	2	4	4	6	1 1/2	3 1/2	1 5/8	12 3/4	1/2	1 1/8	1 1/8
WXLO150-2N-AA	WXLO150E-2N-AA	1 1/2	1	2 1/2	3	7 1/8	1 1/2	3 1/2	1 5/8	12 3/4	5/8	NA	5/8
WXLO150-4N-AA	WXLO150E-4N-AA	1 1/2	2	3	3	7 1/8	1 1/2	3 1/2	1 5/8	12 3/4	5/8	5/8	5/8
WXLO200-4N-AA	WXLO200E-4N-AA	2	2	3 1/4	3 1/2	7 3/16	2 1/2	4 1/2	2	14 3/8	3/4	3/4	7/8
WXLO200-4N4-AA	WXLO200E-4N4-AA	2	2	4	4	7 3/16	2 1/2	4 1/2	2	15 3/8	3/4	1 1/8	1 1/8
WXLO250-4N-AA	WXLO250E-4N-AA	2 1/2	2	4 1/4	4 1/4	7 11/16	2 1/2	4 1/2	2 1/4	14 7/8	3/4	1 1/4	1 1/4
WXLO250-4N4-AA	WXLO250E-4N4-AA	2 1/2	2	4	4	7 11/16	2 1/2	4 1/2	2 1/4	15 7/8	3/4	1 1/8	1 1/8
WXLO300-4N-AA	WXLO300E-4N-AA	3	2	3	3	8 3/16	2 1/2	4 1/2	2 5/8	16	7/8	5/8	5/8
WXLO300-4N4-AA	WXLO300E-4N4-AA	3	2	4	4	8 3/16	2 1/2	4 1/2	2 5/8	17	7/8	1 1/8	1 1/8
WXLO350-4N-AA	WXLO350E-4N-AA	3 1/2	2	3	3	9 3/4	2 1/2	4 1/2	2 15/16	17 5/16	7/8	5/8	5/8
WXLO350-4N4-AA	WXLO350E-4N4-AA	3 1/2	2	4	4	9 3/4	2 1/2	4 1/2	2 15/16	18 5/16	7/8	1 1/8	1 1/8
WXLO400-4N-AA	WXLO400E-4N-AA	4	2	3	3	10	2 1/2	4 1/2	3 1/4	18	1	5/8	5/8
WXLO400-4N4-AA	WXLO400E-4N4-AA	4	2	4	4	10	2 1/2	4 1/2	3 1/4	19	1	1 1/8	1 1/8
WXLO500-4N-AA	WXLO500E-4N-AA	5	2	3	3	10	2 1/2	4 1/2	3 1/2	18	1 1/4	5/8	5/8
WXLO500-4N4-AA	WXLO500E-4N4-AA	5	2	4	4	10	2 1/2	4 1/2	3 1/2	19	1 1/4	1 1/8	1 1/8
WXLO600-4N-AA	WXLO600E-4N-AA	6	2	3	3	12	2 1/2	4 1/2	4 1/4	20 3/8	1 3/8	5/8	5/8
WXLO600-4N4-AA	WXLO600E-4N4-AA	6	2	4	4	12	2 1/2	4 1/2	4 1/4	21 3/8	1 3/8	1 1/8	1 1/8