



Inverter-chargers

Battery monitoring



**Engineered power**

Inverters

Battery chargers

Battery splitters

Battery separators

DC/DC converters

# Summary

<b>The company</b>	<b>3</b>
<b>Applications</b>	<b>6</b>
- Applications in remote areas	6
- Mobile applications	8
- Backup applications	10
<b>Products</b>	<b>12</b>
- Sine wave inverter-chargers	12
- Sine wave inverters	20
- Battery chargers	24
- DC/DC converters	25
- Battery splitters	26
- Battery separators	26
- Battery protection	27
- Battery monitoring	27
<b>Appendices</b>	<b>28</b>
- Technical sheets	28
- How to find us	36

## Experience and competences

Studer Innotec was founded in 1987 by Roland Studer, current General Director. From 1987 to 1991, the company developed its areas of competences in the solar photovoltaics and in the energy conversion, with the first inverters (DC/AC).

In 2005, the Sommet Prize, organized among others by the Union Bank of Switzerland was awarded to Studer Innotec, for its capabilities to innovate as well as to export its inverters.



## 90% of the turnover exported

The launch in 1994 of the Twinpower, then in 1995 of the SI, both sine wave inverters with unbeaten performances so far, makes Studer Innotec's offer very attractive to demanding export markets.


This is the start of an export business which represents now some 90% of its turnover.



**Photos credits**  
Robert Hofer: Studer's products; Perspective: 4, 5, 24; Steca: p. 6 bottom; Jeanneau: p. 8 top; Meteorisk: p. 3, 8, 36; Siblik: p. 21.

**Graphism**  
Atelier Perspective, R. Gigon, Sion.  
February 2010



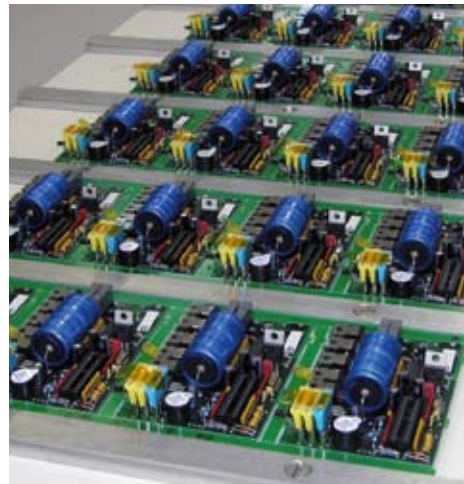

### Leadership

Studer Innotec is today the leader of the inverter market in Switzerland and in Europe, and a major actor in the rest of the World.

It manages a network of more than one hundred distributors in more than 70 countries.

Thanks to a large range of products, it is the only inverter manufacturer to cover the solar photovoltaic market as well as the nautical, the mobile, the backup and the telecom markets.

### Integration and flexibility of the production

The philosophy of the company has been, from the very beginning, to master the process from A to Z, so from the development to the sales of the products. This is why Studer Innotec has started as a vertically integrated manufacturer, therefore more flexible than its competitors.

In other respects, to turn the markets expectations into products and services, an 8 people team is fully dedicated to Research & Development.

### The choice of the performance

The high-tech design of its products, as well as the choice of the performance and of the reliability, brings Studer Innotec to select its components with the highest care. This is the reason why it has chosen the latest technologies, like the digital signal processors (DSP) which provide better performances and a higher efficiency to its inverters.





### Comfort and versatility of the products

In future, this choice for quality and for service will continue to guide our strategic axes.

Beyond the performances, the next inverters will provide more comfort and will offer a greater versatility to their users.

### Closeness to the clients

From research to industrial implementation, Studer Innotec intends to keep on investing financially and also in human resources, in order to maintain its lead in terms of the offer and of the closeness to the clients. This closeness expresses itself also by a network of partners qualified to service its products. The addresses of these partners, as well as the distributors, will be found on the company's website, under the heading «Distributors».

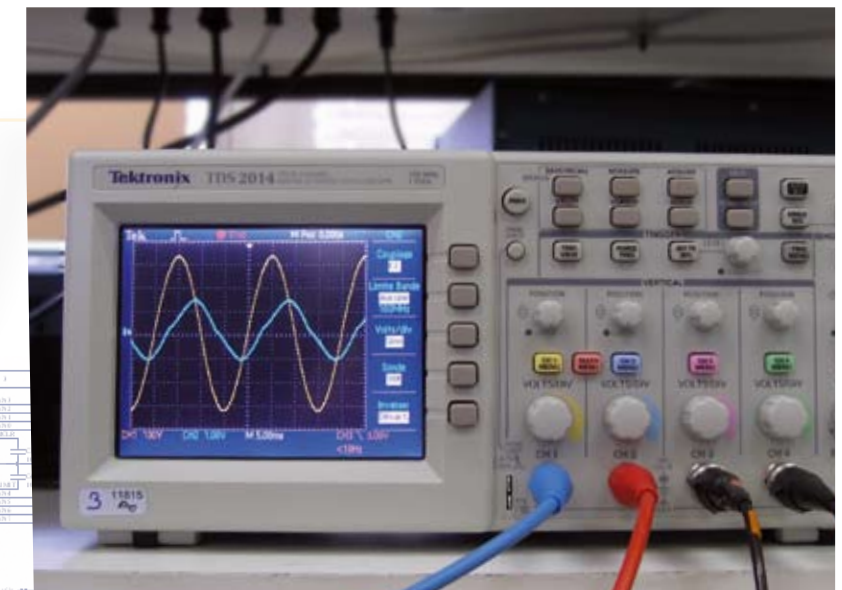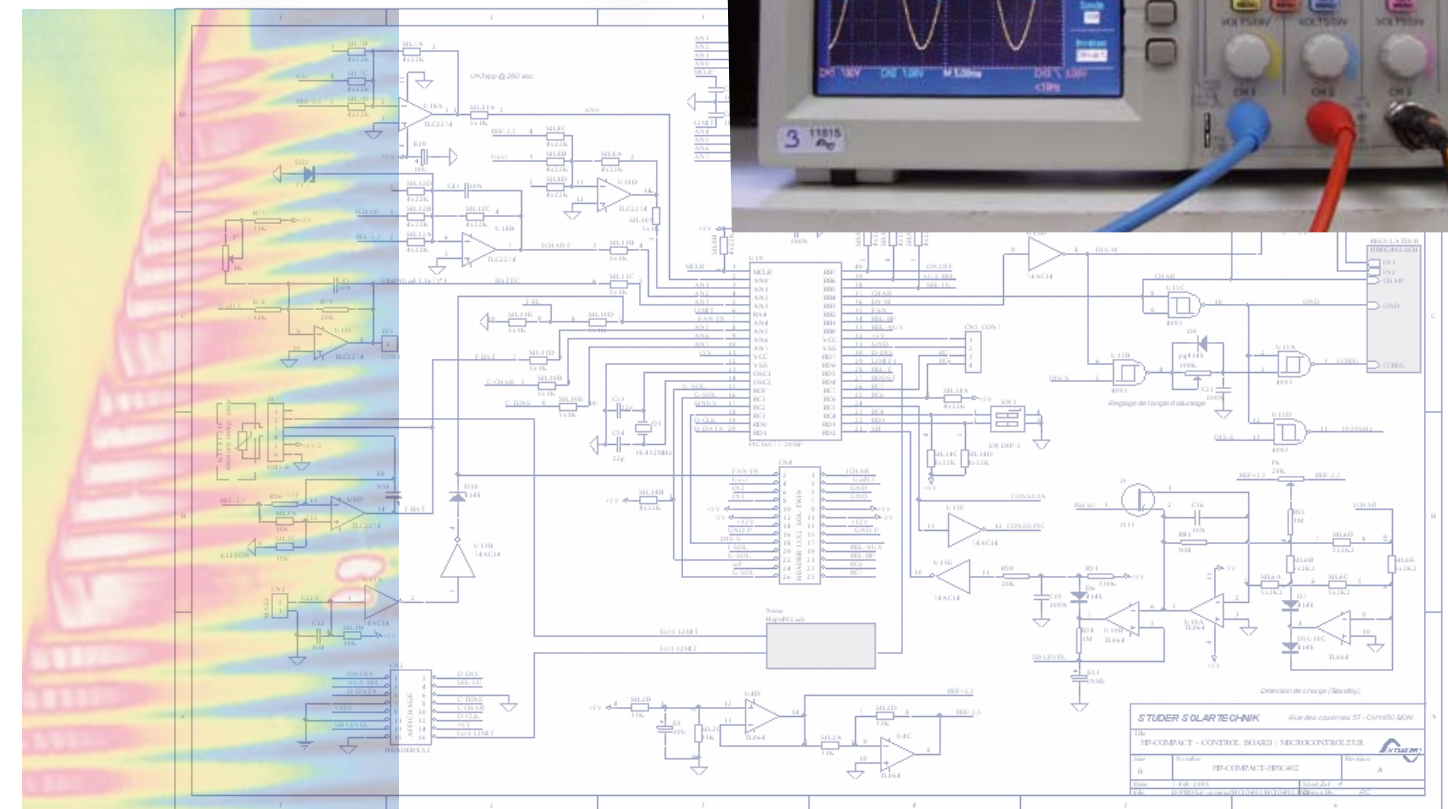






The examples below show the products in some stand-alone applications.

The diagram illustrates a hybrid power system architecture. On the left, a wind turbine and a solar panel are connected to a DC bus. A generator is also connected to this DC bus via a rectifier. A battery storage unit is connected to the DC bus. The DC bus is connected to a 'GRID INVERTER'. The inverter outputs AC power to a distribution line. This line connects to a second 'GRID INVERTER' which is connected to three more solar panels. The distribution line also branches off to four houses, each with its own battery storage and a small inverter/charger unit. The houses are connected to the AC distribution line.

Various power sources supply energy to several consumer points.



**Xtender serie** p. 12  
(1500 - 63000 VA)

This hybrid system provides a greener energy source and an increased autonomy in remote areas. The AC voltage supply to the appliances is derived from the energy source through the inverter, while the battery is charged from the solar panel through the regulator.

*This hybrid system provides a great flexibility in supply and an increased autonomy in relation to each source of energy.*

*The AC voltage supply to the appliances is done directly from the energy source through the transfer relay, or from the battery through the inverter function.*

*The charger function allows to charging the battery with the genset. The size of the genset can be reduced thanks to the function Smart-Boost.*

**Xtender serie** p. 12  
(1500 - 63000 VA)

**Compact series** p. 18  
(1100 - 7000 VA)

This is a complete solar system. The inverter and the optional battery bank controller function allows to use the appliances with AC voltage and the battery bank with DC voltage from the solar panels.

*This is a complete solar system that the combination of the inverter and of the optional built-in solar charge controller function allows to create. The inverter supplies the appliances with AC voltage and charges the battery with DC voltage from the solar generator.*



**AJ serie** p. 20  
(200 - 2000 VA)

The diagram illustrates a power system architecture. On the left, three energy sources are shown: a solar panel, a sun icon, and a wind turbine. Arrows labeled 'DC' point from each of these sources to a central 'REGULATOR' block. From the 'REGULATOR', a 'DC' arrow points to a battery icon. Another 'DC' arrow points from the 'REGULATOR' to an 'INVERTER' block. The inverter is labeled 'STUDER' and has an 'AC' arrow pointing to a light bulb, a computer monitor, and a refrigerator. Below the diagram, a text box contains the following text:

The inverter supplies, exclusively from any kind of appliance using AC voltage, exception.

Understand the battery DC voltage

*The inverter supplies, exclusively from a battery, any kind of appliance using AC voltage, without exception.*

*It does convert the battery DC voltage into AC voltage with a better quality than from the public grid.*

**Xtender serie** p. 12  
(1500 - 63000 VA)

**Compact series** p. 18  
(1100 - 7000 VA)

**AJ serie** p. 20  
(200 - 2000 VA)

**SI serie** p. 22  
(600 - 10500 VA)

A 3 x 400Vac 3-phase grid can be built with 3 inverters for the supply of high power appliances. In case of an increased need of power it is possible to set up to 3 inverters in parallel on each phase (Xtender only).

*A 3 x 400Vac 3-phase grid can be built with 3 inverters for the supply of high power appliances. In case of an increased need of power it is possible to set up to 3 inverters in parallel on each phase (Xtender only).*

**Xtender serie** p. 12  
(1500 - 63000 VA)

**SI serie** p. 22  
(600 - 10500 VA)



## Mobile applications




An energy system on-board is often necessary to power the AC voltage users, while the vehicle or the boat is away from the electrical grid (port, garage, camping...). In that case the energy is stored in the battery, which is actually charged by power sources on-board, like genset, solar generator, wind turbine, alternator or a combination of them. Studer Innotec offers the range of products that secure the management and the conversion of

this energy, while securing an optimal supply of the appliances on-board.


The examples below show our products in some mobile applications.




## A simple and reliable system on-board

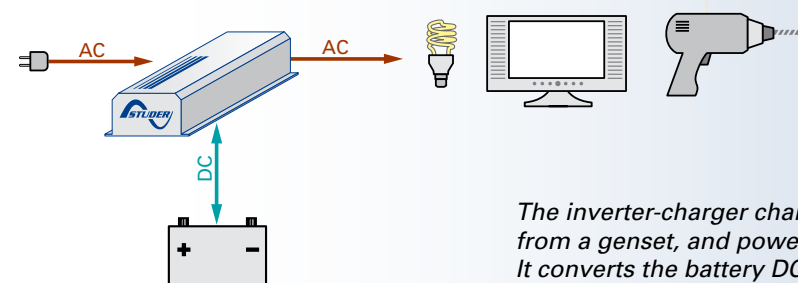


The inverter-charger charges the battery from the grid or from a genset, and powers any kind of electrical appliance. It converts the battery DC voltage to AC voltage.




## An upgradeable power

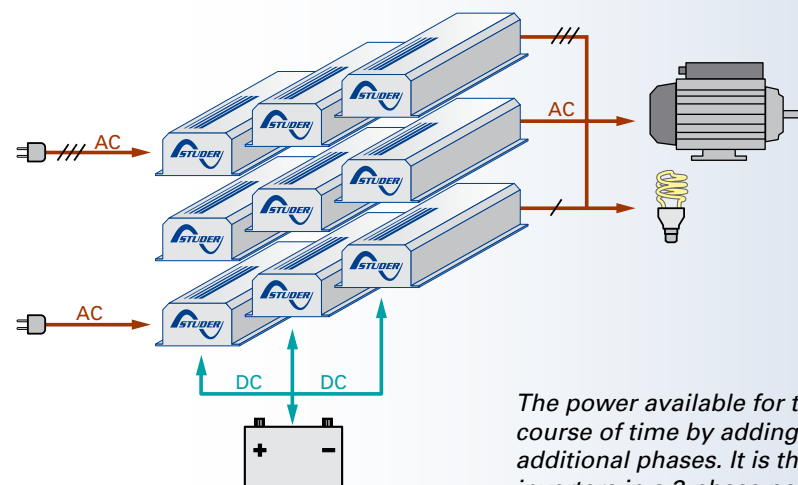


The power available for the users can be adapted in the course of time by adding inverters in parallel or by creating additional phases. It is therefore possible to install up to 9 inverters in a 3-phase power system.




## 3 x 400Vac 3-phase grid on-board

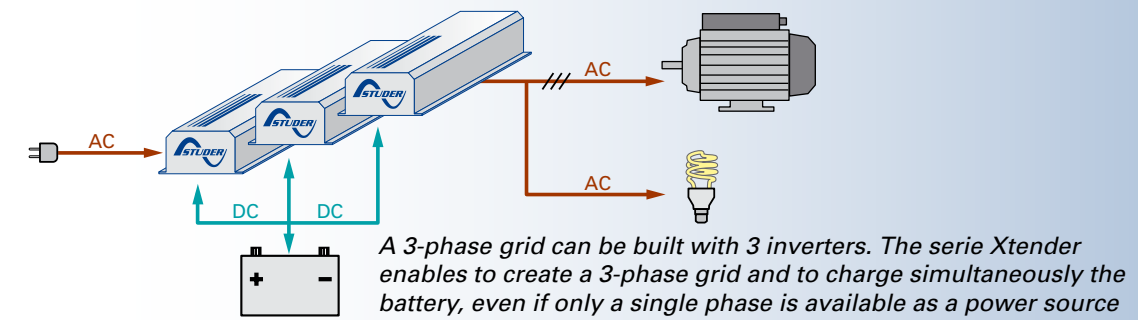


A 3-phase grid can be built with 3 inverters. The serie Xtender enables to create a 3-phase grid and to charge simultaneously the battery, even if only a single phase is available as a power source




## Variable power source assistance

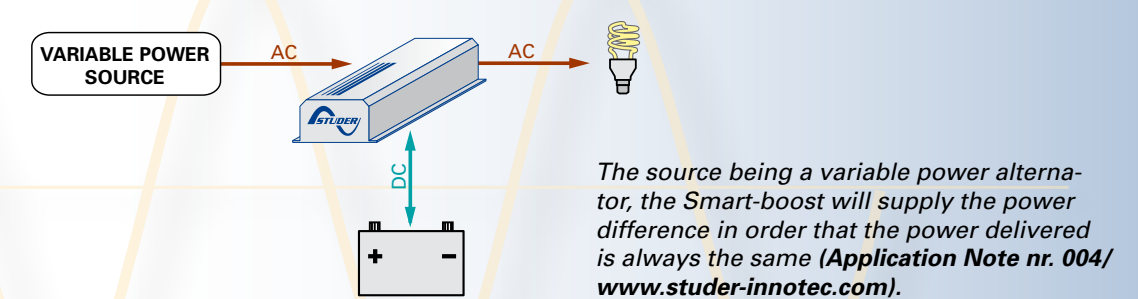


The source being a variable power alternator, the Smart-boost will supply the power difference in order that the power delivered is always the same (**Application Note nr. 004/** [www.studer-innotec.com](http://www.studer-innotec.com)).




## Successive charge of the batteries

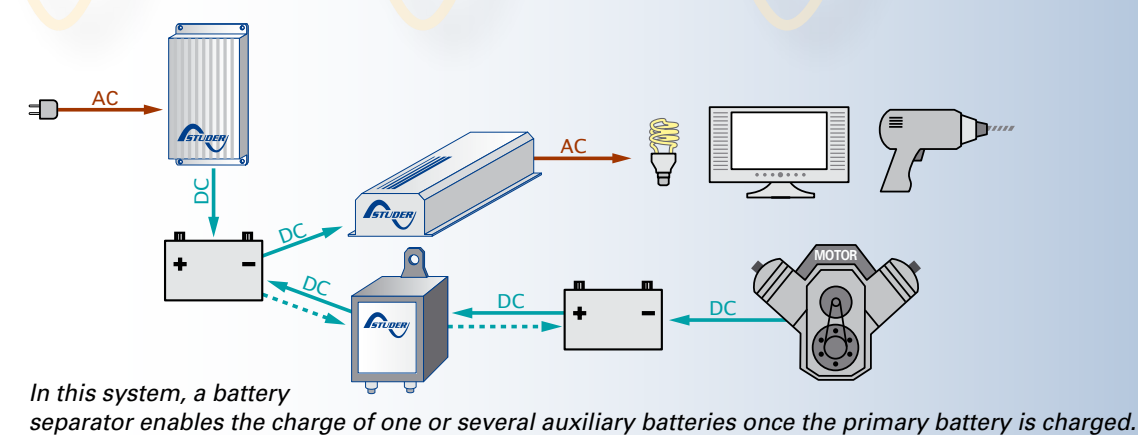

In this system, a battery separator enables the charge of one or several auxiliary batteries once the primary battery is charged.

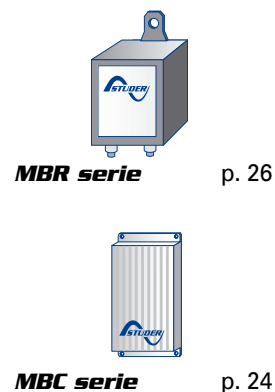

## Simultaneous charge of batteries

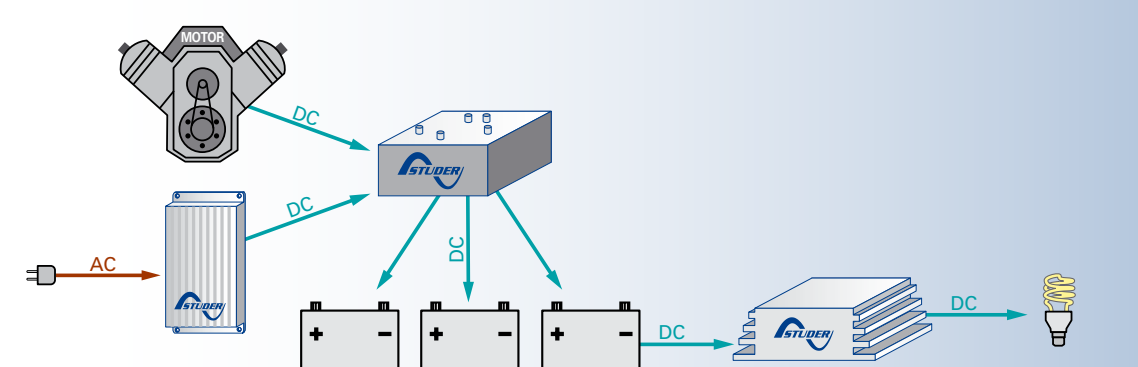

A MOSFET splitter, with almost no voltage losses, enables to split the charge current to and in between several batteries. From the battery pack, a DC/DC converter will step up or step down the voltage according to the voltage of the users, 12, 24 or 48Vdc.








Powered by the public grid, the users like fridges, PCs, emergency lights, etc. which can not afford any power cut, are electrically secured. An inverter-charger with transfer relay or a combination of an inverter and a charger guarantees to maintain well the battery and to keep uninterrupted the supply of strategic appliances.

Studer Innotec offers solutions from 200W up to 63kW with a product choice unchallenged on the market.


Some examples of backup applications are described below.



## Uninterruptible power supply on-line

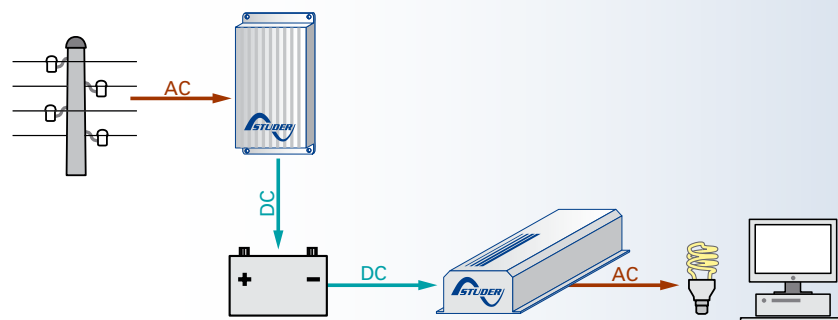

In this system, the functions of battery charge and of users supply are separated, with on one side a battery charger, and on the other an inverter. The fluctuations of the grid current have no impact on the users.




**AJ serie**  
(200 - 2000 VA) p. 20

**SI serie**  
(600 - 10500 VA) p. 22




**MBC serie** p. 24

## Uninterruptible power supply off-line

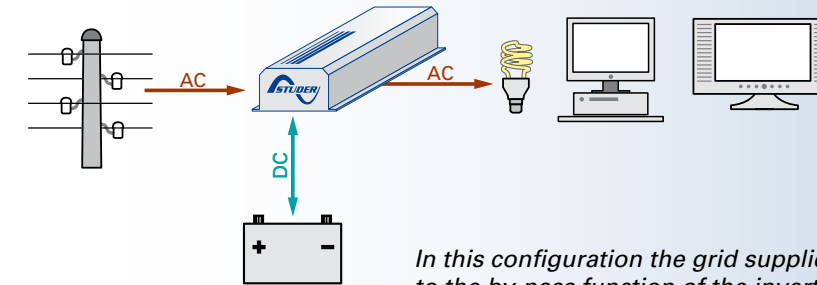


In this configuration the grid supplies directly the users thanks to the by-pass function of the inverter-charger. In case of a drop or a cut of the grid, the inverter-charger guarantees the supply of the users.




**Xtender serie** p. 12  
(1500 - 63000 VA)

**Compact serie** p. 18  
(1100 - 7000 VA)

## Individual Home backup

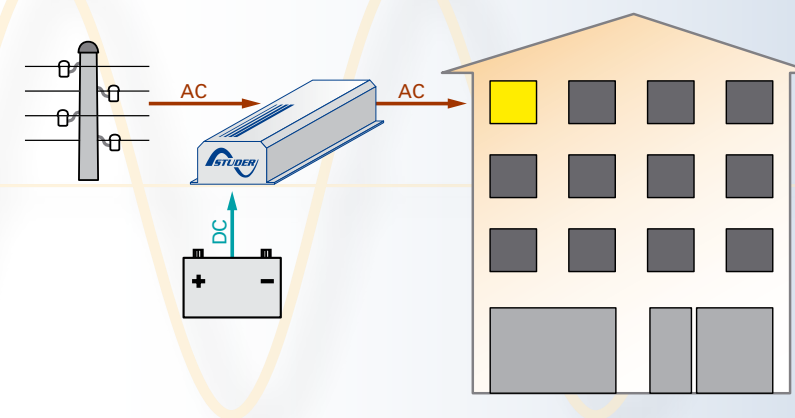


An inverter-charger is used there to provide a backup power in case of public grid outage. As soon as the power shuts off the inverter-charger switches on inverter mode and assures an uninterruptible power supply.



**Xtender serie** p. 12  
(1500 - 63000 VA)

**Compact serie** p. 18  
(1100 - 7000 VA)


## Solsafe – a backup system for grid connected solar installations

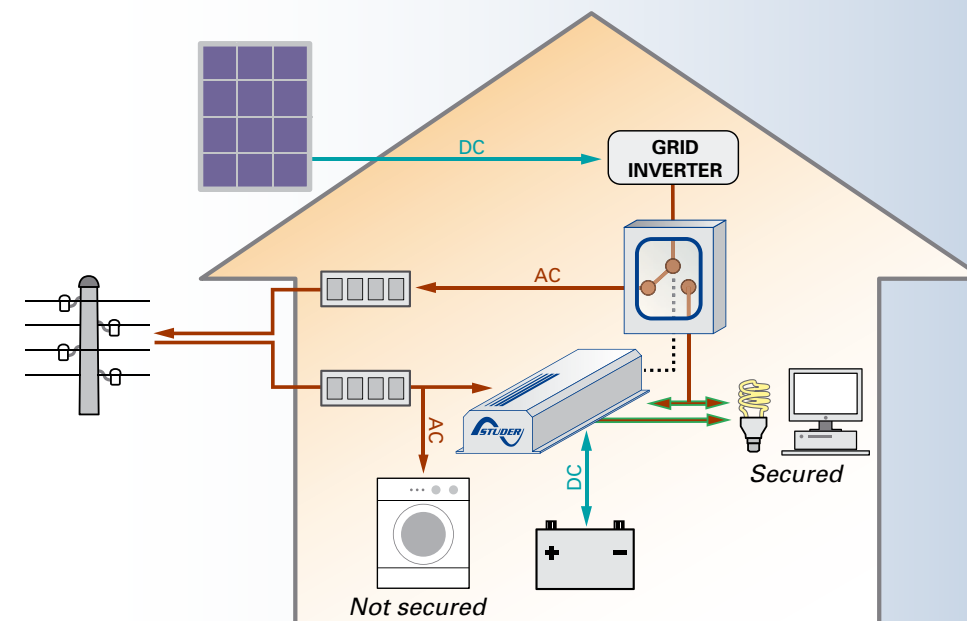

The installation of our solution Solsafe in a grid connected solar system enables to secured totally or partially the power supply in case of a power cut, and so to keep on using the solar energy being produced (**Application Note nr. 003/www.studer-innotec.com**).



**Solsafe S-Box** p. 17



**Xtender serie** p. 12  
(1500 - 63000 VA)

**Compact serie** p. 18  
(1100 - 7000 VA)



### Xtender Series

The Xtender serie provides an unmatched freedom of use thanks to its many functions. In a basic application, it offers together the functions of inverter, battery charger, transfer system and assistance to the source.

These functions can be combined and controlled in a totally automatic way for an exceptional comfort and an optimal management of the energy available. Its programmable auxiliary contacts allow as well the interconnection with existing systems or the implementation of extended functions.

#### Xtender XTM

- XTM 1500-12
- XTM 2000-12
- XTM 2400-24
- XTM 2600-48
- XTM 3500-24
- XTM 4000-48




#### Xtender XTH

- XTH 3000-12
- XTH 5000-24
- XTH 6000-48
- XTH 8000-48



#### Features and performances

- Parallel and 3 phase configuration up to 9 units.
- Outstanding efficiency and overload capabilities.
- Smart-Boost Function for assistance to the source.
- Automatic reduction of peak loads.
- Automatic allocation of the available power (power sharing).
- Standby level adjustable from a very low load threshold.
- Multi-stage, fully programmable battery charger with PFC.
- Ultra fast high power transfer relay.
- Control by digital signal processor (DSP).
- 2 fully independently programmable auxiliary contacts.
- Real time clock for event record and auxiliary relay programming.

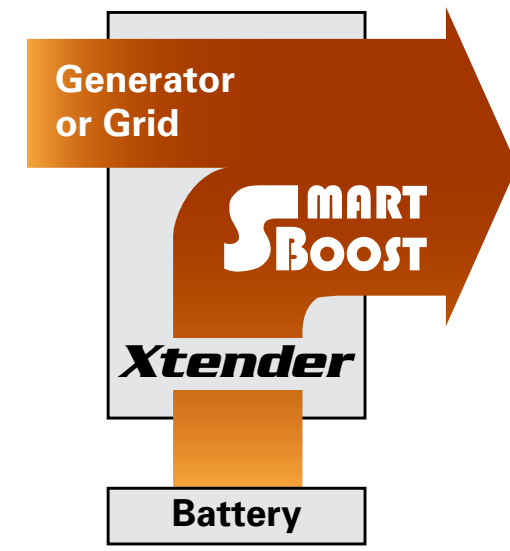

#### Smart-Boost function

The function Smart-Boost enables to add the inverter power to another source, like for instance a genset or the shorepower, even in case of complex (reactive, crest factor etc.) loads. This offers the possibility to reduce the peak loads and to undersize the genset (**Application Note nr. 001/www.studer-innotec.com**).

#### Xtender range

	Battery voltage	AC voltage	Output power P30/Pnom	Power Smart-Boost	Charge current	Transfer current
XTM 1500-12 (-01)	12V	230Vac	1500VA / 1500VA	1500VA	0 - 70A	50A
XTM 2000-12 (-01)	12V	230Vac	2000VA / 2000VA	2000VA	0 - 100A	50A
XTM 2400-24 (-01)	24V	230Vac	2400VA / 2000VA	2400VA	0 - 55A	50A
XTM 2600-48 (-01)	48V	230Vac	2600VA / 2000VA	2600VA	0 - 30A	50A
XTH 3000-12 (-01)	12V	230Vac	3000VA / 2500VA	3000VA	0 - 160A	50A
XTM 3500-24 (-01)	24V	230Vac	3500VA / 3000VA	3500VA	0 - 90A	50A
XTM 4000-48 (-01)	48V	230Vac	4000VA / 3500VA	4000VA	0 - 50A	50A
XTH 5000-24 (-01)	24V	230Vac	5000VA / 4500VA	5000VA	0 - 140A	50A
XTH 6000-48 (-01)	48V	230Vac	6000VA / 5000VA	6000VA	0 - 100A	50A
XTH 8000-48 *	48V	230Vac	8000VA / 7000VA	8000VA	0 - 120A	50A

Note: for the 120Vac version, -01 is added to the model designation.

\* This model is not available in 120Vac version. Complete technical specifications on page 28.

#### RCC-02



#### RCC-03




#### Comprehensive LCD display



#### Remote control and programming centre RCC-02 or RCC-03

Apart from the enclosure difference, adapted for wall or panel mounting, both units have exactly the same features and allow the user to survey his system and fully customize it to his needs. RCC gives a controlled access to the many adjustable parameters of the Xtender. It enables the setting of the charge curve of the battery, the programming of the auxiliary contacts and gives access to a lot of operation options. Thanks to its graphic display RCC provides clear and comprehensive indications on the state of the system in selectable language. The unit memorizes and displays the events that occurred on an installation and so it does anticipate the problems that might appear. A slot for a SD card is available and it allow the parameters record and download as well as the full software update.

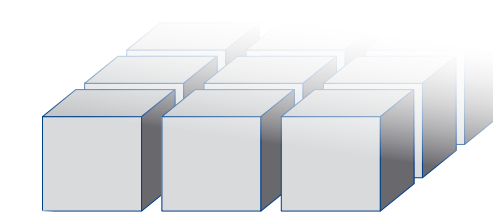

#### Wide modularity

By the implementation of several units, it is possible to create a 3-phase source or to set them in parallel to increase the power available without extra cost. Up to 9 inverters of the Xtender serie shall therefore be combined together up to 63 kW!





### Communicate with an Xtender system

The remote control RCC-02/-03-32, equipped with a serial port RS-232, enables to be informed of the state of a system consisting of one or several Xtenders.

It is then possible to read all data that can be displayed on the remote control basic screen and also to modify the configuration parameters.


The RS 232 interface allows to connect an Xtender system to various SCADA control and supervision devices (PC, programmable logic controller, microcontroller) (**more information on our website, page RCC-02/-03**).

### Data logging and analysis

Analyze easily your data with the RCC-02/03 Data logger function that will record on the SD card the main electrical values of your Xtender system during its operation.

These values enable to follow up the evolution of the system energy consumption, to check the power cuts, the state of the auxiliary contacts, the input currents and voltages, etc...

Studer Innotec offers for free two graphical and analysis tools, Xtender Data Analysis Tool and Xtender Matlab® Data Analysis (**more information on our website and in the Application Note 006/www.studer-innotec.com**).

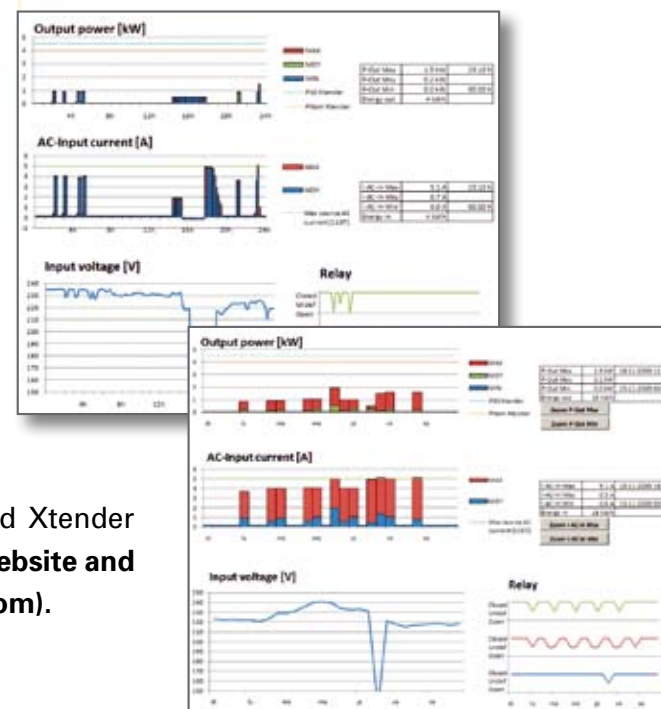

### Accessories

	<b>Remote control and programming centre with 2 m cable</b> <b>RCC-02:</b> for display, programming, updates and data logging <b>RCC-02-32:</b> same functions as RCC-02, with RS 232 interface Wall mounting. Dimensions hxlxw: 170 x 168 x 43.5 mm.
	<b>Remote control and programming centre with 2 m cable</b> <b>RCC-03:</b> for display, programming, updates and data logging <b>RCC-03-32:</b> same functions as RCC-02, with RS 232 interface Panel mounting. Dimensions hxlxw: 130 x 120 x 42.2 mm.
	<b>Remote Control Module RCM-10. Only for XTM with 3 m cable (possible up to 5 m)</b> DIN rail remote module for main on/off and function input management. Dimensions: HxLxI: 45 x 73 x 45 mm.
	<b>Battery temperature sensor BTS-01 with 3 m cable</b> This sensor enables to accurately adapt the charge thresholds to the battery temperature. Dimensions: HxLxI: 58 x 51.5 x 22 mm.
	<b>Cable for 3ph and parallel CAB-RJ45-8-2/-5/-20/-50 (2/5/20/50 m)</b> Allows the setting in parallel or the implementation of a 3-phase system.








## The main configurations offered by the Xtender serie

Xtender family is a complete range of inverter-chargers ideally suited for hybrid, mobile and backup systems.

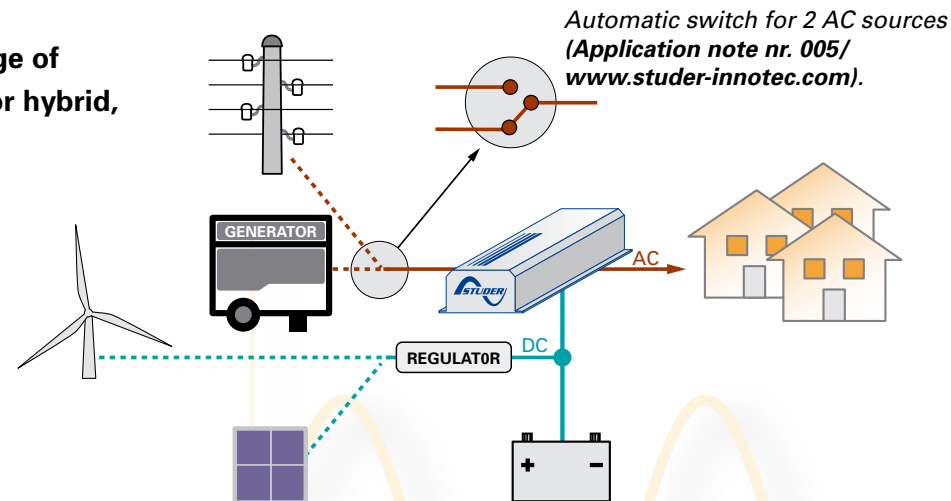

Easy set up of multi-units




Easy accessible and robust connections



Compatible with standard cable channel (230 x 60 mm)


## Inverter, charger and transfer relay

The Xtender basically works as an inverter and as a charger, combined with a transfer relay.

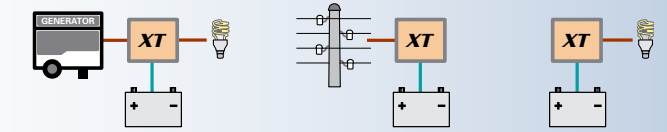


## 2 or 3 units in parallel on 1 phase

Increase of the power on one phase by setting 2 or 3 Xtender in parallel.

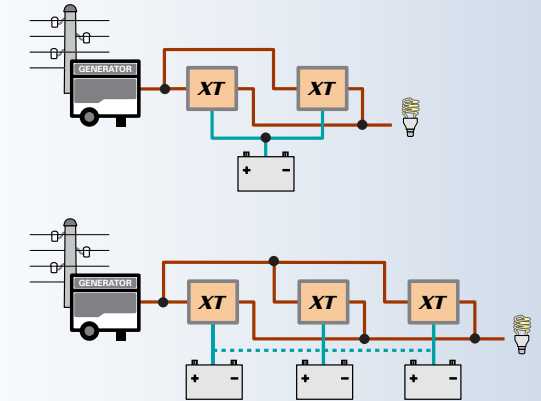


## 1 phase in and 3 phase out

Three-phase power supply from a single phase source.

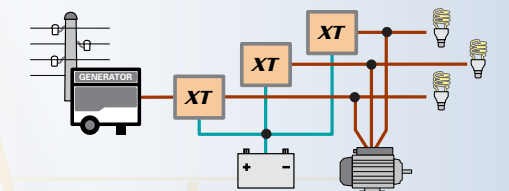


## 3 phase in and 3 phase out

Three-phase source for a three-phase power supply.

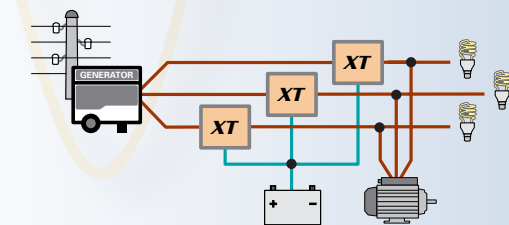


## 3 phase + with one reinforced phase

Three-phase power supply with increase of the power on one phase by setting 2 or 3 Xtender in parallel on this phase.

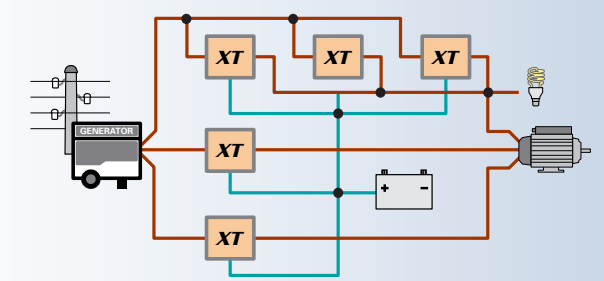






## 3 Xtender in parallel on 3 phases

Three-phase power supply with 3 Xtender on each phase, for power up to 72kW.

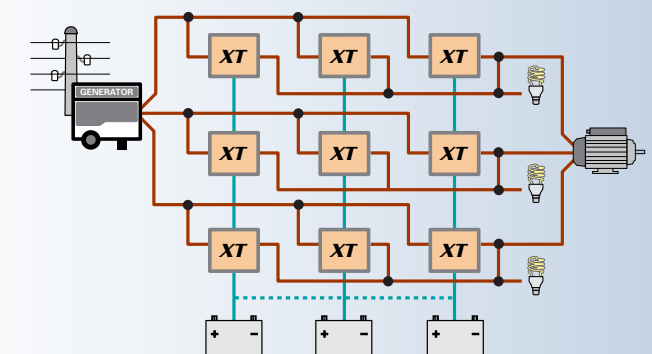

**X-Connect  
system****Pre-wired mounting frame for Xtender  
multi-system**

Offers a flexible and cost effective solution for high power systems based on XTH inverter

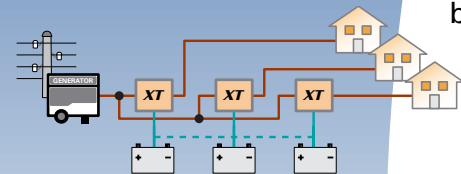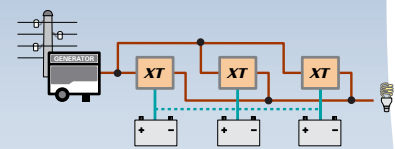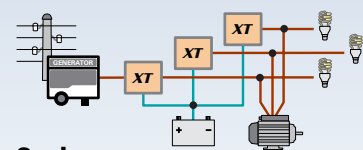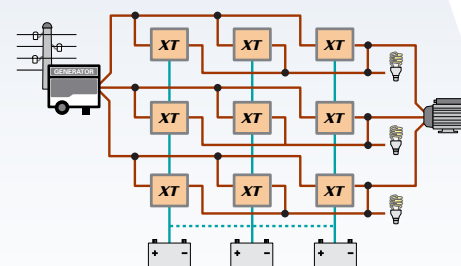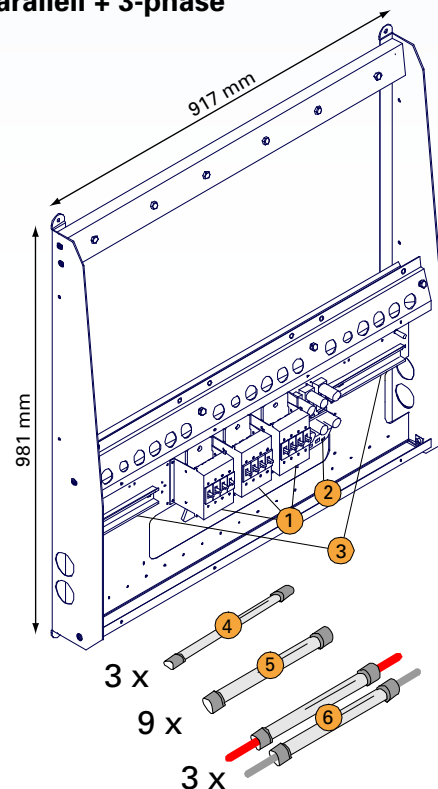**Centralized****Parallell****3-phase****Parallell + 3-phase****Up to 63kW multi-unit system****Frame is supplied with:**

- ① Pre-installed DC circuit breakers
- ② Pre-installed DC fuses
- ③ Pre-installed DIN rails
- ④ Interconnection pipes and gland for auxiliary contact wiring
- ⑤ Interconnection pipes and gland for AC wiring
- ⑥ Interconnection pipes and gland + 90 mm<sup>2</sup> wire terminated with appropriate ring tongues for DC wiring from Xtender to breakers and fuses

Screws set for frame assembly

**Applications****Solsafe  
S-Box****S-Box: a genuine cabling solution to  
implement the Solsafe**

- Hassle free cabling
- Quick installation
- Easy commissioning

**Solsafe: the anti-blackout system for grid  
connected solar installations**

Despite a solar system on your house, in case of power outage, the grid inverters will shut off and the solar generator, whatever its size, will be useless. Studer Innotec has developed, already in 2004, a concept in which its inverter-chargers allow to keep energy available from the solar generator, even in case of a power cut.

**Compared to other similar solutions, it offers:**


- A great system flexibility by choosing independently the grid inverter power (matching the solar generator) and the stand-alone power (matching the needs for autonomous energy), so long the stand-alone inverter is as big or bigger than the grid inverter
- The choice of the grid inverter allowing to work with standard well known products
- To choose the grid inverter with any voltage input range, independently from the battery voltage
- A possible and easy upgrade of existing grid-connected solar installations

**The S-Box can be supplied in 4 versions:**

For single phase application:

- Solsafe box 25A for Compact.....S-Box-25C
- Solsafe box 25A for Xtender.....S-Box-25X
- Solsafe box 25A for Compact with ENS-26.....S-Box-25C-E
- Solsafe box 25A for Xtender with ENS-26.....S-Box-25X-E

For Solsafe implementation in 3ph systems, a schematic is at disposal on simple request.

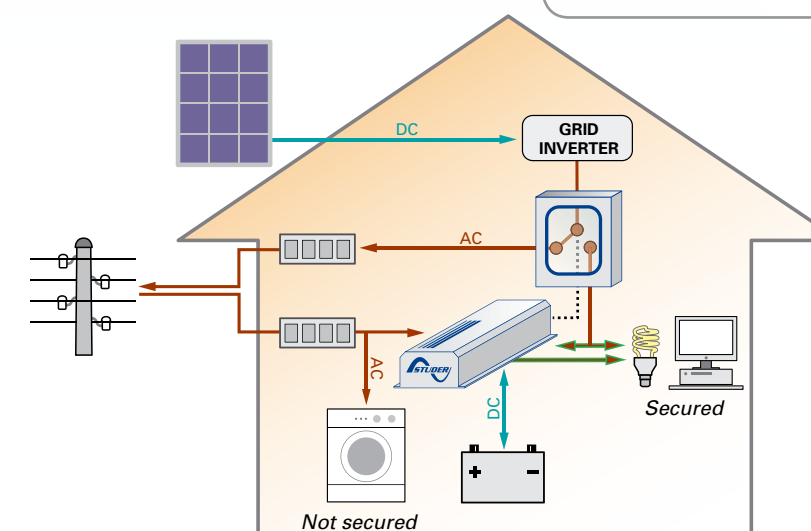**Solsafe – a backup system for grid  
connected solar installations**

The installation of our solution Solsafe in a grid connected solar system enables to secured totally or partially the power supply in case of a power cut, and so to keep on using the solar energy being produced (**Application Note nr. 003/** [www.studer-innotec.com](http://www.studer-innotec.com)).





Compact series

The models of the Compact series consist of 3 fully automatic functions: a sine wave inverter, a battery charger and a transfer system. Equipped with a high-end technology, they carry our long experience in the field of electrical supply.

Features and performances

- True sine wave voltage.
- Suitable for any kind of electrical appliance.
- Reliable and silent working with all kind of loads.
- Outstanding overload capabilities.
- Stand-by level adjustable over a large range and from a very low threshold.
- 4 STEP battery charger with PFC.
- Ultra-fast transfer relay.
- High efficiency.
- Full internal protection.
- Ultra-fast regulation.
- Microprocessor controlled.



Norm E certification

The XPC 1400-12, XPC 2200-24, C 1600-12 and C 2600-24 are certified to the ECE-R 10 norm.

XP COMPACT

XPC 1400-12  
XPC 2200-24  
XPC 2200-48

COMPACT

C 1600-12  
C 2600-24  
C 4000-48

HP COMPACT

HPC 2800-12  
HPC 4400-24  
HPC 6000-48  
HPC 8000-48


Compact range	Output power P30/Pnom	Battery voltage	AC voltage	Charge current	Transfer current
XPC 1400-12 (-01)	1400VA / 1100VA	12Vdc	230Vac	0 - 45A	16A
XPC 2200-24 (-01)	2200VA / 1600VA	24Vdc	230Vac	0 - 37A	16A
XPC 2200-48 (-01)	2200VA / 1600VA	48Vdc	230Vac	0 - 20A	16A
C 1600-12	1600VA / 1300VA	12Vdc	230Vac	0 - 55A	16A
C 2600-24	2600VA / 2300VA	24Vdc	230Vac	0 - 55A	16A
C 4000-48	4000VA / 3500VA	48Vdc	230Vac	0 - 50A	16A
HPC 2800-12	2800VA / 2500VA	12Vdc	230Vac	0 - 110A	30A
HPC 4400-24	4400VA / 4000VA	24Vdc	230Vac	0 - 100A	30A
HPC 6000-48	6000VA / 5000VA	48Vdc	230Vac	0 - 70A	30A
HPC 8000-48	8000VA / 7000VA	48Vdc	230Vac	0 - 90A	50A

Note: for the 120Vac version, -01 is added to the model designation.  
Complete technical specifications on page 29.

Multifunctional contact

The 16 A. potential free contact can be programmed according to the user wishes. It can react according to the battery levels as well as to the system status (alarm conditions, presence of the public grid, sun-light's presence...), and it enables for example:

- 1/ Automatic disconnection of second priority users (conditional supply).
- 2/ Alarm signalisation, acoustic signal, MODEM, radio alarm etc.
- 3/ Conditional battery charge.

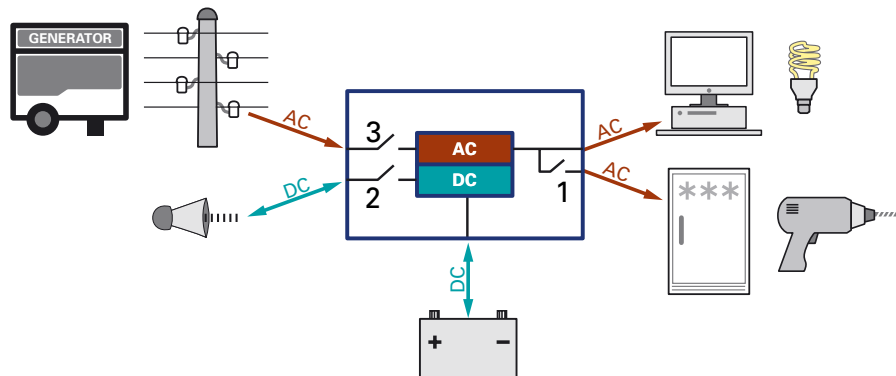


Accessories

		XP COMPACT	COMPACT	HP COMPACT
	<b>Remote control RCC-01</b> State of the system displayed by LED and remote programming* (supplied with a 20 m cable). *compulsory for the programming of the XP Compacts	•	•	•
	<b>Temperature sensor CT-35</b> This sensor adapts charge levels to the temperature variations of the battery (supplied with 3 m cable).	•	•	•
	<b>Remote control RPS-01</b> The setting of the power sharing can be remotely controlled by means of the remote control supplied with a 20 m cable.		•	•
	<b>Auxiliary relay module ARM-01</b> Equipped with 3 programmed relays and with a fourth one that is the equivalent of the auxiliary contact of the inverter-charger. This module allows the implementation of the Solsafe system (see page 11).	•	•	•
	<b>Cover CFC-01</b> This cover provides an additional protection to the connections by means of glands.	•	•	
	<b>Cover C-IP22</b> Cover for a protection against intrusions or projections, installed after the mounting of the device. It extends the protection index from IP 20 to IP 22.	•	•	

Optional built-in solar charge controller (-S)

The models XP Compact and Compact are available with an optional built-in charge controller (I/U/Uo) making the inverter-charger an «all in one» device for a solar installation.

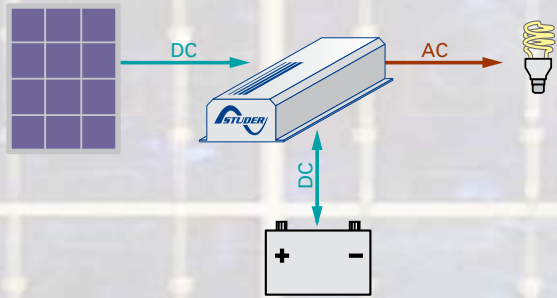



AJ serie

The AJ range consists of sine wave inverters that convert the DC voltage of a battery into AC voltage which can be used by all electrical appliances.

Features and performances

- High and steady efficiency.
- Outstanding overload capabilities.
- Digital regulation and control by microprocessor.
- Electrical supply to any kind of appliance.
- Full internal protection.
- Stand-by level adjustable from a very low threshold.

AJ serie

AJ 275-12  
AJ 350-24  
AJ 400-48



AJ serie

AJ 500-12  
AJ 600-24  
AJ 700-48



AJ serie

AJ 1000-12  
AJ 1300-24



AJ serie

AJ 2100-12  
AJ 2400-24



E<sub>24</sub>


Norm E certification

The AJs in 12 and 24Vdc are certified to the ECE-R 10 norm.

AJ range

AJ range	Output power P30/Pnom	Battery voltage	AC voltage
AJ 275-12 (-01)	275VA / 200VA	12Vdc	230Vac
AJ 350-24 (-01)	350VA / 300VA	24Vdc	230Vac
AJ 400-48 (-01)	400VA / 300VA	48Vdc	230Vac
AJ 500-12 (-01)	500VA / 400VA	12Vdc	230Vac
AJ 600-24 (-01)	600VA / 500VA	24Vdc	230Vac
AJ 700-48 (-01)	700VA / 500VA	48Vdc	230Vac
AJ 1000-12 (-01)	1000VA / 800VA	12Vdc	230Vac
AJ 1300-24 (-01)	1300VA / 1000VA	24Vdc	230Vac
AJ 2100-12 (-01)	2100VA / 2000VA	12Vdc	230Vac
AJ 2400-24 (-01)	2400VA / 2000VA	24Vdc	230Vac

Note: for the 120Vac version, -01 is added to the model designation.  
Complete technical specifications on pages 30-31.

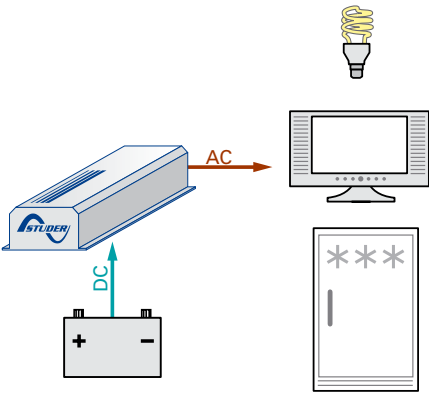


Options and accessories

	AJ 275-12, AJ 350-24 AJ 400-48, AJ 500-12 AJ 600-24, AJ 700-48	AJ 1000-12, AJ 1300-24 AJ 2100-12, AJ 2400-24
	<b>Remote control JT8</b> Enables the control (ON/OFF) and the remote display (ON / Standby / Temporary off). (supplied with a 5 m cable)	
	<b>Plug for remote control RCM:</b> CM 01: ON when a contact is closed; RCM 02: ON when a voltage is present on the remote control; RCM 03: ON when a contact is open. <b>Supplied with a connector Jack 3.5 mm.</b>	

Optional built-in solar charge controller (-S)

An optional 3 STEP charge controller (I/U/Uo) can be supplied built-in making the inverter AJ an «all in one» device for a solar installation.

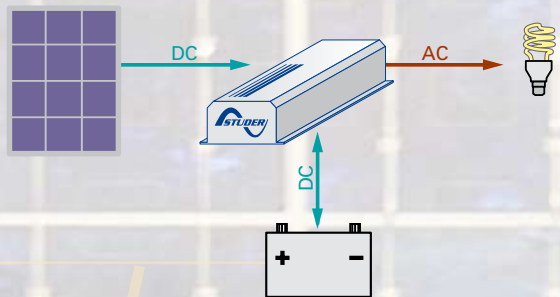

Rural electrification (Solar Home System)

The rural electrification and the inverters of the AJ serie: excellence to the benefit of the development of remote areas and populations. Choosing AC voltage for the rural electrification systems is going for simplicity, reliability and cost saving. Indeed, compared with a DC voltage one, a system with an inverter is often more efficient from 100W of solar power, and is always since 200W.

The AJ serie, due to its overload capability and to its very reliable stand-by system adjustable from 1W, is the most suitable range of inverters to meet the rural electrification technical and economical requirements.






## Battery chargers

### MBC serie

The MBC chargers enable to charge a battery from an AC voltage source of supply (genset, public grid, shore power...). These chargers are also IP65 and therefore especially designed for outdoor applications.

#### Features and performances

- Universal input voltage.
- Charge of lead-acid or GEL batteries.
- Protection against battery overcharge.

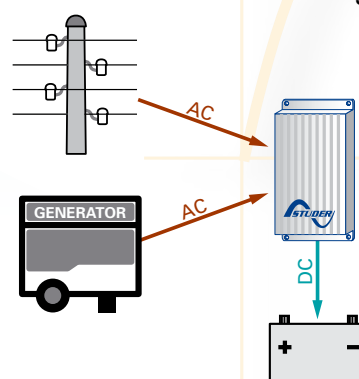

MBC range	Battery voltage	Input voltage	Output current	Output
<b>MBC 12-06/1</b>	12 Vdc	100-260 Vac	6 A	1
<b>MBC 12-15/1</b>	12 Vdc	100-260 Vac	15 A	1
<b>MBC 24-03/1</b>	24 Vdc	100-260 Vac	3 A	1
<b>MBC 24-08/1</b>	24 Vdc	100-260 Vac	8 A	1
<b>MBC 24-32/1</b>	24 Vdc	100-260 Vac	32 A	1

Complete technical specifications on page 32.



## DC/DC converters


### MDCI and MDC series

The DC/DC converters type MDCI and MDC are used, depending on the model, either to step up or to step down a DC voltage.

The converters of the MDCI range are electrically isolated.

#### Features and performances

- High efficiency.
- Low consumption.
- Protection against short-circuit, overheat, overvoltage and reverse polarity.
- Great stability of the output voltage for a more reliable system.

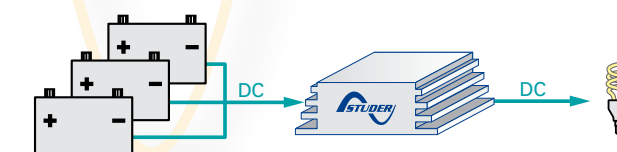

MDCI range	Power	Output Current	Input variant	Output variant	Isolated
<b>MDCI 100</b>	100 W	8/4 A	A/B/C/D	12/24 Vdc	Yes
<b>MDCI 200</b>	200 W	16.5/8 A	A/B/C/D	12/24 Vdc	Yes
<b>MDCI 360</b>	360 W	30/15 A	A/B/C/D	12/24 Vdc	Yes
<b>MDCI 360 A24 Charger</b>	330 W	30/15 A	A	24 Vdc	Yes

A = 9-18 Vdc    B = 20-35 Vdc    C = 30-60 Vdc    D = 60-120 Vdc

MDC range	Power	Output Current	Input voltage	Output voltage	Isolated
<b>MDC 1224-7</b>	170 W	7 A	9-18 Vdc	24 Vdc	No
<b>MDC 2412-5</b>	65 W	5 A	18-35 Vdc	13.2 Vdc	No
<b>MDC 2412-8</b>	105 W	8 A	18-35 Vdc	13.2 Vdc	No
<b>MDC 2412-12</b>	160 W	12 A	20-35 Vdc	13.2 Vdc	No
<b>MDC 2412-20</b>	275 W	20 A	20-35 Vdc	13.8 Vdc	No
<b>MDC 2412-30</b>	415 W	30 A	20-35 Vdc	13.8 Vdc	No

Complete technical specifications on page 32.

The MDC 2412-20 and 2412-30, as well as the MDCI 360 A24 « Charger » can also be used to charge a battery from a source at their input terminal to a battery at their output terminal.

## MOSFET battery splitters




### MBI serie

The MOSFET battery splitters MBI generate an insignificant voltage drop. They supply the current of a charger or of an alternator to several batteries. All batteries are thus charged in the same time and therefore will not charge or discharge each others.

MBI range	Input	Charge current	Charge input	Outputs
<b>MBI 100/2</b>	12/24 Vdc	100 A	1	2
<b>MBI 150/2</b>	12/24 Vdc	150 A	1	2
<b>MBI 100/3</b>	12/24 Vdc	100 A	1	3
<b>MBI 150/3</b>	12/24 Vdc	150 A	1	3
<b>MBI 200/3</b>	12/24 Vdc	200 A	1	3
<b>MBI 2-100/3</b>	12/24 Vdc	100 A	2	3

Complete technical specifications on page 33.

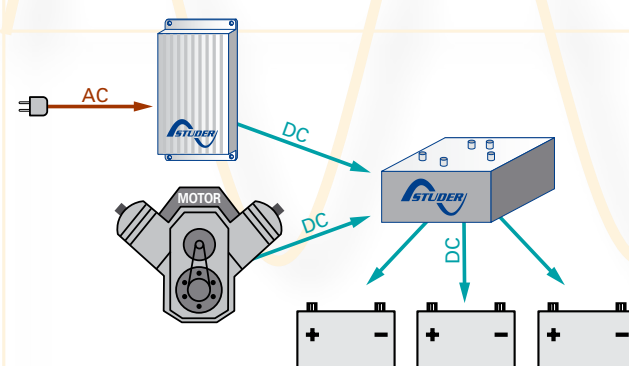

#### Features and performances

- Automatic adjustment to the batteries voltage.
- Possible charge of the battery from an alternator
- Voltage drop < 0.4 V at 100 Amp. charge current.
- Suitable for electronic alternators.

## Batteries separators




### MBR serie

The batteries separators MBR are microprocessor controlled. They charge first the primary battery, from a charger or an alternator, then the other batteries by connecting them in parallel.

MBR range	Battery voltage	Charge current	Batteries
<b>MBR 12/24-100</b>	12/24 Vdc	100 A	2
<b>MBR 12-160</b>	12 Vdc	160 A	2
<b>MBR 24-160</b>	24 Vdc	160 A	2
<b>MBR 12/24-500</b>	12/24 Vdc	500 A	2

Complete technical specifications on page 33.

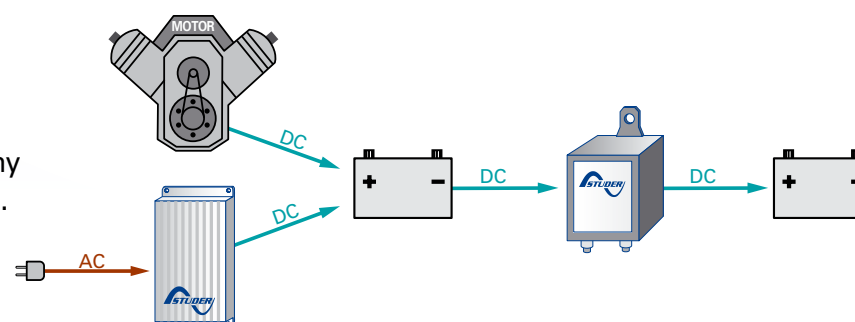

#### Features and performances

- Insignificant voltage drop.
- Protects the auxiliary battery from any overvoltage coming from the charge.

## Battery protection



### MBW serie


The Battery Watch protects the battery from an excessive discharge and also the consumers in case of overvoltage.

#### Features and performances

- Programming of the connection and disconnection voltages by jumpers.
- MOSFET switches, therefore no sparks.
- Alarm output to indicate excessive voltage drops.

MBW range	Maximum current	Operating voltage range (Vdc)
<b>MBW 40</b>	40	6-35
<b>MBW 60</b>	60	6-35
<b>MBW 200</b>	200	8-32

Complete technical specifications on page 34.

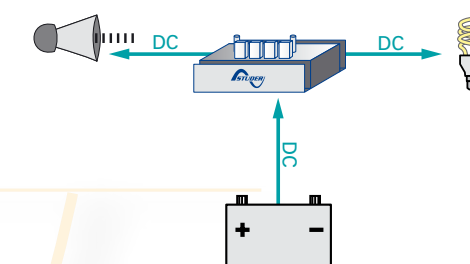

## Battery monitoring



### SBM-02

The SBM-02 is a highly accurate battery monitor with a history data memory. It is supplied together with a 500A/50mV shunt.

This device is designed for 12 and 24V batteries. The voltage pre-scaler SBM-PS-02 in option extends the use of the SBM-02 to 27-175V batteries.

#### Features and performances

- Digital display of the 6 most important parameters of a DC power system:
  1. Battery voltage (V)
  2. Current (A)
  3. Consumed Ampere-hours (Ah)
  4. State-of-charge (%)
  5. Time-to-go (h:m)
  6. Temperature (°C or °F)

#### Optional accessories


- Connection kit, type SBM-CAB-20, including 20m of twisted pair cable (3 x 2 x 0.5mm<sup>2</sup>) and 2 fuseholders.
- Communication kit, type SBM-COM, including RS232 interface box, 1.8m of 9p DSUB serial cable and software.
- Communication kit, type SBM-COM-USB, including USB interface box, 1.8m of USB cable and software.
- Temperature kit, type SBM-TEMP-20, with a temperature sensor and 20 m cable.
- Shunt 1200 A / 50 mV, type SH-1200-50, for the battery monitoring in big systems.



Data may change without any notice.

\* Factory settings

**AJ serie**




Model		AJ 275-12	AJ 350-24	AJ 400-48	AJ 500-12	AJ 600-24	AJ 700-48
Inverter							
Nominal battery voltage		12V	24V	48V	12V	24V	48V
Input voltage range		10.5 – 16V (24V max.)	21 – 32V (44V max.)	42 – 64V (64V max.)	10.5 – 16V (24V max.)	21 –32V (44V max.)	42 –64V (64V max.)
Continuous power @ 25°C		200VA	300VA	300VA	400VA	500VA	500VA
Power 30 min. @ 25°C		275VA	350VA	400VA	500VA	600VA	700VA
Power 5 min. @ 25°C		350VA	500VA	600VA	575VA	675VA	900VA
Power 5 sec. @ 25°C		450VA	650VA	1000VA	1000VA	1200VA	1400VA
Maximum asymmetric load		150VA	150VA	200VA	250VA	300VA	300VA
Max. efficiency (%)		93%	94%	94%	93%	94%	94%
Cos φ max.		0.1 – 1 up to 200 VA	0.1 – 1 up to 300 VA	0.1 – 1 up to 300 VA	0.1 – 1 up to 400VA	0.1 – 1 up to 500VA	0.1 – 1 up to 500VA
Detection of the load		2W (only with the solar option -S)			Adjustable : 1 → 20W		
Current of short-circuit 2 sec. (exit)		2.3A (4.6A*)	3.2A (6.4A*)	4.6A (9.2A*)	5.2A (10.4A*)	5.7A (11.4A*)	7A (14A*)
Output voltage		Sine wave 230Vac (120Vac*) 0 / - 10%					
Frequency		50Hz (60Hz*) ± 0.05% (crystal controlled)					
Distortion THD (resistive load)		< 5% (@ Pnom.)					
Consumption Stand-by		0.3W**	0.5W**	1.1W**	0.4W	0.6W	1.5W
Consumption «ON» no load		2.4W	3.5W	5.2W	4.6W	7.2W	12W
Overheat protection (+/-5°C)		Shut down @ 75°C - Auto-restart @ 70°C					
Overload and short circuit protection		Automatic disconnection with 2 time restart attempt					
Reverse polarity protection		Protected by internal fuse					
Deep discharge battery protection		Shut off @ 0.87 x Unom - Automatic restart @ Unom					
Max. battery voltage		Shut off @ >1.33 x Unom - Automatic restart @ < Umax					
Acoustic alarm		Before low battery or overheating disconnection					
General data							
Weight		2.4 kg	2.6 kg		4.5 kg		
Dimensions		142mm x 163mm x 84mm			142mm x 240mm x 84mm		
Protection index IP		IP 30 conforms to DIN 40050					
Certification ECE-R 10 (E24)		•	•	Not available	•	•	Not available
EC conformity		EN 61000-6-1, EN 61000-6-3, EN 55014, EN 55022, Dir. 89/336/EEC, LVD 73/23/EEC					
Operating temperature		-20°C up to +50°C					
Relative humidity in operation		95% without condensation					
Ventilation forced		From 45°C ± 5°C					
Acoustic level		< 45 dB (with ventilation)					
Warranty		2 years					
Approximate correction of Pnom		-1.5%/°C since +25°C					
Recommended battery capacity		> 5 x Pnom/Unom (recommended value in Ah)					
Length cables (Battery/left AC)		1.2m / 1m			1.5m / 1m		
Options		AJ 275-12-S	AJ 350-24-S	AJ 400-48-S	AJ 500-12-S	AJ 600-24-S	AJ 700-48-S
Solar regulator	Voltage max.	25V	45V	90V	25V	45V	90V
	Current max.	10A			15A		
	Principle	Floating 3 stages (I/U/UO)					
	Absorption voltage	14.4V	28.8V	57.6V	14.4V	28.8V	57.6V
	Floating voltage	13.6V	27.2V	54.4V	13.6V	27.2V	54.4V
Plug for remote control (RCM)		•	•	•	•	•	•

\* 120Vac/60Hz on request  
\*\* Standby with solar option -S

Data may change without any notice.

**AJ serie**

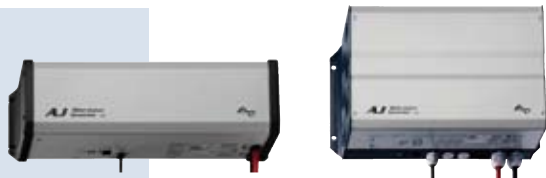

Model	AJ 1000-12	AJ 1300-24	AJ 2100-12	AJ 2400-24	
Inverter					
Nominal battery voltage	12V	24V	12V	24V	
Input voltage range	10.5 – 16V (24V max.)	21–32V (44V max.)	10.5 – 16V (20V max.)	21–32V (40V max.)	
Continuous power @ 25°C	800VA	1000VA	2000VA	2000VA	
Power 30 min. @ 25°C	1000VA	1300VA	2100VA	2400VA	
Power 5 min. @ 25°C	1200VA	2000VA	2450VA	2800VA	
Power 5 sec. @ 25°C	2200VA	2800VA	5000VA	5200VA	
Maximum asymmetric load	500VA	600VA	1000VA	1200VA	
Max. efficiency (%)	93%	94%	92% @ 300VA	94% @ 300VA	
Cos φ max.	0.1 – 1 up to 800VA	0.1 – 1 up to 1000VA	0.1 – 1 up to 2000VA	0.1 – 1 up to 2000VA	
Detection of the load	Adjustable : 1 → 20W				
Current of short-circuit 2 sec. (exit)	10A (20A*)	13A (26A*)	26A (52A*)	30A (60A*)	
Output voltage	Sine wave 230Vac (120Vac*) 0 / -10%				
Frequency	50 Hz (60Hz*) ± 0.05% (crystal controlled)				
Distortion THD (resistive load)	< 5% (@ Pnom. & Uin nom.)			< 3% (@ Pnom & Uin nom.)	
Consumption Stand-by	0.7W	1.2W	0.7W	1.2W	
Consumption «ON» no load	10W	13W	16W	16W	
Overheat protection (+/-5°C)	Shut down @ 75°C - Auto-restart @ 70°C				
Short circuit protection	Automatic disconnection with 2 time restart attempt				
Reverse polarity protection	Protected by internal fuse 125A	Protected by internal fuse 100A	Not protected	Protected by internal fuse 150A	
Deep discharge battery protection	Shut off @ 0.87 x Unom - Automatic restart @ Unom				
Max. battery voltage	Shut off @ >1.33 x Unom - Automatic restart @ < Umax				
Acoustic alarm	Before low battery or overheating disconnection				
General data					
Weight	8.5 kg		19 kg	18 kg	
Dimensions	142mm x 428mm x 84mm		273mm x 399mm x 117mm		
Protection index IP	IP 30 conforms to DIN 40050		IP 20 conforms to DIN 40050		
Certification ECE-R 10 (E24)	•	•	•	•	
EC conformity	EN 61000-6-1, EN 61000-6-3, EN 55014, EN 55022, Dir. 89/336/EEC, LVD 73/23/EEC				
Operating temperature	-20°C up to +50°C				
Relative humidity in operation	95% without condensation				
Ventilation forced	From 45°C ± 5°C				
Acoustic level	< 45 dB (with ventilation)				
Warranty	2 years				
Approximate correction of Pnom	-1.5%/°C since +25°C				
Recommended battery capacity	> 5 x Pnom/Unom (recommended value in Ah)				
Length cables (Battery/left AC)	1.5m / 1m		1.7m / 1m		
Options		AJ 1000-12-S	AJ 1300-24-S	AJ 2100-12-S	AJ 2400-24-S
Solar regulator	Voltage max.	25V	45V	25V	45V
	Current max.	25A		30A	
	Principle	Floating 3 stages (I/U/UO)			
	Absorption voltage	14.4V	28.8V	14.4V	28.8V
	Floating voltage	13.6V	27.2V	13.6V	27.2V
Remote control JT8 supplied with 5 m cable		•	•	•	•

\* 120Vac/60Hz on request

Data may change without any notice.



MBC serie



Model	MBC 12-06/1	MBC 12-15/1	MBC 24-03/1	MBC 24-08/1	MBC 24-32/1
Battery voltage (Vdc)	12	12	24	24	24
Input voltage (Vac)	100-260 (40 - 60 Hz)				
Charge voltage (boost) (Vdc)	14.4	14.4	28.8	28.8	28.8
Charge voltage (float) (Vdc)	13.8	13.8	27.6	27.6	27.2
Output (A)	6	15	3	8	32
Cooling	Heat sink				
Outputs	1				
Efficiency	> 85 %				
Ambiant temp. range	-25 to 50°C				
Dimensions lxxwxh (mm)	155x80x36	195x100x47	155x80x36	195x100x46	158x245x47.5
Weight (kg)	0.9	1.8	0.9	1.8	3.8
Recommended batt. capacity (Ah)	18-60	45-150	9-30	24-80	20 >
Switch to Floating mode (A)	0.2	0.8	0.2	0.4	3.5
Secondary fuse (A)	7.5	20	7.5	15	40
Input wired	•	•	•	•	•
Ouput wired	•	•	•	•	•
Warranty	2 years				

MDCI and MDC series



MDCI – DC/DC converter, switch-mode, isolated

Model	MDCI 100	MDCI 200	MDCI 360	MDCI 360 Charger
Power (W)	100	200	360	330
Input variants (Vdc)	A-B-C-D	A-B-C-D	A-B-C-D	A
Output variants (Vdc/A) +- 2	12.5/8-24/4	12.5/16-24/8	12.5/30-24/15	27.6/12
Output current (A)	8/4	16.5/8	30/15	13
Galvanic isolation	•	•	•	•
Isolation voltage (V)	400			
Efficiency @ full load (%)	± 85			
Off-load current (mA)	< 25			
Operating temperature	-20 / +45°C			
Ambiant temp. (20°) increase after 30 min. @ full load	25°C	30°C		
Cooling	Convection	Fan		
Dimensions HxWxD (mm)	49x88x152	49x88x182	64x163x160	
Weight (gr)	500	600	1400	

\* A = 9-18 Vdc      B = 20-35 Vdc      C = 30-60 Vdc      D = 60-120 Vdc

MDC –DC/DC converter, switch-mode, not-isolated

Model	MDC 1224-7	MDC 2412-5	MDC 2412-8	MDC 2412-12	MDC 2412-20	MDC 2412-30
Power (W)	170	65	105	160	275	415
Output current (A)	7	5.5	8	12	20	30
Input (Vdc)	9-18	18-35		20-35		
Output (Vdc)	24	13.2			13.8	
Efficiency @ full load (%)	90					
Off-load current (mA)	< 15	< 5			25	
Operating temperature	-20 / +40°C					
Ambiant temp. (20°) increase after 30 min. @ full load	30°C		20°C	30°C	33°C	
Cooling	Convection					Fan
Dimensions HxWxD (mm)	49x88x98	49x88x68	49x98x88		49x88x126	49x88x151
Weight (gr)	300	170	250	260	480	600

Data may change without any notice.




MBI serie



MBI – Battery isolator, voltage drop free

Model	MBI 100/2 IG	MBI 150/2 IG	MBI 100/3 IG	MBI 150/3 IG	MBI 200/3 IG	MBI 2-100/3
Input nominal voltage (Vdc)		12/24				
Input voltage range (Vdc)		8-30				
Charge current max. (A)	100	150	100	150	200	100
Input number			1	2		
Battery banks	2		3			
Voltage drop @ 10a/20A (V)	0.0 / 0.1					
Consumption (mA)	0					
Alternator start	•	•	•	•	•	
Operating temperature (°C)	-40 / +85					
Dimensions LxHxD (mm)	146x85x92		146x85x152			
Weight (gr)	780	810	780	810	815	780
Nominal voltage 12 or 24V	Automatic detection					
Insulation to ground	> 500V @ 60Hz					
Warranty	2 years					
Norms	EN 50081-1 (emission) EN 50082-1 (immunity) EN 60950-1 (safety)					

MBR serie



MBR – Microprocessor controlled battery separator

Model	MBR 12/24-100	MBR 12-160	MBR 24-160	MBR 12/24-500
Nominal voltage (Vdc)	12/24	12	24	12/24
Charge current max. (Amp)	100	160		500
Connection threshold (Vdc)	13.2/26.4	13.2	26.4	13.2/26.4
Disconnection threshold (Vdc)	12.8/25.6	12.8	25.6	11.8/23.6
Battery banks	2			
Alternator start	•	•	•	•
Start contact for batteries paralleling		•	•	•
Micro switch for remote status indication				•
Dimensions LxHxD (mm)	46x46x80	46x93x96		72x70x80
Weight (gr)	110	300		417
Consumption	< 5mA			
Voltage stability	± 2%			
Protection of the auxiliary battery against overvoltage	16 / 32Vdc			
Connection on the battery side	M6			M8
Other connections	6.3 mm Faston			
Warranty	2 years			
Norms	EN 50081-1 (emission) EN 50082-1 (immunity) Automotive Directive 95/54/CE			

Data may change without any notice.



MBW serie



MBW – Battery watch

Model	MBW 40	MBW 60	MBW 200
Nominal voltage (Vdc) depends on jumpers	12/24		
Max. continuous current 5' (Amp)	40	60	200
Peak current (Amp)	120	120	480
Operating voltage range (Vdc)	6-35		8-32
Consumption (mA)	< 7		< 3
Alarm output delay	15 seconds		
Alarm output max. current (mA)	500		
Load disconnect delay	1 minute		30 secondes
Voltage level accuracy	0.2V	2%	0.1V
Casework	Anodized aluminium, black		
Weight (gr)	200		580
Dimensions HxDxL (mm)	49x88x68	80x60x40	145x92x85
Battery protection	Against excessive discharge		
Users protection	Against overvoltages (16 / 32 Vdc)		Against overvoltages (15.5 / 31 Vdc)
MOSFET switches	No sparks		
Norms	EN 50081-1 (emission) EN 50082-1 (immunity) Automotive Directive 95/54/CE		EN 50081-1 (emission) Automotive Directive 95/54/CE

Jumper selectable voltage	
Disengage (V)	Engage (V)
10	11.5
10.5	12
11	13
11.5	13.8
21.5	24.5
22	25
22.5	25.5
23	26.5

SBM-02




SBM-02 – Battery monitor 12 and 24Vdc

Model		SBM-02
Supply voltage range		9-35 Vdc
Supply current @ 12Vdc, without BL		9 mA
Supply current @ 24Vdc, without BL		7 mA
Input voltage range (« Auxiliary » battery)		2...35 Vdc
Input voltage range (« Main » battery)		0...35 Vdc
Input current range		-9999...+9999 A
Battery capacity range		20...9990 Ah
Operating temperature range		-20...50°C
Protection class		IP20 (Frontpanel IP65)
Dimensions	Front panel	Ø 64 mm
	Body diameter	Ø 52 mm
	Total depth	79 mm

Standart equipment SBM-02
Potential free alarm contact
500A/50mV current shunt
Optional accessories
SBM-PS-02-Voltage pre-scaler 1:5 (adapting the SBM-02 to input voltage 27-175Vdc)
Connection kit, type SBM-CAB-20, including 20 m of twisted pair cable (3x2x0.5 mm2) and 2 fuseholders
Communication kit, type SBM-COM, including RS232 interface box, 1.8 m of 9p DSUB serial cable and a software
Communication kit, type SBM-COM-USB, including USB interface box, 1.8 m of USB cable and software.
Temperature kit, type SBM;-TEMP-20, with 20 m cable
Shunt 1200 A/50 mV, type SH-1200-50



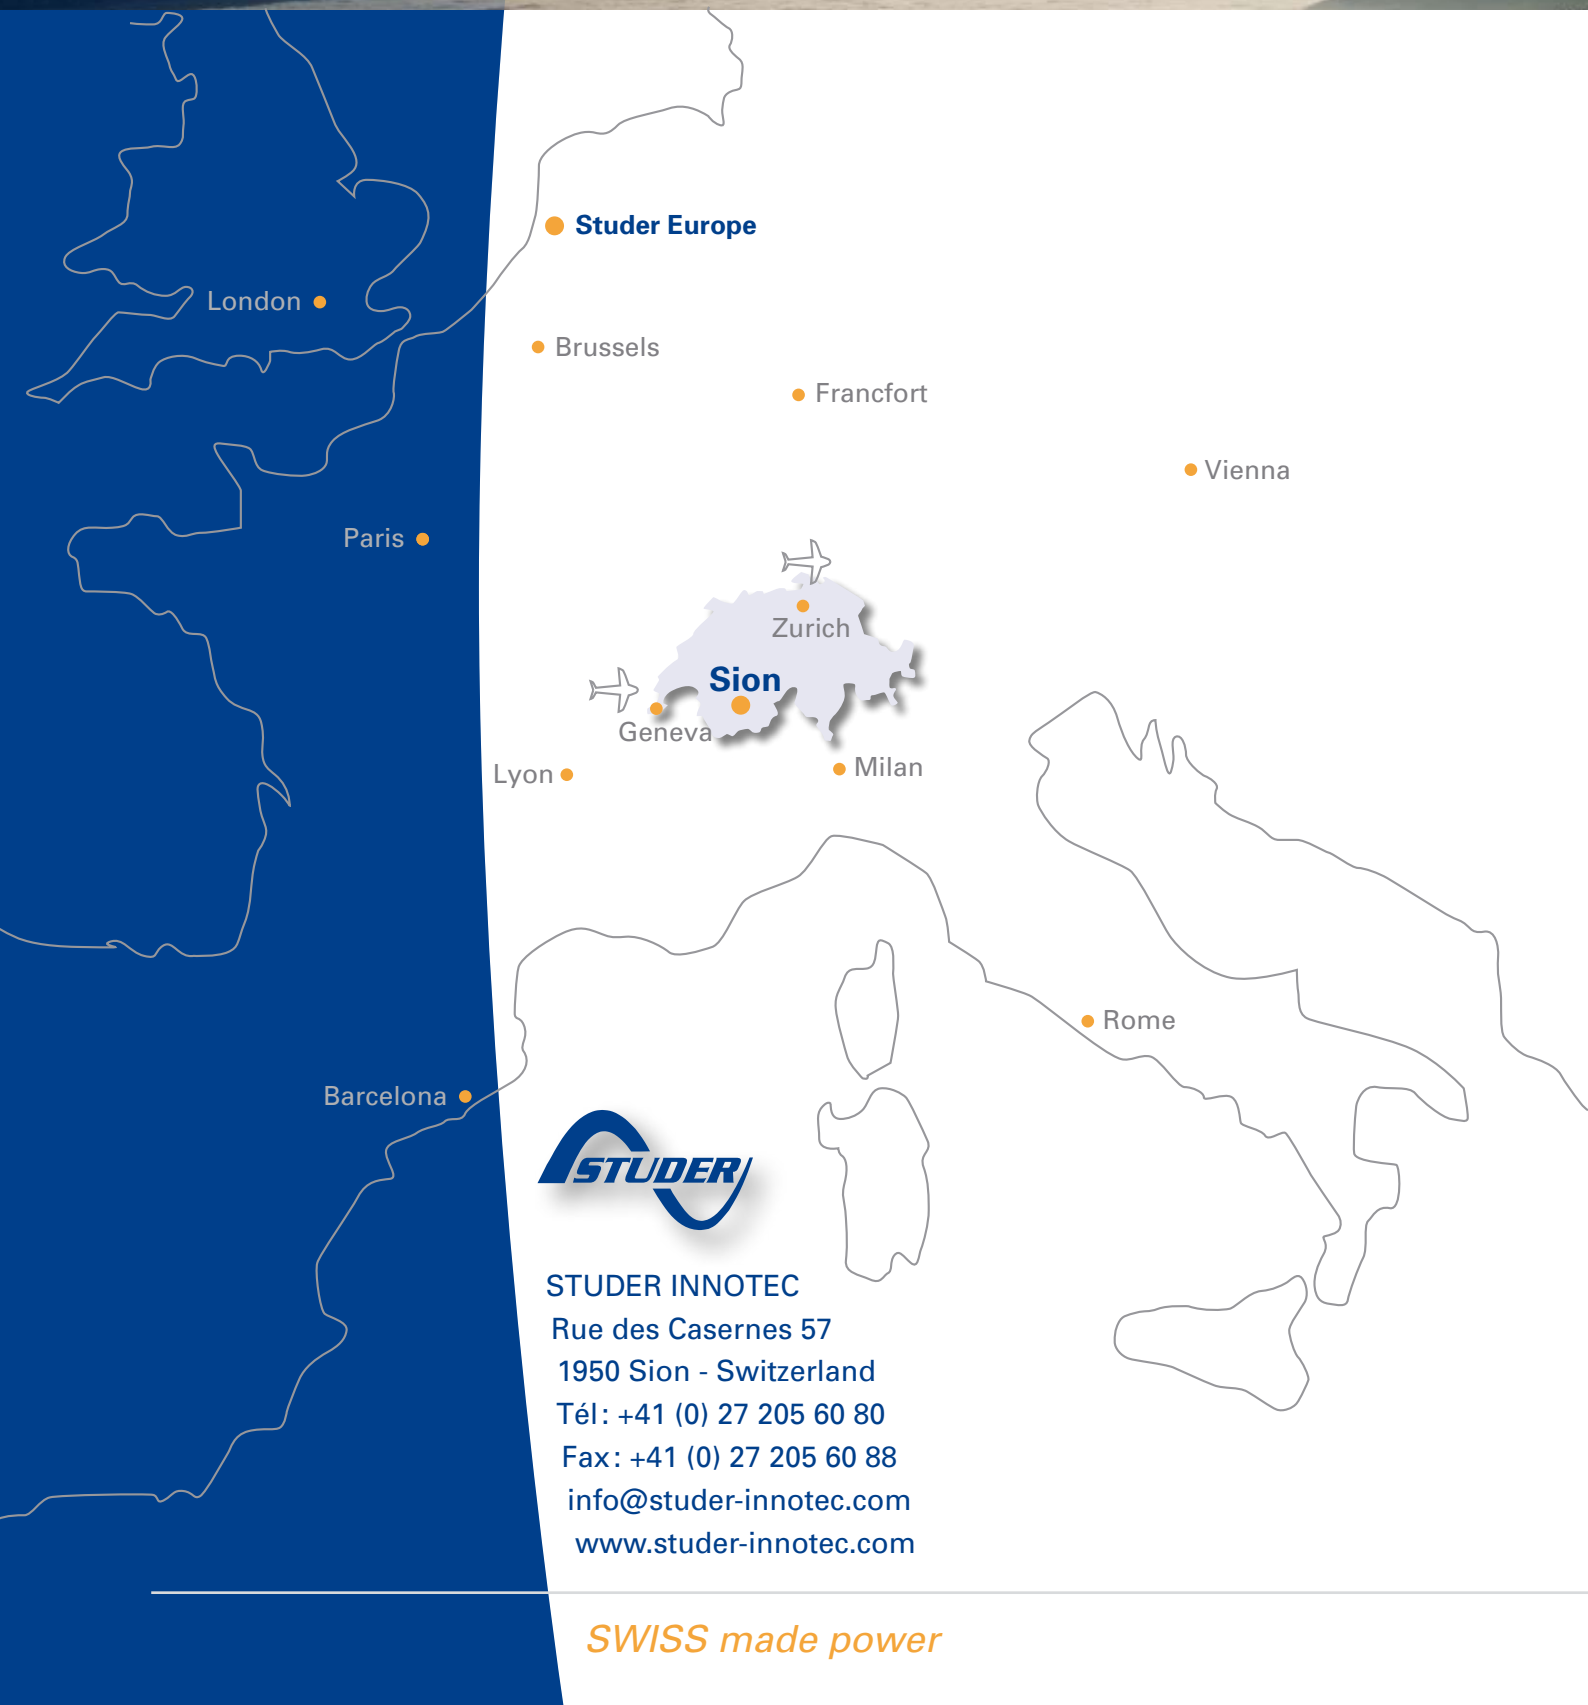

● **Studer Europe**

● Brussels

● Frankfurt

● Vienna

● Paris

● Zurich

**Sion**

● Geneva

● Lyon

● Milan

● Rome

● Barcelona



**STUDER INNOTEC**

Rue des Casernes 57

1950 Sion - Switzerland

Tél: +41 (0) 27 205 60 80

Fax: +41 (0) 27 205 60 88

[info@studer-innotec.com](mailto:info@studer-innotec.com)

[www.studer-innotec.com](http://www.studer-innotec.com)

*SWISS made power*