



c3controls' line of IEC Contactors are easy to install and designed to perform in a broad range of global applications. Our Series 300 Non-Reversing and Series 310 Reversing Contactors feature DIN rail and panel mounting, IP20 guarded terminals, multi-point coils, and include a wide variety of shared accessories.

# IEC CONTACTORS

Series 300 Non-Reversing 30

Series 310 Reversing 32

Accessories 34

Replacement Components 36

Specifications 37

Circuit Diagrams 41

Electrical Life 42

Dimensions 43



NOTE: The scope (range, description, price, specifications, dimensions, etc.) of the product featured in this section is subject to change without notice. Refer to [www.c3controls.com](http://www.c3controls.com) for product updates.

#### Conformity to Standards:

UL 508

CSA C22.2 No. 14

IEC 60947-1, 60947-4-1

#### Certifications:

UL File #: E236197 (Guide NLDX, NLDX7),  
E68568 (Guide NKCR, NKCR7)

CE Marked (per EU Low Voltage Directive  
2006/95/EC and 93/68/EEC)



Visit [www.c3controls.com](http://www.c3controls.com) to download product certifications.

## IT'S EASY TO BUILD YOUR OWN CONTACTOR

Simply pick the code number from each of the sections below and combine them to build your part number. See page 6 for more detailed directions.

### IEC Non-Reversing Contactors



Example: To build one of our most popular Contactors, the part number would be **I + II + III** or **300-S09N30D10**



### I. NON-REVERSING CONTACTORS (3 NORMALLY OPEN POLES)

CODE	MAX. I <sub>e</sub> (A)		RATINGS FOR SWITCHING AC MOTORS - AC-2, AC-3, AC-4										PRICE
			kW (50Hz)				HP (60Hz)						
			3 PHASE				1 PHASE		3 PHASE				
			230V	400/415V	500V	690V	115V	230V	200V	230V	460V	575V	
300-S09N30	9	25	2.2	4	5.5	5.5	1/2	1-1/2	3	3	5	7-1/2	\$ 12.00
300-S12N30	12	25	3	5.5	7.5	7.5	3/4	2	3	3	7-1/2	10	\$ 18.00
300-S18N30	18	32	4	7.5	10	10	1	3	5	5	10	15	\$ 23.00
300-S25N30	25	45	7.5	11	15	15	2	5	7-1/2	7-1/2	15	15	\$ 29.00
300-S32N30	32	60	9	15	18.5	18.5	3	5	10	10	20	25	\$ 35.00
300-S40N30	40	60	11	18.5	25	30	3	5	10	15	30	25	\$ 48.00
300-S50N30	50	90	15	22	30	35	3	7-1/2	15	15	40	40	\$ 59.00
300-S65N30	65	110	18.5	30	40	45	5	10	20	20	50	50	\$ 67.00
300-S80N30	80	110	22	37	45	45	7-1/2	15	20	25	50	60	\$ 77.00
300-S95N30	95	140	25	45	55	55	7-1/2	15	25	30	60	75	\$133.00
300-S105N30	105	140	30	55	65	65	10	20	30	40	75	75	\$153.00

### II. COIL VOLTAGE CODE

AC COIL VOLTAGE CODES																
VOLTAGE	12	24	48	110	120	208	220	230	240	277	380	400	400 ~ 415	440	480	500
50Hz	G	H	K	D	—	—	M	—	—	—	Q	AM	R	S	—	T
60Hz	B	C	J	—	D	L	—	—	F	P	—	—	—	—	R	—
50/60Hz	XB	XC	XJ	XD	XAD	—	XAJ	XN	XF	—	—	XAM	—	XQ	—	—

DC COIL VOLTAGE CODES											PRICE
VOLTAGE	12	24	24 ~ 28	48	42 ~ 50	110	125	110 ~ 130	208 ~ 240	250	
-S09 to -S25	ZB	ZC	—	ZK	—	ZD	ZQ	—	—	ZP	\$ 8.00
-S32 to -S40	—	—	EC	—	EK	—	—	EL	EE	—	\$ 28.00
-S50 to -S105	—	—	EC	—	EK	—	—	EL	EE	—	\$131.00

### III. AUXILIARY CONTACT CONFIGURATION

CODE	DESCRIPTION	PRICE
00	Without Auxiliary Contacts (Contactors 300-S25 to 300-S105 only)	\$ —
10	1 Normally Open*	\$ 4.00
01	1 Normally Closed*	\$ 4.00

\*NOTE: Integral right side mounted on 9A ~ 18A contactors, front mounted on 25A ~ 105A contactors.

DISCOUNT  
SCHEDULE **C**

## SOME OF OUR POPULAR CONFIGURATIONS:

### IEC NON-REVERSING CONTACTORS

CATALOG NUMBER	DESCRIPTION	PRICE
300-S09N30D10	Non-Reversing, 9A, 3 Pole, 120V AC Coil, 1 NO Auxiliary Contact	\$ 16.00
300-S09N30ZC10	Non-Reversing, 9A, 3 Pole, 24V DC Coil, 1 NO Auxiliary Contact	\$ 24.00
300-S25N30D10	Non-Reversing, 25A, 3 Pole, 120V AC Coil, 1 NO Auxiliary Contact	\$ 33.00

## IEC NON-REVERSING CONTACTORS

c3controls Series 300 Contactors are ideal for motor, actuator, solenoid, and other power switching applications where panel space is a premium and device modularity is required to satisfy virtually any application requirement. cULus and CE Markings make them suitable for use anywhere in the world. Small size, IP20 guarded terminals with dual terminal markings, and shared accessories will help reduce your total installed costs and enhance the features and performance of your equipment. Just look and see what the Series 300 has to offer.

Product features include:


- Compact size – five (5) frame sizes for devices rated from 9A to 105A. Contactors rated 15HP @ 460V (11kW @ 400V) are only 45mm (1-49/64") wide reducing panel area requirements – smaller enclosures can be used for lower installed costs.
- AC and DC operating coils for control circuit application flexibility. 32A to 105A DC operated devices feature electronic coil control.
- Environmentally friendly contacts are cadmium free and non-metallic materials are asbestos, halogen, and cadmium free.
- IP20 guarded terminals prevent accidental contact with live parts.
- Dual IEC and NEMA terminal markings for ease of wiring anywhere in the world.
- Device identification marker for labeling contactors and front mounted auxiliary contacts simplifies trouble shooting in panels with many contactors.
- 35mm DIN rail mounting for all contactors from 9A to 105A for fast and easy installation and removal or panel mounting for more secure installation in high shock and vibration applications. Our 9A to 25A devices are easily installed or removed without the use of tools.
- Modular design allows Series 320 Overload Relays to be easily installed or can be used with the complete range of Series 330 Motor Protection Circuit Breakers and accessories.
- Combination head terminal screws allow the use of straight, phillips, or posidrive screwdrivers. Allen head screws on 50A through 105A contactors make it easy to apply the proper terminal tightening torque for secure conductor connections.
- Snap-on front mounted auxiliary contacts install without the use of tools for lower installed costs. Single circuits available so you only purchase what you need.



### UNIQUE PRODUCT FEATURES

#### 3 AND 4 TERMINAL COILS

4 terminal coils on 9A ~ 40A AC operated contactors and 32A ~ 40A DC operated contactors, and 3 terminal coils on 9A ~ 25A DC operated contactors and 50A ~ 105A AC or DC operated contactors, are easily accessible on contactor and overload relay assemblies or contactor and motor protection circuit breaker assemblies. The control circuit can be wired from the line side or the load side of the contactor, whichever is most convenient for the installation. Control circuit wire runs can be minimized, and the devices can be easily substituted in your existing equipment without disturbing or changing your control wires. So no matter what components are being used, Series 300 Contactors can be easily and quickly wired, reducing your labor and installation costs.

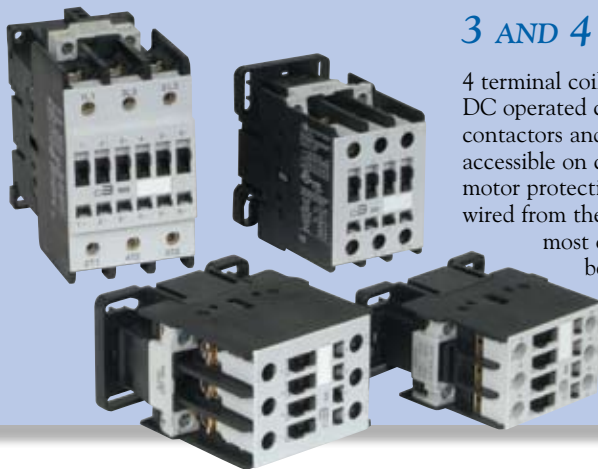

## IT'S EASY TO BUILD YOUR OWN CONTACTOR

Simply pick the code number from each of the sections below and combine them to build your part number. See page 6 for more detailed directions.

### IEC Reversing Contactors

I II III - IV

Example: To build one of our most popular Contactors, the part number would be **I + II + III + IV** or **310-S18N30D22**



#### I. REVERSING CONTACTORS (3 NORMALLY OPEN POLES)

CODE	MAX. Ie (A)		RATINGS FOR SWITCHING AC MOTORS - AC-2, AC-3, AC-4											PRICE
			kW (50Hz)				HP (60Hz)							
			3 PHASE				1 PHASE		3 PHASE					
			230V	400/415V	500V	690V	115V	230V	200V	230V	460V	575V		
310-S09N30	9	25	2.2	4	5.5	5.5	1/2	1-1/2	3	3	5	7-1/2	\$ 57.00	
310-S12N30	12	25	3	5.5	7.5	7.5	3/4	2	3	3	7-1/2	10	\$ 69.00	
310-S18N30	18	32	4	7.5	10	10	1	3	5	5	10	15	\$ 79.00	
310-S25N30	25	45	7.5	11	15	15	2	5	7-1/2	7-1/2	15	15	\$103.00	
310-S32N30	32	60	9	15	18.5	18.5	3	5	10	10	20	25	\$119.00	
310-S40N30	40	60	11	18.5	25	30	3	5	10	15	30	25	\$145.00	
310-S50N30	50	90	15	22	30	35	3	7-1/2	15	15	40	40	\$183.00	
310-S65N30	65	110	18.5	30	40	45	5	10	20	20	50	50	\$199.00	
310-S80N30	80	110	22	37	45	45	7-1/2	15	20	25	50	60	\$219.00	

#### II. COIL VOLTAGE CODE

AC COIL VOLTAGE CODES																		
VOLTAGE	12	24	48	110	120	208	220	230	240	277	380	400	400 ~ 415	440	480	500	550	600
50Hz	G	H	K	D	—	—	M	—	—	—	Q	AM	R	S	—	T	U	—
60Hz	B	C	J	—	D	L	—	—	F	P	—	—	—	—	R	—	—	T
50/60Hz	XB	XC	XJ	XD	XAD	—	XAJ	XN	XF	—	—	XAM	—	XQ	—	—	—	—
DC COIL VOLTAGE CODES																		
																	PRICE	
VOLTAGE	12	24	24 ~ 28		48	42 ~ 50		110	125	110 ~ 130		208 ~ 240		250				
-S09 to -S25	ZB	ZC	—		ZK	—		ZD	ZQ	—		—		ZP	\$ 16.00			
-S32 to -S40	—	—	EC		—	EK		—	—	EL		EE		—	\$ 56.00			
-S50 to -S80	—	—	EC		—	EK		—	—	EL		EE		—	\$262.00			

#### III. AUXILIARY CONTACT CONFIGURATION

CODE	DESCRIPTION	PRICE
00	Without Auxiliary Contacts (Contactors 310-S25 to 310-S80 only)	\$ —
22	2 Normally Open (1 NO on Forward Contactor <sup>①</sup> and 1 NO on Reverse Contactor <sup>①</sup> ) and 2 Normally Closed (1 NC on Forward Contactor <sup>②</sup> and 1 NC on Reverse Contactor <sup>②</sup> )	\$ 16.00

- ① Integral right side mounted on 9A ~ 18A contactors, front mounted on 25A ~ 80A contactors.  
② Integrated contacts as part of the electrical/mechanical interlock.

#### IV. OPTIONS

CODE	DESCRIPTION	FOR CONTACTOR	PRICE (deduct)
(Blank)	With Power Wires	—	\$ —
WW	Without Interconnecting Power Wires	-S09 to -S18	-\$ 12.00
		-S25	-\$ 14.00
		-S32 to -S40	-\$ 18.00
		-S50 to -S80	-\$ 34.00

DISCOUNT  
SCHEDULE **C**

## IEC REVERSING CONTACTORS

c3controls Series 310 Reversing Contactors are ideal for reversing motors in applications where panel space is a premium and device modularity is required to satisfy virtually any application requirement. cULus and CE Markings make them suitable for use anywhere in the world. A common mechanical interlock, power wiring modules, and IP20 guarded terminals with dual terminal markings, and shared accessories will help reduce your total installed costs and enhance the features and performance of your equipment. Just look and see what the Series 310 has to offer.

Product features include:


- Modular design for use with separately mounted overload relays or Series 320 Overload Relays can be directly mounted on Series 310 Reversing Contactors without load-side interconnecting power wires. Can also be used with separately mounted Series 330 Motor Protection Circuit Breakers or installed with a motor protection circuit breaker on a starter assembly mounting plate.
- AC and DC operating coils for control circuit application flexibility. 32A to 80A DC operated devices feature electronic coil control.
- Environmentally friendly contacts are cadmium free and non-metallic materials are asbestos, halogen and cadmium free.
- IP20 guarded terminals prevent accidental contact with live parts.
- Dual IEC and NEMA terminal markings for ease of wiring anywhere in the world.
- Device identification marker for labeling contactors and front mounted auxiliary contacts simplifies trouble shooting in panels with many contactors.
- 35mm DIN rail mounting for all contactors from 9A to 80A for fast and easy installation and removal or panel mounting for more secure installation in high shock and vibration applications. Our 9A to 25A devices are easily installed or removed without the use of tools.
- Power wiring modules provide reliable, rigid interconnections between the forward and reverse contactors.
- Combination head terminal screws allow the use of straight, phillips, or posidrive screwdrivers. Allen head screws on 50A through 80A contactors make it easy to apply the proper terminal tightening torque for secure conductor connections.
- Snap-on front mounted auxiliary contacts install without the use of tools for lower installed costs. Single circuits available so you only purchase what you need.



### UNIQUE PRODUCT FEATURES



Series 310 Reversing Contactors feature a single side mounted electrical and mechanical or mechanical only interlock that is used for the whole range of contactors, enabling a 9A contactor to be interlocked with a 105A contactor. The side mounted interlock doesn't increase the depth of the contactor and doesn't prevent front mounted auxiliary contacts from being added to either the forward or reverse contactors. Contactors are physically secured together with a dovetail bracket that installs from the bottom of the contactor – so it can't fall out when it is installed on a DIN rail or on a panel, even in high vibration applications. To complete the reversing contactor assembly, attractive, insulated wiring modules provide error free interconnections between the forward and reverse contactors. Simple to use, modular accessories make reversing contactors easy to assemble in the field – or order them factory assembled. Either way you'll get the performance and features you need for your reversing motor applications.



### SOME OF OUR POPULAR CONFIGURATIONS:





IEC REVERSING CONTACTORS		
CATALOG NUMBER	DESCRIPTION	PRICE
310-S09N30D22	Reversing, 9A, 3 Pole, 120V AC Coil, 2 NO and 2 NC Auxiliary Contacts	\$ 73.00
310-S09N30ZC22	Reversing, 9A, 3 Pole, 24V DC Coil, 2 NO and 2 NC Auxiliary Contacts	\$ 89.00
310-S25N30D22	Reversing, 25A, 3 Pole, 120V AC Coil, 2 NO and 2 NC Auxiliary Contacts	\$119.00
310-S25N30ZC22	Reversing, 25A, 3 Pole, 24V DC Coil, 2 NO and 2 NC Auxiliary Contacts	\$135.00
310-S32N30D22	Reversing, 32A, 3 Pole, 120V AC Coil, 2 NO and 2 NC Auxiliary Contacts	\$135.00
310-S32N30EC22	Reversing, 32A, 3 Pole, 24 ~ 28V DC Coil, 2 NO and 2 NC Auxiliary Contacts	\$191.00



## FRONT MOUNTED AUXILIARY CONTACTS




Our front mounted auxiliary contacts feature IP20 guarded terminals to protect against accidental contact with live parts. The device identification marker simplifies trouble shooting in panels with many contactors. These contacts snap-on and install without the use of tools. NOTE: See chart below for maximum number of front mounted auxiliary contacts.

CODE	CONTACT CONFIGURATION	CONNECTION DIAGRAM	PRICE
300-SFA10	1 Normally Open		\$ 4.00
300-SFA01	1 Normally Closed		\$ 4.00
300-SFA10EM	1 Normally Open Early Make		\$ 6.00
300-SFA01DB	1 Normally Closed Delayed Break		\$ 6.00

## MAXIMUM NUMBER OF FRONT OR SIDE MOUNTED AUXILIARY CONTACTS

CONTACTOR	MAXIMUM NUMBER
S09, S12, S18, S25	4
S32, S40	6
S50, S65, S80, S95, S105	8

## WIRING MODULES

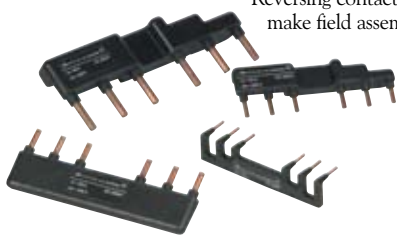

Reversing contactor power wiring modules make field assembly of reversing contactors easy. Line and load side over-molded copper bus bar conductors ensure error free installation and make for a rigid assembly with a mechanical interlock (300-SMI) or electrical/mechanical interlock (300-SMEI).





CODE	FOR USE WITH CONTACTORS	PRICE
300-RWS18	S09, S12, S18	\$12.00
300-RWS25	S25	\$14.00
300-RWS40	S32, S40	\$18.00
300-RWS80	S50, S65, S80	\$34.00

DISCOUNT  
SCHEDULE **C**

## SIDE MOUNTED AUXILIARY CONTACTS



Side mounted auxiliary contacts feature IP20 guarded terminals to protect against accidental contact with live parts. NOTE: See chart at left for maximum number of side mounted auxiliary contacts.

CODE	CONTACT CONFIGURATION	CONNECTION DIAGRAM	PRICE
300-SSA11	1 Normally Open and 1 Normally Closed		\$11.00
300-SSA20	2 Normally Open		\$11.00
300-SSA11X	1 Normally Open and 1 Normally Closed*		\$11.00
300-SSA20X	2 Normally Open*		\$11.00

\*NOTE: For use with 300-SSA11 or 300-SSA20 when more than one side mounted auxiliary contact module is installed on the same side of the contactor.

## INTERLOCKS



### MECHANICAL INTERLOCK

Our side mounted mechanical interlock for use with reversing contactors, reversing starters, two-speed starters and star-delta (wye-delta) starters. This single interlock can be used with all size contactors from 9A ~ 105A, preventing the forward and reverse contactors from being energized at the same time.

### ELECTRICAL & MECHANICAL INTERLOCK

c3controls now offers an electrical/mechanical interlock for reversing contactors. This interlock has the same features as the mechanical interlock but also has two normally closed auxiliaries built into the unit for electrical interlocking, eliminating the need for two normally closed auxiliary contacts and the mechanical interlock. The result of integrating the normally closed auxiliary contact is decreased width of reversing contactors and more available auxiliary contact locations.

CODE	DESCRIPTION	PRICE
300-SMI	Side Mounted Mechanical Interlock	\$12.00
300-SMEI	Side Mounted Electrical/Mechanical Interlock	\$15.00

## ACCESSORIES FOR IEC NON-REVERSING AND REVERSING CONTACTORS



The complete range of Series 300 Non-Reversing Contactors and 310 Reversing Contactors share common accessories including single circuit front mounted auxiliary contacts, two circuit side mounted auxiliary contacts, a single electrical/mechanical or mechanical interlock, and coil mounted surge suppressors. Designing starter assemblies and panels is easy – you don't have to remember which auxiliary is required for each contactor, they all work together. Installation is easy too – once you learn how to install each accessory, it's always the same no matter what contactor it's being installed on. If simple design and assembly isn't enough – you'll also reduce your inventory and maximize its flexibility, because unique accessories are not required for each size contactor.



### SURGE SUPPRESSORS

Coil mounted surge suppressors protect sensitive electronic components in control circuits from damaging line voltage spikes.

DISCOUNT  
SCHEDULE **C**

RC SURGE SUPPRESSOR				
CODE	VOLTAGE RANGE		FOR USE WITH CONTACTOR	PRICE
300-SRCS2J	24 ~ 48V AC		S09, S12, S18, S25, S32, S40	\$10.00
300-SRCS2AH	50 ~ 127V AC		S09, S12, S18, S25, S32, S40	\$10.00
300-SRCS2M	130 ~ 250V AC		S09, S12, S18, S25, S32, S40	\$10.00
300-SRCS5J	24 ~ 48V AC		S50, S65, S80, S95, S105	\$10.00
300-SRCS5AH	50 ~ 127V AC		S50, S65, S80, S95, S105	\$10.00
300-SRCS5M	130 ~ 250V AC		S50, S65, S80, S95, S105	\$10.00
DIODE SURGE SUPPRESSOR				
CODE	VOLTAGE RANGE		FOR USE WITH CONTACTOR	PRICE
300-SDS5T	12 ~ 600V DC		S09, S12, S18, S25, S32, S40, S50, S65, S80, S95, S105	\$10.00

## IT'S EASY TO BUILD YOUR OWN OPERATING COIL

Simply pick the code number from each of the sections below and combine them to build your part number. See page 6 for more detailed directions.

### Operating Coils



Example: To build one of our most popular Operating Coils, the part number would be **I + II** or **ACS25D**



#### I. OPERATING COIL TYPE

CODE	DESCRIPTION	FOR USE WITH CONTACTORS	PRICE
ACS25	AC Operating Coil	S09, S12, S18, S25	\$ 6.00
ACS40	AC Operating Coil	S32, S40	\$ 8.00
ACS105	AC Operating Coil	S50, S65, S80, S95, S105	\$ 12.00
DCS25	DC Operating Coil	S09, S12, S18, S25	\$ 12.00
DCS40	DC Operating Coil	S32, S40	\$ 38.00
DCS105	DC Operating Coil	S50, S65, S80, S95, S105	\$ 60.00

#### II. COIL VOLTAGE CODE

##### AC COIL VOLTAGE CODES


VOLTAGE	12	24	48	110	120	208	220	230	240	277	380	400	400 ~ 415	440	480	500	550	600
50Hz	G	H	K	D	—	—	M	—	—	—	Q	AM	R	S	—	T	U	—
60Hz	B	C	J	—	D	L	—	—	F	P	—	—	—	—	R	—	—	T
50/60Hz	XB	XC	XJ	XD	XAD	—	XAJ	XN	XF	—	—	XAM	—	XQ	—	—	—	—

##### DC COIL VOLTAGE CODES

VOLTAGE	12	24	24 ~ 28	48	42 ~ 50	110	125	110 ~ 130	208 ~ 240	250
-S09 to -S25	ZB	ZC	—	ZK	—	ZD	ZQ	—	—	ZP
-S32 to -S40	—	—	EC	—	EK	—	—	EL	EE	—
-S50 to -S105	—	—	EC	—	EK	—	—	EL	EE	—

## CONTACT KITS

One contact kit includes six stationary contacts, three moving contacts and miscellaneous parts.

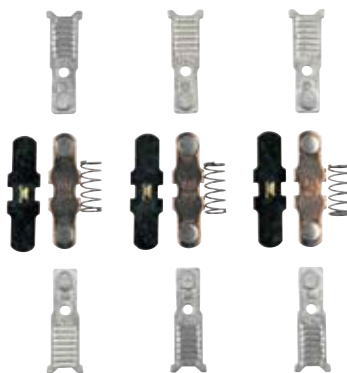

CODE	FOR USE WITH CONTACTORS	PRICE
300-SCK09	S09	\$ 7.00
300-SCK12	S12	\$ 10.00
300-SCK18	S18	\$ 12.00
300-SCK25	S25	\$ 18.00
300-SCK32	S32	\$ 20.00
300-SCK40	S40	\$ 33.00
300-SCK50	S50	\$ 42.00
300-SCK65	S65	\$ 50.00
300-SCK80	S80	\$ 60.00
300-SCK95	S95	\$ 88.00
300-SCK105	S105	\$108.00

DISCOUNT  
SCHEDULE **C**



SPECIFICATIONS:

ELECTRICAL SPECIFICATIONS												
		S09	S12	S18	S25	S32	S40	S50	S65	S80	S95	S105
<b>ELECTRICAL GENERAL</b>												
	<b>UNITS</b>											
Rated Operating Frequency	Hz	25 ~ 400										
Impedance per Pole	mΩ	2.35	2.35	2.41	1.65	1.28	0.95	0.85	0.86	0.86	0.76	0.76
<b>POWER DISSIPATION PER POLE</b>												
AC-1	W	1.47	1.47	2.46	3.34	4.6	3.42	6.89	10.4	10.4	14.89	14.89
AC-3	W	0.19	0.34	0.78	1.03	1.31	1.52	2.12	3.63	5.5	6.86	8.37
Rated Coil Frequencies		AC: 50Hz, 60Hz, 50/60Hz DC and DC/AC: 50/60Hz										
<b>ELECTRICAL UL/CSA APPLICATIONS</b>												
Rated Operating Voltage, Ue	VAC	600										
General Purpose Current Rating	A	25	25	32	32	60	60	90	110	110	140	140
<b>RATED 1 PHASE OPERATING CURRENT, Ie</b>												
115V	A	9.8	13.8	16	24	34	34	34	56	80	80	100
230V	A	10	12	17	28	28	28	40	40	50	68	88
<b>RATED 1 PHASE OPERATING POWER, Pe</b>												
115V	HP	1/2	3/4	1	2	3	3	3	5	7-1/2	7-1/2	10
230V	HP	1-1/2	2	3	5	5	5	7-1/2	10	15	15	20
<b>RATED THREE PHASE OPERATING CURRENT, Ie</b>												
200V	A	11.0	11.0	17.5	25.3	32.2	32.2	48.3	62.1	62.1	78.2	92
230V	A	9.6	9.6	15.2	22	28	42	42	54	68	80	104
460V	A	7.6	11	14	21	27	40	52	65	65	77	96
575V	A	9	11	17	17	27	27	41	52	62	77	77
<b>RATED THREE PHASE OPERATING POWER, Pe</b>												
200V	HP	3	3	5	7-1/2	10	10	15	20	20	25	30
230V	HP	3	3	5	7-1/2	10	15	15	20	25	30	40
460V	HP	5	7-1/2	10	15	20	30	40	50	50	60	75
575V	HP	7-1/2	10	15	15	25	25	40	50	60	75	75
Size		00	—	0	—	1	—	2	—	—	3	—
Short Circuit Rating	kA	5	5	5	5	5	5	10	10	10	10	10
Maximum Fuse Size	A	25	25	32	32	60	60	90	110	110	140	40
Electrical Endurance, AC-3 at Maximum Rated 3 Phase Operating Power (@460V)	Ops. (mill.)	1.8	2.0	1.6	1.6	1.5	1.5	1.6	1.8	1.5	1.5	1.0
<b>ELECTRICAL IEC APPLICATIONS</b>												
Rated Insulation Voltage, Ui	V	1000										
Rated Impulse Voltage Withstand, Uimp	kV	6	6	6	6	6	6	8	8	8	8	8
Rated Operating Voltage, Ue	VAC	690										
Rated Thermal Current, Ith for Ambient Temperature < 55° C (131° F)	A	25	25	32	45	60	60	90	110	110	140	140
<b>RATED AC-1 OPERATING CURRENT, Ie</b>												
At 55° C (131° F)	A	25	25	32	45	60	60	90	110	110	140	140
At 70° C (158° F)	A	20	20	25	32	48	48	72	88	88	110	110
<b>RATED AC-3 OPERATING CURRENT, Ie</b>												
220 ~ 240V	A	9	12	18	25	32	40	50	65	80	95	105
380 ~ 400V	A	9	12	18	25	32	40	50	65	80	95	105
415 ~ 440V	A	9	12	18	25	32	40	50	65	80	95	105
500V	A	7.5	10.5	14	19	24	32	38	55	63	79	85
660 ~ 690V	A	7	9	13	15	22	25	34	44	48	60	80
<b>RATED 3 PHASE AC-3 OPERATING POWER, Pe</b>												
220 ~ 240V	kW	2.2	3	4	6.5	9	11	15	18.5	22	25	30
380 ~ 400V	kW	4	5.5	7.5	11	15	18.5	22	30	37	45	55
415 ~ 440V	kW	4	5.5	9	12.5	15	22	30	37	45	55	55
500V	kW	5.5	7.5	10	15	18.5	25	30	40	45	55	65
660 ~ 690V	kW	5.5	7.5	10	15	18.5	30	33	45	45	55	65

**ELECTRICAL AND COIL CHARACTERISTICS SPECIFICATIONS**

		S09	S12	S18	S25	S32	S40	S50	S65	S80	S95	S105
<b>ELECTRICAL IEC APPLICATIONS (CONTINUED)</b>												
<b>UNITS</b>												
<b>RATED SHORT-TIME CURRENT, I<sub>cs</sub></b>												
1 Second	A	455	455	570	630	1010	1265	1580	2530	2530	3300	3300
5 Seconds	A	205	205	254	280	450	450	710	1130	1130	1485	1485
10 Seconds	A	144	144	180	200	320	400	500	800	800	1050	1050
30 Seconds	A	85	85	104	115	185	230	290	460	460	600	600
1 Minute	A	60	60	74	80	130	165	205	325	325	430	430
3 Minutes	A	35	35	46	50	90	100	120	185	185	250	250
<b>MAXIMUM ELECTRICAL SWITCHING RATE</b>												
AC-1	Ops./hr.	1200	1200	1200	1200	1200	1200	1200	1200	1200	600	600
AC-3	Ops./hr.	1200	1200	1200	1200	1200	1200	1200	1200	1200	600	600
AC-4	Ops./hr.	360	360	360	360	360	200	200	200	200	200	200
Electrical Endurance, AC-3 at Maximum Rated 3 Phase Operating Power (@400V)	Ops. (mill.)	1.6	1.8	1.3	1.4	1.3	1.3	1.2	1.4	1.2	1.2	1.0
Making Capacity	A	450	450	450	450	550	1000	1000	1000	1000	1280	1280
<b>BREAKING CAPACITY</b>												
U <sub>e</sub> ≤ 400V	A	250	250	250	450	450	920	920	920	920	1050	1050
U <sub>e</sub> = 500V	A	250	250	250	450	450	920	920	920	920	1050	1050
U <sub>e</sub> = 690V	A	130	130	130	170	205	780	780	780	780	950	950
<b>COIL CHARACTERISTICS</b>												
Rated Insulation Voltage, U <sub>i</sub>	V	1000										
<b>OPERATING LIMITS</b>												
<b>50HZ, 60HZ, 50/60HZ</b>												
Operating	xU <sub>c</sub>	0.80 ~ 1.10										
Pick-Up	xU <sub>c</sub>	0.60 ~ 0.80	0.60 ~ 0.80	0.60 ~ 0.80	0.60 ~ 0.80	0.65 ~ 0.80	0.65 ~ 0.80	0.65 ~ 0.80	0.65 ~ 0.80	0.65 ~ 0.80	0.65 ~ 0.80	0.65 ~ 0.80
Sealed	xU <sub>c</sub>	0.35 ~ 0.55	0.35 ~ 0.55	0.35 ~ 0.55	0.35 ~ 0.55	0.40 ~ 0.60	0.40 ~ 0.60	0.40 ~ 0.60	0.40 ~ 0.60	0.40 ~ 0.60	0.40 ~ 0.60	0.40 ~ 0.60
<b>DC</b>												
Operating	xU <sub>c</sub>	0.80 ~ 1.10										
Pick-Up	xU <sub>c</sub>	0.45 ~ 0.65	0.45 ~ 0.65	0.45 ~ 0.65	0.45 ~ 0.65	0.45 ~ 0.75	0.45 ~ 0.75	0.70 ~ 0.80	0.70 ~ 0.80	0.70 ~ 0.80	0.70 ~ 0.80	0.70 ~ 0.80
Sealed	xU <sub>c</sub>	0.15 ~ 0.30	0.15 ~ 0.30	0.15 ~ 0.30	0.15 ~ 0.30	0.15 ~ 0.45	0.15 ~ 0.45	0.40 ~ 0.60	0.40 ~ 0.60	0.40 ~ 0.60	0.40 ~ 0.60	0.40 ~ 0.60
<b>COIL CONSUMPTION</b>												
<b>50HZ, 60HZ, 50/60HZ</b>												
Pick-Up	VA	70	70	70	70	98	98	255	255	255	255	255
Hold-In	VA	7	7	7	7	9	9	16	16	16	16	16
<b>DC</b>												
Pick-Up	W	5.5	5.5	5.5	5.5	180	180	340	340	340	340	340
Hold-In	W	5.5	5.5	5.5	5.5	2.2	2.2	6.5	6.5	6.5	6.5	6.5
<b>OPERATING TIMES</b>												
<b>AC</b>												
Pick-Up	msec.	8~20	8~20	8~20	8~20	10~19	10~19	15~30	15~30	15~30	15~30	15~30
Drop-Out	msec.	6~13	6~13	6~13	6~13	5~25	5~25	9~15	9~15	9~15	9~15	9~15
<b>DC</b>												
Pick-Up	msec.	35 ~ 45	35 ~ 45	35 ~ 45	35 ~ 45	40 ~ 55	40 ~ 55	50 ~ 60	50 ~ 60	50 ~ 60	50 ~ 60	50 ~ 60
Drop-Out	msec.	7 ~ 12	7 ~ 12	7 ~ 12	7 ~ 12	30 ~ 65	30 ~ 65	55 ~ 60	55 ~ 60	55 ~ 60	55 ~ 60	55 ~ 60
<b>POWER DISSIPATION</b>												
50Hz, 60Hz, 50/60Hz	W	2.6	2.6	2.6	2.6	4.3	4.3	8.0	8.0	8.0	8.0	8.0
<b>POWER FACTOR</b>												
Closed	cosφ	0.33	0.33	0.33	0.33	0.28	0.28	0.26	0.26	0.26	0.26	0.26
Open	cosφ	0.84	0.84	0.84	0.84	0.73	0.73	0.54	0.54	0.54	0.54	0.54

## MECHANICAL, ENVIRONMENTAL AND CONSTRUCTION SPECIFICATIONS

		S09	S12	S18	S25	S32	S40	S50	S65	S80	S95	S105
<b>MECHANICAL</b>												
	<b>UNITS</b>											
Mechanical Endurance	Ops. (mill.)	10										
Maximum Mechanical Switching Rate	Ops./hr.	9,000										
<b>ENVIRONMENTAL</b>												
Ambient Operating Temperature		-25 to +55° C (-13 to +131° F)										
Ambient Storage Temperature		-55 to +80° C (-58 to +176° F)										
Altitude		3,000m (9,792 ft.)										
<b>CONSTRUCTION GENERAL</b>												
Pollution Degree		3	3	3	3	3	3	3	3	3	3	3
<b>INGRESS PROTECTION</b>												
Main Terminals		IP20	IP20	IP20	IP20*	IP20*	IP20*	IP20*	IP20*	IP20*	IP20*	IP20*
Coil Terminals		IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20
Auxiliary Contact Terminals		IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20
Weight	kg	0.295	0.295	0.295	0.295	0.52	0.54	1.105	1.12	1.13	1.45	1.47
	lbs.	0.65	0.65	0.65	0.65	1.15	1.19	2.44	2.47	2.49	3.20	3.24
RoHS Compliance		For RoHS compliance documentation by product, refer to <a href="http://www.c3controls.com">www.c3controls.com</a> .										


\*NOTE: With conductors connected.

		S09 - S18	S25	S32 - S40	S50 - S80	S95 - S105
<b>CONSTRUCTION CONDUCTOR CROSS-SECTIONS, MAIN TERMINALS</b>						
	<b>UNITS</b>					
<b>MAIN TERMINAL CAPACITY</b>						
	Solid, Stranded and Finely Stranded without End Sleeve	mm <sup>2</sup>	2 x 0.5 ~ 2.5 or 2 x 2.5 ~ 6	2 x 0.5 ~ 2.5 or 2 x 2.5 ~ 10	—	—
	Finely Stranded with or without End Sleeve	mm <sup>2</sup>	2 x 1 ~ 2.5 or 2 x 2.5 ~ 6	2 x 1 ~ 2.5 or 2 x 2.5 ~ 10	—	—
	AWG Wire		2 x 20 ~ 12	2 x 20 ~ 8	—	—
	Solid and Stranded	mm <sup>2</sup>	—	—	0.75 ~ 16	1 ~ 35
	Stranded with End Sleeve	mm <sup>2</sup>	—	—	0.75 ~ 16	1 ~ 35
	Stranded without End Sleeve	mm <sup>2</sup>	—	—	1 ~ 16	1 ~ 35
	AWG Wire		—	—	18 ~ 6	16 ~ 2
	Solid and Stranded	mm <sup>2</sup>	—	—	1 ~ 16	1 ~ 16
	Stranded with End Sleeve	mm <sup>2</sup>	—	—	1 ~ 16	1 ~ 25
	Stranded without End Sleeve	mm <sup>2</sup>	—	—	1 ~ 16	1 ~ 25
	AWG Wire		—	—	18 ~ 6	16 ~ 4
	Solid and Stranded	mm <sup>2</sup>	—	—	Max. 16	Max. 50/Max. 4
	Stranded with End Sleeve	mm <sup>2</sup>	—	—	Max. 16	Max. 35
	Stranded without End Sleeve	mm <sup>2</sup>	—	—	Max. 16	Max. 35
	Finely Stranded	mm <sup>2</sup>	—	—	Max. 16	Max. 35
	AWG Wire		—	—	Max. 16	Max. 2/Max. 12
	Tightening Torque	Lb-in.	8.8 ~ 16.9	14.2 ~ 26.6	22.1 ~ 35.4	35.4 ~ 53.1
		Nm	1.0 ~ 1.9	1.6 ~ 3.0	2.5 ~ 4.0	4.0 ~ 6.0
Screwdriver			Phillips nr. 2	Phillips nr. 2	Phillips nr. 2	Allen 4mm

**AUXILIARY CONTACTS SPECIFICATIONS**


		INTERNAL AUXILIARY CONTACT			CONTACT BLOCKS
		S09	S12	S18	300-SFA & 300-SSA
<b>ELECTRICAL GENERAL</b>					
	<b>UNITS</b>				
Minimum Switching Capacity		5mA @ 17V			
Electrical Endurance	Ops. (mill.)	1			
Mechanical Endurance	Ops. (mill.)	15			
Non-Overlap Time	msec.	1.5			
Insulation Resistance	mΩ	>10			
<b>ELECTRICAL UL/CSA APPLICATIONS</b>					
Rated Operating Voltage, Ue	V	600			
<b>PILOT DUTY RATING</b>					
AC		A600			
DC		P600	P600	P600	Q600
<b>ELECTRICAL IEC APPLICATIONS</b>					
Rated Insulation Voltage, Ui	V	1000			
Rated Operating Voltage, Ue	V	690			
Rated Thermal Current, Ith for Ambient Temperature <55° C	A	20	20	20	10
<b>RATED AC-15 OPERATING CURRENT, Ie</b>					
110 ~ 127V	A	10	10	10	6
220 ~ 240V	A	10	10	10	6
380 ~ 400V	A	6	6	6	4
415 ~ 450V	A	5	5	5	3.5
500V	A	4	4	4	2.5
600 ~ 690V	A	2	2	2	1.5
<b>RATED DC-13 OPERATING CURRENT, Ie</b>					
24V	A	6	6	6	6
48V	A	4	4	4	4
110V	A	2	2	2	2
220V	A	0.7	0.7	0.7	0.7
440V	A	0.7	0.7	0.7	0.7
<b>MAKING CAPACITY, Im</b>					
AC-15/AC-11 Ue ≤ 400V 50/60Hz	A	250	250	250	90
DC-13/DC-11 Ue ≤ 220V	A	250	250	250	90
<b>BREAKING CAPACITY, Im</b>					
AC-15/AC-11 Ue ≤ 400V 50/60Hz	A	250	250	250	60
DC-13/DC-11 Ue ≤ 220V	A	2	2	2	0.95
Short Circuit Protection with Fuses (gG/gL)	A	10	10	10	10
RoHS Compliance		For RoHS compliance documentation by product, refer to <a href="http://www.c3controls.com">www.c3controls.com</a> .			

**OPERATING POSITION**

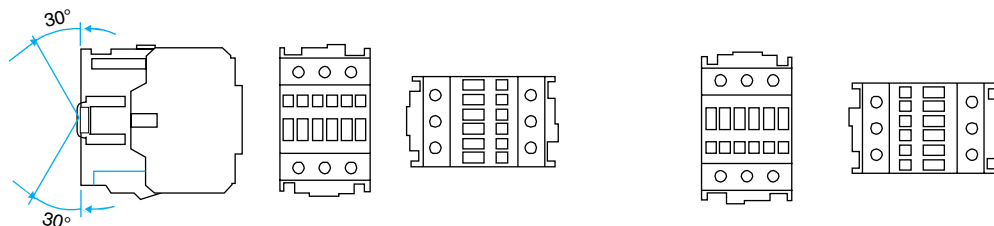


**SERIES 300 NON-REVERSING CONTACTOR CIRCUIT DIAGRAMS**

POWER CIRCUIT

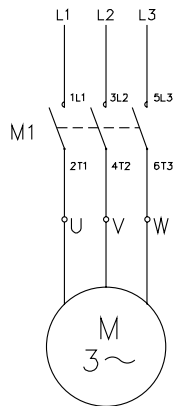


CONTROL CIRCUIT

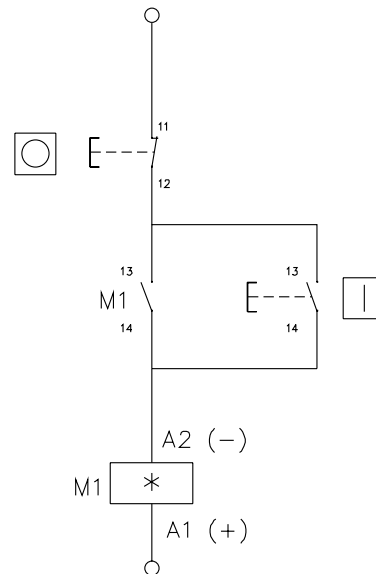


M1 = Forward Contactor  
F = Forward Push Button  
M2 = Reverse Contactor  
R = Reverse Push Button  
□ = Start Push Button  
⊞ = Emergency Stop Push Button  
\* = Coil Voltage Code

**SERIES 310 REVERSING CONTACTOR CIRCUIT DIAGRAMS**

POWER CIRCUIT

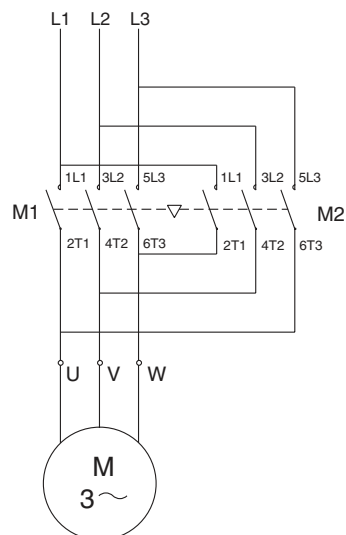

CONTROL CIRCUIT

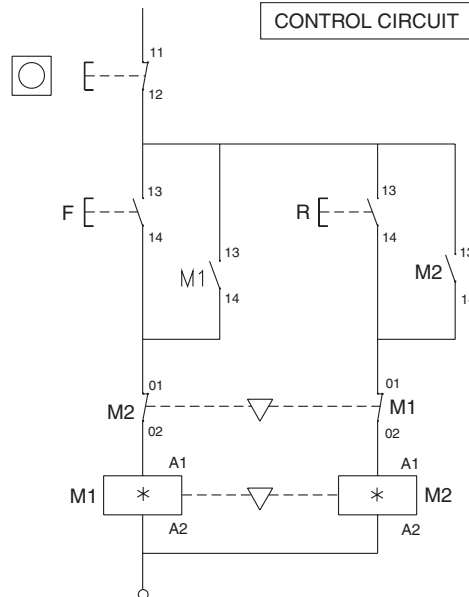

M1 = Forward Contactor  
F = Forward Push Button  
M2 = Reverse Contactor  
R = Reverse Push Button  
⊞ = Emergency Stop Push Button  
\* = Coil Voltage Code






**ELECTRICAL LIFE IN UTILIZATION CATEGORY**

To find a contactor's estimated life:


1. Identify the utilization category of the application.
2. Refer to the chart for the applicable utilization category.
3. Locate the intersection of the life-load curve for the contactor selected with the application breaking current ( $I_e$ ) on the horizontal axis of the chart.
4. Read the estimated contactor life from the vertical axis of the chart.

The life-load curves are based on tests in accordance with IEC 60947-4-1. Many conditions of an actual application effect contact life such as the environment and duty cycle, therefore, the actual contact life may vary from the life indicated by the curves shown here.

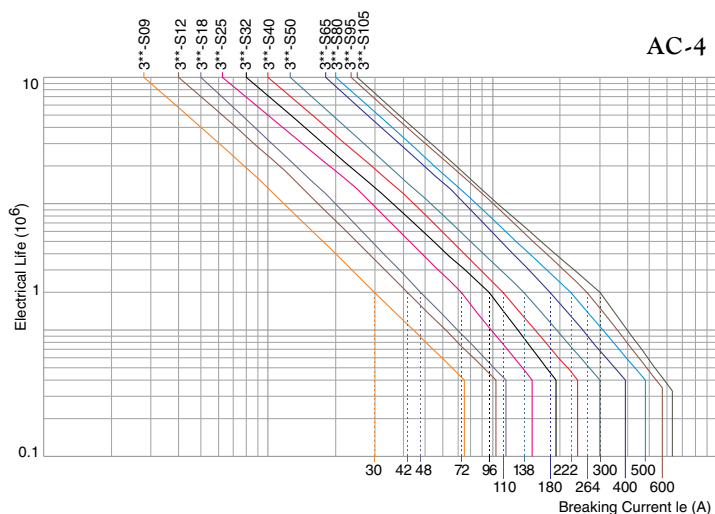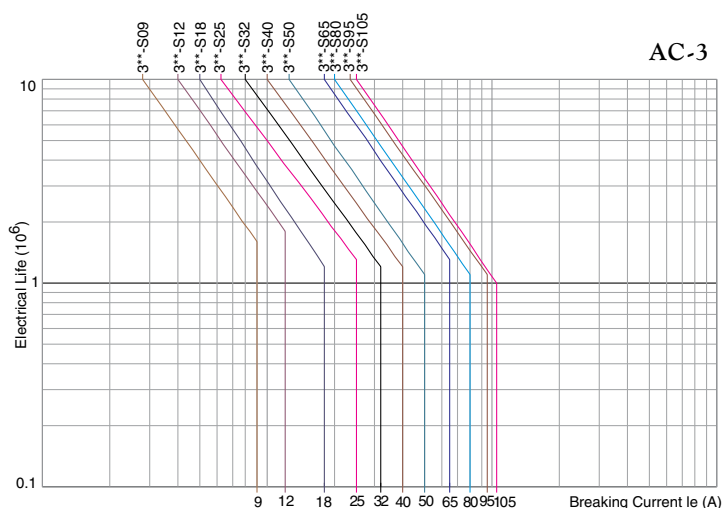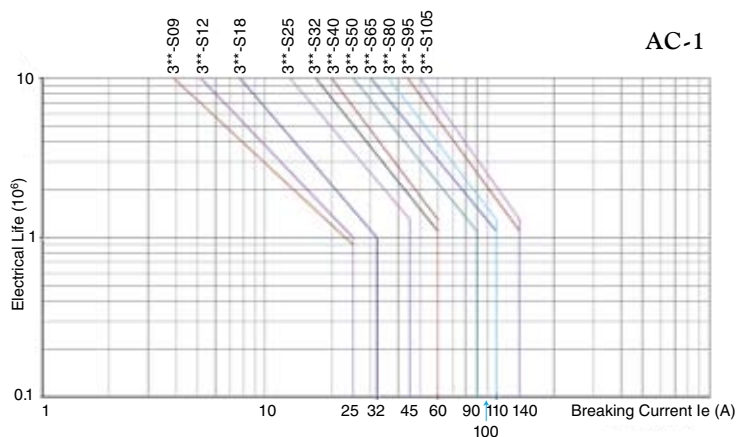


3 POLE NON-REVERSING CONTACTORS - AC COILS


300-S09, 300-S12 & 300-S18

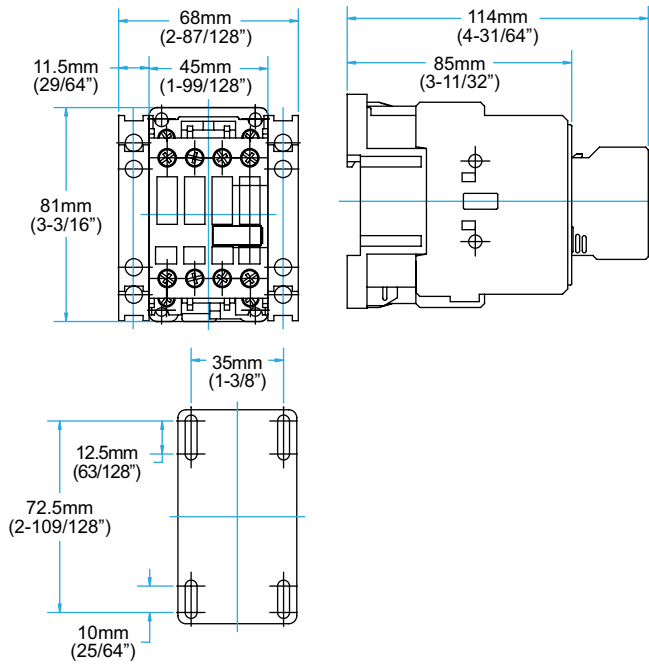


300-S25

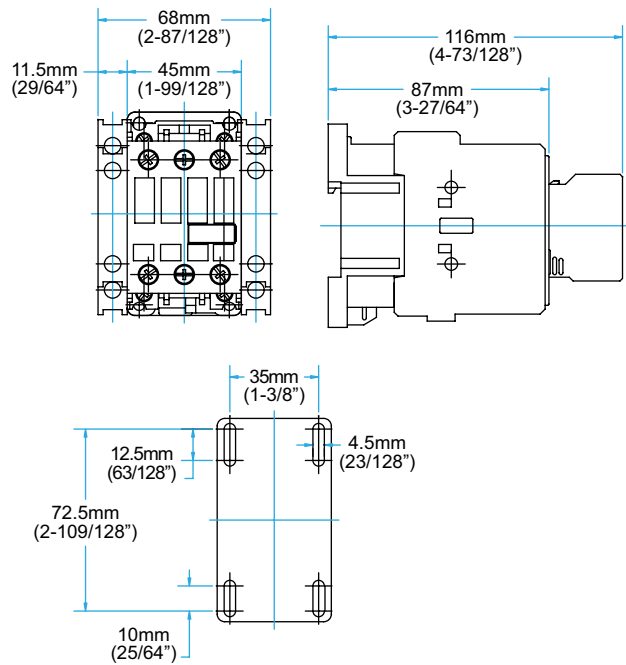

300-S32 & 300-S40

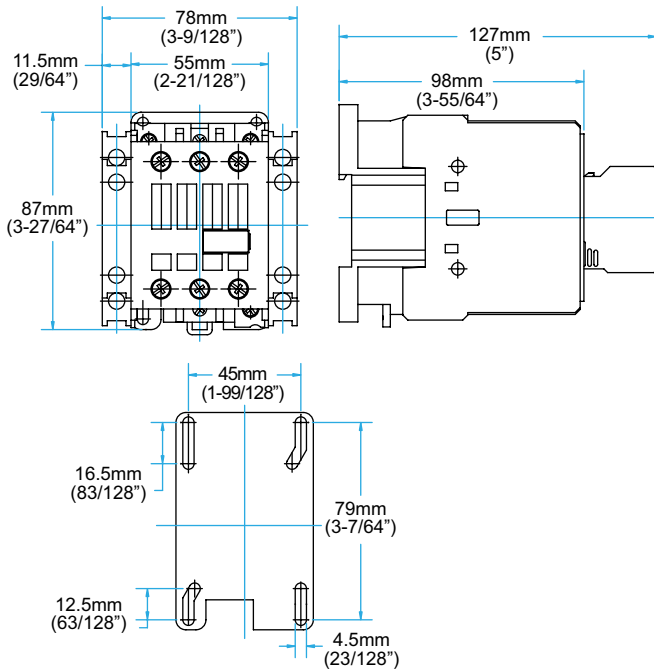


300-S50, 300-S65 & 300-S80

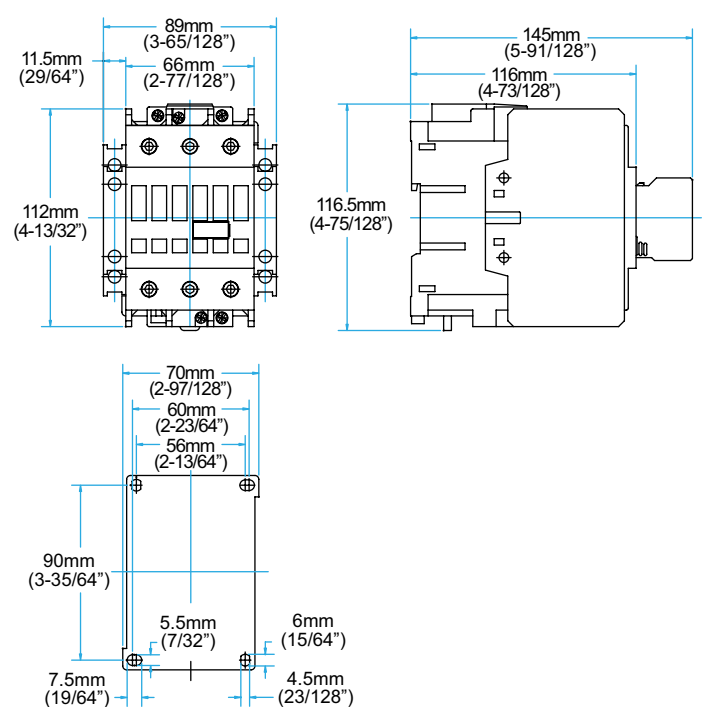


**3 POLE NON-REVERSING CONTACTORS - AC COILS (CONT.)**

300-S95 & 300-S105

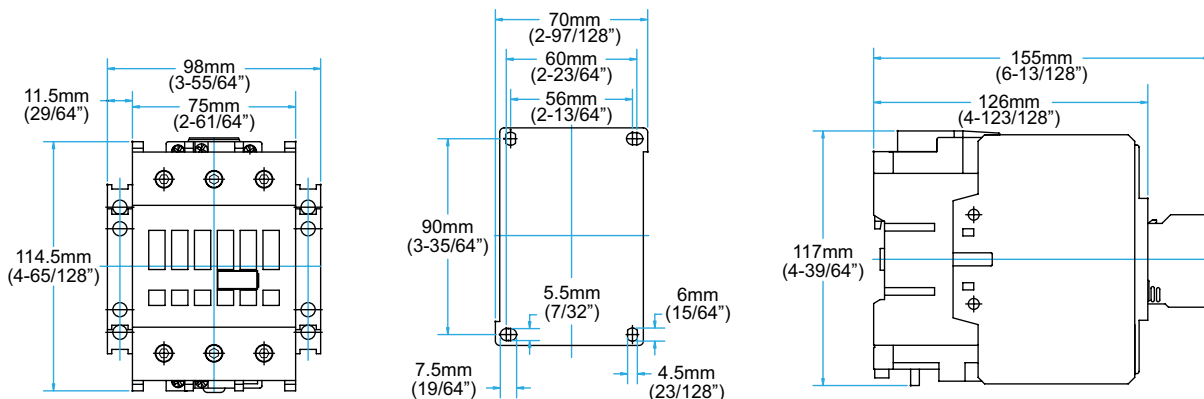


**3 POLE NON-REVERSING CONTACTORS - DC COILS**


300-S09, 300-S12 & 300-S18

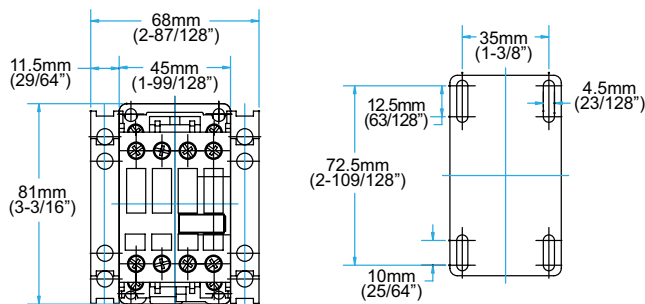

300-S25

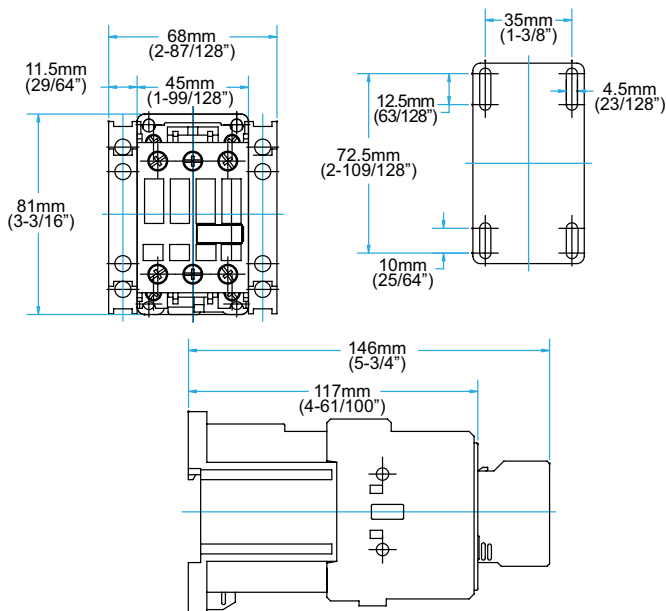


300-S32 & 300-S40

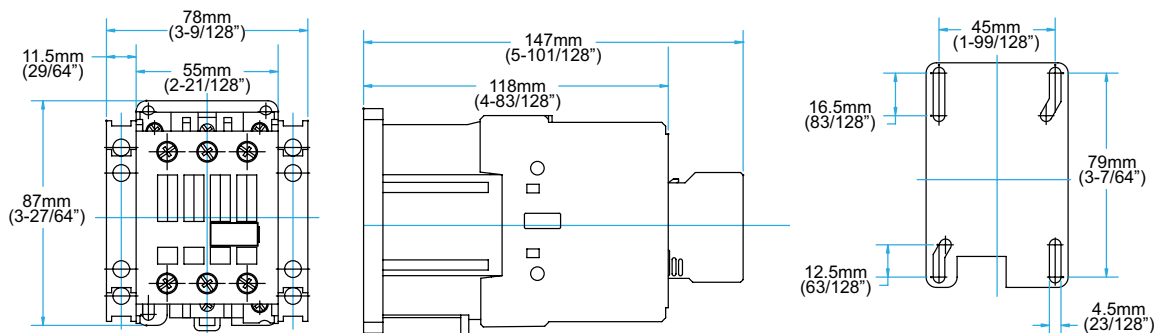


**3 POLE NON-REVERSING CONTACTORS - DC COILS (CONT.)**

**300-S50, 300-S65 & 300-S80**

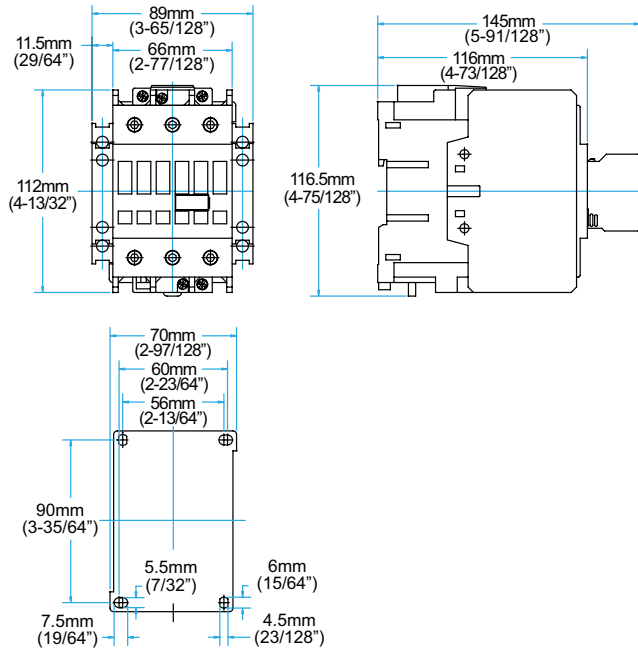


**300-S95 & 300-S105**

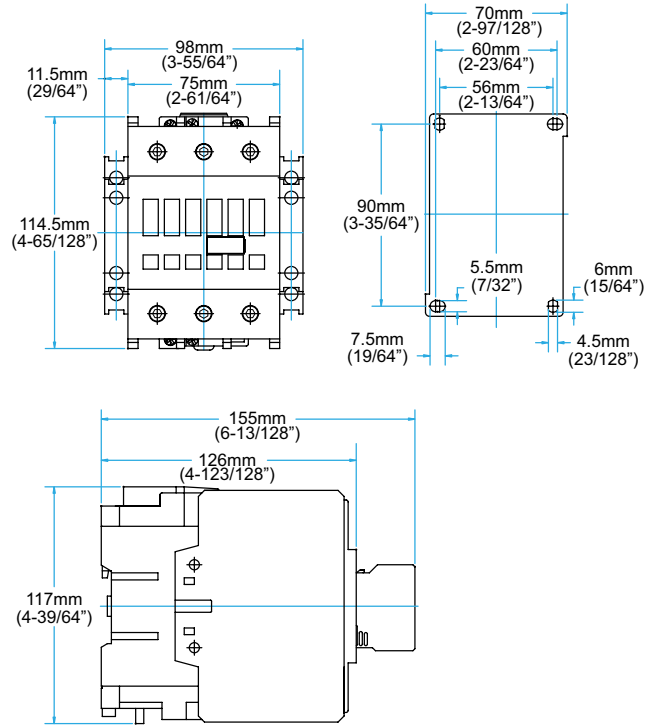


**3 POLE CONTACTORS WITH ELECTRICAL / MECHANICAL OR MECHANICAL INTERLOCK - AC COILS**

**300-S09, 300-S12 & 300-S18**

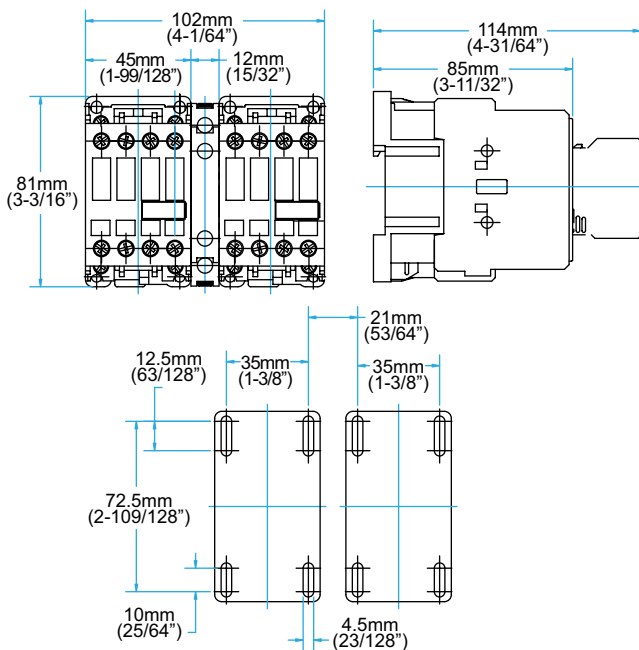


**300-S25**

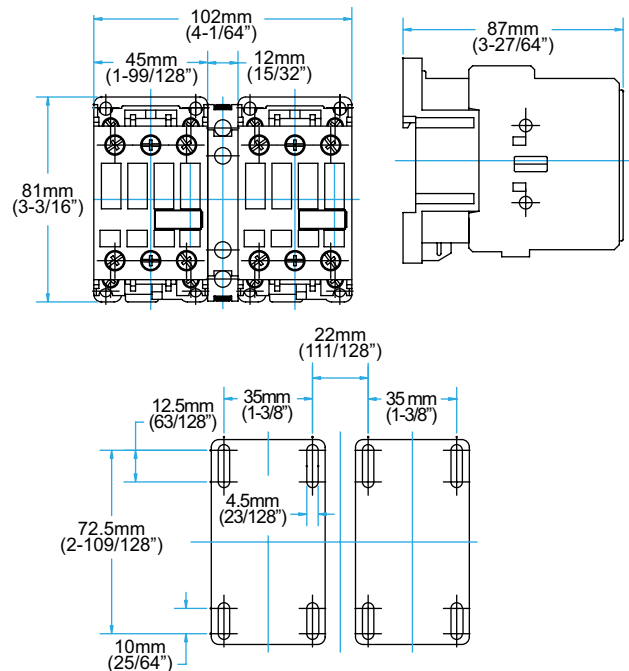


**3 POLE CONTACTORS WITH ELECTRICAL/MECHANICAL  
OR MECHANICAL INTERLOCK - AC COILS (CONT.)**


**300-S32 & 300-S40**

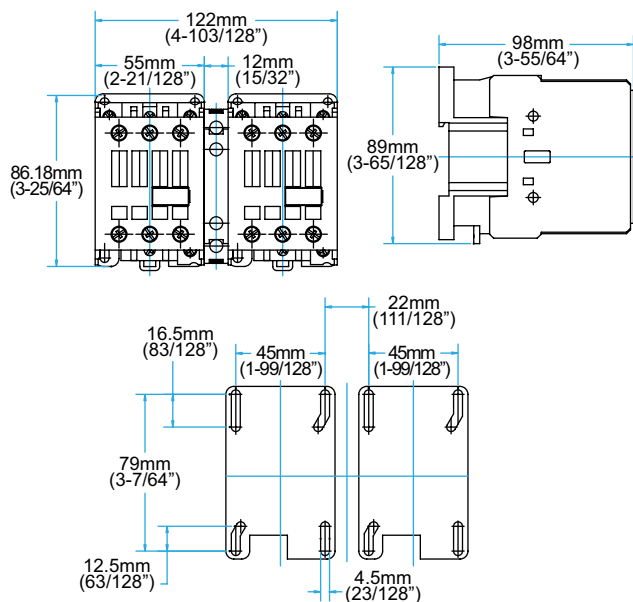

**300-S50, 300-S65 & 300-S80**

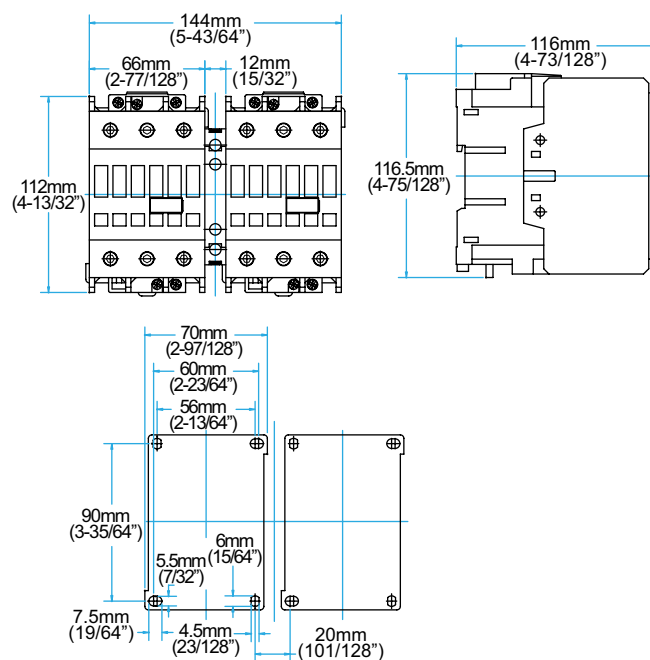

**300-S95 & 300-S105**

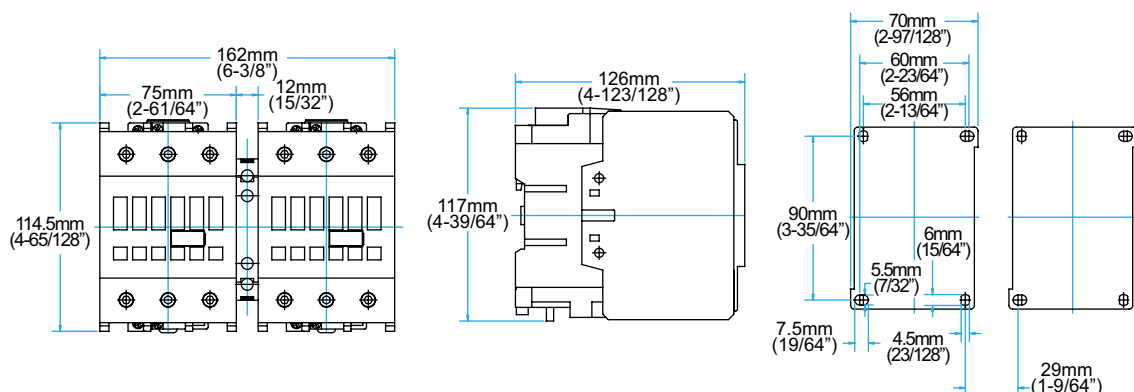


**VISIT [WWW.C3CONTROLS.COM](http://WWW.C3CONTROLS.COM)  
TO DOWNLOAD CAD DRAWINGS**




**3 POLE CONTACTORS WITH ELECTRICAL/MECHANICAL OR MECHANICAL INTERLOCK - DC COILS**


300-S09, 300-S12 & 300-S18

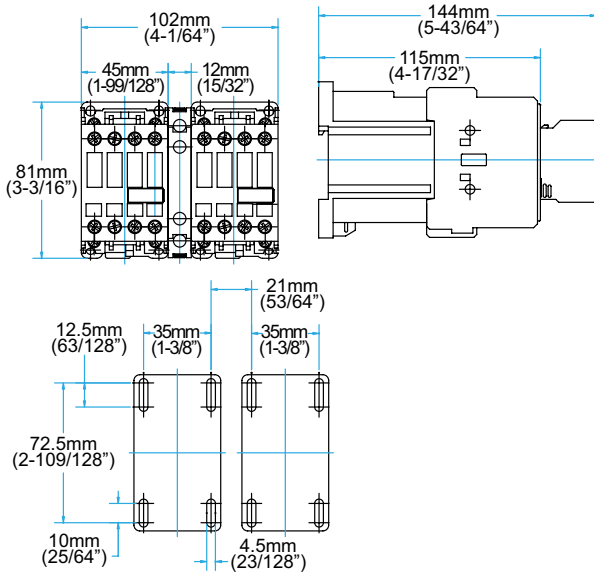


300-S25

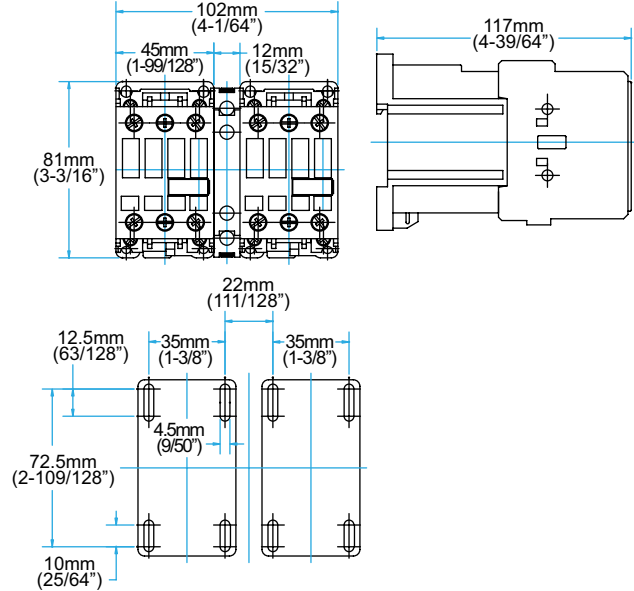


300-S32 & 300-S40

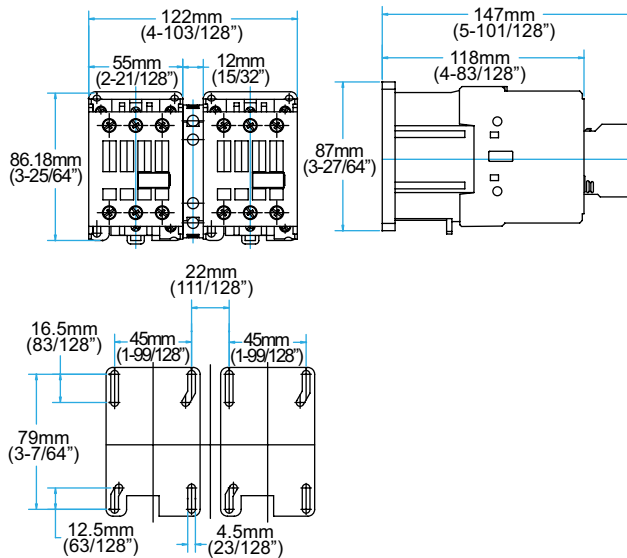

300-S50, 300-S65 & 300-S80

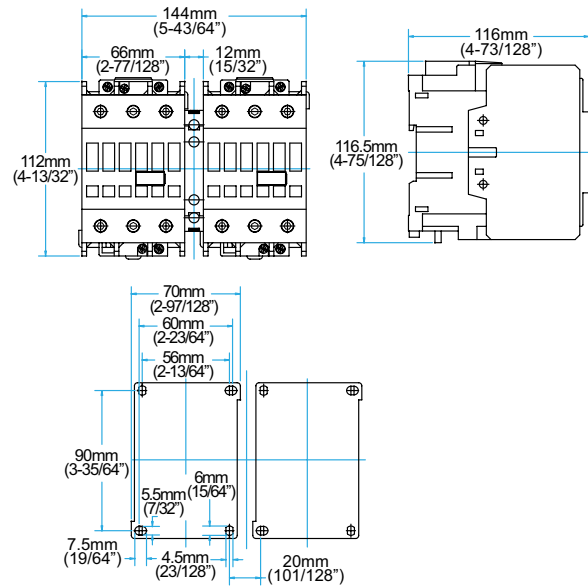

300-S95 & 300-S105

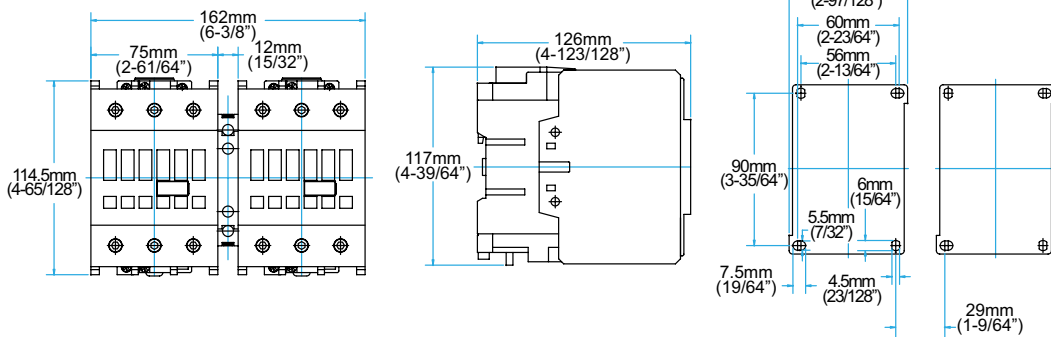

**ADVANTAGE PRICING**  
**LIFETIME WARRANTY**  
**GUARANTEED SAME-DAY SHIPPING**

# There's a better way!



Discover the c3controls difference that proves there is truly a better way to buy.

c3controls designs and manufactures a comprehensive portfolio of standard industrial control products that meet the most demanding applications.

Each of our products is backed with a lifetime warranty – representing a commitment to quality and performance that is unmatched in the industry.

c3controls' pricing advantage – combined with our guaranteed same-day shipping promise – improves your profitability and cash flow, reduces carrying costs and inventory expenses, accelerates manufacturing throughput and decreases production costs.

Machine builders, attracted by our unique approach and driven to gain efficiencies in a challenging economy, are turning to c3controls at an unprecedented rate. Month-over-month sales records have been fueled by people who expect more and get it from c3controls.

Learn more about the c3controls difference at [c3controls.com/takecontrol](http://c3controls.com/takecontrol).

**c3controls®**  
**EVERYTHING UNDER CONTROL**

724.775.7926  
[WWW.C3CONTROLS.COM/TAKECONTROL](http://WWW.C3CONTROLS.COM/TAKECONTROL)