


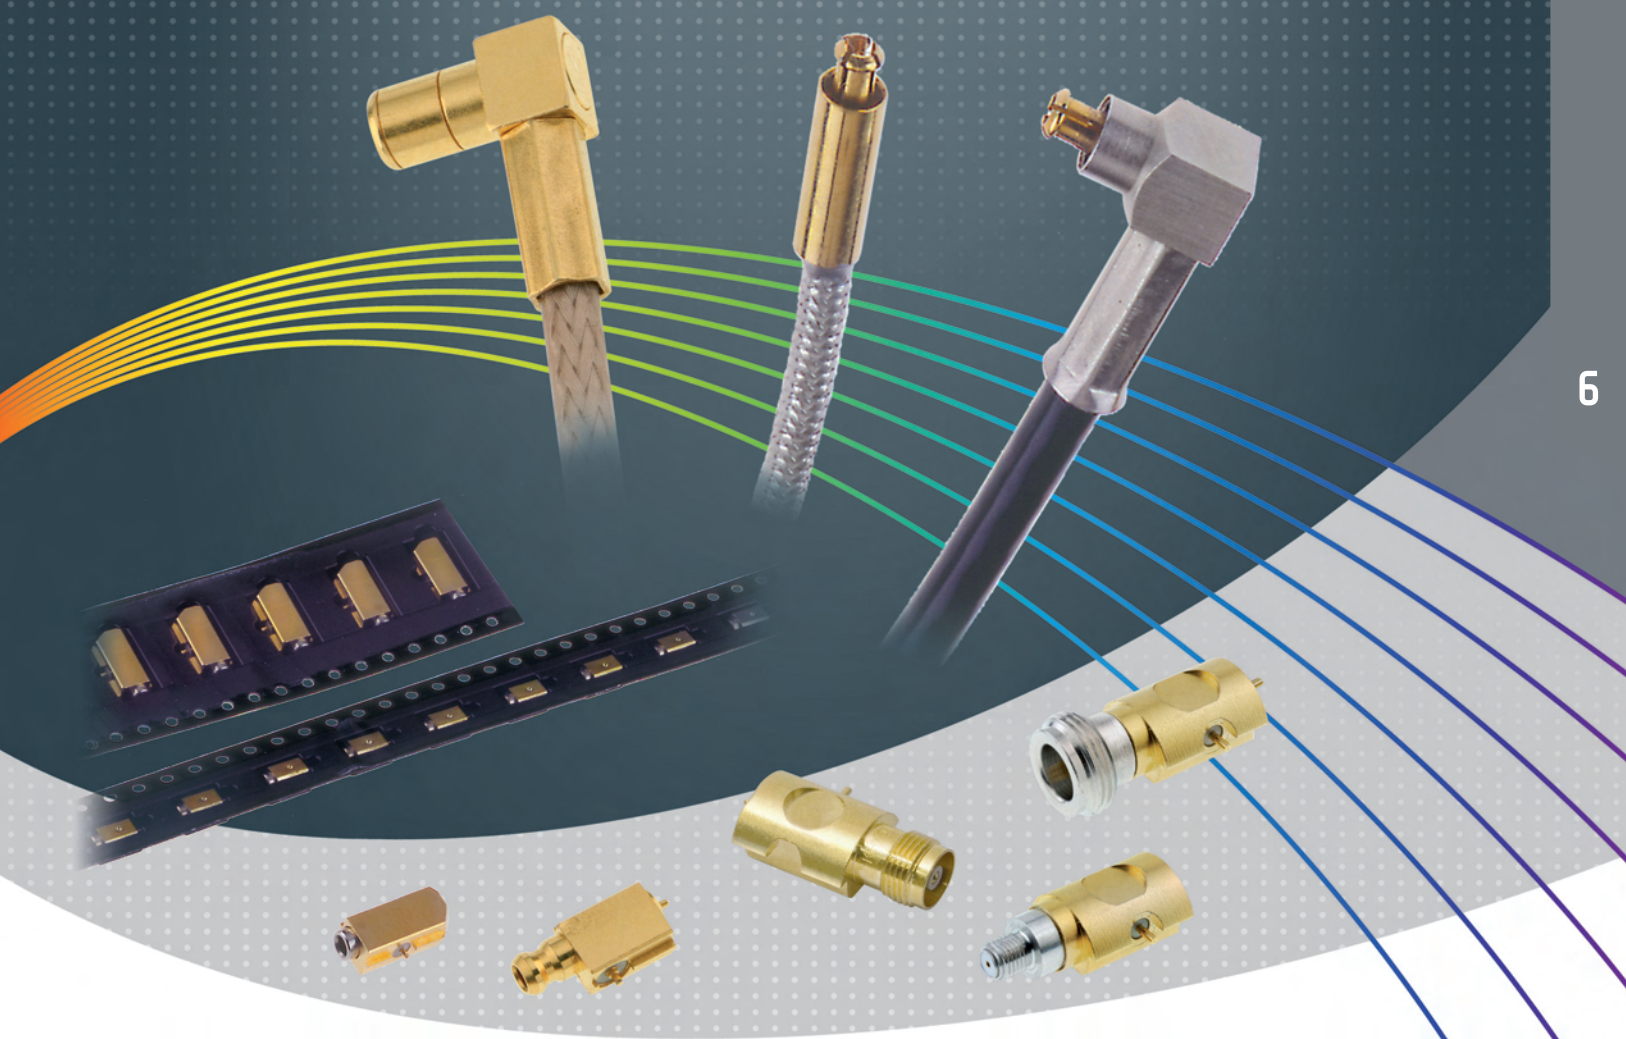

SWITCHING CONNECTORS / MOEBIUS MC-CARD / RP-MCX series

R199 / R299

RADIAL 
The next conneXion

	Pages
Introduction	6-4 to 6-5
MOEBIUS	
Characteristics	6-6
Receptacles	6-7
Switching connectors	6-7
Plugs	6-8
Adapters	6-8
PCB mounting pattern	6-8
MC-CARD	
Characteristics	6-9
Plugs	6-10
SMT Receptacle	6-10
SMT Switches	6-10
Adapters	6-11
Receptacle packaging	6-11
Assembly instructions	6-12
RP-MCX	
Interface	6-13
SMT Switches	6-13
RF power switching connectors	
QMA type	6-14
N type	6-15
SMA type	6-16
QN type	6-17
TNC type	6-18



INTRODUCTION

Radiall offers a complete range of switching connectors that consists of four families:

Microminiature, Moebius, for high life cycle mobile applications

Microminiature, MC-Card, for mobile applications

Reverse polarity MCX

Power, for infrastructure applications



Microminiature Moebius: Designed for life

We chose Moebius in reference to the Möbius strip as the origin of the infinity symbol.

A Möbius band (or strip) is an intriguing shape having a continuous looped surface with ONLY ONE SIDE and ONE EDGE. A strip with a non-orientable surface.

The Moebius interface is designed to be used as an antenna connection for handheld and mobile computing devices. The switching connector provides high RF performance and it is extremely durable and reliable as a snap-on connection.

Microminiature MC-Card

The MC-Card series are micro miniature, 50Ω connectors that feature snap-on mating and a frequency range of -8 GHz.

The MC-Card series was designed by Radiall in the 90's. With the success of the switching version, it made the MC-Card an excellent alternative to MMCX connectors for numerous wireless and telecom applications.

In addition, the MC-Card series offer the similar performance as the MMCX by featuring quick snap-on mating and unmating withstanding a minimum of 5,000 mating cycles.

The globally adopted switching connector version consists in a female edge card receptacle with an integrated switch for SMT assembly. It allows for automatic switching between two RF signal paths. This connector is mainly used for wireless PCMCIA-Cards or GPS devices to switch between the internal antenna and a higher-gain external antenna.

In addition to the standard MC-Card series, Radiall also offers a 3mm dia. MC-Card. With this version, wireless equipment can be differentiated and protected against wrong antenna connections.



APPLICATIONS

Wireless communication (Bluetooth, WLAN, WiFi, WiMax, ZigBee).

Handheld, Notebook, PCMCIA Card, Express Card, PDA, GPS, and any low power wireless equipment requiring transmission re-direction.

Reverse Polarity MCX

A range of reverse polarity MCX connectors is available for handheld devices. Additional standard or reverse polarity switching connectors can be developed upon request.

Power switching connectors


RF power switching connectors are surface/edge mountable. It's a two in one solution replacing the existing standard RF switches by integrating the switch function into a connector. This solution provides a unique means of switching between two RF signal paths. The switch is mechanically activated by mating and unmating the connector.

MAIN ADVANTAGES:

- Reliable
- Increases the density
- Excellent electrical and mechanical performances
- Cost savings
- Available in a right or left version
- Many interfaces available: N, TNC, SMA, QN, QMA and more

MAIN APPLICATIONS

- Telecom
- RF power amplifiers

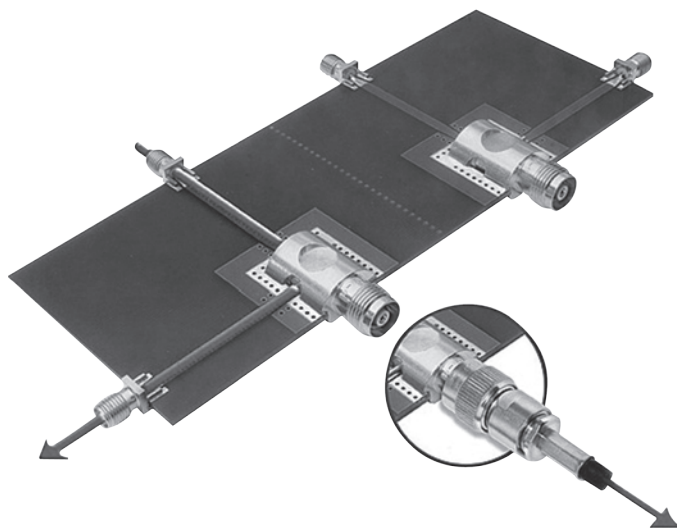

CHARACTERISTICS



	Not mated	Mated
Operating temperature range	-40°C to + 110°C	
Rated power	10 W / 900 MHz	
DC Current Withstanding	1 A max	
Frequency range	DC to 6 GHz	
V.S.W.R.	1.20 max DC to 3 GHz 1.50 max 3 to 6 GHz	1.15 max DC to 3 GHz 1.25 max 3 GHz to 6 GHz
Insertion loss	0.15 dB max DC to 2 GHz 0.20 dB max 2 GHz to 3 GHz 0.40 dB max 3 GHz to 6 GHz	0.10 dB max DC to 2 GHz 0.15 dB max 2 GHz to 3 GHz 0.20 dB max 3 GHz to 6 GHz
Isolation loss	- - -	35 dB min DC to 1 GHz 25 dB min 1 GHz to 3 GHz 25 dB min 3 GHz to 6 GHz

Item	Specification	Conditions
Contact resistance	200 mΩ max	100 mA
Insulation resistance	3000 MΩ min	250 V DC
Withstanding voltage	No flashover or insulation breakdown	250 V rms
Vibration	No discontinuities > 1μs under 100mA	Sinus: 5-500Hz / displacement 0.75 peak / acceleration 10 g duration 2h in each direction Random: 5-1000Hz / displacement 0.75 peak / acceleration 3.3 g duration 1h in each direction 25 dB min 3 GHz to 6 GHz
Shock	No discontinuities > 1μs under 100mA	Acceleration 50 g / duration pulse 11 ms / waveform pulse half sinus / number of shocks 3 per direction
Free fall	Center contact resistance RF measurements No discontinuities > 1 ms under 100mA	NFC 20732 method 1 Test area concrete / fall height 1 m / duration 2*2 falls
Temperature life	Center contact resistance RF measurements	T + 90°C / duration 1000 h / 40% HR
Thermal shock	Center contact resistance RF measurements	T - 40°C to + 90°C Exposure 15mn / transfert time < 10 s / 100 cycles
Damp heat	Center contact resistance RF measurements	40°C / 93% / 21 days
Retention Force Insertion Force - mating Extraction Force - unmating	9N 12N	Initial
Durability	Mating - unmating force Center contact resistance RF measurements	25.000 cycles

MATERIALS AND PLATING



	Material	Plating
Body	Brass	NPGR
Center contact	Brass	NPGR
Outer contact	Brass	NPGR
Insulator	PTFE / nc	
Others parts	Beryllium copper	NPGR

RECEPTACLE

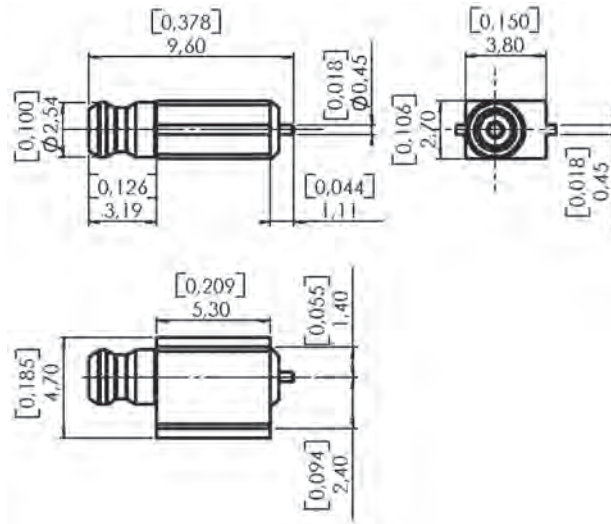

Part number	Packaging	RoHS
R199 006 413	100 pieces/reel	yes

SWITCHING CONNECTOR

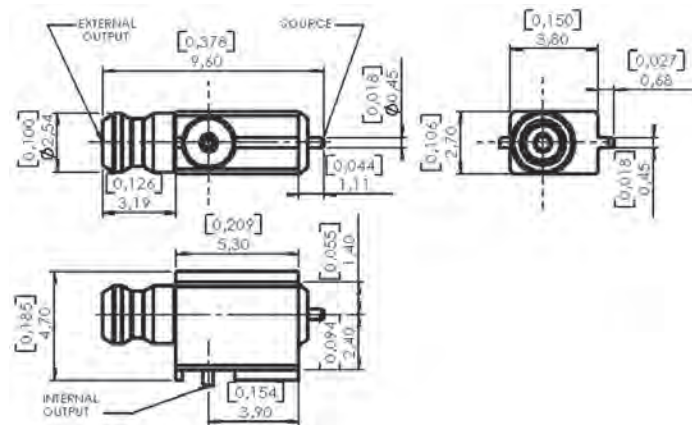

Part number	Packaging	RoHS
R199 006 813	100 pieces/reel	yes



To download data sheets and assembly instructions, visit www.radiall.com & enter the part number in the Search box.
Bold part numbers represent products typically in stock & available for immediate shipment.
 See page 8 and 9 for packaging information.

PLUGS, ADAPTER

STRAIGHT AND RIGHT ANGLE PLUGS

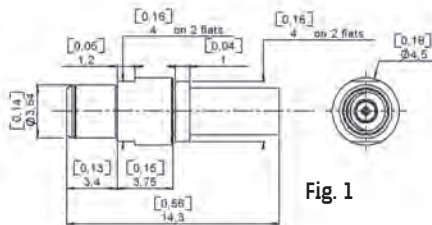


Fig. 1

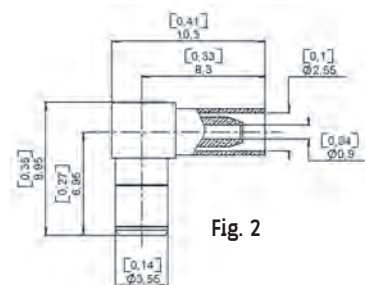


Fig. 2

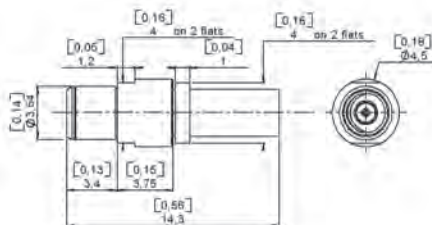


Fig. 3


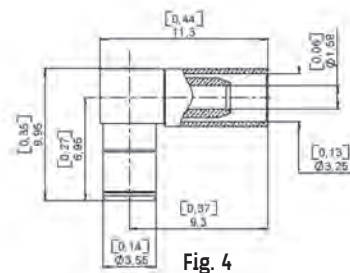


Fig. 4

Cable group	Cable group dia.	Part number	Fig.	Packaging	RoHS
RG178/RG196	2/50/S	R199 006 203	1	100/Box	yes
		R199 006 213	2		
RG174/RG316	2.5/50/S	R199 006 263	3		
		R199 006 273	4		


SMA ADAPTER

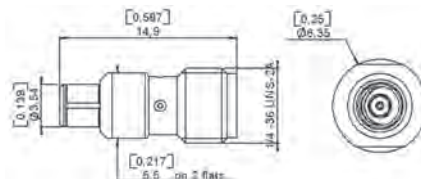


Part number	Packaging	RoHS
R191 857 000	Unit	yes

PCB PATTERN

P01

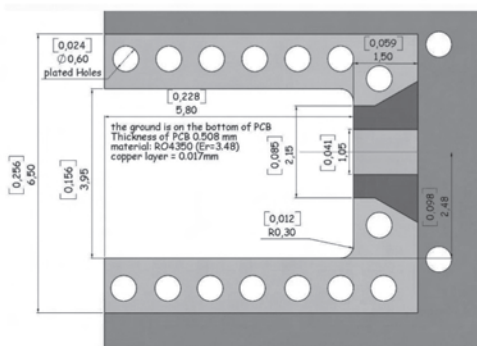

Receptacles

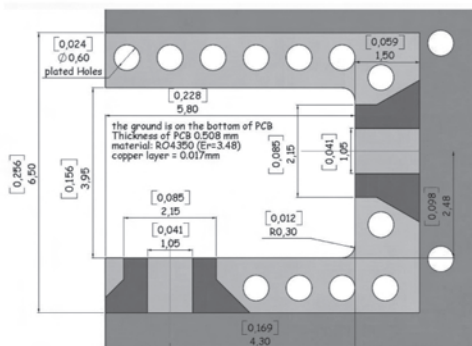

Switching Connectors

To download data sheets and assembly instructions, visit www.radiall.com & enter the part number in the Search box.
Bold part numbers represent products typically in stock & available for immediate shipment.
 See page 8 and 9 for packaging information.

Test/characteristics	Values/remarks
----------------------	----------------

ELECTRICAL CHARACTERISTICS

Impedance	50Ω				
Frequency range	Connectors: DC - 8 GHz Switch: DC - 3 GHz				
Typical V.S.W.R.	1	2.5	4	6	8
• Straight models 2/50 cable	1.07	1.15	1.16	1.17	1.25
• Right angle models 2/50 cable	1.08	1.17	1.22	1.26	1.30
2.6/50 cable	1.05	1.08	1.10	1.13	1.12
Insertion loss (dB)					
• Straight connectors	0.04	0.08	0.11	0.15	0.15
• Right angle connectors	0.05	0.10	0.15	0.20	0.25
RF leakage (dB max)	-65 dB max at 8 GHz				
Insulation resistance	5000 MΩ min				
Contact resistance					
• Center contact	1.5 mΩ				
• Outer contact	0.2 mΩ				
Working voltage in V.R.M.S.	170				
• at sea level (at 21000 m)					
Dielectric withstanding voltage in V.R.M.S.					
• at sea level	500				
RF testing voltage sea level in V.R.M.S.	500				

MECHANICAL CHARACTERISTICS

Durability	5000 matings
Force to engage and disengage	6.2 N
Force to disengage	8.8 N
Cable retention force • 2/50 cable	58 N
• 2.6/50 cable	110 N
Center contact retention force	slide-on

ENVIRONMENTAL CHARACTERISTICS

Temperature range • switches	-40°C / +110°C
• others	-25°C / +125°C
Thermal cycling test	MIL STD 202, method 107, condition B
High temperature endurance	MIL STD 202, method 108
Corrosion (salt spray)	MIL STD 202, method 101, condition B
Vibration	MIL STD 202, method 204, condition B
Shock	MIL STD 202, method 213, condition G
Moisture resistance	MIL STD 202, method 106
Hermeticity	MIL STD 202, method 112, condition C Vacuum 10 ⁻⁶ Hgmm (Torr) Leakage rate 10 ⁻⁶ atm/cm ² /s
Barometric pressure	Pressure test: 3.5 bars; duration: 2 mn; Temperature: 15°C to 25 °C

MATERIALS

Bodies	Brass
Center contact male	Brass
female	Bronze or heat treated Beryllium following QQ-C-530
Insulator cable connectors	PTFE
switches	Polyether ethercetone 30% GF
Gasket	Silicon rubber

PLATING

Bodies cable connectors	Nickel or BBR
SMT receptacles	Gold
edge card receptacles	Gold
switches	Gold
Center contacts	Gold

PLUGS, SMT RECEPTACLE AND SWITCHES

STRAIGHT PLUGS


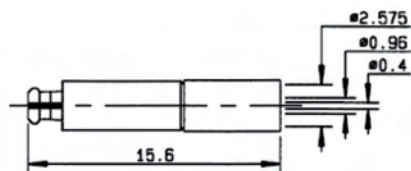


Fig. 1

Cable group	Cable group dia.	Part number	Fig.	Captive center contact	Finish	Note	Packaging
RG178/RG196	2/50/S	R199 005 200	1	no	nickel	crimp type	100 pieces

RIGHT ANGLE PLUGS



Cable group	Cable group dia.	Part number	Dimensions (mm)		Captive center contact	Finish	Note	Packaging
RG178/RG196	2/50/S	R199 005 240	2.57	0.96	yes	nickel	crimp type	100 pieces
RG174/RG316	2.6/50/S	R199 005 250	3.25	1.63				

SMT RECEPTACLE

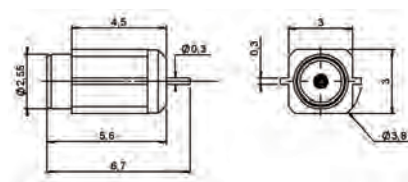



Fig. 1




Fig. 2

Part number	Fig.	Captive center contact	Assembly instructions	PCB pattern	Finish	Packaging
R199 005 800	1	yes	M01	P02	gold	400 pieces/reel
R199 005 523	2					1 piece

SMT SWITCHES

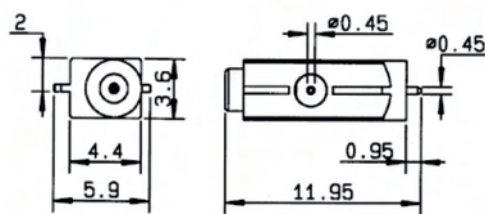


Fig. 1

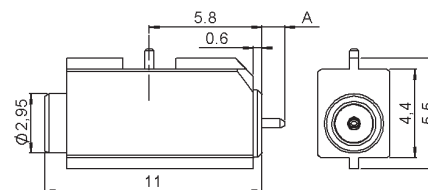


Fig. 2

Part number	Fig.	Dimension A (mm)	Captive center contact	Assembly instructions	PCB pattern	Finish	Packaging	Note
R199 005 890	1	0.93	yes	M01	P01	Gold	500 pieces/reel	
R299 794 800*	2							MC-CARD 3mm dia.

*Specific 3 mm interface = not compatible with standard interface plug

Electrical diagram on "M01"

To download data sheets and assembly instructions, visit www.radiall.com & enter the part number in the Search box.
Bold part numbers represent products typically in stock & available for immediate shipment.
 See page 8 and 9 for packaging information.

ADAPTERS

BETWEEN SERIES ADAPTERS




Fig. 1






Fig. 2

Part number	Fig.	Series	Body and finish
R191 366 071	1	SMA female / MC CARD male	passivated stainless steel
R191 366 091	2	SMA female / MC CARD female	

RECEPTACLE PACKAGING

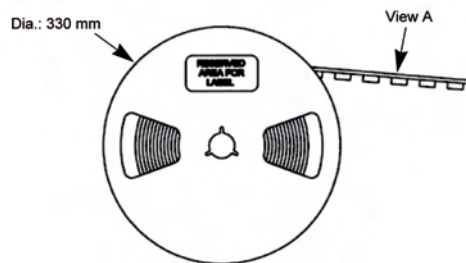


ACCORDING TO IEC 286-3 STANDARD

MATERIALS

Reel: polyester


Carrier tape: antistatic PETG (polyester)

Cover tape: polyester

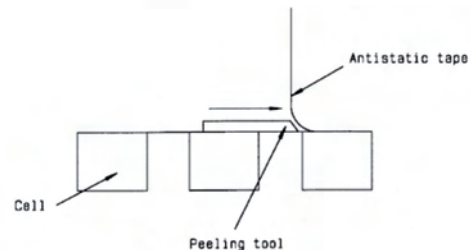


VIEW A

Part number
R199 005 890
R299 794 800



Part number
R199 005 800



To download data sheets and assembly instructions, visit www.radiall.com & enter the part number in the Search box.


Bold part numbers represent products typically in stock & available for immediate shipment.

See page 8 and 9 for packaging information.

ASSEMBLY INSTRUCTIONS

M01

ELECTRICAL DIAGRAM

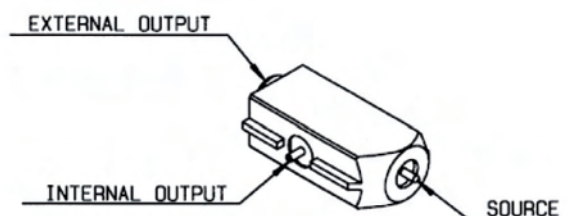

Part number	Step 1	Step 2
R199 005 890 R299 794 800	UNMATED CONNECTOR	MATED WITH MC CARD PLUG

VIDEO SHADOW AND ASPIRATION AREA

Part number	Video shadow of receptacle	Aspiration area
R199 005 800		
R199 005 890 R299 794 800		


*2.95 for: R299 795 830 - R299 794 800

PCB PATTERN

P01

Part number


R199 005 890
R299 794 800



P02


Part number

R199 005 800




PCB thickness (mm)	Coplanar line A (mm)
0.8	0.183
1.0	0.190
1.2	0.195
1.6	0.200

PLUG

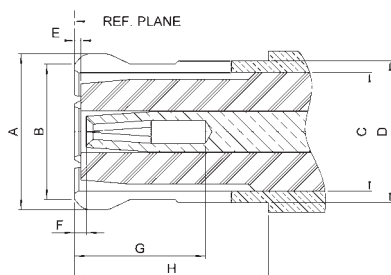

JACK

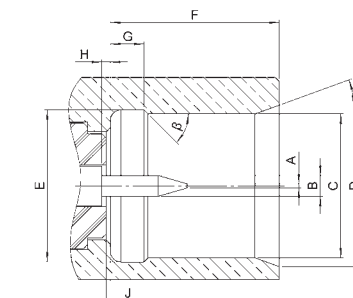


REF. PLANE

Letter	mm		inch	
	min.	max.	min.	max.
A DIA		3.80		.150
B DIA		3.60		.142
C DIA		3.00		.118
D DIA		3.40		.134
E	0		0	.004
F	0		0	.008
G	2.60		.110	
H	4.15		.163	

Letter	mm		inch	
	min.	max.	min.	max.
A DIA	0.1	3.20	.124	.126
B DIA	0.48	2.84	.108	.112
C DIA	3.42	0.60	.0205	.0235
D DIA	3.80		0	
E DIA	3.60	1.40	.045	.055
F	4.00	0.41	.014	.016
G	0.75	3.68	.139	.145
H			0	
J			0	
α	18°	22°	18°	22°
β	43°	47°	43°	47°

SMT SWITCHES

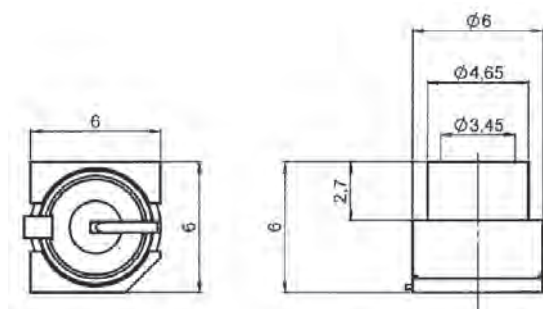


Part number	Packaging
R299 137 800	Reel of 200
R299 137 801	Reel of 900

To download data sheets and assembly instructions, visit www.radiall.com & enter the part number in the Search box.
Bold part numbers represent products typically in stock & available for immediate shipment.
 See page 8 and 9 for packaging information.

QMA RF POWER SWITCHING CONNECTORS


Test/characteristics	Values/remarks
ELECTRICAL CHARACTERISTICS	
Impedance	QMA 50Ω
Frequency range	DC - 3 GHz
Typical V.S.W.R.	$1.1 + 0.1000 \times F \text{ (GHz) Maxi}$
Isolation at • DC to 1 GHz • 1 to 2 GHz • 2 to 3 GHz	-47 dB typical -43 dB typical -40 dB typical
Insertion Loss at • DC to 1 GHz • 1 to 2 GHz • 2 to 3 GHz	0.1 dB maxi 0.15 dB maxi 0.2 dB maxi
RF leakage	NA
Voltage rating	300 Veff maxi
Dielectric withstanding voltage	500 Veff mini
Insulation resistance	5000 MΩ mini
Power withstanding	110 W (at 2 GHz)

VSWR direct line

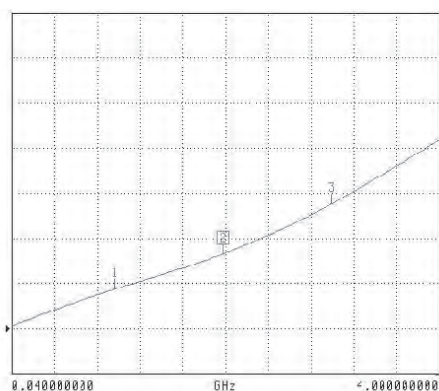


m1	freq=1.0 GHz	VSWR = 1.087
m2	freq=2.0 GHz	VSWR = 1.165
m3	freq=3.0 GHz	VSWR = 1.275

VSWR switched line

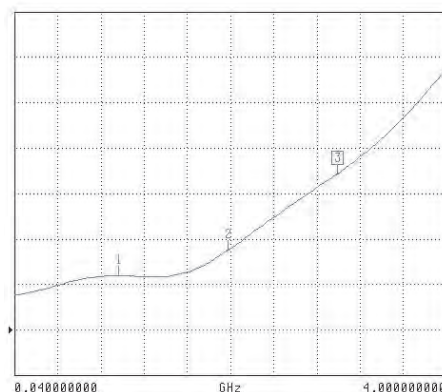

m1	freq=1.0 GHz	VSWR = 1.048
m2	freq=2.0 GHz	VSWR = 1.070
m3	freq=3.0 GHz	VSWR = 1.137

QMA TYPE




Part number	Type
R123 422 801	right

Test/characteristics	Values/remarks
----------------------	----------------

ELECTRICAL CHARACTERISTICS


	N
Impedance	50Ω
Frequency range	DC - 3 GHz
Typical V.S.W.R.	1.1 + 0.1000 x F (GHz) Maxi
Isolation at • DC to 1 GHz • 1 to 2 GHz • 2 to 3 GHz	-47 dB typical -43 dB typical -40 dB typical
Insertion Loss at • DC to 1 GHz • 1 to 2 GHz • 2 to 3 GHz	0.1 dB maxi 0.15 dB maxi 0.2 dB maxi
RF leakage	NA
Voltage rating	300 Veff maxi
Dielectric withstanding voltage	500 Veff mini
Insulation resistance	5000 MΩ mini
Power withstanding	100 W (at 0.9 GHz and 1.8 GHz)

VSWR direct line

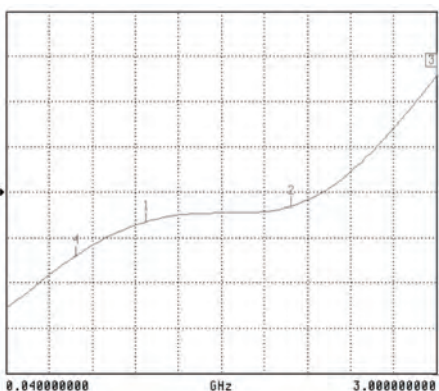


m1	freq=1.0 GHz	VSWR = 1.084
m2	freq= 2.0 GHz	VSWR= 1.097
m3	freq= 3.0 GHz	VSWR= 1.212
m4	freq= 0.52 GHz	VSWR= 1.054

VSWR switched line

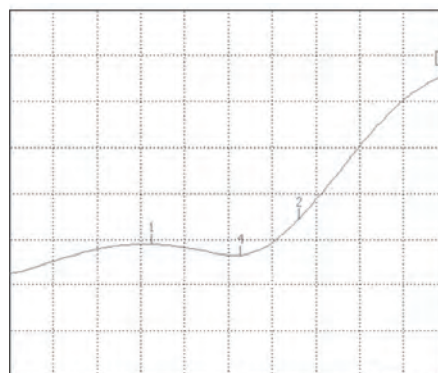

m1	freq=1.0 GHz	VSWR = 1.027
m2	freq= 2.0 GHz	VSWR= 1.043
m3	freq= 3.0 GHz	VSWR= 1.137
m4	freq= 1.6 GHz	VSWR = 1.020

N TYPE



Part number	Type
R161 428 223	left
R161 428 233	right

To download data sheets and assembly instructions, visit www.radiall.com & enter the part number in the Search box.


Bold part numbers represent products typically in stock & available for immediate shipment.

See page 8 and 9 for packaging information.


SMA RF POWER SWITCHING CONNECTORS

Test/characteristics	Values/remarks
ELECTRICAL CHARACTERISTICS	
Impedance	SMA 50Ω
Frequency range	DC - 3 GHz
Typical V.S.W.R.	$1.1 + 0.1000 \times F \text{ (GHz) Maxi}$
Isolation at • DC to 1 GHz • 1 to 2 GHz • 2 to 3 GHz	-47 dB typical -43 dB typical -40 dB typical
Insertion Loss at • DC to 1 GHz • 1 to 2 GHz • 2 to 3 GHz	0.1 dB maxi 0.15 dB maxi 0.2 dB maxi
RF leakage	NA
Voltage rating	300 V _{eff} maxi
Dielectric withstanding voltage	500 V _{eff} mini
Insulation resistance	5000 MΩ mini
Power withstanding	80 W (at 0.9 GHz) 50 W (at 1.8 GHz)


VSWR direct line

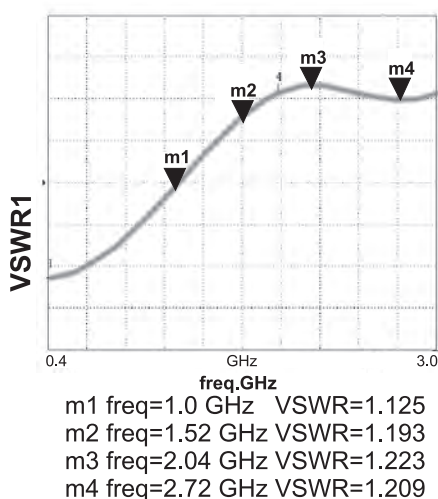

VSWR switched line

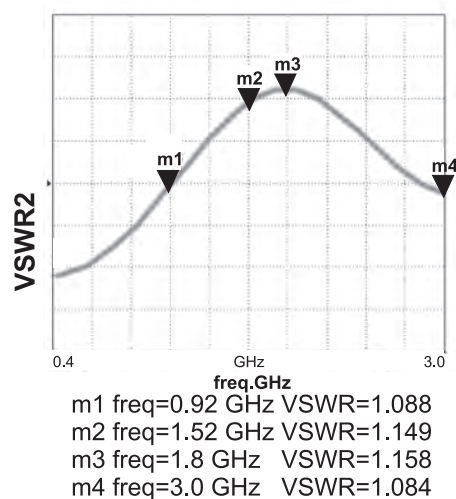

SMA TYPE




Part number	Type
R124 422 001	right

Test/characteristics	Values/remarks
----------------------	----------------

ELECTRICAL CHARACTERISTICS


	QN
Impedance	50Ω
Frequency range	DC - 3 GHz
Typical V.S.W.R.	1.1 + 0.09 x F (GHz) Maxi
Isolation at • DC to 1 GHz • 1 to 2 GHz • 2 to 3 GHz	-47 dB typical -43 dB typical -40 dB typical
Insertion Loss at • DC to 1 GHz • 1 to 2 GHz • 2 to 3 GHz	0.1 dB maxi 0.15 dB maxi 0.2 dB maxi
RF leakage	NA
Voltage rating	300 Veff maxi
Dielectric withstanding voltage	500 Veff mini
Insulation resistance	5000 MΩ mini
Power withstanding	110 W (at 2 GHz)

VSWR direct line

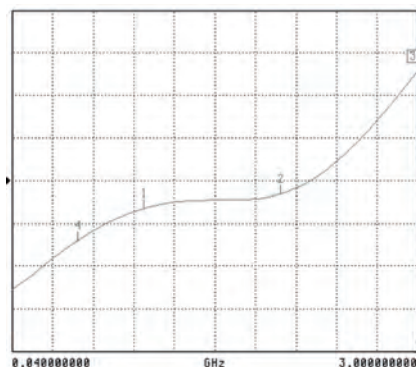


m1	freq=1.0 GHz	VSWR = 1.084
m2	freq= 2.0 GHz	VSWR= 1.097
m3	freq= 3.0 GHz	VSWR= 1.212
m4	freq= 0.52 GHz	VSWR= 1.054

VSWR switched line

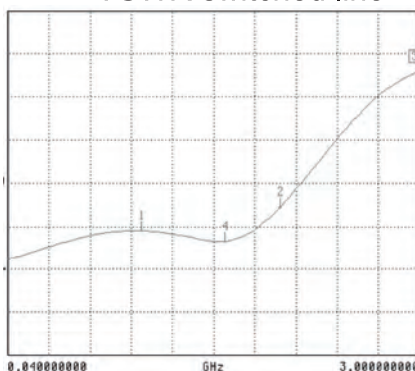

m1	freq=1.0 GHz	VSWR = 1.027
m2	freq= 2.0 GHz	VSWR = 1.043
m3	freq= 3.0 GHz	VSWR = 1.137
m4	freq= 1.6 GHz	VSWR = 1.020

QN TYPE



Part number	Type
R164 428 823	left
R164 428 833	right

To download data sheets and assembly instructions, visit www.radiall.com & enter the part number in the Search box.

Bold part numbers represent products typically in stock & available for immediate shipment.


See page 8 and 9 for packaging information.

TNC RF POWER SWITCHING CONNECTORS


Test/characteristics	Values/remarks
----------------------	----------------

ELECTRICAL CHARACTERISTICS

Impedance	50Ω
Frequency range	DC - 3 GHz
Isolation at • DC to 1 GHz • 1 to 2 GHz • 2 to 3 GHz	-47 dB typical -43 dB typical -40 dB typical
Insertion Loss at • DC to 1 GHz • 1 to 2 GHz • 2 to 3 GHz	0.1 V _F (GHz) dB maxi 0.15 dB maxi 0.2 dB maxi
Voltage rating	300 V _{eff} maxi
Power withstanding	80 W (at 0.9 GHz) 50 W (at 1.9 GHz)

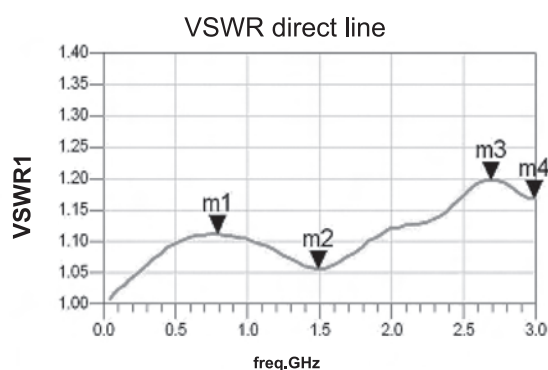


m1 freq=790.0 MHz VSWR1=1.112
m2 freq=1.490 GHz VSWR1=1.056
m3 freq=2.690 GHz VSWR1=1.197
m4 freq=2.990 GHz VSWR1=1.169

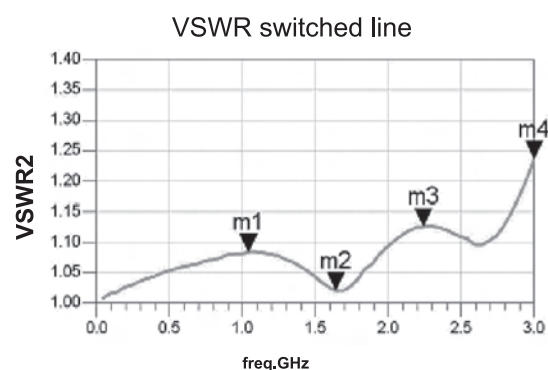

m1 freq=1.040 GHz VSWR2=1.084
m2 freq=1.640 GHz VSWR2=1.021
m3 freq=2.240 GHz VSWR2=1.126
m4 freq=3.000 GHz VSWR2=1.236

TNC TYPE

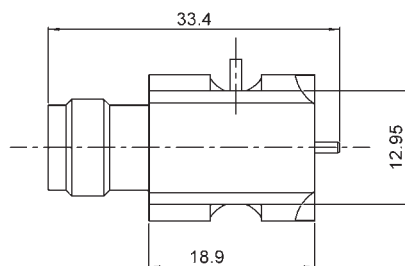

Part number	Type
R143 422 947	left
R143 422 957	right



AEROSPACE



AUTOMOTIVE



DEFENSE



INDUSTRIAL



INSTRUMENTATION



MEDICAL



SPACE



TELECOM

EUROPE

France - RADIALL S.A.

101, Rue Ph. Hoffmann
93116 ROSNY sous BOIS (Paris)
Tel.: +33 1 49 35 35 35 - Fax: +33 1 48 54 63 63
E-Mail: info@radiall.com

Finland - RADIALL SF

P.O. Box 202 - 90101 OULU
Tel.: +358 407 522 412
E-Mail: infofi@radiall.com

Germany - RADIALL GmbH

Carl-Zeiss Str. 10 Postfach 200143
D63307 - RÖDERMARK (Frankfurt)
Tel.: +49 60 74 91 07 0 - Fax: +49 60 74 91 07 70
E-Mail: infode@radiall.com

Italy - RADIALL Elettronica S.R.L.

Via Concordia, 5 - 20090 ASSAGO MILANO
Tel.: +39 02 48 85 121 - Fax: +39 02 48 84 30 18
E-Mail: infoit@radiall.com
Regional office: Roma

Netherlands - RADIALL B.V.

Hogebrinkerweg 15b - 3871 KM HOEVELAKEN
Tel.: +31 33 253 40 09 - Fax: +31 33 253 45 12
E-Mail: infofl@radiall.com

Sweden - RADIALL A.B.

Sjöängsvägen 2 - SE-192 72 SOLLENTUNA (Stockholm)
Tel.: +46 844 434 10 - Fax: +46 875 449 16
E-Mail: infose@radiall.com

U.K. - RADIALL Ltd.

Ground Floor, 6 The Grand Union Office Park,
Packet Boat Lane
UXBRIDGE Middlesex UB8 2GH (London)
Tel.: +44 1895 425 000 - Fax: +44 1895 425 010
E-Mail: infouk@radiall.com

NORTH AMERICA

USA - RADIALL USA, Inc.

8950 South 52nd Street, Suite
401, Tempe, Arizona 85284
Tel.: +1 480 682 9400 - Fax: +1 480 682 9403
E-Mail: infousa@radiall.com

ALSO REPRESENTED IN

Australia	Hungary	Poland
Austria	Indonesia	Russia
Belgium	Israel	Singapore
Brazil	Korea	Spain
Czech Republic	Latvia	Switzerland
Denmark	Lithuania	Taiwan
Estonia	Malaysia	Thailand
Greece	Norway	Vietnam
	Philippines	South Africa

For the above countries, please contact the local agent or RADIALL at info@radiall.com

ASIA

China - SHANGHAI RADIALL Electronic Co., Ltd.

N° 390 Yong He Road 200072 - SHANGHAI
Tel.: +86 21 66 52 37 88 - Fax: +86 21 66 52 11 77
E-Mail: infozh@radiall.com

Japan - NIHON RADIALL

Shibuya-ku Ebisu 1-5-2, Kougetsu Bldg 405
TOKYO 150-0013
Tel.: +81 3 3440 6241 - Fax: +81 3 3440 6242
E-Mail: infojp@radiall.com

Hong Kong - RADIALL Electronics Ltd.

Flat D, 6/F, Ford Glory Plaza,
37-39 Wing Hong Street
Cheung Sha Wan
KOWLOON HONG KONG
Tel.: +852-2959-3833 - Fax: +852-2959-2636
E-Mail: infohk@radiall.com

India - RADIALL India Pvt. Ltd.

25 D, II Phase, Peenya Industrial Area
BANGALORE 560058
Tel.: +91 80 83 95 271 - Fax: +91 80 83 97 228
E-Mail: infoin@radiall.com

