

## **C-Bus** *technical selection guide*





# Contents

	Page
■ <b>Introduction</b> .....	4
■ <b>Key Input Units</b> .....	5
■ <b>Input Units</b> .....	21
■ <b>System Units</b> .....	38
■ <b>Output Units</b> .....	45
■ <b>Software Packages</b> .....	65



# Introduction

Clipsal, a brand of Schneider Electric, is dedicated to supplying end-to-end building management and integrated control with the products, solutions and programs to help meet customers expectations. Utilising the Schneider Electric product basket, complete end-to-end solutions are possible with products catering for any type or size of installation. With solutions ranging from power and lighting control, dimming, energy management, for home automation and commercial applications.

The Clipsal C-Bus® system is a microprocessor based wiring system to control lighting and other electrical services.

Whether on/off control of a lighting circuit or analogue type control such as dimming electronic fluorescent ballasts, C-Bus can be used to control and automate virtually any type of electrical load.

To ensure fast and reliable operation, each device has its own inbuilt microprocessor, which can be individually programmed via 'point and click' PC based software, or via 'learn mode' which doesn't require a PC.

C-Bus information is held within individual units rather than one central point. This ensures optimum communication speed and reliability.

Whilst a computer is not necessary for normal C-Bus operation, PC based control and management software is available and provides additional flexibility to clients requiring this type of control. Clipsal C-Bus is suitable for a wide range of applications, for example:

## Commercial Lighting Control

- Fluorescent lighting control for energy cost saving in high rise buildings
- High-bay control in warehouses for energy cost saving
- Mood lighting in restaurants and retail outlets
- Flexible and integrated control of lighting and audio visual equipment in board rooms
- Architectural lighting control for hotel foyers, ballrooms, art galleries and museums

## Standalone Room Lighting Control

- Integrated automation via touch screen user interfaces for conference rooms and home theatres
- Multiple scene / mood setting

## Residential Automation

- Home entertainment - Integrated audio visual, lighting control, and other electrical services
- Security - Integrated security, lighting and other electrical services
- Comfort - Dimming and scene setting
- Convenience - Multiple point control, central point control from touch screens, automated time based control, automated 'goodbye' and 'welcome home' moods



# Key Input Units



# Dynamic Labelling Technology, Saturn Series

## Square

The square Saturn series dynamic labelling technology switches are learn enabled surface switches designed to control lighting and other electrical services connected to a C-Bus network. The dynamic labelling technology allows the function of the key to be programmed and displayed onto an LCD display next to the switch button.

The display found on the DLT switch, supports multi language text and user defined bitmaps, such as sliders and bar graphs. The LCD display incorporates back lighting that can be enabled for night operation. In addition, the DLT switch features a page scroll button that permits the user to navigate between pages, to access all control options.

Key input units are fully programmable and may be configured as toggle, dimmer, timer or scene control type functions. With C-Bus switches it is possible to realise multi-way, multi-function switching or dimming control.

The Saturn DLT switches feature a glass fascia and are available in a range of colour backgrounds, including white, black, mid brown and cream.

Key input units communicate with all other units and obtain power via a single twisted pair of connections to the C-Bus unit. In the event of C-Bus power failure, non-volatile memory retains all programmed information relating to the unit's operating status.



**E5084DLGF**

### TECHNICAL INFORMATION

C-Bus Supply Voltage	<b>15-36V DC @ 22mA</b>
Maximum Number of Units on a Single C-Bus Network	<b>50</b>
Button Indicator	<b>Programmable, Blue</b>
Timer Range	<b>1 sec to 18 hrs</b>
Timer Resolution	<b>1 sec</b>
Dimmer Control	<b>255 possible levels</b>
Number of Scenes	<b>8</b>
Standard Colours	<b>White and Black</b>
Operating Temperature Range	<b>0°C to 45°C</b>
Operating Humidity Range	<b>10 - 95% RH</b>

### PRODUCT FEATURES

- Available with 4 buttons
- Features blue light indicator with night light function
- Supports text labels and user defined bitmaps
- Ignore first press option
- Fallback to page 1 and 2 option
- Programmable using learn mode or via the C-Bus configuration software
- Programmed variables are stored in non-volatile memory and are retained in case of loss of C-Bus power
- CE (European Community) compliant

#### CATALOGUE NUMBER DESCRIPTION

##### Saturn Dynamic Labelling Technology

**E5084DL** 4 Gang Saturn DLT

**Cover Selection:** (GF) White, \*(380) Cream, (680) Black, \*(780) Mid-Brown

##### Saturn DLT Fascia

**\*5084DF** 4 Gang Saturn DLT fascia

**Cover Selection:** \*(GF) White, \*(38) Cream, \*(68) Black, \*(78) Mid-Brown

**\*Ask for availability**

# Dynamic Labelling Technology, Saturn Series

## Rectangular

The rectangular Saturn series dynamic labelling technology switches are learn enabled surface switches designed to control lighting and other electrical services connected to a C-Bus network. The dynamic labelling technology allows the function of the key to be programmed and displayed onto an LCD display next to the switch button.

The display found on the DLT switch, supports multi language text and user defined bitmaps, such as sliders and bar graphs. The LCD display incorporates back lighting that can be enabled for night operation. In addition, the DLT switch features a page scroll button that permits the user to navigate between pages, to access all control options.

Key input units are fully programmable and may be configured as toggle, dimmer, timer or scene control type functions. With C-Bus switches it is possible to realise multi-way, multi-function switching or dimming control.

The Saturn DLT switches feature a glass fascia and are available in a range of colour backgrounds, including white, black, mid brown and cream.

Key input units communicate with all other units and obtain power via a single twisted pair of connections to the C-Bus unit. In the event of C-Bus power failure, non-volatile memory retains all programmed information relating to the unit's operating status.




**5085DL680**

### TECHNICAL INFORMATION


C-Bus Supply Voltage	<b>15-36V DC @ 22mA</b>
Maximum Number of Units on a Single C-Bus Network	<b>50</b>
Button Indicator	<b>Programmable, Blue</b>
Timer Range	<b>1 sec to 18 hrs</b>
Timer Resolution	<b>1 sec</b>
Dimmer Control	<b>255 possible levels</b>
Number of Scenes	<b>8</b>
Standard Colours	<b>White and Black</b>
Operating Temperature Range	<b>0°C to 45°C</b>
Operating Humidity Range	<b>10 - 95% RH</b>

### PRODUCT FEATURES

- 5 buttons
- Features blue light indicator with night light function
- Supports text labels and user defined bitmaps
- Ignore first press option
- Fallback to page 1 option
- Programmable using learn mode or via the C-Bus configuration software
- Programmed variables are stored in non-volatile memory and are retained in case of loss of C-Bus power
- CE (European Community) compliant

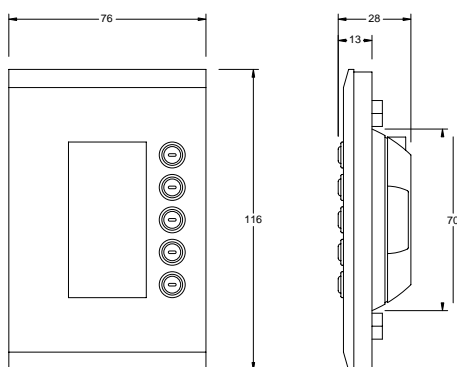

**5085DL illustrated**



#### CATALOGUE NUMBER DESCRIPTION

##### Saturn Dynamic Labelling Technology

**5085DL** 5 Gang Saturn DLT

**Cover Selection:** (GF) White, \*(380) Cream, (680) Black, \*(780) Mid-Brown

##### Saturn DLT Fascia

**\*5085DF** 5 Gang Saturn DLT fascia

**Cover Selection:** \*(GF) White, \*(30) Cream, \*(60) Black, \*(70) Mid-Brown

**\*Ask for availability**

# Saturn Input Switches

## Square

The square Saturn series key input units are learn enabled surface switches designed to control lighting and other electrical services connected to a C-Bus network.

Suitable for exclusive interiors, the Saturn series features an impact resistant glass fascia with white, mid brown, black or cream backing. The round silver finish push buttons feature a dual coloured light indicator, providing a visual indication of the switch state.

Key input units are fully programmable and may be configured as toggle, dimmer, timer or scene control type functions. With C-Bus switches it is possible to realise multi-way, multi-function switching or dimming control.

Key input units communicate with all other units and obtain power via a single twisted pair connection to the C-Bus. In the event of C-Bus power failure, non-volatile memory retains all programmed information relating to the unit's operating status.




E5084NLGF

### TECHNICAL INFORMATION

C-Bus Supply Voltage	15-36VDC @ 22mA
Maximum Number of Units on a Single C-Bus Network	50
Status Indicator	Programmable, Dual, Orange and Blue
Timer Range	1 sec to 18 hrs
Timer Resolution	1 sec
Dimmer Control	255 possible levels
Mounting Centres	84mm
Standard Colours	White and Black
Operating Temperature Range	0°C to 45°C
Operating Humidity Range	0 - 95% RH, non-condensing

### PRODUCT FEATURES

- Available as 2, 4 or 6 key configuration
- Features bi-colour light indicator with night light
- Programmable using learn mode or via the C-Bus Toolkit Software
- Programmed variables are stored in non-volatile memory and are retained in case of loss of C-Bus power
- Features, 60.3mm mounting centres
- Available in glass finish with white, black, cream or mid-brown background
- CE (European Community) compliant

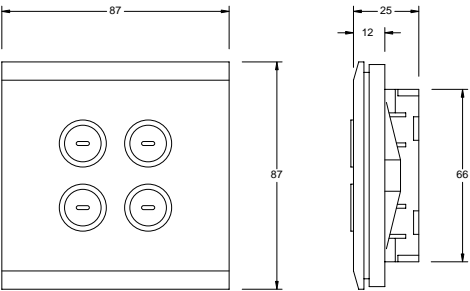

E5084NL illustrated

CATALOGUE NUMBER	DESCRIPTION
<b>Saturn Input Units</b>	
E5082NL	2 Gang Saturn input square
E5084NL	4 Gang Saturn input square
E5086NL	6 Gang Saturn input square
<b>Cover Selection: (GF) White, *(380) Cream, (680) Black, *(780) Mid-Brown</b>	
<b>*Ask for availability</b>	

# Saturn Input Switches

## Rectangular

The rectangular Saturn series key input units are learn enabled surface switches designed to control lighting and other electrical services connected to a C-Bus Network.

Suitable for exclusive interiors, the Saturn series features an impact resistant glass fascia with white, mid brown, black or cream backing. The round silver finish push buttons feature a dual coloured light indicator, providing a visual indication of the switch state.

Key input units are fully programmable and may be configured as toggle, dimmer, timer or scene control type functions. With C-Bus switches it is possible to realise multi-way, multi-function switching or dimming control.

Key input units communicate with all other units and obtain power via a single twisted pair connection to the C-Bus. In the event of C-Bus power failure, non-volatile memory retains all programmed information relating to the unit's operating status.




5084NLGF

TECHNICAL INFORMATION

C-Bus Supply Voltage	15-36VDC @ 22mA
Maximum Number of Units on a Single C-Bus Network	50
Status Indicator	Programmable, Dual, Orange and Blue
Timer Range	1 sec to 18 hrs
Timer Resolution	1 sec
Dimmer Control	255 possible levels
Mounting Centres	84mm
Standard Colours	White and Black
Operating Temperature Range	0°C to 45°C
Operating Humidity Range	0 - 95% RH, non-condensing

PRODUCT FEATURES

- Available as 2, 4 or 6 key configuration
- Features bi-colour light indicator with night light
- Programmable using learn mode or via the C-Bus Toolkit Software
- Programmed variables are stored in non-volatile memory and are retained in case of loss of C-Bus power
- Features, 84mm mounting centres, compatible with Clipsal Mounting Boxes
- Available in glass finish with white, black, cream or mid-brown background
- CE (European Community) compliant

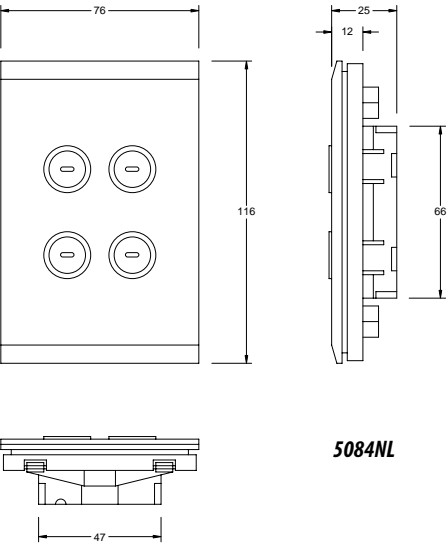

5084NL

CATALOGUE NUMBER	DESCRIPTION
<b>Saturn Input Units</b>	
5082NL	2 Gang Saturn input square
5084NL	4 Gang Saturn input square
5086NL	6 Gang Saturn input square
<b>Cover Selection: (GF) White, *(380) Cream, (680) Black, *(780) Mid-Brown</b>	

\*Ask for availability

# Saturn Accessories

## Saturn Fascia



E5086F30



E5086F60



E5086F70



5086F30



5086F60



5086F70

CATALOGUE NUMBER	DESCRIPTION
*E5082F	2 Gang Saturn Fascia Square
*E5084F	4 Gang Saturn Fascia Square
*E5086F	6 Gang Saturn Fascia Square
Cover Selection: *White (GF), *Cream (30), *Black (60), *Mid-Brown (70)	
*5082F	2 Gang Saturn Fascia Rectangular
*5084F	4 Gang Saturn Fascia Rectangular
*5086F	6 Gang Saturn Fascia Rectangular
Cover Selection: *White (GF), *Cream (30), *Black (60), *Mid-Brown (70)	
*Ask for availability	

## Pre-labelled Button Caps



5080LC

CATALOGUE NUMBER	DESCRIPTION
5080LC	Pre-labelled Button Caps



# Neo Dynamic Labelling Technology

## Square

The square Neo series dynamic labelling technology switches are learn enabled surface switches designed to control lighting and other electrical services connected to a C-Bus network. The dynamic labelling technology allows the function of the key to be programmed and displayed onto a LCD display next to the switch button.

The display found on the DLT switch, supports multi language text and user defined bitmaps, such as sliders and bar graphs. The LCD display incorporates back lighting that can be enabled for night operation. In addition, the DLT switch features a page scroll button that permits the user to navigate between pages, to access all control options.

Key input units are fully programmable and may be configured as toggle, dimmer, timer or scene control type functions. With C-Bus switches it is possible to realise multi-way, multi-function switching or dimming control.

Key input units communicate with all other units and obtain power via a single twisted pair of connections to the C-Bus. In the event of C-Bus power failure, non-volatile memory retains all programmed information relating to the unit's operating status.



**E5054DLGB**

### TECHNICAL INFORMATION

C-Bus Supply Voltage	<b>15-36V DC @ 22mA</b>
Maximum Number of Units on a Single C-Bus Network	<b>50</b>
Button Indicator	<b>Programmable, Blue</b>
Timer Range	<b>1 sec to 18 hrs</b>
Timer Resolution	<b>1 sec</b>
Dimmer Control	<b>255 possible levels</b>
Number of Scenes	<b>8</b>
Standard Colours	<b>Grey/Silver</b>
Operating Temperature Range	<b>0°C to 45°C</b>
Operating Humidity Range	<b>10 - 95% RH</b>

### PRODUCT FEATURES

- Available with 4 buttons
- Features blue light indicator with night light function
- Supports text labels and user defined bitmaps
- Ignore first press option
- Fallback to page 1 and 2 option
- Programmable using learn mode or via the C-Bus configuration software
- Programmed variables are stored in non-volatile memory and are retained in case of loss of C-Bus power
- CE (European Community) compliant

CATALOGUE NUMBER	DESCRIPTION
<b>E5054DLGB</b>	4 Gang Neo Square DLT Grey/Silver

# Neo Dynamic Labelling Technology

## Rectangular

The rectangular Neo series dynamic labelling technology switches are learn enabled, surface switches designed to control lighting and other electrical services connected to a C-Bus network. The dynamic labelling technology allows the function of the key to be programmed and displayed onto a LCD display next to the switch button.

The display found on the DLT switch, supports multi language text and user defined bitmaps, such as sliders and bar graphs. The LCD display incorporates back lighting that can be enabled for night operation. In addition, the DLT switch features a page scroll button that permits the user to navigate between pages, to access all control options.

Key input units are fully programmable and may be configured as toggle, dimmer, timer or scene control type functions. With C-Bus switches it is possible to realise multi-way, multi-function switching or dimming control.

Key input units communicate with all other units and obtain power via a single twisted pair of connections to the C-Bus. In the event of C-Bus power failure, non-volatile memory retains all programmed information relating to the unit's operating status.





**5055DLGB**

### TECHNICAL INFORMATION

C-Bus Supply Voltage	<b>15-36V DC @ 22mA</b>
Maximum Number of Units on a Single C-Bus Network	<b>50</b>
Button Indicator	<b>Programmable, Blue</b>
Timer Range	<b>1 sec to 18 hrs</b>
Timer Resolution	<b>1 sec</b>
Dimmer Control	<b>255 possible levels</b>
Number of Scenes	<b>8</b>
Standard Colours	<b>Grey/Silver</b>
Operating Temperature Range	<b>0°C to 45°C</b>
Operating Humidity Range	<b>10 - 95% RH</b>

### PRODUCT FEATURES

- 5 buttons
- Features blue light indicator with night light function
- Supports text labels and user defined bitmaps
- Ignore first press option
- Fallback to page 1 option
- Programmable using learn mode or via the C-Bus configuration software
- Programmed variables are stored in non-volatile memory and are retained in case of loss of C-Bus power
- CE (European Community) compliant

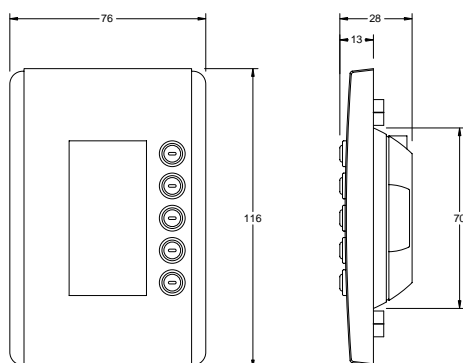

**5055DL illustrated**

#### CATALOGUE NUMBER DESCRIPTION

**5055DLGB** 5 Gang Neo input rectangular DLT Grey/Silver

# Neo Input Switches

## Square

The Neo key input units are learn enabled surface switches designed to control lighting and other electrical services connected to a C-Bus network.

Suitable for exclusive interiors, the Neo features large, flat, tactile rocker action switches that have been designed to blend in with the fascia. The Neo switches feature a bi-colour light indicator that provides a visual indication of switch status.

The Neo switches feature a night light function, and incorporate an infrared receiver in the body of the unit, so the switch may be used with a remote control.

Key input units are fully programmable and may be configured as toggle, dimmer, timer or scene control type functions. With C-Bus switches it is possible to realise multi-way, multi-function switching or dimming control.

Key input units communicate with all other units and obtain power via a single twisted pair connection to the C-Bus. In the event of C-Bus power failure, non-volatile memory retains all programmed information relating to the unit's operating status.

The Neo switches are available in a wide range of finishes.




E5058NLGB

### TECHNICAL INFORMATION

C-Bus Supply Voltage	15-36VDC @ 22mA
Maximum Number of Units on a Single C-Bus Network	50
Status Indicator	Programmable, Dual, Orange and Blue
Timer Range	1 sec to 18 hrs
Timer Resolution	1 sec
Dimmer Control	255 possible levels
Mounting Centres	60.3mm
Standard Colours	Grey/Silver
Standard Colours (Inner Surround)	Grey/Silver
Operating Temperature Range	0° C to 45° C
Operating Humidity Range	0 - 95% RH, non-condensing

### PRODUCT FEATURES

- Available as 2, 4 or 8 key configuration
- Features bi-colour light indicator with night light function
- Built in infrared receiver
- Programmable using learn mode or via the C-Bus Toolkit Software
- Programmed variables are stored in non-volatile memory and are retained in case of loss of C-Bus power
- Features 60.3mm mounting centres
- CE (European Community) compliant

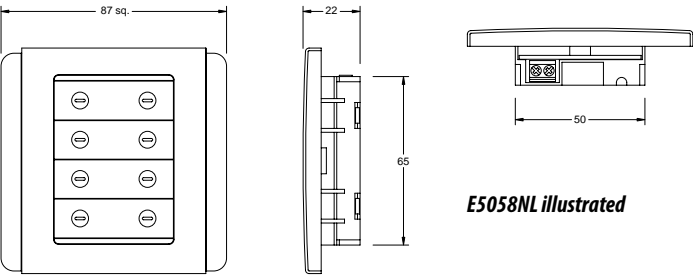

E5058NL illustrated

CATALOGUE NUMBER	DESCRIPTION
E5052NLGB	2 Gang Neo Input Square Grey/Silver
E5054NLGB	4 Gang Neo Input Square Grey/Silver
E5058NLGB	8 Gang Neo Input Square Grey/Silver

# Neo Input Switches

## Rectangular

The rectangular Neo key input units are learn enabled surface switches designed to control lighting and other electrical services connected to a C-Bus network.

Suitable for exclusive interiors, the Neo features large, flat, tactile rocker action switches that have been designed to blend in with the fascia. The Neo switches feature a bi-colour light indicator that provides a visual indication of switch status.

The Neo switches feature a night light function, and incorporate an infrared receiver in the body of the unit, so the switch may be used with a remote control.

Key input units are fully programmable and may be configured as toggle, dimmer, timer or scene control type functions. With C-Bus switches it is possible to realise multi-way, multi-function switching or dimming control.

Key input units communicate with all other units and obtain power via a single twisted pair connection to the C-Bus. In the event of C-Bus power failure, non-volatile memory retains all programmed information relating to the unit's operating status.

The Neo switches are available in a wide range of colours and finishes.




**5058NLGB**

### TECHNICAL INFORMATION

C-Bus Supply Voltage	<b>15-36VDC @ 22mA</b>
Maximum Number of Units on a Single C-Bus Network	<b>50</b>
Status Indicator	<b>Programmable, Dual, Orange and Blue</b>
Timer Range	<b>1 sec to 18 hrs</b>
Timer Resolution	<b>1 sec</b>
Dimmer Control	<b>255 possible levels</b>
Mounting Centres	<b>60.3mm</b>
Standard Colours	<b>Grey/Silver</b>
Standard Colours (Inner Surround)	<b>Grey/Silver</b>
Operating Temperature Range	<b>0°C to 45°C</b>
Operating Humidity Range	<b>0 - 95% RH, non-condensing</b>

### PRODUCT FEATURES

- Available as 2, 4 or 8 key configuration
- Features bi-colour light indicator with night light function
- Built in infrared receiver
- Programmable using learn mode or via the C-Bus Toolkit Software
- Programmed variables are stored in non-volatile memory and are retained in case of loss of C-Bus power
- Features 84mm mounting centres, compatible with Clipsal Mounting Boxes
- CE (European Community) compliant

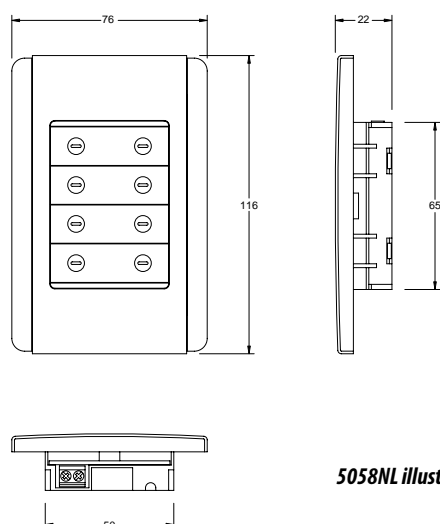

**5058NL illustrated**

CATALOGUE NUMBER	DESCRIPTION
<b>5052NLGB</b>	2 Gang Neo Input Rectangular Grey/Silver
<b>5054NLGB</b>	4 Gang Neo Input Rectangular Grey/Silver
<b>5058NLGB</b>	8 Gang Neo Input Rectangular Grey/Silver

# Neo Accessories



E50500S



50500S



E50500IS



5050IS



5052NRPWE



5052NRIBK



5052NRIGB

CATALOGUE NUMBER	DESCRIPTION
*E5050IS †	Square inner surround - pack of 5
*5050IS †	Rectangular inner surround - pack of 5
† Available in *Grey/Silver (GB), *White (WE), *Cream (CR), *Desert Sand (DS), *Soft Grey (SG), *Black (BK), *Brown (BR)	
*E5050ISBA	Square inner surround - brushed aluminium - pack of 5
*5050ISBA	Rectangular inner surround - brushed aluminium - pack of 5
*E5050ISGD	Square inner surround - gold - pack of 5
*5050ISGD	Rectangular inner surround - gold - pack of 5
*E50500S †	Square outer surround - pack of 5
*50500S †	Rectangular outer surround - pack of 5
† Available in *Grey/Silver (GB), *White (WE), *Cream (CR), *Desert Sand (DS), *Soft Grey (SG), *Black (BK), *Brown (BR)	
*5052NRP †	Rocker Switch Covers and Spacers for 2 Gang input unit
*5054NRP †	Rocker Switch Covers and Spacers for 4 Gang input unit
*5058NRP †	Rocker Switch Covers and Spacers for 8 Gang input unit
† Available in *Grey/Silver (GB), *White (WE), *Cream (CR), *Desert Sand (DS), *Soft Grey (SG), *Black (BK), *Brown (BR)	
*5052NRI †	Rocker Switch with ID Window - pack of 10
† Available in *Grey/Silver (GB), *White (WE), *Cream (CR), *Black (BK)	
*Ask for availability	

## Moulding Frames



5850FBK



5850FBR



5850FCM



5850FWE

CATALOGUE NUMBER	DESCRIPTION
<b>Moulding Frames</b>	
*5850FBK	Moulding frame rectangular - Black Spk
*5850FBR	Moulding frame rectangular - Brown Spk
*5850FCM	Moulding frame rectangular - Cream Spk
*5850FWE	Moulding frame rectangular - White Spk
<b>Wall boxes</b>	
1571	Wall box J type metal
1571P	Wall box J type plastic
*E5050MF	Mounting flange
<b>*Ask for availability</b>	



# E-Series Range Input Switches

The E-Series key input units are learn enabled surface switches designed to control lighting and other electrical services connected to a C-Bus network.

Key input units are fully programmable and may be configured as toggle, dimmer, type functions. With C-Bus switches it is possible to realise multi-way, multi-function switching or dimming control.

Key input units communicate with all other units and obtain power via a single twisted pair connection to the C-Bus. In the event of C-Bus power failure, non-volatile memory retains all programmed information relating to the unit's operating status.




**E5034NLWE**

## TECHNICAL INFORMATION

C-Bus Supply Voltage	<b>15-36VDC @ 18mA</b>
Maximum Number of Units on a Single C-Bus Network	<b>100</b>
Status Indicator	<b>Programmable, Orange LED</b>
Timer Range	<b>1 sec to 18 hrs</b>
Timer Resolution	<b>1 sec</b>
Dimmer Control	<b>255 possible levels</b>
Mounting Centres	<b>60.3mm</b>
Standard Colours	<b>White</b>
Operating Temperature Range	<b>0°C to 45°C</b>
Operating Humidity Range	<b>0 - 95% RH, non-condensing</b>

## PRODUCT FEATURES

- Available as 1, 2 or 4 key configuration
- Programmable using learn mode or via the C-Bus Toolkit Software
- Features 60.3mm mounting centres
- CE (European Community) compliant

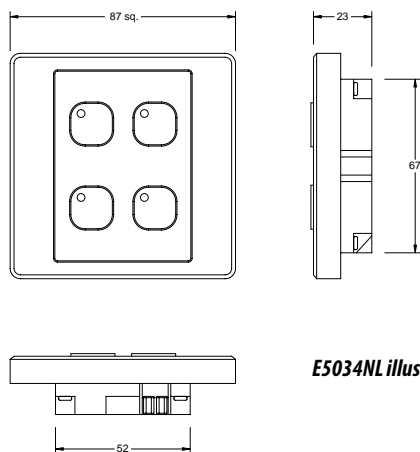

**E5034NL illustrated**

## CATALOGUE NUMBER DESCRIPTION

<b>*E5031NLWE</b>	1 Gang key vertical
<b>*E5032NLWE</b>	2 Gang key horizontal
<b>*E5032VNLWE</b>	2 Gang key vertical
<b>*E5034NLWE</b>	4 Gang key vertical

**\*Ask for availability**

# Reflection Range Input Switches

The Reflections series key input units are learn enabled, ultra flat, surface switches designed to control lighting and other electrical services connected to a C-Bus network.

Suitable for exclusive interiors, the Reflection switches feature a screwless, high grade, stainless steel metal cover. The screwless design means that the aesthetics and architectural finish of the product provides a clean, stylish appearance.



The Reflection series also feature square, backlit, metal finish switches to maintain the aesthetics of the switch plate.

Key input units are fully programmable and may be configured as toggle, dimmer, timer or scene control type functions. With C-Bus switches it is possible to realise multi-way, multi-function switching or dimming control.

Key input units communicate with all other units and obtain power via a single twisted pair connection to the C-Bus. In the event of C-Bus power failure, non-volatile memory retains all programmed information relating to the unit's operating status.

TECHNICAL INFORMATION

C-Bus Supply Voltage	15-36VDC @ 20mA
Maximum Number of Units on a Single C-Bus Network	50
Status Indicator	Programmable, Blue LED
Timer Range	1 sec to 18 hrs
Timer Resolution	1 sec
Dimmer Control	255 possible levels
Mounting Centres	84mm
Operating Temperature Range	0°C to 45°C
Operating Humidity Range	0 - 95% RH, non-condensing

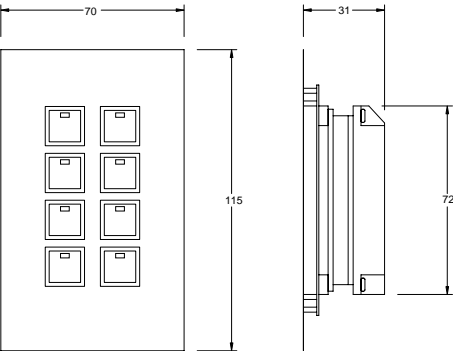

R5068NL illustrated



R5068NL



R5050WB

PRODUCT FEATURES

- Available as 1, 2, 3, 4, 6 and 8 key configuration
- Features blue light indicator with night light
- Programmable using learn mode or via the C-Bus Toolkit Software
- Programmed variables are stored in non-volatile memory and are retained in case of loss of C-Bus power
- Features 84mm mounting centres (requires special wallbox for mounting)
- CE (European Community) compliant

CATALOGUE NUMBER	DESCRIPTION
*R5061NL	1 Gang input reflection range
*R5062VNL	2 Gang input reflection range
*R5063NL	3 Gang input reflection range
*R5064VNL	4 Gang input reflection range
*R5066NL	6 Gang input reflection range
*R5068NL	8 Gang input reflection range
R5050WB	Back box for reflection range
*Ask for availability	

# Input Units



# Black & White Touch Screen

The Black and White Touch Screen builds on the success of the Monochrome Touch Screen, with many enhancements made in this innovative product developed by Clipsal engineers.

Designed to be quicker, easier and more flexible to install and commission, the new unit has significant enhancements to its predecessor. Compatible with Version 4 of Clipsal's Windows® based drag and drop programming software (PICED), commissioning is now possible through a standard USB port located underneath the fascia that can be utilised as a PC interface. A separate RS-232 port is included within the logic versions to allow integration to third party devices.

The touch screen requires a custom wall box, which is supplied separately but does not require an external power supply.

## TECHNICAL INFORMATION

C-Bus Supply Voltage	<b>15-36VDC @ 65mA</b>
Control Functions	<b>Load switching &amp; dimming</b> <b>Scene control</b> <b>Logic (Logic engine versions only)</b> <b>Scheduling</b> <b>Black &amp; White, Backlit</b>
Screen Type	<b>Black &amp; White, Backlit</b>
Resolution	<b>Screen size, QVGA 320 x 240 pixels</b>
Screen Size viewing area	<b>100mm x 75mm (119mm Diagonal)</b>
Real Time Clock	<b>365 day</b>
Backlighting	<b>Yes, programmable</b>
Network Burden	<b>Software selectable</b>
System Clock	<b>Software selectable</b>
C-Bus Connection	<b>Screw terminals</b>
Programming Port	<b>USB Type B</b>
Surround Colours	<b>Saturn, Neo, Stainless Steel, Plastic</b>
Operating Temperature Range	<b>10° C to 45° C</b>
Operating Humidity Range	<b>10 – 95% RH</b>
Maximum number of controller loads	<b>255 Group Addresses on each of the 10 C-Bus Applications</b>
Maximum number of C-Touch Units on a single C-Bus Network	<b>10</b>
Third Party interface	<b>RS-232 port (supported by Logic Engine versions only)</b>



**5080CT26**



**BS5000CT2**

## PRODUCT FEATURES

- Larger screen than monochrome model with enhanced contrast and superior backlighting
- Compatible with Version 4 of Clipsal's Windows® based drag and drop programming software (PICED)
- Available with or without C-Bus Logic Engine features
- A separate RS-232 port is included on the rear of the unit for third party device integration (supported by Logic Engine versions only)
- Programmed via a standard USB port on the unit
- USB programming port accessible from the front of the unit
- Does not require additional power supply
- CE (European Community) compliant

## BLACK AND WHITE TOUCH SCREEN

### CATALOGUE NUMBER DESCRIPTION

#### Saturn Touch Screen w/o Logic Engine

<b>5080CT2GF</b>	Black & White Touch Screen White
<b>*5080CT23</b>	Black & White Touch Screen Cream
<b>*5080CT27</b>	Black & White Touch Screen Mid-Brown
<b>5080CT26</b>	Black & White Touch Screen Black

#### Neo Touch Screen w/o Logic Engine

<b>5050CT2GB</b>	Black & White Touch Screen Neo Grey/Silver
<b>*5050CT2WE</b>	Black & White Touch Screen Neo White
<b>*5050CT228</b>	Black & White Touch Screen Neo White Brushed Aluminium
<b>*5050CT2BK</b>	Black & White Touch Screen Neo Black

#### Flat Plate Series w/o Logic Engine

<b>*BS5000CT2</b>	Black & White Touch Screen Stainless Steel
-------------------	--

#### Plastic Series w/o Logic Engine

<b>SC5000CT2WE</b>	Black & White Touch Screen Plastic White
<b>*SC5000CT2CM</b>	Black & White Touch Screen Plastic Cream
<b>*SC5000CT2BK</b>	Black & White Touch Screen Plastic Black

**\* Ask for availability**

# Black & White Touch Screen



5080CTL2GF



5080CTL27



5080CTL23

## CATALOGUE NUMBER DESCRIPTION

### Saturn Touch Screen with Logic Engine

<b>5080CTL2GF</b>	Black & White Touch Screen Logic Saturn White
<b>*5080CTL23</b>	Black & White Touch Screen Logic Saturn Cream
<b>*5080CTL27</b>	Black & White Touch Screen Logic Saturn Mid-brown
<b>5080CTL26</b>	Black & White Touch Screen Logic Saturn Black

### Neo Touch Screen with Logic Engine

<b>5050CTL2GB</b>	Black & White Touch Screen Logic Neo Grey/Silver
<b>*5050CTL2WE</b>	Black & White Touch Screen Logic Neo White
<b>*5050CTL228</b>	Black & White Touch Screen Logic Neo White Brushed Aluminium
<b>*5050CTL2BK</b>	Black & White Touch Screen Logic Neo Black

### Flat Plate Touch Screen with Logic Engine

<b>*BS5000CTL2</b>	Black & White Touch Screen Logic S/Steel
--------------------	--

### Plastic Series Touch Screen with Logic Engine

<b>SC5000CTL2WE</b>	Black & White Touch Screen Logic Plastic White
<b>*SC5000CTL2CM</b>	Black & White Touch Screen Logic Plastic Cream
<b>*SC5000CTL2BK</b>	Black & White Touch Screen Logic Plastic Black

## ACCESSORIES FOR BLACK & WHITE TOUCH SCREEN

### CATALOGUE NUMBER DESCRIPTION

#### Wall box

<b>5000CT2WB</b>	Black & White Touch Screen Wall Box
------------------	-------------------------------------

#### Third Party Interface Lead

<b>5000CT2RS232</b>	Black & White Touch Screen RS232 Lead
---------------------	---------------------------------------

#### Fascia

<b>*5080CT2F</b>	Saturn glass fascia
------------------	---------------------

**Cover Selection:** (GF) White, (3) Cream, (6) Black, (7) Mid-Brown

<b>*5050CT2F</b>	Neo fascia
------------------	------------

**Cover Selection:** (28) White & Brushed Aluminium, (BK) Black, (GB) Grey/Silver, (WE) White

#### Flat Plate

<b>*BS5000CT2F</b>	Black & White Touch Screen Metal Fascia Stainless Steel
--------------------	---

#### Plastic Series

<b>*SC5000CT2FWE</b>	Black & White Touch Screen Plastic Fascia White
<b>*SC5000CT2FCM</b>	Black & White Touch Screen Plastic Fascia Cream
<b>*SC5000CT2FBK</b>	Black & White Touch Screen Plastic Fascia Black

\* Ask for availability

# Colour Touch Screens

The colour touch screen provides a simple, elegant and functional interface to a C-Bus management and control system. The touch screen provides a focal point to control and monitor a building's electrical systems, such as lighting, irrigation and entertainment services.

The touch screen is a wall mounted, touch sensitive, high resolution LCD screen that supports user defined graphics such as sliders, bitmaps and images and text characters, including English, Chinese, Arabic and other languages. The menus are fully customised at the time of installation, and may be changed at any time thereafter.

The touch screen incorporates an astronomical, real time clock for event scheduling and calendar functions, based on time of day, week, month or year. The colour touch screen features a logic engine module, that facilitates the development of logic based routines and scenarios, providing additional functionality of the installed system.

In addition, the colour touch screen is supplied with powerful configuration software that allows the installer to develop custom pages and menus to suit any installation of any size.

Available in either Neo or Saturn style, to complement the existing C-Bus wall switches. In addition, the touch screen features backlighting, that is controlled from a light level sensor located on the unit. The touch screen requires a custom wall box and power supply, which are supplied separately.



**BS5000CTC2**



**5050CTC2**

## TECHNICAL INFORMATION






C-Bus Supply Voltage	<b>15 - 36VDC @ 22mA</b>
External Power Supply	<b>5VDC @ 10A (supplied)</b>
Control Functions	<b>Switching, dimming, scene control, event scheduling or logic module</b>
Screen Type	<b>LCD active matrix, backlit</b>
Touch Overlay Type	<b>Resistive membrane</b>
Resolution	<b>VGA, 640 x 480 pixels</b>
Screen Size	<b>16.25cm (diagonal)</b>
Screen Viewing Area	<b>130mm(W) x 97mm(H)</b>
Horizontal Viewing Angles	<b>+/- 70°</b>
Vertical Viewing Angles	<b>40° up and 70° down</b>
Luminance	<b>300 cd/m<sup>2</sup></b>
Backlight	<b>Cold cathode with light sensor</b>
Memory	<b>256MB compact flash</b>
Real Time Clock	<b>365 day</b>
Network Burden	<b>Software selectable</b>
System Clock	<b>Software selectable</b>
C-Bus Connection	<b>2 x RJ45 sockets</b>
Ethernet Connection	<b>2 x RJ45 sockets, 10/100MHz</b>
Serial Connection	<b>DB9 plug</b>
Composite Video	<b>RCA socket</b>
Styles	<b>NEO (ABS), SATURN (Glass), Brass and Stainless Steel</b>
Dimensions	<b>248mm(W) x 175mm(H) x 60mm(D)</b>
Operating Temperature Range	<b>0° C to 30° C</b>
Operating Humidity Range	<b>10 - 95% RH, non-condensing</b>

## PRODUCT FEATURES


- Programmable using the C-Bus touch screen configuration software, via the serial or Ethernet connection
- Programmed variables are stored in non-volatile memory and are retained in case of loss of C-Bus power
- Controls and monitors devices connected to the C-Bus, Ethernet or serial connections
- Functions include; scheduling, scene control, irrigation control, logic and scenario management
- Astronomical clock for scheduling and time management of events
- Graphical user based drag and drop configuration software, plus free form logic programming language
- Software interface design supports 101 levels of alpha blending
- Animated buttons with up to 256 animation frames supported
- Fully customized graphics, including bar graphs, sliders, percentage indicators, images, gauges and clocks, with any border and background style
- Supports embedded web pages
- Supports audio WAV files
- Password access control
- External power supply included
- CE (European Community) compliant



## Colour Touch Screens

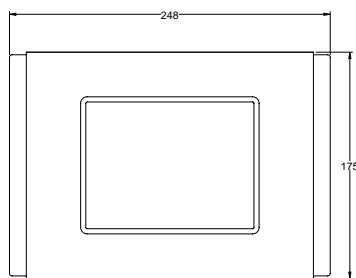

*5050CTC2 illustrated*

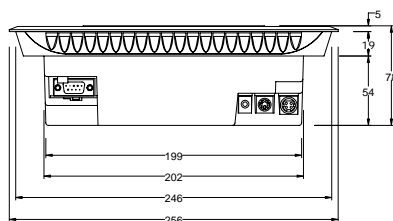

*5080CTC2GF illustrated*

CATALOGUE NUMBER	DESCRIPTION
<b>Saturn Touch Screen</b>	
5080CTC2GF	Colour touch screen with white saturn
<b>Neo Touch Screen</b>	
5050CTC2	Colour touch screen with white neo
<b>Flat Plate Series</b>	
BS5000CTC2	Colour touch screen with stainless steel

## Accessories for Colour Touch Screen

CATALOGUE NUMBER	DESCRIPTION
<b>Wallbox</b>	
5000CTCWB	Colour Touch screen wall box
<b>Power Supply</b>	
5000CTCPS2	Colour Touch screen Power Supply

# Thermostats

Enjoy the perfect temperature all year round with C-Bus Thermostats. C-Bus Thermostats are programmable and will control heating, ventilation, and air conditioning (HVAC) equipment.

The Thermostat range allows the user to manually set the mode of operation (heating, cooling and ventilation) as well as control fan speed and setback or economy modes. The easy to use operator interface includes an integral LCD to display the current temperature and mode of operation. Thermostat is compatible with equipment that supports SELV contact (RWG) control.

Wall mounted, Single Zone Thermostats include support for control of HVAC units via C-Bus or the internal HVAC relays. They also allow the user to manually set the temperature and mode of operation (heating, cooling or ventilation). The easy to use operator interface includes fan speed control, set back or economy mode and an integral LCD to display the current temperature and mode of operation.

Programmable 4 Zone Thermostats include on-board 7-day HVAC time scheduling (user programmable) manual fan speed control, set back mode and an easy to use interface, comprising of an LCD, manual control buttons and a rotating dial with an integral press switch. From the unit, the user can manually adjust the temperature set point, the mode of operation (heating, cooling, ventilation) and time schedules.



**Single Zone**



**4 Zone**

## TECHNICAL INFORMATION

C-Bus Supply Voltage	<b>15 - 36VDC, 40mA</b>
	<b>Does not supply current to the C-Bus network</b>
C-Bus AC Input Impedance	<b>50kΩ @ 1kHz</b>
Relays (5070THPR model)	<b>Each relay rated at 2A @ 24V ac 3750V isolation between terminals and C-Bus</b>
C-Bus Connection	<b>One terminal block to accommodate 0.2 to 1.3mm<sup>2</sup> (24 to 16 AWG)</b>
Temperature Sensor Accuracy	<b>±0.5°C (±0.9°F)</b>
C-Bus System Clock	<b>Software selectable</b>
Network Burden	<b>Software selectable</b>
Operating Temperature	<b>-10 to 50°C (14 to 122°F)</b>
Operating Humidity Range	<b>10 to 95% R.H.</b>

## PRODUCT FEATURES

- Support for control of HVAC units via C-Bus or internal relays ('RWG' control)
- Control of up to four switched Zones for ducted systems plus the common zone (4 zone unit only)
- 7 day programmable HVAC schedules (4 zone unit only)
- Support for remote temperature sensing by other C-Bus devices
- Optional manual fan speed (for HVAC plant that supports variable fan speeds)
- Setback capability for reducing energy consumption.
- CE (European Community) compliant

CATALOGUE NUMBER	DESCRIPTION	CATALOGUE NUMBER	DESCRIPTION
<b>*5070THBRPGWE</b>	Single Zone White	<b>*5070THPRPGWE</b>	4 Zone White
<b>*5070THBRBK</b>	Single Zone Black	<b>*5070THPRBK</b>	4 Zone Black
<b>*5070THBRSS</b>	Single Zone Stainless Steel	<b>*5070THPRSS</b>	4 Zone Stainless Steel
<b>*5070THBPGWE</b>	Single Zone no relays White	<b>*5070THPPGWE</b>	4 Zone no relays White
<b>*5070THBBK</b>	Single Zone no relays Black	<b>*5070THPBK</b>	4 Zone no relays Black
<b>*5070THBSS</b>	Single Zone no relays Stainless Steel	<b>*5070THPSS</b>	4 Zone no relays Stainless Steel
<b>*Ask for availability</b>		<b>E5031RDTSL</b>	C-Bus remote digital temperature sensor

# General Input Unit

The 4 channel general input units are DIN rail mounted units designed to measure digital, voltage, current loop and thermistor inputs and generate messages to the C-Bus network.

The unit is designed to broadcast the actual measured value to the C-Bus network, which in turn may be displayed on other C-Bus devices such as the touch screen, C-Gate or C-Lution. In addition, the unit may trigger a group address as a function of the input level, up to eight trigger points may be assigned to a single input channel.

The general input unit is designed to interface to third party products, such as light level sensors, temperature sensors, power, frequency, moisture, rate sensors and others. In this way, the general input may be used to extend the functionality of the C-Bus and its ability to integrate with other systems such as HVAC and power monitoring systems. The general input also generates 24VDC to power the external sensors.




The general input units are available as passive models only, hence do not source current to the C-Bus network.



**E5504GI**

## TECHNICAL INFORMATION

Catalogue Number	<b>E5504GI</b>
Supply Voltage	<b>24VAC +/- 10% @ 500mA, power pack not supplied with the unit</b>
Supply Frequency	<b>50/60Hz</b>
C-Bus Supply Voltage	<b>15-36VDC @ 18mA</b>
Auxiliary Output	<b>24VDC @ 250mA</b>
Voltage Inputs	<b>0 - 1V, 0 - 5V, 0 - 10V and 0 - 20V</b>
Current Inputs	<b>0 - 20mA and 4 - 20mA</b>
Impedance Inputs	<b>0 - 500Ω, 0-1kΩ and 0-3kΩ</b>
Digital Inputs	<b>Yes</b>
Broadcast Rate	<b>2 to 1,024 seconds</b>
Maximum Number of Units on a Single C-Bus Network	<b>10</b>
Status Indicators	<b>Unit and C-Bus</b>
A/D Conversion	<b>8 - bit</b>
Accuracy	<b>0.5%</b>
Warm Up Time	<b>5 seconds</b>
Network Clock	<b>Software selectable</b>
Network Burden	<b>Software selectable</b>
C-Bus Termination	<b>2 x RJ45 Socket</b>
Load Termination	<b>2 x 1.5mm<sup>2</sup> or 1 x 2.5mm<sup>2</sup></b>
Operating Temperature Range	<b>0°C to 45°C</b>
Operating Humidity Range	<b>0 - 95% RH, non-condensing</b>

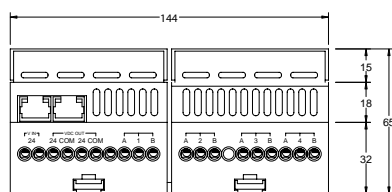

**E5504GI illustrated**

## PRODUCT FEATURES

- Provides 4 channels of input, compatible with a range of third party sensor products
- Capable of threshold switching or broadcasting value onto the network
- Programmable via the C-Bus Toolkit Software
- Programmed variables are stored in non-volatile memory and are retained in case of loss of mains or C-Bus power
- Designed to fit standard 35mm top hat DIN rail
- Designed to fit into standard electrical switchboards
- CE (European Community) compliant

CATALOGUE NUMBER	DESCRIPTION
<b>*E5504GI</b>	4 channel general input module

**\*Ask for availability**

# Auxiliary Input Unit

## Learn Enabled

The auxiliary input unit is a DIN rail mounted unit that provides four isolated inputs for voltage free, mechanical switches to interface to the C-Bus network. The auxiliary input supports momentary and latching switch types.

The auxiliary input unit features learn mode, Channel, C-Bus and unit status indicators.

The auxiliary input unit may be programmed with the same functions as a key input, including toggle, timer, dimmer and scene control.






L5504AUX

### TECHNICAL INFORMATION

Catalogue Number	L5504AUX
C-Bus Supply Voltage	15-36VDC @ 18mA
Switch Isolation	500V
Maximum Switch and Cable Impedance	1000Ω
Switch Open Voltage	5V
Switch Closed Current	0.4mA
Maximum Number of Units on a Single C-Bus Network	100
Status Indicators	Channel (4), Unit and C-Bus
Warm Up Time	5 seconds
C-Bus Termination	2 x RJ45 Sockets
Load Termination	2 x 1.5mm <sup>2</sup> or 1 x 2.5mm <sup>2</sup>
Operating Temperature Range	0°C to 45°C
Operating Humidity Range	0 - 95% RH, non-condensing

### PRODUCT FEATURES

- Provides 4 channels of input, compatible with voltage free mechanical switches
- Isolated inputs, up to 500V isolation
- Programmable by learn mode or using the C-Bus Toolkit Software
- Programmed variables are stored in non-volatile memory and are retained in case of loss of mains or C-Bus power
- Designed to fit standard 35mm top hat DIN rail
- Designed to fit into standard electrical switchboards
- CE (European Community) compliant



L5504AUX illustrated

CATALOGUE NUMBER	DESCRIPTION
*L5504AUX	4 channel auxiliary input unit
*Ask for availability	

# Bus Coupler

## Learn Enabled

The bus couplers provide non-isolated inputs for voltage free, mechanical switches to interface to the C-Bus network. The bus couplers support momentary and latching switch types.

The bus coupler units may be programmed with the same functions as a key input, including toggle, timer, dimmer and scene control.

The four channel bus coupler provides support for 4 switches which are programmed to report the state of the switch.

The bus couplers are small in size and volume and are designed to fit into any wallbox.






5104BCLWE

### TECHNICAL INFORMATION

Catalogue Number	5104BCL
C-Bus Supply Voltage	15-36VDC @ 18mA
Maximum Distance between Switch and Bus Coupler	1m
Number of Channels	4
LED Drive Output	0mA
Maximum Number of Units on a Single C-Bus Network	100
Status Indicators	Channel (4)
Warm Up Time	5 seconds
C-Bus Termination	Screw terminals
Load Termination	Push Terminals, 1 x 1.5mm <sup>2</sup>
Operating Temperature	0° C to 45° C
Operating Humidity	0 - 95% RH, non condensing

### PRODUCT FEATURES

- Provides 4 channels of input, compatible with voltage free mechanical switches
- Programmable by learn mode or using the C-Bus configuration software
- Programmed variables are stored in non-volatile memory and are retained in case of loss of mains or C-Bus power
- Small in size and volume, designed to fit into any wallbox
- CE (European Community) compliant

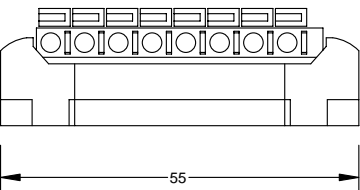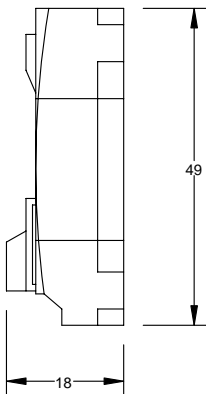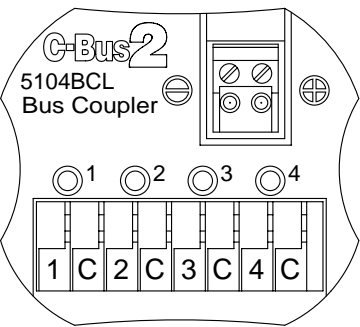

5104BCLWE illustrated

CATALOGUE NUMBER	DESCRIPTION
5104BCLWE	Bus coupler auxiliary input

# Pascal Automation Controller

The Pascal Automation Controller (PAC) is a DIN rail mounted device that provides sophisticated and affordable control of a Clipsal C-Bus system. The PAC can perform operations in response to monitored events by executing custom written embedded programs. These programs are written by installers to suit individual application needs using the Microsoft Windows™ based programming interface for C-Bus embedded devices or ‘PICED’ software.

The PAC provides a USB interface through which programs are downloaded. The USB connection can also be used to communicate directly with a C-Bus installation via a PC. This allows the PAC to function as a PC Interface and can be used by the C-Bus Toolkit Software when configuring a C-Bus installation.






5500PACA

### TECHNICAL INFORMATION

Catalogue Number	5500PACA
C-Bus Supply Voltage	15-36VDC @ 32mA
Battery Backup Supply Voltage	12VDC @ 30mA
Network Clock	Software selectable
Network Burden	Software selectable
Maximum Number of C-Bus Applications Supported	10
C-Bus Connections	2 x RJ45 Sockets
RS-232 Port Connectors	2 x RJ45
Dimensions	72mm(W) x 92mm(H) x 63mm(D)
Operating Temperature Range	0°C to 45°C
Operating Humidity Range	10 - 95% RH

### PRODUCT FEATURES

- Conditional and real-time events programming for C-Bus
- Dedicated scheduling, logic and scene programming modules
- Connects to and powered by C-Bus
- Programmable using the C-Bus Toolkit Software
- Includes a built-in real time clock
- Compact size
- 2 x RS-232 ports for third party device control
- CE (European Community) compliant



5500PACA illustrated

CATALOGUE NUMBER	DESCRIPTION
5500PACA	Pascal Automation Controller



# Indoor Motion Sensor, 90 Degrees

The indoor occupancy sensors are surface mounted, input units used to detect movement by sensing natural thermal radiation emitted from any moving body. When movement is detected, the unit issues commands over the C-Bus network to control C-Bus output devices. In addition, the unit features a light level sensor to automatically switch lighting on, under low light conditions.

The sensor has a detection field that covers an area up to 8.5 metres from the unit, with a field of view of 90 degrees. The unit features a 'lens less' design with 12 overlapping zones forming a continuous detection field, therefore resulting in uniform sensitivity across the whole of the detection field, with no dead zones. This features allows the sensor to be ceiling or wall mounted.

The sensor features learn mode, which permits the unit to be programmed without the need for a PC connected to the system.

The sensor features an environmental rating of IP44 and is suitable for indoor applications. The sensor is designed for surface mount applications, and located in the corner of the room where detection is required.




5751LWE

TECHNICAL INFORMATION

Catalogue Number	5751LWE	E5751L
Base, Mounting Centres	84mm	60.3mm
C-Bus Supply Voltage	15-36VDC @ 18mA	
Timer Range	Programmable, 1 sec - 18 hrs	
Timer Resolution	1 sec	
Light Threshold Adjustment	User adjustable, 1 Lux to full sunlight	
Mounting Height	2.4m nominal, (2.0 to 3.2m)	
Field of View	90 degrees	
Detection Area	6m x 6m	
Maximum Number of Units on a Single C-Bus Network	100	
Status Indicator	Walk test LED	
Warm Up Time	5 seconds	
IP Rating	IP44	
C-Bus Termination	Fly lead x 2	
Operating Temperature Range	0° C to 45° C	
Operating Humidity Range	0 - 95% RH, non-condensing	

PRODUCT FEATURES

- Programmable by learn mode or using the C-Bus Toolkit Software
- Programmed variables are stored in non-volatile memory and are retained in case of loss of mains or C-Bus power
- Programmable walk test LED for commissioning
- User adjustable light level threshold, from low light (1 Lux) to full sunlight
- Dual element detectors to minimise false triggering.
- Optical bandpass filter minimises unwanted heat sources from triggering the circuitry
- CE (European Community) compliant

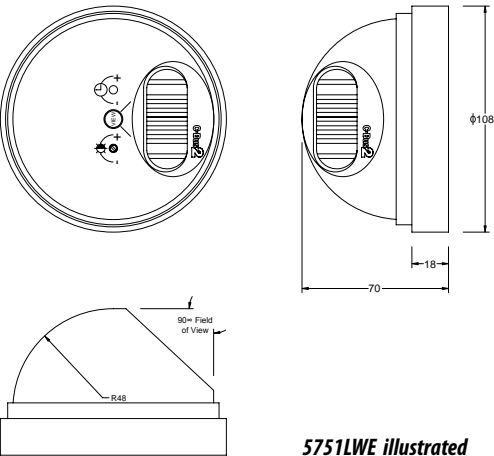

5751LWE illustrated

CATALOGUE NUMBER	DESCRIPTION
5751LWE	PIR indoor occupancy sensor-learn

# Indoor Motion Sensor, 360 Degrees

The indoor occupancy sensors are flush mounted, input units used to detect movement by sensing natural thermal radiation emitted from any moving body. When movement is detected, the unit issues commands over the C-Bus network to control C-Bus output devices. In addition, the unit features a light level sensor to automatically switch lighting on, under low light conditions.

The sensor has a detection field that covers an elliptical area up to 12m x 14m, with a field of view of 360 degrees. The unit features a multi-segmented Fresnel lens design, for superior detection capability.

The sensor features learn mode, which permits the unit to be programmed without the need for a PC connected to the system.

The sensor features an environmental rating of IP44 and is suitable for indoor applications. The sensor is compact in size, and is designed for flush mount applications, located at the centre of the detection area.




**5753L**

## TECHNICAL INFORMATION

Catalogue Number	<b>5753L</b>
C-Bus Supply Voltage	<b>15-36VDC @ 18mA</b>
Timer Range	<b>Programmable, 1 sec - 18 hrs</b>
Timer Resolution	<b>1 sec</b>
Light Threshold Adjustment	<b>User adjustable, 1 Lux to full sunlight</b>
Mounting Height	<b>2.4m nominal, (2.0 to 3.2m)</b>
Field of View	<b>360 degrees</b>
Detection Area	<b>12m x 14m</b>
Maximum Number of Units on a Single C-Bus Network	<b>100</b>
Status Indicator	<b>Walk test LED</b>
Warm Up Time	<b>5 seconds</b>
IP Rating	<b>IP44</b>
C-Bus Termination	<b>Screw terminals</b>
Operating Temperature Range	<b>0°C to 45°C</b>
Operating Humidity Range	<b>0 - 95% RH, non-condensing</b>

## PRODUCT FEATURES

- Programmable by learn mode or using the C-Bus Toolkit Software
- Programmed variables are stored in non-volatile memory and are retained in case of loss of mains or C-Bus power
- Programmable walk test LED for commissioning
- User adjustable light level threshold, from low light (1 Lux) to full sunlight
- Dual element detectors to minimise false triggering
- Optical bandpass filter minimises unwanted heat sources from triggering the circuitry
- Designed for flush mount applications, protrudes only 8mm
- CE (European Community) compliant

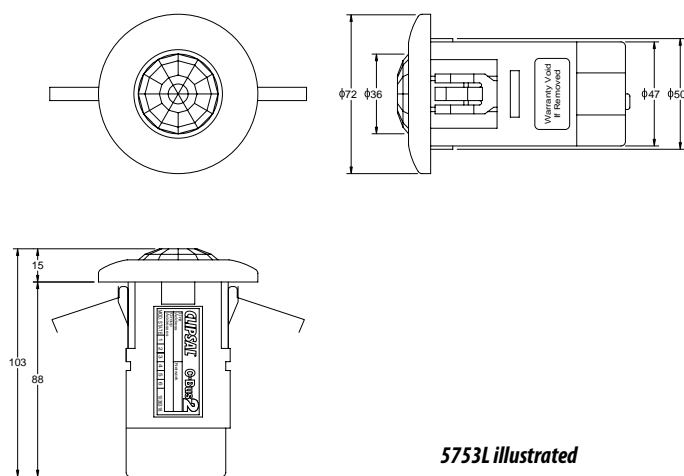

**5753L illustrated**

CATALOGUE NUMBER	DESCRIPTION
<b>5753L</b>	Indoor occupancy sensor, 360 degrees

# Outdoor Motion Sensor, 110 Degrees

The outdoor occupancy sensors are surface mounted, input units used to detect movement by sensing natural thermal radiation emitted from any moving body. When movement is detected, the unit issues commands over the C-Bus network to control C-Bus output devices. In addition, the unit features a light level sensor to automatically switch lighting on, under low light conditions.

The sensor has a detection field that covers an area up to 18 metres from the unit, with a field of view of 110 degrees. Advanced microprocessor circuit technology and a flat multi-segmented lens, divide the field of view into 28 zones located at four different levels. This ensures immediate reaction of body movement and reduces the number of 'dead zones' that can be penetrated.

The sensor features learn mode, which permits the unit to be programmed without the need for a PC connected to the system.

The sensor features an environmental rating of IP66 and is suitable for outdoor applications.




E5750WPL

TECHNICAL INFORMATION

Catalogue Number	E5750WPL
Base, Mounting Centres	60.3mm
C-Bus Supply Voltage	15-36VDC @ 18mA
Timer Range	Programmable, 1 sec - 18 hrs
Timer Resolution	1 sec
Light Threshold Adjustment	User adjustable, 1 Lux to full sunlight
Mounting Height	2.4m nominal, (2.0 to 3.2m)
Field of View	110 degrees
Detection Area	18m radius x 110 degrees
Lens Type	Fresnel, multi-segmented
Maximum Number of Units on a Single C-Bus Network	100
Status Indicator	Walk test LED
Warm Up Time	5 seconds
C-Bus Termination	Fly lead x 2
IP Rating	IP66
Operating Temperature Range	0°C to 45°C

PRODUCT FEATURES

- Programmable by learn mode or using the C-Bus Toolkit Software
- Programmed variables are stored in non-volatile memory and are retained in case of loss of mains or C-Bus power
- Programmable walk test LED for commissioning
- User adjustable light level threshold, from low light (1 Lux) to full sunlight
- Dual element detectors to minimise false triggering
- Optical bandpass filter minimises unwanted heat sources from triggering the circuitry
- CE (European Community) compliant

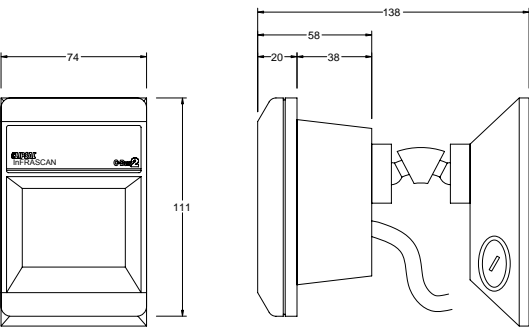

E5750WPL illustrated

CATALOGUE NUMBER	DESCRIPTION
E5750WPL	Outdoor PIR

# Indoor Multi-Sensor, 360 Degrees

The indoor occupancy sensors are surface mounted, input units used to detect movement by sensing natural thermal radiation emitted from any moving body. When movement is detected, the unit issues commands over the C-Bus network to control C-Bus output devices. In addition, the unit features a light level sensor to automatically switch lighting on, under low light conditions.

The sensor has a detection field that covers an area up to 8.5 metres from the unit, with a field of view of 90 degrees. The unit features a 'lens less' design with 12 overlapping zones forming a continuous detection field, therefore resulting in uniform sensitivity across the whole of the detection field, with no dead zones. This feature allows the sensor to be ceiling or wall mounted.

The sensor features learn mode, which permits the unit to be programmed without the need for a PC connected to the system.

The sensor features an environmental rating of IP44 and is suitable for indoor applications. The sensor is designed for surface mount applications, and located in the corner of the room where detection is required.




## TECHNICAL INFORMATION

Catalogue Number	<b>5753PEIRL</b>
C-Bus Supply Voltage	<b>15-36VDC @ 18mA</b>
Timer Range	<b>Programmable, 1 sec - 18 hrs</b>
Timer Resolution	<b>1 sec</b>
Light Threshold Adjustment	<b>Programmable, 1 Lux to full sunlight</b>
Light Regulation	<b>40 - 3000 Lux</b>
Mounting Height	<b>2.4m nominal, (2.0 to 3.2m)</b>
Field of View	<b>360 degrees</b>
Detection Area	<b>Programmable, up to 12m x 8.5m</b>
IR Receiver	<b>Remote enabled/disable control</b>
Maximum Number of Units on a Single C-Bus Network	<b>100</b>
Status Indicator	<b>Walk test and IR receive LED</b>
Warm Up Time	<b>5 seconds</b>
IP Rating	<b>IP44</b>
C-Bus Termination	<b>Screw terminals</b>
Operating Temperature Range	<b>0°C to 45°C</b>
Operating Humidity Range	<b>0 - 95% RH, non-condensing</b>

## PRODUCT FEATURES

- Programmable by learn mode or using the C-Bus Toolkit Software
- Programmed variables are stored in non-volatile memory and are retained in case of loss of mains or C-Bus power
- Programmable walk test LED for commissioning
- User adjustable light level threshold, from low light (1 Lux) to full sunlight
- Dual element detectors to minimise false triggering
- Optical bandpass filter minimises unwanted heat sources from triggering the circuitry
- CE (European Community) compliant

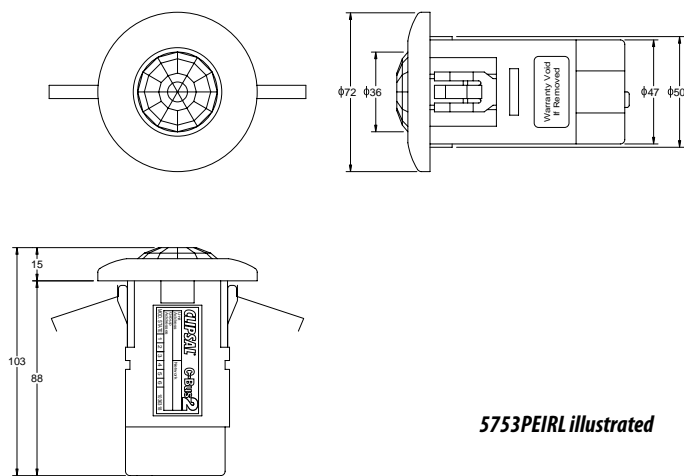

**5753PEIRL illustrated**

CATALOGUE NUMBER	DESCRIPTION
<b>5753PEIRL</b>	PIR light level IR combination sensor

# Light Level Sensors

The light level sensors are surface mounted input units used to measure ambient light levels and regulate lighting loads.

The sensor has a field of view of 180 degrees and is capable of measuring lighting levels in the range of 20 to 3000 lux and regulating lighting in the range of 40 to 1600 lux, which is suitable for most commercial applications.

The light level sensor may be used in conjunction with non-dimmable ballasts to bank switch luminaires or with dimmable electronic ballasts to regulate lighting levels continuously, within a programmed target range.

The unit features built in lag, to prevent rapid changes in output, due to changes in environmental conditions, such as cloud cover or rapid movement through the detection area.




**E5031PE**

## TECHNICAL INFORMATION

C-Bus Supply Voltage	<b>15-36VDC @ 18mA</b>
Light Level (measure)	<b>20 - 3000 lux</b>
Light Level (regulate)	<b>40 - 1600 lux</b>
Field of View	<b>180 degrees</b>
Time Constant	<b>Approx. 90 seconds</b>
Mounting Height	<b>2.4m nominal, (2.0 to 3.2m)</b>
Field of View	<b>180 degrees</b>
Maximum Number of Units on a Single C-Bus Network	<b>100</b>
Status Indicator	<b>Programmable</b>
Warm Up Time	<b>5 seconds</b>
C-Bus Termination	<b>Screw terminals</b>
Standard Colours	<b>White</b>
Operating Temperature	<b>0°C to 45°C</b>
Operating Humidity	<b>0 - 95% RH, non condensing</b>

## PRODUCT FEATURES

- Programmable using the C-Bus configuration software
- Programmed variables are stored in non-volatile memory and are retained in case of loss of mains or C-Bus power
- Programmable target light level and margin
- Bank switching or light level regulation
- CE (European Community) compliant

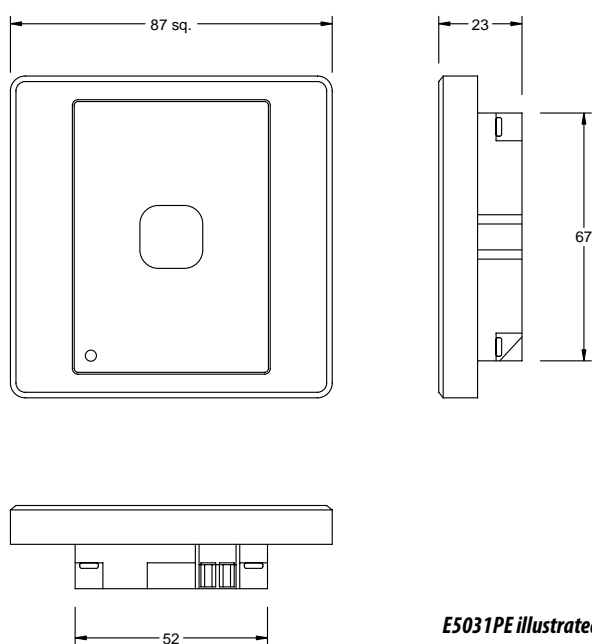

**E5031PE illustrated**

CATALOGUE NUMBER	DESCRIPTION
<b>E5031PE</b>	Light level sensor, 40-1600 lux

### IP66 Weatherproof Series

<b>*5031PEWPGY</b>	Light level sensor, IP66
--------------------	--------------------------

**\*Ask for availability**

# Clock Modules

The clock modules are surface mounted, input units used to provide basic timing functions and convenient control of C-Bus output units.

The clock modules are 7-day timers, featuring 42 program storage locations for event programming. Events may be programmed up to 6 days in advance and event durations may be up to 99 days.

The clock modules are powered from the two wire C-Bus connection, they feature a rechargeable power storage that maintains the clock for up to 24 hours, in the event of loss of the C-Bus power supply.

The clock modules also feature a daylight saving option and random check generator from 5 to 60 minutes.




E50312TC7

### TECHNICAL INFORMATION

C-Bus Supply Voltage	15-36VDC @ 18mA
Timer	7 day
Number of Channels	2
Memory Locations	42
Accuracy	2.5 sec/day @ 20°C
Timer Resolution	1 minute
Running Reserve	24 hours (without C-Bus power)
Reserve Charge Time	2 minutes
Daylight Saving Mode	Yes
Random Event Generator	5 to 60 minutes
Display	Iconic LCD display, grey scale
Maximum Number of Units on a Single C-Bus Network	100
Status Indicator	Programmable
Warm Up Time	5 seconds
C-Bus Termination	Screw terminals
Standard Colours	White
Operating Temperature	0°C to 45°C
Operating Humidity	0 - 95% RH, non condensing

### PRODUCT FEATURES

- Programmable using the C-Bus configuration software
- Programmed variables are stored in non-volatile memory and are retained in case of loss of mains or C-Bus power
- Reserve power backup in case of loss of C-Bus supply
- CE (European Community) compliant

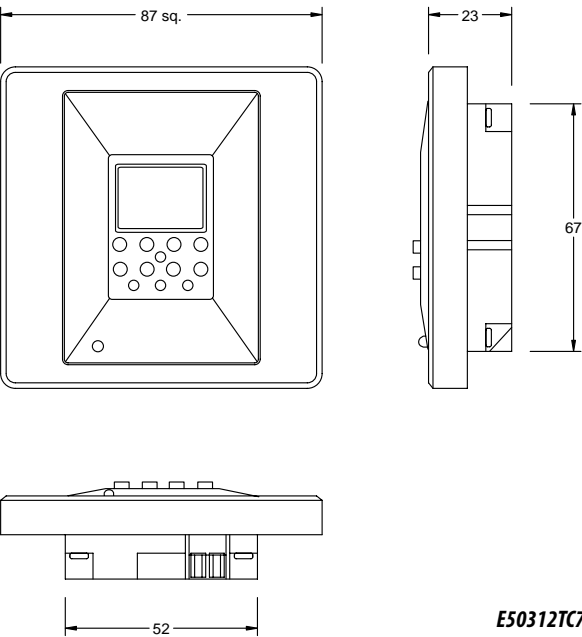

E50312TC7 illustrated

CATALOGUE NUMBER	DESCRIPTION
*E50312TC7	Clock module 7day vertical
*Ask for availability	

# Telephone Interface

The telephone interface unit provides a remote telephone interface to the C-Bus network. The dial in, dial out facility permits the user to dial in and navigate a voice prompt menu to monitor and control devices on the C-Bus network from a remote location. Control is exercised using the DTMF keypad on the phone.

The telephone interface facilitates a connection to the C-Bus network for remote programming of the units using the C-Bus Toolkit Software.

An audio output is also included so that C-Bus events can be audibly announced. The telephone interface connects to either the public switched telephone network (PSTN) or to a local PABX.

The telephone interface unit includes the facility to issue voice prompts, send commands, report status and to obtain operator responses using DTMF tones. The responses are turned into actions on a C-Bus network.

For added security, the telephone interface requires the telephone user to enter a user profile number and password to access the voice prompt menus. Upon receipt of the correct password, the unit activates a voice prompt menu and directs the user to available actions or more menus.

The telephone interface incorporates a history log, is supplied pre-loaded with a standard library of words and phrases and supports multiple languages.




**E5100TAU**

## TECHNICAL INFORMATION

Catalogue Numbers	<b>E5100TAU</b>
C-Bus Supply Voltage	<b>15 - 36VDC @ 20mA</b>
CBTI Power Supply	<b>12VDC or 15VAC, 50/60Hz power pack not included</b>
Status Indicators	<b>C-Bus, Line Grab, Serial Comms. and Internal Comms.</b>
Modes	<b>Home and Away</b>
C-Bus Connection	<b>2 x RJ45 sockets</b>
PC Interface Connection	<b>DB9 socket</b>
Telephone Connection	<b>3 x RJ12 sockets (1 incoming/2 outgoing)</b>
Audio Connection	<b>2 RCA sockets (in/out)</b>
Network Burden	<b>Software selectable</b>
System Clock	<b>Software selectable</b>
Voice Library	<b>User programmable</b>
Operating Temperature Range	<b>0° C to 45° C</b>
Operating Humidity Range	<b>0 - 95% RH, non-condensing</b>

## PRODUCT FEATURES

- Programmable using the C-Bus telephone interface configuration software
- Programmed variables are stored in non-volatile memory and are retained in case of loss of C-Bus power
- Audio out (line out) to announce messages
- Includes user profile number and password to access voice prompt menus
- Remote programming of the C-Bus devices
- Supports communication through C-Bus network bridges
- CE (European Community) compliant

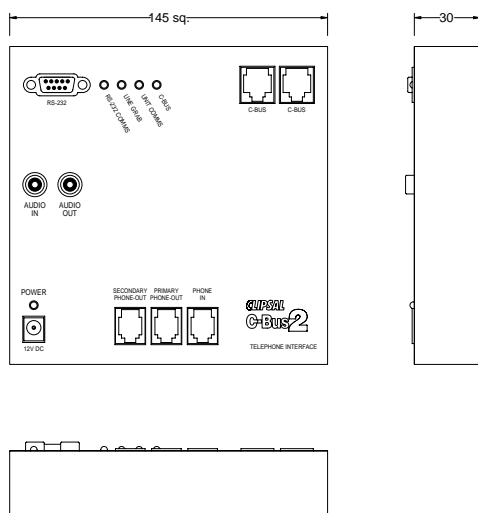

**E5100TAU illustrated**

CATALOGUE NUMBER	DESCRIPTION
<b>*E5100TAU</b>	Telephone interface module

**\*Ask for availability**

# System Units





# Ethernet Network Interface

The Ethernet network interface is a C-Bus device designed to provide an isolated communications path between an Ethernet 10 Base-T network and C-Bus network. This allows high-speed control and monitoring of a C-Bus installation via the TCP/IP protocols used in computer networks and by the Internet.

The network interface is a near instantaneous connection to a C-Bus network. It provides a gateway between high-speed, high bandwidth Ethernet communication and the robust, time tested Clipsal C-Bus control system.

In addition to programming, the network interface provides similar convenience for third party applications to issue commands to a C-Bus network and monitor the behavior of units on the network. The network interface is assigned an IP address, just like a PC on a computer network. Once an IP address is assigned it is possible for a myriad of applications, applets and third party system to send C-Bus commands to the C-Bus network remotely.






E5500CN

TECHNICAL INFORMATION

Catalogue Number	E5500CN
C-Bus Supply Voltage	15-36VDC @ 22mA
Ethernet Supply Voltage	9-12VAC/DC
Network Speed	10 Base-T
Network Protocol	TCP/IP
Status Indicators	Network and C-Bus
Network Burden	Software selectable
System Clock	Software selectable
C-Bus Termination	2 x RJ45 sockets
Ethernet Termination	1 x RJ45 socket, shielded
Power Pack	Not included
Operating Temperature Range	0° C to 45° C
Operating Humidity Range	0 - 95% RH, non-condensing

PRODUCT FEATURES

- Provides a TCP/IP interface to the C-Bus network
- Provides high-speed backbone communications path
- Permits any size C-Bus networks, overcomes restrictions of network size when Network Bridges are used
- Programmable via the C-Bus configuration software
- Programmed variables are stored in non-volatile memory and are retained in case of loss of C-Bus power
- Designed to fit standard 35mm top hat DIN rail, measures just 4M in size
- Designed to fit into standard electrical switchboards
- CE (European Community) compliant



E5500CN illustrated

CATALOGUE NUMBER	DESCRIPTION
E5500CN	Computer network interface, 10 Base-T

# PC Interface

The PC Interface is a C-Bus device designed to provide an isolated, bi-directional, interface between the PC and the C-Bus network. Through the PC Interface, C-Bus units can be programmed, commands can be issued and activity on the C-Bus network can be monitored.

Installation of the PC Interface on the C-Bus network requires connection to the Category 5 unshielded twisted pair network cable.



5500PC






5500PCU

### TECHNICAL INFORMATION

C-Bus Supply Voltage	15-36VDC @ 32mA
Status Indicators	Unit and C-Bus
Network Burden	Software selectable
System Clock	Software selectable
C-Bus Termination	2 x RJ45 sockets
Operating Temperature Range	0° C to 45° C
Operating Humidity Range	0 - 95% RH, non-condensing

### PRODUCT FEATURES

- Provides a serial interface to the C-Bus network
- C-Bus units may be configured, monitored or controlled via the serial connection
- Programmed variables are stored in non-volatile memory and are retained in case of loss of C-Bus power
- Designed to fit standard 35mm top hat DIN rail, measures just 4M in size
- Designed to fit into standard electrical switchboards
- CE (European Community) compliant



5500PC illustrated

CATALOGUE NUMBER	DESCRIPTION
5500PC	PC Interface RS232
5500PCU	PC Interface USB

# Network Bridge

The network bridge is a network support device that provides an isolated communications channel between C-Bus units on separate networks. Both sides of the network bridge are optically isolated, providing electrical isolation between adjacent networks.

Network bridges are required to manage networks to particular units in particular zones, or to extend the network past system limitations of 100 passive units and 1000 metres of C-Bus cable in any one network.






**5500NB**

## TECHNICAL INFORMATION

Catalogue Number	<b>5500NB</b>
C-Bus Supply Voltage	<b>15-36VDC @ 20mA</b>
Electrical Isolation rating (between networks)	<b>3,500V RMS (opto-isolated, 1 minute)</b>
Maximum Number of Units on a Single C-Bus Network	<b>100</b>
Status Indicators	<b>Network 1 and Network 2</b>
C-Bus Termination	<b>4 x RJ45 sockets (Network 1 and 2)</b>
Operating Temperature Range	<b>0°C to 45°C</b>
Operating Humidity Range	<b>0 - 95% RH, non-condensing</b>

## PRODUCT FEATURES

- Provides an isolated communications path between networks
- Programmable via the C-Bus configuration software
- Programmed variables are stored in non-volatile memory and are retained in case of loss of C-Bus power
- Designed to fit standard 35mm top hat DIN rail, measures just 4M in size
- Designed to fit into standard electrical switchboards
- CE (European Community) compliant



**5500NB illustrated**

CATALOGUE NUMBER	DESCRIPTION
<b>*5500NB</b>	Network bridge DIN rail

**\*Ask for availability**

# Power Supply

The power supply converts the line voltage input to 36VDC output, required for correct operation by C-Bus devices. The power supply can source up to 350mA to the network and power supplies may be added in parallel as more C-Bus devices are added to the network, under these conditions the power supplies share the load current equally.

The power supplies feature short circuit and reverse polarity protection and the line voltage is galvanically isolated from the C-Bus output side.






5500PS

TECHNICAL INFORMATION

Catalogue Numbers	5500PS
Line Supply Voltage	220-240VAC
Supply Frequency	47-53Hz
Output Voltage	32-39VDC
Output Current	350mA (maximum)
Duration of Short Circuit on Output	Indefinite
AC Isolation Mains/C-Bus	3,750V RMS
Warm-Up Time	3 seconds
Number of C-Bus Units, Supported by one Power Supply (Standard passive unit = 18mA)	19
Maximum Number of Units on a Single C-Bus Network	5
Maximum Voltage Drop measured between Power Supply and Passive C-Bus Unit for correct operation	10VDC
Status Indicators	Unit and C-Bus
C-Bus Termination	2 x RJ45 sockets
Line Termination	2 x 1.5mm <sup>2</sup> or 1 x 2.5mm <sup>2</sup>
Operating Temperature Range	0°C to 45°C
Operating Humidity Range	0 - 95% RH, non-condensing

PRODUCT FEATURES

- Delivers up to 350mA to the C-Bus network
- High efficiency switched mode power supply design
- Units may be operated in parallel on the same network
- Does not require programming on installation
- Designed to fit standard 35mm top hat DIN rail, measures just 4M in size
- Designed to fit into standard electrical switchboards
- CE (European Community) compliant



5500PS illustrated

CATALOGUE NUMBER	DESCRIPTION
5500PS	Power supply 350mA

# Network Analyser

The network analyser is a field diagnostic tool designed to measure and report the status of various network parameters.

The network analyser connects to the C-Bus network and is used to measure the network voltage, active clock and network impedance and determine if these are within acceptable limits for correct operation.


The unit displays the results by illuminating LEDs located on the unit.

*Note: The network analyser should be used in conjunction with the C-Bus Calculator software application.*



TECHNICAL INFORMATION

Catalogue Numbers	5100NA
C-Bus Supply Voltage	15-36VDC @ 20mA
Status Indicators	Power available Clock not present Excess voltage Remove burden Add burden Excess cable
C-Bus Termination	2 x Alligator clips
Operating Temperature Range	0° C to 45° C
Operating Humidity Range	0 - 95% RH, non-condensing

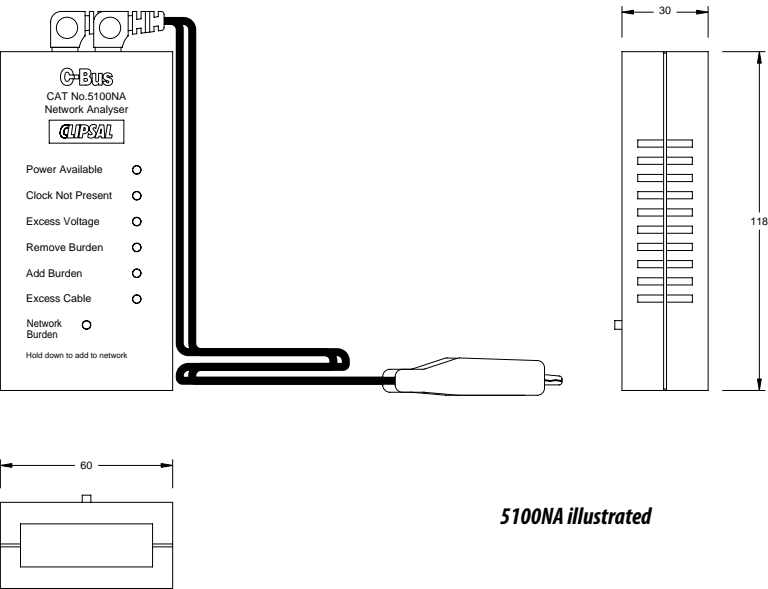

5100NA illustrated

CATALOGUE NUMBER	DESCRIPTION
*5100NA	Network analyser
*Ask for availability	

# Network Cable

The C-Bus network cable is a Category 5, unshielded twisted pair cable specifically developed for use with the C-Bus control network. The cable features a unique pink coloured outer sheath for ease of identification.

The cable is recommended for all C-Bus installations, and is mandatory for certified sites. The cable provides immunity to induced noise from external sources and superior crosstalk performance.

TECHNICAL INFORMATION


Catalogue Number	5005C305B
Data Grade Insulation	100 +/- 15 Ohms
Length	305m (boxed)
DC Resistance	<93.8 Ohms/1000m @ 20° C
Sheath	Coloured PVC (pink), type V75 C, nominal diameter 5.2mm
SRL	24.69dB at 33.11MHz
Power Sum NEXT	53.84dB at 7.59MHz
Construction	4-Pair 1/0.51 (0.2mm²), 24AWG



5005C305B

CATALOGUE NUMBER	DESCRIPTION
5005C305B	Cable, 4-Pair, UTP, Cat 5, 305m

# Network Burden



5500BURDEN illustrated



5500BURDEN

CATALOGUE NUMBER	DESCRIPTION
5500BURDEN	Network burden RJ45 (pack of 10)

# Output Units



# 8 Channel Dimmer Range

## Learn Enabled

The 8 channel dimmer units are DIN rail mounted units employing leading edge phase control circuitry for dimming control. These dimmer units feature learn mode, local and remote overrides for on/off control, channel, C-Bus and unit status indicators.

Each dimmer channel is rated at 1 Amp and is suitable for incandescent and low voltage lighting using magnetic and leading edge compatible transformers. The dimmer output is controllable over the range of 2-98%, while frequency tracking algorithms ensure flicker-free operation and smooth dimming control.

The dimmer units are available as passive and current sourcing models that source up to 200mA to the C-Bus network.

TECHNICAL INFORMATION


Catalogue Number	L5508D1A	L5508D1AP
Line Supply Voltage	220-240VAC	
Supply Frequency	47-53Hz and 57-63Hz	
Frequency Drift	3Hz/minute (maximum)	
Frequency Step Change	0.1Hz (maximum)	
C-Bus Supply Voltage	15-36VDC @ 0mA	
Load Rating per Channel	1A	
Minimum Load	15W per channel	
Control Range	2 - 98%	
Compatible Loads	Incandescent and low voltage lighting. Ensure compatible leading edge electronic transformers are used.	
C-Bus Source Current	200mA	0mA
Maximum Number of Units on a Single C-Bus Network	10	100
Status Indicators	Channel Status (8), Unit and C-Bus	
Warm Up Time	5 seconds	
Network Clock	Software selectable	
Network Burden	Software selectable	
C-Bus Termination	2 x RJ45 Socket	
Load Termination	2 x 1.5mm <sup>2</sup> or 1 x 2.5mm <sup>2</sup>	
Operating Temperature Range	0°C to 45°C	
Operating Humidity Range	0 - 95% RH, non-condensing	



L5508D1A

PRODUCT FEATURES

- Provides 8 x 1A channels of dimming control
- Programmable via the learn mode feature or using the C-Bus Toolkit Software
- Programmed variables are stored in non-volatile memory and are retained in case of loss of mains or C-Bus power
- Local and remote on/off control independent of C-Bus communications
- Programmable power up state following power cycling.
- Logic states (max/min) programmable using the C-Bus Toolkit Software
- Employs frequency-tracking algorithms for smooth flicker free operation
- Designed to fit standard 35mm top hat DIN rail, measures just 12M in size
- Designed to fit into standard electrical switchboards
- CE (European Community) compliant

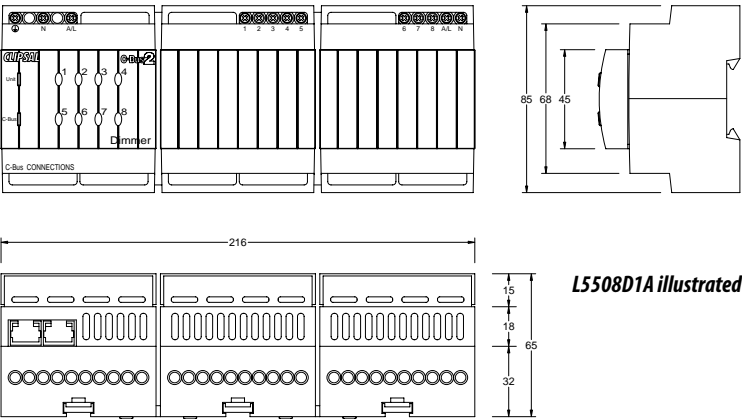

CATALOGUE NUMBER	DESCRIPTION
L5508D1AP	8 Channel dimmer 1A, 220/240VAC 50/60Hz
L5508D1A	8 Channel dimmer 1A, 220/240VAC 50/60Hz, C-Bus 200mA



# 4 Channel Dimmer Range

## Learn Enabled

The 4 channel dimmer units are DIN rail mounted units employing leading edge phase control circuitry for dimming control. These dimmer units feature learn mode, local and remote overrides for on/off control, channel, C-Bus and unit status indicators.

Each dimmer channel is rated at 2 Amps and is suitable for incandescent and low voltage lighting using magnetic and leading edge compatible transformers. The dimmer output is controllable over the range of 2-98%, while frequency tracking algorithms ensure flicker-free operation and smooth dimming control.

The dimmer units are available as passive and current sourcing models that source up to 200mA to the C-Bus network.




**L5504D2A**

### TECHNICAL INFORMATION

Catalogue Number	L5504D2A	L5504D2AP
Line Supply Voltage	220-240VAC	
Supply Frequency	47-53Hz and 57-63Hz	
Frequency Drift	3Hz/minute (maximum)	
Frequency Step Change	0.1Hz (maximum)	
C-Bus Supply Voltage	15-36VDC @ 0mA	
Load Rating per Channel	2A	
Minimum Load	15W per channel	
Control Range	2 - 98%	
Compatible Loads	<b>Incandescent and low voltage lighting. Ensure compatible leading edge electronic transformers are used.</b>	
C-Bus Source Current	200mA	0mA
Maximum Number of Units on a Single C-Bus Network	10	100
Status Indicators	Channel Status (4), Unit and C-Bus	
Warm Up Time	5 seconds	
Network Clock	Software selectable	
Network Burden	Software selectable	
C-Bus Termination	2 x RJ45 Socket	
Load Termination	2 x 1.5mm <sup>2</sup> or 1 x 2.5mm <sup>2</sup>	
Operating Temperature Range	0°C to 45°C	
Operating Humidity Range	0 - 95% RH, non-condensing	

### PRODUCT FEATURES

- Provides 4 x 2A channels of dimming control
- Programmable via the learn mode feature or using the C-Bus Toolkit Software
- Programmed variables are stored in non-volatile memory and are retained in case of loss of mains or C-Bus power
- Local and remote on/off control independent of C-Bus communications
- Programmable power up state following power cycling
- Logic states (max/min) programmable using the C-Bus Toolkit Software
- Employs frequency-tracking algorithms for smooth flicker free operation
- Designed to fit standard 35mm top hat DIN rail, measures just 12M in size
- Designed to fit into standard electrical switchboards
- CE (European Community) compliant

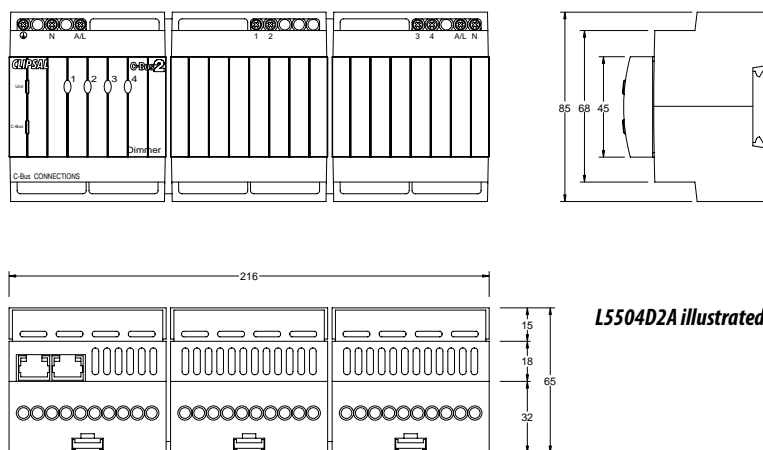

**L5504D2A illustrated**

### CATALOGUE NUMBER DESCRIPTION

<b>L5504D2AP</b>	4 Channel dimmer 2A, 220/240VAC 50/60Hz
<b>L5504D2A</b>	4 Channel dimmer 2A, 220/240VAC 50/60Hz, C-Bus 200mA

# Universal Dimmer Range

## Learn Enabled

The Universal dimmers are DIN rail mounted C-Bus dimmers with automatic load sensing. These units can be used with leading edge or trailing edge compatible low voltage electronic transformers, as well as incandescent lamps and low voltage lamps with iron-core transformers. The units feature 4 independent channels of 2.5A output per channel, and are available with and without on-board 200mA C-Bus Power Supply and provide a software selectable Network Burden and C-Bus System Clock.



### TECHNICAL INFORMATION

Catalogue number	<b>L5504D2U</b>	<b>L5504D2UP</b>
AC supply voltage	<b>220 – 240V</b>	
AC supply frequency	<b>47 – 53Hz &amp; 53 – 63Hz</b>	
Single or 3 phase supply	<b>1,2 or 3 phase</b>	<b>Single phase</b>
AC supply frequency	<b>47 – 53Hz &amp; 53 – 63Hz</b>	
Number of channels	<b>4</b>	
C-Bus learn enabled	<b>Yes</b>	
Maximum incandescent load per channel	<b>2.5A</b>	
Maximum iron core transformer load per channel	<b>2.5A</b>	
Maximum electronic transformer load per channel	<b>2.5A</b>	
Wall or DIN mounted	<b>DIN</b>	
No. of DIN modules wide	<b>12 DIN modules</b>	
Mains terminals	<b>2 x 1.5mm<sup>2</sup> or 1 x 2.5mm<sup>2</sup></b>	
Dimensions	<b>215 x 85 x 65mm</b>	
Maximum units on a network (255 networks)	<b>10</b>	<b>100</b>
C-Bus connections	<b>2 x RJ45</b>	

### PRODUCT FEATURES

- Provides 4 x 2.5A channels of dimming control.
- Programmable via the learn mode feature or using the C-Bus Toolkit software.
- Provides 4 universal phase controlled dimming channels in a 12M wide DIN rail enclosure.

CATALOGUE NUMBER	DESCRIPTION
<b>L5504D2U</b>	4 Channel 2.5A per channel dimmer, 200mA Power Supply
<b>L5504D2UP</b>	4 Channel 2.5A per channel dimmer without power

## 3 Channel Professional Dimmers

The 3 channel Professional Dimmers designed for commercial applications such as hotels, restaurants and office buildings.

The dimmers are C-Bus controlled, high power, multi phase control units, compatible with a wide range of load types, including neon. Dimming is achieved through phase control techniques creating a highly efficient range of dimmers.

The Professional Dimmers provide on-board MCB protection and thermal overload protection, and contain modular output channel cards of various ratings, allowing customisation to suit site needs.

A maintained active output is provided on each channel for emergency lighting. Each channel card has a bypass switch which permits direct local override of the lighting circuit. In the event of an over-temperature condition, such as one caused by excessive load current, the dimmer channel reduces the output power.

The Professional Dimmer is designed and tested for a wide range of international markets with comprehensive EMC and electrical safety testing and is fully ROHS compliant.



### TECHNICAL INFORMATION

Load terminal standby leakage current	<b>&lt; 10 mA leading edge</b>
AC supply voltage	<b>240/415 V AC</b>
AC supply frequency	<b>47 to 53 Hz</b>
Number of input phases	<b>1 Phase (5 Amp model)</b> <b>1 or 3 Phase (10 Amp model)</b> <b>3 Phase (other models)</b>
Minimum load/channel	<b>20 W for incandescent</b>
Compatible Loads	<b>Incandescent and low voltage lighting.</b> <b>Ensure compatible leading edge electronic transformers are used.</b>
Dimming technology	<b>Leading edge 5 Amp; Triac</b> <b>Leading edge 10-20 Amp; SCR</b>
Soft-start ramp time	<b>0.5 sec</b>
Load current rise time	<b>200 µs</b>
Power control range	<b>1.5% to 95%</b>
Standby AC supply current	<b>90 mA base current</b> <b>75 mA each LE Channel</b>
Short circuit withstand strength	<b>6 kA</b>
Rated insulation voltage	<b>500 V</b>
Dielectric test voltage	<b>2500 V</b>

### PRODUCT FEATURES

- Soft start load turn-on protects lamp filaments.
- Voltage compensation to minimise load brightness variation if the AC supply voltage drifts.
- Filtering reduces supply voltage signalling effects.
- Linear output load power following input control.
- C-Bus network burden and system clock generator.
- After mains fail, dimmers return to previous or preset values.
- Local C-Bus override switches on front panel.
- Channel Status indicators on front control panel.
- On-board MCB and optional RCD protection.
- Mounting brackets included for ease of installation.
- Generous load and mains supply terminals.
- Emergency lighting output for each channel.
- Manual dimmer bypass switch on all channels.
- Fan-free operation, reduces maintenance requirements.
- Suitable for single or three phase track lighting applications with optional three phase MCBs and RCDs
- CE (European Community) compliant

**Contact Schneider Electric on 0870 608 8 608 for more information.**

# 6 Channel Professional Dimmers

The 6 channel Professional Dimmers are designed for commercial applications such as hotels, restaurants and office buildings.

The dimmers are C-Bus controlled, high power, multi phase control units, compatible with a wide range of load types, including neon. Dimming is achieved through phase control techniques creating a highly efficient range of dimmers.

The Professional Dimmers provides on-board MCB protection and thermal overload protection, and contain modular output channel cards of various ratings, allowing customisation to suite site needs.

A maintained active output is provided on each channel for emergency lighting. Each channel card has a bypass switch which permits direct local override of the lighting circuit. In the event of an over-temperature condition, such as one caused by excessive load current, the dimmer channel reduces the output power.

The Professional Dimmer is designed and tested for a wide range of international markets with comprehensive EMC and electrical safety testing and is fully ROHS compliant.



## TECHNICAL INFORMATION

Load terminal standby leakage current	<b>&lt; 10 mA leading edge</b> <b>&lt; 1mA trailing edge</b>
AC supply voltage	<b>240/415 V AC</b>
AC supply frequency	<b>47 to 53 Hz</b>
Number of input phases	<b>1 Phase (3 Amp model)</b> <b>1 or 3 Phase (10 Amp model)</b> <b>3 Phase (other models)</b>
Minimum load/channel	<b>20 W for incandescent</b>
Compatible Loads	<b>Incandescent and low voltage lighting.</b> <b>Ensure compatible leading edge electronic transformers are used.</b>
Dimming technology	<b>Leading edge 3-5 A Triac</b> <b>Leading edge 10-20 A Dual SCR</b>
Soft-start ramp time	<b>0.5 sec</b>
Load current rise time	<b>200 µs</b>
Power control range	<b>1.5% to 95%</b>
Standby AC supply current	<b>90 mA base current</b> <b>75 mA each LE Channel</b>
Short circuit withstand strength	<b>6 kA*</b>
Rated insulation voltage	<b>500 V</b>
Dielectric test voltage	<b>2500 V</b>

\*Note for 3 A model installer must connect dimmer to mains with protection rated at 20 A per phase 6 kA short circuit withstand strength

## PRODUCT FEATURES

- Soft start load turn-on protects lamp filaments.
- Voltage compensation to minimise load brightness variation if the AC supply voltage drifts.
- Filtering reduces supply voltage signalling effects.
- Linear output load power following input control.
- C-Bus network burden and system clock generator.
- After mains fail, dimmers return to previous or preset values.
- Local C-Bus override switches on front panel.
- Channel Status indicators on front control panel.
- On-board MCB and optional RCD protection.
- Mounting brackets included for ease of installation.
- Generous load and mains supply terminals.
- Emergency lighting output for each channel.
- Manual dimmer bypass switch on all channels.
- Fan-free operation, reduces maintenance requirements.
- Suitable for single or three phase track lighting applications with optional three phase MCBs and RCDs
- CE (European Community) compliant

**Contact Schneider Electric on 0870 608 8 608 for more information.**

# 12 Channel Professional Dimmers

The 12 channel Professional Dimmers are designed for commercial applications such as hotels, restaurants and office buildings.

The dimmers are C-Bus controlled, high power, multi phase control units, compatible with a wide range of load types, including neon. Dimming is achieved through phase control techniques creating a highly efficient range of dimmers.

The Professional Dimmers provide on-board MCB protection and thermal load protection, and contain modular output channel cards of various ratings, allowing customisation to suite site needs.

A maintained active output is provided on each channel for emergency lighting. Each channel card has a bypass switch which permits direct local override of the lighting circuit. In the event of an over-temperature condition, such as one caused by excessive load, the dimmer channel reduces the output power.

The Professional Dimmer is designed and tested for a wide range of international markets with comprehensive EMC and electrical safety testing and is fully ROHS compliant.



## TECHNICAL INFORMATION

Load terminal standby leakage current	<b>&lt; 10 mA leading edge</b>
AC supply voltage	<b>240/415 V AC</b>
AC supply frequency	<b>47 to 53 Hz</b>
Number of input phases	<b>3 Phase</b>
	<b>1 or 2 Phase (3 Amp model)</b>
Minimum load/channel	<b>20 W for incandescent</b>
Compatible Loads	<b>Incandescent and low voltage lighting. Ensure compatible leading edge electronic transformers are used.</b>
Dimming technology	<b>Leading Edge 3-5A Triac</b>
	<b>Leading Edge 10-20A Dual SCR</b>
Soft-start ramp time	<b>0.5 sec</b>
Load current rise time	<b>200 µs</b>
Power control range	<b>1.5% to 95%</b>
Standby AC supply current	<b>90 mA base current</b>
	<b>75 mA each LE Channel</b>
Short circuit withstand strength	<b>6 kA</b>
Rated insulation voltage	<b>500 V</b>
Dielectric test voltage	<b>2500 V</b>

\*Note for 3A model installer must connect dimmer to mains with protection rated at 20A per phase 6kA short circuit withstand strength

## PRODUCT FEATURES

- Soft start load turn-on protects lamp filaments.
- Voltage compensation to minimise load brightness variation if the AC supply voltage drifts.
- Mounting brackets included for ease of installation.
- Suitable for single or three phase track lighting applications with optional 3 phase MCB's and RCD's
- Filtering to reduce supply voltage signalling effects.
- After mains fail, dimmer returns to previous or preset values.
- Linear output load power following input control.
- C-Bus network burden and network clock generator.
- Emergency lighting output for each channel.
- On-board MCB and/or RCD protection.
- Fan free operation, reduces maintenance requirements.
- Manual dimmer bypass switch on all channels.
- Local C-Bus override switches on front panel.
- Generous mains supply terminals and load terminals.
- Channel Status indicators on front control panel.
- CE (European Community) compliant

**Contact Schneider Electric on 0870 608 8 608 for more information.**

# Single and Two Channel Relay Range

## Non Learn Mode

The 1 and 2 channel relay units are panel mounted units suitable for switching resistive, inductive and fluorescent loads. The units are ideally suited for mounting inside fluorescent lighting products, street lighting columns and adjacent HID luminaires due to their small size and volume.

These relay units feature a remote override for on/off control and a C-Bus status indicator.


Load control is provided by a special dual contact relay designed for extreme long life with lighting loads, even with power factor corrected fluorescent lamps. One contact is tungsten designed to withstand high in-rush currents and arcing when opening and the other contact is silver alloy for steady state current operation.

The single channel relay also features a 0-10V output, and is compatible with dimmable electronic ballasts, hence the relay may be used to switch line voltage to the ballast as well as dim the output using the 0-10V output.

The relay units are available as passive models only, hence do not source current to the C-Bus network.

### TECHNICAL INFORMATION

Catalogue Number	5101R	5102RVF
Line Supply Voltage	220-240VAC	
Supply Frequency	47-53Hz and 57-63Hz	
C-Bus Supply Voltage	15-36VDC @ 0mA	
Load Rating per Channel	10A AC3	
Contact Type	Switched active	Voltage free, normally open, non latched
Switch Operations	Greater than 60,000 operations	
In-Rush Current	120A (20msec)	
Compatible Loads	Resistive, inductive, incandescent and fluorescent	
Analog Output	0 - 10VDC, compatible with up to 2 x 36W immable electronic ballasts	-
C-Bus Source Current	0mA	
Maximum Number of Units on a Single C-Bus Network	100	
Status Indicators	C-Bus power available	
C-Bus Termination	Screw terminals	
Load Termination	Push connectors, 1 x 2.5mm <sup>2</sup>	
Operating Temperature Range	0°C to 45°C	
Operating Humidity Range	0 - 95% RH, non-condensing	

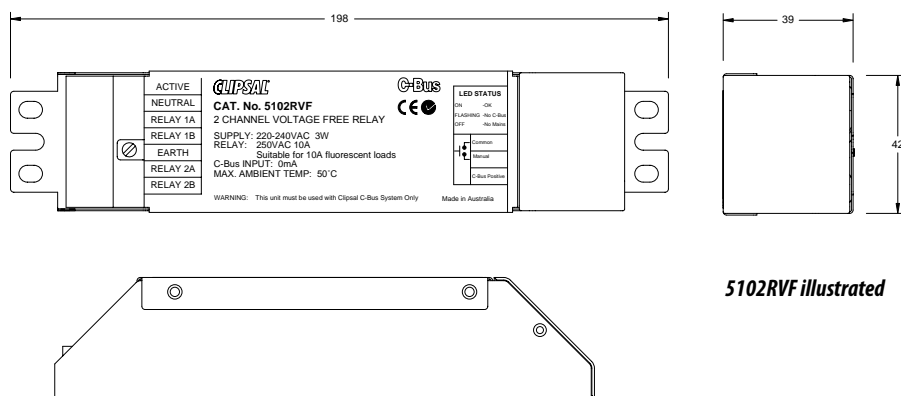

5102RVF illustrated



### PRODUCT FEATURES

- Programmable via the C-Bus Toolkit Software
- Programmed variables are stored in non-volatile memory and are retained in case of loss of mains or C-Bus power
- Remote on/off control independent of C-Bus communications
- Programmable power up state following power cycling
- Logic states (and/or) programmable using the C-Bus Toolkit Software
- Panel mounted, small size and volume
- CE (European Community) compliant

CATALOGUE NUMBER	DESCRIPTION
*5101R	1 Channel relay, 10A, Non Learn Enabled, non DIN
*5102RVF	2 Channel relay, 10A, Non Learn Enabled, non DIN

\*Ask for availability

# 4 Channel 10A Relay Range

## Learn Enabled

The 4 channel relay units are DIN rail mounted units suitable for switching resistive, inductive and fluorescent loads.

These relay units feature learn mode, local and remote overrides for on/off control, Channel, C-Bus and unit status indicators.

Load control is provided by a special dual contact relay designed for extreme long life with lighting loads, even with power factor corrected fluorescent lamps. One contact is tungsten designed to withstand high inrush currents and arcing when opening and the other contact is silver alloy for steady state current operation.

The relay units are available as passive and current sourcing models that source up to 200mA to the C-Bus network.






L5504RVF

TECHNICAL INFORMATION

Catalogue Number	<b>L5504RVF</b>   <b>L5504RVFP</b>	
Line Supply Voltage	<b>220-240VA</b>	
Supply Frequency	<b>47-53Hz and 57-63Hz</b>	
C-Bus Supply Voltage	<b>15-36VDC @ 0mA</b>	
Load Rating per Channel	<b>10A</b>	
Contact Type	<b>Voltage free, normally open, magnetically latched</b>	
Switch Operations	<b>Greater than 60,000 operations</b>	
In-Rush Current	<b>120A (20msec)</b>	
Compatible Loads	<b>Resistive, inductive, incandescent and fluorescent</b>	
C-Bus Source Current	<b>200mA</b>	<b>0mA</b>
Maximum Number of Units on a Single C-Bus Network	<b>10</b>	<b>100</b>
Status Indicators	<b>Channel Status (4), Unit and C-Bus</b>	
Network Clock	<b>Software selectable</b>	
Network Burden	<b>Software selectable</b>	
C-Bus Termination	<b>2 x RJ45 Socket</b>	
Load Termination	<b>2 x 1.5mm<sup>2</sup> or 1 x 2.5mm<sup>2</sup></b>	
Operating Temperature Range	<b>0°C to 45°C</b>	
Operating Humidity Range	<b>0 - 95% RH, non-condensing</b>	

PRODUCT FEATURES

- Provides 4 x 10A channels of switching output
- Programmable via the learn mode feature or using the C-Bus Toolkit Software
- Programmed variables are stored in non-volatile memory and are retained in case of loss of mains or C-Bus power
- Local and remote on/off control independent of C-Bus communications
- Programmable power up state following power cycling
- Logic states (and/or) programmable using the C-Bus Toolkit Software
- Features magnetically latched relays that hold state in case of loss of C-Bus communications
- Designed to fit standard 35mm top hat DIN rail, measures just 8M in size
- Designed to fit into standard electrical switchboards
- CE (European Community) compliant

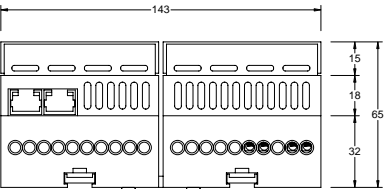

L5504RVF illustrated

CATALOGUE NUMBER	DESCRIPTION
<b>L5504RVFP</b>	4 Channel relay 10A, 220/240VAC 50/60Hz
<b>L5504RVF</b>	4 Channel relay 10A, 220/240VAC 50/60Hz, C-Bus 200mA



# 8 Channel 10A Relay Range

## Learn Enabled

The 8 channel relay units are DIN rail mounted units suitable for switching resistive, inductive and fluorescent loads.

These relay units feature learn mode, local and remote overrides for on/off control, channel, C-Bus and unit status indicators.

Load control is provided by a special dual contact relay designed for extreme long life with lighting loads, even with power factor corrected fluorescent lamps. One contact is tungsten designed to withstand high in-rush currents and arcing when opening and the other contact is silver alloy for steady state current operation.

The relay units are available as passive and current sourcing models that source up to 200mA to the C-Bus network.




**L5508RVF**

### TECHNICAL INFORMATION

Catalogue Number	L5508RVF	L5508RVFP
Line Supply Voltage	220-240VAC	
Supply Frequency	47-53Hz and 57-63Hz	
C-Bus Supply Voltage	15-36VDC @ 0mA	
Load Rating per Channel	10A	
Contact Type	Voltage free, normally open, magnetically latched	
Switch Operations	Greater than 60,000 operations	
In-Rush Current	120A (20msec)	
Compatible Loads	Resistive, inductive, incandescent and fluorescent	
C-Bus Source Current		200mA 0mA
Maximum Number of Units on a Single C-Bus Network	10	100
Status Indicators	Channel Status (8), Unit and C-Bus	
Network Clock	Software selectable	
Network Burden	Software selectable	
C-Bus Termination	2 x RJ45 Socket	
Load Termination	2 x 1.5mm <sup>2</sup> or 1 x 2.5mm <sup>2</sup>	
Operating Temperature Range	0°C to 45°C	
Operating Humidity Range	0 - 95% RH, non-condensing	

### PRODUCT FEATURES

- Provides 8 x 10A channels of switching output
- Programmable via the learn mode feature or using the C-Bus Toolkit Software
- Programmed variables are stored in non-volatile memory and are retained in case of loss of mains or C-Bus power
- Local and remote on/off control independent of C-Bus communications
- Programmable power up state following power cycling
- Logic states (and/or) programmable using the C-Bus Toolkit Software
- Features magnetically latched relays that hold state in case of loss of C-Bus communications
- Designed to fit standard 35mm top hat DIN rail, measures just 12M in size
- Designed to fit into standard electrical switchboards
- CE (European Community) compliant

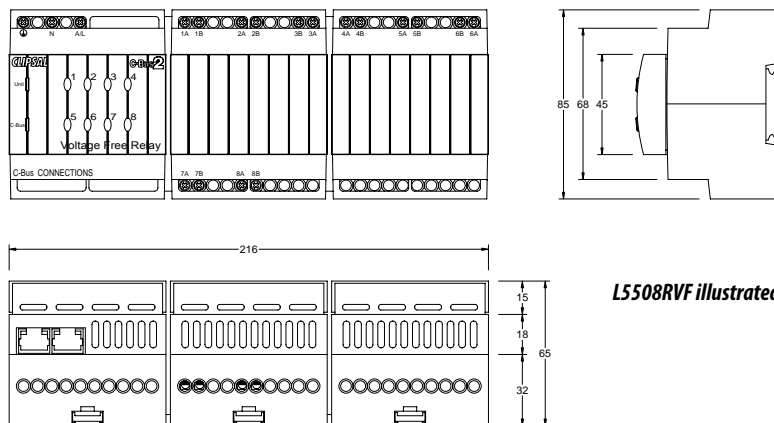

**L5508RVF illustrated**

### CATALOGUE NUMBER DESCRIPTION

<b>L5508RVFP</b>	8 Channel relay 10A, 220/240VAC 50/60Hz
<b>L5508RVF</b>	8 Channel relay 10A, 220/240VAC 50/60Hz, C-Bus 200mA



# 12 Channel 10A Relay Range

## Learn Enabled

The 12 channel relay units are DIN rail mounted units suitable for switching resistive, inductive and fluorescent loads.

These relay units feature learn mode, local and remote overrides for on/off control, Channel, C-Bus and unit status indicators.

Load control is provided by a special dual contact relay designed for extreme long life with lighting loads, even with power factor corrected fluorescent lamps. One contact is tungsten designed to withstand high in-rush currents and arcing when opening and the other contact is silver alloy for steady state current operation.

The relay units are available as passive and current sourcing models that source up to 200mA to the C-Bus network.





L5512RVF

TECHNICAL INFORMATION

Catalogue Number	L5512RVF L5512RVFP	
Line Supply Voltage	220-240VAC	
Supply Frequency	47-53Hz and 57-63Hz	
C-Bus Supply Voltage	15-36VDC @ 0mA	
Load Rating per Channel	10A	
Contact Type	Voltage free, normally open, magnetically latched	
Switch Operations	Greater than 60,000 operations	
In-Rush Current	120A (20msec)	
Compatible Loads	Resistive, inductive, incandescent and fluorescent	
C-Bus Source Current	200mA	0mA
Maximum Number of Units on a Single C-Bus Network	10	100
Status Indicators	Channel Status (12), Unit and C-Bus	
Network Clock	Software selectable	
Network Burden	Software selectable	
C-Bus Termination	2 x RJ45 Socket	
Load Termination	2 x 1.5mm <sup>2</sup> or 1 x 2.5mm <sup>2</sup>	
Operating Temperature Range	0° C to 45° C	
Operating Humidity Range	0 - 95% RH, non-condensing	

PRODUCT FEATURES

- Provides 12 x 10A channels of switching output
- Programmable via the learn mode feature or using the C-Bus Toolkit Software
- Programmed variables are stored in non-volatile memory and are retained in case of loss of mains or C-Bus power
- Local and remote on/off control independent of C-Bus communications
- Programmable power up state following power cycling.
- Logic states (and/or) programmable using the C-Bus Toolkit Software
- Features magnetically latched relays that hold state in case of loss of C-Bus communications
- Designed to fit standard 35mm top hat DIN rail, measures just 12M in size
- Designed to fit into standard electrical switchboards
- CE (European Community) compliant

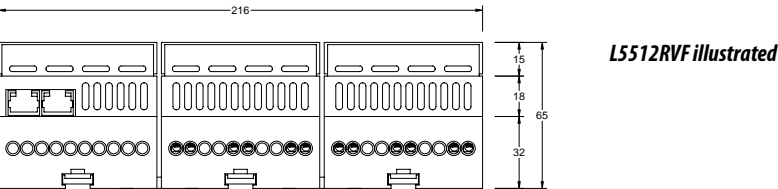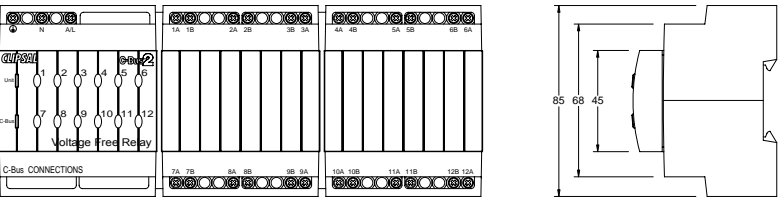

CATALOGUE NUMBER	DESCRIPTION
L5512RVFP	12 Channel relay 10A, 220/240VAC 50/60Hz
L5512RVF	12 Channel relay 10A, 220/240VAC 50/60Hz, C-Bus 200mA

# 4 Channel 20A Relay Range

## Learn Enabled

The 4 channel relay units are DIN rail mounted units suitable for switching resistive, inductive and fluorescent loads.

These relay units feature learn mode, local and remote overrides for on/off control, Channel, C-Bus and unit status indicators.

Load control is provided by a special mechanically latched relay, with local mechanical override on the unit, independent of the C-Bus communications. Each relay is rated at 20A, and is compatible with resistive, inductive, incandescent and fluorescent load types.

The relay units are available as passive and current sourcing models that source up to 200mA to the C-Bus network.






LS504RVF20

### TECHNICAL INFORMATION

Catalogue Number	<b>L5504RVF20</b>	<b>L5504RVF20P</b>
Line Supply Voltage	<b>220-240VAC</b>	
Supply Frequency	<b>47-53Hz and 57-63Hz</b>	
C-Bus Supply Voltage	<b>15-36VDC @ 0mA</b>	
Load Rating per Channel	<b>20A</b>	
Contact Type	<b>Voltage free, normally open, magnetically latched</b>	
Switch Operations	<b>Greater than 60,000 operations</b>	
In-Rush Current	<b>120A (20msec)</b>	
Compatible Loads	<b>Resistive, inductive, incandescent and fluorescent</b>	
C-Bus Source Current	<b>200mA</b>	<b>0mA</b>
Maximum Number of Units on a Single C-Bus Network	<b>10</b>	<b>100</b>
Status Indicators	<b>Channel Status (4), Unit and C-Bus</b>	
Network Clock	<b>Software selectable</b>	
Network Burden	<b>Software selectable</b>	
C-Bus Termination	<b>2 x RJ45 Socket</b>	
Load Termination	<b>2 x 1.5mm<sup>2</sup> or 1 x 2.5mm<sup>2</sup></b>	
Operating Temperature Range	<b>0°C to 45°C</b>	
Operating Humidity Range	<b>0 - 95% RH, non-condensing</b>	

### PRODUCT FEATURES

- Provides 4 x 20A channels of switching output
- Programmable via the learn mode feature or using the C-Bus Toolkit Software
- Programmed variables are stored in non-volatile memory and are retained in case of loss of mains or C-Bus power
- Local and remote on/off control independent of C-Bus communications
- Mechanical override independent of C-Bus communications
- Programmable power up state following power cycling
- Logic states (and/or) programmable using the C-Bus Toolkit Software
- Features mechanically latched relays that hold state in case of loss of C-Bus communications
- Designed to fit standard 35mm top hat DIN rail, measures just 12M in size
- Designed to fit into standard electrical switchboards
- CE (European Community) compliant

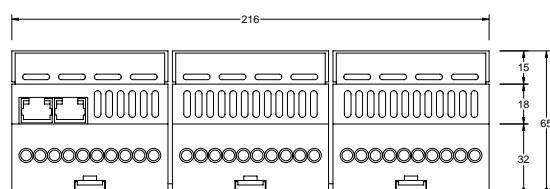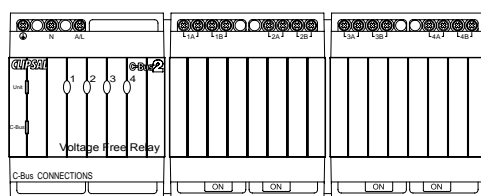

LS504RVF20 illustrated

### CATALOGUE NUMBER DESCRIPTION

<b>*LS504RVF20P</b>	4 Channel relay 20A, 220/240VAC 50/60Hz
<b>*LS504RVF20</b>	4 Channel relay 20A, 220/240VAC 50/60Hz, C-Bus 200mA

**\*Ask for availability**

# 4 Channel Relay Driver Range

## Non Learn Mode

The 4 channel relay units are DIN rail mounted units designed to control up to four channels of external latching relay loads. The relay driver is used in conjunction with the relay modules type 5000RL20 (single channel 20A) and 5002RL20 (dual channel 20A).

These relay driver units feature a remote override for on/off control, C-Bus and unit status indicators. These units are low cost and do not feature learn mode or local override control.

The relay units are available as passive models only, and do not source current to the C-Bus network.






TECHNICAL INFORMATION

Catalogue Number	5504RDP
Line Supply Voltage	220-240VAC
Supply Frequency	47-53Hz and 57-63Hz
C-Bus Supply Voltage	15-36VDC @ 0mA
Driver Circuit	Use only with 5000RL20 or 5002RL20
C-Bus Source Current	0mA
Maximum Number of Units on a Single C-Bus Network	100
Status Indicators	Unit and C-Bus
Network Clock	Software selectable
Network Burden	Software selectable
C-Bus Termination	2 x RJ45 Socket
Load Termination	2 x 1.5mm <sup>2</sup> or 1 x 2.5mm <sup>2</sup>
Operating Temperature Range	0° C to 45° C
Operating Humidity Range	0 - 95% RH, non-condensing

PRODUCT FEATURES

- Capable of controlling up to four channels of external latching relay loads
- Programmable via the C-Bus Toolkit Software
- Programmed variables are stored in non-volatile memory and are retained in case of loss of mains or C-Bus power
- Remote on/off control independent of C-Bus communications
- Programmable power up state following power cycling
- Logic states (and/or) programmable using the C-Bus Toolkit Software
- Designed to fit standard 35mm top hat DIN rail, measures just 8M in size
- Designed to fit into standard electrical switchboards
- CE (European Community) compliant

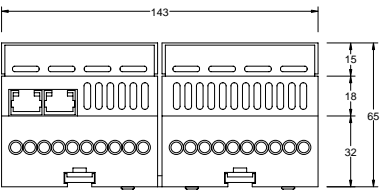

5504RDP illustrated

CATALOGUE NUMBER	DESCRIPTION
*5504RDP	4 Channel relay Driver
*Ask for availability	

# 4 Channel Relay Driver Range

## Learn Enabled

The DIN Driver is a 8M DIN rail mounted product designed to operate in conjunction with the relay units, 5000RL20 and 5002RL20. The relay driver is a C-Bus device, learn enabled which supplies control signal (pulse output) to drive the external relay.

The advantages of the relay driver are, the external relay may be remotely mounted, and if a relay unit fails it may be replaced without the need to replace the relay drivers.

The relay driver features local overrides so the state of the external relay may be toggled from the unit.






L5504RDP

TECHNICAL INFORMATION

Catalogue Number	L5504RDP
Line Voltage	220-240VAC
C-Bus Source Current	0mA
Maximum Number of Units on a Single C-Bus Network	100

PRODUCT FEATURES

- Units available both with and without a 200mA C-Bus power supply on-board
- Configured via either the C-Bus Installation Software or via the Learn Enabled Features
- Local on/off toggle buttons allow individual channels to be manually overridden at each unit
- Remote on and off facilities permit all channels to be turned on or off without C-Bus network communication
- Incorporates C-Bus Network Status, Mains Power Status, and Load Status indicators
- Capable of generating a C-Bus clock signal if enabled
- CE (European Community) compliant
- Designed to fit standard 35mm top hat DIN rail, measures just 8M in size

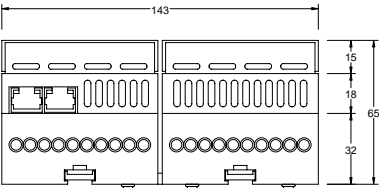

L5504RDP illustrated

CATALOGUE NUMBER	DESCRIPTION
*L5504RDP	4 Channel relay Driver, C-Bus 200mA
*Ask for availability	

# Single Relay Module

The single channel relay, is a heavy duty, mechanically latched, DIN rail mounted relay and is rated at 20 Amps continuous use. The relay can withstand high in-rush currents and is suitable for incandescent, high intensity discharge lamps and fluorescent loads.

The relay module features a set of auxiliary contacts (normally open) and mechanical on/off control for manual operation.


The single channel relay must be used in conjunction with the 5504RDP or L5504RDP relay driver products.



5000RL20

TECHNICAL INFORMATION

Catalogue Number	5000RL20
Line Supply Voltage	220-240VAC
Supply Frequency	47-53Hz and 57-63Hz
Load Rating per Channel	20A AC3
Contact Type	Voltage free, normally open, mechanically latched
Switch Operations	Greater than 30,000 operations
Auxiliary Contacts	Normally open
In-Rush Current	300A (80msec)
Compatible Loads	Resistive, inductive, incandescent and fluorescent
Load Termination	2 x 1.5mm <sup>2</sup> or 1 x 2.5mm <sup>2</sup>
Dimensions	1.5M (M = 17.5mm)
Operating Temperature Range	0° C to 45° C
Operating Humidity Range	0 - 95% RH, non-condensing
Compliances	RCM, CE

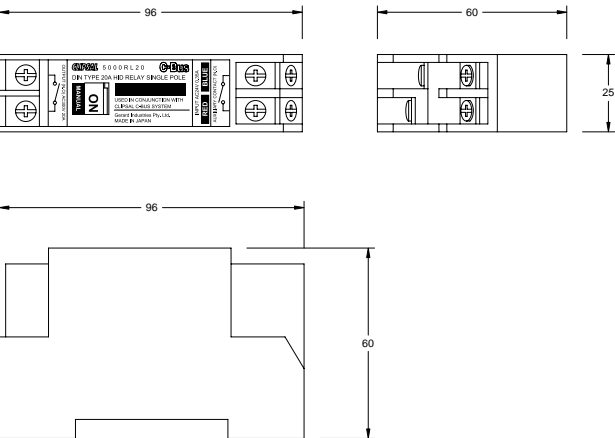

5000RL20 illustrated

CATALOGUE NUMBER	DESCRIPTION
*5000RL20	Single relay, 20A (High In-Rush Current)
*Ask for availability	

# Dual Relay Module

The dual channel relay, is a heavy duty, mechanically latched, DIN rail mounted relay and is rated at 20 Amps continuous use. The relay can withstand high in-rush currents and is suitable for incandescent, high intensity discharge lamps and fluorescent loads.

The relay module features mechanical on/off control for manual operation.


The dual channel relay must be used in conjunction with the 5504RDP or L5504RDP relay driver products.



5002RL20

TECHNICAL INFORMATION

Catalogue Number	5002RL20
Line Supply Voltage	220-240VAC
Supply Frequency	47-53Hz and 57-63Hz
Load Rating per Channel	20A AC3
Contact Type	Voltage free, normally open, mechanically latched
Switch Operations	Greater than 60,000 operations
In-Rush Current	120A (20msec)
Compatible Loads	Resistive, inductive, incandescent and fluorescent
Load Termination	2 x 1.5mm <sup>2</sup> or 1 x 2.5mm <sup>2</sup>
Dimensions	4M (M = 17.5mm)
Operating Temperature Range	0° C to 45° C
Operating Humidity Range	0 - 95% RH, non-condensing
Compliance	RCM, CE

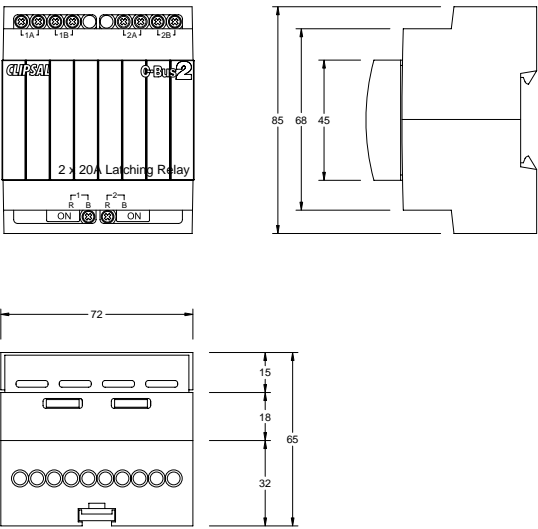

5002RL20 illustrated

CATALOGUE NUMBER	DESCRIPTION
*5002RL20	Dual relay, 20A
*Ask for availability	

# 4 Channel Changeover Relay Range

## Learn Enabled

The 4 channel changeover relay units are DIN rail mounted units suitable for switching resistive, inductive and fluorescent loads.

These relay units feature learn mode, local and remote overrides for on/off control, Channel, C-Bus and unit status indicators.

Load control is provided by non-latched, changeover relays that feature both normally open (N.O.) and normally closed (N.C.) contacts. The changeover relays can be interlocked and have applications in curtain and blind controls (up/down) or 3 speed air-conditioning controls (on/off, low, medium and high).

The relay units are available as passive and current sourcing models that source up to 200mA to the C-Bus network.






**L5504RVFC**

### TECHNICAL INFORMATION

Catalogue Number	L5504RVFC	L5504RVFCP
Line Supply Voltage	220-240VAC	
Supply Frequency	47-53Hz and 57-63Hz	
C-Bus Supply Voltage	15-36VDC @ 0mA	
Load Rating per Channel	10A resistive, 5A inductive and incandescent, 1A fluorescent	
Contact Type	Voltage free, normally open, magnetically latched	
Switch Operations	Greater than 60,000 operations	
Compatible Loads	Resistive, inductive, incandescent and fluorescent	
C-Bus Source Current	200mA	0mA
Maximum Number of Units on a Single C-Bus Network	10	100
Status Indicators	Channel Status (4), Unit and C-Bus	
Warm Up Time	5 seconds	
Network Clock	Software selectable	
Network Burden	Software selectable	
C-Bus Termination	2 x RJ45 Socket	
Load Termination	2 x 1.5mm <sup>2</sup> or 1 x 2.5mm <sup>2</sup>	
Operating Temperature Range	0°C to 45°C	
Operating Humidity Range	0 - 95% RH, non-condensing	

### PRODUCT FEATURES

- Provides 4 channels of changeover, non-latched relay outputs
- Programmable via the learn mode feature or using the C-Bus Toolkit Software
- Programmed variables are stored in non-volatile memory and are retained in case of loss of mains or C-Bus power
- Local and remote on/off control, independent of C-Bus communications
- Programmable power up state following power cycling
- Logic states (and/or) programmable using the C-Bus Toolkit Software
- Relays may be interlocked for curtain, blinds and 3 speed air-conditioning controls
- Designed to fit standard 35mm top hat DIN rail, measures just 8M in size
- Designed to fit into standard electrical switchboards
- CE (European Community) compliant

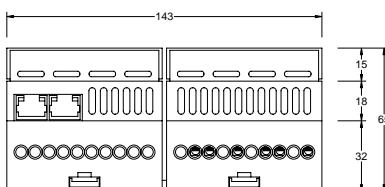

**L5504RVFC illustrated**

### CATALOGUE NUMBER DESCRIPTION

*L5504RVFCP	4 Channel changeover, relay 220/240VAC 50/60Hz
*L5504RVFC	4 Channel changeover, relay 220/240VAC 50/60Hz, C-Bus 200mA

\*Ask for availability

# 4 Channel Analogue Output Range Learn Enabled

The 4 channel analogue output units are DIN rail mounted units designed to control 0 - 10V and 1 - 10V compatible dimmable electronic ballasts used in the lighting industry.

These analogue output units feature learn mode, local and remote overrides for on/off control, Channel, C-Bus and unit status indicators.

Each channel is capable of sourcing or sinking current and the number of ballasts that may be connected to the analogue output unit is a function of the current drain of that particular ballast.

The analogue control signal typically regulates lighting output over the range of 3 - 100%. The dimming transitions are smooth and flicker free.

The analogue output units are available as passive models only, hence do not source current to the C-Bus network.






**L5504AMP**

## TECHNICAL INFORMATION

Catalogue Number	<b>L5504AMP</b>
Line Supply Voltage	<b>220-240VAC</b>
Supply Frequency	<b>47-53Hz and 57-63Hz</b>
C-Bus Supply Voltage	<b>15-36VDC @ 0mA</b>
Output Control Range	<b>0-10VDC</b>
Control Range	<b>3 - 100%</b>
Source Current	<b>2.5mA</b>
Sink Current	<b>15mA at Vout = 0V, 8.0mA at Vout = 10V i.e. I = 15 - (0.7 Vout) mA</b>
Maximum Number of Units on Single C-Bus Network	<b>100</b>
Status Indicators	<b>Channel Status (4), Unit and C-Bus</b>
Warm Up Time	<b>5 seconds</b>
Network Clock	<b>Software selectable</b>
Network Burden	<b>Software selectable</b>
C-Bus Termination	<b>2 x RJ45 Socket</b>
Load Termination	<b>2 x 1.5mm<sup>2</sup> or 1 x 2.5mm<sup>2</sup></b>
Operating Temperature Range	<b>0°C to 45°C</b>
Operating Humidity Range	<b>0 - 95% RH, non-condensing</b>

## PRODUCT FEATURES

- Provides 4 channels of 0 - 10V dimming control
- Programmable via the learn mode feature or using the C-Bus Toolkit Software
- Programmed variables are stored in non-volatile memory and are retained in case of loss of mains or C-Bus power
- Local and remote on/off control independent of C-Bus communications
- Programmable power up state following power cycling
- Logic states (max/min) programmable using the C-Bus Toolkit Software
- Designed to fit standard 35mm top hat DIN rail, measures just 8M in size
- Designed to fit into standard electrical switchboards
- CE (European Community) compliant



**L5504AMP illustrated**

## CATALOGUE NUMBER DESCRIPTION

**\*L5504AMP** 4 Channel Analogue Output, 0-10V, 220/240VAC 50/60Hz

**\*Ask for availability**



# Blind Control Relay

The Blind Control Relay units are designed to directly drive the motors for soft furnishing components like motorised blinds, curtains, shutters and awnings. The relay unit can be easily installed in the switchboard or in the field in the optional din-rail mount enclosure.

Designed with the installer in mind, this unit provides a easy to install module with features required to make direct motor control safe and simple.



**L5501RBCP**

## TECHNICAL INFORMATION

Catalogue Number	<b>L5501RBCP</b>
C-Bus Supply Voltage	<b>15-36V DC @ 22mA required for normal operation. Does not provide current to the C-Bus Network</b>
AC Input Impedance	<b>80kΩ @ 1kHz</b>
Electrical Isolation	<b>3.75kV RMS from C-Bus to mains</b>
Max. Units per Network	<b>80</b>
Load Current Rating	<b>2A (motor load)</b>
Load Voltage Rating	<b>24V DC, 24-240V AC</b>
Warm Up Time	<b>5 seconds</b>
Network Clock Software	<b>Selectable</b>
Network Burden Software	<b>Selectable</b>
Class of Switch	<b>Class II</b>
Rated Impulse Withstand Voltage	<b>4 kV</b>
Operating Temperature	<b>0° to 45° C</b>
Operating Humidity	<b>10 to 95% RH</b>
Dimensions (W x H x D)	<b>36 x 93 x 63mm</b>
Weight	<b>250g</b>
Mains terminals	<b>Accommodates 2 x 1.5mm<sup>2</sup> or 1 x 2.5mm<sup>2</sup> (2 x 15AWG or 1 x 13AWG)</b>
Catalogue Number	<b>5501RE</b>
Dimensions (W x H x D)	<b>159 x 75 x 47mm</b>
Mounting Centres	<b>84mm</b>
Weight	<b>116g</b>

## PRODUCT FEATURES

- Internally electrically interlocked directional contacts
- One, two or three button control from C-Bus switchplates or touchscreens
- Programmable time delays (0.5 – 4.0 seconds) between motor direction change
- Din-rail mounting or optional enclosure for field installation of unit
- Local manual override buttons to assist with setting end-limits.



**L5501RBCP illustrated**



**5501RE illustrated**

CATALOGUE NUMBER	DESCRIPTION
<b>*L5501RBCP</b>	Blind Control Relay
<b>*5501RE</b>	Enclosure for Blind Control Relay
<b>*Ask for availability</b>	

# 8 Channel DSI Gateway Range

## Learn Enabled

The 8 channel DSI gateway units are DIN rail mounted units designed to control Atco-Tridonic brand dimmable electronic ballasts featuring the digital serial interface. These DSI units feature learn mode, local and remote overrides for on/off control, channel, C-Bus and unit status indicators.

Each DSI channel can drive up to 100 DSI ballasts allowing a total of 800 DSI ballasts to be connected to a single C-Bus/DSI gateway module.

The DSI gateway is capable of detecting faulty lamps connected to its terminals and issuing a message onto the C-Bus network. These messages can be read by C-Gate server application, when integrated as part of an overall building management system, lamp status may be reported to a central location.

The DSI units are available as passive and current sourcing models that source up to 200mA to the C-Bus network.





**L5508DSI**

### TECHNICAL INFORMATION

Catalogue Number	L5508DSI	L5508DSIP
Line Supply Voltage	<b>220-240VAC</b>	
Supply Frequency	<b>47-53Hz and 57-63Hz</b>	
C-Bus Supply Voltage	<b>15-36VDC @ 0mA</b>	
Load Rating per Channel	<b>200mA (100 ballasts)</b>	
Minimum Load	<b>15W per channel</b>	
Control Range	<b>0 - 100%</b>	
Compatible Loads	<b>Tridonic DSI dimmable ballasts or equivalent</b>	
Channel Output Voltage	<b>0.0 - 0.8V (low) to 11.0 - 13.0V (high)</b>	
C-Bus Source Current	<b>200mA</b>	<b>0mA</b>
Maximum Number of Units on a Single C-Bus Network	<b>10</b>	<b>100</b>
Status Indicators	<b>Channel Status (8), Unit and C-Bus</b>	
Warm Up Time	<b>5 seconds</b>	
Network Clock	<b>Software selectable</b>	
Network Burden	<b>Software selectable</b>	
C-Bus Termination	<b>2 x RJ45 Socket</b>	
Load Termination	<b>2 x 1.5mm<sup>2</sup> or 1 x 2.5mm<sup>2</sup></b>	
Operating Temperature Range	<b>0°C to 45°C</b>	
Operating Humidity Range	<b>0 - 95% RH, non-condensing</b>	

### PRODUCT FEATURES

- Provides 8 channels of DSI dimming control
- Programmable via the learn mode feature or using the C-Bus Toolkit software
- Programmed variables are stored in non-volatile memory and are retained in case of loss of mains or C-Bus power
- Local and remote on/off control independent of C-Bus communications
- Programmable power up state following power cycling
- Logic states (max/min) programmable using the C-Bus Toolkit Software
- Monitors and reports lamp state
- Designed to fit standard 35mm top hat DIN rail, measures just 8M in size
- Designed to fit into standard electrical switchboards
- CE (European Community) compliant

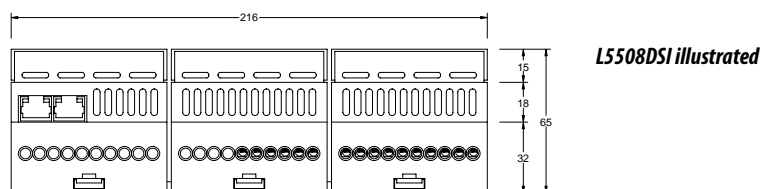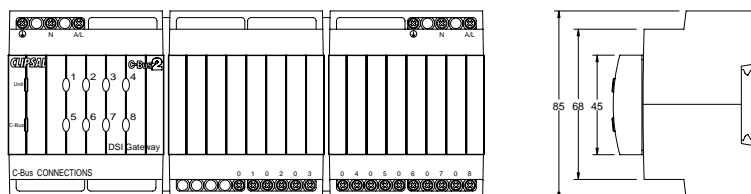

**L5508DSI illustrated**

### CATALOGUE NUMBER DESCRIPTION

<b>L5508DSIP</b>	8 Channel dimmer for DSI Ballast, 20A
<b>L5508DSI</b>	8 Channel dimmer for DSI Ballast, 20A, C-Bus 200mA

# 2 Channel DALI Gateway Range

## Learn Enabled

The 2 channel DALI gateway units are DIN rail mounted units designed to control DALI compatible dimmable electronic ballasts and low voltage transformers.

Each DALI channel can drive up to 64 DALI devices allowing a total of 128 DALI devices to be connected to a single C-Bus/DALI gateway module.

With the DALI gateway each of the DALI devices are individually addressable. The DALI gateway also supports 16 groups of devices and 16 scenes, as well as global control over all devices.

The DALI gateway provides two-way communications between C-Bus and DALI devices, in this way C-Bus messages may be routed to DALI devices and visa versa. In addition, the DALI gateway constantly monitors the state of lamps and DALI devices and reports their state to the C-Bus network. These messages can be read by C-Gate server application, when integrated as part of an overall building management system, device status may be reported to a central location.

The DALI units are available as passive units only, hence do not source current to the C-Bus network.






**5502DAL**

### TECHNICAL INFORMATION

Catalogue Number	<b>5502DAL</b>
C-Bus Supply Voltage	<b>15-36VDC @ 32mA</b>
Load Rating per Channel	<b>64 DALI devices</b>
Control Range	<b>0 - 100%</b>
Compatible Loads	<b>Digital Addressable Lighting Interface (DALI) electronic ballasts and low voltage transformers</b>
Maximum Number of Units on a Single C-Bus Network	<b>50</b>
Status Indicators	<b>Unit and C-Bus</b>
Warm Up Time	<b>5 seconds</b>
Network Clock	<b>Software selectable</b>
Network Burden	<b>Software selectable</b>
C-Bus Termination	<b>2 x RJ45 Socket</b>
Load Termination	<b>2 x 1.5mm<sup>2</sup> or 1 x 2.5mm<sup>2</sup></b>
Operating Temperature Range	<b>0° C to 45° C</b>
Operating Humidity Range	<b>0 - 95% RH, non-condensing</b>

### PRODUCT FEATURES

- Provides 2 channels of DALI interface, each channel can connect to 64 DALI devices
- Hard coded mapping between C-Bus group addresses and DALI device addresses
- Stored variables located in non-volatile memory and are retained in case of loss of C-Bus or DALI power
- Monitors and reports lamp and DALI device states
- Designed to fit standard 35mm top hat DIN rail, measures just 8M in size
- Designed to fit into standard electrical switchboards
- CE (European Community) compliant



**5502DAL illustrated**

CATALOGUE NUMBER	DESCRIPTION
<b>5502DAL</b>	2 Channel DALI Gateway

# Software Packages



# Software Packages

Please note all C-Bus Software Packages need to be programmed via a PC running the Microsoft Windows® operating system. All Installers will require an appropriate level of training and experience before they can program Clipsal C-Bus software packages to customer requirements. A C-Bus accredited System Integrator or approved C-Bus installer with the appropriate level of accreditation should therefore be used for software commissioning. Please contact your C-Bus specialist or Schneider Electric for further information.

## Toolkit Software

The C-Bus Toolkit Software includes the new version of the C-Bus Installation Software, Project Manager, and C-Bus Calculator. The software works under Windows™ 98, ME, 2000 and XP and supports a unique barcode scanning feature. This allows the Installer to scan the C-Bus packaging of each new unit to add the unit to the database. This ensures the correct unit type is added and saves the Installer having to select from a list of unit types. The software prints adhesive labels that can be affixed to building plans. These labels include the Unit Address and the physical location that the unit is to be installed at. Labels are duplicated so that one label can be affixed to the unit and one to the electrical plan for the installation. The labels have barcodes on them so that units can be easily re-identified if required.

**Please note: The latest version of the C-Bus Toolkit software is freely downloadable from the CIS website at [www.clipsal.com/cis](http://www.clipsal.com/cis).**

## Version 1 OPC Server Software

A C-Bus OPC Server Version 1 allows multiple software applications to share C-Bus data. The OPC Server will primarily be used to provide an interface between third party Building Management Systems or Process Control Presentation (SCADA) Systems and a Clipsal C-Bus system. Therefore experience in such third party systems is essential for a successful integrated C-Bus solution. The USB Dongle works under Windows® XP Home, XP Professional, Server 2003, Vista Ultimate, Vista Business and Vista Enterprise.

## Version 4 Schedule Plus Software

C-Bus Schedule Plus Version 4 includes a number of major features, including enhanced scheduling features, support for monitoring load run times, load power and energy consumed, support for fully customizable multilevel, password protected, access level control, support for sunrise and sunset times, support for daylight saving times, support for 128 bit encrypted secure internet connectivity allowing control and monitoring via any Web Browser. The software also includes a fully featured programmable logic engine. The C-Bus USB Key works under Windows® XP Home, XP Professional, Server 2003, Vista Ultimate, Vista Business and Vista Enterprise.

## Version 4 HomeGate Software

C-Bus HomeGate Version 4 includes a number of major features, including support for 128 bit encrypted secure internet connectivity allowing control and monitoring via any Web Browser, irrigation system control feature, enhanced scheduling features, support for sunrise and sunset times, and support for daylight saving times. The software also includes a fully featured programmable logic engine. The C-Bus USB Key works under Windows® XP Home, XP Professional, Server 2003, Vista Ultimate, Vista Business and Vista Enterprise.

Product reference	Page	Product reference	Page	Product reference	Page	Product reference	Page
1571	16	5080CTL27	21	E5054DLGB	11	SC5000CT2FBK	21
1571P	16	5080CTL26	21	E5054NLGB	13		
5000CTCPS2	23	5050CTL2GB	21	E5058NLGB	13		
5000CTCWB	23	5050CTL2WE	21	E5082F	10		
5000RL20	57	5050CTL228	21	E5082NL	8		
5002RL20	58	5050CTL2BK	21	E5084DL	6		
5000CT2WB	21	5082F	10	E5084F	10		
5000CT2RS232	21	5082NL	9	E5084NL	8		
5005C305B	42	5084DF	6	E5086F	10		
5031PEWPGY	33	5084F	10	E5086NL	8		
5050CTC2	23	5084NL	9	E5100TAU	35		
5050CTCF	23	5085DF	7	E5500CN	37		
5050IS	15	5085DL	7	E5504GI	25		
5050ISBA	15	5086F	10	E5750WPL	31		
5050ISGD	15	5086NL	9	L5501RBCP	61		
5050OS	15	5100NA	41	L5504AMP	60		
5050CT2F	21	5101R	50	L5504AUX	26		
5050CT2GB	20	5102RVF	50	L5504D2A	45		
5050CT2WE	20	5104BCLWE	27	L5504D2AP	45		
5050CT228	20	5500BURDEN	42	L5504D2U	46		
5050CT2BK	20	5500NB	39	L5504D2UP	46		
5052NLGB	14	5500PACA	28	L5504RDP	56		
5052NRI	15	5500PC	38	L5504RVF	51		
5052NRP	15	5500PCU	38	L5504RVF20	54		
5054NLGB	14	5500PS	40	L5504RVF20P	54		
5054NRP	15	5501RE	61	L5504RVFC	59		
5055DLGB	12	5502DAL	63	L5504RVFCP	59		
5058NLGB	14	5504RDP	55	L5504RVFP	51		
5058NRP	15	5751LWE	29	L5508D1A	44		
5070THBRBK	24	5753L	30	L5508D1AP	44		
5070THBRPGWE	24	5753PEIRL	32	L5508DSI	62		
5070THBRSS	24	5850FBK	16	L5508DSIP	62		
5070THBPGWE	24	5850FBR	16	L5508RVF	52		
5070THBBK	24	5850FCM	16	L5508RVFP	52		
5070THBSS	24	5850FWE	16	L5512RVF	53		
5070THPRPGWE	24	BS5000CTC2	23	L5512RVFP	53		
5070THPRBK	24	BS5000CT2	20	R5050WB	18		
5070THPRSS	24	BS5000CTL2	21	R5061NL	18		
5070THPPGWE	24	BS5000CT2F	21	R5062VNL	18		
5070THPBK	24	E50312TC7	34	R5063NL	18		
5070THPSS	24	E5031NLWE	17	R5064VNL	18		
5080CTCF	23	E5031PE	33	R5066NL	18		
5080CTC2GF	23	E5032NLWE	17	R5068NL	18		
5080LC	10	E5032VNLWE	17	SC5000CT2WE	20		
5080CT2F	21	E5034NLWE	17	SC5000CT2CM	20		
5080CT2GF	20	E5050IS	15	SC5000CT2BK	20		
5080CT23	20	E5050ISBA	15	SC5000CTL2WE	21		
5080CT27	20	E5050ISGD	15	SC5000CTL2CM	21		
5080CT26	20	E5050MF	16	SC5000CTL2BK	21		
5080CTL2GF	21	E5050OS	15	SC5000CT2FWE	21		
5080CTL23	21	E5052NLGB	13	SC5000CT2FCM	21		

---

**Nationwide support on one number –  
call the Customer Information Centre on**

**0870 608 8 608**

Fax 0870 608 8 606

---

**Clipsal**  
Stafford Park 5, Telford  
Shropshire TF3 3BL

 **CLIPSAL**<sup>®</sup>  

---

**by Schneider Electric**



E3112SAWE



E321SAWE

## 10A & 15A FLUSH SWITCHES

(Designed to IEC60669-1, MS616, SS227)

### E3112SAWE

10A 1 gang 1 way 2 terminal switch

### E3123SAWE

10A 1 gang 2 way 3 terminal switch

### E31IAWE

10A 1 gang intermediate switch

### E321SAWE

10A 2 gang 1 way 2 terminal switch

### E322SAWE

10A 2 gang 2 way 3 terminal switch



E3312SAWE



E341SAWE

## 10A FLUSH SWITCHES

(Designed to IEC60669-1, MS616, SS227)

### E331SAWE

10A 3 gang 1 way 2 terminal switch

### E332SAWE

10A 3 gang 2 way 3 terminal switch

### E33AWE

10A 3 gang 2 way 4 terminal switch

### E341SAWE

10A 4 gang 1 way 2 terminal switch

### E342SAWE

10A 4 gang 2 way 3 terminal switch



E351SAWE



ET361SAWE

## 10A FLUSH SWITCHES

(Designed to IEC60669-1, MS616, SS227)

### E351SAWE

10A 5 gang 1 way 2 terminal switch

### E352SAWE

10A 5 gang 2 way 3 terminal switch

### ET361SAWE

10A 6 gang 1 way 2 terminal switch

### ET362SAWE

10A 6 gang 2 way 3 terminal switch



E31D20GEWE



E32D20GEWE

## 15A & 20A DP FLUSH SWITCHES

(Designed to IEC60669-1, MS616, SS227)

### E31D20GEWE

20A 1 gang DP switch

### E32D20GEWE

20A DP switch with neon

### E32D20NGEWE

20A DP switch with neon & bottom cable outlet





ED32WE, ED45WE



ED32NWE, ED45NWE



ETDR45NWE

### 32A & 45A DP FLUSH SWITCHES

(Designed to IEC60669-1, MS616, SS227)

#### ED32WE

32A DP switch

#### ED45WE

45A DP switch

#### ED32NWE

32A DP switch with neon

#### ED45NWE

45A DP switch with neon

#### ETDR45NWE

45A 250V DP vertical switch with neon



30WE



32AWE



33AWE

### 10A ARCHITRAVE SWITCHES

(Designed to IEC60669-1, MS616, SS227)

#### 30WE

10A 1 gang 2 way 4 terminal switch

#### 32AWE

10A 2 gang 2 way 4 terminal switch

#### 33AWE

10A 3 gang 2 way 4 terminal switch



### 10A ARCHITRAVE SWITCHES

(Designed to IEC60669-1, MS616, SS227)

#### 34AWE

10A 4 gang 2 way 4 terminal switch



3625WE, 362WE, 3622WE, 36213WE,  
362133WE, 36215WE, 36313WE,  
363133WE

### 5A, 13A & 15A SURFACE SWITCHES

(Designed to IEC60669-1, MS616, SS227)

#### 3625WE

5A 1 way 2 terminal switch

#### 362WE

10A 1way 3 terminal switch

#### 3622WE

10A 1way 2 terminal switch

#### 36213WE

13A 1 way 2 terminal switch

#### 362133WE

13A 1 way 3 terminal switch

#### 36215WE

15A 1way 3 terminal switch

#### 36313WE

13A 2 way 4 terminal switch

#### 363WE

10A 2 way 3 terminal switch white

#### 363BR

10A 2 way 3 terminal switch brown

**SPECIAL  
ORDER**

Extended lead times  
may apply.



## CEILING & FOOT SWITCHES

(Designed to IEC60669-1, MS616, SS227)

### 342WE

10A 1 way 3 terminal ceiling switch

### 360WE

DP foot switch - cord line WE

### 360BK

DP foot switch - cord line BK



## 10A & 16A TIME DELAY SWITCHES

(Designed to IEC60669-2-1)

### E319WE

10A 1 gang pneumatic time delay switch - adjustable prior to installation

### E31ETR60WE

16A 1 gang 1- 60 minutes electronic time delay switch

### E31ETRF60WE

16A 1 gang 1- 60 minutes electronic time delay switch for fluorescent loads

### E31ETR720WE

16A 1 gang 1-12 hours electronic time delay switch

### E31ETRF720WE

16A 1 gang 1-12 hours electronic time delay for fluorescent loads



## 6A TP FAN ISOLATOR

(Designed to IEC60947-3)

### E30T6AWE

6A 240V TP fan isolator



## ROTARY DIMMERS

### E31RD250LVWE

1 gang LV 250W  
1 way dimmer

### E31RD400WE

1 gang 240V 400W  
1 way dimmer

### E32RD160LVWE

2 gang LV  
2 x 160W 1 way

### E32RD250WE

2 gang 240V  
2 x 250W 1 way



E32E450L



E34E450L



31V1000WE

## DIMMER SWITCHES

(Designed to BS5518)

### E32E450L

450W 1 gang dimmer

### E34E450L

450W 2 gang dimmer

### 31V1000WE

1000W dimmer (For incandescent lamps only)



E15WE



E15NWE



E25WE



E25NWE

## 13A SWITCHED SOCKET OUTLETS

(Designed to BS1363, MS589, SS145)

### E15WE

13A 1 gang 3 pin switched socket outlet

### E15NWE

13A 1 gang 3 pin switched socket outlet with neon

### E25WE

13A 2 gang 3 pin switched socket outlet

### E25NWE

13A 2 gang 3 pin switched socket outlet with neon



E251BPWE



E25DF32WE

## 13A SWITCHED CONVERTA SOCKET OUTLETS

(Designed to BS1363, MS589, SS145)

### E251BPWE

13A 2 into 1 switched socket outlet

### E25DF32WE

13A 3 into 2 switched socket outlet



E426WE



ET426WE



E25SFWE, E25CESFWE



E25CESFNWE

## 13A SOCKET OUTLETS

(Designed to BS1363, MS589, SS145)

### E426WE

13A 1 gang 3 pin socket outlet

### ET426WE

13A 2 gang 3 pin socket outlet

### E25SFWE

13A 2 gang 3 pin switched socket outlet with surge protection

### E25CESFWE

13A 2 gang clean earth filtered switched socket outlet with surge protection

### E25CESFNWE

13A 2 gang clean earth filtered switched socket outlet with surge protection & neon

**SPECIAL  
ORDER**

Extended lead times  
may apply.



ED4513WE



ED4513NWE

### 32A & 45A COOKER CONTROL UNITS

(Designed to BS4177, BS1363, MS616, SS227)

#### ED4513WE

45A DP main switch & 13A switched socket outlet

#### ED4513NWE

45A DP switch & 13A switched socket outlet with neon indicator



E155WE



E155NWE



E1515WE



E1515NWE

### 5A & 15A SWITCHED SOCKET OUTLETS

(Designed to BS546)

#### E155WE

5A 1 gang 3 pin switched socket outlet

#### E155NWE

5A 1 gang 3 pin switched socket outlet with neon

#### E1515WE

15A 1 gang 3 pin switched socket outlet

#### E1515NWE

15A 1 gang 3 pin switched socket outlet with neon

**SPECIAL  
ORDER**

Extended lead times  
may apply.



E4262WE



E4265WE



E42615WE

### 2A, 5A & 15A SOCKET OUTLETS

(Designed to BS546)

#### E4262WE

2A 1 gang 3 pin socket outlet

#### E4265WE

5A 1 gang 3 pin socket outlet

#### E42615WE

15A 1 gang 3 pin socket outlet



E727WE

### UNIVERSAL SHAVER SOCKET OUTLETS

(Designed to BS3535, IEC61558-2-5)

#### E727WE

115 240V shaver unit



E42616WE, EC42616WE

## 10A & 16A SCHUKO SOCKET OUTLETS

(Designed to IEC884)

### E42616WE

16A 1 gang schuko socket outlet

### EC42616WE

16A 1 gang schuko socket outlet  
with claw fixing



E31TBWE



E554WE

## 25A & 45A CONNECTION UNITS

(Designed to BS5733)

### E31TBWE

25A 1 gang connection unit

### E554WE

45A connection unit



E30FSGWE



E31DFSGWE



E31NFSGWE, E30FSGNWE



E31TBFGSGWE

## 13A FUSED CONNECTION UNITS

(Designed to BS1363)

### E30FSGWE

13A 1 gang fused connection unit

### E31DFSGWE

13A 1 gang fused connection unit  
with DP switch

### E31NFSGWE

13A 1 gang fused connection unit  
with neon indicator

### E30FSGNWE

13A 1 gang fused connection unit  
with neon indicator

### E31TBFGSGWE

13A 1 gang fused connection unit  
with front flexible outlet




E32DNFSGWE

## 13A FUSED CONNECTION UNIT

(Designed to BS1363)

### E32DNFSGWE

13A 1 gang fused connection unit  
with DP switch & neon indicator



**E31DNFSGWE**



**E31DFSGMSWE**



**E31FSGWE**



**E30NFSGSWE**

## 15A FUSED CONNECTION UNITS

**E31DNFSGWE**  
15A 1 gang DP with neon

**E31DFSGMSWE**  
15A 1 gang DP fused connection unit medium security

**E31FSGWE**  
15A 1 gang blank

**E30NFSGSWE**  
15A 1 gang fused connection unit high security with neon

*Note:*  
2 A, 3 A, 5 A fuse link are available on request



**E31TV75WE**



**E32TV75WE**



**E32TV75FMWE**

## TVFM CO-AXIAL OUTLETS

**E31TV75WE**  
1 gang co-axial outlet

**E32TV75WE**  
2 gang co-axial outlet

**E32TV75FMWE**  
2 gang TVFM splitter




**E34061MWE, E34061SWE**


## TELEPHONE OUTLETS

**E34061MWE**  
1 gang 6 pin (master unit, BT standard) telephone outlet

**E34061SWE**  
1 gang 6 pin (slave unit) telephone outlet



**E31TVFWE**



**E32TVFWE**



**ET31TVFM11WE**

## "F" TYPE CONNECTOR

**E31TVFWE**  
1 gang "F" Type connector

**E32TVFWE**  
2 gang "F" Type connector

**ET31TVFM11WE**  
2 gang TVFM SCV socket outlet



E31KTWE



EKT TRWE

## HOTEL SERIES

(Designed to BS5733,  
IEC60669-1)

### E31KTWE

20A DP energy saving switch with  
neon

### EKT TRWE

Key tag (without assembling)

Note: Hotel Series are available in  
Chinese & English text



E31WE



E32WE



E33WE



E34WE

## FLUSH PLATES

(Designed to BS5733)

### E31WE

1 gang flush plate

### E32WE

2 gang flush plate

### E33WE

3 gang flush plate

### E34WE

4 gang flush plate



E35WE



ET36WE



ET31TVFM10WE

## FLUSH PLATES

(Designed to BS5733)

### E35WE

5 gang flush plate

### ET36WE


6 gang flush plate

### ET31TVFM10WE

2 gang TVFM flush plate



E31XWE



E312XWE

## FLUSH PLATES

(Designed to BS5733)

### E31XWE

1 gang blank flush plate

### E312XWE

2 gang blank flush plate



E31WPWE

## FLUSH PLATES

(Designed to BS5733, IEC60529)

### E31WPWE

1 gang IP54 flush plate



31WE, 31DWE



32WE



33WE

## ARCHITRAVE PLATES

(Designed to BS5733)

### 31WE

1 gang architrave plate

### 31DWE

1 gang architrave surface plate

### 32WE

2 gang architrave plate

### 33WE

3 gang architrave plate



34WE

## ARCHITRAVE PLATES

(Designed to BS5733)

### 34WE

4 gang architrave plate





E10311AWE, E10312AWE, E10311AWE

E10321AWE, E10322AWE

E10331AWE, E10332AWE

E10341AWE, E10342AWE

## 10A FLUSH SWITCHES

(Designed to IEC60669-1, MS616, SS227)

### E10311AWE

10A 1 gang 1 way switch

### E10312AWE

10A 1 gang 2 way switch

### E10311AWE

10A 1 gang intermediate switch

### E10321AWE

10A 2 gang 1 way switch

### E10322AWE

10A 2 gang 2 way switch

### E10331AWE

10A 3 gang 1 way switch

### E10332AWE

10A 3 gang 2 way switch

### E10341AWE

10A 4 gang 1 way switch

### E10342AWE

10A 4 gang 2 way switch



E1031D20WE, E1031D20AWE

E1032D20NAWE, E1032D20NAWE

E1031DR32NWE, E1031DR45NWE

## 20A, 32A & 45A DP FLUSH SWITCHES

(Designed to IEC60669-1, MS616, SS227)

### E1031D20WE

20A DP switch

### E1031D20AWE

20A DP switch with earth

### E1032D20NAWE

20A DP switch with neon

### E1032D20NAWE

20A DP switch with neon & earth

### E1031DR32NWE

32A DP switch with neon

### E1031DR45NWE

45A DP switch with neon



E10311BPRBAWE, E1031BP2A3WE, E1031BP2A4WE, E1031BPAWE

E10311BPRPAWE, E1031BPRAWE

## BELL SWITCHES

(Designed to IEC60669-1, MS616, SS227)

### E10311BPRBAWE

2A bell push switch marked with bell symbol

### E1031BP2A3WE

3A bell push switch marked with bell symbol

### E1031BP2A4WE

4A bell push switch marked with bell symbol

### E1031BPAWE

15A bell push switch marked with bell symbol

### E10311BPRPAWE

2A bell press switch marked with "PRESS"

### E1031BPRAWE

10A change-over press switch marked with "PRESS"



E1031E1NAWE, E1031E2NAWE

E1032E1NAWE, E1032E2NAWE

E1033E1NAWE, E1033E2NAWE

## 10A ELONGATED DOLLY SWITCHES WITH NEON

(Designed to IEC60669-1, MS616, SS227)

### E1031E1NAWE

10A 1 gang 1 way switch

### E1031E2NAWE

10A 1 gang 2 way switch

### E1032E1NAWE

10A 2 gang 1 way switch

### E1032E2NAWE

10A 2 gang 2 way switch

### E1033E1NAWE

10A 3 gang 1 way switch

### E1033E2NAWE

10A 3 gang 2 way switch



E1031E1AWE, E1031E2AWE

E1032E1AWE, E1032E2AWE

E1033E1AWE, E1033E2AWE

## 10A ELONGATED DOLLY SWITCHES WITH LUMINOUS INDICATOR

(Designed to IEC60669-1, MS616, SS227)

### E1031E1AWE

10A 1 gang 1 way switch

### E1031E2AWE

10A 1 gang 2 way switch

### E1032E1AWE

10A 2 gang 1 way switch

### E1032E2AWE

10A 2 gang 2 way switch

### E1033E1AWE

10A 3 gang 1 way switch

### E1033E2AWE

10A 3 gang 2 way switch



E1031M1AWE, E1031M2AWE

E1032M1AWE, E1032M2AWE

E1033M1AWE, E1033M2AWE

## 10A MID DOLLY SWITCHES WITH LUMINOUS INDICATOR

(Designed to IEC60669-1, MS616, SS227)

### E1031M1AWE

10A 1 gang 1 way switch

### E1031M2AWE

10A 1 gang 2 way switch

### E1032M1AWE

10A 2 gang 1 way switch

### E1032M2AWE


10A 2 gang 2 way switch

### E1033M1AWE

10A 3 gang 1 way switch

### E1033M2AWE

10A 3 gang 2 way switch

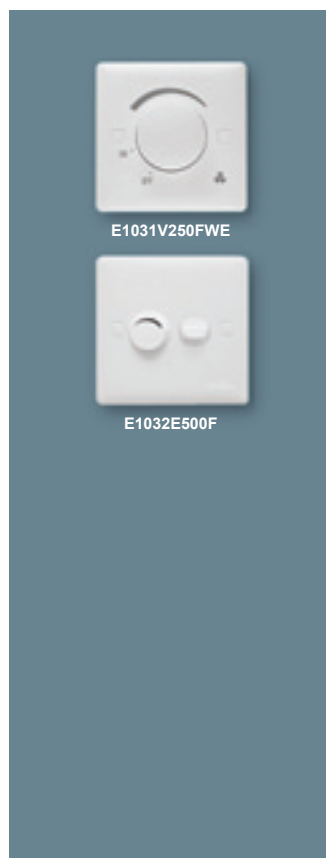

E1031V250FWE

E1032E500F

## FAN CONTROL SWITCHES


(Designed to BS5518)

### E1031V250FWE

250VA 1 gang fan control

### E1032E500F

500VA 1 gang fan control

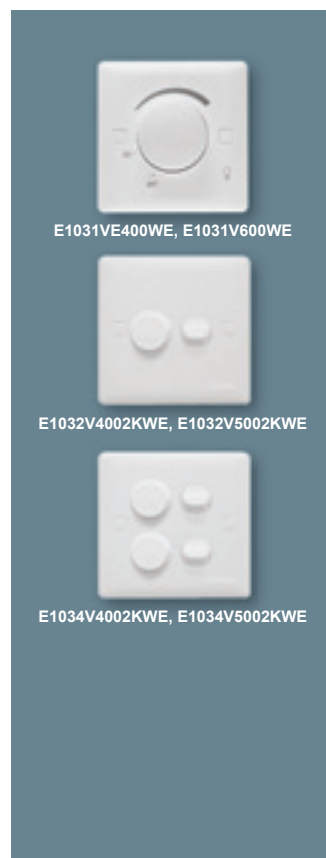

E1031VE400WE, E1031V600WE

E1032V4002KWE, E1032V5002KWE

E1034V4002KWE, E1034V5002KWE

## DIMMER SWITCHES

(Designed to BS5518)

### E1031VE400WE

400W 1 gang dimmer  
(EMC compliance)

### E1031V600WE

600W 1 gang dimmer

### E1032V4002KWE

400W 1 gang dimmer with switch

### E1032V5002KWE

500W 1 gang dimmer with switch

### E1034V4002KWE

400W 2 gang dimmer with switch

### E1034V5002KWE

500W 2 gang dimmer with switch



### 13A SWITCHED SOCKET OUTLETS

*(Designed to BS1363, MS589, SS145)*

#### E1015WE

13A 1 gang switched socket outlet

#### E1015DWE

13A 1 gang DP switched socket outlet

#### E1015DNWE

13A 1 gang DP switched socket outlet with neon

#### ET1025WE


13A 2 gang switched socket outlet

#### ET1025DWE

13A 2 gang DP switched socket outlet

#### ET1025DNWE

13A 2 gang DP switched socket outlet with neon

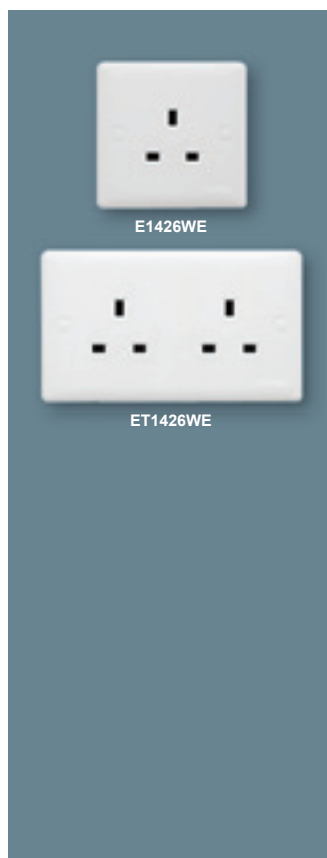

### 13A SOCKET OUTLETS


*(Designed to BS1363, MS589, SS145)*

#### E1426WE

13A 1 gang socket outlet

#### ET1426WE

13A 2 gang socket outlet

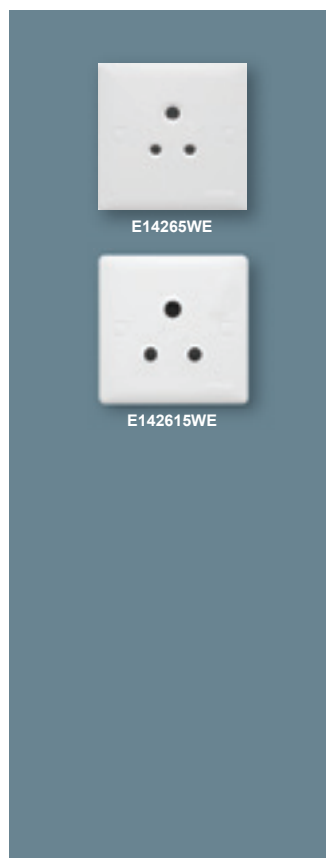

### 5A & 15A SOCKET OUTLETS

*(Designed to BS546)*

#### E14265WE

5A 1 gang socket outlet

#### E142615WE

15A 1 gang socket outlet



### CONNECTION UNIT

*(Designed to BS5733)*

#### E1031TBWE

25A 3 terminal connection unit



### 13A FUSED CONNECTION UNITS


(Designed to BS1363)

**E1030FSGWE**  
13A fused connection unit

**E1030FSGNWE**  
13A fused connection unit  
with neon

**E1031DFSGWE**  
13A DP fused connection unit  
with switch

**E1031DFSGNWE**  
13A DP fused connection unit with  
neon & switch

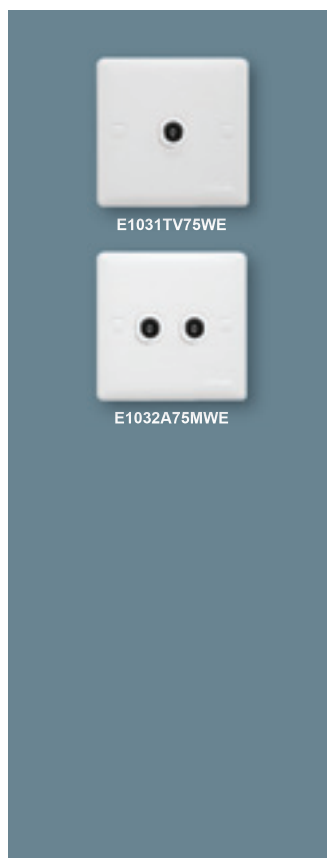

### TELECOMMUNICATION ACCESSORIES

**E1031TV75WE**  
1 gang TV co-axial outlet

**E1032A75MWE**  
2 gang TV co-axial outlet



### FLUSH PLATES

(Designed to BS5733)

**E1031WE**  
1 gang flush plate

**E1032WE**  
2 gang flush plate

**E1033WE**  
3 gang flush plate

**E1034WE**  
4 gang flush plate



### FLUSH PLATES

(Designed to BS5733)

**E1031XWE**  
1 gang blank plate

**ET1031XWE**  
2 gang blank plate



E20311SAWE, E20312SAWE, E20311AWE,



E20321SAWE, E20322SAWE



E203312AWE, E203323AWE



E203412AWE, E203423AWE



ET20361SAWE, ET20362SAWE



ET20381SAWE, ET20382SAWE

## 10A, 15A & 20A FLUSH SWITCHES

(Designed to IEC60669-1, MS616, SS227)

### E20311SAWE

10A 1 gang 1 way 2 terminal switch

### E20312SAWE

10A 1 gang 1 way 3 terminal switch

### E20311AWE

10A 1 gang intermediate switch

## 10A FLUSH SWITCHES

(Designed to IEC60669-1, MS616, SS227)

### E20321SAWE

10A 2 gang 1 way 2 terminal switch

### E20322SAWE

10A 2 gang 2 way 3 terminal switch

## 10A FLUSH SWITCHES

(Designed to IEC60669-1, MS616, SS227)

### E203312AWE

10A 3 gang 1 way 2 terminal switch

### E203323AWE

10A 3 gang 2 way 3 terminal switch

### E203412AWE

10A 4 gang 1 way 2 terminal switch

### E203423AWE

10A 4 gang 2 way 3 terminal switch

## 10A FLUSH SWITCHES

(Designed to IEC60669-1, MS616, SS227)

### ET20361SAWE

10A 6 gang 1 way 2 terminal switch

### ET20362SAWE

10A 6 gang 2 way 3 terminal switch

### ET20381SAWE

10A 8 gang 1 way 2 terminal switch

### ET20382SAWE

10A 8 gang 2 way 3 terminal switch



E2031D20AWE



E2031D20GNAWE

## 15A & 20A DP FLUSH SWITCHES

(Designed to IEC60669-1, MS616, SS227)

### E2031D20AWE

20A 1 gang DP switch

### E2031D20GNAWE

20A DP switch with neon & bottom outlet



E2031D32WE, E2031D45WE



E2031D32NWE, E2031D45NWE



E2031DR45WE



E2031DR45NWE

## 32A & 45A DP FLUSH SWITCHES

(Designed to IEC60669-1, MS616, SS227)

### E2031D32WE

32A 1 gang DP switch (Dolly Switch)

### E2031D45WE

45A 1 gang DP switch (Dolly Switch)

### E2031D32NWE

32A 1 gang DP switch with neon (Dolly Switch)

### E2031D45NWE

45A 1 gang DP switch with neon (Dolly Switch)

### E2031DR45WE

45A 1 gang DP switch (Rocker Switch)

### E2031DR45NWE

45A 1 gang DP switch with neon (Rocker Switch)



ET2031VDR45WE



ET2031VDR45NWE

## 45A DP FLUSH SWITCHES

(Designed to IEC60669-1, MS616, SS227)

### ET2031VDR45WE

45A 1 gang DP vertical switch

### ET2031VDR45NWE

45A 1 gang DP vertical switch



E2031BP23AWE, E2031BPNAWE



E20311RBPRBAWE



E20311RBPRPAWE

## BELL SWITCHES

(Designed to IEC60669-1, MS616, SS227)

### E2031BP23AWE

3A bell push switch with bell symbol

### E2031BPNAWE

10A 1 gang illuminated bell push

### E20311RBPRBAWE

10A 1 gang bell press with bell symbol

### E20311RBPRPAWE

10A 1 gang bell press marked "PRESS"

**SPECIAL  
ORDER**

Extended lead times  
may apply.



E234216DWE

### 16A PULL SWITCH

(Designed to IEC60669-1, MS616, SS227)

#### E234216DWE

16A 1 gang 1 way DP pull switch

#### E242610WE

10A 1 gang 1 way DP pull switch



EP20312SAWE, EP2031IAWE

### 10A FLUSH SWITCHES (PRESTIGE)

(Designed to IEC60669-1, MS616, SS227)

#### EP20312SAWE

10A 1 gang 2 way 4 terminal switch

#### EP2031IAWE

10A 1 gang intermediate switch



EA203112AWE, EA203123AWE



EA203212AWE, EA203223AWE

### 10A ARCHITRAVE SWITCHES

(Designed to IEC60669-1, MS616, SS227)

#### EA203112AWE

10A 1 gang 1 way 2 terminal switch

#### EA203123AWE

10A 1 gang 2 way 3 terminal switch

#### EA203212AWE

10A 2 gang 1 way 2 terminal switch

#### EA203223AWE

10A 2 gang 2 way 3 terminal switch



EA203312AWE, EA203323AWE



E203412AWE, E203423AWE

### 10A ARCHITRAVE SWITCHES

(Designed to IEC60669-1, MS616, SS227)

#### EA203312AWE

10A 3 gang 1 way 2 terminal switch

#### EA203323AWE

10A 3 gang 2 way 3 terminal switch

#### E203412AWE

10A 4 gang 1 way 2 terminal switch

#### E203423AWE

10A 4 gang 2 way 3 terminal switch

**SPECIAL  
ORDER**

Extended lead times  
may apply.



E2032E500FWE, E2032E500WE



E2034E500FWE, E2034E500WE



E2030T6AWE



E2032V500WE



E2034V500WE



E2032V1800WE, E2032V2400WE,  
E2032V3600WE



E2015WE, E2015DWE



E2015NWE



ET2025WE, ET2025DWE, ET2025RCWE



ET2025NWE

## 500VA FAN CONTROLLERS

(Designed to BS5518)

### E2032E500FWE

500VA 1 gang universal fan controller

### E2032E500WE

500VA 1 gang ceiling sweep

### E2034E500FWE

500VA 2 gang universal fan controller

### E2034E500WE

500VA 2 gang ceiling sweep

## 240V TP FAN ISOLATOR

(Designed to IEC60947-3)

### E2030T6AWE

240V 1 gang TP fan isolator

## LIGHT DIMMERS

(Designed to BS5518)

### E2032V500WE

500W 1 gang light dimmer

### E2034V500WE

500W 2 gang light dimmer

### E2032V1800WE

1800W 1 gang high power dimmer  
(EMC compliant)

### E2032V2400WE

2400W 1 gang high power dimmer  
(EMC compliant)

### E2032V3600WE

3600W 1 gang high power dimmer  
(EMC compliant)

## 13A SWITCHED SOCKET OUTLETS

(Designed to BS1363, MS589, SS145)

### E2015WE

13A 1 gang switched socket outlet

### E2015DWE

13A 1 gang DP switched socket outlet

### E2015NWE

13A 1 gang switched socket outlet with neon

### ET2025WE

13A 2 gang switched socket outlets

### ET2025DWE

13A 2 gang DP switched socket outlets

### ET2025RCWE

13A 2 gang switched socket outlets with 30mA RCD protection

### ET2025NWE

13A 2 gang switched socket outlets with neon

**SPECIAL ORDER**

Extended lead times may apply.

**SPECIAL ORDER**

Extended lead times may apply.





E2426WE



ET2426WE

### 13A SOCKET OUTLETS

(Designed to BS1363, MS589, SS145)

#### E2426WE

13A 1 gang socket outlet

#### ET2426WE

13A 2 gang socket outlet




ET2031D4513NWE

### COOKER CONTROL UNIT

(Designed to BS1363, SS145, MS589, BS4177)

#### ET2031D4513NWE

45A DP main switch & 13A switched socket outlet with neon



E24265WE



E242615WE

### 5A & 15A SOCKET OUTLETS

(Designed to BS546, SS472)

#### E24265WE

5A 1 gang socket outlet

#### E242615WE

15A 1 gang socket outlet



ET2727WE



ET2727HWE

### UNIVERSAL SHAVER SOCKET OUTLETS

(Designed to IEC61558-2-5, BS3535)

#### ET2727WE

115240V ~ 20VA universal shaver outlet

#### ET2727HWE

115240V ~ 20VA universal shaver outlet with thermal cut-off



E2426165WE

## SCHUKO SOCKET OUTLETS

(Designed to IEC884)

### E2426165WE

16A 1 gang schuko socket outlet



E2031TBWE

## 25A CONNECTION UNIT

(Designed to BS5733)

### E2031TBWE

25A 1 gang connection unit with front flexible outlet



E2030FSGWE



E2030FSGNWE



E2031DFSGWE



E2031DFSGNWE

## 13A FUSED CONNECTION UNITS

(Designed to BS1363)

### E2030FSGWE

13A 1 gang fused connection unit

### E2030FSGNWE

13A 1 gang fused connection with neon

### E2031DFSGWE

13A 1 gang fused connection unit with DP switch

### E2031DFSGNWE

13A 1 gang fused connection unit with DP switch & neon



E2030FSGMSWE



E2031DFSGMSWE

## 13A FUSED CONNECTION UNITS MEDIUM SECURITY LOCK

(Designed to BS1363)

### E2030FSGMSWE

13A 1 gang fused connection unit

### E2031DFSGMSWE

13A 1 gang fused connection unit with DP switch



E2030FSGSWE



E2030DNFSGSWE



E2031DFSGSWE



E2031DNFSGSWE

### 13A FUSED CONNECTION UNITS HIGH SECURITY LOCK

(Designed to BS1363)

**E2030FSGSWE**  
13A 1 gang fused connection unit

**E2030DNFSGSWE**  
13A 1 gang fused connection unit  
with neon

**E2031DFSGSWE**  
13A 1 gang fused connection unit  
with DP switch

**E2031DNFSGSWE**  
13A 1 gang fused connection unit  
with DP switch & neon



E24061MWE, E24061SWE



E2406MRJ88WE

### TELEPHONE SOCKET OUTLETS

**E24061MWE**  
1 gang 6 pin master unit BT  
telephone outlet  
(Designed to British standard)

**E24061SWE**  
1 gang 6 pin slave unit telephone  
outlet  
(Designed to British standard)

**E2406MRJ88WE**  
Dual telecommunication socket  
British telecom master & RJ45



E2031TVWE



E2302TVWE



E2032VTVWE

### 75 OHM TV ANTENNA OUTLETS

**E2031TVWE**  
75 ohm 1 gang TV antenna outlet

**E2302TVWE**  
75 ohm 2 gang TV antenna outlet

**E2032VTVWE**  
75 ohm 2 gang TV antenna outlet



E2032TVFMWE, E2032TVFM2WE



E2032VTVFMWE, E2032VTVFM2WE,  
E2032VTVFM2WE

### 75 OHM TVFM CO-AXIAL OUTLETS

**E2032TVFMWE**  
75 ohm 2 gang TVFM splitter

**E2032TVFM2WE**  
75 ohm 2 gang TVFM splitter for  
multi-outlet system with 2 cord  
grip

**E2032VTVFMWE**  
75 ohm 2 gang TVFM splitter

**E2032VTVFM2WE**  
75 ohm 2 gang TVFM splitter with  
screw fixing

**E2032VTVFM2WE**  
75 ohm 2 gang TVFM splitter for  
multi-outlet system with 2 cord  
grip



E2031TVFWE



E2032TVFWE

## F-TYPE CONNECTORS

### E2031TVFWE

1 gang F-type connector

### E2032TVFWE


1 gang F-type connector



E2031EKTWE



E2031EKTHWE



E2031EKT-KC

## 16A CARD KEY SWITCHES

(Designed to IEC60669-2-1)

### E2031EKTWE

16A 230V 50Hz 1 gang DP card key switch

### E2031EKTHWE

16A 230V 50Hz 1 gang DP switch  
(Suit standard credit card size)

### E2031EKT-KC


Card key, only for E2031EKT




E2031BPDWE



E2031BPMWE



E2032VDMWE



E2032DMHWE

## 10A BELL PRESS MESSAGE INDICATORS

### E2031BPDWE

10A 230V 50Hz 1 gang bell press with "DO NOT DISTURB" symbol  
(Designed to IEC60669-1)

### E2031BPMWE


10A 230V 50Hz 1 gang bell press with "PLEASE CLEAN ROOM" symbol  
(Designed to IEC60669-1)

### E2032VDMWE

10A 230V 50Hz message indicators with "DO NOT DISTURB" & "PLEASE CLEAN ROOM" symbol (vertical)  
(Designed to BS5733)

### E2032DMHWE

10A 230V 50Hz message indicators with "DO NOT DISTURB" & "PLEASE CLEAN ROOM" symbol  
(Designed to BS5733)



E2033LBPDWE

## 10A BELL PRESS MESSAGE INDICATORS

(Designed to IEC60669-1)

### E2033LBPDWE

10A entrance bell press & message panel

**SPECIAL  
ORDER**

Extended lead times  
may apply.



E2031L12AWE, E2031L23AWE,  
E2031LIAWE



E2032L12A, E2032L23AWE



E2033L12A, E2033L23AWE

## 10A C-COSMO MEGA FLUSH SWITCHES

(Designed to IEC60669-1,  
MS616, SS227)

### E2031L12AWE

10A 1 gang 1 way 2 terminal  
switch

### E2031L23AWE

10A 1 gang 2 way 3 terminal  
switch

### E2031LIAWE

10A 1 gang intermediate switch

### E2032L12AWE

10A 2 gang 1 way 2 terminal  
switch

### E2032L23AWE

10A 2 gang 2 way 3 terminal  
switch

### E2033L12AWE

10A 3 gang 1 way 2 terminal  
switch

### E2033L23AWE

10A 3 gang 2 way 3 terminal  
switch



E2031L13NAWE, E2031LNAWE



E2032L13NAWE, E2032LNAWE



E2031LBPRAWESwitch



E2032LBPRAWESwitch



E2032L1BPRAWESwitch



E2032L1NBPRAWESwitch



E2032BPRAL1AWE Switch



E2032BPRAL1NAWE Switch

## 10A C-COSMO MEGA FLUSH SWITCHES WITH NEON

(Designed to IEC60669-1,  
MS616, SS227)

### E2031L13NAWE

10A 1 gang 1 way 3 terminal  
switch with neon

### E2031LNAWE

10A 1 gang 2 way 4 terminal  
switch with neon

### E2032L13NAWE

10A 2 gang 1 way 3 terminal  
switch with neon

### E2032LNAWE

10A 2 gang 2 way 4 terminal  
switch with neon

## 10A C-COSMO MEGA BELL PRESS SWITCHES

(Designed to IEC60669-1,  
MS616, SS227)

### E2031LBPRAWESwitch

10A 1 gang bell press with bell  
symbol

### E2032LBPRAWESwitch

10A 2 gang bell press with bell  
symbol

## 10A C-COSMO MEGA BELL PRESS SWITCHES

(Designed to IEC60669-1,  
MS616, SS227)

### E2032L1BPRAWESwitch

10A 2 gang 1 way 2 terminal  
switch (L) & bell press with bell  
symbol (R)

### E2032L1NBPRAWESwitch

10A 2 gang 1 way 2 terminal  
switch with neon (L) & bell press  
with bell symbol (R)

### E2032BPRAL1AWE Switch

10A 2 gang bell press with bell  
symbol (L) & 1 way 2 terminal  
switch (R)

### E2032BPRAL1NAWE Switch

10A 2 gang bell press with bell  
symbol (L) & 1 way 2 terminal  
switch with neon (R)

**SPECIAL  
ORDER**

Extended lead times  
may apply.

**SPECIAL  
ORDER**

Extended lead times  
may apply.



E2031LD20NAWE



E2031LPD600WE



E2032LPD400WE



E2015LWE



E2015LNWE



E2031WE



E2032VWE



E2033WE



E2034WE

## 20A C-COSMO MEGA DP FLUSH SWITCHES

(Designed to IEC60669-1,  
MS616, SS227)

### E2031LD20NAWE

20A 1 gang DP switch with neon

## 250V C- COSMO MEGA PRESS DIMMERS

(Designed to BS5518)

### E2031LPD600WE

250V 600W 1 gang press dimmer

### E2032LPD400WE

250V 400W 2 gang press dimmer

## 13A C-COSMO MEGA SWITCHED SOCKET OUTLETS

(Designed to BS1363, MS589,  
SS145)

### E2015LWE

13A 1 gang switched socket outlet

### E2015LNWE

13A 1 gang switched socket outlet  
with neon

## FLUSH PLATES

(Designed to BS5733)

### E2031WE

1 gang flush plate

### E2032VWE

2 gang flush plate

### E2033WE

3 gang flush plate

### E2034WE

4 gang flush plate

**SPECIAL  
ORDER**

Extended lead times  
may apply.

**SPECIAL  
ORDER**

Extended lead times  
may apply.

**SPECIAL  
ORDER**

Extended lead times  
may apply.



### FLUSH PLATES

(Designed to BS5733)

**ET2036WE**  
6 gang flush plate

**ET2038WE**  
8 gang flush plate

**E2030XWE**  
1 gang blank plate

**ET2030XWE**  
2 gang blank plate




### FLUSH PLATES

(Designed to BS5733)

**EA2031WE**  
1 gang architrave plate

**EA2032WE**  
2 gang architrave plate

**EA2033WE**  
3 gang architrave plate

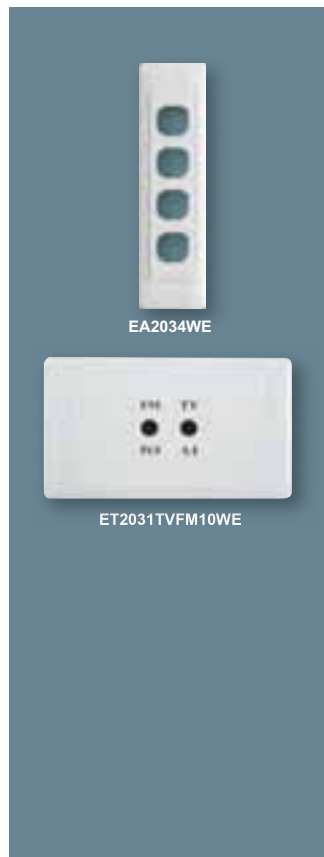

### FLUSH PLATES

(Designed to BS5733)

**EA2034WE**  
4 gang architrave plate

**ET2031TVFM10WE**  
2 gang TVFM cable outlet  
flash plate



### ARCHITRAVE SURROUNDS

(Designed to BS5733)

**EA2000WE**  
1 gang architrave surround

**EA2002WE**  
2 gang architrave surround

**SPECIAL  
ORDER**

Extended lead times  
may apply.

**SPECIAL  
ORDER**

Extended lead times  
may apply.



### COLOURED SURROUNDS

(Designed to BS5733)

**E2000 WE**  
White surround

**E2000 BK**  
Black surround

**E2000 RD**  
Red surround

**E2000 GY**  
Grey surround

*Note: Surrounds are available  
in 1 gang (E2000 xxx) & 2 gang  
(E2000 xxx)*



### COLOURED SURROUNDS

(Designed to BS5733)

**E2000 SG**  
Soft grey surround

**E2000 PB**  
Polar blue surround

**E2000 DO**  
Magnolia surround

**E2000 SH**  
Silver shadow surround



### COLOURED SURROUNDS

(Designed to BS5733)

**E2000 MY**  
Majestic yellow surround

**E2000 TQ**  
Turquoise surround

**E2000 BY**  
Burgundy surround

**E2000 BR**  
Brown surround



### COLOURED SURROUNDS

(Designed to BS5733)

**E2000 CM**  
Cream surround

**E2000 BG**  
Beige surround

**E2000 DS**  
Desert sand surround

**E2000 NU**  
Nutmeg surround





E2000PS



E2000 VI



E2000C MW



E2000C BW



E2000C WM



E2000C GM



E2000C CA



E2000C DA



E2000C PA



E2000C UE



E2000 BA



E2000 BB



E2000C GE



E2000C SE

## COLOURED SURROUNDS

(Designed to BS5733)

### E2000 PS

Pale salmon surround

### E2000 VI

Vanilla surround

## C - GRAPHIC SURROUNDS

(Designed to BS5733)

### E2000C MW

Mahogany surround

### E2000C BW

Bird's eye surround

### E2000C WM

Ajax white marble surround

### E2000C GM

Alpine green marble surround

## C - GRAPHIC SURROUNDS

(Designed to BS5733)

### E2000C CA

Checkers surround

### E2000C DA

Dancing rain surround

### E2000C PA

Purple dream surround

### E2000C UE

Gun metal electroplated surround

## C - GRAPHIC SURROUNDS

(Designed to BS5733)

### E2000 BA

Brushed aluminium surround

### E2000 BB

Brushed brass surround

### E2000C GE

Sun gold electroplated surround

### E2000C SE

Silver mirror electroplated surround



ET2000C RW



ET2000C BM

## C - GRAPHIC SURROUNDS

*(Designed to BS5733)*

### ET2000C RW

Red mahogany surround

---

### ET2000C BM

Brazilian black marble surround



E2031L23AS WE, E2031LD20NAS WE




E2032L23AS WE



E2033L23AS WE



E2031LBPRAS WE



E2031LPD600S WE




E2032LPD400S WE



E2031L23AS BK, E2031LD20NAS BK



E2032L23AS BK



E2033L23AS BK



E2031L23AS C1, E2031LD20NAS C1



E2032L23AS C1



E2033L23AS C1

## CLASSIC SERIES

(Designed to IEC60669-1, MS616, SS227)

### White

#### E2031L23AS WE

10A 1 gang 2 way switch

#### E2031LD20NAS WE

20A 1 gang DP switch

#### E2032L23AS WE

10A 2 gang 2 way switch

#### E2033L23AS WE

10A 3 gang 2 way switch

## CLASSIC SERIES

### White

#### E2031LBPRAS WE

10A 1 gang bell press  
(Designed to IEC60669-1, MS616, SS227)

#### E2031LPD600S WE

1 gang dimmer  
(Specifically designed to BS5518)

#### E2032LPD400S WE

2 gang dimmer  
(Specifically designed to BS5518)

## CLASSIC SERIES

(Designed to IEC60669-1, MS616, SS227)

### Black

#### E2031L23AS BK

10A 1 gang 2 way switch

#### E2031LD20NAS BK

20A 1 gang DP switch

#### E2032L23AS BK

10A 2 gang 2 way switch

#### E2033L23AS BK

10A 3 gang 2 way switch

#### E2031LBPRAS BK

10A 1 gang bell press

#### E2031LPD600S BK

1 gang dimmer  
(Specifically designed to BS5518)

#### E2032LPD400S BK

2 gang dimmer  
(Specifically designed to BS5518)

## CYBER SERIES

(Designed to IEC60669-1, MS616, SS227)

### Smoke

#### E2031L23AS C1

10A 1 gang 2 way switch

#### E2031LD20NAS C1

20A 1 gang DP switch

#### E2032L23AS C1

10A 2 gang 2 way switch

#### E2033L23AS C1

10A 3 gang 2 way switch

#### E2031LBPRAS C1

10A 1 gang bell press

#### E2031LPD600S C1

1 gang dimmer  
(Specifically designed to BS5518)

#### E2032LPD400S C1

2 gang dimmer  
(Specifically designed to BS5518)



### CYBER SERIES

(Designed to IEC60669-1,  
MS616, SS227)  
**Blue**

**E2031L23AS C2**  
10A 1 gang 2 way switch

**E2031LD20NAS C2**  
20A 1 gang DP switch

**E2032L23AS C2**  
10A 2 gang 2 way switch

**E2033L23AS C2**  
10A 3 gang 2 way switch

**E2031LBPRAS C2**  
10A 1 gang bell press

**E2031LPD600S C2**  
1 gang dimmer  
(Specifically designed to BS5518)

**E2032LPD400S C2**  
2 gang dimmer  
(Specifically designed to BS5518)



### CYBER SERIES

(Designed to IEC60669-1,  
MS616, SS227)  
**Red**

**E2031L23AS C3**  
10A 1 gang 2 way switch

**E2031LD20NAS C3**  
20A 1 gang DP switch

**E2032L23AS C3**  
10A 2 gang 2 way switch

**E2033L23AS C3**  
10A 3 gang 2 way switch

**E2031LBPRAS C3**  
10A 1 gang bell press

**E2031LPD600S C3**  
1 gang dimmer  
(Specifically designed to BS5518)

**E2032LPD400S C3**  
2 gang dimmer  
(Specifically designed to BS5518)



### CYBER SERIES

(Designed to IEC60669-1,  
MS616, SS227)  
**Green**

**E2031L23AS C4**  
10A 1 gang 2 way switch

**E2031LD20NAS C4**  
20A 1 gang DP switch

**E2032L23AS C4**  
10A 2 gang 2 way switch

**E2033L23AS C4**  
10A 3 gang 2 way switch

**E2031LBPRAS C4**  
10A 1 gang bell press

**E2031LPD600S C4**  
1 gang dimmer  
(Specifically designed to BS5518)

**E2032LPD400S C4**  
2 gang dimmer  
(Specifically designed to BS5518)



### CYBER SERIES

(Designed to IEC60669-1,  
MS616, SS227)  
**Silver Smoke**

**E2031L23AS C5**  
10A 1 gang 2 way switch

**E2031LD20NAS C5**  
20A 1 gang DP switch

**E2032L23AS C5**  
10A 2 gang 2 way switch

**E2033L23AS C5**  
10A 3 gang 2 way switch

**E2031LBPRAS C5**  
10A 1 gang bell press

**E2031LPD600S C5**  
1 gang dimmer  
(Specifically designed to BS5518)

**E2032LPD400S C5**  
2 gang dimmer  
(Specifically designed to BS5518)



E2031L23AS C6, E2031LD20NAS C6



E2032L23AS C6



E2033L23AS C6



E2031L23AS C7, E2031LD20NAS C7



E2032L23AS C7



E2033L23AS C7



E2031L23AS C8, E2031LD20NAS C8



E2032L23AS C8



E2033L23AS C8



E2031L23AS P1, E2031LD20NAS P1



E2032L23AS P1



E2033L23AS P1

## CYBER SERIES

(Designed to IEC60669-1, MS616, SS227)

Silver Blue

### E2031L23AS C6

10A 1 gang 2 way switch

### E2031LD20NAS C6

20A 1 gang DP switch

### E2032L23AS C6

10A 2 gang 2 way switch

### E2033L23AS C6

10A 3 gang 2 way switch

### E2031LBPRAS C6

10A 1 gang bell press

### E2031LPD600S C6

1 gang dimmer  
(Specifically designed to BS5518)

### E2032LPD400S C6

2 gang dimmer  
(Specifically designed to BS5518)

## CYBER SERIES

(Designed to IEC60669-1, MS616, SS227)

Silver Red

### E2031L23AS C7

10A 1 gang 2 way switch

### E2031LD20NAS C7

20A 1 gang DP switch

### E2032L23AS C7

10A 2 gang 2 way switch

### E2033L23AS C7

10A 3 gang 2 way switch

### E2031LBPRAS C7

10A 1 gang bell press

### E2031LPD600S C7

1 gang dimmer  
(Specifically designed to BS5518)

### E2032LPD400S C7

2 gang dimmer  
(Specifically designed to BS5518)

## CYBER SERIES

(Designed to IEC60669-1, MS616, SS227)

Silver Green

### E2031L23AS C8

10A 1 gang 2 way switch

### E2031LD20NAS C8

20A 1 gang DP switch

### E2032L23AS C8

10A 2 gang 2 way switch

### E2033L23AS C8

10A 3 gang 2 way switch

### E2031LBPRAS C8

10A 1 gang bell press

### E2031LPD600S C8

1 gang dimmer  
(Specifically designed to BS5518)

### E2032LPD400S C8

2 gang dimmer  
(Specifically designed to BS5518)

## PEARL SERIES

(Designed to IEC60669-1, MS616, SS227)

Blue

### E2031L23AS P1

10A 1 gang 2 way switch

### E2031LD20NAS P1

20A 1 gang DP switch

### E2032L23AS P1

10A 2 gang 2 way switch

### E2033L23AS P1

10A 3 gang 2 way switch

### E2031LBPRAS P1

10A 1 gang bell press

### E2031LPD600S P1

1 gang dimmer  
(Specifically designed to BS5518)

### E2032LPD400S P1

2 gang dimmer  
(Specifically designed to BS5518)



E2031L23AS P2, E2031LD20NAS P2



E2032L23AS P2



E2033L23AS P2



E2031L23AS P3, E2031LD20NAS P3



E2032L23AS P3



E2033L23AS P3




E2031L23AS D1, E2031LD20NAS D1




E2032L23AS D1



E2033L23AS D1



E2031L23AS D2, E2031LD20NAS D2



E2032L23AS D2



E2033L23AS D2

## PEARL SERIES

(Designed to IEC60669-1, MS616, SS227)

Red

### E2031L23AS P2

10A 1 gang 2 way switch

### E2031LD20NAS P2

20A 1 gang DP switch

### E2032L23AS P2

10A 2 gang 2 way switch

### E2033L23AS P2

10A 3 gang 2 way switch

### E2031LBPRAS P2

10A 1 gang bell press

### E2031LPD600S P2

1 gang dimmer  
(Specifically designed to BS5518)

### E2032LPD400S P2

2 gang dimmer  
(Specifically designed to BS5518)

## PEARL SERIES

(Designed to IEC60669-1, MS616, SS227)

Green

### E2031L23AS P3

10A 1 gang 2 way switch

### E2031LD20NAS P3

20A 1 gang DP switch

### E2032L23AS P3

10A 2 gang 2 way switch

### E2033L23AS P3

10A 3 gang 2 way switch

### E2031LBPRAS P3

10A 1 gang bell press

### E2031LPD600S P3

1 gang dimmer  
(Specifically designed to BS5518)

### E2032LPD400S P3

2 gang dimmer  
(Specifically designed to BS5518)

## DECO SERIES

(Designed to IEC60669-1, MS616, SS227)

Champagne

### E2031L23AS D1

10A 1 gang 2 way switch

### E2031LD20NAS D1

20A 1 gang DP switch

### E2032L23AS D1

10A 2 gang 2 way switch

### E2033L23AS D1

10A 3 gang 2 way switch

### E2031LBPRAS D1

10A 1 gang bell press

### E2031LPD600S D1

1 gang dimmer  
(Specifically designed to BS5518)

### E2032LPD400S D1

2 gang dimmer  
(Specifically designed to BS5518)

## DECO SERIES

(Designed to IEC60669-1, MS616, SS227)

Gold

### E2031L23AS D2

10A 1 gang 2 way switch

### E2031LD20NAS D2

20A 1 gang DP switch

### E2032L23AS D2

10A 2 gang 2 way switch

### E2033L23AS D2

10A 3 gang 2 way switch

### E2031LBPRAS D2

10A 1 gang bell press

### E2031LPD600S D2

1 gang dimmer  
(Specifically designed to BS5518)

### E2032LPD400S D2

2 gang dimmer  
(Specifically designed to BS5518)




E2031L23AS D3, E2031LD30NAS D3




E2032L23AS D3




E2033L23AS D3



E2031L23AS D4, E2031LD40NAS D4



E2032L23AS D4



E2033L23AS D4



E2031L23AS L1, E2031LD20NAS L1



E2032L23AS L1



E2033L23AS L1



E2031L23AS L2, E2031LD20NAS L2



E2032L23AS L2



E2033L23AS L2

## DECO SERIES

(Designed to IEC60669-1, MS616, SS227)

Silver

### E2031L23AS D3

10A 1 gang 2 way switch

### E2031LD30NAS D3

20A 1 gang DP switch

### E2032L23AS D3

10A 2 gang 2 way switch

### E2033L23AS D3

10A 3 gang 2 way switch

### E2031LBPRAS D3

10A 1 gang bell press

### E2031LPD600S D3

1 gang dimmer  
(Specifically designed to BS5518)

### E2032LPD400S D3

2 gang dimmer  
(Specifically designed to BS5518)

## DECO SERIES

(Designed to IEC60669-1, MS616, SS227)

Champagne Gun Metal

### E2031L23AS D4

10A 1 gang 2 way switch

### E2031LD40NAS D4

20A 1 gang DP switch

### E2032L23AS D4

10A 2 gang 2 way switch

### E2033L23AS D4

10A 3 gang 2 way switch

### E2031LBPRAS D4

10A 1 gang bell press

### E2031LPD600S D4

1 gang dimmer  
(Specifically designed to BS5518)

### E2032LPD400S D4

2 gang dimmer  
(Specifically designed to BS5518)

## LUXOR SERIES

(Designed to IEC60669-1, MS616, SS227)

Shadow Gold

### E2031L23AS L1

10A 1 gang 2 way switch

### E2031LD20NAS L1

20A 1 gang DP switch

### E2032L23AS L1

10A 2 gang 2 way switch

### E2033L23AS L1

10A 3 gang 2 way switch

### E2031LBPRAS L1

10A 1 gang bell press

### E2031LPD400S L1

1 gang dimmer  
(Specifically designed to BS5518)

### E2032LPD400S L1

2 gang dimmer  
(Specifically designed to BS5518)

## LUXOR SERIES

(Designed to IEC60669-1, MS616, SS227)

Shadow Silver

### E2031L23AS L2

10A 1 gang 2 way switch

### E2031LD20NAS L2

20A 1 gang DP switch

### E2032L23AS L2

10A 2 gang 2 way switch

### E2033L23AS L2

10A 3 gang 2 way switch

### E2031LBPRAS L2


10A 1 gang bell press

### E2031LPD600S L2


1 gang dimmer  
(Specifically designed to BS5518)

### E2032LPD400S L2


2 gang dimmer  
(Specifically designed to BS5518)



E2031L23AS L3, E2031LD20NAS L3



E2032L23AS L3



E2033L23AS L3



E2031L23AS L4, E2031LD20NAS L4



E2032L23AS L4



E2033L23AS L4




E2031L23AS L5, E2031LD20NAS L5



E2032L23AS L5




E2033L23AS L5



E2031L23AS L6, E2031LD20NAS L6



E2032L23AS L6



E2033L23AS L6

## LUXOR SERIES

(Designed to IEC60669-1, MS616, SS227)

### Black Diamond

#### E2031L23AS L3

10A 1 gang 2 way switch

#### E2031LD20NAS L3

20A 1 gang DP switch

#### E2032L23AS L3

10A 2 gang 2 way switch

#### E2033L23AS L3

10A 3 gang 2 way switch

#### E2031LBPRAS L3

10A 1 gang bell press

#### E2031LPD600S L3

1 gang dimmer  
(Specifically designed to BS5518)

#### E2032LPD400S L3

2 gang dimmer  
(Specifically designed to BS5518)

## LUXOR SERIES

(Designed to IEC60669-1, MS616, SS227)

### Sun Gold

#### E2031L23AS L4

10A 1 gang 2 way switch

#### E2031LD20NAS L4

20A 1 gang DP switch

#### E2032L23AS L4

10A 2 gang 2 way switch

#### E2033L23AS L4

10A 3 gang 2 way switch

#### E2031LBPRAS L4

10A 1 gang bell press

#### E2031LPD600S L4

1 gang dimmer  
(Specifically designed to BS5518)

#### E2032LPD400S L4

2 gang dimmer  
(Specifically designed to BS5518)

## LUXOR SERIES

(Designed to IEC60669-1, MS616, SS227)

### Sun Silver

#### E2031L23AS L5

10A 1 gang 2 way switch

#### E2031LD20NAS L5

20A 1 gang DP switch

#### E2032L23AS L5

10A 2 gang 2 way switch

#### E2033L23AS L5

10A 3 gang 2 way switch

#### E2031LBPRAS L5

10A 1 gang bell press

#### E2031LPD600S L5

1 gang dimmer  
(Specifically designed to BS5518)

#### E2032LPD400S L5

2 gang dimmer  
(Specifically designed to BS5518)

## LUXOR SERIES

(Designed to IEC60669-1, MS616, SS227)

### Sun Silver Gold

#### E2031L23AS L6

10A 1 gang 2 way switch

#### E2031LD20NAS L6

20A 1 gang DP switch

#### E2032L23AS L6

10A 2 gang 2 way switch

#### E2033L23AS L6

10A 3 gang 2 way switch

#### E2031LBPRAS L6

10A 1 gang bell press

#### E2031LPD600S L6

1 gang dimmer  
(Specifically designed to BS5518)

#### E2032LPD400S L6

2 gang dimmer  
(Specifically designed to BS5518)





E2000S WE



E2000S BK

## CLASSIC SERIES SURROUNDS

(Designed to BS5733)

### E2000S WE

White surround

### E2000S BK

Black surround



E2000S C5



E2000S C6



E2000S C7



E2000S C8

## CYBER SERIES SURROUNDS

(Designed to BS5733)

### E2000S C5

Silver smoke surround

### E2000S C6

Silver blue surround

### E2000S C7

Silver red surround

### E2000S C8

Silver green surround



E2000S P1



E2000S P2



E2000S P3

## PEARL SERIES SURROUNDS

(Designed to BS5733)

### E2000S P1

Blue surround

### E2000S P2

Red surround

### E2000S P3

Green surround



E2000S D1



E2000S D3



E2000S D4

## DECO SERIES SURROUNDS

(Designed to BS5733)

### E2000S D1

Champagne surround

### E2000S D3

Silver surround

### E2000S D4

Champagne gun metal surround



E2000S L1



E2000S L2



E2000S L3



E2000S L4

**LUXOR SERIES  
SURROUNDS**

*(Designed to BS5733)*

**E2000S L1**

Shadow gold surround

**E2000S L2**

Shadow silver surround

**E2000S L3**

Black diamond surround

**E2000S L4**

Sun gold surround



E2000S L5



E2000S L6

**LUXOR SERIES  
SURROUNDS**

*(Designed to BS5733)*

**E2000S L5**

Sun silver surround

**E2000S L6**

Sun silver gold surround



E3031H1 EBGs



E3032H1 EBGs



E3033H1 EBGs



E3034H1 EBGs



E3031H1 FWWW



E3032H1 FWWW



E3033H1 FWWW



E3034H1 FWWW



E3031HBP GS



E3031HBP WW



E3031HD20 EBGs



E3031HD20 EWWW

## FLUSH SWITCHES WITH LED

**E3031H1 EBGs or EWWW**  
10A 1 gang 1 way switch

**E3031H2 EBGs or EWWW**  
10A 1 gang 2 way switch

**E3032H1 EBGs or EWWW**  
10A 2 gang 1 way switch

**E3032H2 EBGs or EWWW**  
10A 2 gang 2 way switch

**E3033H1 EBGs or EWWW**  
10A 3 gang 1 way switch

**E3033H2 EBGs or EWWW**  
10A 3 gang 2 way switch

**E3034H1 EBGs or EWWW**  
10A 4 gang 1 way switch

**E3034H2 EBGs or EWWW**  
10A 4 gang 2 way switch

## WHITE FLUSH SWITCHES WITH FLUORESCENT INDICATOR

**E3031H1 FWWW**  
10A 1 gang 1 way switch

**E3031H2 FWWW**  
10A 1 gang 2 way switch

**E3032H1 FWWW**  
10A 2 gang 1 way switch

**E3032H2 FWWW**  
10A 2 gang 2 way switch

**E3033H1 FWWW**  
10A 3 gang 1 way switch

**E3033H2 FWWW**  
10A 3 gang 2 way switch

**E3034H1 FWWW**  
10A 4 gang 1 way switch

**E3034H2 FWWW**  
10A 4 gang 2 way switch

## BELL PUSH BUTTON SWITCHES

**E3031HBP GS or WW**  
4A bell push marked with bell symbol

## DOUBLE POLE SWITCHES WITH LED

**E3031HD20 EBGs or EWWW**  
20A double pole flush switch



E3031DR32 GS



E3031DR 45 WW



E3031DR32 EBGS



E3031DR45 EWWW

## APPLIANCE SWITCHES WITH/WITHOUT LED

**E3031DR32 GS or WW**  
32A double pole switch without  
LED

**E3031DR45 GS or WW**  
45A double pole switch without  
LED

**E3031DR32 EBGS or EWWW**  
32A double pole switch with LED

**E3031DR45 EBGS or EWWW**  
45A double pole switch with LED



E3031TB GS



E3031TB WW

## CONNECTION UNIT

**E3031TB GS or WW**  
25A connection unit



E3426 GS



E3015 WW

## FLUSH SINGLE SOCKET OUTLETS

**E3426 GS or WW**  
13A 3 pin socket outlet

**E3015 GS or WW**  
13A 3 pin switched socket outlet

**E3015D EBGS or EWWW**  
13A 3 pin switched socket outlet  
with LED



ET3426 GS



ET3025 WW

## FLUSH TWIN SOCKET OUTLETS

**ET3426 GS or WW**  
13A twin 3 pin socket outlet

**ET3025 GS or WW**  
13A twin 3 pin switched socket  
outlet

**ET3025D EBGS or EWWW**  
13A twin 3 pin switched socket  
outlet with LED



E3031TV GS




E3032VTW WW


## TV/FM CO-AXIAL OUTLETS

**E3031TV GS or WW**  
1 gang TV socket outlet

**E3032VTW GS or WW**  
2 gang vertical TV socket outlet



E3030X GS



ET3030X WW

## FLUSH PLATES

**E3030X GS or WW**  
1 gang blank plate

**ET3030X GS or WW**  
2 gang blank plate



EGGH3112A, EGGH3123A,  
EGGH311A, EGGH3115A



EGGM3112A, EGGM3123A,  
EGGM311A, EGGM3120A

## 10A, 15A & 20A FLUSH SWITCHES

(Designed to IEC60669-1,  
MS616, SS227)

### EGGH3112A

10A 1 gang 1 way gold hairline switch

### EGGH3123A

10A 1 gang 2 way gold hairline switch

### EGGH311A

10A 1 gang intermediate gold hairline switch

### EGGH3115A

15A 1 gang 2 way gold hairline switch

### EGGM3112A

10A 1 gang 1 way gold mirror switch

### EGGM3123A

10A 2 gang 2 way gold mirror switch

### EGGM311A

10A 1 gang intermediate gold mirror switch

### EGGM3120A

20A 1 gang 2 way gold mirror switch



EGSH3112A, EGSH3123A,  
EGSH311A



EGSM3112A, EGSM3123A,  
EGSM311A

## 10A FLUSH SWITCHES

(Designed to IEC60669-1,  
MS616, SS227)

### EGSH3112A

10A 1 gang 1 way stainless steel hairline switch

### EGSH3123A

10A 1 gang 2 way stainless steel hairline switch

### EGSH311A

10A 1 gang intermediate stainless steel hairline switch

### EGSM3112A

10A 1 gang 1 way stainless steel mirror switch

### EGSM3123A

10A 1 gang 2 way stainless steel mirror switch

### EGSM311A

10A 1 gang intermediate stainless steel mirror switch



EGGH3212A, EGGH3223A



EGGM3212A, EGGM3223A

## 10A FLUSH SWITCHES

(Designed to IEC60669-1,  
MS616, SS227)

### EGGH3212A

10A 2 gang 1 way gold hairline switch

### EGGH3223A

10A 2 gang 2 way gold hairline switch

### EGGM3212A

10A 2 gang 1 way gold mirror switch

### EGGM3223A

10A 2 gang 2 way gold mirror switch



EGSH3212A, EGSH3223A,  
EGSH3215A



EGSM3212A, EGSM3223A,  
EGSM3220A

## 10A FLUSH SWITCHES

(Designed to IEC60669-1,  
MS616, SS227)

### EGSH3212A

10A 2 gang 1 way stainless steel hairline switch

### EGSH3223A

10A 2 gang 2 way stainless steel hairline switch

### EGSH3215A

15A 2 gang 2 way stainless steel hairline switch

### EGSM3212A

10A 2 gang 1 way stainless steel mirror switch

### EGSM3223A

10A 2 gang 2 way stainless steel mirror switch

### EGSM3220A

20A 2 gang 2 way stainless steel mirror switch



EGGH3312A, EGGH3323A,  
EGGH3315A



EGGM3312A, EGGM3323A,  
EGGM3320A

## 10A, 15A & 20A FLUSH SWITCHES

(Designed to IEC60669-1,  
MS616, SS227)

### EGGH3312A

10A 3 gang 1 way gold hairline  
switch

### EGGH3323A

10A 3 gang 2 way gold hairline  
switch

### EGGH3315A

15A 3 gang 2 way gold hairline  
switch

### EGGM3312A

10A 3 gang 1 way gold mirror  
switch

### EGGM3323A

10A 3 gang 2 way gold mirror  
switch

### EGGM3320A

20A 3 gang 2 way gold mirror  
switch



EGSH3312A, EGS3323A



EGSM3312A, EGS3323A

## 10A FLUSH SWITCHES

(Designed to IEC60669-1,  
MS616, SS227)

### EGSH3312A

10A 3 gang 1 way stainless steel  
hairline switch

### EGSH3323A

10A 3 gang 2 way stainless steel  
hairline switch

### EGSM3312A

10A 3 gang 1 way stainless steel  
mirror switch

### EGSM3323A

10A 3 gang 2 way stainless steel  
mirror switch



EGGH3412A, EGGH3423A,  
EGGH3415A



EGGM3412A, EGGM3423A,  
EGGM3420A

## 10A, 15A & 20A FLUSH SWITCHES

(Designed to IEC60669-1,  
MS616, SS227)

### EGGH3412A

10A 4 gang 1 way gold hairline  
switch

### EGGH3423A

10A 4 gang 2 way gold hairline  
switch

### EGGH3415A

15A 4 gang 2 way gold hairline  
switch

### EGGM3412A

10A 4 gang 1 way gold mirror  
switch

### EGGM3423A

10A 4 gang 2 way gold mirror  
switch

### EGGM3420A

20A 4 gang 2 way gold mirror  
switch



EGSH3412A, EGS3423A



EGSM3412A, EGS3423A

## 10A FLUSH SWITCHES

(Designed to IEC60669-1,  
MS616, SS227)

### EGSH3412A

10A 4 gang 1 way stainless steel  
hairline switch

### EGSH3423A

10A 4 gang 2 way stainless steel  
hairline switch

### EGSM3412A

10A 4 gang 1 way stainless steel  
mirror switch

### EGSM3423A

10A 4 gang 2 way stainless steel  
mirror switch



## 20A DP FLUSH SWITCHES

(Designed to IEC60669-1, MS616, SS227)

### EGGH31D20A

20A 1 gang DP gold hairline switch

### EGGM31D20A

20A 1 gang DP gold mirror switch

### EGS31D20A

20A 1 gang DP stainless steel hairline switch

### EGSM31D20A

20A 1 gang DP stainless steel mirror switch



## 20A DP FLUSH SWITCHES WITH NEON

(Designed to IEC60669-1, MS616, SS227)

### EGGH32D20NA

20A 1 gang DP gold hairline with neon switch

### EGGM32D20NA


20A 1 gang DP gold mirror switch with neon

### EGS32D20NA

20A 1 gang DP stainless steel hairline switch with neon

### EGSM32D20NA

20A 1 gang DP stainless steel mirror switch with neon

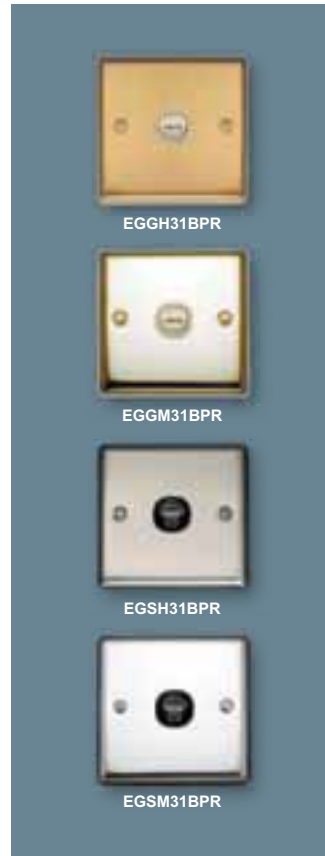

## BELL SWITCHES

(Designed to IEC60669-1, MS616, SS227)

### EGGH31BPR

10A gold hairline change-over contact marked "PRESS"

### EGGM31BPR

10A gold mirror change-over contact marked "PRESS"

### EGS31BPR

10A stainless steel hairline change-over contact marked "PRESS"

### EGSM31BPR

10A stainless steel mirror change-over contact marked "PRESS"



## BELL SWITCHES

(Designed to IEC60669-1, MS616, SS227)

### EGGH31BPA

1 gang gold hairline with bell symbol

### EGGM31BPA

1 gang gold mirror with bell symbol


### EGS31BPA

1 gang stainless steel hairline with bell symbol

### EGSM31BPA

1 gang stainless steel mirror with bell symbol



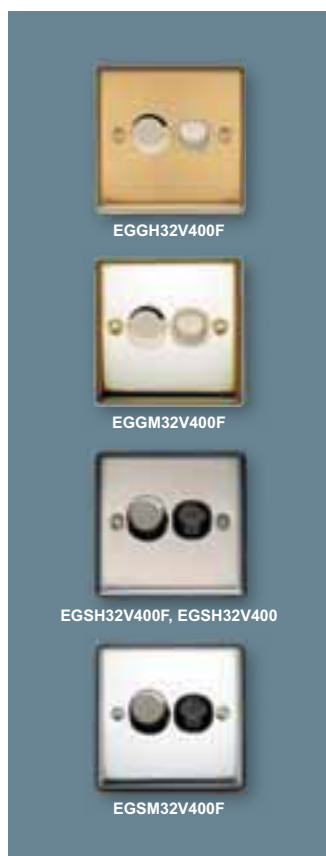

## FAN CONTROL SWITCHES

(Designed to BS5518)

### EGGH32V400F

400VA gold hairline fan control regulator

### EGGM32V400F

400VA gold mirror fan control regulator

### EGSH32V400F

400VA stainless steel hairline fan control regulator

### EGSH32V400

400VA 1 stainless steel hairline ceiling sweep

### EGSM32V400F

400VA stainless steel mirror fan control regulator



## DIMMER SWITCHES

(Designed to BS5518)

### EGGH32V500

500W gold hairline dimmer  
(For incandescent lamps only)

### EGGM32V500

500W gold mirror dimmer  
(For incandescent lamps only)

### EGSH32V500

500W stainless steel hairline dimmer  
(For incandescent lamps only)

### EGSM32V500

500W stainless steel mirror dimmer  
(For incandescent lamps only)



## 13A SWITCHED SOCKET OUTLETS

(Designed to BS1363, MS589, SS145)

### EGGH15

13A 1 gang 3 pin gold hairline switched socket outlet

### EGGM15

13A 1 gang 3 pin gold mirror switched socket outlet

### EGSH15

13A 1 gang 3 pin stainless steel hairline switched socket outlet

### EGSM15

13A 1 gang 3 pin stainless steel mirror switched socket outlet



## 13A SWITCHED SOCKET OUTLETS WITH NEON

(Designed to BS1363, MS589, SS145)

### EGGH15N

13A 1 gang 3 pin gold hairline switched outlet with neon

### EGGM15N

13A 1 gang 3 pin gold mirror switched socket outlet with neon

### EGSH15N

13A 1 gang 3 pin stainless steel hairline switched socket outlet with neon

### EGSM15N

13A 1 gang 3 pin stainless steel mirror switched socket outlet with neon



### 13A SWITCHED SOCKET OUTLETS

(Designed to BS1363, MS589, SS145)

#### EGGH25

13A 2 gang 3 pin gold hairline switched socket outlet

#### EGGM25

13A 2 gang 3 pin gold mirror switched socket outlet

#### EGS25

13A 2 gang 3 pin stainless steel hairline switched socket outlet

#### EGSM25

13A 2 gang 3 pin stainless steel mirror switched socket outlet



### 13A SWITCHED SOCKET OUTLETS WITH NEON

(Designed to BS1363, MS589, SS145)

#### EGGH25N

13A 2 gang 3 pin gold hairline switched socket outlet with neon

#### EGGM25N

13A 2 gang 3 pin gold mirror switched socket outlet with neon

#### EGS25N

13A 2 gang 3 pin stainless steel hairline switched socket outlet with neon

#### EGSM25N

13A 2 gang 3 pin stainless steel mirror switched socket outlet with neon



### 15A SWITCHED SOCKET OUTLETS

(Designed to BS546, SS472)

#### EGGH1515

15A 1 gang 3 pin gold hairline switched socket outlet

#### EGGM1515

15A 1 gang 3 pin gold mirror switched socket outlet

#### EGS1515

15A 1 gang 3 pin stainless steel hairline switched socket outlet

#### EGSM1515

15A 1 gang 3 pin stainless steel mirror switched socket outlet



### 15A SWITCHED SOCKET OUTLETS WITH NEON

(Designed to BS546, SS472)

#### EGGH1515N

15A 1 gang 3 pin gold hairline switched socket outlet with neon

#### EGGM1515N

15A 1 gang 3 pin gold mirror switched socket outlet with neon

#### EGS1515N

15A 1 gang 3 pin stainless steel hairline switched socket outlet with neon

#### EGSM1515N

15A 1 gang 3 pin stainless steel mirror switched socket outlet with neon



EGGMW1475

## 10A UNIVERSAL SOCKET OUTLET

(Designed to IEC884)

### EGGMW1475

10A 1 gang gold mirror socket outlet

\* Available in other finishes:

gold hairline  
- EGGHW1475,  
stainless steel hairline  
- EGSHW1475,  
stainless steel mirror  
- EGSMW1475.



EGGH31TBA



EGGM31TBA



EGSH31TBA



EGSM31TBA

## 25A CONNECTION UNITS

(Designed to BS5733)

### EGGH31TBA

25A gold hairline connection unit

### EGGM31TBA

25A gold mirror connection unit

### EGSH31TBA

15A stainless steel hairline connection unit

### EGSM31TBA

15A stainless steel mirror connection unit



EGGH31FSA



EGGM31FSA



EGSH31FSA



EGSM31FSA

## 13A FUSED CONNECTION UNITS

(Designed to BS1363)

### EGGH31FSA

13A 1 gang gold hairline fused connection unit

### EGGM31FSA

13A 1 gang gold mirror fused connection unit

### EGSH31FSA

13A 1 gang stainless steel hairline fused connection unit

### EGSM31FSA

13A 1 gang stainless steel mirror fused connection unit



EGGH32D15FS



EGGM32D15FS



EGSH32D15FS



EGSM32D15FS

## 13A FUSED CONNECTION UNITS WITH DP SWITCH

(Designed to BS1363)

### EGGH32D15FS

13A 2 gang gold hairline fused connection unit with DP switch

### EGGM32D15FS

13A 2 gang gold mirror fused connection unit with DP switch

### EGSH32D15FS

13A 2 gang stainless steel hairline fused connection unit with DP switch

### EGSM32D15FS

13A 2 gang stainless steel mirror fused connection unit with DP switch



EGGH33D15NFS



EGGM33D15NFS



EGSH33D15NFS



EGSM33D15NFS

### 13A FUSED CONNECTION UNITS WITH DP SWITCH & NEON

(Designed to BS1363)

#### EGGH33D15NFS

13A 2 gang gold hairline fused connection unit with DP switch & neon

#### EGGM33D15NFS

13A 2 gang gold mirror fused connection unit with DP switch & neon

#### EGSH33D15NFS

13A 2 gang stainless steel hairline fused connection unit with DP switch & neon

#### EGSM33D15NFS

13A 2 gang stainless steel mirror fused connection unit with DP switch & neon



EGGH32FSHD



EGGM32FSHD



EGSH32FSHD



EGSM32FSHD

### 13A FUSED CONNECTION UNITS WITH CABLE OUTLET (Designed to BS1363)

#### EGGH32FSHD

13A 1 gang gold hairline fused connection unit with cable outlet

#### EGGM32FSHD

13A 1 gang gold mirror fused connection unit with cable outlet

#### EGSH32FSHD

13A 1 gang stainless steel hairline fused connection unit with cable outlet

#### EGSM32FSHD

13A 1 gang stainless steel mirror fused connection unit with cable outlet



EGGH33D15FSHD



EGGM33D15FSHD



EGSH33D15FSHD



EGSM33D15FSHD

### 13A DP FUSED CONNECTION UNITS WITH DP SWITCH & CABLE OUTLET (Designed to BS1363)

#### EGGH33D15FSHD

13A 2 gang gold hairline fused connection unit with DP switch & cable outlet

#### EGGM33D15FSHD

13A 2 gang gold mirror fused connection unit with DP switch & cable outlet

#### EGSH33D15FSHD

13A 2 gang stainless steel hairline fused connection unit with DP switch & cable outlet

#### EGSM33D15FSHD

13A 2 gang stainless steel mirror fused connection unit with DP switch & cable outlet



EGGH34D15FSHD



EGGM34D15FSHD



EGSH34D15FSHD



EGSM34D15FSHD

### 13A DP FUSED CONNECTION UNITS WITH DP SWITCH, NEON & CABLE OUTLET (Designed to BS1363)

#### EGGH34D15FSHD

13A 2 gang gold hairline fused connection unit with DP switch, neon & cable outlet

#### EGGM34D15FSHD

13A 2 gang gold mirror fused connection unit with DP switch, neon & cable outlet

#### EGSH34D15FSHD

13A 2 gang stainless steel hairline fused connection unit with DP switch, neon & cable outlet

#### EGSM34D15FSHD

13A 2 gang stainless steel mirror fused connection unit with DP switch, neon & cable outlet



EGGM32D15FS



EGSM33D15NFS

## 15A DP FUSED CONNECTION UNITS

### EGGM32D15FS

15A 2 gang gold mirror DP fused connection unit with switch

### EGSM33D15NFS

15A 3 gang stainless steel mirror DP fused connection unit with switch & neon

*\* Available in following finishes:*

gold hairline  
- EGGHXXXX,  
gold mirror  
- EGGMXXXX,  
stainless steel hairline  
- EGGHXXXX,  
stainless steel mirror  
- EGSMXXXX.



EGGH31TV75



EGGM31TV75



EGSH31TV75



EGSM31TV75

## 75 OHM TV CO-AXIAL OUTLETS

### EGGH31TV75

75 ohm 1 gang gold hairline TV co-axial outlet

### EGGM31TV75

75 ohm 1 gang gold mirror TV co-axial outlet

### EGSH31TV75

75 ohm 1 gang stainless steel hairline TV co-axial outlet

### EGSM31TV75

75 ohm 1 gang stainless steel mirror TV co-axial outlet



EGGH32TV75



EGGM32TV75



EGSH32TV75



EGSM32TV75

## 75 OHM TV CO-AXIAL OUTLETS

### EGGH32TV75

75 ohm 2 gang gold hairline TVFM co-axial outlet

### EGGM32TV75

75 ohm 2 gang gold mirror TVFM co-axial outlet

### EGSH32TV75

75 ohm 2 gang stainless steel hairline TVFM co-axial outlet

### EGSM32TV75

75 ohm 2 gang stainless steel mirror TVFM co-axial outlet



EGGH31RJ66, EGGH31RJ88



EGGM31RJ66, EGGM31RJ88



EGSH31RJ66, EGGH31RJ88



EGSM31RJ66, EGGM31RJ88

## TELEPHONE SOCKET OUTLETS

### EGGH31RJ66

1 gang 6 wire gold hairline telephone socket outlet

### EGGH31RJ88

1 gang 8 wire gold hairline telephone socket outlet

### EGGM31RJ66

1 gang 6 wire gold mirror telephone socket outlet

### EGGM31RJ88

1 gang 8 wire gold mirror telephone socket outlet

### EGSH31RJ66

1 gang 6 wire stainless steel hairline telephone socket outlet

### EGSH31RJ88

1 gang 8 wire stainless steel hairline telephone socket outlet

### EGSM31RJ66

1 gang 6 wire stainless steel mirror telephone socket outlet

### EGSM31RJ88

1 gang 8 wire stainless steel mirror telephone socket outlet



## TELEPHONE SOCKET OUTLETS

### EGGH32RJ66

2 gang 6 wire gold hairline telephone socket outlet

### EGGH32RJ88

2 gang 8 wire gold hairline telephone socket outlet

### EGGM32RJ66

2 gang 6 wire gold mirror telephone socket outlet

### EGGM32RJ88

2 gang 8 wire gold mirror telephone socket outlet

### EGSH32RJ66

2 gang 6 wire stainless steel hairline telephone socket outlet

### EGSH32RJ88

2 gang 8 wire stainless steel hairline telephone socket outlet

### EGSM32RJ66

2 gang 6 wire stainless steel mirror telephone socket outlet

### EGSM32RJ88

2 gang 8 wire stainless steel mirror telephone socket outlet



## TELEPHONE SOCKET OUTLETS

*(Designed to British Standard)*

### EGGHW1417

1 gang 6 pin (BT) gold hairline master unit telephone socket outlet with shutter

### EGGMW1417

1 gang 6 pin (BT) gold mirror master unit telephone socket outlet with shutter

### EGSHW1417

1 gang 6 pin (BT) stainless steel hairline master unit telephone socket outlet with shutter

### EGSHW1417

1 gang 6 pin (BT) stainless steel mirror master unit telephone socket outlet with shutter



## TELEPHONE SOCKET OUTLET

### EGGHW1438

1 gang gold hairline telephone socket outlet with shutter



## HOTEL MESSAGE INDICATOR

*(Designed to IEC60669-1)*

### EGGHH4M

2 gang "DO NOT DISTURB" & "PLEASE CLEAN UP" with push button gold hairline

### EGGMH4MV

2 gang "DO NOT DISTURB" & "PLEASE CLEAN UP" with push button gold mirror-vertical





## HOTEL MESSAGE INDICATOR

(Designed to IEC60669-1)

### EGSHH4M

2 gang "DO NOT DISTURB" & "PLEASE CLEAN UP" with push button stainless steel hairline

### EGSMH4MV

2 gang "DO NOT DISTURB" & "PLEASE CLEAN UP" with push button stainless steel mirror-vertical



## FLUSH PLATES

(Designed to BS5733)

### EGGH31X

1 gang gold hairline blank plate

### EGGM31X

1 gang gold mirror blank plate

### EGS H31X

1 gang stainless steel hairline blank plate

### EGSM31X

1 gang stainless steel mirror blank plate



## FLUSH PLATES

(Designed to BS5733)

### EGGH31X2

2 gang gold hairline blank plate

### EGGM31X2

2 gang gold mirror blank plate

### EGS H31X2

2 gang stainless steel hairline blank plate

### EGMH31X2

2 gang stainless steel mirror blank plate



E192030, E192030MI



E1920A30, E1920A30MI



E1920C30, E1920C30MI



E1920F30, E1920F30MI



E192031



E1920A31



E1920C31



E1920F31



E1920R30, E1920R30MI



E1920R30P



E1920AR30, E1920AR30MI

## 10A SURFACE SWITCHES

(Designed to IEC60669-1, MS616, SS227)

### E192030

10A toggle surface switch with polished brass cover & porcelain base

### E192030MI

10A intermediate surface switch with polished brass cover & porcelain base

### E1920A30

10A toggle surface switch with antique brass cover & porcelain base

### E1920A30MI

10A intermediate surface switch with antique brass cover & porcelain base

## 10A SURFACE SWITCHES

(Designed to IEC60669-1, MS616, SS227)

### E1920C30

10A toggle surface switch with chrome cover & porcelain base

### E1920C30MI

10A intermediate surface switch with chrome cover & porcelain base

### E1920F30

10A toggle surface switch with florentine bronze cover & porcelain base

### E1920F30MI

10A intermediate surface switch with florentine bronze cover & porcelain base

## 10A SURFACE SWITCHES

(Designed to IEC60669-1, MS616, SS227)

### E192031

10A 30 Series surface grid assembly with polished brass cover & porcelain base

### E1920A31

10A 30 Series surface grid assembly with antique brass cover & porcelain base

### E1920C31

10A 30 Series surface grid assembly with chrome cover & porcelain base

### E1920F31

10A 30 Series surface grid assembly with florentine bronze cover & porcelain base

## 10A SURFACE SWITCHES

(Designed to IEC60669-1, MS616, SS227)

### E1920R30

10A toggle surface switch with ribbed polished brass cover & porcelain base

### E1920R30MI

10A intermediate surface switch with ribbed polished brass cover & porcelain base

### E1920R30P

10A 2 way toggle surface switch with ribbed polished brass cover, brown dolly & porcelain base

### E1920AR30

10A toggle surface switch with ribbed antique brass cover & porcelain base

### E1920AR30MI

10A intermediate surface switch with ribbed antique brass cover & porcelain base





E1920CR30, E1920CR30MI



E1920FR30, E1920FR30MI



E1920S30, E1920S30MI



E1920SA30, E1920SA30MI



E1920SC30, E1920SC30MI



E1920SF30, E1920SF30MI



E1920SR30, E1920SR30MI



E1920SAR30, E1920SAR30MI

**10A SURFACE SWITCHES**

*(Designed to IEC60669-1, MS616, SS227)*

**E1920CR30**

10A toggle surface switch with ribbed chrome cover & porcelain base

**E1920CR30MI**

10A intermediate surface switch with ribbed chrome cover & porcelain base

**E1920FR30**

10A toggle surface switch with ribbed florentine bronze cover & porcelain base

**E1920FR30MI**

10A intermediate surface switch with ribbed florentine bronze cover & porcelain base

**10A SURFACE SWITCHES**

*(Designed to IEC60669-1, MS616, SS227)*

**E1920S30**

10A shallow surface switch with polished brass cover

**E1920S30MI**

10A shallow intermediate surface switch with polished brass cover

**E1920SA30**

10A shallow surface switch with antique brass cover

**E1920SA30MI**

10A shallow intermediate surface switch with antique brass cover

**10A SURFACE SWITCHES**

*(Designed to IEC60669-1, MS616, SS227)*

**E1920SC30**

10A shallow surface switch with chrome cover

**E1920SC30MI**

10A shallow intermediate surface switch with chrome cover

**E1920SF30**

10A shallow surface switch with florentine bronze cover

**E1920SF30MI**

10A shallow intermediate surface switch with florentine bronze cover

**10A SURFACE SWITCHES**

*(Designed to IEC60669-1, MS616, SS227)*

**E1920SR30**

10A shallow surface switch with ribbed polished brass cover

**E1920SR30MI**

10A shallow intermediate surface switch with ribbed polished brass cover

**E1920SAR30**

10A shallow surface switch with ribbed antique brass cover

**E1920SAR30MI**

10A shallow intermediate surface switch with ribbed antique brass cover

**SPECIAL ORDER**

Extended lead times may apply.

**SPECIAL ORDER**

Extended lead times may apply.

**SPECIAL ORDER**

Extended lead times may apply.



E1920SRC30, E1920SRC30MI



E1920SFR30, E1920SFR30MI



E192030MD



E1920A30MD



E1920C30MD



E1920F30MD



E1920R30MD



E1920AR30MD



E1920CR30MD



E1920FR30MD



E1920S30MD



E1920SA30MD



E1920SC30MD



E1920SF30MD

## 10A SURFACE SWITCHES

(Designed to IEC60669-1, MS616, SS227)

### E1920SRC30

10A shallow surface switch with ribbed chrome cover

### E1920SRC30MI

10A shallow intermediate surface switch with ribbed chrome cover

### E1920SFR30

10A shallow surface switch with ribbed florentine bronze cover

### E1920SFR30MI

10A shallow intermediate surface switch with ribbed florentine bronze cover

## 10A DP SURFACE SWITCHES

(Designed to IEC60669-1, MS616, SS227)

### E192030MD

10A DP surface switch with polished brass cover & porcelain base

### E1920A30MD

10A DP surface switch with antique brass cover & porcelain base

### E1920C30MD

10A DP surface switch with chrome cover & porcelain base

### E1920F30MD

10A DP surface switch with florentine bronze cover & porcelain base

## 10A DP SURFACE SWITCHES

(Designed to IEC60669-1, MS616, SS227)

### E1920R30MD

10A DP surface switch with ribbed polished brass cover & porcelain base

### E1920AR30MD

10A DP surface switch with ribbed antique brass cover & porcelain base

### E1920CR30MD

10A DP surface switch with ribbed chrome cover & porcelain base

### E1920FR30MD

10A DP surface switch with ribbed florentine bronze cover & porcelain base

## 10A DP SURFACE SWITCHES

(Designed to IEC60669-1, MS616, SS227)

### E1920S30MD

10A shallow DP surface switch with polished brass cover

### E1920SA30MD

10A shallow DP surface switch with antique brass cover

### E1920SC30MD

10A shallow DP surface switch with chrome cover

### E1920SF30MD

10A shallow DP surface switch with florentine bronze cover

**SPECIAL  
ORDER**

Extended lead times  
may apply.

**SPECIAL  
ORDER**

Extended lead times  
may apply.



E1920SR30MD



E1920SAR30MD



E1920SRC30MD



E1920SFR30MD

## 10A DP SURFACE SWITCHES

(Designed to IEC60669-1, MS616, SS227)

### E1920SR30MD

10A shallow DP surface switch with ribbed polished brass cover

### E1920SAR30MD

10A shallow DP surface switch with ribbed antique brass cover

### E1920SRC30MD

10A shallow DP surface switch with ribbed chrome cover

### E1920SFR30MD

10A shallow DP surface switch with ribbed florentine bronze cover

**SPECIAL  
ORDER**

Extended lead times  
may apply.



E1920343



E1920A343



E1920C343



E1920F343

## 10A CEILING SWITCHES

(Designed to IEC60669-1, MS616, SS227)

### E1920343

10A pullcord ceiling switch (2 way) with polished brass cover

### E1920A343

10A pullcord ceiling switch (2 way) with antique brass cover

### E1920C343

10A pullcord ceiling switch (2 way) with chrome cover

### E1920F343

10A pullcord ceiling switch (2 way) with florentine bronze cover

**SPECIAL  
ORDER**

Extended lead times  
may apply.



E192030MBPR



E1920A30MBPR



E1920C30MBPR



E1920F30MBPR

## 10A BELL SWITCHES

(Designed to IEC60669-1, MS616, SS227)

### E192030MBPR

10A bell press return surface switch with polished brass cover & porcelain base

### E1920A30MBPR

10A bell press return surface switch with antique brass cover & porcelain base

### E1920C30MBPR

10A bell press return surface switch with chrome cover & porcelain base

### E1920F30MBPR

10A bell press return surface switch with florentine bronze cover & porcelain base



E1920R30MBPR



E1920AR30MBPR



E1920CR30MBPR



E1920FR30MBPR

## 10A BELL SWITCHES

(Designed to IEC60669-1, MS616, SS227)

### E1920R30MBPR

10A bell press return surface switch with ribbed polished brass cover & porcelain base

### E1920AR30MBPR

10A bell press return surface switch with ribbed antique brass cover & porcelain base

### E1920CR30MBPR

10A bell press return surface switch with ribbed chrome cover & porcelain base

### E1920FR30MBPR

10A bell press return surface switch with ribbed florentine bronze cover & porcelain base



E1920S30MBPR



E1920SA30MBPR



E1920SC30MBPR



E1920SF30MBPR

## 10A BELL SWITCHES

(Designed to IEC60669-1, MS616, SS227)

### E1920S30MBPR

10A shallow bell press return surface switch with polished brass cover

### E1920SA30MBPR

10A shallow bell press return surface switch with antique brass cover

### E1920SC30MBPR

10A shallow bell press return surface switch with chrome cover

### E1920SF30MBPR

10A shallow bell press return surface switch with florentine bronze cover



E1920400F



E1920A400F



E1920C400F



E1920F400F

## FAN CONTROL SWITCHES

(Designed to BS5518, EMC compliant)

### E1920400F

400VA fan control with polished brass cover & porcelain base

### E1920A400F

400VA fan control with antique brass cover & porcelain base

### E1920C400F

400VA fan control with chrome cover & porcelain base

### E1920F400F

400VA fan control with florentine bronze cover & porcelain base



E1920R400F



E1920AR400F



E1920CR400F



E1920FR400F

## FAN CONTROL SWITCHES

(Designed to BS5518, EMC compliant)

### E1920R400F

400VA fan control with ribbed polished brass cover & porcelain base

### E1920AR400F

400VA fan control with ribbed antique brass cover & porcelain base

### E1920CR400F

400VA fan control with ribbed chrome cover & porcelain base

### E1920FR400F

400VA fan control with ribbed florentine bronze cover & porcelain base



E1920S500F



E1920SR500F

## FAN CONTROL SWITCHES

(Designed to BS5518, EMC compliant)

### E1920S500F

500VA shallow base fan control with polished brass cover

### E1920SR500F

500VA shallow base fan control with ribbed polished brass cover



E1920450L, E1920450LLV



E1920A450L, E1920A450LLV

## DIMMER SWITCHES

(Designed to BS5518,  
EMC compliant)

### E1920450L

450W dimmer with polished brass cover & porcelain base

### E1920450LLV

450W low voltage dimmer with polished brass cover & porcelain base

### E1920A450L

450W dimmer with antique brass cover & porcelain base

### E1920A450LLV

450W low voltage dimmer with antique brass cover & porcelain base



E1920C400, E1920C400LV



E1920F400, E1920F400LV

## DIMMER SWITCHES

(Designed to BS5518,  
EMC compliant)

### E1920C400

400W dimmer with chrome cover & porcelain base

### E1920C400LV

400W low voltage dimmer with chrome cover & porcelain base

### E1920F400

400W dimmer with florentine bronze cover & porcelain base

### E1920F400LV

400W low voltage dimmer with florentine bronze cover & porcelain base



E1920R400, E1920R400LV



E1920AR400, E1920AR400LV

## DIMMER SWITCHES

(Designed to BS5518,  
EMC compliant)

### E1920R400

400W dimmer with ribbed polished brass cover & porcelain base

### E1920R400LV

400W low voltage dimmer with ribbed polished brass cover & porcelain base

### E1920AR400

400W dimmer with ribbed antique brass cover & porcelain base

### E1920AR400LV

400W low voltage dimmer with ribbed antique brass cover & porcelain base



E1920CR400, E1920CR400LV



E1920FR400, E1920FR400LV

## DIMMER SWITCHES

(Designed to BS5518,  
EMC compliant)

### E1920CR400

400W dimmer with ribbed chrome cover & porcelain base

### E1920CR400LV

400W low voltage dimmer with ribbed chrome cover & porcelain base

### E1920FR400

400W dimmer with ribbed florentine bronze cover & porcelain base

### E1920FR400LV

400W low voltage dimmer with ribbed florentine bronze cover & porcelain base





E1920S450L, E1920S450LLV



E1920SR450L, E1920SR450LLV

## DIMMER SWITCHES

(Designed to BS5518, EMC compliant)

### E1920S450L

450W surface mounted shallow base dimmer with polished brass cover

### E1920S450LLV

450W low voltage shallow base dimmer with ribbed polished brass cover

### E1920SR450L

450W surface mounted shallow base dimmer with ribbed chrome cover

### E1920SR450LLV

450W low voltage shallow base dimmer with ribbed chrome cover



E1920ES13 BS



E1920ES13 AB



E1920ES13 CH



E1920ES13 FB

## 10A SOCKET OUTLETS

(Designed to BS1363, MS589, SS227)

### E1920ES13 BS

13A surface socket outlet with polished brass cover

### E1920ES13 AB

13A surface socket outlet with antique brass cover

### E1920ES13 CH

13A surface socket outlet with chrome cover

### E1920ES13 FB

13A surface socket outlet with florentine bronze cover



E1920STV75 BS



E1920STV75 AB



E1920STV75 CH



E1920STV75 FB

## 75 OHM TV OUTLETS

### E1920STV75 BS

75 ohm surface mount TV outlet with polished brass cover

### E1920STV75 AB

75 ohm television surface socket switch with antique brass cover

### E1920STV75 CH

75 ohm television surface socket switch with chrome cover

### E1920STV75 FB

75 ohm television surface socket switch with florentine bronze cover



E1920SRTV75 BS



E1920SRTV75 AB



E1920SRTV75 CH



E1920SRTV75 FB

## 75 OHM TV SOCKET OUTLETS

### E1920SRTV75 BS

75 ohm surface mount TV socket outlet with ribbed polished brass cover

### E1920SRTV75 AB

75 ohm TV surface socket outlet with ribbed antique brass cover

### E1920SRTV75 CH

75 ohm TV surface socket outlet with ribbed chrome cover

### E1920SRTV75 FB

75 ohm TV surface socket outlet with ribbed florentine bronze cover



E1920MB1-NH




E1920MB1



E1920MB42-NH



E1920MB42



E1920MB2-NH



E1920MB2



E1920MB2L



E1920MB

## MOUNTING BLOCKS

### E1920MB1-NH

Classic range timber mounting block. 1 gang 90x90mm, square, blank (no holes).

### E1920MB1

Classic range timber mounting block. 1 gang 90x90mm, square

## MOUNTING BLOCKS

### E1920MB42-NH

Classic range timber mounting block. 4 gang 155x155mm, square, blank (no holes).

### E1920MB42

Classic range timber mounting block. 4 gang 155x155mm, square

## MOUNTING BLOCKS

### E1920MB2-NH

Classic range timber mounting block. 2 gang 90x155mm, rectangular, blank.

### E1920MB2L

Classic range timber mounting block. 2 gang 90x155mm, with large hole for dimmer

### E1920MB2

Classic range timber mounting block. 2 gang 90x155mm, rectangular.

## MOUNTING BLOCKS

### E1920MB

Classic range timber mounting block. 150x107mm, mounting centres 84 mm



**MOUNTING BLOCKS**

**E1920MB3-NH**  
Classic range timber mounting block. 3 gang 90x255mm, rectangular, blank.


**E1920MB4-NH**  
Classic range timber mounting block. 4 gang 90x280mm, rectangular, blank.



**MOUNTING BLOCKS**

**E1920MB3**  
Classic range timber mounting block. 3 gang 90x255mm, rectangular.

**E1920MB4**  
Classic range timber mounting block. 4 gang 90x280mm, rectangular.

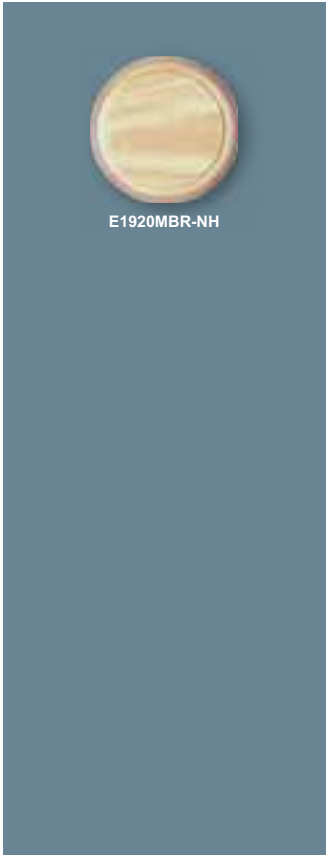

**MOUNTING BLOCKS**

**E1920MBR-NH**  
Classic range timber mounting block. 1 gang 88mm diameter, blank (no holes).



**MOUNTING BLOCKS**

**E1920MB2OV-NH**  
Classic range timber mounting block. 2 gang 90x155mm, oval type, blank (no holes).

**E1920MB2OV**  
Classic range timber mounting block. 2 gang 90x155mm, oval type.





ESM3112A, ESM3123A,  
ESM3115A, ESM3120A



ESM3212A, ESM3223A



ESM3312A, ESM3323A



ESM3412A, ESM3423A



ESM31D20A



ESM32D20NA

## 10A, 15A & 20A SWITCHES

(Designed to IEC60669-1,  
MS616, SS227)

### ESM3112A

10A ac 1 gang 1 way 2 terminal  
surface mounted switch

### ESM3123A

10A ac 1 gang 2 way 3 terminal  
surface mounted switch

### ESM3115A

15A 1 gang 2 way 4 terminal  
switch

### ESM3120A

20A 1 gang 2 way 4 terminal  
switch

## 10A SWITCHES

(Designed to IEC60669-1,  
MS616, SS227)

### ESM3212A

10A ac 2 gang 1 way 2 terminal  
surface mounted switch

### ESM3223A

10A ac 2 gang 2 way 3 terminal  
surface mounted switch

## 10A SWITCHES

(Designed to IEC60669-1,  
MS616, SS227)

### ESM3312A

10A 3 gang 1 way 2 terminal  
surface mounted switch

### ESM3323A

10A 3 gang 2 way 3 terminal  
surface mounted switch

### ESM3412A

10A ac 4 gang 1 way 2 terminal  
surface mounted switch

### ESM3423A

10A ac 4 gang 2 way 3 terminal  
surface mounted switch

## 20A DP SWITCHES

(Designed to IEC60669-1,  
MS616, SS227)

### ESM31D20A

20A DP switch

### ESM32D20NA

20A DP switch with neon



### 13A & 15A SWITCHED SOCKET OUTLETS

#### ESM15

13A ac 1 gang switched socket outlet  
(Designed to BS1363, MS589, SS145)

#### ESM1515

15A ac 1gang switched socket outlet  
(Designed to BS546, SS472)

#### ESM25

13A ac 2 gang switched socket outlet  
(Designed to BS1363, MS589, SS145)



### 10A & 13A FUSED CONNECTION UNITS

(Designed to British Standard)

#### ESM31FSA

13A 1 gang 30FS fused connection unit  
(Designed to BS1363)

#### ESM32FSA

10A 2 gang grip with 2 way 4 terminal switch & 30FS fused connection unit

#### ESM32FSHDA

2 gang grip with 30FS fused connection unit & 30HD cord grip

#### ESM32FSNA

2 gang grip with 30FS connection unit & 30N red neon



### MOUNTING GRIDS

(Designed to BS5733)

#### ESM31

1 gang grid with epoxy powder coated metal plate & box

#### ESM32

2 gang grid with epoxy powder coated metal plate & box

#### ESM34

4 gang grid with epoxy powder coated metal plate & box



CSS116, CSS120, CSS125,  
CSS132, CSS140



CSS116N, CSS120N, CSS125N,  
CSS132N, CSS140N



CSS216, CSS220, CSS225,  
CSS232, CSS240



CSS216N, CSS220N, CSS225N,  
CSS232N, CSS240N

## IP66 16A, 20A, 25A, 32A & 40A SURFACE MOUNT ISOLATORS - CSS SERIES

(Designed to IEC60529,  
IEC60947-3)

**CSS116**  
16A 250V surface mount isolator

**CSS120**  
20A 250V surface mount isolator

**CSS125**  
25A 250V surface mount isolator

**CSS132**  
32A 250V surface mount isolator

**CSS140**  
40A 250V surface mount isolator

## IP66 16A, 20A, 25A, 32A & 40A SURFACE MOUNT ISOLATORS WITH NEON - CSS SERIES

(Designed to IEC60529,  
IEC60947-3)

**CSS116N**  
16A 250V surface mount isolator  
with neon

**CSS120N**  
20A 250V surface mount isolator  
with neon

**CSS125N**  
25A 250V surface mount isolator  
with neon

**CSS132N**  
32A 250V surface mount isolator  
with neon

**CSS140N**  
40A 250V surface mount isolator  
with neon

## IP66 16A, 20A, 25A, 32A & 40A DP SURFACE MOUNT ISOLATORS - CSS SERIES

(Designed to IEC60529,  
IEC60947-3)

**CSS216**  
16A 500V DP surface mount  
isolator

**CSS220**  
20A 500V DP surface mount  
isolator

**CSS225**  
25A 500V DP surface mount  
isolator

**CSS232**  
32A 500V DP surface mount  
isolator

**CSS240**  
40A 500V DP surface mount  
isolator

## IP66 16A, 20A, 25A, 32A & 40A DP SURFACE MOUNT ISOLATORS WITH NEON - CSS SERIES

(Designed to IEC60529,  
IEC60947-3)

**CSS216N**  
16A 500V DP surface mount  
isolator with neon

**CSS220N**  
20A 500V DP surface mount  
isolator with neon

**CSS225N**  
25A 500V DP surface mount  
isolator with neon

**CSS232N**  
32A 500V DP surface mount  
isolator with neon

**CSS240N**  
40A 500V DP surface mount  
isolator with neon



CSS316, CSS320, CSS325,  
CSS332, CSS340



CSS316N, CSS320N, CSS325N,  
CSS332N, CSS340N



CSW110, CSW110BPR,  
CSW120, CSW120N



CSW1102, CSW1202, CSW1202N



CSW110N, CSW110BPRN, SW120N,  
CSW120N



CSW1102N, CSW1202N, CSW1202N

## IP66 16A, 20A, 25A, 32A & 40A TP SURFACE MOUNT ISOLATORS - CSS SERIES

(Designed to IEC60529,  
IEC60947-3)

### CSS316

16A 500V TP surface mount  
isolator

### CSS320

20A 500V TP surface mount  
isolator

### CSS325

25A 500V TP surface mount  
isolator

### CSS332

32A 500V TP surface mount  
isolator

### CSS340

40A 500V TP surface mount  
isolator

## IP66 16A, 20A, 25A, 32A & 40A TP SURFACE MOUNT ISOLATORS WITH NEON

### - CSS SERIES

(Designed to IEC60529,  
IEC60947-3)

### CSS316N

16A 500V TP surface mount  
isolator with neon

### CSS320N

20A 500V TP surface mount  
isolator with neon

### CSS325N

25A 500V TP surface mount  
isolator with neon

### CSS332N

32A 500V TP surface mount  
isolator with neon

### CSS340N

40A 500V TP surface mount  
isolator with neon

## IP66 10A, 16A & 20A SURFACE MOUNT SWITCHES

### - CSW SERIES

(Designed to IEC60669-1,  
IEC60529)

### CSW110

10A 250V 1 gang 2 way surface  
mount switch with looping  
terminal

### CSW110BPR

10A 250V 1 gang 2 way surface  
mount bell press switch with  
looping terminal

### CSW120

16A 250V 1 gang 2 way surface  
mount switch with looping  
terminal

### CSW120

20A 250V 1 gang 2 way surface  
mount switch with looping  
terminal

### CSW1102

10A 250V 2 gang 2 way surface  
mount switch with looping  
terminal

### CSW1202

16A 250V 2 gang 2 way surface  
mount switch with looping  
terminal

### CSW1202

20A 250V 2 gang 2 way surface  
mount switch with looping  
terminal

## IP66 10A, 16A & 20A SURFACE MOUNT SWITCHES WITH NEON

### - CSW SERIES

(Designed to IEC60669-1,  
IEC60529)

### CSW110N

10A 250V 1 gang 2 way surface  
mount switch with looping  
terminal with neon

### CSW110BPRN

10A 250V 1 gang 2 way surface  
mount bell press switch with  
looping terminal with neon

### CSW120N

16A 250V 1 gang 2 way surface  
mount switch with looping  
terminal with neon

### CSW120N

20A 250V 1 gang 2 way surface  
mount switch with looping  
terminal with neon

### CSW1102N

10A 250V 2 gang 2 way surface  
mount switch with looping  
terminal with neon

### CSW1202N

16A 250V 2 gang 2 way surface  
mount switch with looping  
terminal with neon

### CSW1202N

20A 250V 2 gang 2 way surface  
mount switch with looping  
terminal with neon



CSW220



CSW2202

## IP66 20A DP SURFACE MOUNT SWITCHES - CSW SERIES

(Designed to IEC60669-1, IEC60529)

### CSW220

20A 500V 1 gang DP surface mount isolator switch

### CSW2202

20A 500V 2 gang DP surface mount isolator switch



CSW220N



CSW2202N

## IP66 20A DP SURFACE MOUNT SWITCHES WITH NEON - CSW SERIES

(Designed to IEC60669-1, IEC60529)

### CSW220N

20A 500V 1 gang DP surface mount isolator switch with neon

### CSW2202N

20A 500V 2 gang DP surface mount isolator switch with neon



CSO313, CSO315RP, CSO316RP

## IP56 13A, 15A & 16A SURFACE MOUNT SOCKET OUTLETS - CSO SERIES

### CSO313

13A 250V surface mount socket outlet

(Designed to BS1363-2, IEC60529)

### CSO3132

13A 250V surface mount twin socket outlet

(Designed to BS1363-2)

### CSO315RP

15A 250V surface mount socket outlet

(Designed to BS546, IEC60529)

### CSO316RP

16A 250V surface mount socket outlet

(Designed to IS1293, IEC60529)



CSC313, CSC315RP, CSC316RP

## IP56 13A, 15A & 16A SURFACE MOUNT SWITCHED SOCKET OUTLETS - CSC SERIES

### CSC313

13A single pole switched socket outlet

(Designed to BS1363-2, IEC60529)

### CSC315RP

15A single pole switched socket outlet

(Designed to BS546, IEC60529)

### CSC316RP

16A single pole switched socket outlet

(Designed to IS1293, IEC60529)



CSC313N, CSC315RPN, CSC316RPN



CSC313D, CSC315RPD, CSC316RPD



CSC313DN, CSC315RPDN,  
CSC316RPDN



E551US



E552US

## IP56 13A, 15A & 16A SURFACE MOUNT SWITCHED SOCKET OUTLETS WITH NEON - CSC SERIES

### CSC313N

13A single pole switched socket outlet with neon  
(Designed to BS1363-2, IEC60529)

### CSC315RPN

15A single pole switched socket outlet with neon  
(Designed to BS546, IEC60529)

### CSC316RPN

16A single pole switched socket outlet with neon  
(Designed to IS4615, IEC60529)

## IP56 13A, 15A & 16A DP SURFACE MOUNT SWITCHED SOCKET OUTLETS - CSC SERIES

### CSC313D

13A DP surface mount switched socket outlet  
(Designed to BS1363-2, IEC60529)

### CSC315RPD

15A DP surface mount switched socket outlet  
(Designed to BS546, IEC60529)

### CSC316RPD

16A DP surface mount switched socket outlet  
(Designed to IS4615, IEC60529)

## IP56 13A, 15A & 16A DP SURFACE MOUNT SWITCHED SOCKET OUTLETS WITH NEON - CSC SERIES

### CSC313DN

13A DP surface mount switched socket outlet with neon  
(Designed to BS1363-2, IEC60529)

### CSC315RPDN

15A DP surface mount switched socket outlet with neon  
(Designed to BS546, IEC60529)

### CSC316RPDN

16A DP surface mount switched socket outlet with neon  
(Designed to IS4615, IEC60529)

## IP55 13A SOCKETS

### E551US

IP55 230V 13A 1 gang unswitched socket

### E551SS

IP55 230V 13A 1 gang switched socket

### E552US

IP55 230V 13A 2 gang unswitched socket



E5512S



E5522S

## IP 20AX SWITCH

### E5512S

IP55 20AX 1 gang 2 way switch

### E5522S

IP55 20AX 2 gang 2 way switch

### E55PB

IP55 20AX push button



E55CB

## ACCESSORIES

### E55CB

Connection box

### E55GP

Grommet (pack of 10)

### E55BC

Box coupler



56SW110, 56SW110HD, 56SW1102,  
56SW110I, 56SW115, 56SW115HD,  
56SW1152

## IP66 10A & 15A SURFACE SWITCHES

(Designed to IEC60669-1,  
IEC60529)

### 56SW110

10A 250V 1 gang 1 way 3  
terminal surface rotary switch

### 56SW110HD

10A 250V 1 gang surface rotary  
switch

### 56SW1102

10A 250V 1 gang 2 way 4  
terminal surface rotary switch

### 56SW110I

10A 250V 1 gang surface rotary  
switch

### 56SW115

15A 250V 1 gang 1 way 3  
terminal surface rotary switch

### 56SW115HD

15A 250V 1 gang surface rotary  
switch

### 56SW1152

15A 250V 1 gang 2 way 4  
terminal surface rotary switch



56SW120, 56SW132, 56SW150,  
56SW163

## IP66 20A, 32A, 50A & 63A SURFACE SWITCHES

(Designed to IEC60669-1,  
IEC60529)

### 56SW120

20A 250V 1 gang surface rotary  
switch

### 56SW132

32A 250V 1 gang surface rotary  
switch

### 56SW150

50A 250V 1 gang surface rotary  
switch

### 56SW163

63A 250V 1 gang surface rotary  
switch



56SW220, 56SW232, 56SW250,  
56SW263



56SW310, 56SW320, 56SW320C,  
56SW332, 56SW332C



56SW350, 56SW350C, 56SW363



56SW420



56SW3632

## IP66 20A, 32A, 50A & 63A DP SURFACE SWITCHES

(Designed to IEC60669-1,  
IEC60529)

### 56SW220

20A 500V 1 gang DP surface  
rotary switch

### 56SW232

32A 500V 1 gang DP surface  
rotary switch

### 56SW250

50A 500V 1 gang DP surface  
rotary switch

### 56SW263

63A 500V 1 gang DP surface  
rotary switch

## IP66 10A, 20A & 32A TP SURFACE SWITCHES

(Designed to IEC60669-1,  
IEC60529)

### 56SW310

10A 500V 1 gang TP surface  
rotary switch

### 56SW320

20A 500V 1 gang TP surface  
rotary switch

### 56SW320C

20A 500V 1 gang TP surface  
rotary switch with 2A control  
circuit

### 56SW332

32A 500V 1 gang TP surface  
rotary switch

### 56SW332C

32A 500V 1 gang TP surface  
rotary switch with 2A control  
circuit

## IP66 50A & 63A TP SURFACE SWITCHES

(Designed to IEC60669-1,  
IEC60529)

### 56SW350

50A 500V 1 gang TP surface  
rotary switch

### 56SW350C

50A 500V 1 gang TP surface  
rotary switch with 2A control  
circuit

### 56SW363

63A 500V 1 gang TP surface  
rotary switch

### 56SW3632

63A 500V 1 gang TP surface  
rotary switch with 2 gang  
enclosure

## IP66 20A FOUR POLE SURFACE SWITCH

(Designed to IEC60669-1,  
IEC60529)

### 56SW420

20A 440V 1 gang 4 pole surface  
rotary switch





56K1SW115, 56K1SW120, 56K1SW132,  
56K1SW150



56K1SW220, 56K1SW232, 56K1SW250



56K1SW310, 56K1SW320, 56K1SW332,  
56K1SW350



56K2SW115, 56K2SW120, 56K2SW132,  
56K2SW150

## IP66 15A, 20A, 32A & 50A KEY OPERATED STANDARD SECURITY SWITCHES

(Designed to IEC60669-1, IEC60529)

### 56K1SW115

15A 250V key operated switch

### 56K1SW120

20A 250V key operated switch

### 56K1SW132

32A 250V key operated switch

### 56K1SW150

50A 250V key operated switch

\* For locking in the 'OFF' position only

## IP66 20A, 32A & 50A DP KEY OPERATED STANDARD SECURITY SWITCHES

(Designed to IEC60669-1, IEC60529)

### 56K1SW220

20A 500V DP key operated switch

### 56K1SW232

32A 500V DP key operated switch

### 56K1SW250

50A 500V DP key operated switch

\* For locking in the 'OFF' position only

## IP66 10A, 20A, 32A & 50A TP KEY OPERATED STANDARD SECURITY SWITCHES

(Designed to IEC60669-1, IEC60529)

### 56K1SW310

10A 500V TP key operated switch

### 56K1SW320

20A 500V TP key operated switch

### 56K1SW332

32A 500V TP key operated switch

### 56K1SW350

50A 500V TP key operated switch

\* For locking in both 'ON' & 'OFF' position only

## IP66 15A, 20A, 32A & 50A KEY OPERATED STANDARD SECURITY SWITCHES

(Designed to IEC60669-1, IEC60529)

### 56K2SW115

15A 250V key operated switch

### 56K2SW120

20A 250V key operated switch

### 56K2SW132

32A 250V key operated switch

### 56K2SW150

50A 250V key operated switch

\* For locking in both 'ON' & 'OFF' position only



56K2SW220, 56K2SW232, 56K2SW250



56K2SW310, 56K2SW320, 56K2SW332,  
56K2SW350



56K1SW115MS, 56K1SW132MS,  
56K1SW310MS



56K2SW115MS, 56K2SW132MS,  
56K2SW310MS

### IP66 20A, 32A & 50A DP KEY OPERATED STANDARD SECURITY SWITCHES

(Designed to IEC60669-1,  
IEC60529)

**56K2SW220**  
20A 500V DP key operated switch

**56K2SW232**  
32A 500V DP key operated switch

**56K2SW250**  
50A 500V DP key operated switch

\* For locking in both 'ON' & 'OFF'  
position only

### IP66 10A, 20A, 32A & 50A TP KEY OPERATED STANDARD SECURITY SWITCHES

(Designed to IEC60669-1,  
IEC60529)

**56K2SW310**  
10A 500V TP key operated switch

**56K2SW320**  
20A 500V TP key operated switch

**56K2SW332**  
32A 500V TP key operated switch

**56K2SW350**  
50A 500V TP key operated switch

\* For locking in both 'ON' & 'OFF'  
position only

### IP66 10A, 15A & 32A KEY OPERATED MEDIUM SECURTY SWITCHES

(Designed to IEC60669-1,  
IEC60529)

**56K1SW115MS**  
15A 250V key operated switch

**56K1SW132MS**  
32A 250V key operated switch

**56K1SW310MS**  
10A 500V TP key operated switch

\* For locking in the 'OFF' position  
only

### IP66 10A, 15A & 32A KEY OPERATED MEDIUM SECURTY SWITCHES

(Designed to IEC60669-1,  
IEC60529)

**56K2SW115MS**  
15A 250V key operated switch

**56K2SW132MS**  
32A 250V key operated switch

**56K2SW310MS**  
10A 500V TP key operated switch

\* For locking in both 'ON' & 'OFF'  
position only



56K1SW115HS, 56K1SW132HS,  
56K1SW310HS



56SWH325, 56SWH340, 56SWH363,  
56SWH380



56SWH425, 56SWH440, 56SWH463



M56SW110HD, M56SW120, M56SW132,  
M56SW150, M56SW163

## IP66 10A, 15A & 32A KEY OPERATED HIGH SECURTY SWITCHES

(Designed to IEC60669-1,  
IEC60529)

### 56K1SW115HS

15A 250V key operated switch

### 56K1SW132HS

32A 250V key operated switch

### 56K1SW310HS

10A 500V TP key operated switch

\* For locking in the 'OFF' position  
only

## IP56 25A, 40A, 63A & 80A TP HEAVY - DUTY SURFACE SWITCHES

(Designed to IEC60669-1,  
IEC60529)

### 56SWH325

25A 500V TP heavy - duty surface  
switch

### 56SWH340

40A 500V TP heavy - duty surface  
switch

### 56SWH363

63A 500V TP heavy - duty surface  
switch

### 56SWH380

80A 500V TP heavy - duty surface  
switch

## IP56 25A, 40A & 63A FOUR POLE HEAVY - DUTY SURFACE SWITCHES

(Designed to IEC60669-1,  
IEC60529)

### 56SWH425

25A 500V 4 pole heavy - duty  
surface switch

### 56SWH440

40A 500V 4 pole heavy - duty  
surface switch

### 56SWH463

63A 500V 4 pole heavy - duty  
surface switch

## M56 SERIES - 10A, 20A, 32A, 50A & 63A SURFACE SWITCHES

(Designed to IEC60669-1,  
IEC60529)

### M56SW110HD

10A 250V surface switch

### M56SW120

20A 250V surface switch

### M56SW132

32A 250V surface switch

### M56SW150

50A 250V surface switch

### M56SW163

63A 250V surface switch



M56SW220, M56SW232, M56SW250,  
M56SW263



M56SW310, M56SW320, M56SW332,  
M56SW350A, M56SW350B,  
M56SW363A, M56SW363B



M56SW420, M56SW432



56SW220CO



56SW420CO

## M56 SERIES - 20A, 32A, 50A & 63A DP SURFACE SWITCHES

(Designed to IEC60669-1, IEC60529)

### M56SW220

20A 500V DP surface switch

### M56SW232

32A 500V DP surface switch

### M56SW250

50A 500V DP surface switch

### M56SW263

63A 500V DP surface switch

## M56 SERIES - 10A, 20A, 32A, 50A & 63A TP SURFACE SWITCHES

(Designed to IEC60669-1, IEC60529)

### M56SW310

10A 500V TP surface switch

### M56SW320

20A 500V TP surface switch

### M56SW332

32A 500V TP surface switch

### M56SW350A

50A 500V TP surface switch

### M56SW350B

50A 500V TP surface switch

### M56SW363A

63A 500V TP surface switch

### M56SW363B

63A 500V TP surface switch

## M56 SERIES - 20A & 32A FOUR POLE SURFACE SWITCHES

(Designed to IEC60669-1, IEC60529)

### M56SW420

20A 500V 4 pole surface switch

### M56SW432

32A 500V 4 pole surface switch

## IP66 20A CHANGE - OVER & REVERSING SWITCHES

(Designed to IEC60669-1, IEC60529)

### 56SW220CO

20A 500V DP change - over switch

### 56SW420CO

20A 500V 4 pole change - over switch



56SSW10, 56SSW10I



56SSW15



56SSW210, 56SSW215

## IP56 10A & 15A SWITCHES WITH SLIDING SWITCH DOLLIES

(Designed to IEC60669-1, IEC60529)

### 56SSW10

10A 250V single sliding switch

### 56SSW10I

10A 250V intermediate sliding switch

### 56SSW15

15A 250V single sliding switch

### 56SSW210

10A 250V DP double sliding switch

### 56SSW215

15A 250V DP double sliding switch



56PB



56PBS



56PBS1



56PBS2

## IP66 10A PUSH BUTTON CONTROL STATIONS

(Designed to IEC60669-1, IEC60529)

### 56PB

10A 250V start control station with green push button

### 56PBS

10A 250V stop control station with red push button

### 56PBS1

10A 250V emergency stop station with mushroom head twist reset & red push button

### 56PBS2

10A 250V stop station with mushroom head twist reset & red push button labelled stop only



562PB



562PBS1

## IP66 10A PUSH BUTTON CONTROL STATIONS

(Designed to IEC60669-1, IEC60529)

### 562PB

10A 250V stopstart control station with a red extended head push button & green flush head start button

### 562PBS1

10A 250V stopstart control station with a red mushroom head push button & green flush head start button



M56PBS1

## M56 10A PUSH BUTTON

(Designed to IEC60669-1, IEC60529)

### M56PBS1

10A 240V emergency stop station with mushroom head twist reset & red push button



56TC, 56TC7



56TCB, 56TCB7



56TCDB



56SWT216

## IP66 10A, 15A & 16A SURFACE MOUNT TIMER SWITCHES

(Designed to IEC60669-1,  
IEC60529)

### 56TC

15A 250V 24 hour synchronous  
surface mount timer

### 56TC7

15A 250V 7 days synchronous  
surface mount timer

### 56TCB

15A 250V 24 hour quartz  
synchronous surface mount timer  
with battery backup

### 56TCB7

15A 250V 7 days quartz  
synchronous surface mount timer  
with battery backup

### 56TCDB

10A 250V digital surface mount  
timer

### 56SWT216

16A 250V ac DP 2 hour surface  
mount timer - rated IP56



56P21532

## IP66 10A & 15A 2 PIN PLUGS

### 56P21532

15A 250V 2 flat pin polarised  
straight plug  
(Designed to IEC60529, BS546,  
SS227)



56P310RP



56P310



56P313



56P315

## IP66 10A, 13A & 15A 3 PIN STRAIGHT PLUGS

### 56P310RP

10A 250V 3 round pin straight  
plug  
(Designed to Australian Standard)

### 56P310

10A 250V 3 flat pin straight plug  
(Designed to Australian Standard)

### 56P313

13A 250V 3 pin straight plug  
(Designed to IEC60529, BS1363,  
MS616, SS227)

### 56P315

15A 250V 3 pin straight plug  
(Designed to IEC60529, BS546,  
SS472)



56P315RP, 56P320

## IP66 15A & 20A 3 PIN STRAIGHT PLUGS

### 56P315RP

15A 250V 3 pin straight plug  
(Designed to IEC60529, BS546,  
SS472)

### 56P320

20A 250V 3 round pin straight  
plug  
(Designed to Australian Standard)



56PA320, 56PA332



56P410, 56P420, 56P432,  
56P440, 56P450



66P450, 66P463



56PC, 56PCI



56PC2



M56CP20, M56CP25, M56CP32,  
M56CP40

## IP66 20A & 32A 3 PIN ANGLE PLUGS

(Designed to Australian Standard)

**56PA320**  
20A 250V 3 round pin angle plug

**56PA332**  
32A 250V 3 round pin angle plug

## IP66 10A, 16A, 20A, 32A, 40A, 50A & 63A 4 PIN STRAIGHT PLUGS

(Designed to Australian Standard)

**56P410**  
10A 500V 4 round pin straight  
plug

**56P420**  
20A 500V 4 round pin straight  
plug

**56P432**  
32A 500V 4 round pin straight  
plug

**56P440**  
40A 500V 4 round pin straight  
plug

**56P450**  
50A 500V 4 round pin straight  
plug

**66P450**  
50A 500V 66P series 4 round pin  
straight plug

**66P463**  
63A 500V 66P series 4 round pin  
straight plug

## PLUG CAPS

**56PC**  
10A - 20A 3 phase plug cap

**56PCI**  
32A - 50A 3 phase plug cap

**56PC2**  
10A - 20A 1 phase plug cap

## M56 CONDUIT PLUGS

**M56CP20**  
20mm conduit plug

**M56CP25**  
25mm conduit plug

**M56CP32**  
32mm conduit plug

**M56CP40**  
40mm conduit plug



56SC2

## SOCKET CAPS

### 56SC2

10A - 15A socket cap



56SO313

56SO315, 56SO315RP

56SO320, 56SO332

## IP66 13A, 15A, 20A & 32A 3 PIN SURFACE SOCKET OUTLETS

### 56SO313

13A 250V 1 gang 3 pin surface socket outlet  
(Designed to IEC60529, BS1363, MS589, SS145)

### 56SO315

15A 250V 1 gang 3 pin surface socket outlet  
(Designed to IEC60529, BS546, SS472)

### 56SO315RP


15A 250V 1 gang 3 pin surface socket outlet  
(Designed to IEC60529, BS546, SS472)

### 56SO320

20A 250V 1 gang 3 pin surface socket outlet  
(Designed to IEC60529)

### 56SO332

32A 250V 1 gang 3 pin surface socket outlets  
(Designed to IEC60529)

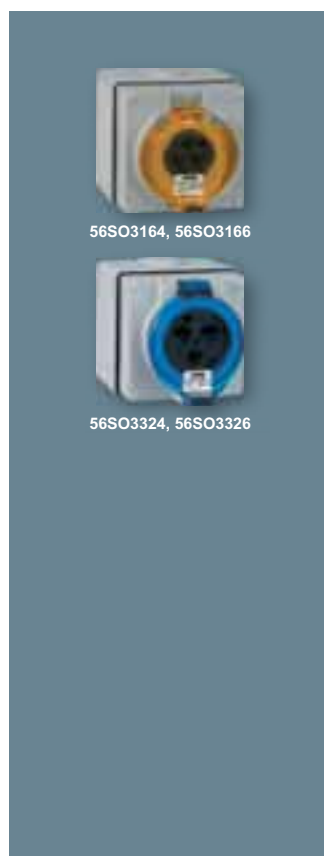

56SO3164, 56SO3166

56SO3324, 56SO3326

## IP66 3 PIN SURFACE SOCKET OUTLETS

(Designed to IEC60309)

### 56SO3164

1 gang 3 pin 110/130V 16A - 4h surface socket outlet

### 56SO3166

1 gang 3 pin 220/250V 16A - 6h surface socket outlet

### 56SO3324

1 gang 3 pin 110/130V 32A - 4h surface socket outlet

### 56SO3326

1 gang 3 pin 220/250V 16A - 6h surface socket outlet



56SO4166, 56SO4326

## IP66 4 PIN SURFACE SOCKET OUTLETS

(Designed to IEC60309)

### 56SO4166

1 gang 4 pin 380/415V 16A - 6h surface socket outlet

### 56SO4326

1 gang 4 pin 380/415V 32A - 6h surface socket outlet





56SO5166, 56SO5326



56C313



56C3132




56C313H2



56C315RP



56C315RP2



56C315RPH2



56C320, 56C332

## IP66 5 PIN SURFACE SOCKET OUTLETS (Designed to IEC60309)

### 56SO5166

1 gang 5 pin 380/415V 16A - 6h surface socket outlet

### 56SO5326

1 gang 5 pin 380/415V 32A - 6h surface socket outlet

## IP66 13A 3 PIN COMBINATION SURFACE SWITCHED SOCKET OUTLETS (Designed to IEC60529, BS1363, MS589, SS145)

### 56C313

13A 250V 1 gang 3 pin combination surface switched socket outlet

### 56C3132

13A 250V 2 gang 3 pin combination surface switched socket outlet

## IP66 13A & 15A 3 PIN COMBINATION SURFACE SWITCHED SOCKET OUTLETS

### 56C313H2

13A 250V 2 gang 3 pin combination surface switched socket outlet  
(Horizontal mounting)  
(Designed to IEC60529, BS1363, MS589, SS145)

### 56C315RP

15A 250V 1 gang 3 pin combination surface switched socket outlet  
(Designed to IEC60529, BS546, SS472)

## IP66 15A, 20A & 32A 3 PIN COMBINATION SURFACE SWITCHED SOCKET OUTLETS

### 56C315RP2

15A 250V 2 gang 3 pin combination surface switched socket outlet  
(Designed to IEC60529, BS546, SS472)

### 56C315RPH2

15A 250V 2 gang 3 pin combination surface switched socket outlet  
(Horizontal mounting)  
(Designed to IEC60529, BS546, SS472)

### 56C320

20A 250V 1 gang 3 pin combination surface switched socket outlet  
(Designed to IEC60529)

### 56C332

32A 250V 1 gang 3 pin combination surface switched socket outlet  
(Designed to IEC60529)



56C410, 56C420, 56C432,  
56C440, 56C450



56C510, 56C520, 56C532,  
56C540, 56C550



56C3134EL, 56C31324ELGY



56C3154EL



56C315RP4EL

### IP66 10A, 20A, 32A, 40A & 50A 4 PIN COMBINATION SWITCHED SOCKET OUTLETS

(Designed to IEC60529)

#### 56C410

10A 500V 1 gang 4 pin  
combination surface switched  
socket outlet

#### 56C420

20A 500V 1 gang 4 pin  
combination surface switched  
socket outlet

#### 56C432

32A 500V 1 gang 4 pin  
combination surface switched  
socket outlet

#### 56C440

40A 500V 1 gang 4 pin  
combination surface switched  
socket outlet

#### 56C450

50A 500V 1 gang 4 pin  
combination surface switched  
socket outlet

### IP66 10A, 20A, 32A, 40A & 50A 5 PIN COMBINATION SWITCHED SOCKET OUTLETS

(Designed to IEC60529)

#### 56C510

10A 500V 1 gang 5 pin  
combination surface switched  
socket outlet

#### 56C520

20A 500V 1 gang 5 pin  
combination surface switched  
socket outlet

#### 56C532

32A 500V 1 gang 5 pin  
combination surface switched  
socket outlet

#### 56C540

40A 500V 1 gang 5 pin  
combination surface switched  
socket outlet

#### 56C550

50A 500V 1 gang 5 pin  
combination surface switched  
socket outlet

### IP56 13A 3 PIN COMBINATION SOCKET OUTLETS WITH RCD PROTECTION

(Designed to IEC60529,  
BSEN61008)

#### 56C3134EL

13A 250V 1 gang 3 pin  
combination surface socket outlet  
with RCD protection

#### 56C31324ELGY

13A 250V 2 gang 3 pin  
combination surface socket outlet  
with RCD protection

\* Tripping sensitivity : 30mA

### IP56 15A 3 PIN COMBINATION SOCKET OUTLETS WITH RCD PROTECTION

(Designed to IEC60529,  
BSEN61008)

#### 56C3154EL

15A 250V 1 gang 3 pin  
combination surface socket outlet  
with RCD protection

#### 56C315RP4EL

15A 250V 1 gang 3 pin  
combination surface socket outlet  
with RCD protection  
(Designed to BS546)

\*Tripping sensitivity : 30mA

**SPECIAL  
ORDER**  
Extended lead times  
may apply.



56C420RC, 56C432RC



56C520RC, 56C532RC

## IP56 20A & 32A 4 PIN & 5 PIN COMBINATION SOCKET OUTLETS WITH RCD PROTECTION

(Designed to IEC60529, BSEN61008)

### 56C420RC

20A 500V 1 gang 4 pin combination surface socket outlet with RCD protection

### 56C432RC

32A 500V 1 gang 4 pin combination surface socket outlet with RCD protection

### 56C520RC

20A 500V 1 gang 5 pin combination surface socket outlet with RCD protection

### 56C532RC

32A 500V 1 gang 5 pin combination surface socket outlet with RCD protection

\*Tripping sensitivity : 30mA

**SPECIAL ORDER**  
Extended lead times may apply.



66CV450, 66CV463, 66CV550, 66CV750, 66CV563, 66CV763

## IP66 66CV SWITCHED SOCKET OUTLETS

(Designed to IEC60529)

### 66CV450

50A 500V TP 4 round pin switched socket outlet

### 66CV463

63A 500V TP 4 round pin switched socket outlet

### 66CV550

50A 500V 4 pole 5 pin switched socket outlet

### 66CV563

63A 500V 4 pole 5 pin switched socket outlet

### 66CV750

50A 500V 4 pole 7 pin switched socket outlet

### 66CV763

63A 500V 4 pole 7 pin switched socket outlet

**SPECIAL ORDER**  
Extended lead times may apply.



56DOL9, 56DOL12, 56DOL16



56DOL22, 56DOL32, 56DOL38

## IP66 MOTOR STARTERS - 56 DOL RANGE

(Designed to IEC60529)

### 56DOL9

Direct online motor starter, 9A AC3 rated, 16A AC1 rated. 4.0kW at 415V

### 56DOL12

Direct online motor starter, 12A AC3 rated, 25A AC1 rated. 5.5kW at 415V

### 56DOL16

Direct online motor starter, 16A AC3 rated, 36A AC1 rated. 7.5kW at 415V

### 56DOL22

Direct online motor starter, 25A AC3 rated, 40A AC1 rated. 11kW at 415V

### 56DOL32

Direct online motor starter, 32A AC3 rated, 55A AC1 rated. 15kW at 415V

### 56DOL38

Direct online motor starter, 38A AC3 rated, 60A AC1 rated. 18.5kW at 415V

**SPECIAL ORDER**  
Extended lead times may apply.



56ROL9, 56ROL12, 56ROL16



56ROL22, 56ROL32, 56ROL38

## IP66 MOTOR STARTERS - 56 ROL RANGE

(Designed to IEC60529)

### 56ROL9

Reversing motor starter, rated 3 phase. 4.0kW at 415V

### 56ROL12

Reversing motor starter, rated 3 phase. 5.5kW at 415V

### 56ROL16

Reversing motor starter, rated 3 phase. 7.5kW at 415V

### 56ROL22

Reversing motor starter, rated 3 phase. 11kW at 415V

### 56ROL32

Reversing motor starter, rated 3 phase. 15kW at 415V

### 56ROL38

Reversing motor starter, rated 3 phase. 18.5kW at 415V

**SPECIAL ORDER**  
Extended lead times may apply.



56YD9



56YD12, 56YD20



56YD26, 56YD33

## IP66 MOTOR STARTERS - 56YD RANGE

(Designed to IEC60529)

### 56YD9

Star-Delta motor starter, rated max. 7.5kW at 415V. Max. 30 starts per hour.

### 56YD12

Star-Delta motor starter, rated max. 11kW at 415V. Max. 30 starts per hour.

### 56YD20

Star-Delta motor starter, rated max. 20kW at 415V. Max. 30 starts per hour.

### 56YD26

Star-Delta motor starter, rated max. 26kW at 415V. Max. 30 starts per hour.

### 56YD33

Star-Delta motor starter, rated max. 30kW at 415V. Max. 30 starts per hour.

**SPECIAL  
ORDER**  
Extended lead times  
may apply.



5632

## IP66 APERTURE ENCLOSURE

(Designed to IEC60529, BS5733)

### 5632

2 aperture enclosure



56JB1



56JB2



56JB3

## IP66 JUNCTION BOXES

(Designed to IEC60529, BS5733)

### 56JB1

1 gang junction box  
107x101x91mm

### 56JB2

2 gang junction box  
204x101x91mm

### 56JB3

3 gang junction box  
294x101x91mm



56E1



56ES1



56E2

## IP66 MOUNTING ENCLOSURES

(Designed to IEC60529, BS5733)

### 56E1

1 gang mounting enclosure  
101x101x63mm

### 56ES1

1 gang mounting enclosure  
101x101x38mm

### 56E2

2 gang mounting enclosure  
198x101x63mm



## IP66 MOUNTING ENCLOSURES

(Designed to IEC60529, BS5733)

### 56ED2

2 gang mounting enclosure  
198x101x100mm

### 56ES2

2 gang mounting enclosure  
198x101x38mm

### 56E24EL

2 gang mounting enclosure  
198x101x105mm



## IP66 MOUNTING ENCLOSURES

(Designed to IEC60529, BS5733)

### 56E3

3 gang mounting enclosure  
294x101x63mm

### 56E4

4 gang mounting enclosure  
198x198x63mm

### 56E4VH

4 gang mounting enclosure  
391x101x63mm



## IP66 MOUNTING ENCLOSURES


(Designed to IEC60529, BS5733)

### 56E6

6 gang mounting enclosure  
294x198x63mm

### 56E8

8 gang mounting enclosure  
391x198x63mm

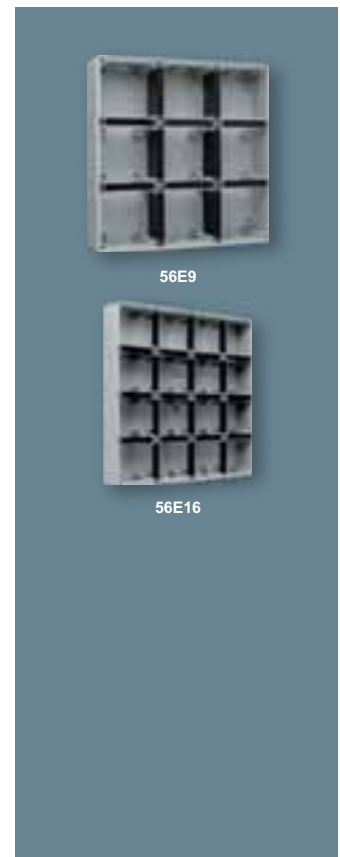

## IP66 MOUNTING ENCLOSURES

(Designed to IEC60529, BS5733)

### 56E9

9 gang mounting enclosure  
294x294x63mm

### 56E16

16 gang mounting enclosure  
391x391x63mm



WS226, WS226D, WS22620



WS226N, WS22620N

## IP56 15A & 20A SURFACE SWITCHES

(Designed to IEC60669-1,  
BSEN60529)

### WS226

15A 250V 1 gang 12 way surface  
switch

### WS226D

15A 250V 1 gang DP surface  
switch

### WS22620

20A 250V 1 gang 12 way surface  
switch

### WS226N

15A 250V 1 gang 12 way surface  
switch with neon

### WS22620N

20A 250V 1 gang 12 way surface  
switch with neon



WS2262



WS2262N

## IP56 15A SURFACE SWITCHES

(Designed to IEC60669-1,  
BSEN60529)

### WS2262

15A 250V 2 gang 12 way surface  
switch

### WS2262N

15A 250V 2 gang 12way surface  
switch with neon



WS226PB



WS226PBS



WS2262PB

## IP56 10A PUSH BUTTON CONTROL STATIONS

(Designed to IEC60529,  
IEC60669-1)

### WS226PB

10A 440V push button station

### WS226PBS

10A 440V stop button station

### WS2262PB

10A 440V startstop button station



WHT20, WHT35, WHT55, WHT5532,  
WHT63, WHT80

## IP56 20A, 35A, 55A, 63A & 80A TP SURFACE MOUNT ISOLATORS

(Designed to IEC60529,  
IEC60947-3)

### WHT20

20A 440V TP surface mount  
isolator

### WHT35

35A 440V TP surface mount  
isolator

### WHT55

55A 440V TP surface mount  
isolator

### WHT5532

55A 440V TP surface mount  
isolator with 32mm conduit entry  
at each end

### WHT63

63A 440V TP surface mount  
isolator with 32mm conduit entry  
at each end

### WHT80

80A 440V TP surface mount  
isolator with 32mm conduit entry  
at each end



E31WP



WS229G



W226JB

## WEATHER PROTECTED FLUSH PLATES & BOXES

(Designed to IEC60529)

### E31WP

IP54 1 gang flush plate with surround (87 x 87mm)

### WS229G

IP54 1 gang weather protected surface box, suit for 30 series mechanism

### W226JB

IP66 Junction box  
(88(L) x 78(W) x 53(D)mm)



E223V



E223DV

## WEATHER PROTECTED FLUSH PLATES & BOXES

(Designed to IEC60529)

### E223V

IP54 weather protected accessory cover

### E223DV

IP13 weather protected socket cover



56WL GY



56FWL

## LIGHTS

### 56WL GY


Wall light, surface mount  
(PL5-PL7 lamp) IP56  
250V, 0.175A, 9W max.  
2 module 50Hz.  
Dims: 198x101x91mm. Fixing  
Ctrs: 181x84mm.  
Mtg box: (surface) 56E2 included.  
Material: polycarbonate.  
Standard: BS 5733:1995

### 56FWL


Wall light, flush mount  
(PL5-PL7 lamp) IP43  
250V, 0.175A, 9W max.  
2 module 50Hz.  
Dims: 254x157x84mm.  
Fixing Ctrs: 181x84mm.  
Mtg box: (flush) kit included (WE).  
Material: polycarbonate.  
Standard: BS 5733:1995



56FA1 GY



56FA2 GY



56FA4 GY

## SURROUNDS

### 56FA1 GY

Flush surround IP56, 1 module  
Dims: 157x157x13mm,  
Fix Ctrs: 84x84mm  
Mtg Box: (surface) 56E1  
Material: PVC  
Standard: IEC 670:1989

### 56FA2 GY

Flush surround IP56, 2 module  
Dims: 254x157x13mm,  
Fix Ctrs: 181x84mm  
Mtg Box: (surface) 56E2  
Material: PVC  
Standard: IEC 670:1989


### 56FA3 GY

Flush surround IP56, 3 module  
Dims: 350x157x13mm,  
Fix Ctrs: 277x84mm  
Mtg Box: (surface) 56E3  
Material: PVC  
Standard: IEC 670:1989

### 56FA4 GY

Flush surround IP56, 4 module  
Dims: 254x254x13mm,  
Fix Ctrs: 181x181mm  
Mtg Box: (surface) 56E4  
Material: PVC  
Standard: IEC 670:1989







56FA1B



56FA2B



56FA3B



56FA4B



56B BK



56JB1 GY

## SURROUNDS AND MOUNTING PLATES

### 56FA1B

Mounting plate-flush surround  
IP56, 1 module  
Dims: 141x141mm,  
Fix Ctrs: 84x84mm  
Mtg Box: (surface) 56E1  
Material: Steel  
Standard: IEC 670:1989

### 56FA2B

Mounting plate-flush surround  
IP56, 2 module  
Dims: 242x141mm,  
Fix Ctrs: 181x84mm  
Mtg Box: (surface) 56E2  
Material: Steel  
Standard: IEC 670:1989

## MOUNTING PLATES

### 56FA3B

Mounting plate-flush surround  
IP56, 3 module  
Dims: 338x141mm,  
Fix Ctrs: 277x84mm  
Mtg Box: (surface) 56E3  
Material: Steel  
Standard: IEC 670:1989

### 56FA4B

Mounting plate-flush surround  
IP56, 4 module  
Dims: 242x242mm,  
Fix Ctrs: 181x181mm  
Mtg Box: (surface) 56E4  
Material: Steel  
Standard: IEC 670:

## ACCESSORIES

### 20MALE/20FEMALE

Adapter-earth lead  
Dims: M20(Male)/M20(Female)  
Material: Brass

### 56B BK

Bridging piece to fit enclosure  
Material: Polycarbonate

### 56DV BK

Divider to fit enclosure  
Material: Polycarbonate

### 56/3E10 GR

Terminal block-Earth  
(accepts 3x6mm $\diamond$ )  
Material: Polycarbonate/Brass

### 56/3N10 BK

Terminal block-Neutral  
(accepts 3x6mm $\diamond$ )  
Material: Polycarbonate/Brass

## ACCESSORIES

### 56JB1 GY

Junction box + enclosure(accepts  
3x6mm $\diamond$ ) IP66, 1 module  
Dims: 101x101x91mm,  
Fix Ctrs: 55x70&74x45mm  
Surface mounting  
Material: Polycarbonate  
Standard: IEC 670:1989





56C31324ELGY

## RCD SOCKET OUTLETS

### 56C3134EL GY

RCD socket outlet with enclosure  
IP66, DP 250V 13A 30mA 25A  
RCD 3 module 50Hz  
Dims: 294x101x63mm,  
Fix Ctrs: 55x260&75x235mm  
Surface mounting  
Material: Polycarbonate/PVC  
Standard: BS EN 61008:1994,BS  
1363 Pt2:1995

### 56C31324EL GY

RCD socket outlet with enclosure  
IP66, DP 250V 2x13A 30mA 40A  
RCD 4 module 50Hz  
Dims: 198x198x91mm,  
Fix Ctrs: 152x165&172x140mm  
Surface mounting  
Material: Polycarbonate/PVC  
Standard: BS EN 61008:1994,BS  
1363 Pt2:1995



56SW120LE RO



56SW220LE RO



56SW232LE RO

## SWITCHES AND SWITCH DISCONNECTORS

### 56SW120LE RO

Switch IP66, SP 250V 20A AC23  
1 way 1 module 50Hz  
Dims: 95x95mm,  
Fix Ctrs: 84x84mm  
Mtg.Box: (surface) 56E1,  
(flush) 56E1+56FA1+56FA1B  
Material: Polyester  
Standard: BS EN 60669-1

### 56SW220LE RO

Switch disconnecter IP66,  
DP 500/690V 20A AC23  
1 module 50Hz  
Dims: 95x95mm,  
Fix Ctrs: 84x84mm  
Mtg.Box: (surface) 56E1,  
(flush) 56E1+56FA1+56FA1B  
Material: Polyester  
Standard: BS EN 60947-3:1992

### 56SW232LE RO

Switch disconnecter IP66,  
DP 500/690V 32A AC22  
1 module 50Hz  
Dims: 95x95mm,  
Fix Ctrs: 84x84mm  
Mtg.Box: (surface) 56E1,  
(flush) 56E1+56FA1+56FA1B  
Material: Polyester  
Standard: BS EN 60947-3:1992



56SW320LE RO



56SW332LE RO

## SWITCHES AND SWITCH DISCONNECTORS

### 56SW320LE RO

Switch disconnecter IP66,  
TP 500/690V 20A AC23  
1 module 50Hz  
Dims: 95x95mm,  
Fix Ctrs: 84x84mm  
Mtg.Box: (surface) 56E1,  
(flush) 56E1+56FA1+56FA1B  
Material: Polyester  
Standard: BS EN 60947-3:1992

### 56SW332LE RO

Switch disconnecter IP66,  
TP 500/690V 32A AC22  
1 module 50Hz  
Dims: 95x95mm,  
Fix Ctrs: 84x84mm  
Mtg.Box: (surface) 56E1,  
(flush) 56E1+56FA1+56FA1B  
Material: Polyester  
Standard: BS EN 60947-3:1992

### 56SW363LE RO

Switch disconnecter IP66,  
TP 500/690V 63A AC22  
1 module 50Hz  
Dims: 95x95mm,  
Fix Ctrs: 84x84mm  
Mtg.Box: (surface) 56E1,  
(flush) 56E1+56FA1+56FA1B  
Material: Polyester  
Standard: BS EN 60947-3:1992



56SW320CLE RO

## SWITCHES AND SWITCH DISCONNECTORS

### 56SW320CLE RO

Switch disconnecter+2A auxiliary  
contact IP66, TP 500/690V 20A  
AC23 1 module 50Hz  
Dims: 95x95mm,  
Fix Ctrs: 84x84mm  
Mtg.Box: (surface) 56E1,  
(flush) 56E1+56FA1+56FA1B  
Material: Polyester  
Standard: BS EN 60947-3:1992



56P313 RO



56ES1 RO



56E1 RO

## ACCESSORIES

### 56PBS1LE RO

Push button station IP66,  
SP 250V 10AAC11@6A 1 way  
1 module 50Hz  
Dims: 95x95mm,  
Fix Ctrs: 84x84mm  
Mtg.Box: (surface) 56E1,  
(flush) 56E1+56FA1+56FA1B  
Material: Polyester  
Standard: BS EN 60669-1:1996

### 56SO313LE RO

Socket outlet IP66, 250V 13A  
1 module 50Hz  
Dims: 95x95mm,  
Fix Ctrs: 84x84mm  
Mtg.Box: (surface) 56E1,  
(flush) 56E1+56FA1+56FA1B  
Material: Polyester  
Standard: BS 1363 Pt.2:1995

### 56P313 RO

Plug IP66, 250V 13A cord grip  
50Hz  
Dims: Dia.78x110mm  
Material: Polyester  
Standard: BS 1363/A Pt1:1995

## ENCLOSURES

### 56ES1 RO

Enclosure (surface mounting box)  
1 module  
Dims: 101x101x38mm,  
Fix Ctrs: 74x45mm  
Surface mounting  
Material: Polyester  
Standard: IEC 670:

### 56E1 RO

Enclosure (surface mounting box)  
1 module  
Dims: 101x101x63mm,  
Fix Ctrs: 55x70&74x45mm  
Surface mounting  
Material: Polyester  
Standard: IEC 670:1989

### 56E20 RO

Enclosure (surface mounting box)  
2 module  
Dims: 198x101x63mm,  
Fix Ctrs: 55x165&75x140mm  
Surface mounting  
Material: Polyester  
Standard: IEC 670:1989

### 56ES2 RO

Enclosure (surface mounting box)  
2 module  
Dims: 198x101x38mm,  
Fix Ctrs: 74x140mm  
Surface mounting  
Material: Polyester  
Standard: IEC 670:1989

## TERMINAL BLOCK

### 56SOX KIT

Universal mounting kit  
Dims: 95x95mm,  
Fix Ctrs: 84x84mm  
Mtg.Box: (surface) 56E1, (flush)  
56E1+56FA1+56FA1B  
Material: Polycarbonate  
Standard: IEC 670:1989



E2431LC2

### SCENEMASTER ENTRANCE SWITCH

*(Designed to IEC60669-1,  
MS616, SS227)*

#### **E2431LC2**

10A 1 gang 2 way entrance  
switch



E2400/3MCU5H



E2400HTX

### SCENEMASTER LIGHTING CONTROLLER

*(Designed to BS5518)*

#### **E24003MCU5H**

Master control unit for 3 zones, 5  
scenes of lighting

#### **E2400HTX**

Infrared remote control



E2400PB1200

### SCENEMASTER POWER BOOSTER

*(Designed to BS5733)*

#### **E2400PB1200**

1200W power booster



E2400AM

### SCENEMASTER FLUORESCENT INTERFACE

*(Designed to IEC60928)*

#### **E2400AM**

Fluorescent interface



E2752D400T, E2752D500T, E2752D600T



E2752T

## REMOTE CONTROL DIMMER

(Designed to IEC60669-2-1, EMC Compliant)

### E2752D400T

400W 1 gang IR remote control dimmer

### E2752D500T

500W 1 gang IR remote control dimmer

### E2752D600T

600W 1 gang IR remote control dimmer

### E2752T

Infrared remote control transmitter



E2751/2, E2751

## MOTION CONTROL SWITCHES

(Designed to IEC60669, BSEN60730-1)

### E2751/2

1 gang 2 wire motion control switch (For incandescent load)

### E2751

1 gang 3 wire motion control switch (For fluorescent load)



E2031ETRF60, E2031ETRF720

## 16A ELECTRONIC TIME DELAY SWITCHES

(Designed to IEC60669-2-1)

### E2031ETRF60

Electronic time delay switch (1 - 60 minutes adjustable)

### E2031ETRF720

Electronic time delay switch (1 - 12 hours adjustable)



E751, E751R



E750WPRGY



E751MB

## INFRARED DETECTOR

(Designed to IEC60669-2-1)

### E751

2A 250V ceiling type infrascan (indoor)

### E751R

10A 250V ceiling type infrascan (indoor)

### E750WPRGY

10A 250V ceiling & wall type infrascan (outdoor)

### E751MB

Mounting base for 751



3012MWE, 301ELMWE, 3012LMWE,  
30MDWE



301NMWE



30HMDWE



30MWE, 30MCOWE, 305MWE



30MRDWE



302NMWE



30MD2WE



30MIWE, 30FLMWE



39MWE



39MAOMWE



39MSONWE



302NMSENWE



302NMOSWE

## 10A SWITCH MECHANISMS

(Designed to IEC60669-1, MS616, SS227)

### 301SMWE

10A 1 way 2 terminal

### 302SMWE

10A 2 way

### 301ELMWE

10A 1 way 4 terminal including 1 earth & 1 looping

### 3012LMWE

10A 1 way 4 terminal including 2 looping

### 30MDWE

10A 1 way DP

### 301NMWE

10A 1 way with neon

### 30HMDWE

10A 1 way DP marked "HEAT"

## 10A SWITCH MECHANISMS

(Designed to IEC60669-1, MS616, SS227)

### 30MWE

10A 2 way 4 terminal

### 30MCOWE

10A 2 way 4 terminal change over

### 305MWE

10A 2 way 5 terminal

### 30MRDWE

10A 2 way - come with red dolly dot

### 302NMWE

10A 2 way with neon

### 30MD2WE

10A 2 way DP

## 10A SWITCH MECHANISMS

(Designed to IEC60669-1, MS616, SS227)

### 30MIWE

10A intermediate

### 30FLMWE

10A switch mechanism  
(For fluorescent loads only)

### 39MWE

10A 3 position 4 terminal  
"LO - OFF - HI"

### 39MAOMWE

10A 3 position 4 terminal  
"AUTO - OFF - MAN"

### 39MSONWE

10A 3 position 4 terminal  
"SENSOR - OFF - ON"

## 10A ILLUMINATED SWITCH MECHANISMS

(Designed to IEC60669-1, MS616, SS227)

### 302NMSENWE

10A 2 way with neon & marked  
"SENSOR"

### 302NMOSWE

10A 2 way with neon & marked  
"OUTSIDE"

**SPECIAL  
ORDER**

Extended lead times  
may apply.



30M15WE, 30FLM15WE, 30MD15WE



30M20WE, 30MD20WE



30TKMWE



30M35WE



30MBP23JWE, 30MBPJWE



30MBPWE



30MBPNWE, 30MBPN12WE,  
30MBPN24WE

## 15A SWITCH MECHANISMS

(Designed to IEC60669-1, MS616, SS227)

### 30M15WE

15A 2 way 4 terminal

### 30FLM15WE

15A switch mechanism  
(For fluorescent loads only)

### 30MD15WE

15A DP

## 20A & 35A SWITCH MECHANISMS

(Designed to IEC60669-1, MS616, SS227)

### 30M20WE

20A 2 way 4 terminal

### 30MD20WE

20A DP

### 30TKMWE

20A 2 way toggle key actuated

### 30M35WE

35A 2 way 4 terminal

### 30TK3WE

Spare key for 30TKM

## 3A & 15A BELL PUSH MECHANISMS

(Designed to IEC60669-1, MS616, SS227)

### 30MBP23JWE

3A 250V bell push button

### 30MBPJWE

15A 440V bell push button

## 15A BELL PUSH MECHANISMS

(Designed to IEC60669-1, MS616, SS227)

### 30MBPWE

15A 440V bell push button

### 30MBPNWE

15A 250V push button with neon

### 30MBPN12WE

15A 12V push button with neon

### 30MBPN24WE

15A 24V bell push button  
with neon



30MBPRWE

## 10A BELL PRESS MECHANISM

(Designed to IEC60669-1, MS616, SS227)

### 30MBPRWE

10A bell press button marked "PRESS"



30N, 30N12, 30N24, 30N110



30N, 30N12, 30N24, 30N110



30N, 30N12, 30N24, 30N110

## NEON INDICATOR MECHANISMS

(Designed to BS5733)

### 30N

250V neon indicator mechanism

### 30N12

12V neon indicator mechanism

### 30N24

24V neon indicator mechanism

### 30N110

110V neon indicator mechanism

*Note: Neon indicator mechanisms are available in red (RD), green (GR), blue (BU), clear (TR) & amber (AM).*



30RSM2WE, 30RSM3WE

## 15A ROTARY MECHANISMS

(Designed to IEC60669-1, MS616, SS227)

### 30RSM2WE

15A 2 position - 2 ON, 2 OFF

### 30RSM3WE

15A 3 position - 3 ON, 1 OFF



30ACMWE



30AMWE



30AUMWE



30BMWE

## 10A MESSAGE MECHANISMS

(Designed to IEC60669-1, MS616, SS227)

### 30ACMWE

10A 2 way marked "AIR CON"

### 30AMWE

10A 2 way marked "ALARM"

### 30AUMWE

10A 2 way marked "AUTO"

### 30BMWE

10A 2 way marked "BATH"

**SPECIAL ORDER**  
Extended lead times may apply.



30BDMWE



30BD1MWE



30BD2MWE



30BD3MWE

## 10A MESSAGE MECHANISMS

(Designed to IEC60669-1, MS616, SS227)

### 30BDMWE

10A 2 way marked "BED"

### 30BD1MWE

10A 2 way marked "BED 1"

### 30BD2MWE

10A 2 way marked "BED 2"

### 30BD3MWE

10A 2 way marked "BED 3"



30BD4MWE



30COMWE



30DNMWE



30DMWE

## 10A MESSAGE MECHANISMS

(Designed to IEC60669-1, MS616, SS227)

### 30BD4MWE

10A 2 way marked "BED 4"

### 30COMWE

10A 2 way marked "COOL"

### 30DNMWE

10A 2 way marked "DAY NIGHT"

### 30DMWE

10A 2 way marked "DINE"



30PMWE



30EMWE



30FAMWE



30FMWE

## 10A MESSAGE MECHANISMS

(Designed to IEC60669-1, MS616, SS227)

### 30PMWE

10A 2 way marked "DISPOSAL"

### 30EMWE

10A 2 way marked "EXHAUST"

### 30FAMWE

10A 2 way marked "FAMILY"

### 30FMWE

10A 2 way marked "FAN"



30MFRWE



30MFDWE



30HMWE



30LHMWE

## 10A MESSAGE MECHANISMS

(Designed to IEC60669-1, MS616, SS227)

### 30MFRWE

10A 2 way marked "FORWARD REVERSE"

### 30MFDWE

10A 2 way marked "FRIDGE"

### 30HMWE

10A 2 way marked "HEAT"

### 30LHMWE

10A 2 way marked "HI LO"

**SPECIAL  
ORDER**

Extended lead times  
may apply.

**SPECIAL  
ORDER**

Extended lead times  
may apply.

**SPECIAL  
ORDER**

Extended lead times  
may apply.

**SPECIAL  
ORDER**

Extended lead times  
may apply.





30KMWE



30LMWE



30LOMWE



30MAMWE

#### 10A MESSAGE MECHANISMS

(Designed to IEC60669-1, MS616, SS227)

##### 30KMWE

10A 2 way marked "KITCHEN"

##### 30LMWE

10A 2 way marked "LIGHT"

##### 30LOMWE

10A 2 way marked "LOUNGE"

##### 30MAMWE

10A 2 way marked "MAN-AUTO"



30MMWWE



30FNMWE



30MOSWE



30PUMWE

#### 10A MESSAGE MECHANISMS

(Designed to IEC60669-1, MS616, SS227)

##### 30MMWWE

10A 2 way marked "MICROWAVE"

##### 30FNMWE

10A 2 way marked "ON OFF"

##### 30MOSWE

10A 2 way marked "OUTSIDE"

##### 30PUMWE

10A 2 way marked "PUMP"



30RUMWE



30SMENWE



30STMWE



30TMWE

#### 10A MESSAGE MECHANISMS

(Designed to IEC60669-1, MS616, SS227)

##### 30RUMWE

10A 2 way marked "RUMPUS"

##### 30SMENWE

10A 2 way marked "SENSOR"

##### 30STMWE

10A 2 way marked "STUDY"

##### 30TMWE

10A 2 way marked "TV"



30XMWE



30YMWE



30MZ1WE



30MZ2WE

#### 10A MESSAGE MECHANISMS

(Designed to IEC60669-1, MS616, SS227)

##### 30XMWE

10A 2 way marked "WASTE"

##### 30YMWE

10A 2 way marked "WASH"

##### 30MZ1WE

10A 2 way marked "ZONE 1"

##### 30MZ2WE

10A 2 way marked "ZONE 2"

**SPECIAL  
ORDER**

Extended lead times  
may apply.

**SPECIAL  
ORDER**

Extended lead times  
may apply.

**SPECIAL  
ORDER**

Extended lead times  
may apply.

**SPECIAL  
ORDER**

Extended lead times  
may apply.



30MZ3WE



30MZ4WE

## 10A MESSAGE MECHANISMS

(Designed to IEC60669-1, MS616, SS227)

### 30MZ3WE

10A 2 way marked "ZONE 3"

### 30MZ4WE

10A 2 way marked "ZONE 4"

**SPECIAL  
ORDER**

Extended lead times  
may apply.



30M16FRWE



30M16FDWE



30M16MWWE



30M16OSWE

## 16A MESSAGE MECHANISMS

(Designed to IEC60669-1, MS616, SS227)

### 30M16FRWE

16A marked "FORWARD  
REVERSE"

### 30M16FDWE

16A marked "FRIDGE"

### 30M16MWWE

16A marked "MICROWAVE"

### 30M16OSWE

16A marked "OUTSIDE"

**SPECIAL  
ORDER**

Extended lead times  
may apply.



30M16SENWE

## 16A MESSAGE MECHANISMS

(Designed to IEC60669-1, MS616, SS227)

### 30M16SENWE

16A marked "SENSOR"

**SPECIAL  
ORDER**

Extended lead times  
may apply.



30M20HWWWE



30M35HOBWE



30M35OVWE



30M35RWE

## 20A & 35A MESSAGE MECHANISMS

(Designed to IEC60669-1, MS616, SS227)

### 30M20HWWWE

20A marked "HOT WATER"

### 30M35HOBWE

35A marked "HOB"

### 30M35OVWE

35A marked "OVEN"

### 30M35RWE

35A marked "RANGE"

**SPECIAL  
ORDER**

Extended lead times  
may apply.



30ENLMWE



30ET36MWE



30ET6HMWE



30EDMWE

## SMARTMEKS MECHANISMS

(For incandescent only)

### 30ENLMWE

250V 24 minute dimming night switch

### 30ET36MWE

250V 36 minute timer auto - off

### 30ET6HMWE

250V 6 hour timer (\"Courtesy\" on - off)

### 30EDMWE

250V 4 stage dimmer night switch



32400M, 32400FM



30POTFM



32V400F-KB



32V400FM K

## FAN MECHANISMS

(Designed to BS5518)

### 32400M

400VA ceiling sweep fan controller mechanism

### 32400FM

400VA universal fan speed controller mechanism

### 30POTFM

400VA remote fan speed control potentiometer

### 32V400F-KB

400VA fan speed controller knob

### 32V400FMK

400VA fan controller unit



## LIGHT MECHANISMS

(Designed to BS5518)

### 32E450LMWE

400VA dimmer to suit low voltage lighting transformer

### 32E450TMWE

400VA dimmer to suit low voltage transformer trailing edge

### 32500M

500VA incandescent

### 32V500M2K

500W dimmer mechanism

### 30POTDM

Remote dimmer control with potentiometer mechanism



30P



30PID

## MOULDED REMOVABLE PLUGS

### 30P

Plain

### 30PID

10A 2 way ID circuit plug (Tamper proof)

**SPECIAL  
ORDER**

Extended lead times  
may apply.



## CABLE CONNECTION ACCESSORIES

(Designed to BS5733)

**38TB**  
Grommet with 25A terminal block

**38**  
Cord grommet for up to 2.5mm<sup>2</sup> light duty flex

**38Z**  
Cord grommet for up to 0.75mm<sup>2</sup> light duty flex

**38HD**  
Cord grommet for up to 2.5mm<sup>2</sup> ordinary duty with clamp



## MOUNTING CLIPS

**B30GFZ**  
Back mounting clip moulded surround

**F30Z1**  
Suits 1mm metal plate - front mounting

**F30Z1.5**  
Suits 1.5mm metal plate - front mounting

**F30Z2**  
Suits 2mm metal plate - front mounting

**F30Z3**  
Suits 3mm metal plate - front mounting

**F30Z4**  
Suits 4mm metal plate - front mounting



## SCREW AND CAPS

**31J**  
Security screws

**9**  
White screw caps - plain



## 30RJ SERIES SOCKET MECHANISM CATEGORY 5

**30RJ88SMB5SH**  
Voice data mechanism with shutter





30RJA5CT

30RJA5CTB

### 30RJ SERIES SOCKET MECHANISM - CATEGORY 5

**30RJA5CT**  
Connection tool with blade

**30RJA5CTB**  
Connection tool with spare blade



30TV75M

30TV75MS

### TV ACCESSORIES

**30TV75M**  
75 ohm crimp type TV antenna socket

**30TV75MS**  
75 ohm crimp type - screw fixed TV antenna socket



30TV75P

### TV ACCESSORIES

**30TV75P**  
75 ohm coaxial cable plug



30TV75S

30TV75MF

30TV75MACF

30PFM

### TV ACCESSORIES

**30TV75S**  
75 ohm coaxial cable surface socket

**30TV75MF**  
75 ohm "F" type connection TV antenna socket

**30TV75MACF**  
75 ohm TV antenna socket with 3 kV AC isolation

**30PFM**  
75 ohm with "F" type connection for "PAY TV"



30SFM

## **SURGE FILTER MECHANISM**

**30SFM**  
250V metal oxide varistor surge  
filter



### STAINLESS STEEL MULTI-GANG SWITCH PLATES

(Designed to BS5733)

#### 4 GANG TO 8 GANG

**B4302**  
4 gang 2x2 switch plate only

**B6303**  
6 gang 3x2 switch plate only

**B8304**  
8 gang 4x2 switch plate only



### STAINLESS STEEL MULTI-GANG SWITCH PLATES


(Designed to BS5733)

#### 10 GANG TO 12 GANG

**B10305**  
10 gang 5x2 switch plate only

**B12306**  
12 gang 6x2 switch plate only

**12301623**  
12 gang 3x4 switch plate only

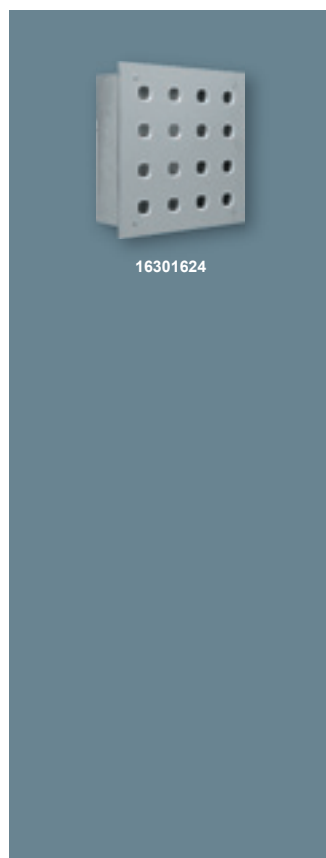

### STAINLESS STEEL MULTI-GANG SWITCH PLATES

(Designed to BS5733)

#### 14 GANG TO 18 GANG

**14307**  
14 gang 7x2 switch plate only

**16308**  
16 gang 8x2 switch plate only

**16301624**  
16 gang 4x4 switch plate only

**18309**  
18 gang 9x2 switch plate only



### STAINLESS STEEL MULTI-GANG SWITCH PLATES

(Designed to BS5733)

#### 20 GANG TO 28 GANG

**203010**  
20 gang 10x2 switch plate only

**20301625**  
20 gang 5x4 switch plate only

**223011**  
22 gang 11x2 switch plate only

**243012**  
24 gang 12x2 switch plate only


**24301626**  
24 gang 6x4 switch plate only

**24301634**  
24 gang 4x6 switch plate only


**263013**  
26 gang 13x2 switch plate only

**283014**  
28 gang 14x2 switch plate only


**28301627**  
28 gang 7x4 switch plate only



30301635



42301637



723016312

## STAINLESS STEEL MULTI-GANG SWITCH PLATES

(Designed to BS5733)

### 30 GANG TO 40 GANG

#### 303015

30 gang 15x2 switch plate only

#### 30301635

30 gang 5x6 switch plate only

#### 32301628

32 gang 8x4 switch plate only

#### 36301629

36 gang 9x4 switch plate only

#### 36301636

36 gang 6x6 switch plate only

#### 403016210

40 gang 10x4 switch plate only

## STAINLESS STEEL MULTI-GANG SWITCH PLATES

(Designed to BS5733)

### 42 GANG TO 50 GANG

#### 403016210

40 gang 10x4 switch plate only

#### 42301637

42 gang 7x6 switch plate only

#### 443016211

44 gang 11x4 switch plate only

#### 483016212

48 gang 12x4 switch plate only

#### 48301638

48 gang 8x6 switch plate only

## STAINLESS STEEL MULTI-GANG SWITCH PLATES

(Designed to BS5733)

### 52 GANG TO 72 GANG

#### 523016213

52 gang 13x4 switch plate only

#### 54301639

54 gang 9x6 switch plate only

#### 563016214

56 gang 14x4 switch plate only

#### 603016215

60 gang 15x4 switch plate only

#### 603016310

60 gang 10x6 switch plate only

#### 663016311

66 gang 11x6 switch plate only

#### 723016312

72 gang 12x6 switch plate only





## BC LAMP HOLDERS

(Designed to BS5042, IEC61184)

### 501S

3A 250V 3 piece cord grip lamp holder with short skirt

### 501ES


4A 250V Edison screw lamp holder



## BC BATTEN HOLDERS

### E94 WE

BC batten lampholder  
T2 rated IP4X,  
250V 6A Earth terminal 50Hz  
Dims: Dia.86x76mm,  
Fix Ctrs: 50&59mm  
Ceiling mounting  
Material: Polycarbonate  
Standard: BS EN 61184:1997

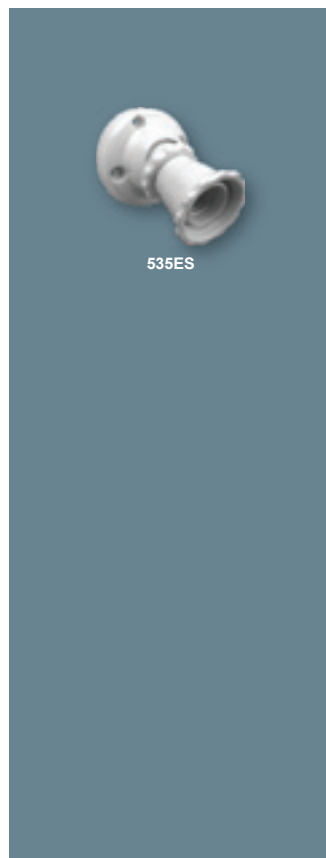

## ES BATTEN HOLDERS

### 535ES

ES batten type adjustable lamp holder



## PENDANTS

### E93PS6 WE

Pendant set 6" T2 rated IP4X  
250V 6A Earth terminal 50Hz  
Dims: Dia.86x250mm,  
Fix Ctrs: 50&59mm  
Ceiling mounting  
Material: Polycarbonate  
Standard: BS EN 61184:1997,  
BS 67:1987

### E93PS9 WE

Pendant set 9" T2 rated IP4X  
250V 6A Earth terminal 50Hz  
Dims: Dia.86x330mm,  
Fix Ctrs: 50&59mm  
Ceiling mounting  
Material: Polycarbonate  
Standard: BS EN 61184:1997,  
BS 67:1987

### E501SS WE

BC pendant lampholder  
T2 rated IP4X  
250V 6A 50Hz  
Dims: Dia34x58mm  
Material: Polycarbonate  
Standard: BS EN 61184:1997  
(BS 5042:1987,T2)

### E93 WE

Ceiling rose IP4X  
250V 6A Earth terminal 50Hz  
Dims: Dia.86x32mm,  
Fix Ctrs: 50&59mm  
Ceiling mounting  
Material: Polycarbonate  
Standard: BS 67:1987



755, 755L



756

## SMOKE DETECTORS

**755**  
250V smoke detector with battery backup

**755L**  
250V smoke detector with lithium battery backup

**756**  
Isolation unit for smoke detector



EP5



EP15

## PLUGS

**EP5**  
250V 5A plug  
(Designed to BS546)

**EP15**  
250V 15A plug  
(Designed to BS546)



E417

## SAFETY COVER

**E417**  
13A safety cover



EPB4NSF

## TRAILING SOCKETS

(Designed to BS5733)

**EPB4NSF**  
13A 4 gang main switched & surge-protected trailing socket with shutter, neon & 3 metre cable



438, 438/15

## CORD EXTENSION SOCKETS

**438**  
10A 3 pin cord extension socket

**438/15**  
15A 3 pin cord extension socket



E157, E157E



157/1



158



ET157DE

## METAL MOUNTING BOXES

*(Designed to BS4662)*

**E157**  
1 gang metal mounting box

**E157E**  
1 gang metal mounting box with earth

**157/1**  
1 gang 54 x 94 x 43mm metal mounting box

**158**  
1 gang 28 x 67 x 32mm architrave metal mounting box

**ET157DE**  
2 single gang deep metal mounting with earth



2655



2657



2657D

## RIGID PVC ADAPTABLE BOXES

**2655**  
211(L) x 108(W) x 81(D)mm rigid PVC adaptable box with sealing gasket

**2657**  
300(L) x 200(W) x 152(D)mm rigid PVC adaptable box with sealing gasket

**2657D**  
300(L) x 200(W) x 200(D)mm rigid PVC adaptable box with sealing gasket



E238E



E23820, E23820H



E2382

## SURFACE MOUNTED BOXES

*(Designed to BS4662)*

**E238E**  
35mm deep surface mounted box with earth terminal

**E23820**  
35mm deep surface mounted box with 4 lockouts (20mm)

**E23820H**  
35mm deep surface mounted box with 3 lockouts & 1 entry (20mm)

**E2382**  
2 single gang surface mounted box



## SURFACE MOUNTED BOXES

(Designed to BS4662)

**238**  
1 gang surface mounted box  
(Australia Standard)

**ET238E**  
2 gang surface mounted box

**ET238D**  
Surface mounted box  
(For shaver outlet)

**E449AS**  
Converts 1 gang flush to 2 gang  
surface mounted spacer




## ARCHITRAVE MOUNTING BLOCKS

**701**  
1 gang mounting block

**702**  
2 gang mounting block

**703**  
3 gang mounting block

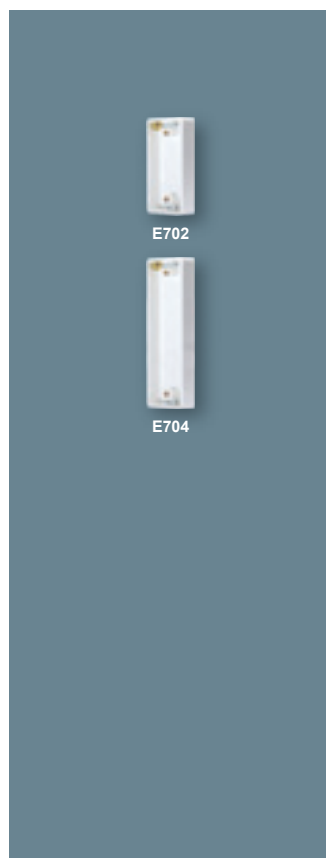

## ARCHITRAVE MOUNTING BLOCKS

**E702**  
Mounting block  
(For EA2031, EA2032)

**E704**  
Mounting block  
(For EA2033, EA2034)



## PVC FLUSH MOUNTING WALL BOXES

(Designed to BS4662)

**E257SBE**  
1 gang wall box with brass insert  
& earth, depth 35mm

**E257DBE**  
1 gang wall box with brass insert,  
earth, 20mm & 25mm knockouts,  
depth 47mm

**E257DBE20**  
1 gang wall box with brass insert,  
earth & 20mm knockouts, depth  
47mm

**ET257BE**  
2 gang wall box with brass insert  
& earth, depth 35mm

**ET257DBE**  
2 gang wall box with brass insert  
& earth, depth 47mm

Colour	Code	Product																
		E-Series	Mechs	E-1000 Series	E-2000 Series	E-3000 Series	E-2000 Frames	Spectra ***	Classic range bases	Classic range housings	Classic mounting blocks	56 Range *	Converta	Gainsborough	Metalclad inserts	C-Bus	Saturn	Neos **
White	WE	✓	✓	✓	✓	✓	✓		✓				✓		✓			
Red	RD	✓	✓				✓											
Black	BK	✓	✓		✓		✓		✓						✓			
Dark blue	DB	✓	✓				✓											
Yellow	YL	✓	✓				✓											
Beige	BG	✓	✓															
Desert sand	DS	✓	✓				✓											
Dark brown	BR	✓	✓				✓											
Classic gold	CGE						✓											
Marble green	CGM						✓											
Gun metal	CUE						✓											
Checkers	CCA						✓											
Mahogany wood	CMW						✓											
Burgandy	BGD						✓											
Rose pink	PS						✓											
Polar blue	PB						✓											
Mirror silver	CSE						✓											
Purple dream	CPA						✓											
Soft grey	SG						✓											
Brazilian black marble	CBM						✓											
White marble	CWM						✓											
Birdseye wood	CBW						✓											
Dancing rain	CDA						✓											
Polished brass										✓								
Antique brass										✓								
Chrome										✓								
Pine	PN										✓							
Cedar	CD										✓							
Primed	UC										✓							
Stainless steel														✓				
Gold														✓				
Brass														✓				
Resistant orange	RO											✓						
Grey battleship	GB					✓												✓
Glass front	GF																✓	

\*  
56 Series colours are resistant specific, please contact Clipsal


\*\*  
For inner and outer surrounds and rocker packs, please contact Clipsal

\*\*\*  
Spectra is on a bespoke order basis only, please contact Clipsal


## FLUSH SWITCHES

### Flush Switches

#### 1. ONE WAY WIRING DIAGRAM

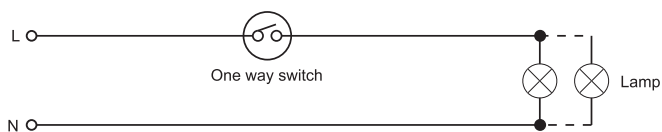


#### 2. TWO WAY WIRING DIAGRAM

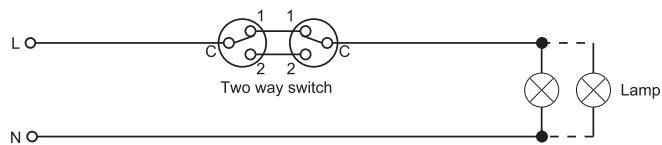


### One Way Circuit with Neon Indicator


#### 1. NEON AS ORIENTATING INDICATOR

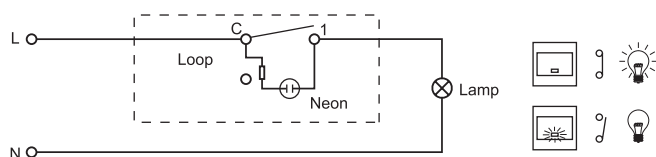

#### 2. NEON ALWAYS ON

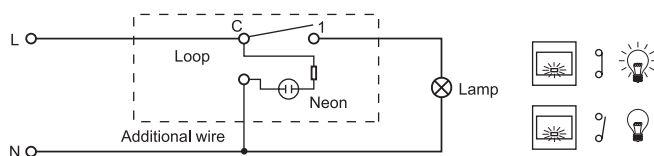


#### 3. NEON AS OUTPUT INDICATOR

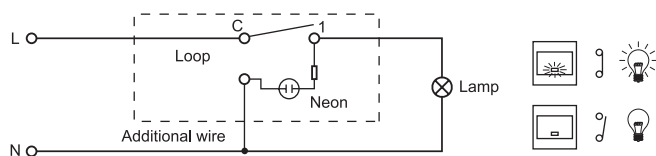


### Two Way Circuit with Neon Indicator

#### 1. NEON AS ORIENTATING INDICATOR

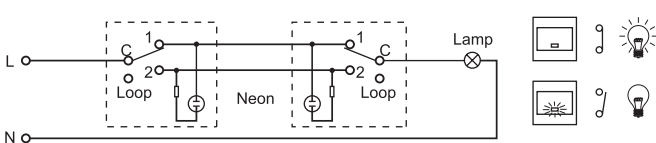


#### 2. NEON ALWAYS ON

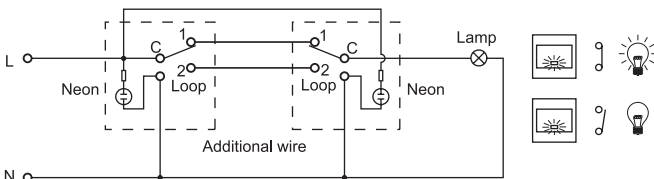


# FLUSH SWITCHES

## Two Way Switch Connected in One Way Circuit

### 1. NEON AS ORIENTATING INDICATOR

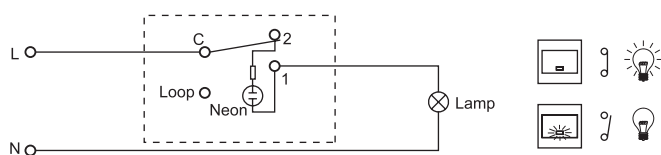


### 2. NEON AS ORIENTATING INDICATOR

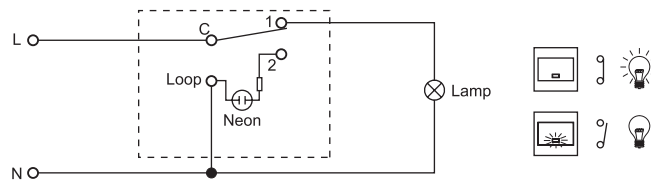

## Intermediate Switch


### WIRING DIAGRAM

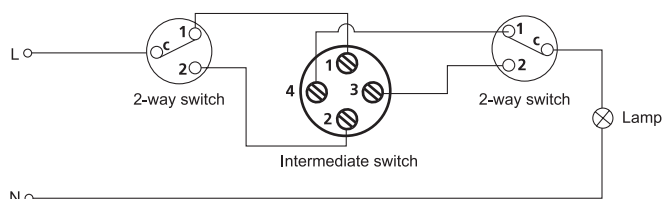

Use this intermediate switch for a 3-way switching design only and in accordance with the schematic wiring on the left. We do not recommend using it in any other applications, as it changes the polarity of a circuit that may cause danger to life and/or damage to appliances.

## Pneumatic Time Delay Switch


### WIRING DIAGRAM

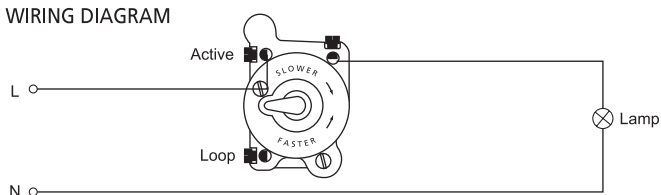

Turn on the timer by pressing the button in. The switch will stay on until the button returns out and the time delay can be adjusted from 2 to 10 minutes. For adjustment, carefully rotate arm at rear of switch by small increments.

## Double Pole Switch

### WIRING DIAGRAM

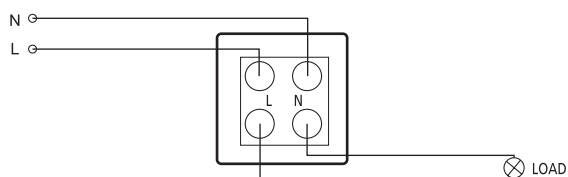




# FLUSH SWITCHES

## Hotel SKUs

### WIRING DIAGRAM


- 1 - Bell push switch with illuminated  
"Please Clean Up" symbol

Cat.No.E2031BPM

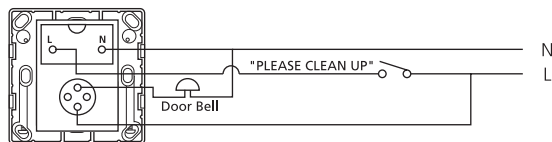


- 3 - Bell push switch with illuminated  
"Do Not Disturb" symbol

Cat.No.E2031BPD

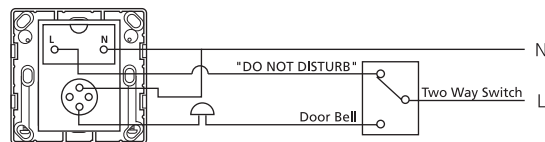


- 2 - Illuminated "Do Not Disturb" &  
"Please Clean Up" symbol

Cat.No.E2032VDM & E2032DMH

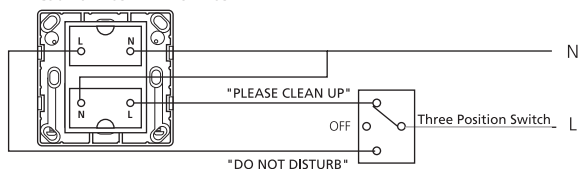

- 4 - Entrance Bell Press & Message Panel

Cat.No.E2033LBPDM

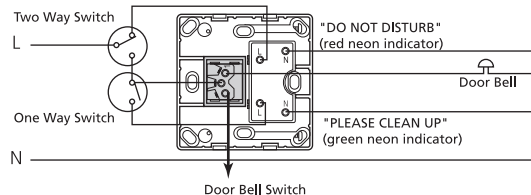




# ELECTRONIC SWITCHES

## Electronic Time Delay Switches

### WIRING DIAGRAM

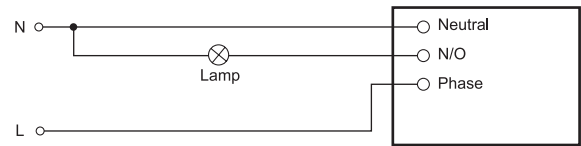

### TIME DELAY ADJUSTMENT

Trim Pot adjustment - the time delay is adjusted from the minimum position to the maximum position in the clockwise direction.


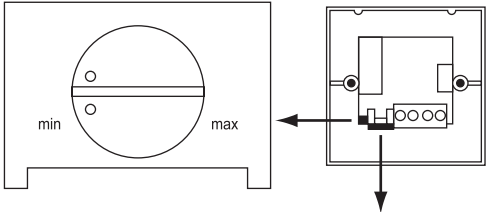


Figure	E2031ETRF60	E2031ETRF720
(1)	1-5min	1-3hours
(2)	4-20min	2-6hours
(3)	15-60min	4-12hours




Movable Link Arrangement - the unit is factory set at the smallest time range. To achieve different time ranges, rearrange the links as shown above.


# ELECTRONIC SWITCHES

## Electronic Key Card Switch

### WIRING DIAGRAM

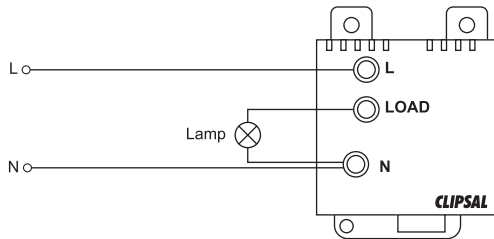


### OPERATION

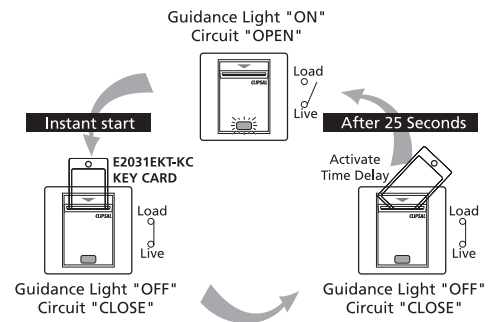

## ELECTRONIC SWITCHES

### Infrared Detector(Ceiling Mount)

#### 1. 751 wiring diagram

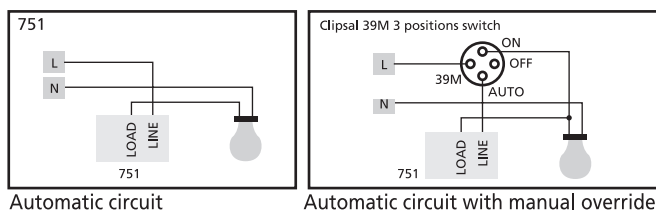


Automatic circuit


Automatic circuit with manual override

751 series detectors are automatic light switches that instantly activate lighting in response to body movement within a specified detection zone. Once the area is vacated, the same lights are turn off after an adjustable time delay period. 751R is designed for link up operation to enlarge the detection field.

#### Detection area

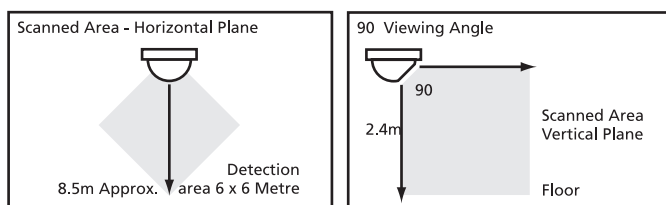

#### 2. 751R wiring diagram

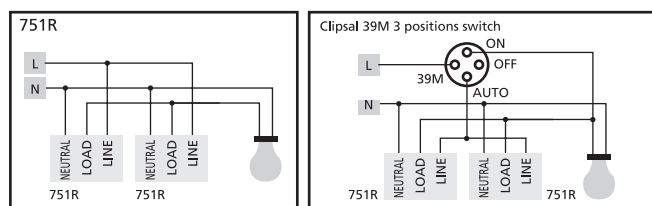

Automatic circuit


Automatic circuit with manual override

#### Specifications


Cat. no.	751	751R
Voltage	192 - 264V ac 50Hz	
Max. load current	2A	10A
Min. load current	40mA	-
Detection method	Passive infrared detection of thermal radiation	
Load type	Incandescent & fluorescent loads	
Time delay	5sec. - 20min. (adjustable)	
Detection area	6x6m, 90° from sensor head (Rotatable through 120° when installed)	
Installation height	2.4m with sensor head vertical	
Standby current	2mA	
Operating light level	Full light to below 1 lux	

### Sunset Switch

#### AUTOMATIC OPERATION (TIMER ENABLED) WIRING DIAGRAM

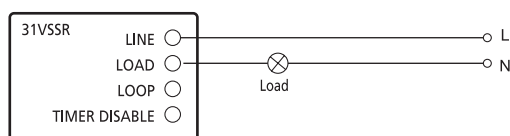


#### TIMER DISABLED WIRING DIAGRAM

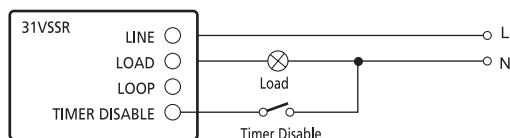

It operates lighting loads automatically when the ambient light level falls below 10 lux, at around sunset. The light will then turn off when the light level exceeds 30 lux or until the pre-set timer period has elapsed. It is recommended that the switch is positioned on any exterior surface facing away from direct artificial light and sunlight as this may cause the unit to exceed the maximum operating temperature.

#### Setting the Timer



Total time set is 4hr + 2hr + 30min = 6 hours and 30 minutes.

In order to add the appropriate time interval to the total timeout period the appropriate switch must be turned on. The total timeout period will be equal to the sum of all the time intervals assigned to the switches in the ON position. Do not set all the timer switches to 'OFF', as it will cause the unit to stop operating.

#### Specifications


Operating Voltage Range	192-265V a.c. 50Hz
Load Type	Incandescent & fluorescent loads
Max. Load Current	10A
Standby Current	8.2mA
Time Range	15min. - 15 hours and 45min.
Time Accuracy	± 15%

# ELECTRONIC SWITCHES


## Motion Control Switch

### Three-wire switch wiring diagram

#### One way wiring

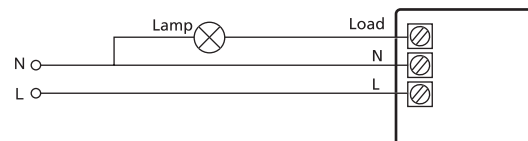


#### Multi-point control

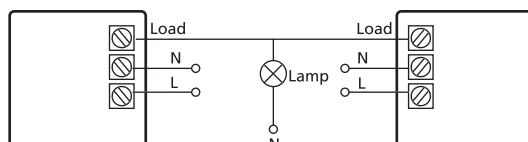

The motion control switch is an automatic light switch that instantly activates lighting in response to body movement within a specified detection zone. Once the area is vacated, the same lights are turned off after an adjustable time delay period. The motion sensor will be deactivated when the manual override button is pushed to "DOWN" position and the lights will be continuously switched on. The sensor can detect the environmental brightness level and adjust to turn on with a specified ambient light level.

### Detection area

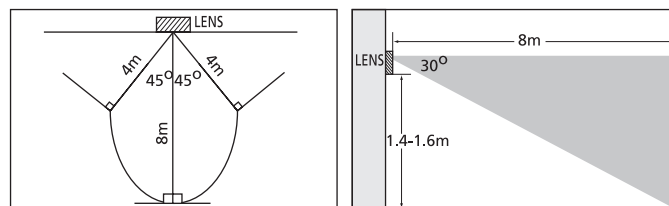


### Specification

Cat. no.	E2751
Voltage	220 - 240V ac 50Hz
Power rating	1000VA
Load type	Incandescent & fluorescent loads load
Standby current	around 30mA
Detection method	Passive infrared detection of thermal radiation
Switch-off time delay	18-220 sec. ( $\pm 35\%$ )
Operating light level	10-500 lux $\pm 20\%$
Detection range	Horizontal range : 8m at 90 to 4m at $\pm 45$ Vertical range : 8m at 0 to 30
Installation height	1.4 to 1.6m, height that moving bodies reach


## Weather Proof Infrared Detector

### WIRING DIAGRAM


#### Automatic Circuit

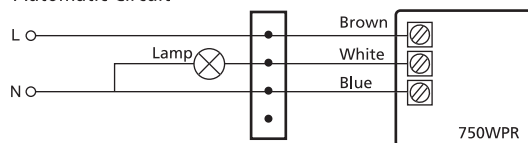

#### Automatic Circuit with manual override

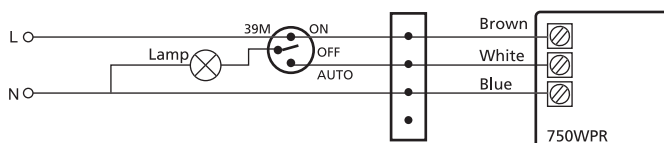

### Detection area

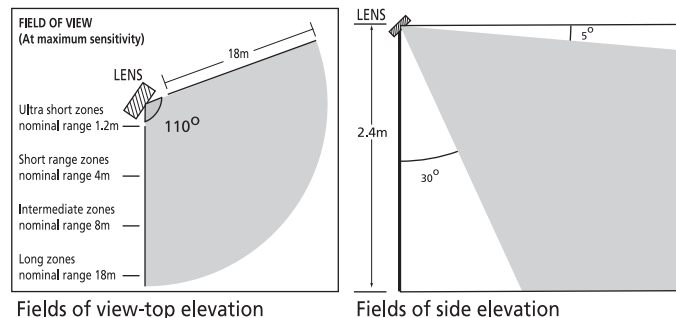

### Specification


Cat. no.	750WPR
Voltage	200-265V ac 50Hz
Max. load current	10A
IP protection rating	IP66
Detection method	Passive infrared detection of thermal radiation
Detection range	18m radius x 110
Installation height	2.4m with sensor head vertical
Time delay	5 sec. - 8 min. (adjustable)
Operating light level	Full light to below 1 lux

## DIMMER SWITCHES


### 500W Dimmer Switch

#### WIRING DIAGRAM

##### 1. ONE WAY WIRING DIAGRAM

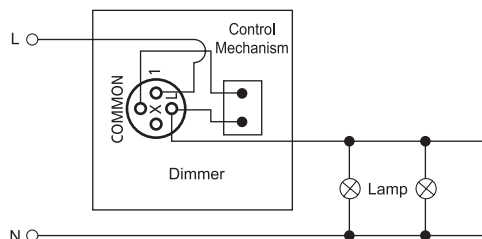


##### 2. TWO WAY WIRING DIAGRAM

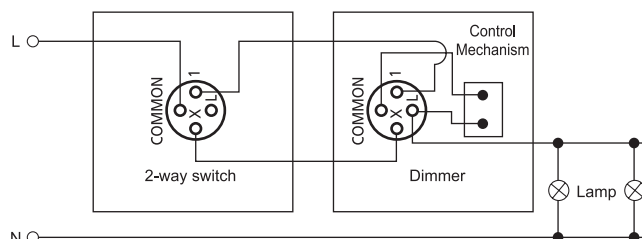


### 1000W Dimmer Switch

#### WIRING DIAGRAM

##### 1. ONE WAY WIRING DIAGRAM




##### 2. TWO WAY WIRING DIAGRAM



This dimmer is designed to control incandescent loads from 60W to 1000W maximum. The dimmer is switched on & off is by pushing the knob, brightness is adjusted by rotation of the control knob - clockwise for bright and anti-clockwise for dim.

### Fused Dimmer Switch

#### WIRING DIAGRAM

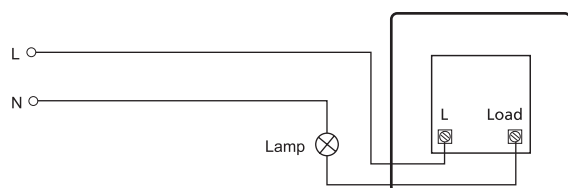

A large control knob of the dimmer allows simple operation by combining together the function of light level adjustment and on/off switch. The dimmer is also fuse-protected to prevent device damage from an overcurrent fault.

#### Specifications


Cat. No.	E1031V600	E1031VE400
Voltage	200-250v a.c.	
Power Rating	40-600W	60-400W
Load Type	Incandescent lamp only	
Dimension	87x87x40mm	87x87x50mm
Operating Temperature	0-35 C	
EMC Compliance	No	Yes

# DIMMER SWITCHES


## Electronic Dimmer Switch

### WIRING DIAGRAM

#### 1. ONE GANG ONE WAY WIRING DIAGRAM

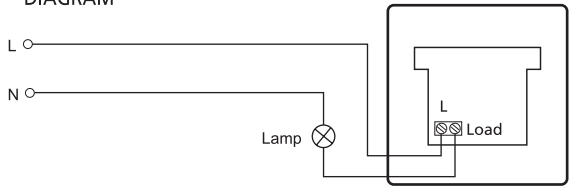

#### 2. TWO GANG ONE WAY WIRING DIAGRAM

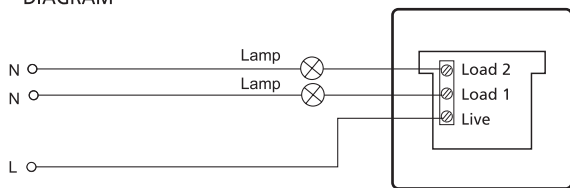

Single quick press for light on/off, press and hold to activate continuing ramping cycle. The switch incorporates a surge filter for instantaneous surge protection and built-in memory to restore previous light level.


### Specifications

Cat. No.	E2031LPD600	E2032LPD400
Description	1G Dimmer	2G Dimmer
Voltage	200-250v a.c. 50/60Hz	
Power Rating	40-600W	40-400W x 2 channels
Load Type	Incandescent lamp only	
Standby Current	≤ 13mA	
Dimension	87x87x40mm	87x87x50mm
Mounting Wall Box	25mm deep or above	35mm deep or above
Operating Temperature	0-35 C	0-30 C
Compliance	BS5518	


## DIMMER SWITCHES

### High Power Dimmer Switch


#### 1. BASIC WIRING DIAGRAM

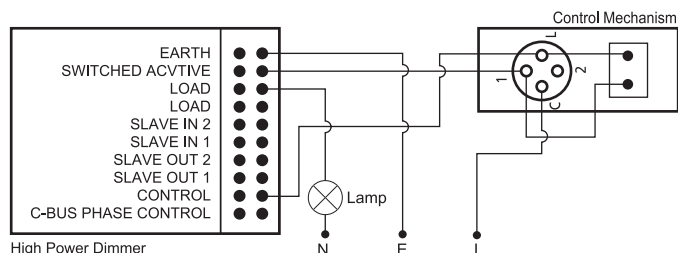

#### 2. TWO WAY SWITCHING OPTION WIRING DIAGRAM

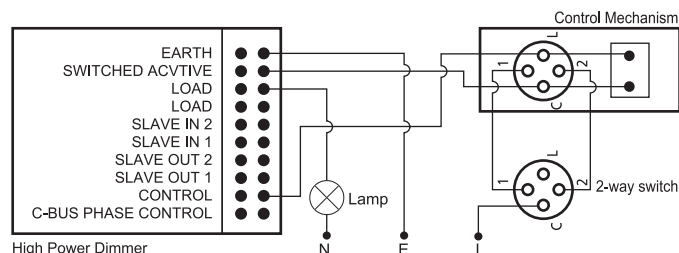


#### 3. MASTER-SLAVE CONFIGURATION USING A CONTACTOR TO SWITCH ACTIVE WIRING DIAGRAM

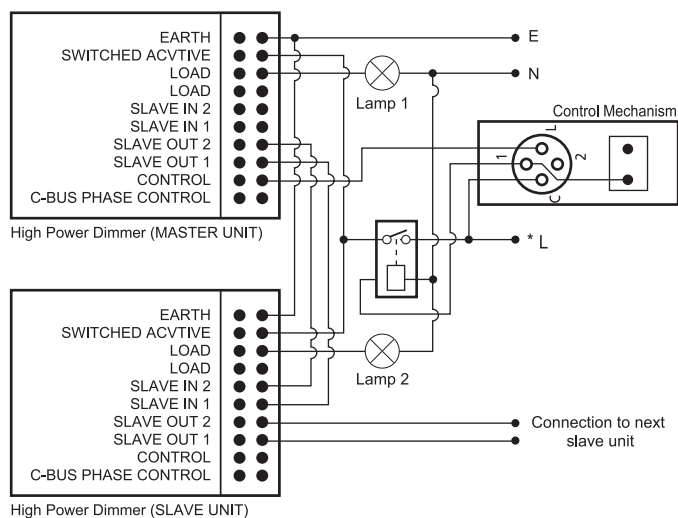

\* Note: The supply of control mechanism and the contactor must be the same phase

#### 4. MASTER-SLAVE CONFIGURATION USING A SECOND SWITCH WIRING DIAGRAM

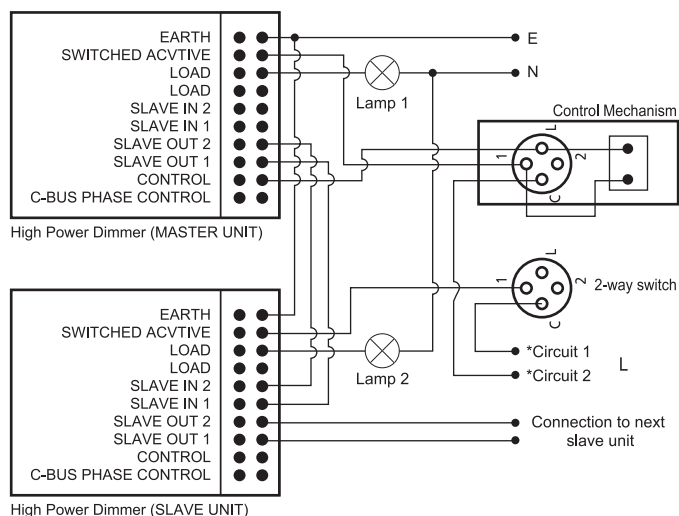

\* Note: Dimmers may be operated from separately fused circuits of the same phase

Clipsal high power dimmer controls load from 40VA up to 3600VA. The new facility of the dimmer allows units to be strung together in master-slave configuration. The slave unit can either be controlled by a contactor to switch active or a second control switch in master-slave mode. When operating in master-slave mode, the slave unit does not have any connection to the control terminal and the minimum brightness adjustment is controlled via the trimpot available in the master control's mechanism.

#### Thermal Cut-Out

Built into the high power dimmer is a thermal cut-out protection circuit which allows the unit to effectively reduce the load current if the temperature inside the enclosure exceeds 60°C. If this becomes activated for any reason, the unit will reduce the maximum brightness for as long as the temperature is above limits.

#### Specifications


Dimensions	Dimmer : 248mm x 150mm x 55mm Remote control : 50mm x 22mm x 22mm
Voltage	240V a.c. 50Hz
Maximum Load	Resistive Load : 15A, max ambient 50 C Inductive Load : 15A at 0.6PF, max. ambient 40 C
Minimum Load	0.17A
Max. Half Cycle Surge	250A r.m.s.
Let Through Energy withstand	360A <sup>2</sup> sec

# DIMMER SWITCHES


## SceneMaster Lighting Controller

### WIRING DIAGRAM

#### Master-Slave Configuration

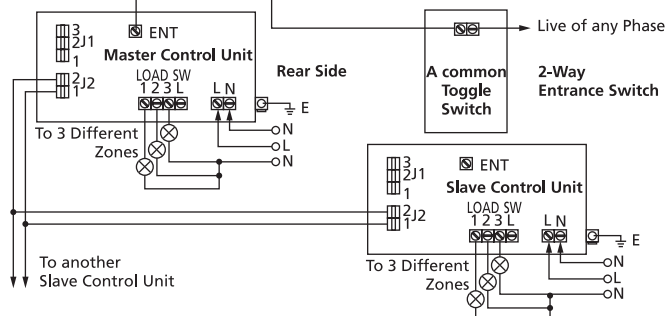

#### Configuration using power booster & fluorescent interface

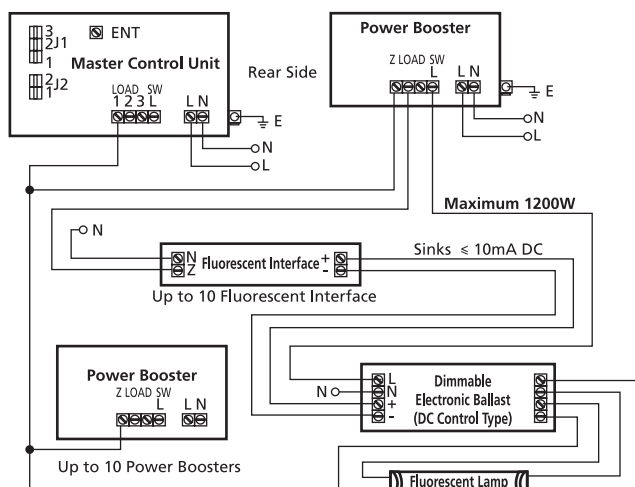

SceneMaster is a lighting controller which provides a simple and convenient method to preset and recall various scenarios to suit different activities.

#### Master Control Unit E2400/3MCU5

- Supplies power and controls brightness of up to 3 zones of lighting (expandable to maximum of 18 zones).
- Five preset scenarios to suit different activities in a defined area.
- Allows IR remote control for flexible and convenient real time lighting controls.

#### Power Booster E2400PB1200

- Boosts the maximum power of 400W supported by each zone of Master Control Unit to 1200W. A total of ten of these units can be connected in parallel to support a zone requiring 12kW power consumption.

#### Fluorescent Interface E2400AM

- Provides 1-10VDC signal to dimmable electronic ballast for dimming fluorescent light sources.

### Specifications


Master Control Unit / Slave Control Unit	
Cat. No.	E2400/3MCU5
Input Voltage	220-240VAC, 50/60Hz
No. of Scenes	5 + Master OFF
No. of Zones	3
Maximum Zone No.	18 (one Master Control Unit with five Slave Control Units)
Output Rating	20-400W per zone 20-400W at switched live terminal
Load Type	Incandescent lamps, halogen lamps, fluorescent lamps and compact fluorescent lamps
Wire diameter	#12-24AWG to lamps, power lines, 2-Way Entrance Switch #24-26AWG to Slave Control Unit
Fade Rate Options	1sec, 3sec, 5sec, 10sec and 10mins
Infrared Detection Range	15m at normal, 6m at $\pm 45$
Transformation	Convertible to slave Control Unit
Dimension	175mm x 88mm x 58mm (LxWxD)
Mounting Method	Wall Mount in 2-gang deep wall box (BS4662)
Operating Temperature	0-40 C
Compliance	B55518
IR Remote Control	
Cat. No.	E2400HTX
Input Voltage	1 X CR2032 3V lithium battery (replaceable)
No. of Scenes	5 + Master OFF
Light Level Changing	Temporarily, not stored in Master Control Unit
Dimension	86mm x 54mm x 8mm (LxWxD)
Colour	Black
Power Booster	
Cat. No.	E2400PB1200
Input Voltage	220-240VAC, 50/60Hz (any phase)
Total Output Rating	(only load terminal is used) 1200W at LOAD (both load terminal and SWL terminals are used 0-400W at LOAD & 1200W at SWL)
Load Type	Same as Master Control Unit
Wire diameter	#12-24AWG to Lamps and Control Units
Operating Temperature	0-40 C
Mounting Method	Surface Mount with attached wall box
Dimension	175mm x 88mm x 56mm (LxWxD)
Compliance	B55733
Fluorescent Interface	
Cat. No.	E2400AM
Input Voltage	220-240VAC, 50/60Hz (any phase)
Output Voltage	1-10V d.c.
Output Current	Less than 10mA d.c.
Ballast Type	1-10V d.c. Dimmable electronic ballast
Max. no. of ballast per Fluorescent Interface	Depends on the loading of ballast
Max. no. of Fluorescent Interface connected to a zone of MCU	10
Operating Temperature	0-50 C
Dimension	30mm x 150mm x 34mm (LxWxD)
Compliance	IEC60928



## DIMMER & FAN CONTROL SWITCHES


### IR Remote Control Dimmer

#### WIRING DIAGRAM

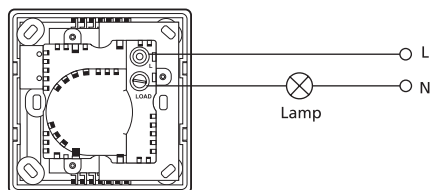


#### Complex Application


Below are some examples of application topology. You may use your imagination to explore some other sophisticated or dramatic applications.



- ⊙ Preset channel : all No.1
- Scenario lighting for a large area




- ⊙ Preset channel : 1, 2, 3, 4
- ⊙ Fading rate : used in some areas as needed
- Walk through control for separate areas



- ⊙ Preset channel : 1, 2, 3, 4
- ⊙ Fading rate : Various
- Scenario lighting with dramatic effect for a confined area.

This state-of-the-art electronic dimming switch provides two memory positions for presetting your favourite light intensities and to lighting effects. By installing and grouping additional units, the user may achieve more sophisticated scenario lighting effect.

#### Detection Range

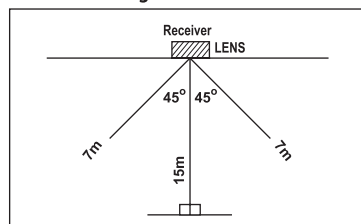


#### Specifications

Infrared Remote Control Dimmer	
Cat. No.	E2752D400T
Voltage	220-240V a.c. 50/60Hz
Power Rating	40-400W
Load Type	Incandescent lamp only (for halogen lamp please check the compatibility of transformer before use)
Dimension	87x87x46mm
Mounting Wall Box	B54662 type, 35mm deep or above
Operating Temperature	0-35 C
Compliance	BSEN 60669-2-1
Infrared Remote Control	
Cat. No.	E2752T
Power supply	One 3V CR2025 lithium battery
Transmission range	15m max. at right angle: 7m at $\pm 45$
Transmission media	Infrared light, wavelength 940nm
Carrier Frequency	38kHz
Dimension	86x54x7.8mm

### Fan Control

#### WIRING DIAGRAM

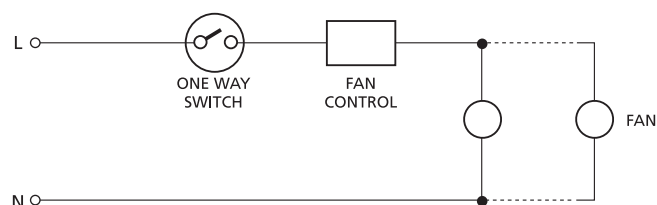


The Clipsal fan controller is a solid state unit, designed to provide smooth speed variations from full to slow on most fans. Fan speed can set to suit any conditions. Full speed for efficient exhaust of stale air or steam in kitchens and bathrooms. Otherwise, the controller should be adjusted to the low setting for constant, quiet circulation and change of fresh air.

Any number of fans may connect in parallel up to a total loading of 400VA. Only similar types of fans should be connected in parallel to minimize the possibility of resultant variable speeds.

# SOCKER OUTLETS

## Telecommunication Accessories TV-FM Socket Outlets

### WIRING DIAGRAM

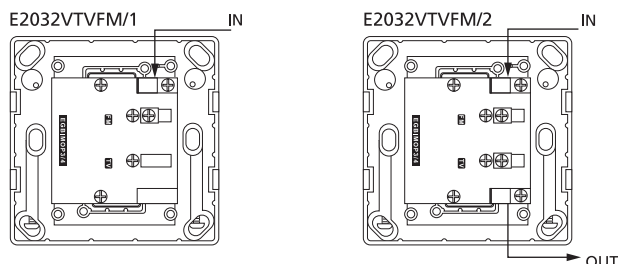

Clipsal TV-FM provides safety isolation rated at 2kV a.c. between aerial lead and socket. Twin outlet with TV/FM diplexer for connection to single coaxial cable with combined TV and FM signals.

### Specifications

Cat. no.	E2032VTVFM/1	E2032VTVFM/2
Description	TV,FM Socket with 1 cord grip, slave unit	TV,FM Socket with 2 cord grips, master unit
Frequency Bandwidth	FM 88-108MHz TV 5-68MHz and 125-862MHz	FM 87.5-108MHz TV 5-68MHz and 125-862MHz
Insertion Loss	< 1.0db	3.5±0.5db
Isolation	>16db	TV-FM > 16db Output-FM > 30db Output-TV > 22db
Load	75 (ohm)	
High Voltage Tolerance	2kV a.c.	
Dimension	87mm x 87mm	
Mounting Centre	60.3mm	
Compliance	BS 3041 : CE marked	



## Telephone outlet - BS standard

### WIRING DIAGRAM

Example of typical connection :

- 1) Connections to 2 and 5
- 2) Earth recall (when used) connect to terminal 4
- 3) Connection to terminal 3 is not usually required.

Existing Incoming Cable from PBX, etc.

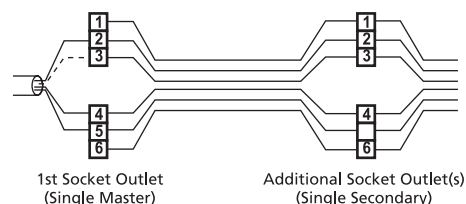


All socket outlet connections are in parallel - any number of socket outlets can be connected, but it is recommended that only a maximum of 5 telephones can be used at any one time on one line.

### Wiring colour code

Pin No.	Pin Code.
1	Green/White
2	Blue/White
3	Orange/White
4	White/Oragne
5	White/Blue
6	White/Green

## Telephone outlet - FCC standard

### WIRING DIAGRAM



### Wiring colour code

Pin No.	Pin Code.
1	Blue
2	Yellow
3	Green
4	Red
5	Brown
6	White


# CLIPSAL®

## MECHANISMS


### Mechanism

#### WIRING DIAGRAM


##### 1 - Intermediate mechanism

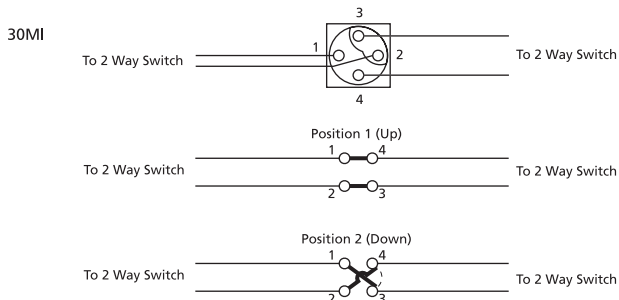


##### 2 - 1 way mechanism




##### 3 - 1 way / 2 way mechanism

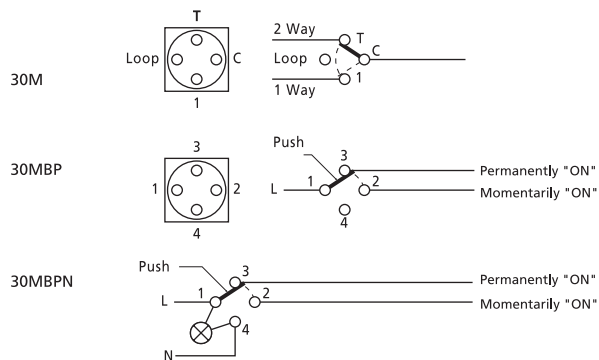


##### 4 - Three position mechanism



##### 5 - Double pole mechanism



##### 6 - 1 way / 2 way mechanism with neon indicator

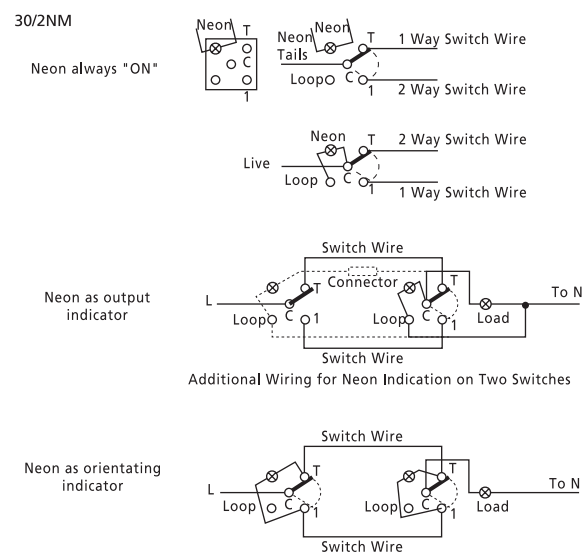

# MECHANISMS

## Mechanism - Surge Filter

The surge filter is the protection device which protect electronic equipment from instantaneous over-voltage surges. The filter has a built-in neon lamp to indicate that the module is operating correctly. After repeated clamping of minor spikes, or following a voltage surge that exceeds the capacity of the unit, the Metal Oxide Varistors may become over stressed and fail, causing the neon lamp to extinguish.

Although the module will no longer offer voltage surge, the power outlet will continue to operate normally and the module should be replaced as soon as possible.


### Specifications

Cat. No.	30SFM
Normal Operating Voltage	265V a.c.
Normal Operating Current	10A
Maximum Operating Voltage	275 - 369V a.c.
Typical Capacitance	900pF
Max. Withstand Current (8/20μs)	6.5kA
Max. Clamping Voltage (8/20μs, 100A)	710V
Energy Absorption	3 x 140J


## Mechanism - 30RJ Socket

### WIRING DIAGRAM

#### 30RJ66SM



#### 30RJ88SM



### Specification for 30RJ88SM

Cat. No.	30RJ88SM
Description	RJ45/Modular 8 way 8 contact socket mechanism
D.C. Resistance	69m
D.C. Resistance Imbalance	20m
Insulation Resistance	>100M
Lead	Cat. 5
Attenuation (@100MHz)	<0.106db
Crosstalk(@100MHz)	<-43db
Return Loss(@100MHz)	<-18db

### Specifications for Terminals

Conductor diameter	#22-24AWG / 0.4-0.6mm
Insulation diameter	0.7-1.4mm
No. of equal diameter conductors per slot	2 maximum
Contact spring force	3N
Operating life	>750 insertion cycles/ >200reterminations
Coupling capacitance between wires	<1pf
Housing materials	Thermoplastic polyester

### Specifications for Socket


Housing materials	ABS
Contacts	50 microns hard gold plate with minimum 100 micron under plate sulphamate nickel
Contacts resistance	Max. 10m Ω

## WEATHER PROOF RANGE


### Weather Proof Series - WS Surface Switches

#### WIRING DIAGRAM


##### WS226 PB Series

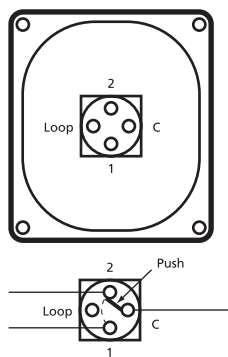


##### WS226 Series, WS229 Series

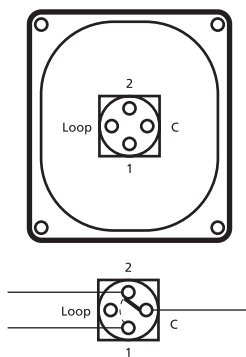

##### WS 226N Series




##### WS Series Mounting Holes Detail

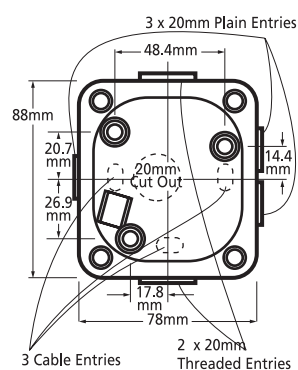


#### One Way Switching

Indicator "ON" continuously



Indicator "ON", indicates Power Available


Indicator "ON", when load is "ON"



Indicator "ON", indicates switch is "ON"


#### Two Way Switching

Indicator "ON" continuously




Indicator "ON", indicates Power Available

Indicator "ON", when load is "ON"



Indicator "ON", indicates switch is "ON"


Indicator "ON", when load is "OFF"

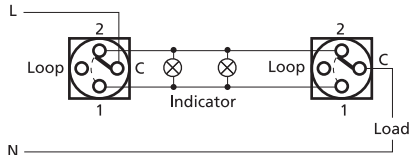


### Weather Proof Series - WHS / WHD / WHT Isolator Switches

#### WIRING DIAGRAM


##### Single pole




##### Double pole




##### Triple pole



#### Conduit Entry Alternatives

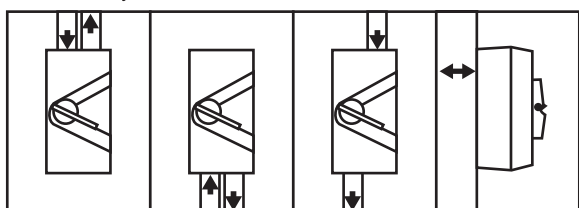

Dual 25mm screwed conduit entries top and bottom of the casing allow four ways to surface wire the switch.

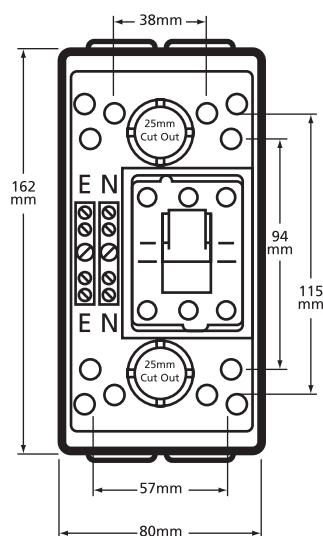

# AQUASEAL IP56 & IP66

TECHNICAL SPECIFICATIONS	CSC	CSO	CSW	CSS
VOLTAGE	250V	250V	250V	Single pole - 250V Double and triple pole - 500V
AMPERAGE	13A	13A	Single pole - 20A/16AX Double pole 20A	40A
DIMENSIONS	80mm x 160mm x 85mm	80mm x 103mm x 85mm	80mm x 103mm x 85mm	80mm x 160mm x 85mm
COMPLIANCE	BS 1363-2	BS 1363-2	BS EN 60669-1 IEC 60669-1 IS 3854 SABS 163 SABSIEC669-1 IEC 60529	IEC 60947.3 & BS EN 60529 AS/NZ 3000 AS/NZ 3100 AS/NZ 3133
INTERNATIONAL PROTECTION RATING	IP56 for plugs with cables ø5-14mm	IP56 for plugs with cables ø5-14mm	IP66	IP66
MOTOR RATING	N/A	N/A	N/A	Single pole - M120 Double & triple pole - M100
TERMINAL BORES	5mm	5mm	4.1mm	7.45mm
TERMINAL ACCOMMODATION	4 x 2.5mm <sup>2</sup>	4 x 2.5mm <sup>2</sup>	3 x 2.5mm <sup>2</sup>	1 x 10mm <sup>2</sup> cable max.
ENTRIES	Threaded conduit Entries - 4 x M25 at 33mm centres Plain cut-out - 1 x 25 (25 - 20mm (reducer included)	Threaded conduit Entries - 4 x M25 at 33mm centres Plain cut-out - 1 x 25 (25 - 20mm (reducer included)	Threaded conduit Entries - 4 x M25 at 33mm centres Plain cut-out - 1 x 25 (25 - 20mm (reducer included)	Threaded conduit Entries - top & bottom 4 x M25 at 33mm centres Plain cut-out - rear of base 2 x 25 (25 - 25mm reducer included)

## 56 & 66 SERIES

### Surface Switches

Cat.no	No.of Switched Poles	I <sub>th</sub> (A)	U <sub>e</sub> (V)	Utilitation Category (A)			M rating	Conductor size (mm <sup>2</sup> )	
				AC21	AC22	AC23		Min	Max.
56SW110	1	10	250	10	8	8	M80	1.5	6
56SW110/2	1	10	250	10	8	8	M80	1.5	6
56SW115	1	15	250	15	8	8	M80	1.5	6
56SW115/2	1	15	250	15	8	8	M80	1.5	6
56SW110/I	1	10	250	10	8	8	M80	1.5	6

Cat.no	No.of Switched Poles	I <sub>th</sub> (A)	U <sub>e</sub> (V)	Utilitation Category (A)			M rating	Conductor size (mm <sup>2</sup> )	
				AC21	AC22	AC23		Min	Max.
56SW110HD	1	10	250	10	10	10	M260	6	25
56SW115HD	1	15	250	15	15	15	M260	6	25
56SW120	1	20	250	20	20	20	M260	2.5	25
56SW220	2	20	500	20	20	20	M220	2.5	25
56SW310	3	10	500	10	10	10	M100	1.5	25
56SW320	3	20	500	20	20	20	M100	2.5	25

#### Dimensions

FRONT MOUNTING ENCLOSURE

SIDE COMPLETE

FRONT COMPLETE

#### Wiring Diagrams

**56SW110  
56SW115**

REAR MECHANISMS

**56SW110/2  
56SW115/2**

REAR MECHANISMS

**56SW110/I**

REAR MECHANISMS

#### Dimensions

FRONT MOUNTING ENCLOSURE

SIDE COMPLETE

FRONT COMPLETE

#### Wiring Diagrams

**56SW110HD  
56SW115HD  
56SW120**

REAR MECHANISMS

**56SW220**

REAR MECHANISMS

**56SW310  
56SW320**

REAR MECHANISMS

SWITCH TERMINALS ARE NOT IDENTIFIED

SWITCH IS BACKWIRED

CONDUCTOR TERMINATION IS PRESSURE PLATE TYPE

#### Remark :



- I<sub>th</sub> - Conventional enclosed thermal current
- U<sub>e</sub> - Operational voltage
- AC21 - Switching of resistive loads, including moderate overloads
- AC22 - Switching of mixed resistive and inductive loads, including moderate overloads
- AC23 - Switching of motor loads or highly inductive loads
- M rating - For switching of locked rotor current

# 56 & 66 SERIES

## Surface Switches

Cat.no	No. of Switched Poles	I <sub>he</sub> (A)	U <sub>e</sub> (V)	Utilitation Category (A)			M rating	Conductor size (mm <sup>2</sup> )	
				AC21	AC22	AC23		Min	Max.
56SW132	1	32	250	32	32	20	M260	4	25
56SW232	2	32	500	32	32	20	M220	4	25
56SW332	3	32	500	32	32	20	M100	4	25

Cat.no	No. of Switched Poles	I <sub>he</sub> (A)	U <sub>e</sub> (V)	Utilitation Category (A)			M rating	Conductor size (mm <sup>2</sup> )	
				AC21	AC22	AC23		Min	Max.
56SW150	1	50	250	50	50	25	M250	10	25
56SW163	1	63	250	63	63	25	M250	16	25
56SW250	2	50	500	50	50	25	M220	10	25
56SW263	2	63	500	63	63	25	M220	16	25
56SW350	3	50	500	50	50	25	M200	10	25
56SW363	3	63	500	63	63	25	M200	16	25

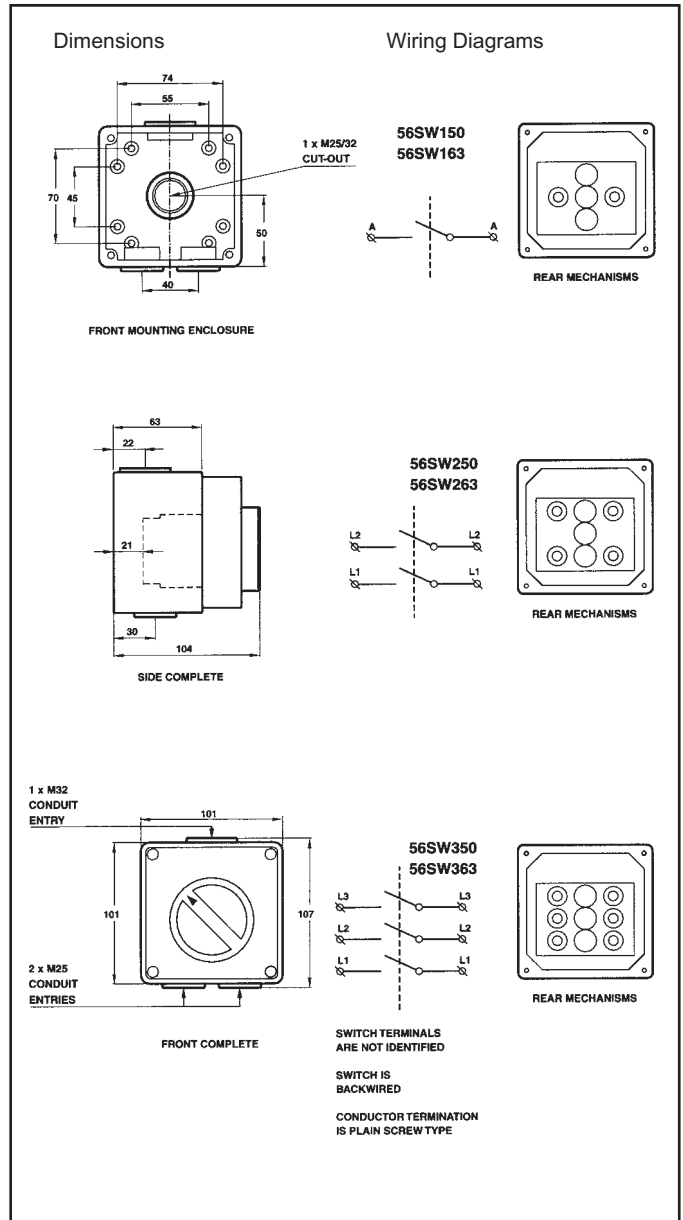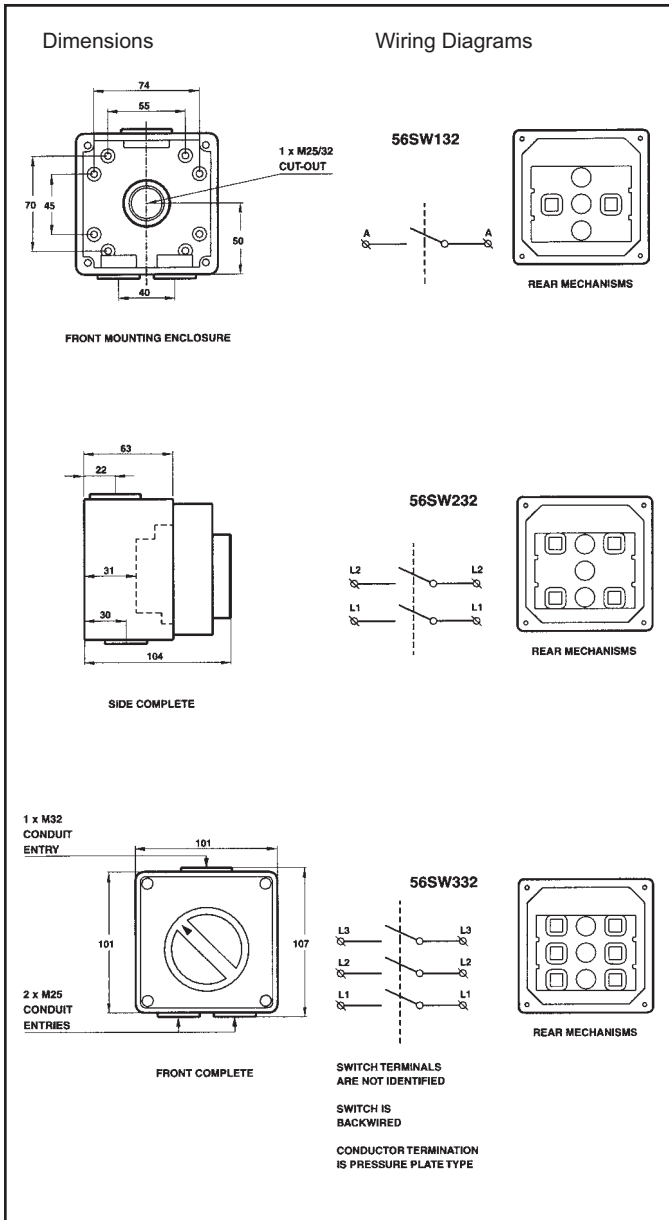

### Remark :

- I<sub>the</sub> - Conventional enclosed thermal current
- U<sub>e</sub> - Operational voltage
- AC21 - Switching of resistive loads, including moderate overloads
- AC22 - Switching of mixed resistive and inductive loads, including moderate overloads
- AC23 - Switching of motor loads or highly inductive loads
- M rating - For switching of locked rotor current



## 56 & 66 SERIES

### Surface Switches

Cat.no	No. of Switched Poles	I <sub>the</sub> (A)	U <sub>e</sub> (V)	Utilisation Category (A)			M rating	Conductor size (mm <sup>2</sup> )	
				AC21	AC22	AC23		Min	Max.
56SW363/2	3	63	500	63	63	25	M200	16	25

Cat.no	No. of Switched Poles	I <sub>ne</sub> (A)	U <sub>e</sub> (V)	Utilidation Category (A)			M rating	Conductor size (mm <sup>2</sup> )	
				AC21	AC22	AC23		Min	Max.
56SW320C	AS 56SW320 + 2A CHANGE OVER AUX. LATE MAKE EARLY BREAK							16	25/2.5

#### Dimensions

FRONT MOUNTING ENCLOSURE

56SW363/2

REAR MECHANISMS

SIDE COMPLETE

FRONT COMPLETE

#### Wiring Diagrams

SWITCH TERMINALS ARE NOT IDENTIFIED

SWITCH IS BACKWIRED

CONDUCTOR TERMINATION IS PLAIN SCREW TYPE

#### Dimensions

FRONT MOUNTING ENCLOSURE

56SW320C

REAR MECHANISMS

SIDE COMPLETE

FRONT COMPLETE

#### Wiring Diagrams

SWITCH TERMINALS ARE NOT IDENTIFIED

SWITCH IS BACKWIRED

CONDUCTOR TERMINATION IS PLAIN SCREW TYPE

#### Remark :

- I<sub>the</sub> - Conventional enclosed thermal current
- U<sub>e</sub> - Operational voltage
- AC21 - Switching of resistive loads, including moderate overloads
- AC22 - Switching of mixed resistive and inductive loads, including moderate overloads
- AC23 - Switching of motor loads or highly inductive loads
- M rating - For switching of locked rotor current


# 56 & 66 SERIES

## Surface Switches

Cat.no	No. of Switched Poles	$I_{th}$ (A)	$U_e$ (V)	Utilitation Category (A)			M rating	Conductor size (mm <sup>2</sup> )	
				AC21	AC22	AC23		Min	Max.
56SW332C	AS 56SW320 + 2A CHANGEVER AUX. LATE MAKE EARLY BREAK							16	25/2.5
56SW332C	AS 56SW332 + 2A CHANGEVER AUX. LATE MAKE EARLY BREAK							16	25/2.5

Cat.no	No. of Switched Poles	$I_{th}$ (A)	$U_e$ (V)	Utilitation Category (A)			M rating	Conductor size (mm <sup>2</sup> )	
				AC21	AC22	AC23		Min	Max.
56SW420	4	20	440	20	20	20	-	2.5	6

### Dimensions




1 x M25/32 CUT-OUT

FRONT MOUNTING ENCLOSURE


### Wiring Diagrams

**56SW332C  
56SW350C**



REAR MECHANISMS


MICROSWITCH IS CONFIGURED AS LATE MAKE/EARLY BREAK



SWITCH TERMINALS ARE NOT IDENTIFIED

SWITCH IS BACKWIRED

CONDUCTOR TERMINATION IS PLAIN SCREW TYPE




1 x M32 CONDUIT ENTRY

2 x M25 CONDUIT ENTRIES

FRONT COMPLETE

### Dimensions




1 x M25/32 CUT-OUT


FRONT MOUNTING ENCLOSURE

### Wiring Diagrams


**56SW420**



REAR MECHANISMS




SIDE COMPLETE



1 x M25 CONDUIT ENTRY

2 x M25 CONDUIT ENTRIES

FRONT COMPLETE



SWITCH IS SIDEWIRED  
CONDUCTOR TERMINATION IS PRESSURE PLATE TYPE

### Remark :


- $I_{th}$  - Conventional enclosed thermal current
- $U_e$  - Operational voltage
- AC21 - Switching of resistive loads, including moderate overloads
- AC22 - Switching of mixed resistive and inductive loads, including moderate overloads
- AC23 - Switching of motor loads or highly inductive loads
- M rating - For switching of locked rotor current

## 56 & 66 SERIES


### Heavy-Duty Surface Switches

Cat.no	No. of Switched Poles	$I_{th}$ (A)	$U_e$ (V)	Utilisation Category (A)			Conductor size (mm <sup>2</sup> )	
				AC21	AC22	AC23	Min	Max.
56SWH325	3	25	500	25	25	25	1.5	16
56SWH340	3	40	500	40	40	25	1.5	16
56SWH363	3	63	500	63	63	63	1.5	35
56SWH380	3	80	500	80	80	63	1.5	35
56SWH425	4	25	500	25	25	25	1.5	25
56SWH440	4	40	500	40	40	25	1.5	25
56SWH463	4	63	500	63	63	40	1.5	25


#### Dimensions

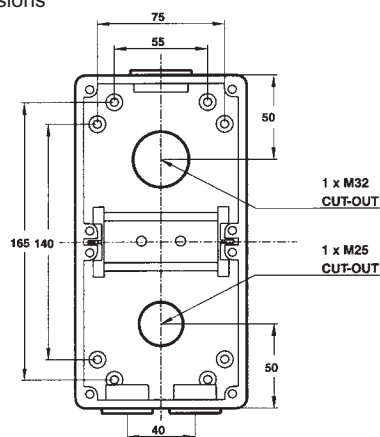

FRONT MOUNTING ENCLOSURE

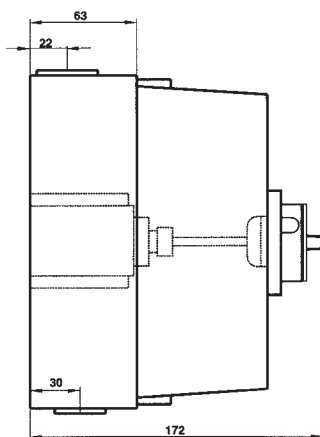




SIDE COMPLETE

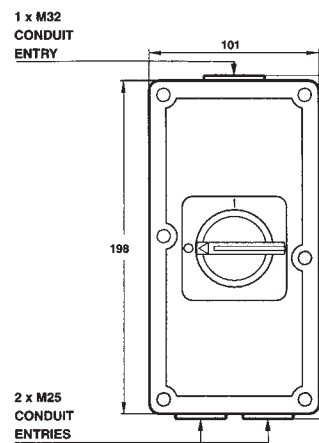

FRONT COMPLETE




#### Wiring Diagrams

56SWH325  
56SWH340






SWITCHES ARE SIDEWIRED  
CONDUCTOR TERMINATION  
IS PLAIN SCREW TYPE

56SWH425  
56SWH440  
56SWH463



56SWH363  
56SWH380



#### Remark :

- $I_{the}$  - Conventional enclosed thermal current
- $U_e$  - Operational voltage
- AC21 - Switching of resistive loads, including moderate overloads
- AC22 - Switching of mixed resistive and inductive loads, including moderate overloads
- AC23 - Switching of motor loads or highly inductive loads
- M rating - For switching of locked rotor current

# 56 & 66 SERIES


## Changeover and Reversing Switches

Cat.no	No.of Switched Poles	I <sub>he</sub> (A)	U <sub>e</sub> (V)	Utilidation Category (A)			AC15	Conductor size (mm <sup>2</sup> )	
				AC21	AC22	AC23		Min	Max.
56SW220CO Changeover Switch	2	20	500	20	-	15	8/6	1.5	2x4
56SW420CO Changeover Switch	4	20	500	20	-	15	8/6	1.5	2x4

## Key Operated Switches


STANDARD SECURITY SWITCH									
Cat.no	No.of Switched Poles	I <sub>he</sub> (A)	U <sub>e</sub> (V)	Utilidation Category (A)			M rating	Conductor size (mm <sup>2</sup> )	
				AC21	AC22	AC23		Min	Max.
For locking in only the 'off' position									
56K1SW120	1	20	250	20	20	20	M250	2.5	25
56K1SW220	2	20	500	20	20	20	M220	2.5	25
56K1SW310	3	10	500	10	10	10	M200	1.5	25
56K1SW320	3	20	500	20	20	20	M200	2.5	25
For locking in only both 'on' & 'off' positions									
56K2SW120	1	20	250	20	20	20	M250	2.5	25
56K2SW220	2	20	500	20	20	20	M220	2.5	25
56K2SW310	3	10	500	10	10	10	M200	1.5	25
56K2SW320	3	20	500	20	20	20	M200	2.5	25

### Dimensions & Wiring Diagrams

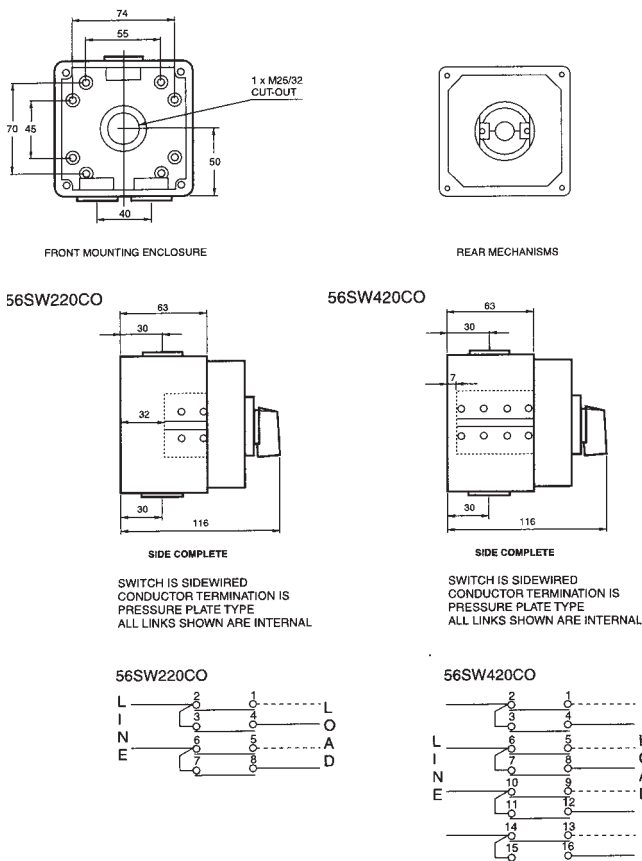

### Dimensions

### Wiring Diagrams

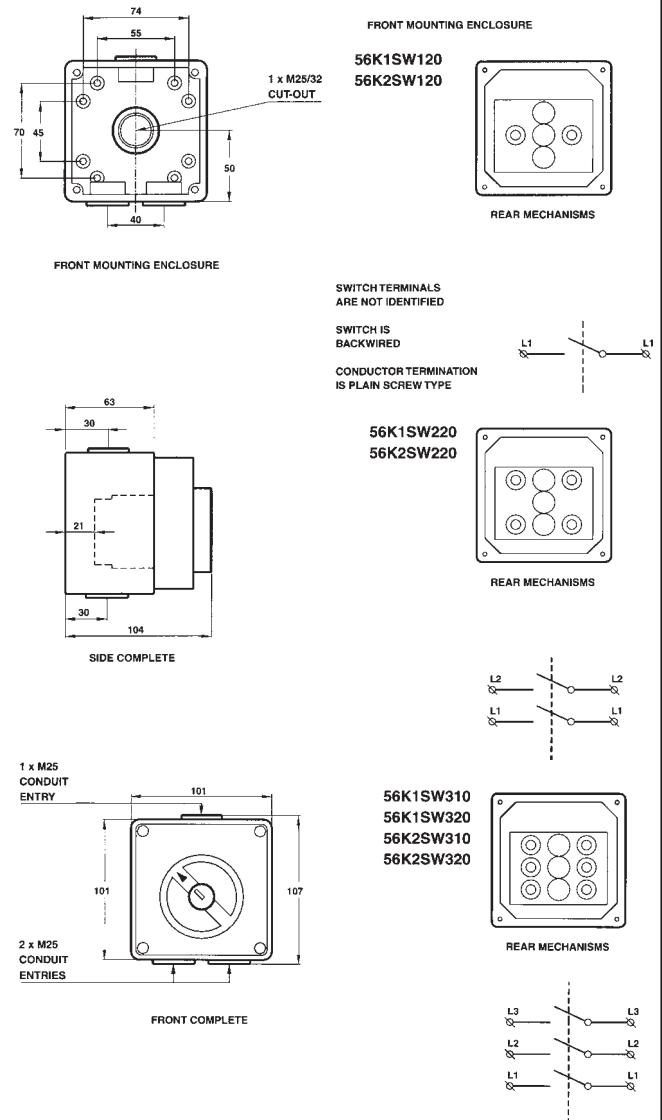

### Remark :

- I<sub>he</sub> - Conventional enclosed thermal current
- U<sub>e</sub> - Operational voltage
- AC21 - Switching of resistive loads, including moderate overloads
- AC22 - Switching of mixed resistive and inductive loads, including moderate overloads
- AC23 - Switching of motor loads or highly inductive loads
- M rating - For switching of locked rotor current

## 56 & 66 SERIES


### Key Operated Switches

STANDARD SECURITY SWITCHES									
Cat.no	No.of Switched Poles	I <sub>sc</sub> (A)	U <sub>e</sub> (V)	Utilitidation Category (A)			M rating	Conductor size (mm <sup>2</sup> )	
				AC21	AC22	AC23		Min	Max.
For locking in only the 'off' position									
56K1SW132	1	32	250	32	32	25	M250	4	25
56K1SW150	1	50	250	50	50	25	M250	10	25
56K1SW232	2	32	500	32	32	25	M220	4	25
56K1SW250	2	50	500	50	50	25	M220	10	25
56K1SW332	3	32	500	32	32	25	M200	4	25
56K1SW350	3	50	500	50	50	25	M200	10	25
For locking in only both 'on' & 'off' positions									
56K2SW132	1	32	250	32	32	25	M250	4	25
56K2SW150	1	50	250	50	50	25	M250	10	25
56K2SW232	2	32	500	32	32	25	M220	4	25
56K2SW250	2	50	500	50	50	25	M220	10	25
56K2SW332	3	32	500	32	32	25	M200	4	25
56K2SW350	3	50	500	50	50	25	M200	10	25


MEDIUM SECURITY SWITCHES									
Cat.no	No.of Switched Poles	I <sub>ne</sub> (A)	U <sub>e</sub> (V)	Utilidation Category (A)			M rating	Conductor size (mm <sup>2</sup> )	
				AC21	AC22	AC23		Min	Max.
For locking in only the 'off' position									
56K1SW132MS	1	32	250	32	32	25	M250	4	25
For locking in only both 'on' & 'off' positions									
56K2SW132MS	1	32	250	32	32	25	M250	4	25

HIGH SECURITY SWITCHES									
For locking in only the 'off' position									
56K1SW132HS	1	32	250	32	32	25	M250	4	25


#### Dimensions

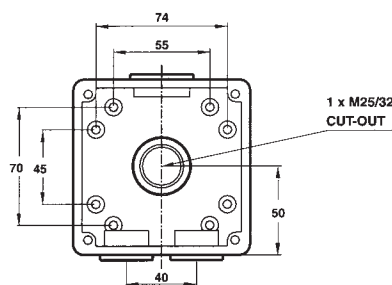

FRONT MOUNTING ENCLOSURE




SIDE COMPLETE

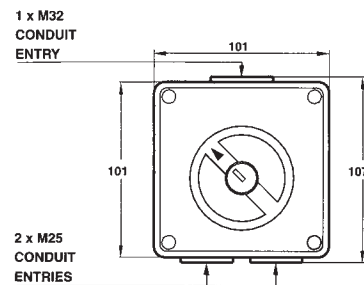


FRONT COMPLETE


#### Wiring Diagrams

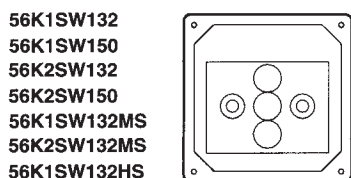

REAR MECHANISMS



REAR MECHANISMS






REAR MECHANISMS

SWITCH TERMINALS ARE NOT IDENTIFIED

SWITCH IS BACKWIRED

CONDUCTOR TERMINATION IS PLAIN SCREW TYPE



- NOTE: 1. MS AND HS USE KEY TO SWITCH MECH.  
2. MS AND HS HAVE NO SHARP EDGES ON ROTARY SWITCH KNOB  
3. HS PROVIDED IN KIT FORM

#### Remark :

- I<sub>the</sub> - Conventional enclosed thermal current
- U<sub>e</sub> - Operational voltage
- AC21 - Switching of resistive loads, including moderate overloads
- AC22 - Switching of mixed resistive and inductive loads, including moderate overloads
- AC23 - Switching of motor loads or highly inductive loads
- M rating - For switching of locked rotor current


# 56 & 66 SERIES

## Key Operated Switches


STANDARD SECURITY SWITCHES									
Cat.no	No.of Switched Poles	I <sub>nc</sub> (A)	U <sub>e</sub> (V)	Utilidation Category (A)			M rating	Conductor size (mm <sup>2</sup> )	
				AC21	AC22	AC23		Min	Max.
For locking in only the 'off' position									
56K1SW115	1	15	250	15	10	8	M80	1.5	6
For locking in only both 'on' & 'off' positions									
56K2SW115	1	15	250	15	10	8	M80	1.5	6

MEDIUM SECURITY SWITCHES									
For locking in only the 'off' position									
56K1SW115MS	1	15	250	15	10	8	M80	1.5	6
For locking in only both 'on' & 'off' positions									
56K2SW115MS	1	15	250	15	10	8	M80	1.5	6


HIGH SECURITY SWITCHES									
For locking in only the 'off' position									
56K1SW115HS	1	15	250	15	10	8	M80	1.5	6

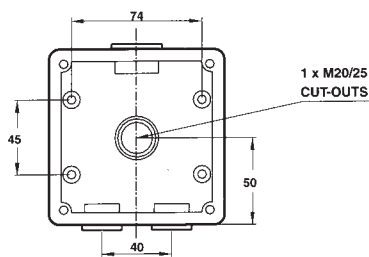

FRONT MOUNTING ENCLOSURE




SIDE COMPLETE

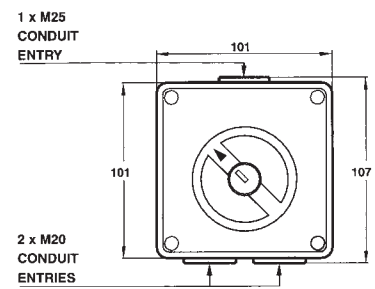

FRONT COMPLETE

56K1SW115  
56K2SW115  
56K1SW115MS  
56K2SW115MS  
56K1SW115HS



REAR MECHANISMS

NOTE: 1. MS AND HS USE KEY TO SWITCH MECH.

2. MS AND HS HAVE NO SHARP EDGES ON ROTARY SWITCH KNOB



SWITCH IS 30 SERIES MECH

3. HS PROVIDED IN KIT FORM

### Remark :


- $I_{the}$  - Conventional enclosed thermal current
- $U_e$  - Operational voltage
- AC21 - Switching of resistive loads, including moderate overloads
- AC22 - Switching of mixed resistive and inductive loads, including moderate overloads
- AC23 - Switching of motor loads or highly inductive loads
- M rating - For switching of locked rotor current

## 56 & 66 SERIES

### Push-Button Control Stations


Cat.no	I <sub>ne</sub> (A)	U <sub>e</sub> (V)	Utilisation Category (A)		Conductor size (mm <sup>2</sup> )	
			AC15 240V	AC13 24V	Min	Max.
56PB	10	250	6	8	1	4
56PBS	10	250	6	8	1	4
56PBS1	10	250	6	8	1	4
56PBS2	10	250	6	8	1	4
56/2PB	10	250	6	8	1	4
56/2PBS1	10	250	6	8	1	4

#### Dimensions & Wiring Diagrams




FRONT MOUNTING ENCLOSURE

56PB




SIDE COMPLETE

56PB  
56PBS




FRONT COMPLETE

56PB  
56PBS  
56PBS1  
56PBS2




REAR MECHANISMS

56PBS  
56/2PB




SIDE COMPLETE

56PBS1  
56PBS2




FRONT COMPLETE

56/2PB  
56/2PBS1




REAR MECHANISMS

56PBS1  
56PBS2  
56/2PBS1




SIDE COMPLETE

56/2PB




FRONT COMPLETE

56/2PBS1



FRONT COMPLETE



SWITCH IS SIDEWIRED  
CONDUCTOR TERMINATION  
IS PRESSURE PLATE TYPE

#### Remark:

- 56PB (NO MARKINGS, COLOUR GREEN, NON LATCHING)
- 56PBS (STOP, COLOUR RED, NON LATCHING)
- 56PBS1 (EMERGENCY STOP, MARKED ON SWITCH AND PLATE, COLOUR RED MUSHROOM, LATCHING)
- 56PBS2 (STOP, COLOUR RED MUSHROOM, LATCHING)
- 56/2PB (STOP/START, COLOUR RED/GREEN, NON LATCHING)
- 56/2PBS1 (STOP, COLOUR RED MUSHROOM, LATCHING) (START, COLOUR GREEN, NON LATCHING)

I<sub>the</sub> -  
U<sub>e</sub> -

Conventional enclosed thermal current  
Operational voltage


# 56 & 66 SERIES

## Switches with Sliding Switch Dollies & Two Aperture Enclosure IP66


Cat.no	No. of Switched Poles	$I_{the}$ (A)	$U_e$ (V)	M rating	Conductor size (mm <sup>2</sup> )	
					Min	Max.
56SSW10	1	10	250	M80	1.5	6
56SSW15	1	15	250	M80	1.5	6
56SSW10/I	1	10	250	M100	1.5	6
56SSW2/10	2	10	250	M80	1.5	6
56SSW2/15	2	15	250	M80	1.5	6

Cat.no	O/A Dims. (H)x(W)x(D)
56/32	107x101x75


### Dimensions

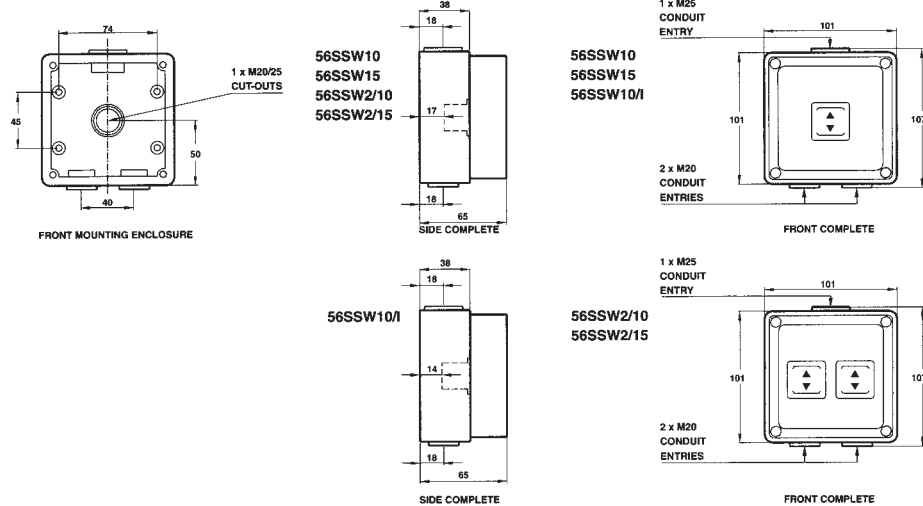

### Wiring Diagrams

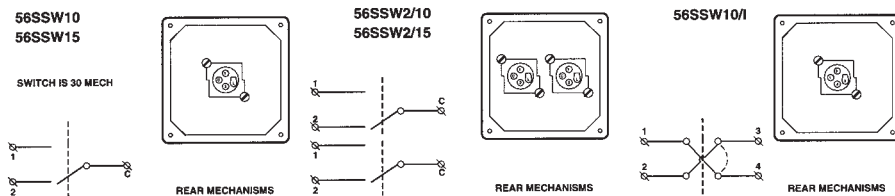

### Dimensions

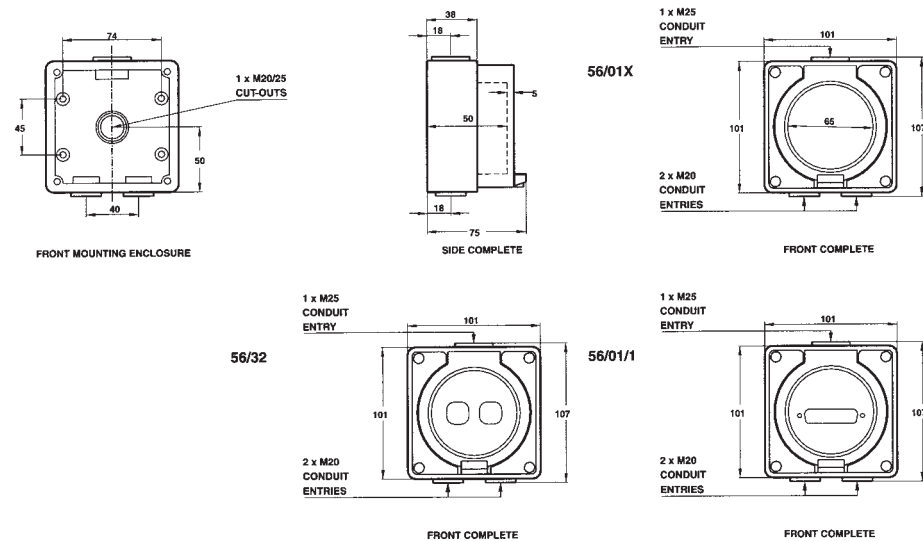

### Remark:

- $I_{the}$  - Conventional enclosed thermal current
- $U_e$  - Operational voltage
- M rating - For switching of locked rotor current



# CLIPSAL®


## 56 & 66 SERIES

### Timer Switches


Cat.no	Switching	$I_{th}$ (A)	$U_e$ (V)	Utilitation Category (A)			M rating	Battery Running Reserve (Hrs)	Min. Switch Time (Min.)	Conductor size (mm <sup>2</sup> )	
				AC21	AC2A	AC2A				Min	Max.
56TC	1 C/O	15	250	15	10	8	M90	N/A	15	2.5	6
56TC7	1 C/O	15	250	15	10	8	M90	N/A	120	2.5	6
56TCB	1 C/O	15	250	15	10	8	M90	**150	15	2.5	6
56TCB7	1 C/O	15	250	15	10	8	M90	**150	120	2.5	6
56SWT216	2 Pole	16	250	16	10	10	M120	**150	10 mins Minimum 120 mins Maximum	2.5	4

\*\* Nicad rechargeable battery takes 70 hours to fully charges


#### Dimensions



FRONT MOUNTING ENCLOSURE




SIDE COMPLETE



FRONT COMPLETE


#### Wiring Diagrams

56TC  
56TCB  
56TC7  
56TCB7




REAR MECHANISMS

56TC7  
56TCB7




FRONT DETAIL

56TC  
56TCB





FRONT DETAIL




CIRCUIT SHOWN IN THE 'OFF' POSITION

AUTOMATIC  
TIMED SWITCH  
MODE




CONTINUALLY  
'ON'




CONTINUALLY  
'OFF'


#### Dimensions



FRONT MOUNTING ENCLOSURE




SIDE COMPLETE



FRONT COMPLETE


#### Wiring Diagrams

56SWT216



SWITCH IS SIDEWIRED  
CONDUCTOR TERMINAL  
IS PRESSURE PLATE TYPE

REAR MECHANISMS



#### Remark :

- $I_{the}$  - Conventional enclosed thermal current
- $U_e$  - Operational voltage
- AC21 - Switching of resistive loads, including moderate overloads
- AC22 - Switching of mixed resistive and inductive loads, including moderate overloads
- AC23 - Switching of motor loads or highly inductive loads
- M rating - For switching of locked rotor current


# 56 & 66 SERIES

## New Timer Switches

Cat.no	Switching	$I_{he}$ (A)	$U_e$ (V)	Utilisation Category (A)			M rating	Battery Running Reserve (Hrs)	Min. Switch Time (Min.)	Conductor size (mm <sup>2</sup> )	
				AC21	AC22	AC23				Min	Max.
56TCDB	1 C/O	10	250	10	10	8	M100	**150	1	2.5	6


\*\* Nicad rechargeable battery takes 70 hours to fully charges

### Dimensions

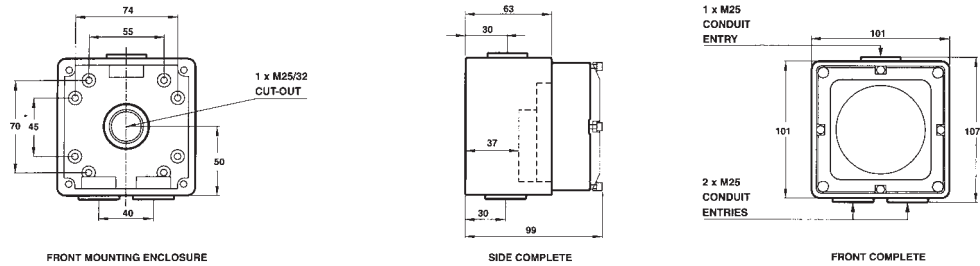


### Wiring Diagrams

56TCDB




REAR MECHANISMS


SWITCH IS SIDEWIRED  
CONDUCTOR TERMINATION  
IS PLAIN SCREW TYPE



### SETTING TIME

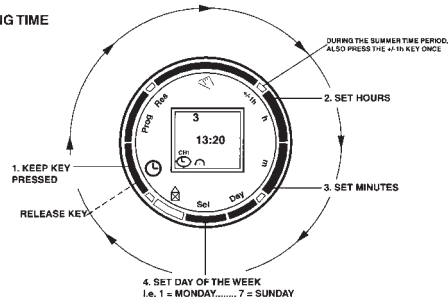

### SETTING PROGRAM TIMES

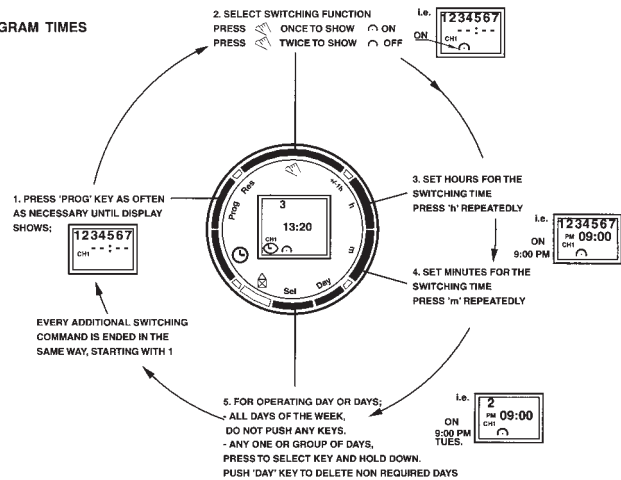

### Remark :

- $I_{he}$  - Conventional enclosed thermal current
- $U_e$  - Operational voltage
- AC21 - Switching of resistive loads, including moderate overloads
- AC22 - Switching of mixed resistive and inductive loads, including moderate overloads
- AC23 - Switching of motor loads or highly inductive loads
- M rating - For switching of locked rotor current

## 56 & 66 SERIES

### Angle & Straight Plugs

Cat.no (Straight)	Cat.no (Angle)	I <sub>th</sub> (A)	U <sub>i</sub> (V)	No. of Pins	Conductor size (mm <sup>2</sup> )		Cable Nominal Diameter		Gland Nut Thread (mm)	
					Min	Max.	Min	Max.	Straight	Angled
56P210	-	10	250	2 Parallel Flat	1	2.5	7	12.5	20	
56P215/32	-	15	32	2 Polarised	1.5	2.5	7	12.5	20	
56P3/110	-	10	110	2 Round & Flat Earth	1	2.5	7	12.5	20	
56P310RP	-	10	250	3 Round	1	4	7	12.5	20	
56P310	-	10	250	3 Flat	1	2.5	7	12.5	20	
56P310L	-	10	250	2 Flat & Round Earth	1	2.5	7	12.5	20	
56P320F	-	20	250	3 Flat	2.5	2.5	7	12.5	20	
56P315	-	15	250	3 Flat	1.5	2.5	7	12.5	20	
56P320	56PA320	20	250	3 Round	2.5	4	6	15.7	25	23
-	56PA332	32	250	3 Round	2.5	16	9.5	28		37
56P410	56PA410	10	500	4 Round	2.5	4	6	15.7	25	23
56P416K	56PA416K	16	500	4 Round (unique key configuration)	2.5	4	6	15.7	23	23
56P420	56PA420	20	500	4 Round	2.5	4	6	15.7	25	23
56P432	56PA432	32	500	4 Round	2.5	16	9	28	37	37
56P440	56PA440	40	500	4 Round	2.5	16	9	28	37	37
56P450	56PA450	50	500	4 Round	2.5	25	9	28	37	37
56P510	56PA510	10	500	5 Round	2.5	4	6	15.7	25	23
56P520	56PA520	20	500	5 Round	2.5	4	6	15.7	25	23
56P532	56PA532	32	500	5 Round	2.5	16	9	28	37	37
56P540	56PA540	40	500	5 Round	2.5	16	9	28	37	37
56P550	56PA550	50	500	5 Round	2.5	25	9	28	37	37
56P610	56PA610	10	500	6 Round	2.5	4/2.5	6	15.7	23	23
56P710	56PA710	10	500	7 Round	2.5	4/2.5	6	15.7	23	23
56P720	56PA720	20	500	7 Round	2.5	4/2.5	6	15.7	23	23

### Dimensions

<p>56P210 56P215/32 56P3/110 56P310RP 56P310 56P310L 56P315 56P320F</p>	<p>56P332 56P532 56P540 56P550 56P432 56P440 56P450</p>
<p>56P320 56P410 56P420 56P510 56P520</p>	<p>56PA320 56PA410 56PA415K 56PA420 56PA510 56PA520 56PA610 56PA710 56PA720</p>
<p>56PA15K 56P610 56P710 56P720</p>	<p>56PA332 56PA432 56PA440 56PA450 56PA532 56PA540 56PA550</p>

Remark :


I<sub>the</sub> - Conventional enclosed thermal current  
U<sub>i</sub> - Insulated voltage

# 56 & 66 SERIES


## Mounting Enclosures (Back Boxes)

Cat.no	No. of Gangs	Dims. (H)x(W)x(D)	Mounting Point	No. of Conduit Entries (mm)	Cut Out Provision (mm)
56E1	1	101x101x63	8	2x25, 1x32	1x25/32
56ES1	1	101x101x38	4	1x25, 1x20	1x20/25
56E2	2	198x101x63	8	2x25, 1x32	1x25, 1x32
56ED2	2	198x101x100	8	2x40	1x25, 1x32


### Dimensions

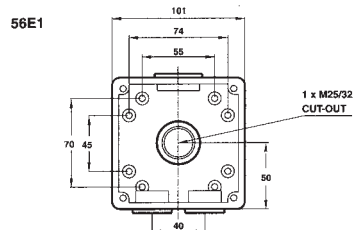


FRONT MOUNTING ENCLOSURE




SIDE COMPLETE




FRONT MOUNTING ENCLOSURE



SIDE COMPLETE

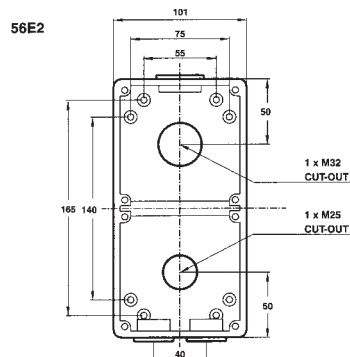


FRONT MOUNTING ENCLOSURE

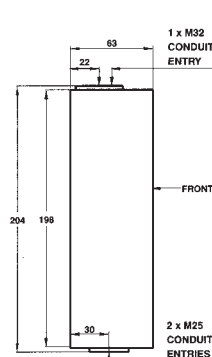


SIDE COMPLETE

ONE 56B BRIDGE PROVIDED

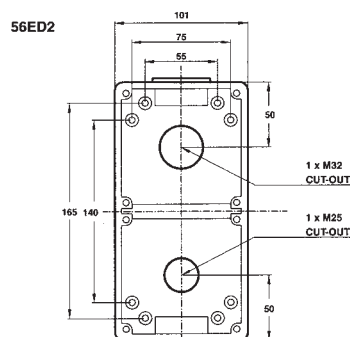

FRONT MOUNTING ENCLOSURE



SIDE COMPLETE


ONE 56B BRIDGE PROVIDED

## 56 & 66 SERIES

### Mounting Enclosures (Back Boxes)

Cat.no	No. of Gangs	Dims. (H)x(W)x(D)	Mounting Point	No. of Conduit Entries (mm)	Cut Out Provision (mm)
56ES2	2	198x101x38	4	1x25, 2x20	2x20/25
56E2/4EL	2	198x101x105	8	2x25, 1x32	1x25, 1x32
56E3	3	294x101x63	16	2x25, 1x32	2x25, 1x32

#### Dimensions




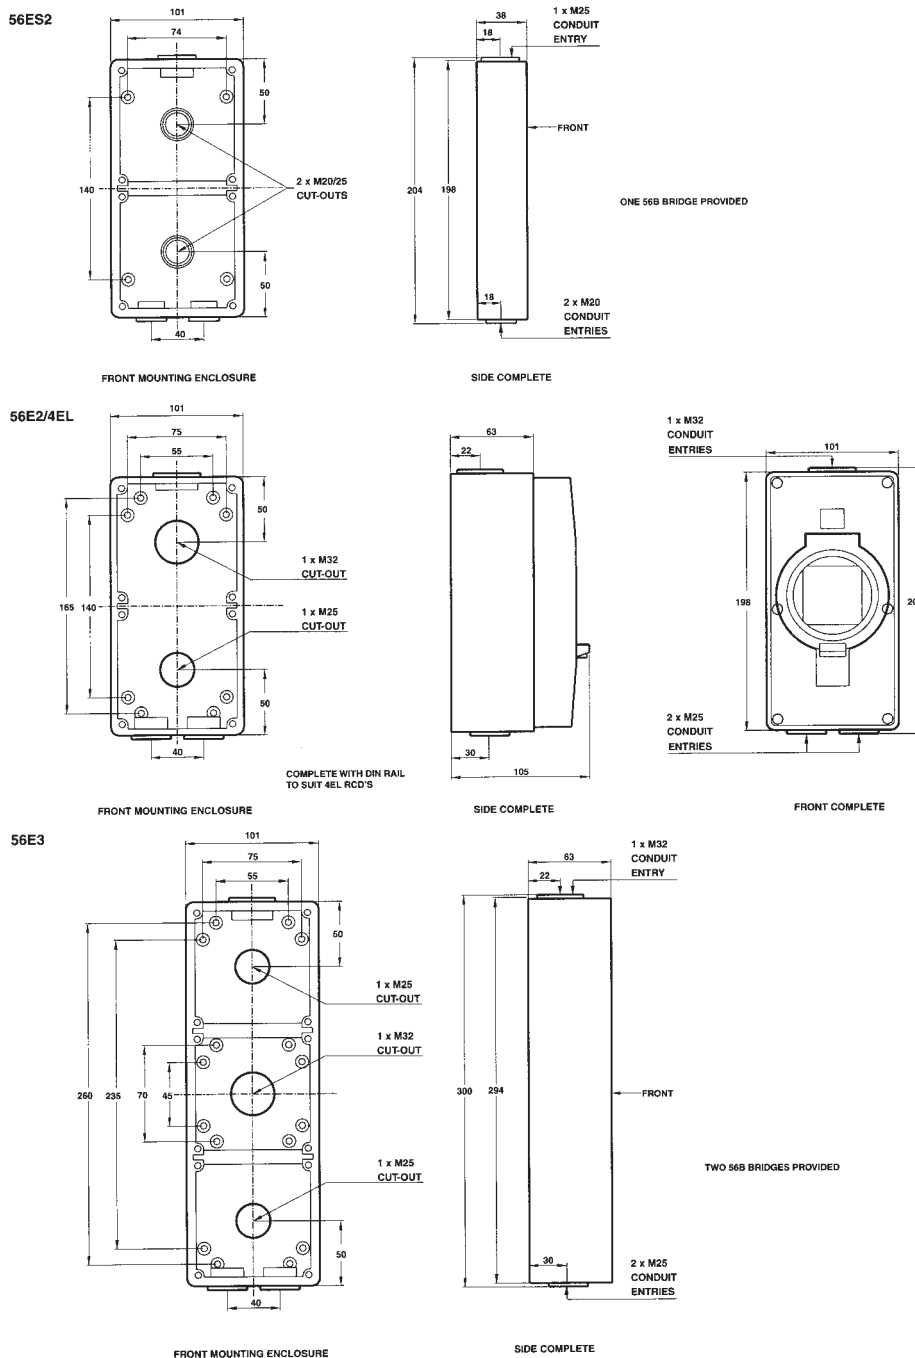


# 56 & 66 SERIES

## Mounting Enclosures (Back Boxes)

Cat.no	No. of Gangs	Dims. (H)x(W)x(D)	Mounting Point	No. of Conduit Entries (mm)	Cut Out Provision (mm)
56E4	4	198x198x63	16	2x25, 2x32	2x25, 1x32, 1x40
56E4VH	4	391x101x63	16	2x25, 1x32	2x25, 1x32, 1x40

### Dimensions

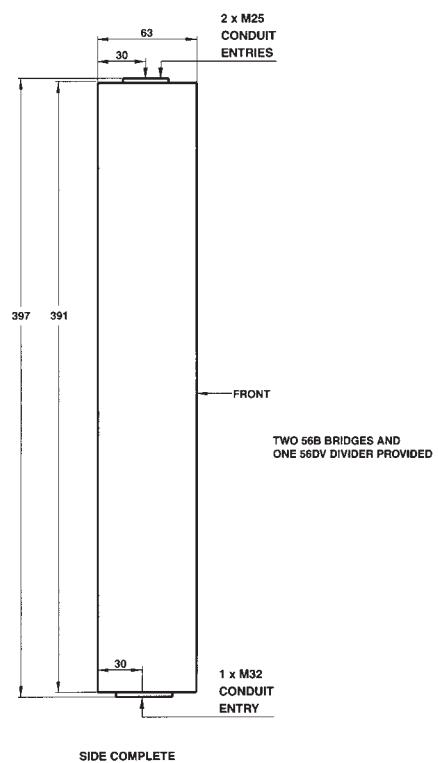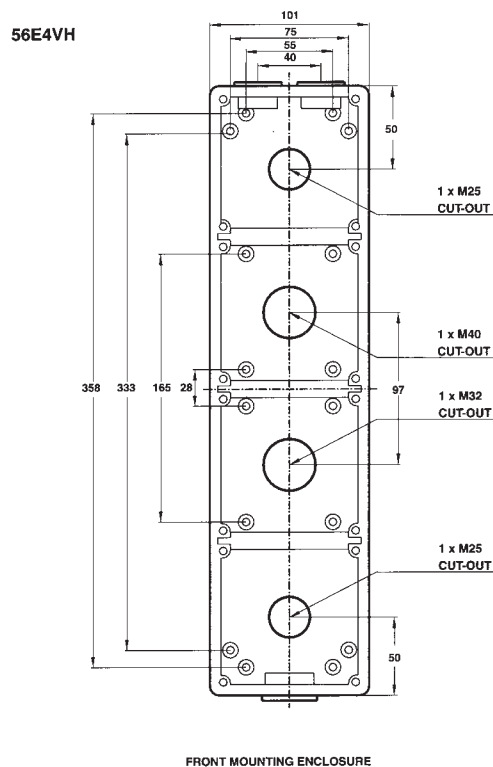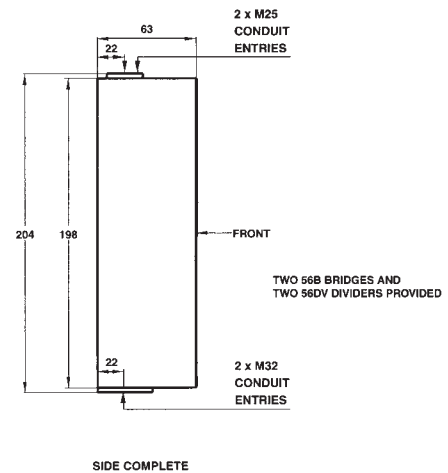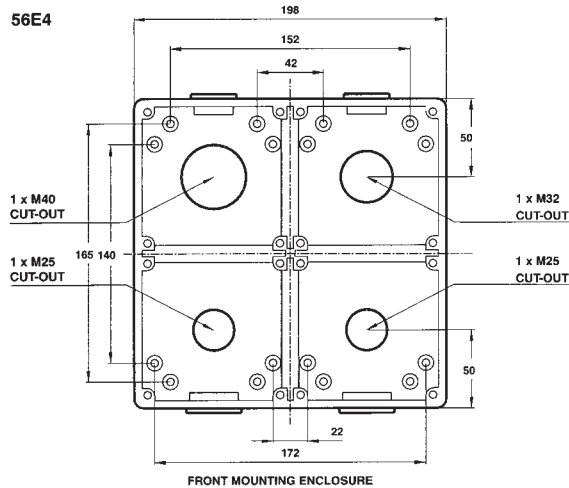


## 56 & 66 SERIES

### Mounting Enclosures (Back Boxes)

Cat.no	No. of Gangs	Dims. (H)x(W)x(D)	Mounting Point	No. of Conduit Entries (mm)	Cut Out Provision (mm)
56E6	6	294x198x63	24	2x25, 2x32	2x25, 2x32, 2x40
56E8	8	391x198x63	28	2x25, 2x32	4x25, 2x32, 2x40
56E9	9	294x294x63	28	3x25, 3x32	4x25, 2x32, 2x40
56E16	16	391x391x63	48	2x25, 2x32	6x25, 6x32, 4x40

#### Dimensions

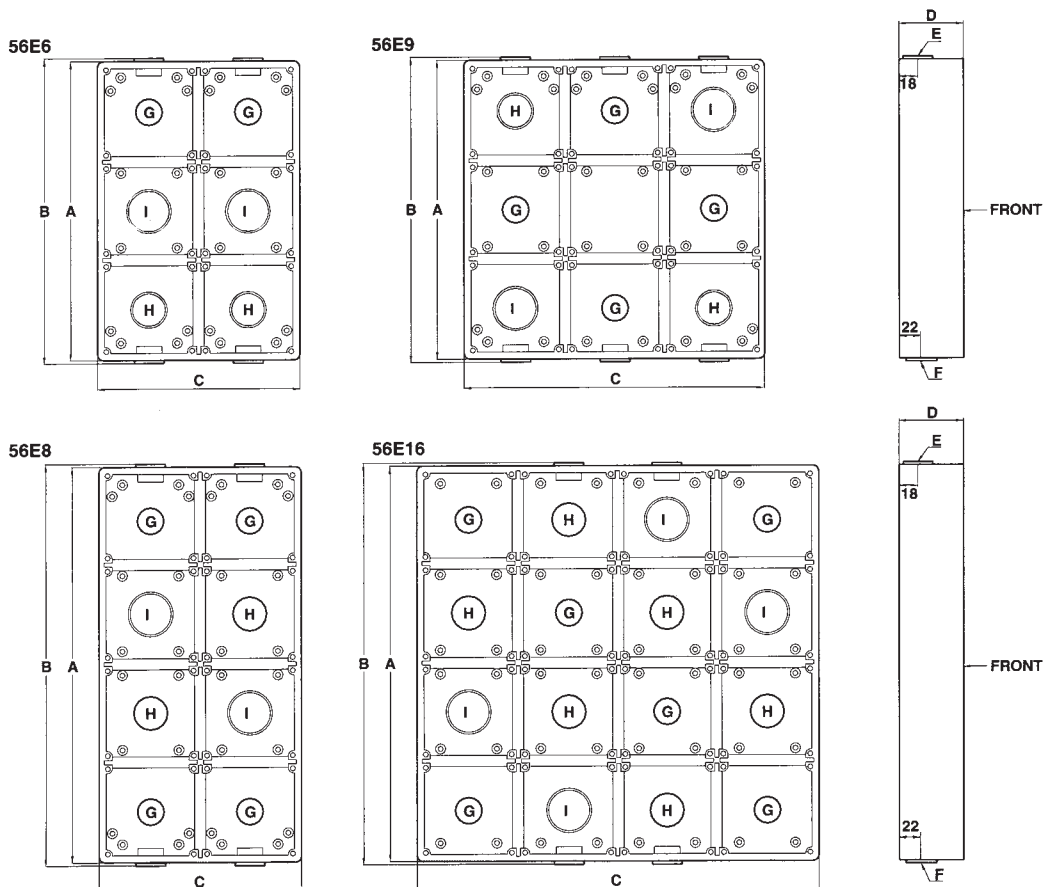


Catalogue Number	No. Gangs	Dimensions(mm)				Conduit Entries		Cut Out Provisions			56 DV Dividers	56B Bridges	Mounting Points
		A	B	C	D	E	F	G	H	I			
56E6	6	294	300	198	63	2 x M25	2 x M32	25	32	40	4	3	24
56E8	8	392	398	198	63	2 x M25	2 x M32	25	32	40	6	4	28
56E9	9	294	300	294	63	3 x M25	3 x M32	25	32	40	6	6	28
56E16	16	392	398	392	63	2 x M25	2 x M32	25	32	40	12	8	48

# 56 & 66 SERIES

## 56 JB Series Junction Box

Cat. no.	No. of gangs	Dimensions (mm)					Conduit entries		Cut out provisions			Mounting points
		A	B	C	D	E	F	G	H	I	J	
56JB1	1	101	107	101	63	90	1xM32	2xM25	25			8
56JB2	2	198	204	101	63	90	1xM32	2xM25	25	32		8
56JB3	3	294	300	101	63	90	1xM32	2xM25	25	32		16
56JB4	4	198	204	198	63	90	2xM32	2xM25	25	32	40	16


### Dimensions

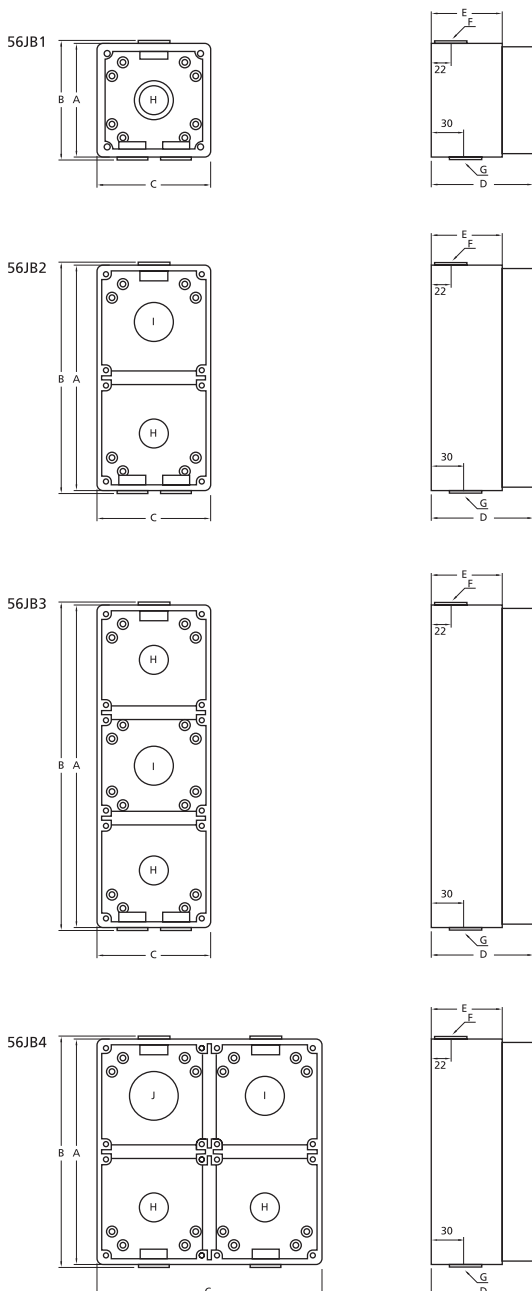

## 56 SO Series Socket Outlet

Cat. no.	No. of socket	$I_{the}$ (A)	$U_e$ (V)	Conductor size(mm <sup>2</sup> )		Dimensions (mm) H x W x D
				Min.	Max.	
56SO313	3 Flat	13	250	1.5	6	107 x 101 x 80
56SO315	3 Flat	15	250	1.5	6	107 x 101 x 80
56SO315RP	3 Round	15	250	1.5	6	107 x 101 x 80

### Dimensions

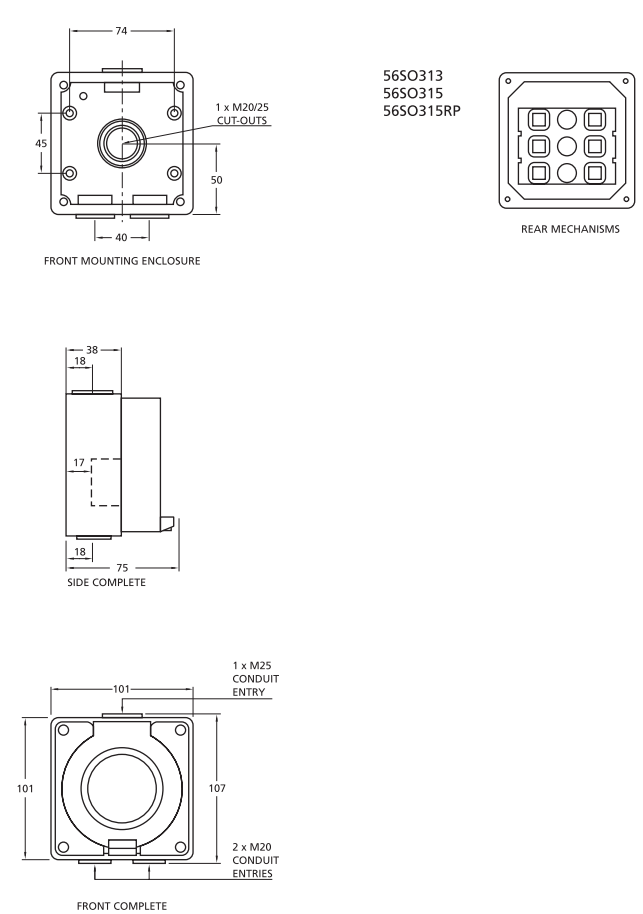

### Remark :

$I_{the}$  - Conventional enclosed thermal current  
 $U_e$  - Operational voltage




## 56 & 66 SERIES

### 56 SO Series Socket Outlet


Cat. no.	No. of socket	I <sub>the</sub> (A)	U <sub>e</sub> (V)	Conductor size(mm <sup>2</sup> )		Dimensions (mm) H x W x D
				Min.	Max.	
56SO320	3 Round	20	250	2.5	6	107 x 101 x 104
56SO410	4 Round	10	500	1.5	6	107 x 101 x 104
56SO420	4 Round	20	500	2.5	6	107 x 101 x 104
56SO510	5 Round	10	500	1.5	6	107 x 101 x 104
56SO520	5 Round	20	500	2.5	6	107 x 101 x 104

Cat. no.	No. of socket	I <sub>the</sub> (A)	U <sub>e</sub> (V)	Conductor size(mm <sup>2</sup> )		Dimensions (mm) H x W x D
				Min.	Max.	
56SO332	3 Round	32	250	6	16	107 x 101 x 104
56SO432	4 Round	32	500	4	16	107 x 101 x 104
56SO440	4 Round	40	500	6	16	107 x 101 x 104
56SO450	4 Round	50	500	10	16	107 x 101 x 104
56SO532	5 Round	32	500	4	16	107 x 101 x 104
56SO540	5 Round	40	500	6	16	107 x 101 x 104
56SO550	5 Round	50	500	10	16	107 x 101 x 104


#### Dimensions




56SO320




REAR MECHANISMS




56SO410  
56SO420



REAR MECHANISMS




56SO510  
56SO520




REAR MECHANISMS


#### Dimensions




56SO332




REAR MECHANISMS




56SO432  
56SO440  
56SO450



REAR MECHANISMS



56SO532  
56SO540  
56SO550



REAR MECHANISMS

#### Remark :


I<sub>the</sub> - Conventional enclosed thermal current  
U<sub>e</sub> - Operational voltage

# 56 & 66 SERIES

## 56 Series Combination Switched Socket Outlet

Cat. no.	No. of socket	$I_{ne}$ (A)	$U_e$ (V)	Utilization category (A)			M rating	Conductor size (mm <sup>2</sup> )		Dimensions (mm) H x W x D
				AC21	AC22	AC23		Min.	Max.	
56C313	3 Flat	13	250	13	8	8	M80	1.5	6	204 x 101 x 80
56C315	3 Flat	15	250	15	10	8	M80	1.5	6	204 x 101 x 80
56C315RP	3 Round	15	250	15	8	5	M80	1.5	6	204 x 101 x 80

Cat. no.	No. of socket	$I_{ne}$ (A)	$U_e$ (V)	Utilization category (A)			M rating	Conductor size (mm <sup>2</sup> )		Dimensions (mm) H x W x D
				AC21	AC22	AC23		Min.	Max.	
56C332	3 Round	32	250	32	32	20	M260	6	16	204 x 101 x 104
56C432	4 Round	32	500	32	32	20	M100	4	16	204 x 101 x 104
56C440	4 Round	40	500	40	32	20	M100	10	16	204 x 101 x 104
56C532	5 Round	32	500	32	32	20	M100	4	16	204 x 101 x 104
56C540	5 Round	40	500	40	32	20	M100	10	16	204 x 101 x 104

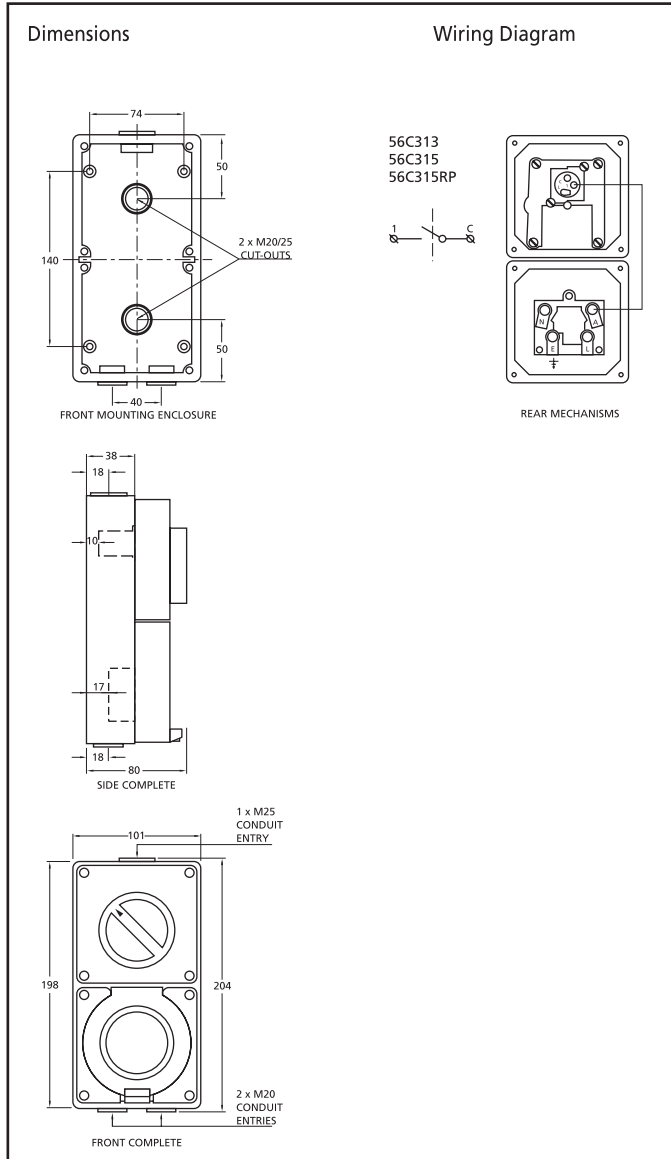

### Remark :


- $I_{ne}$  - Conventional enclosed thermal current
- $U_e$  - Operational voltage
- AC21 - Switching of resistive loads, including moderate overloads
- AC22 - Switching of mixed resistive and inductive loads, including moderate overloads
- AC23 - switching of motor loads or highly inductive loads
- M rating - For switching locked rotor current

## 56 & 66 SERIES

### 56 Series Combination Switched Socket Outlet

Cat. no.	No. of socket	I <sub>the</sub> (A)	U <sub>e</sub> (V)	Utilization category (A)			M rating	Conductor size (mm <sup>2</sup> )		Dimensions (mm) H x W x D
				AC21	AC22	AC23		Min.	Max.	
56C450	4 Round	50	500	50	50	25	M200	10	16	204 x 101 x 104
56C550	5 Round	50	500	50	50	25	M200	10	16	204 x 101 x 104

Cat. no.	No. of socket	I <sub>the</sub> (A)	U <sub>e</sub> (V)	Utilization category (A)			M rating	Conductor size (mm <sup>2</sup> )		Dimensions (mm) H x W x D
				AC21	AC22	AC23		Min.	Max.	
56C320	3 Round	20	500	20	20	20	M260	2.5	6	204 x 101 x 104
56C410	4 Round	10	500	10	10	10	M100	1.5	6	204 x 101 x 104
56C420	4 Round	20	500	20	20	20	M100	2.5	6	204 x 101 x 104
56C510	5 Round	10	500	10	10	10	M100	1.5	6	204 x 101 x 104
56C520	5 Round	20	500	20	20	20	M100	2.5	6	204 x 101 x 104

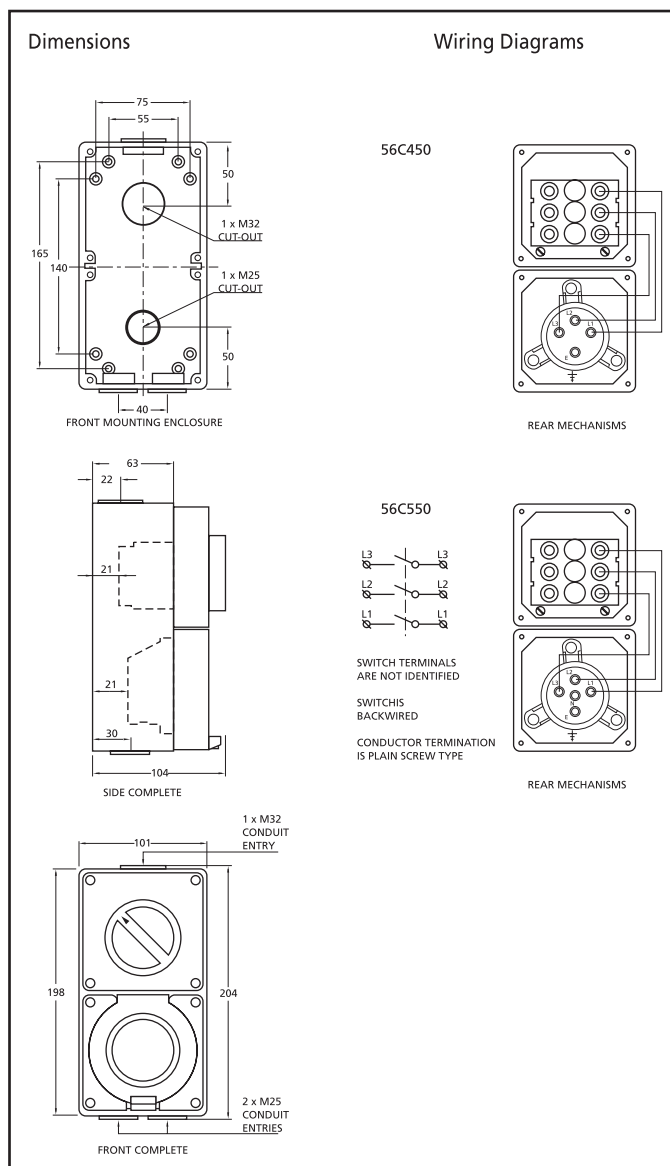

#### Remark :

- I<sub>the</sub> - Conventional enclosed thermal current
- U<sub>e</sub> - Operational voltage
- AC21 - Switching of resistive loads, including moderate overloads
- AC22 - Switching of mixed resistive and inductive loads, including moderate overloads
- AC23 - switching of motor loads or highly inductive loads
- M rating - For switching locked rotor current


# 56 & 66 SERIES

## 66CV Switched Socket Outlets


Cat.no	No. of Switched Poles	$I_{th}$ (A)	$U_i$ (V)	Utilisation Category (A)			No. of Sockets	Conductor size (mm <sup>2</sup> )	
				AC21	AC22	AC23		Min	Max.
66CV450	3	50	500	50	50	40	4	10	25
66CV550	4	50	500	50	50	40	5	10	25
66CV750	4	50	500	50	50	40	7	10	25/2.5
66CV463	3	63	500	63	63	50	4	16	35
66CV563	4	63	500	63	63	50	5	16	35
66CV763	4	63	500	63	63	50	7	16	25/2.5

### Dimensions

66CV450  
66CV463  
66CV550  
66CV563  
66CV750  
66CV763

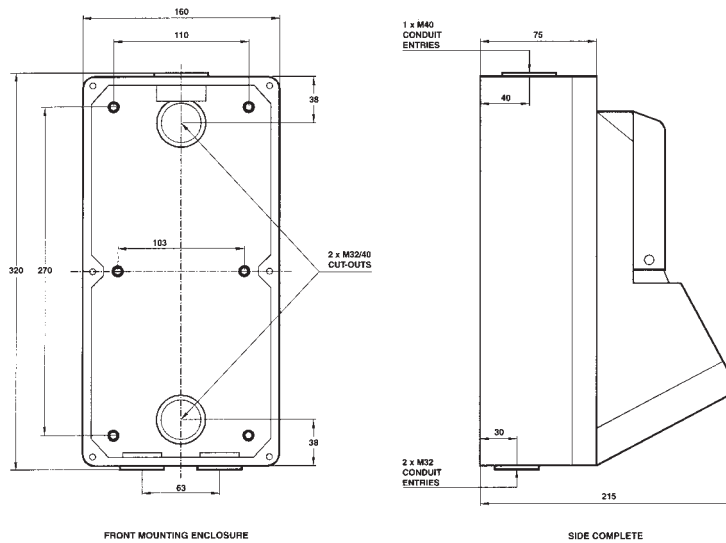

### Wiring Diagrams

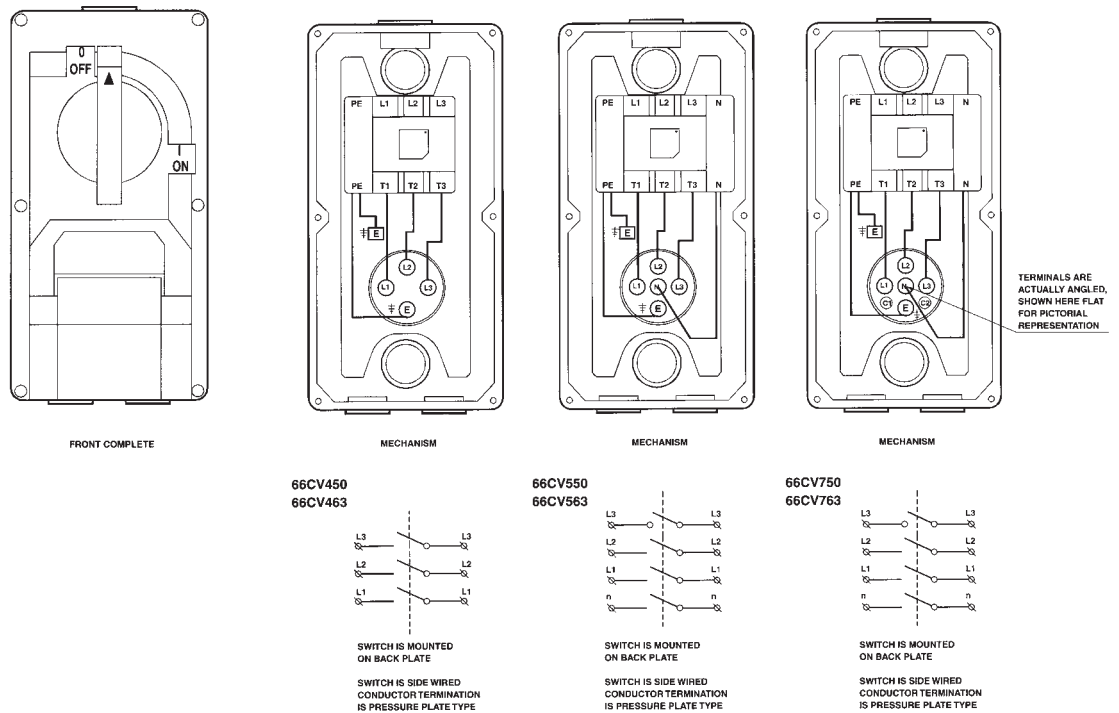

### Remark :

$I_{th}$  - Conventional enclosed thermal current  
 $U_i$  - Insulated voltage



## 56 & 66 SERIES

### RCD Protected Socket Outlet


Cat. no.	No. of socket	$I_{the}$ (A)	$U_e$ (V)	Conductor size (mm <sup>2</sup> )		Dimensions (mm) H x W x D
				Min.	Max.	
56C313/4EL	3 Flat	13	250	2.5	6	300 x 101 x 100
56C315/4EL	3 Flat	15	250	2.5	6	300 x 101 x 100
56C315RP/4EL	3 Round	15	250	2.5	6	300 x 101 x 100

Cat. no.	No. of socket	$I_{the}$ (A)	$U_e$ (V)	Conductor size (mm <sup>2</sup> )		Dimensions (mm) H x W x D
				Min.	Max.	
56C420RC	4 Round	20	500	1.5	16	300 x 101 x 105
56C520RC	5 Round	20	500	1.5	16	300 x 101 x 105

#### Dimensions

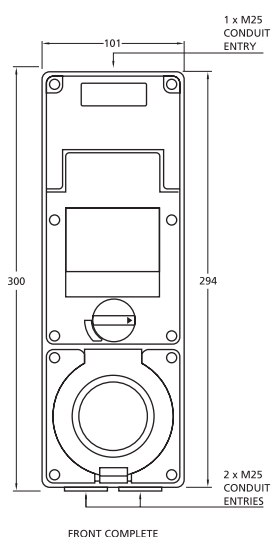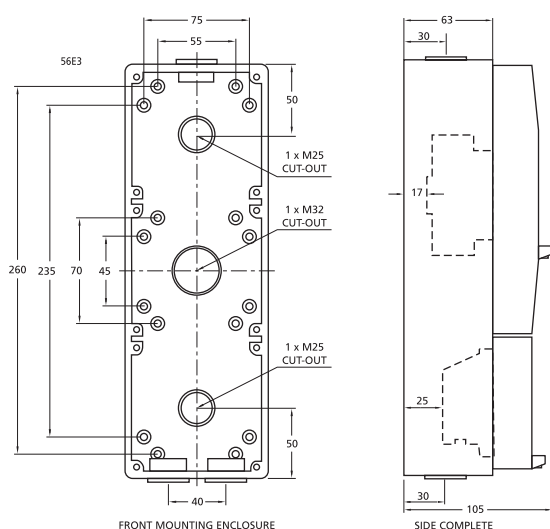

#### Wiring Diagrams

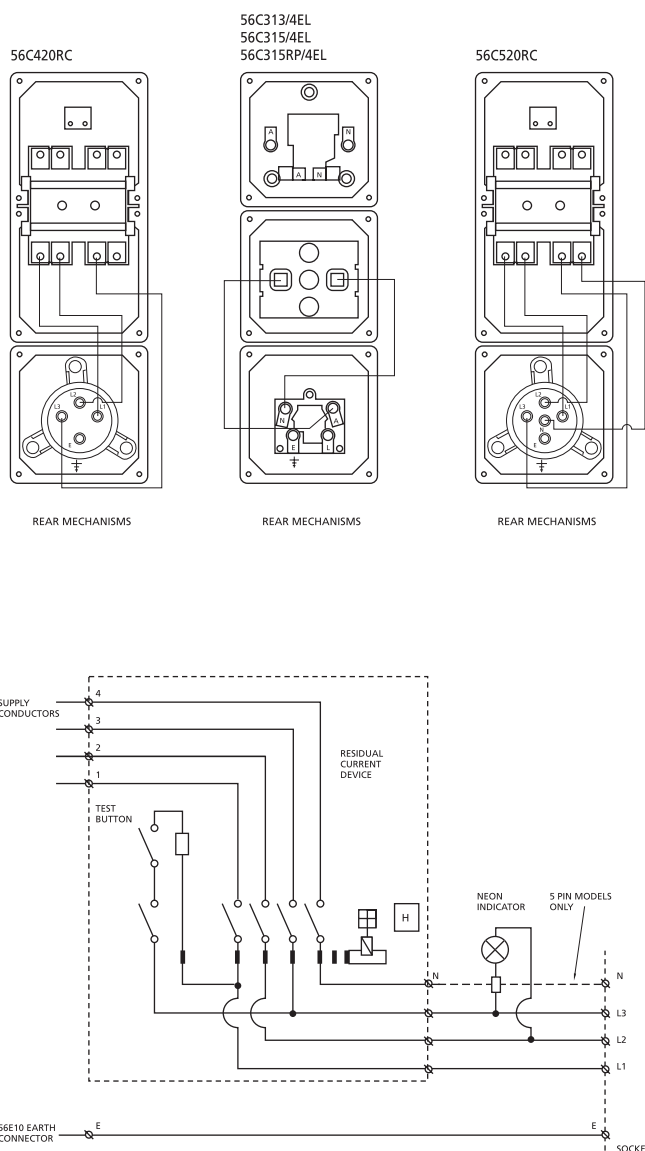

#### Remark :


$I_{the}$  - Conventional enclosed thermal current  
 $U_e$  - Operational voltage

# 56 & 66 SERIES

## RCD Protected Socket Outlet


Cat. no.	No. of socket	$I_{the}$ (A)	$U_e$ (V)	Conductor size (mm <sup>2</sup> )		Dimensions (mm) H x W x D
				Min.	Max.	
56C432RC	4 Round	20	500	4	16	300 x 101 x 105
56C532RC	5 Round	20	500	4	16	300 x 101 x 105

Dimensions

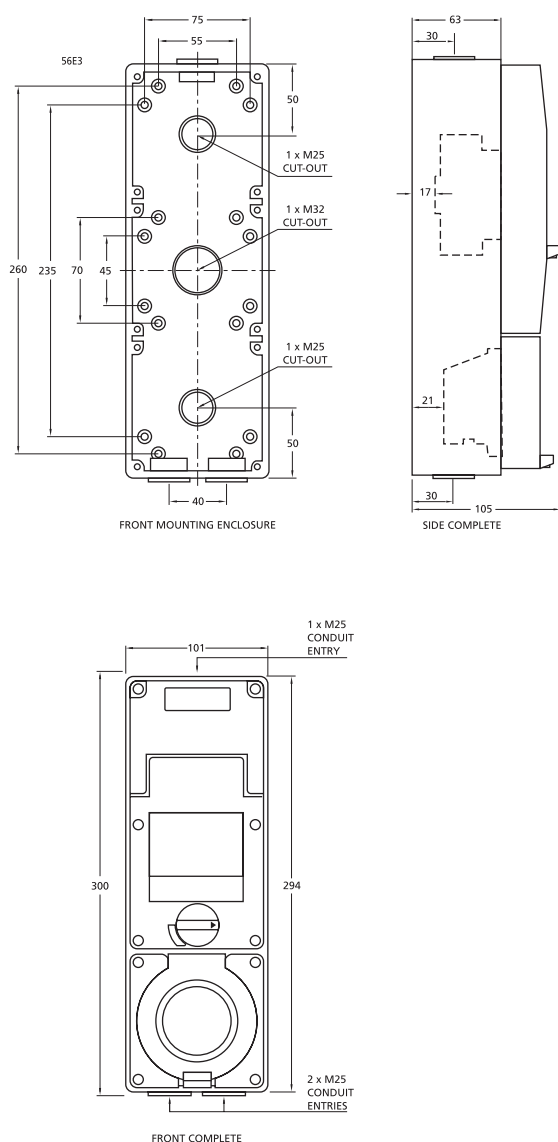


Wiring Diagrams

56C432RC

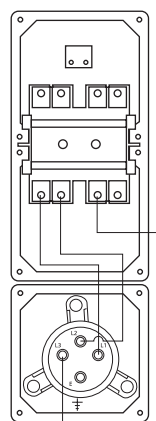


REAR MECHANISMS

56C532RC

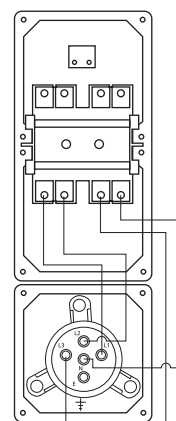

REAR MECHANISMS

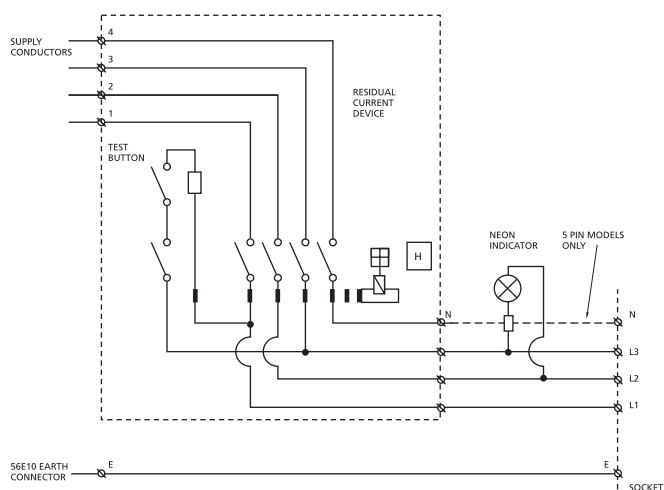

Remark :


$I_{the}$  - Conventional enclosed thermal current  
 $U_e$  - Operational voltage

**56 & 66 SERIES**


**RCD Protected Socket Outlet**

Cat. no.	No. of socket	$I_{nre}$ (A)	$U_e$ (V)	Conductor size (mm <sup>2</sup> )		Dimensions (mm) H x W x D
				Min.	Max.	
56C313RC	3 Flat	13	250	2.5	6	300 x 101 x 100

Dimensions

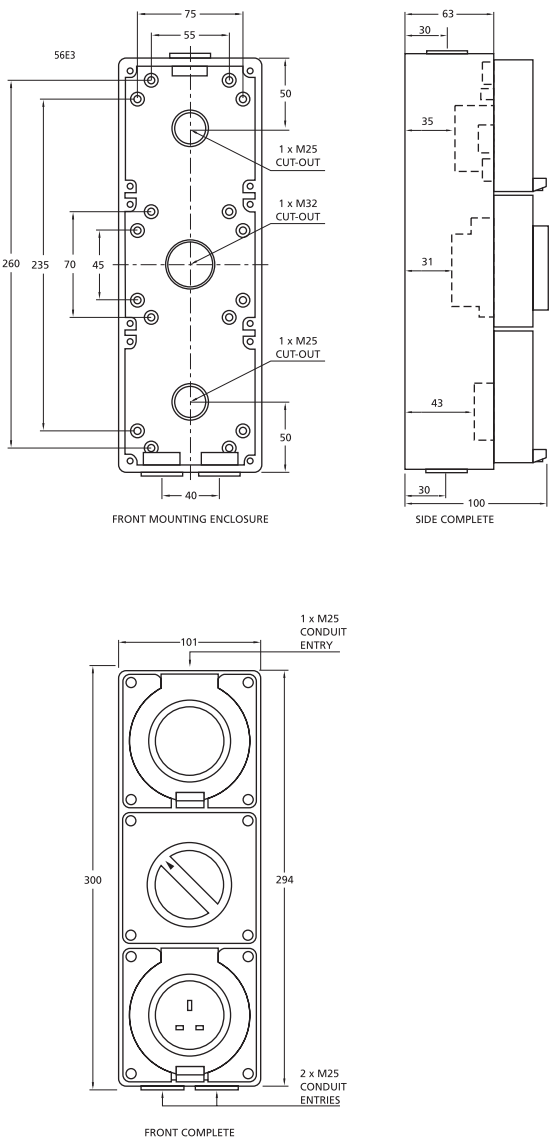

Wiring Diagram

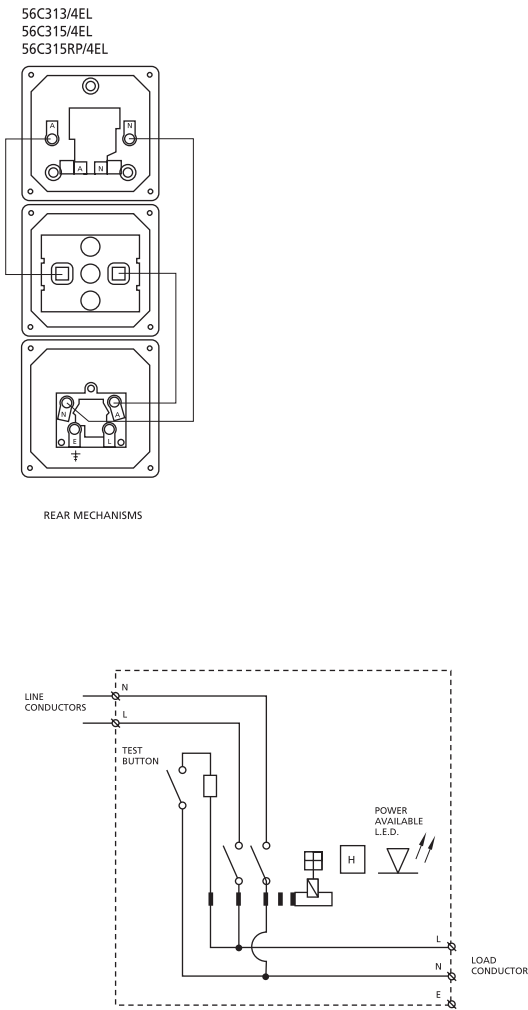

**Remark :**

$I_{the}$  - Conventional enclosed thermal current  
 $U_e$  - Operational voltage

# 56 & 66 SERIES

## 56 IEC 60309 Series

110V 50/60Hz Yellow  
110 to 130V~



250V 50/60Hz Blue  
220 to 250V~




415V 50/60Hz Red  
380 to 418V~






# PVC CONDUIT & FITTING

## Metal Wall Boxes

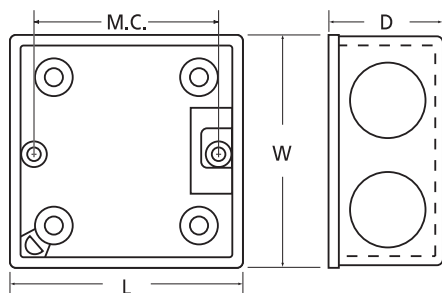

Dimensions (mm)				
Cat. no.	Length(L)	Width (W)	Depth (D)	Mounting Centre (M.C.)
157/1	94	54	43	84
158	67	28	32	55
E157	75	75	36	60.3
E157E	75	75	36	60.3
ET157DE	132	75	48	120.6

## Surface Mounted Boxes

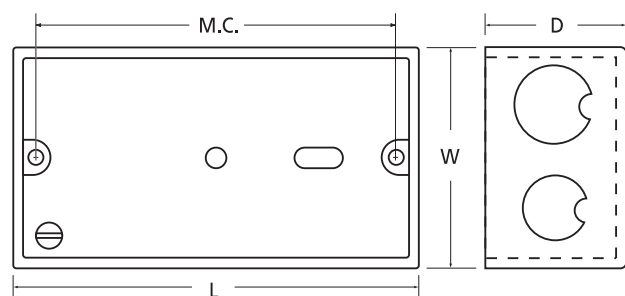















Dimensions (mm)				
Cat. no.	Length(L)	Width (W)	Depth (D)	Mounting Centre (M.C.)
238	115	74	38	84
70/1	80	37	25	55
70/2	90	37	25	70
70/3	116	36	25	97
E238E	89	89	35	60.3
E238/20	89	89	35	60.3
E238/20H	89	89	35	60.3
ET238E	149	89	35	120.6
ET238D	149	89	52	120.6
E70/2	88	40	19	60
E70/4	149	46	19	120

# APPENDIX 1

## International Protection Ratings

IP Ratings or International Protection Code is a standard rating system that indicates the type of environments in which a particular instrument is capable of operating.


The IP Rating takes the form of IPXX where XX are numbers corresponding to a particular rating. The first digit is for solid particle ingress, and the second is for liquids ingress,

FIRST DIGIT			SECOND DIGIT		
	TEST	PROTECTION		TEST	PROTECTION
0	No Test applied	Inherent degree of protection	0	No Test applied	Inherent degree of protection
1		Protected against solid objects larger than 50 mm (e.g. accidental contact with hand)	1		Protected against drops of water falling vertically
2		Protected against solid objects larger than 12 mm (e.g. finger of the hand)	2		Protected against drops of water falling at up to 15° from the vertical
3		Protected against solid objects larger than 2.5 mm (e.g. tools, wires)	3		Protected against spraying water at up to 60° from the vertical
4		Protected against solid objects larger than 1 mm (e.g. fine tools and wires)	4		Protected against splashing water from all directions
5		Protected against dust. Prevent entry in sufficient quantity to interfere with satisfactory operation	5		Protected against jets of water from all directions
6		Completely protected against dust	6		Protected against jets of water of similar force to heavy seas
			7		Protected against the effects of immersion
			8		Protected against the effects of submersion


## APPENDIX 2

### Sequence Options

Sequence is defined as the order in which the incoming pairs are terminated into the modular interface pins. Each pair is designated as a 'Tip' conductor and a 'Ring' conductor.

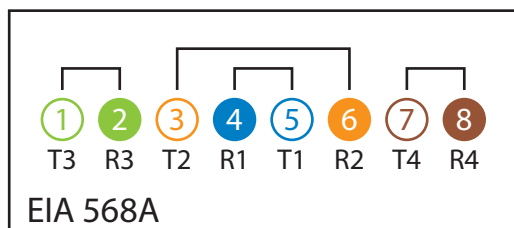


**EIA 568A** This is the newest of the sequence options as published in the EIA Commercial Building Cabling Specification Draft 9.0 as the preferred sequence for termination of UTP data cabling (this is the international ISDN standard). This is also the preferred option for AS/NZS 3080-1995. This is similar to the 568B sequence except that pairs #2 and #3 are transposed. This provides backward compatibility to the USOC sequence for two pairs instead of the single pair of 568B

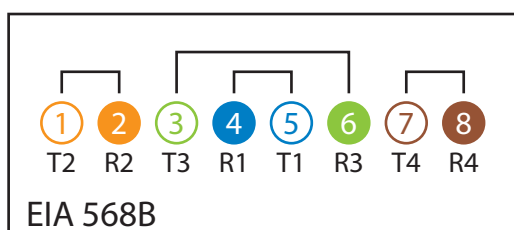

**EIA 568B** has been the most widely specified sequence worldwide for data installations in recent years. It is also a sub-set specified by the IEEE 802.3 10 BASE-T Ethernet over twisted pair standard. This sequence is only applicable to eight wire polarisation (WE8W).


In the 568B sequence, pair #1 and pair #3 correspond to pair #1 and pair #2 of the USOC sequence, providing backward compatibility with 2 pair systems (such as analogue voice).

Pair #1 is therefore designated as 'T1 and R1'. The sequence defines which pins of the modular interface are defined as T1, R1, T, Rs etc. Some sequences are only applicable to certain polarisation.

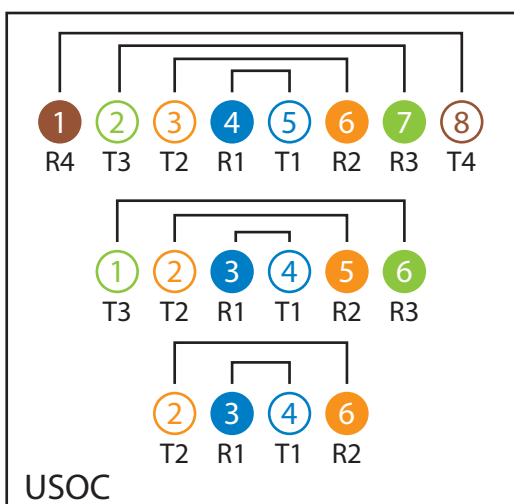

**USOC** historically was the most common sequence and is used by the US telephone system. Pairs are 'nested', ie. pair #1 is centred, pair #2 is the next two contacts out, etc. This maintains pair-to-pair continuity when, for instance, a single pair equipment is connected through a 4 pair circuit. Nesting of the pairs also enables a reversal to be made within each pair through the use of a simple 'reversing' line cord (1 to 8, 2 to 7).

USOC is applicable to WE2W, WE4W, WE6W and WE8W polarisations. An advantage of the pair nesting of the USOC sequence is that a WE4W/6W plug inserted into a WE8W jack works fine as long as quality (correctly toleranced) components are used.

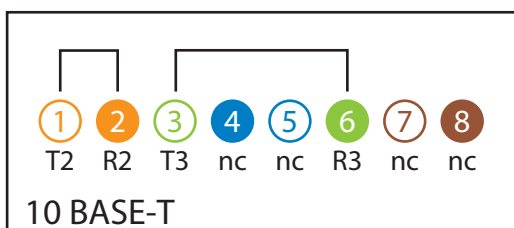

**10 BASE-T** Used with the WE8W polarisation, this is a modification of the EIA 568B sequence, leaving pair #1 open and starting with pair #2. This provides an additional level of protection from interconnection of voice and data equipment. If voice equipment is always wired on pins 4 and 5 (pair #1), and data equipment never has pins 4 and 5 active, no interconnection is possible.