

Atlas

Lighting Products



Energy Saving Wall Lights

SMALL | ARCHITECTURAL | MEDIUM | LARGE
CUT-OFFS | SCONCES



Manufactured in USA

Atlas offers a wide selection of energy saving lighting products that are sold only through distributors. These products are manufactured in our USA facility which allows for extensive quality testing as well as faster delivery and quicker turn around on special build items.

MANUFACTURING



TESTING



WL Series



quick SHIP Products

CATALOG #	DESCRIPTION	VOLTS	BALLAST TYPE	LAMP
High Pressure Sodium				
WL-50HPK	50 watt HPS	120	R-NPF	C50S68/M
WL-50HPCPK(1)	50 watt HPS	120	R-NPF	C50S68/M
WL-70HPK	70 watt HPS	120	R-NPF	C70S62/M
WL-70HPCPK(1)	70 watt HPS	120	R-NPF	C70S62/M
Fluorescent				
WL-26FLPK	26 watt FL	120	Prog. Start	(2) PLT13W/41
WL-26FLPCPK(1)	26 watt FL	120	Prog. Start	(2) PLT13W/41

Notes: (1) includes photo control | *See the **green market** Buyers Guide for more available wattages

WATTAGES

35 - 75 watts HPS
26 watts Fluorescent

CONSTRUCTION

Polycarbonate Housing
Aluminum Base Plate
with Conduit Access
Corrosion Resistant
Polycarbonate Lens

ELECTRICAL

UL Listed for Wet Locations

DIMENSIONS

10.95"h x 6.83"w x 5.24"d

WLG Series



quick SHIP Products

CATALOG #	DESCRIPTION	VOLTS	BALLAST TYPE	LAMP
Pulse Start				
WLG-50MHQPK	50 watt PS	Quad	HX-NPF	MH50/U/M
WLG-70MHQPK	70 watt PS	Quad	HX-NPF	MH70/U/M
WLG-100MHQPK	100 watt PS	Quad	HX-NPF	MH100/U/M
High Pressure Sodium				
WLG-70HQP	70 watt HPS	Quad	HX-NPF	C70S62/M
WLG-100HPK	100 watt HPS	120	R-NPF	C100S54/M
WLG-100HQP	100 watt HPS	Quad	HX-NPF	C100S54/M
Fluorescent				
WLG-84FEUPK	84 watt FL	Univ.	Prog. Start	(2) PLT42W/41

*See the **green market** Buyers Guide for more available wattages

WATTAGES

50 - 100 watts Pulse Start
70 - 100 watts HPS
84 watts Fluorescent

CONSTRUCTION

Die Cast Aluminum Housing
Aluminum Base Plate
with Conduit Access
Borosilicate Glass Lens

ELECTRICAL

UL Listed for Wet Locations

DIMENSIONS

12.94"h x 7.85"w x 5.48"d

WATTAGES

70 - 100 watts HPS
26 - 42 watts Fluorescent

CONSTRUCTION

Die Cast Aluminum Housing
Threaded Apertures for
Conduit & Photo Control
Corrosion Resistant
Polycarbonate Lens

ELECTRICAL

UL Listed for Wet Locations

DIMENSIONS

8.62"h x 8.5"w x 8.76"d



quick SHIP Products

CATALOG #	DESCRIPTION	VOLTS	BALLAST TYPE	LAMP
High Pressure Sodium				
WLS-70HPK	70 watt HPS	120	R-NPF	C70S62/M
WLS-100HPK	100 watt HPS	120	R-NPF	C100S54/M
Fluorescent				
WLS-26FEUPK	26 watt FL	Univ.	Prog. Start	PLT26W/41
WLS-42FEUPK	42 watt FL	Univ.	Prog. Start	PLT42W/41

*See the **green market** Buyers Guide for more available wattages

WLSG Series

WATTAGES

50 - 100 watts Pulse Start
70 - 100 watts HPS
84 watts Fluorescent

CONSTRUCTION

Die Cast Aluminum Housing
Threaded Apertures for
Conduit & Photo Control
Corrosion Resistant
Borosilicate Glass Lens

ELECTRICAL

UL Listed for Wet Locations

DIMENSIONS

8.5"h x 8.75"w x 9.05"d



quick SHIP Products

CATALOG #	DESCRIPTION	VOLTS	BALLAST TYPE	LAMP
Pulse Start				
WLSG-70MHQPK	70 watt PS	Quad	HX-NPF	MH70/U/M
WLSG-100MHQPK	100 watt PS	Quad	HX-NPF	MH100/U/M
High Pressure Sodium				
WLSG-100HPK	100 watt HPS	120	R-NPF	C100S54/M
WLSG-150HPK	150 watt HPS	120	R-NPF	C150S55/M
Fluorescent				
WLSG-26FEUPK	26 watt FL	Univ.	Prog. Start	PLT26W/41
WLSG-42FEUPK	42 watt FL	Univ.	Prog. Start	PLT42W/41

*See the **green market** Buyers Guide for more available wattages

WLMA Series



quick SHIP Products



CATALOG #	DESCRIPTION	BALLAST VOLTS	TYPE	LAMP
Pulse Start				
WLMA-70MHQPK	70 watt PS	Quad	HX-HPF	MH70/U/M
WLMA-100MHQPK	100 watt PS	Quad	HX-HPF	MH100/U/M
WLMA-150PQPK	150 watt PS	Quad	HX-HPF	MS150/U/M
High Pressure Sodium				
WLMA-100HQPK	100 watt HPS	Quad	HX-HPF	C100S54/M
WLMA-150HPK	150 watt HPS	120	R-NPF	C150S55/M
WLMA-150HQPK	150 watt HPS	Quad	HX-HPF	C150S55/M
Fluorescent				
WLMA-84FEUPK	84 watt FL	Univ.	Prog. Start (2)	PLT42W/41

*See the **green market** Buyers Guide for more available wattages

WATTAGES

70 - 150 watts Pulse Start
70 - 150 watts HPS
52 - 84 watts Fluorescent

CONSTRUCTION

Architectural Housing
Die Cast Aluminum Housing
Borosilicate Glass Lens
Threaded Apertures for
Conduit & Photo Control

ELECTRICAL

UL Listed for Wet Locations

DIMENSIONS

11"h x 11"w x 7.75"d

WLXDA Series



quick SHIP Products

CATALOG #	DESCRIPTION	VOLTS	BALLAST TYPE	LAMP
Pulse Start				
Ⓢ WLXDA-250PQPK	250 watt PS	Quad	CWA	MS250/H
Ⓢ WLXDA-320PQPK	320 watt PS	Quad	CWA	MS320/H
Ⓢ WLXDA-400PQPK	400 watt PS	Quad	CWA	MS400/H
High Pressure Sodium				
WLXDA-250HQPK	250 watt HPS	Quad	CWA	C250S50
WLXDA-400HQPK	400 watt HPS	Quad	CWA	C400S51

*See the **green market** Buyers Guide for more available wattages

WATTAGES

250 - 400 watts Pulse Start
250 - 400 watts HPS

CONSTRUCTION

Architectural Housing
Die Cast Aluminum Housing
Borosilicate Glass Lens
Threaded Apertures for
Conduit & Photo Control
Quick Install Bracket with
Bubble Level Provides
Correct Alignment

ELECTRICAL

UL Listed for Wet Locations

DIMENSIONS

12.13"h x 16.38"w x 10.5"d

WATTAGES

126 watts Fluorescent

CONSTRUCTION

Polycarbonate Housing
Polycarbonate Lens
Die Cast Back Housing
Face Frame Opens to the Side
Threaded Apertures for Conduit
UL Listed for Wet Locations

ELECTRICAL

UL Listed for Wet Locations

DIMENSIONS

12"h x 14.5"w x 7.75"d



quick SHIP Products



CATALOG #	DESCRIPTION	VOLTS	BALLAST TYPE	LAMP
Fluorescent				
WLF-126FEUPK	126 watt FL	Univ.	Prog. Start	(3) PLT42W/41

WLM Series

WATTAGES

70 - 150 watts Pulse Start
70 - 150 watts HPS
52 - 84 watts Fluorescent

CONSTRUCTION

Die Cast Aluminum Housing
Borosilicate Glass Lens
Face Frame Opens to the Side
Threaded Apertures for Conduit & Photo Control
Emergency Battery Backup Available

ELECTRICAL

UL Listed for Wet Locations

DIMENSIONS

9.02"h x 14.2"w x 7.85"d



quick SHIP Products



CATALOG #	DESCRIPTION	VOLTS	BALLAST TYPE	LAMP
Pulse Start				
WLM-70MHQPK	70 watt PS	Quad	HX-HPF	MH70/U/M
WLM-100MHQPK	100 watt PS	Quad	HX-HPF	MH100/U/M
WLM-150PQPK	150 watt PS	Quad	HX-HPF	MS150/U
High Pressure Sodium				
WLM-100HQPK	100 watt HPS	Quad	HX-HPF	C100S54
WLM-150HPK	150 watt HPS	120	R-NPF	C150S55
WLM-150HQPK	150 watt HPS	Quad	HX-HPF	C150S55
Fluorescent				
WLM-84FEUPK	84 watt FL	Univ.	Prog. Start	(2) PLT42W/41

*See the **green market** Buyers Guide for more available wattages

WLD Series



quick SHIP Products

CATALOG #	DESCRIPTION	VOLTS	BALLAST TYPE	LAMP
Pulse Start				
Ⓔ WLD-250PQPK	250 watt PS	Quad	CWA	MS250/H
High Pressure Sodium				
WLD-250HQP	250 watt HPS	Quad	CWA	C250S50

*See the **green market** Buyers Guide for more available wattages

WATTAGES

200 - 250 watts Pulse Start
250 watts HPS

CONSTRUCTION

Die Cast Aluminum Housing
Borosilicate Glass Lens
High Output Full Reflector
Face Frame Opens to the Side
Shallow Back Design
Threaded Apertures for
Conduit & Photo Control

ELECTRICAL

UL Listed for Wet Locations

DIMENSIONS

9.01"h x 18.2"w x 9.78"d

WLXD Series



quick SHIP Products

CATALOG #	DESCRIPTION	VOLTS	BALLAST TYPE	LAMP
Pulse Start				
Ⓔ WLXD-320PQPK	320 watt PS	Quad	CWA	MS320/H
Ⓔ WLXD-400PQPK	400 watt PS	Quad	CWA	MS400/H
High Pressure Sodium				
WLXD-400HQP	400 watt HPS	Quad	CWA	C400S51

480V Available Upon Request | *See the **green market** Buyers Guide for more available wattages

WATTAGES

320 - 400 watts Pulse Start
400 watts HPS

CONSTRUCTION

Die Cast Aluminum Housing
Borosilicate Glass Lens
High Output Full Reflector
Face Frame Opens to the Side
Threaded Apertures for
Conduit & Photo Control

ELECTRICAL

UL Listed for Wet Locations

DIMENSIONS

9.01"h x 18.2"w x 12.78"d

WLMC Series

WATTAGES

70 - 150 watts Pulse Start
70 - 150 watts HPS
52 - 84 watts Fluorescent

CONSTRUCTION

Die Cast Aluminum Housing
Borosilicate Glass Lens
Reduces Light Pollution
Reduces Light Trespass
Face Frame Opens to the Side
Threaded Apertures for
Conduit & Photo Control
Emergency Battery Backup Available

ELECTRICAL

UL Listed for Wet Locations

DIMENSIONS

9.23"h x 14.25"w x 8.3"d



quick SHIP Products



CATALOG #	DESCRIPTION	BALLAST VOLTS	TYPE	LAMP
Pulse Start				
WLMC-70MHQPK	70 watt PS	Quad	HX-HPF	MH70/U/M
WLMC-100MHQPK	100 watt PS	Quad	HX-HPF	MH100/U/M
WLMC-150PQPK	150 watt PS	Quad	HX-HPF	MS150/U
High Pressure Sodium				
WLMC-100HQPK	100 watt HPS	Quad	HX-HPF	C100S54
WLMC-150HPK	150 watt HPS	120	R-NPF	C150S55
WLMC-150HQPK	150 watt HPS	Quad	HX-HPF	C150S55
Fluorescent				
WLMC-84FEUPK	84 watt FL	Univ.	Prog. Start	(2) PLT42W/41

*See the **green market** Buyers Guide for more available wattages

WLDC Series

WATTAGES

200 - 250 watts Pulse Start
250 watts HPS

CONSTRUCTION

Die Cast Aluminum Housing
Face Frame Opens to the Side
Reduces Light Pollution
Reduces Light Trespass
Shallow Back Design
Threaded Apertures for
Conduit & Photo Control

ELECTRICAL

UL Listed for Wet Locations

DIMENSIONS

9.1"h x 18.19"w x 9.88"d



quick SHIP Products

CATALOG #	DESCRIPTION	VOLTS	BALLAST TYPE	LAMP
Pulse Start				
WLDC-250PQPK	250 watt PS	Quad	CWA	MS250/H
High Pressure Sodium				
WLDC-250HQPK	250 watt HPS	Quad	CWA	C250S50

480V Available Upon Request | *See the **green market** Buyers Guide for more available wattages

WLXDC Series



quick SHIP Products

CATALOG #	DESCRIPTION	VOLTS	BALLAST TYPE	LAMP
Pulse Start				
ⓔ WLXDC-320PQPK	320 watt PS	Quad	CWA	MS320/H
ⓔ WLXDC-400PQPK	400 watt PS	Quad	CWA	MS400/H
High Pressure Sodium				
WLXDC-400HQPK	400 watt HPS	Quad	CWA	C400S51

480V Available Upon Request | *See the **green market** Buyers Guide for more available wattages

WATTAGES

320 - 400 watts Pulse Start
400 watts HPS

CONSTRUCTION

Die Cast Aluminum Housing
Face Frame Opens to the Side
Reduces Light Pollution
Reduces Light Trespass
Threaded Apertures for
Conduit & Photo Control

ELECTRICAL

UL Listed for Wet Locations

DIMENSIONS

9.1"h x 18.2"w x 12.88"d

WLMFC Series



quick SHIP Products

CATALOG #	DESCRIPTION	BALLAST VOLTS	TYPE	LAMP
Pulse Start				
WLMFC-70MHQPK	70 watt PS	Quad	HX-HPF	MH70/U/M
WLMFC-100MHQPK	100 watt PS	Quad	HX-HPF	MH100/U/M
WLMFC-150PQPK	150 watt PS	Quad	HX-HPF	MS150/U
High Pressure Sodium				
WLMFC-100HQPK	100 watt HPS	Quad	HX-HPF	C100S54
WLMFC-150HPK	150 watt HPS	120	R-NPF	C150S55
WLMFC-150HQPK	150 watt HPS	Quad	HX-HPF	C150S55
Fluorescent				
WLMFC-84FEUPK	84 watt FL	Univ.	Prog. Start	(2) PLT42W/41

*See the **green market** Buyers Guide for more available wattages

WATTAGES

70 - 150 watts Pulse Start
70 - 150 watts HPS
52 - 84 watts Fluorescent

CONSTRUCTION

Die Cast Aluminum Housing
Face Frame Opens to the Side
Reduces Light Pollution
Reduces Light Trespass
Dark Sky Compliant

Threaded Apertures for
Conduit & Photo Control

Emergency Battery Backup Available

ELECTRICAL

UL Listed for Wet Locations

DIMENSIONS

9.08"h x 14.18"w x 11.5"d

WLDFC Series

WATTAGES

200 - 250 watts Pulse Start
250 watts HPS

CONSTRUCTION

Die Cast Aluminum Housing
Face Frame Opens to the Side
Reduces Light Pollution
Reduces Light Trespass
Dark Sky Compliant
Shallow Back Design
Threaded Apertures for
Conduit & Photo Control

ELECTRICAL

UL Listed for Wet Locations

DIMENSIONS

9.08"h x 16"w x 16.95"d



quick SHIP Products

CATALOG #	DESCRIPTION	VOLTS	BALLAST TYPE	LAMP
Pulse Start				
Ⓔ WLDFC-250PQPK	250 watt PS	Quad	CWA	MS250/H
High Pressure Sodium				
WLDFC-250HQP	250 watt HPS	Quad	CWA	C250S50

480V Available Upon Request | *See the [green market](#) Buyers Guide for more available wattages

WLXDFC Series

WATTAGES

320 - 400 watts Pulse Start
400 watts HPS

CONSTRUCTION

Die Cast Aluminum Housing
Face Frame Opens to the Side
Reduces Light Pollution
Reduces Light Trespass
Dark Sky Compliant
Threaded Apertures for
Conduit & Photo Control

ELECTRICAL

UL Listed for Wet Locations

DIMENSIONS

9.08"h x 16"w x 23"d



quick SHIP Products

CATALOG #	DESCRIPTION	VOLTS	BALLAST TYPE	LAMP
Pulse Start				
Ⓔ WLXDFC-320PQPK	320 watt PS	Quad	CWA	MS320/H
Ⓔ WLXDFC-400PQPK	400 watt PS	Quad	CWA	MS400/H
High Pressure Sodium				
WLXDFC-400HQP	400 watt HPS	Quad	CWA	C400S51

480V Available Upon Request | *See the [green market](#) Buyers Guide for more available wattages

WLMS Series



quick SHIP Products

CATALOG #	DESCRIPTION	VOLTS	BALLAST	LAMP
Pulse Start				
WLMS-70MHQPK	70 watt PS	Quad	HX-HPF	MH70/U/M
WLMS-100MHQPK	100 watt PS	Quad	HX-HPF	MH100/U/M
WLMS-150PQPK	150 watt PS	Quad	HX-HPF	MS150/U/M
High Pressure Sodium				
WLMS-100HPK	100 watt HPS	120	R-NPF	C100S54/M
WLMS-100HQPK	100 watt HPS	Quad	HX-HPF	C100S54/M
WLMS-150HPK	150 watt HPS	120	R-NPF	C150S55/M
WLMS-150HQPK	150 watt HPS	Quad	HX-HPF	C150S55/M

*See the **green market** Buyers Guide for more available wattages

WATTAGES

70 - 150 watts Pulse Start
70 - 150 watts HPS

CONSTRUCTION

Provides Controlled Downlight
Dark Sky Compliant
Reduces Light Pollution
Reduces Light Trespass
Quick Install Bracket with
Bubble Level Provides
Correct Alignment

ELECTRICAL

UL Listed for Wet Locations

DIMENSIONS

9.02"h x 18.16"w x 9"d

WLMR Series



quick SHIP Products

CATALOG #	DESCRIPTION	VOLTS	BALLAST	LAMP
Pulse Start				
WLMR-70MHQPK	70 watt PS	Quad	HX-HPF	MH70/U/M
WLMR-100MHQPK	100 watt PS	Quad	HX-HPF	MH100/U/M
WLMR-150PQPK	150 watt PS	Quad	HX-HPF	MS150/U/M
High Pressure Sodium				
WLMR-100HPK	100 watt HPS	120	R-NPF	C100S54/M
WLMR-100HQPK	100 watt HPS	Quad	HX-HPF	C100S54/M
WLMR-150HPK	150 watt HPS	120	R-NPF	C150S55/M
WLMR-150HQPK	150 watt HPS	Quad	HX-HPF	C150S55/M

*See the **green market** Buyers Guide for more available wattages

WATTAGES

70 - 150 watts Pulse Start
70 - 150 watts HPS

CONSTRUCTION

Provides Controlled Downlight
Dark Sky Compliant
Reduces Light Pollution
Reduces Light Trespass
Quick Install Bracket with
Bubble Level Provides
Correct Alignment

ELECTRICAL

UL Listed for Wet Locations

DIMENSIONS

7.14"h x 17.88"w x 8.93"d

WATTAGES

70 - 150 watts Pulse Start

70 - 150 watts HPS

CONSTRUCTION

Provides Controlled Uplight and Downlight

Dark Sky Compliant

Reduces Light Pollution

Reduces Light Trespass

Quick Install Bracket with Bubble Level Provides Correct Alignment

ELECTRICAL

UL Listed for Wet Locations

DIMENSIONS

7.14"h x 17.88"w x 8.93"d



CATALOG #	DESCRIPTION	VOLTS	BALLAST	LAMP
Pulse Start				
WLMRU-70MHQPK	70 watt PS	Quad	HX-HPF	MH70/U/M
WLMRU-100MHQPK	100 watt PS	Quad	HX-HPF	MH100/U/M
WLMRU-150PQPK	150 watt PS	Quad	HX-HPF	MS150/U/M
High Pressure Sodium				
WLMRU-100HPK	100 watt HPS	120	R-NPF	C100S54/M
WLMRU-100HQPK	100 watt HPS	Quad	HX-HPF	C100S54/M
WLMRU-150HPK	150 watt HPS	120	R-NPF	C150S55/M
WLMRU-150HQPK	150 watt HPS	Quad	HX-HPF	C150S55/M

*See the **green market** Buyers Guide for more available wattages

Accessories



Face Frame Assemblies

CATALOG #	DESCRIPTION	FINISH
210-006	WLDC & WLXDC Face Frame Assembly	Bronze
210-007	WLM Face Frame Assembly	Bronze
210-008	WLMC Face Frame Assembly	Bronze
210-010	WLSG Face Frame Assembly	Bronze
210-011	WLXD Face Frame Assembly	Bronze
210-020	WLMFC Face Frame Assembly	Bronze
210-021	WLXDFC Face Frame Assembly	Bronze



Lens

CATALOG #	DESCRIPTION	STD. PKG.
210-009	Polycarbonate Front Lens for WLS	1
130-004	WLG Lens with Gasket	1



Guards

CATALOG #	DESCRIPTION	STD. PKG.
280-019-1	Wireguard for WLM	1
280-020-1	Wireguard for WLXD	1
280-022-1	Polycarbonate Guard for WLM	1
280-023-1	Polycarbonate Guard for WLXD	1



Cut-Off Shields

CATALOG #	DESCRIPTION	FINISH
320-013	Full Cut-Off Shield for WLM	Bronze
320-015	Full Cut-Off Shield for WLXD	Bronze
320-017	Full Cut-Off Shield for WLXDC	Bronze

Energy Efficiency *Comparison Charts*

	100w Incandescent	26w FL
Lamp Life	1,000 hrs	12,000 hrs
Start Up Time	Instant	Instant
Restrike Time	Instant	Instant
CRI	100	82
Color Temperature	2,700k	4,100k
Initial Lumens	1,720	1,780
Mean Lumens	1,600	1,680
Lumens/Watt	16	64.62
Watts/Fixture	100	26
Cost/Year*	\$23.36	\$6.07

*Based On: 8 hours per day | 365 days per year | \$0.08 per kWh

	50w MH	42w FL
Lamp Life	5,000 hrs	12,000 hrs
Start Up Time	3-5 minutes	Instant
Restrike Time	15-20 minutes	Instant
CRI	70	82
Color Temperature	4,200k	4,100k
Initial Lumens	3,400	3,200
Mean Lumens	2,700	2,752
Lumens/Watt	39.13	65.52
Watts/Fixture	69	42
Cost/Year*	\$16.12	\$9.81

*Based On: 8 hours per day | 365 days per year | \$0.08 per kWh

	70w MH	52w FL
Lamp Life	10,000 hrs	12,000 hrs
Start Up Time	3 - 5 minutes	Instant
Restrike Time	15 - 20 minutes	Instant
CRI	70	82
Color Temperature	4,100k	4,100k
Initial Lumens	5,000	3,560
Mean Lumens	4,000	3,360
Lumens/Watt	38.636	64.62
Watts/Fixture	88	52
Cost/Year*	\$20.56	\$12.15

*Based On: 8 hours per day | 365 days per year | \$0.08 per kWh

	100w MH	84w FL
Lamp Life	10,000 hrs	12,000 hrs
Start Up Time	3-5 minutes	Instant
Restrike Time	15-20 minutes	Instant
CRI	70	82
Color Temperature	4,200k	4,100k
Initial Lumens	7,800	6,400
Mean Lumens	5,600	5,504
Lumens/Watt	43.4	65.52
Watts/Fixture	129	84
Cost/Year*	\$30.13	\$19.62

*Based On: 8 hours per day | 365 days per year | \$0.08 per kWh

	175w MH	126w FL
Lamp Life	10,000 hrs	12,000 hrs
Start Up Time	3 - 5 minutes	Instant
Restrike Time	15 - 20 minutes	Instant
CRI	70	82
Color Temperature	2,700k	4,100k
Initial Lumens	14,000	9,600
Mean Lumens	10,000	8,250
Lumens/Watt	47.6	65.5
Watts/Fixture	210	126
Cost/Year*	\$49.06	\$29.43

*Based On: 8 hours per day | 365 days per year | \$0.08 per kWh

Fluorescent Industrial



HID Industrial



Wall Lighting



Vandal | Vapor



Flood Lighting



Exit & Emergency Lighting



Security Lighting



Ballasts




Lamps



Site Lighting



Customizable *Printed Material*

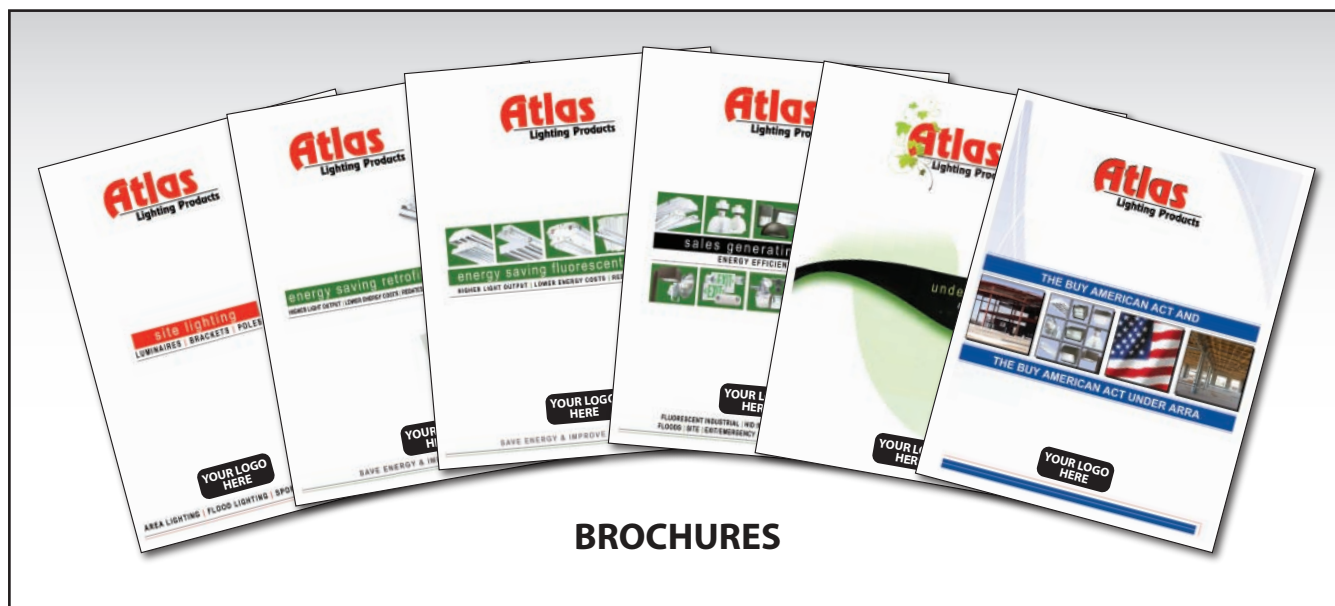

BROCHURES

Promote and educate your customers with custom marketing material personalized with your company logo.



FLYERS



POSTCARDS



PO Box 2348 | Burlington, NC 27216
1406 S. Mebane Street | Burlington, NC 27215
800-849-8485 | fax 336-227-0110
www.atlaslightingproducts.com
Atlas Cat. #: 452-108
