



Ballymore
3135 Lower Valley Road
Parkesburg, PA 19365



Fork Deck



Stainless Steel




Aluminum



Providing Rolling Ladders For Over 60 Years!

Call for pricing or visit our web site www.ballymore.com

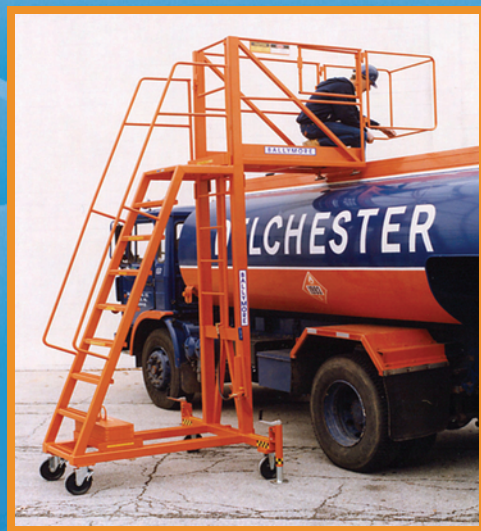

SEE PAGE 3



SEE PAGE 6



SEE PAGE 11



SEE PAGE 18

Phone: **610.593.5062** • Fax: **610.593.8615** • TOLL FREE: **800.762.8327**

www.BALLYMORE.com

ROLLING LADDERS • SAFETY LADDERS • PERSONNEL LIFTS • WORK PLATFORMS



BALLYMORE

MORE VALUE • MORE OPTIONS • MORE INNOVATION • MORE SOLUTIONS

NEW!



SEE PAGE 14

CANTILEVER SERIES

- 300 lb capacity
- 59 degree slope
- High quality 5" x 2" locking casters
- OSHA & ANSI compliant
- Powder coat finish
- Heavy-duty 1" x 2" rectangular tube frame
- Ships KD to prevent freight damage and lower freight cost



POWDER
COATED
TOUGH™

Custom Ladders and Platforms to Fit Your Needs • Exceeds OSHA/ANSI Standards
Short Lead Times • Uncompromising Quality • Exceptional Service • 5 Shipping Locations

Ballymore • 3135 Lower Valley Road • Parkesburg, PA 19365

Phone: **610.593.5062** • Toll Free: **800.762.8327** • Fax: **610.593.8615**

www.BALLYMORE.com

HOW TO SELECT THE RIGHT ROLLING LADDER FOR YOUR APPLICATION

Size Considerations

- Select Platform Height, also known as Top Step Height, based on operations being performed.
- Platform Height is where the user generally stands. Make sure you have minimum clearance of 6 to 7 feet from the ceiling or any object suspended from the ceiling to insure the user has room to stand safely.
- Maximum convenient working height is 5 feet to 6 feet above the platform height.
- For larger ladders, choose a wide ladder over a narrow one if space permits. For bulky loads, consider a stairway slope ladder and/or deeper top step.
- Consider limitations on ladder dimensions imposed by doorways, aisle width and corners the ladder needs to turn. For tight spaces, select a narrow or all directional ladder for maximum maneuverability.

Note: Load capacity (lbs.) is the combined weight of the user and materials.

Shipping:

- Ballymore's Patented bolt in top step allows ladders to be boxed
- Ballymore's ladder in a box program:
 - Lower freight cost
 - Eliminate freight damage
 - Provides ability to stock ladders



Climbing Position

The typical incline of a rolling ladder is designed for the user to ascend and descend facing the steps. However, "Stairway Slope" or "Walk Down" ladders have a more moderate incline, approximately 50 degrees, enabling the user to descend facing forward which is safer and more stable while carrying heavier and bulky objects.

Material Type


Steel: For all around general purpose.

Stainless: For corrosive environment as well as outdoor use.

Aluminum: Like Stainless, they are corrosion resistant making them ideal for both indoor and outdoor use.

Locking Mechanisms

- **Weight Actuated Lock Step:** This **Patented** state of the art lock step automatically actuates when 70 lbs. of weight is applied to the stair section. Safest most durable lock step on the market today.
- **Standard Lock Step Ladders:** Ideal for applications over 5 steps. These ladders are raised into the rolling position when the lock step is actuated. Releasing the lock step drops the ladder into the climbing position with the feet firmly on the floor.
- **Spring-loaded Casters:** Ideal for shorter ladders 5 steps and below. On this style ladder, the wheels retract under the user's weight securing the ladder to the floor.

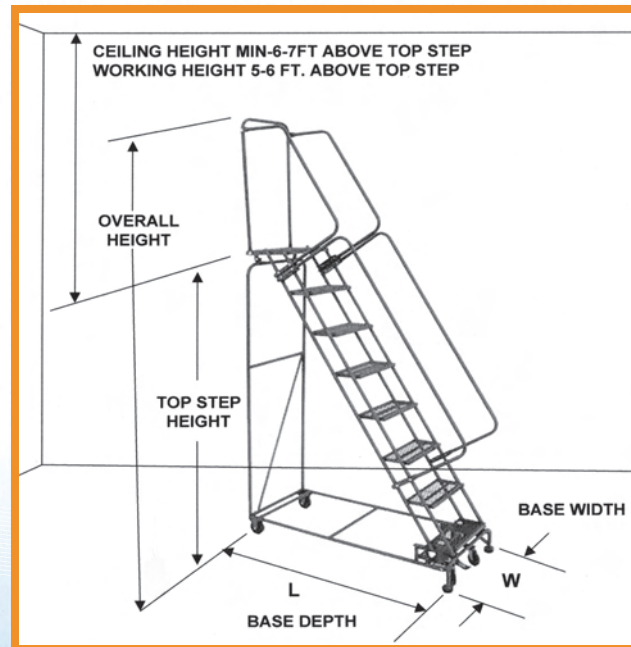

B
A
L
L
Y
M
O
R
E

STANDARD ROLLING LADDERS WITH SPRING LOADED CASTERS

- Mounted on four spring loaded swivel casters that retract under user's weight
- Working heights up to 12'
- 7" deep steps with 10" deep top step on 1 - 4 step models shown with (*) or (**)
- 14" deep top step on 4 - 7 step FSH models
- Comes standard with expanded metal tread, optional treads available
- 1 - 4 step ladders(*) & (**) ship unassembled in a box, eligible for UPS;
- 4 - 7 step FSH models ship unassembled
- Specify set-up (SU) if required***
- 450 lb. capacity
- Gray powder coat finish
- Built to OSHA and ANSI standards
- CAL OSHA available



STEPS INCLUDING TOP STEP	HEIGHT INCHES		16" WIDE STEP			24" WIDE STEP		
	TOP STEP	OVER ALL	MODEL #	BASE W" x L"	WGT Lbs.	MODEL #	BASE W" x L"	WGT Lbs.
NO HANDRAILS								
1 STEP	12	12	118*	18 x 16	18	126*	26 x 16	20
2 STEP	19	19	218*	20 x 19	22	226*	30 x 19	28
3 STEP	28.5	28.5	318*	20 x 25	31	326*	30 x 25	36
4 STEP	38	38	418*	20 x 31	42	426*	30 x 31	51
WITH HANDRAILS								
2 STEP	19	49	H218**	20 x 19	36	H226**	30 x 19	42
3 STEP	28.5	58.5	H318**	20 x 25	45	H326**	30 x 25	50
4 STEP	38	68	H418**	20 x 31	56	H426**	30 x 31	65
4 STEP	40	73	FSH418	20 x 35	68	FSH426	30 x 35	80
5 STEP	50	83	FSH518	20 x 42	75	FSH526	30 x 42	87
6 STEP	60	93	FSH618	24 x 49	83	FSH626	30 x 49	98
7 STEP	70	103	FSH718	24 x 56	89	FSH726	30 x 56	108

*Eligible for UPS

**Handrails may ship in separate box

*** May result in higher freight costs

LOCK-N-STOCK

Tired of watching light duty step ladders fall apart? Does the term "Rickety" come to mind when you think of your current ladder? Try Ballymore's new Lock-N-Stock Folding ladder- 58 degree slope with 7" deep steps for easy climbing, welded steel construction rated to 350 lbs. Lock the stair section in place and Climb it - Roll it - Fold it - Store it.

MODEL #	STEPS INCLUDING TOP STEP	TOP STEP HEIGHT	WGT Lbs.	OPEN WIDTH AND LENGTH	FOLDED DIMENSIONS	SHIPS UPS
LS2247	2 STEP	20	36	24 x 17	10 x 24 x 41	YES
LS3247	3 STEP	30	44	24 x 23	10 x 24 x 52	YES
LS4247	4 STEP	40	51	24 x 30	10 x 24 x 65	YES*

*Oversize 90lbs

- Welded construction
- No hinge to break
- Heavy duty rated for 350 pounds
- Easy to maneuver in the open or closed positions
- Locks in the folded or climbing positions
- Approximately 10" deep when folded for easy storage
- Built to ANSI 14.2 standards




TREAD SELECTION GUIDE


Abrasive Mat Tread (R):
Great in a clean retail environment.




Perforated Tread (P):
Provides excellent slip resistance. This tread design is used extensively in retail and storeroom applications.



Expanded Metal Tread (X):
This aggressive tread is ideal for the warehouse or retail floor. This design is self-cleaning allowing foot debris to fall through the tread.



Serrated Tread (G):
The most aggressive. This tread design is ideal for the shop floor or any industrial application where maximum slip resistance is required.



Ladders are in Stock in IL, GA, TX, CA, PA


Phone: **610.593.5062** • Fax: **610.593.8615**

www.BALLYMORE.com


M-2000 SERIES ROLLING SAFETY LADDERS

- **450 lbs. capacity**
- Easy to use footpedal activated lockstep
- High quality casters with bearing and dust cover
- 14" deep top step
- Ladders ship knocked-down for freight savings
- Fully assembled ladders available - specify (SU) set-up
- Expanded metal tread standard or specify alternate tread
- Manufactured with rigid 1" OD tubing
- 30" high handrails
- 21" and 28" deep top step available (see below)
- Available with Rear Guardrail removed for easy walk through
- Gray powder coat finish
- Built to OSHA and ANSI standards
- CAL OSHA available


EXPANDED METAL
STANDARD OR
SPECIFY ALTERNATE
TREAD WHEN
ORDERING



Perforated Tread (P)



Expanded Metal Tread (X)



Heavy Duty Serrated Grating (G)



Abrasive Mat Tread (R)



Heavy Duty
Easy
Operating
Lockstep

STEPS INCLUDING TOP STEP	HEIGHT INCHES		MODEL #	BASE W" x L"	WGT Lbs.
	TOP STEP	OVER ALL			
16" WIDE STEP WITH 24" WIDE BASE					
5 STEP	50	83	052414	24 x 43	91
6 STEP	60	93	062414	24 x 49	100
7 STEP	70	103	072414	24 x 55	109
8 STEP	80	113	082414	24 x 61	127
24" WIDE STEP WITH 32" - 40" WIDE BASE					
5 STEP	50	83	053214	32 x 43	110
6 STEP	60	93	063214	32 x 49	122
7 STEP	70	103	073214	32 x 55	143
8 STEP	80	113	083214	32 x 61	160
9 STEP	90	123	093214	32 x 68	175
10 STEP	100	133	103214	32 x 74	193
11 STEP	110	143	113214	32 x 80	205
12 STEP	120	153	123214	32 x 87	220
13 STEP*	130	175	134014	40 x 94	250
14 STEP*	140	185	144014	40 x 100	280
15 STEP*	150	195	154014	40 x 106	310

*Must be skidded. See price sheet for skidding cost.

M-2000 SERIES DEEP TOP STEP LADDERS

- All features of the standard M-2000 line with a Deep Top Step to provide a larger and more comfortable work space
- No rear guard rail available easy walk through
- Side exit available on 28" deep top step models




STEPS INCLUDING TOP STEP	HEIGHT INCHES		21" DEEP TOP STEP			28" DEEP TOP STEP		
	TOP STEP	OVER ALL	MODEL #	BASE W" x L"	WGT Lbs.	MODEL #	BASE W" x L"	WGT Lbs.
16" WIDE STEP WITH 24" WIDE BASE								
5 STEP	50	83	052421	24 x 50	102	052428	24 x 57	113
6 STEP	60	93	062421	24 x 56	111	062428	24 x 63	122
7 STEP	70	103	072421	24 x 62	120	072428	24 x 69	131
8 STEP	80	113	082421	24 x 68	138	082428	24 x 75	149
24" WIDE STEP WITH 32" - 40" WIDE BASE								
5 STEP	50	83	053221	32 x 50	121	053228	32 x 57	132
6 STEP	60	93	063221	32 x 56	133	063228	32 x 63	144
7 STEP	70	103	073221	32 x 62	154	073228	32 x 69	165
8 STEP	80	113	083221	32 x 68	171	083228	32 x 75	182
9 STEP	90	123	093221	32 x 75	186	093228	32 x 82	197
10 STEP	100	133	103221	32 x 81	204	103228	32 x 88	215
11 STEP	110	143	113221	32 x 87	216	113228	32 x 94	227
12 STEP	120	153	123221	32 x 94	231	123228	32 x 101	242
13 STEP*	130	172	134021	40 x 101	261	134028	40 x 108	272
14 STEP*	140	182	144021	40 x 107	291	144028	40 x 115	302
15 STEP*	150	192	154021	40 x 113	321	154028	40 x 121	332

ALL DIRECTION LADDERS MOVES Laterally TO FIT IN TIGHT CORNERS AND CLOSE TO SHELVES



Rolls on 4 swivel casters allowing ladders to move in **ALL DIRECTIONS**. Rigid casters on rear provide easy transition between floor types.



- **Turns in its own radius**
- Easy to use footpedal activated lockstep
- 14" deep top step
- 450 lbs. capacity
- Gray powder coat finish
- Built to OSHA and ANSI standards
- CAL OSHA available

**Ships KD to reduce freight costs
EASY ASSEMBLY**
Set up available - Specify SU



Built to OSHA and ANSI

STEPS INCLUDING TOP STEP	HEIGHT INCHES		MODEL #	BASE W" x L"	WGT Lbs.
	TOP STEP	OVER ALL			
16" WIDE STEP					
6 STEP	60	93	PIP-6	24 x 49	110
7 STEP	70	103	PIP-7	24 x 55	125
8 STEP	80	113	PIP-8	24 x 61	140
24" WIDE STEP					
6 STEP	60	93	PIP-6-32	32 x 49	133
7 STEP	70	103	PIP-7-32	32 x 55	154
8 STEP	80	113	PIP-8-32	32 x 61	171
9 STEP	90	123	PIP-9	32 x 68	186
10 STEP	100	133	PIP-10	32 x 74	204
11 STEP	110	143	PIP-11	32 x 80	216
12 STEP	120	153	PIP-12	32 x 87	231

TREAD TYPES AVAILABLE:

(X) Expanded Metal - Standard • (P) Perforated • (R) Abrasive Mat • (G) Heavy Duty Serrated Grating
PLEASE SPECIFY WHEN ORDERING

STOCK PICKING LADDERS

- Combines the benefits of a rolling safety ladder and a stock-picking cart
- 16" or 24" wide steps, choice of 14" deep top step or 21" deep top step
- Sturdy
 - 2 shelves on 6 - 8 step models
 - 3 shelves on 9 - 12 step models
- Combined 600 lbs. capacity
 - Maximum 450 lbs. for ladder
 - Maximum 300 lbs. for storage shelves
- Gray powder coat finish
- CAL OSHA available
- Boxed to reduce freight costs and risk of damage
- Built to OSHA and ANSI standards



Built to OSHA and ANSI

STEPS INCLUDING TOP STEP	HEIGHT INCHES		MODEL #	BASE W" x L"	WGT Lbs.
	TOP STEP	OVER ALL			
16" WIDE TREAD 14" Deep Top Step					
6 STEP	60	93	SPL-6-14N	24 x 49	80
7 STEP	70	103	SPL-7-14N	24 x 55	89
8 STEP	80	113	SPL-8-14N	24 x 61	120
16" WIDE TREAD 21" Deep Top Step					
6 STEP	60	93	SPL-6-N	24 x 56	91
7 STEP	70	103	SPL-7-N	24 x 62	100
8 STEP	80	113	SPL-8-N	24 x 68	131
24" WIDE TREAD 14" Deep Top Step					
6 STEP	60	93	SPL-6-14	32 x 49	150
7 STEP	70	103	SPL-7-14	32 x 55	166
8 STEP	80	113	SPL-8-14	32 x 61	205
9 STEP	90	123	SPL-9-14	32 x 68	215
10 STEP	100	133	SPL-10-14	32 x 74	225
11 STEP	110	143	SPL-11-14	32 x 80	235
12 STEP	120	153	SPL-12-14	32 x 87	250
24" WIDE TREAD 21" Deep Top Step					
6 STEP	60	93	SPL-6	32 x 56	160
7 STEP	70	103	SPL-7	32 x 62	176
8 STEP	80	113	SPL-8	32 x 68	215
9 STEP	90	123	SPL-9	32 x 75	225
10 STEP*	100	133	SPL-10	32 x 81	235
11 STEP*	110	143	SPL-11	32 x 87	245
12 STEP*	120	153	SPL-12	32 x 94	260

50° SLOPE WALK DOWN LADDER



- 50° stairway slope, allows forward facing descent
- Easy to use footpedal activated lockstep
- 14" deep top step standard
- 21" and 28" deep top steps available
- 450 lb. capacity
- Perforated tread standard, or specify alternate tread type
- Ships unassembled for freight cost savings - for set-up specify SU
- Gray powder coat finish
- Available with Rear Guardrail removed for easy walk through
- Built to OSHA and ANSI standards
- CAL OSHA available

TREAD TYPES AVAILABLE:

- (X) Expanded Metal
(P) **Perforated - Standard**
(R) Abrasive Mat
(G) Heavy Duty Serrated Grating

STEPS INCLUDING TOP STEP	HEIGHT INCHES		MODEL #	BASE W" x L"	WGT Lbs.
	TOP STEP	OVER ALL			
16" Wide Step					
5 STEP	50	83	SW524	24 x 50	96
6 STEP	60	93	SW624	24 x 58	109
7 STEP	70	103	SW724	24 x 66	122
8 STEP	80	113	SW824	24 x 74	135
24" Wide Step					
5 STEP	50	83	SW532	32 x 50	115
6 STEP	60	93	SW632	32 x 58	120
7 STEP	70	103	SW732	32 x 66	139
8 STEP	80	113	SW832	32 x 74	165
9 STEP	90	123	SW932	32 x 82	180
10 STEP	100	133	SW1032	32 x 90	200
11 STEP	110	143	SW1132	32 x 98	210
12 STEP	120	153	SW1232	32 x 106	230

Available with **ALL DIRECTIONAL** option
(Recommended on all 10, 11 and 12 step models)

THE MONSTER LINE ROLLING SAFETY LADDER

EXTRA HEAVY DUTY 600 Lbs. Capacity!

Standard Features:

- 21" deep top step - standard
- Base frame and rear vertical are rugged 2" x 1" rectangular tubing
- 59 degree slope
- Weight Activated Lockstep
- 24" wide steps - available in 3 step tread types
- High quality non-marking wheels with roller bearings and dust cover
- Rear corner bumpers - standard
- All-Directional option available
- Gray powder coat finish
- Available with Rear Guardrail removed for easy walk through
- Exceeds OSHA and ANSI standards
- CAL OSHA available
- Certified in Ontario, Canada


EXPANDED METAL STANDARD OR SPECIFY ALTERNATE TREAD WHEN ORDERING



Perforated Tread (P)



Expanded Metal Tread (X)



Heavy Duty Serrated Grating (G)



HEAVY DUTY STAIRWAY SLOPE LADDERS



- **HEAVY DUTY - RUGGED 600 lbs. capacity**
- **50° stairway slope (for easy forward ascent or descent)**
- Top step is 14" deep for additional comfort
- 10" intermediate steps
- 21" and 28" deep top steps available
- Easy operating lockstep secures ladder to the floor
- Gray powder coat finish
- All direction option available
- Exceeds OSHA and ANSI standards
- Available with Guardrail removed for easy walk through
- CAL OSHA available

TREAD TYPES AVAILABLE:

- (X) Expanded Metal
(P) Perforated
(R) **Abrasive Mat - Standard**
(G) Heavy Duty Serrated Grating
PLEASE SPECIFY WHEN ORDERING



Pedal Activated Lockstep

STEPS INCLUDING TOP STEP	HEIGHT INCHES		MODEL #	BASE W" x L"	WGT Lbs.
	TOP STEP	OVER ALL			
5 STEP	50	83	HDS-5	32 x 50	132
6 STEP	60	93	HDS-6	32 x 58	152
7 STEP	70	103	HDS-7	32 x 66	178
8 STEP	80	113	HDS-8	32 x 74	204
9 STEP	90	123	HDS-9	32 x 82	227
10 STEP	100	133	HDS-10	32 x 90	245
11 STEP	110	143	HDS-11	32 x 98	278
12 STEP	120	153	HDS-12	32 x 106	297

LADDER REPLACEMENT PARTS & OPTIONS

Optional Replaceable Skid Plate for rough surfaces



Part #		# Per Set
*PR-2	2" Replacement Casters Sets	4
*PR-3	3" Replacement Casters Sets	4
PS	Replacement Springs	4
PTHDS	Replacement Rubber Tips	4
SBR-4	4" Replacement Casters Sets	4
FW-2	10" Rubber Wheels	2

*Must specify # of steps and width
(Set includes casters, springs, rubber tips and hardware)

Rear Exit or Side Exit Available

- 28" deep top step required for Side Exit
- Please confirm freight classification and packing charge
- Not available on ladders with spring loaded casters
- See price list for cost

Ladder Shelves and Trays

- Hanging Shelf
- Hanging Tray

ALL DIRECTION LADDERS MOVES Laterally TO FIT IN TIGHT CORNERS AND CLOSE TO SHELVES

HEAVY DUTY STAIRWAY SLOPE ALL DIRECTIONAL



Add "AD" to the part numbers shown in the chart to the left (Model Shown HDS-12AD)

- Turns in its own radius
- Easy to use footpedal activated lockstep
- 14" deep top step
- 450 lbs. capacity
- Gray powder coat finish
- Built to OSHA and ANSI standards
- CAL OSHA available



Rolls on 4 swivel casters allowing ladders to move in **ALL DIRECTIONS**. Rigid casters on rear provide easy transition between floor types.

MONSTER LINE ALL DIRECTIONAL



Add "AD" to the part numbers shown in the chart to the above (Model Shown ML123221-AD)

WEIGHT ACTUATED LOCKSTEP LADDERS
Think Safety... Buy Weight Actuated!

Single pedal lifts ladder into rolling position.



Apply 70 pounds of pressure to the steps and the ladder automatically drops the front feet to the ground securing the ladder to the floor for safe climbing.



The most durable lock step on the market today! Designed using finite element analysis and then robotically tested. Prototype units achieved more than 60,000 cycles before replacing latch hook. Then 60,000 more cycles.



Patent No.: US 7,841,447 B2

- Features:
• This state of the art lockstep has only one pedal which lifts the ladder into the rolling position
• Climb the ladder and your weight activates the lockstep - locking the ladder to the floor in the climbing position
• 450 lbs. capacity
• Available in both 59° Ladder Slope or 50° Stairway Slope
• 14" deep top step standard
21" and 28" available
• Durable-manufactured with 1"OD tubing
• Built to OSHA and ANSI standards
• Gray powder coat finish
• CAL OSHA available



Weight Actuated Lock Step



Perforated Tread (P)



Expanded Metal Tread (X)



Heavy Duty Serrated Grating (G)



Abrasive Mat Tread (R)

Table with 6 columns: Total Number of Steps, Height Inches (Top Step, Over All), 59° Ladder Slope Model#, 59° Ladder Base W" x L", Weight Lbs. Rows include 16" WIDE STEP and 24" WIDE STEP models.

Product Specifications are subject to change without notice. Please confirm critical specifications.

Ship Prepaid and Add to take advantage of freight cost reductions with our carrier.

Ladder Inspection Procedure

Shipments are made FOB factory. Each product has been inspected before shipment. Consignee is responsible to inspect material at time of delivery, and should refuse shipment or make written notice to carrier upon receipt of damaged materials.

Carriers and Ballymore will not accept claims if damage is not noted at the time of delivery.

Freight Ballymore can provide estimated freight cost based on our preferred carriers. Note: Costs are subject to change depending on fuel surcharges, special delivery requirements, etc. Ballymore will not be responsible for differences in freight estimates and actual freight costs.

On collect or 3rd party billing shipments, any freight claims must be handled by the customer, including refused shipments.

WEIGHT ACTUATED LOCKSTEP LADDERS
ALL DIRECTIONAL OPTION



- Features:
• Patented state of the art lockstep is the most durable in the industry
• Climb the ladder and your weight activates the lockstep - locking the ladder to the floor in the climbing position
• Rolls on 4 swivel casters allowing ladder to move in ALL DIRECTIONS
• 450 lbs. capacity
• 14" deep top step standard, 21" and 28" available
• Durable - manufactured with 1" O.D. steel tubing
• Gray powder coat finish
• Built to OSHA and ANSI standards
• CAL OSHA available

Table with 6 columns: Total Number of Steps, Height Inches (Top Step, Over All), 59° Model# All Directional Option, 59° Ladder Base W" x L", Weight Lbs. Rows include 16" WIDE STEP and 24" WIDE STEP models.

WEIGHT ACTUATED LOCKSTEP LADDERS
STAIRWAY SLOPE 50 DEGREE

- Features:
• Patented state of the art lockstep is the most durable in the industry
• Climb the ladder and your weight activates the lockstep - locking the ladder to the floor in the climbing position
• 50° stairway slope allows easy forward descent
• 450 lbs. capacity
• 14" deep top step standard, 21" and 28" available

- Durable - manufactured with 1" O.D. steel tubing
• Available with ALL DIRECTION option (recommended for 10, 11 and 12 step models)
• Gray powder coat finish
• Available with Rear Guardrail removed for easy walk through
• Built to OSHA and ANSI standards
• CAL OSHA available



Table with 6 columns: Total Number of Steps, Height Inches (Top Step, Over All), 50° Stairway Slope All Directional Model#, 50° Ladder Base W" x L", Weight Lbs. Rows include 16" WIDE STEP and 24" WIDE STEP models.



WARRANTY (All products including lifts)

Company warrants these products to be free from defects in material and workmanship for a period of one year from date of original purchase. Component parts carry individual warranties as provided by the manufacturer. Our warranty does not extend to parts or end products subjected to misuse, neglect, damage in shipment, by accident or failure to comply with operating instructions. We will repair or replace any unit which is defective during the warranty period if that unit is returned to our factory properly packaged with transportation charges paid. Claims for unauthorized field labor or time charges will not be accepted. Company will not be responsible for any consequential damages of any nature.

RETURN POLICY Written factory permission must be received prior to return. Returns must be in good condition and made within 30 days of original shipment. Freight prepaid. Restocking charge of 20 - 25% on standard items, 50% on aluminum and stainless.

NON-REFUNDABLE ITEMS

Custom or modified ladders, work platforms, crossovers, modified or custom lifts.

Minimum Order: \$15.00, Prepay and add shipments are subject to \$5.00 service charge.



TILT & ROLL LADDERS

- Balanced design allows ladder to tilt easily and roll effortlessly on two 4" casters
- 16" or 24" wide treads
- 450 lbs. capacity
- Expanded metal standard or specify alternate tread
- Ships knocked-down for freight savings
- Fully assembled ladders available - specify (SU) set-up
- Gray powder coat finish
- Built to OSHA and ANSI Standards



Non-Straddle Base



Straddle Base Model # HL-4

STEPS INCLUDING TOP STEP	HEIGHT INCHES		TILT & ROLL MODEL #	BASE W" x L"	WEIGHT Lbs.	Extra Features	
	TOP STEP	OVER ALL					
TR-24" Wide Step							
2 Step	20	53	TR-2	30 x 34	50	TR - ships fully assembled 20" DTS	
3 Step	30	63	TR-3	30 x 40	60		
4 Step	40	73	TR-4	30 x 46	72		
5 Step	50	83	TR-5	30 x 52	84		
6 Step	60	93	TR-6	30 x 58	96		
HL-24" Wide Step							
2 Step	20	53	HL2NS	26 x 32	65	HL - All Welded Straddle Base	
3 Step	30	63	HL3NS	26 x 38	77		
4 Step	40	73	HL4NS	26 x 44	89		
5 Step	50	83	HL5NS	26 x 50	101		
6 Step	60	93	HL6NS	26 x 56	113		
16" Wide Step							
2 Step	19.0	49.0	H218TR	20 x 24	36	Unassembled in box - eligible for UPS 10" DTS	
3 Step	28.5	58.5	H318TR	20 x 30	45		
4 Step	38.0	68.0	H418TR	20 x 36	56		
24" Wide Step							
2 Step	19.0	49.0	H226TR	30 x 24	42		
3 Step	28.5	58.5	H326TR	30 x 30	50		
4 Step	38.0	68.0	H426TR	30 x 36	65		
16" Wide Step							
4 Step	40.0	73.0	FSTR418	20 x 40	68	Ships unassembled for freight savings 14" DTS	
5 Step	50.0	83.0	FSTR518	20 x 47	75		
6 Step	60.0	93.0	FSTR618	24 x 54	83		
24" Wide Step							
4 Step	40.0	73.0	FSTR426	30 x 40	80		
5 Step	50.0	83.0	FSTR526	30 x 47	87		
6 Step	60.0	93.0	FSTR626	30 x 54	98		

Model # H318TR



Quick assembly
Ships flat in box

FOLD-N-STORE LADDERS


- Ladder can be easily folded for storage or transportation
- Tilt and roll mobility
- Large 10" rubber wheels roll easily on rough surfaces
- 14" deep top step standard
- Expanded metal step tread standard, or specify alternate tread
- 350 lb. capacity
- Gray powder coat finish
- Built to OSHA and ANSI standards

STEPS INCLUDING TOP STEP	HEIGHT INCHES		MODEL #	BASE W" x L"	WGT Lbs.
	TOP STEP	OVER ALL			
5 STEP	50	83	FAWL-5	30 x 46	90
6 STEP	60	93	FAWL-6	30 x 52	100
7 STEP	70	103	FAWL-7	30 x 58	110
8 STEP	80	113	FAWL-8	30 x 64	120
9 STEP	90	123	FAWL-9	30 x 70	135
10 STEP	100	133	FAWL-10	30 x 76	148
11 STEP	110	143	FAWL-11	30 x 82	165
12 STEP	120	153	FAWL-12	30 x 88	175



TREAD TYPES AVAILABLE:
(X) Expanded Metal
(P) Perforated
(G) Heavy Duty Serrated Grating

PLEASE SPECIFY WHEN ORDERING

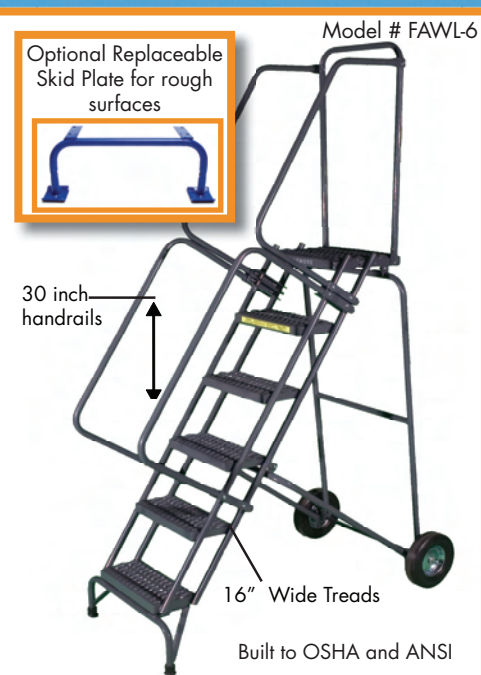

MOBILE WORK PLATFORMS

Single Entry MOBILE PLATFORM



MODEL # SEP4-2448

- Increase productivity by making maintenance operations simple
- Sturdy 1" tubular steel
- Self cleaning slip resistant serrated grating
- Easy to use heavy duty pedal activated lockstep with 4" casters
- 36" high handrails with midrail
- Meets OSHA/ANSI requirements
- Gray enamel finish



MODEL # SNR4-2436

ADD PLATFORM LENGTH TO MODEL # WHEN ORDERING

WORK PLATFORM DESIGNED TO ACCOMMODATE TWO WORKERS.

AVAILABLE IN ALUMINUM AND STAINLESS STEEL. CONTACT FACTORY FOR PRICING.

Double Entry MOBILE PLATFORM



800 lbs. Capacity

SINGLE ENTRY WORK PLATFORMS

MODEL WITHOUT HANDRAILS				36" PLATFORM		48" PLATFORM		60" PLATFORM		72" PLATFORM	
STEPS	PLATFORM HEIGHT	PLATFORM WIDTH	MODEL #	WEIGHT	BASE W" x D"	WEIGHT	BASE W" x D"	WEIGHT	BASE W" x D"	WEIGHT	BASE W" x D"
3 STEP	30"	24"	SNR3-24	105	33 x 48	127	33 x 60	149	33 x 72	171	33 x 84
3 STEP	30"	36"	SNR3-36	121	41 x 48	143	41 x 60	150	41 x 72	187	41 x 84
4 STEP	40"	24"	SNR4-24	121	33 x 54	143	33 x 66	165	33 x 78	187	33 x 90
4 STEP	40"	36"	SNR4-36	138	41 x 54	160	41 x 66	182	41 x 78	204	41 x 90

MODEL WITH HANDRAILS				36" PLATFORM		48" PLATFORM		60" PLATFORM		72" PLATFORM	
STEPS	PLATFORM HEIGHT	PLATFORM WIDTH	MODEL #	WEIGHT	BASE W" x D"	WEIGHT	BASE W" x D"	WEIGHT	BASE W" x D"	WEIGHT	BASE W" x D"
3 STEP	30"	24"	SEP3-24	136	33 x 48	151	33 x 60	172	33 x 72	193	33 x 84
3 STEP	30"	36"	SEP3-36	153	41 x 48	178	41 x 60	202	41 x 72	226	41 x 84
4 STEP	40"	24"	SEP4-24	151	33 x 54	165	33 x 66	186	33 x 78	207	33 x 90
4 STEP	40"	36"	SEP4-36	167	41 x 54	193	41 x 66	217	41 x 78	240	41 x 90
5 STEP	50"	24"	SEP5-24	165	33 x 60	178	33 x 72	199	33 x 84	220	33 x 96
5 STEP	50"	36"	SEP5-36	182	41 x 60	206	41 x 72	230	41 x 84	253	41 x 96
6 STEP	60"	24"	SEP6-24	178	33 x 66	193	33 x 78	215	33 x 90	237	33 x 102
6 STEP	60"	36"	SEP6-36	198	41 x 66	220	41 x 78	245	41 x 90	270	41 x 102
7 STEP	70"	24"	SEP7-24	193	33 x 73	209	33 x 85	230	33 x 97	251	33 x 108
7 STEP	70"	36"	SEP7-36	215	41 x 73	237	41 x 85	273	41 x 97	308	41 x 108

DOUBLE ENTRY PLATFORMS

				36" PLATFORM		48" PLATFORM		60" PLATFORM		72" PLATFORM	
STEPS	PLATFORM HEIGHT	PLATFORM WIDTH	MODEL #	WEIGHT	BASE W" x D"	WEIGHT	BASE W" x D"	WEIGHT	BASE W" x D"	WEIGHT	BASE W" x D"
3 STEP	30"	24"	DEP3-24	202	33 x 60	220	33 x 72	240	33 x 84	260	33 x 96
3 STEP	30"	36"	DEP3-36	226	41 x 60	242	41 x 72	262	41 x 84	282	41 x 96
4 STEP	40"	24"	DEP4-24	227	33 x 73	245	33 x 85	285	33 x 97	284	33 x 108
4 STEP	40"	36"	DEP4-36	248	41 x 73	264	41 x 85	289	41 x 97	306	41 x 108
5 STEP	50"	24"	DEP5-24	251	33 x 85	271	33 x 97	311	33 x 109	308	33 x 121
5 STEP	50"	36"	DEP5-36	270	41 x 85	292	41 x 97	314	41 x 109	330	41 x 121
6 STEP	60"	24"	DEP6-24	276	33 x 98	295	33 x 110	333	33 x 121	332	33 x 133
6 STEP	60"	36"	DEP6-36	297	41 x 98	314	41 x 110	334	41 x 121	352	41 x 133
7 STEP	70"	24"	DEP7-24	300	33 x 110	319	33 x 122	339	33 x 134	356	33 x 146
7 STEP	70"	36"	DEP7-36	319	41 x 110	341	41 x 122	362	41 x 134	380	41 x 146

ADJUSTABLE HEIGHT STEEL WORK PLATFORM

- Simply turn feet to adjust height
- Place several units together to create larger work areas
- Provide shorter workers with a more comfortable work position
- Heavy duty serrated grating provides excellent slip resistance
- Platforms 24" to 48" long, have 4 legs; longer platforms have 6 legs
- Gray powder coat finish

HEIGHTS from 5" to 8"			HEIGHTS from 9" to 14"		
Model #	W" x L"	Weight	Model #	W" x L"	
AWP5-2424	24 x 24	38	AWP9-2424	24 x 24	
AWP5-2436	24 x 36	52	AWP9-2436	24 x 36	
AWP5-2448	24 x 48	66	AWP9-2448	24 x 48	
AWP5-2459	24 x 59	80	AWP9-2459	24 x 59	
AWP5-2471	24 x 71	106	AWP9-2471	24 x 71	
AWP5-2497	24 x 97	138	AWP9-2497	24 x 97	



500 lb. capacity

Make Uneven Surfaces Level

ALUMINUM LADDERS

Tilt & Roll shown with 18" wide steps; serrated grating tread



Built to OSHA and ANSI

- All welded
- Aluminum mill finish, industrial grade welds
- Ideal for use in banks, libraries & hospitals and wash down applications
- 350 lbs. capacity, yet lightweight design
- Non-magnetic and non-sparking
- Paint-free for pharmaceutical & food applications
- Solid ribbed tread or heavy duty serrated grating
- 10" standard deep top step
- Optional 20" deep top step
- Built to OSHA and ANSI standards

TREADS TYPES AVAILABLE:

- **SOLID RIBBED TREAD - Standard**
 - (G) Heavy Duty Serrated Grating
- PLEASE SPECIFY WHEN ORDERING**



RIBBED TREAD OR SPECIFY ALTERNATE TREAD WHEN ORDERING



Ribbed Tread (R)



Heavy Duty Serrated Grating (G)

Aluminum ladders are subject to a 50% restocking charge

STEPS INCLUDING TOP STEP	HEIGHT INCHES		SPRING LOADED CASTERS	TILT & ROLL		
	TOP STEP	OVER ALL	MODEL #	MODEL #	BASE W" X L"	WGT Lbs.
18 " WIDE STEPS						
2 STEP NO RAILS	19	19	A2S*	-	20 x 19	15
3 STEP NO RAILS	28.5	28.5	A3S*	-	20 x 25	20
4 STEP NO RAILS	38	38	A4S	-	20 x 31	29
2 STEP	19	49	A2SH	A2SH-TR	20 x 19	21
3 STEP	28.5	58.5	A3SH	A3SH-TR	20 x 25	27
4 STEP	38	68	A4SH	A4SH-TR	20 x 31	34
24" WIDE STEPS						
2 STEP NO RAILS	19	19	A2S30*	-	30 x 19	22
3 STEP NO RAILS	28.5	28.5	A3S30	-	30 x 25	28
4 STEP NO RAILS	38	38	A4S30	-	30 x 31	35
2 STEP	19	49	A2SH30	A2SH30-TR	30 x 19	28
3 STEP	28.5	58.5	A3SH30	A3SH30-TR	30 x 25	34
4 STEP	38	68	A4SH30	A4SH30-TR	30 x 31	41
5 STEP	47.5	77.5	A5SH30	A5SH30-TR	30 x 37	49
6 STEP	57	87	A6SH30	A6SH30-TR	30 x 43	60
7 STEP	66.5	96.5	A7SH30	A7SH30-TR	30 x 49	67

*Eligible for UPS

TILT and ROLL casters add 5" to base length

20" Deep top step available

WHEELBARROW STYLE



- All welded
- 14" deep top step standard
- 10" rear rubber wheels - Great on rough surfaces
- 300 lbs. capacity
- Lightweight lift and roll wheelbarrow portability
- Built to OSHA and ANSI standards

Model shown with optional 21" deep top step and skid plates in front

STEPS INCLUDING TOP STEP	HEIGHT INCHES		18" WIDE TREAD			24" WIDE TREAD*	
	TOP STEP	OVER ALL	BASE W" X L"	MODEL #	WGT Lbs.	MODEL #	WGT Lbs.
5 STEP	50	83	30 x 47	ALWB5	42	ALWB530	50
6 STEP	60	93	30 x 53	ALWB6	50	ALWB630	60
7 STEP	70	103	30 x 60	ALWB7	58	ALWB730	70
8 STEP	80	113	36 x 66	ALWB8	66	ALWB830	80
9 STEP	90	123	36 x 72	ALWB9	74	ALWB930	90
10 STEP	100	133	36 x 78	ALWB10	82	ALWB1030	100

*Models with 24" wide treads have 36" wide base

STAINLESS STEEL LADDERS

Tilt & Roll shown with 20" deep top step

Option: Straddle base with 20" deep top step -contact us for pricing



Note: All stainless ladders are manufactured with industrial grade welds; not recommended for clean rooms.



Lockstep Ladder with perforated tread
Built to OSHA and ANSI

- Ideal for wash down and corrosive environments
- Type T304 Stainless Steel construction
- 1-3 step ladders are all welded and have 10" deep top step
- 4-12 step ladders have 14" deep top step standard
- Deeper top steps available on all models
- Bead blasted for uniform finish
- 450 lb. capacity
- Built to OSHA and ANSI standards
- CAL OSHA available



Spring loaded casters

Note: Casters and springs are not stainless steel

STEPS INCLUDING TOP STEP	HEIGHT INCHES		SPRING LOADED CASTERS	TILT & ROLL CASTERS		
	TOP STEP	OVER ALL				
16" WIDE STEPS						
1 STEP NO RAILS	12	12	SS1N*	-	18 x 20	24
2 STEP NO RAILS	19	19	SS2N*	-	20 x 19	28
3 STEP NO RAILS	28.5	28.5	SS3N*	-	20 x 25	35
2 STEP	19	49	SS220	SSTR220	20 x 19	40
3 STEP	28.5	58.5	SS320	SSTR320	20 x 25	46
4 STEP	40	73	SS420	SSTR420	20 x 38	70
5 STEP	50	83	SS520	SSTR520	20 x 44	77
6 STEP	60	93	SS624	SSTR624	24 x 50	81
7 STEP	70	103	SS724	-	24 x 56	95
24" WIDE STEPS						
2 STEP NO RAILS	19	19	SS2N30	-	30 x 19	40
3 STEP NO RAILS	28.5	28.5	SS3N30	-	30 x 25	44
2 STEP	19	49	SS230	SSTR230	30 x 19	43
3 STEP	28.5	58.5	SS330	SSTR330	30 x 25	55
4 STEP	40	73	SS430	SSTR430	30 x 38	85
5 STEP	50	83	SS530	SSTR530	30 x 44	92
6 STEP	60	93	SS630	SSTR630	30 x 50	105
7 STEP	70	103	SS730	-	30 x 56	115

TILT and ROLL casters add 5" to base length

*Eligible for UPS

AVAILABLE TREAD TYPES PLEASE SPECIFY WHEN ORDERING



(P) Perforated Step (standard) (G) Heavy Duty Serrated Grating

FOLD-N-STORE

BASE W" X L"	WGT Lbs.	MODEL #
30 x 48	82	SSFAWL-5
30 x 54	92	SSFAWL-6
30 x 60	103	SSFAWL-7
30 x 66	118	SSFAWL-8
30 x 72	133	SSFAWL-9
30 x 78	149	SSFAWL-10
30 x 84	165	SSFAWL-11
30 x 90	180	SSFAWL-12

Bead-Blasted to provide smooth uniform finish



Fold-N-Store Ladders have 16" wide steps

STAINLESS STEEL LADDERS ARE SUBJECT TO A 50% RESTOCKING CHARGE

FORK DECK MAINTENANCE PLATFORM

Turn your fork truck into a personnel lift; Safe, economical access to heights greater than those easily reached by a rolling ladder.

- Rugged steel construction
- Non-skid platform
- 42" high rails with midrails, 4" toeboards and locking gate
- Screen shields operator from fork lift mast
- Safety chain secures platform to mast
- 2" x 7" fork pockets mounted on 29" centers
- Standard 4" swivel casters on base permit easy positioning
- Safety orange powder coat finish
- Ships flat in a box for easy assembly

Model	L" X W"	Weight
FD-O-C	36" x 36"	135
FD-48-C	36" x 48"	157
FD-40-48	48" x 40"	164

OPTIONAL ACCESSORIES

Fluorescent Bulb Caddy	26
Tool Tray	14
All welded available	-

POWDER
COATED
TOUGH™

**1000 lbs
capacity**



CANTILEVER SERIES

Features:

- 300 lbs. capacity (higher capacities available - contact factory)
- 59 degree slope
- Heavy-duty 1" x 2" rectangular tube frame
- High quality 5" x 2" locking casters
- Available with Rear Guardrail removed for easy walk through
- Powder coat finish
- Ships KD to prevent freight damage and lower freight cost

**ADD PLATFORM
LENGTH TO MODEL #
WHEN ORDERING**

CANTILEVER LADDERS

MODEL					14" OVERHANG		28" OVERHANG		35" OVERHANG		42" OVERHANG	
STEPS	PLATFORM HEIGHT	VERTICAL CLEARANCE	PLATFORM WIDTH	MODEL #	WEIGHT	BASE W" x D"	WEIGHT	BASE W" x D"	WEIGHT	BASE W" x D"	WEIGHT	BASE W" x D"
6 STEP	60"	57"	24"	CL-6	468	32 x 46	735	32 x 53	763	32 x 60	791	32 x 67
7 STEP	70"	67"	24"	CL-7	442	32 x 52	695	32 x 52	773	32 x 59	801	32 x 66
8 STEP	80"	77"	24"	CL-8	412	32 x 58	640	32 x 58	779	32 x 58	807	32 x 65
9 STEP	90"	87"	24"	CL-9	405	32 x 65	583	32 x 65	697	32 x 65	811	32 x 65
10 STEP	100"	97"	24"	CL-10	401	32 x 71	554	32 x 71	668	32 x 71	757	32 x 71
11 STEP	110"	107"	24"	CL-11	405	32 x 77	544	32 x 77	633	32 x 77	722	32 x 77
12 STEP	120"	117"	24"	CL-12	409	32 x 84	537	32 x 84	601	32 x 84	690	32 x 84
13 STEP	130"	127"	24"	CL-13	417	40 x 90	520	40 x 90	609	40 x 90	673	40 x 90
14 STEP	140"	137"	24"	CL-14	450	40 x 96	528	40 x 96	592	40 x 96	656	40 x 96
15 STEP	150"	147"	24"	CL-15	458	40 x 103	536	40 x 103	600	40 x 103	664	40 x 103

Weight is a combination of the ladder and counter weight, does not include skidding, add 120 lbs for packaging.

NEW! TRUCK/DOCK ACCESS LADDER



- Great for accessing trucks or docks
- Rugged - base frame and rear vertical are 2" x 1" rectangular tubing
- 21" Deep Top Step standard
- Heavy duty serrated grating step tread
- 10" rear rubber wheels - Great on parking lots or rough surfaces
- Lightweight - lift and roll wheelbarrows portability
- 450 lbs. capacity
- Available in both 59° ladder slope or gradual 50° stairway slope
- No Rear Guardrail standard for easy walk through (includes snap chain)
- Gray powder coat finish
- Built to OSHA and ANSI standards

LADDER SLOPE 59°

MODEL #	TOP STEP HEIGHT	OVERALL HEIGHT	STEP WIDTH	BASE W" x L"	WEIGHT LBS.
TA-5-24	50"	80"	24"	32" x 53"	145
TA-5-36	50"	80"	36"	44" x 53"	170

STAIRWAY LADDER SLOPE 50 DEGREE

MODEL #	TOP STEP HEIGHT	OVERALL HEIGHT	STEP WIDTH	BASE W" x L"	WEIGHT LBS.
SW-TA-5-24	50"	80"	24"	32" x 60"	155
SW-TA-5-36	50"	80"	36"	44" x 60"	180

TANK TOP LIFT

FEATURES:

- Provides easy access to tank trucks, railroad cars or other cantilevered applications
- Great for clearing snow and ice off tops of trailers
- Manually propelled for use on hard level surfaces
- 48" long cantilevered platform
- Hydraulic hand pump raises and lowers platform
- Step and deck tread is open serrated grating, while slip resistant rungs provide access when platform is raised
- Base is 28" wide and 60" long, fixed outriggers spread 69"
- Full rails on both sides with gates at each end of platform
- Recommended Option: 30" extension railing
- Two swivel and two rigid 8" casters for use on hard surfaces
- Two adjustable stabilizing jacks secure lifts to ground
- Available with a fixed platform height
- 300 lbs. load capacity
- Standard finish deep gray enamel paint, safety orange also available

OPTIONAL ACCESSORIES


- AC electric power
- DC electric power
- Air-Hydraulic power
- Tool Tray
- Fluorescent tube holder
- Platform duplex receptacle
- Removable 30" extension railing
- Safety orange enamel paint finish

Three available power options:

- Convenient plug in 120V AC with thermal overload protection
- Independent 12V DC deep cycle system complete with battery and charger along with a double solenoid for additional safety
- Air hydraulic power requiring 90 CFM with 90 PSI pressure

Caution: Unless special provisions are made, platforms and lifts must not be used for energized barewire electrical work or operated on inclined surfaces. When this equipment is used, ground personnel should be excluded from the immediate work area. Compliance with unspecified codes should not be assumed.

Shown with options: safety orange paint & 30" extension railing

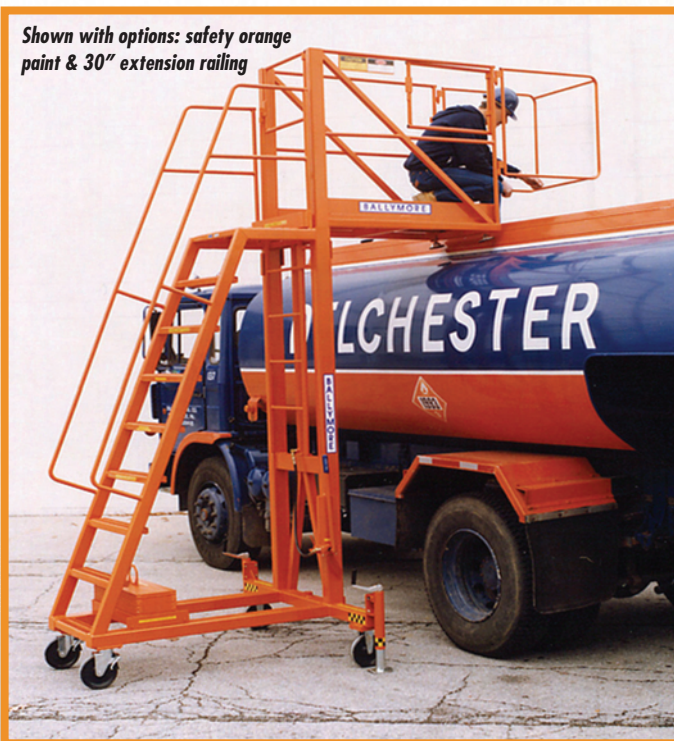

Model Number	Platform Max	Height Min	Platform Length	Platform Width	Underclearance Height	Weight Lbs.
TT-913	13' 8"	9' 4"	48"	24"	Adjustable 9' to 13'	1525
TT-913F	13' 8"	9' 4"	48"	24"	Non-Adjustable 9' to 13'	1450

SCISSOR LIFTS

FEATURES:

- Manually propelled - Rated Capacity 1000 lbs./four person
- Totally enclosed platform with 42" guardrails, midrails, 4" toeboards and swing-in gate
- Large 3' x 8' platform with serrated grating deck to assure secure footing
- Built-in ladder provides access to platform in fully lowered position
- 8" swivel casters for easy rolling and maneuverability
- Self-storing outriggers extend from base to provide maximum stability (optional on lower height models)
- Leveling jacks secure unit to floor and compensate for uneven surfaces (standard on floor models with raised deck heights above 15', optional on lower height models)
- Deep gray enamel finish
- Meets/exceeds ANSI requirements
- Platform controls: for operator safety both hands are required to change elevation
- Emergency stops:
 - Located on platform for operator use
 - Emergency stop also located on base for use by ground personnel
 - Lockable to prevent unauthorized use

WORKING HEIGHT	PLATFORM HEIGHT		STABILIZERS	SPECIFY MODEL #	WEIGHT (lbs.)
	MAX	MIN.			
13'	7'4"	2'4"	NOT REQ'D	HW1-7	1700
16'	10'1"	5'		HW1-10	1800
19'	12'10"	3'		HW2-13	2000
21'	15'8"	5'8"	STD. EQUIP.	HW2-16*	2100
24'	18'8"	3'7"		HW3-19*	2300
27'	21'4"	6'4"		HW3-22**	2400
30'	24'4"	4'1"		HW4-24**	2700
33'	27'	6'8"		HW4-27**	2800

NOTE: All base dimensions are 9 by 4 ft.

*Add 20" to 4-ft base width for extended stabilizers

** Add 40" to 4-ft base width for extended stabilizers

Lift shown with optional cantilevered platform extension



STANDARD FEATURES:

- 120 volt AC power (raise and lower) with thermal overload protection

OPTIONAL POWER:

- 12 volt DC deep cycle system available with battery and charger
- Air-Hydraulic Drive - recommended for hazardous environments
- CAUTION:

- Unless special provisions are made, platforms and lifts must not be used for energized bare-wire electrical work or operated on inclined surfaces
- When this equipment is used, ground personnel should be excluded from the immediate work area

OPTIONS/ACCESSORIES:

- Cantilevered platform extensions
- Special voltage electrical systems
- 120 volt outlet on platform
- Safety orange paint

Custom Designs:

- Available to meet your special access problems - contact factory for quotation

BALLYLIFTS

Features:

- Manually propelled one worker lift with 300 lbs. rated capacity
- Totally enclosed platform with 42" guardrails, midrails, and gate; 4" toeboards and skid resistant mat
- Two platform styles available:
 - Standard platform with steel deck (BL-315)
 - Cantilevered platform with aluminum deck (BL-C14)
- Built-in ladder with flat, skid resistant treads and grab rails provides access to platform in fully lowered position while anti-skid rungs provide access to platform when platform is raised
- Compact base frame rolls on two swivel and two rigid 6" casters
- Rails fold down for doorway passage and easy storage
- Base is 32" wide by 65" long, outriggers extend to 68" wide
- Leveling jacks secure lift to the floor
- Hydraulic hand pump provides easy lifting
- Standard finish is deep gray enamel paint
- Meets/exceeds ANSI safety standards

	Model Number	Platform Max	Platform Min	Platform Length	Platform Width	Weight Lbs.	Working Height
Standard	BL-315	15'	6' 4"	20"	28"	590	21'
Cantilevered	BL-C14	14'	6' 4"	64"	20"	900	20'


OPTIONAL ACCESSORIES

AC electric power	Tool Tray
DC electric power	Fluorescent tube holder
Air-Hydraulic power	Platform duplex receptacle



Model BL-315

**Manually
Propelled**



**Cantilevered
Model BL-C14**




Rolls thru
standard doorway

MR TELESCOPING HYDRAULIC MAINTENANCE LIFTS

Features:

- Rated capacity 500 lbs./two person manually propelled
- Select from maximum platform heights of 15', 19', 24' or 28'
- Roomy 28" x 36" platform accommodates two workers
- Totally enclosed platform with 42" guard rails, midrails and gate; 4" toeboards and non-slip deck
- Built-in ladder with flat, skid resistant treads and grab rails provides access to platform in fully lowered position
- Rails fold for doorway passage and easy storage
- Non-marking 8" casters for easy rolling and maneuverability
- Self-storing outriggers extend from base to provide maximum stability
- Leveling jacks secure unit to floor and compensate for uneven surfaces
- Standard deep gray enamel finish
- Meets/exceeds ANSI safety standards

Model Number	Platform Max	Height Min	Working Height	Weight Lbs.
MR-15-AC	15'	6' 4"	21'	800
MR-15-DC	15'	6' 4"	21'	930
MR-20-AC	19' 3"	6' 4"	25'	1000
MR-20-DC	19' 3"	6' 4"	25'	1130
MR-24-AC	23' 8"	6' 7"	30'	1200
MR-24-DC	23' 8"	6' 7"	30'	1330
MR-28-AC	28'	6' 10"	34'	1420
MR-28-DC	28'	6' 10"	34'	1550

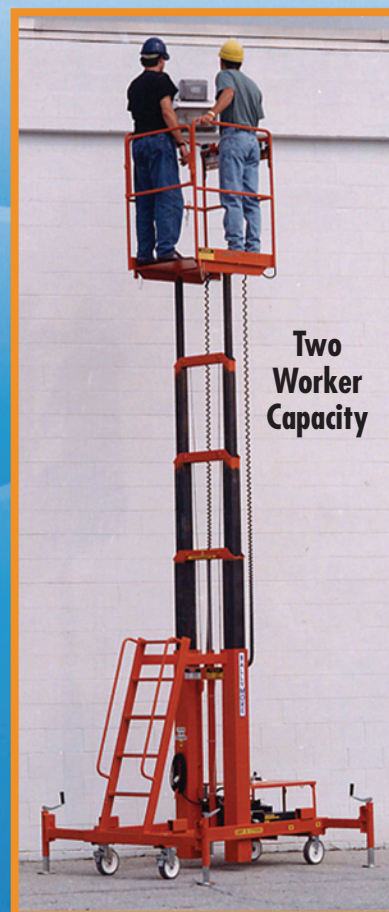

**Two
Worker
Capacity**



Rolls thru
standard doorway

**500 lbs.
Capacity**

- Three available power options
- Convenient plug in 120V AC
- Independent 12V DC deep cycle system complete with battery and charger
- Air hydraulic power requiring 140 CFM with 90 PSI pressure

OPTIONAL ACCESSORIES

Air-Hydraulic power
Tool Tray
Safety Orange Finish
Fluorescent tube holder
Platform duplex receptacle

Features:

- Ground Entry - Manually Propelled - Hydraulic Order Picker
- No outriggers required, floor locks secure in place for models PS-10, PS-11 AND PS-12
- Model PS-15 requires outriggers
- 450 pound total capacity (operator and inventory)
- 12 volt DC power with mounted charger included – Recharge using a standard 110 volt outlet
- High quality controls requires both hands to operate for user safety
- 80 to 100 raise and lower cycles between charges
- Key lock prevents unauthorized use
- Removable guardrails beside stock platform for easy loading and unloading
- Meets/exceeds ANSI safety standards

**Ideal for the shop
or retail floor!**

MODEL #	WORKING HEIGHT	PLATFORM MAX	PLATFORM MIN	FOOTPRINT W" x L"	OVERALL HEIGHT (LOWERED)	POWER	WEIGHT LBS.
PS-10	14'	8'2"	10"	30" x 50"	69"	12V DC	660
PS-11	16'	10'2"	10"	33" x 50"	84"	12V DC	750
PS-12	17'	11'8"	11"	36" x 50"	83"	12V DC	900
PS-15*	20'	14'8"	17"	34" x 50"	80"	12V DC	950



PS-15



PS-10

MAINTENANCE LIFT

Features:

- Manually propelled one person lift with 300 lbs. capacity
- Totally enclosed 26" x 28" platform with 42" guardrails, midrails and gate
- Welded compact base 32" x 63" allows lift to pass through doorways
- **No outriggers required**
- Rolls effortlessly on two locking swivel and two rigid 6" casters
- Both hands are required to operate controls for user safety
- 12V DC power source complete with battery and charger for raising and lowering, alternate power sources available
- 80 to 100 raise and lower cycles between charges
- 2 models to choose from:
 - **Ground Entry (OP-10*)** - raises to 9'6" and contains two 24" x 24" shelves on base *Shelf that raises and lowers with the platform not available
 - **One Step Entry (OP-11)** - raises to 10'6" and contains two 18" x 24" shelves on base and a 20" x 28" shelf that raises and lowers with the platform
- Standard finish is deep gray enamel paint.
- Meets/exceeds ANSI safety standards

Electrical Note: (on all lift products)


Our standard electrical components are NEMA 1, or equivalent and are intended for indoor use in normal atmospheric conditions.

Model Number	Platform Max	Platform Min	Working Height	Platform Length	Platform Width	Weight Lbs.
OP-10	9' 6"	12"	15'	26"	28"	710
OP-11	10' 6"	23"	16'	26"	28"	730

Ships at freight class 125



Model OP-10
* Shelf that raises not available

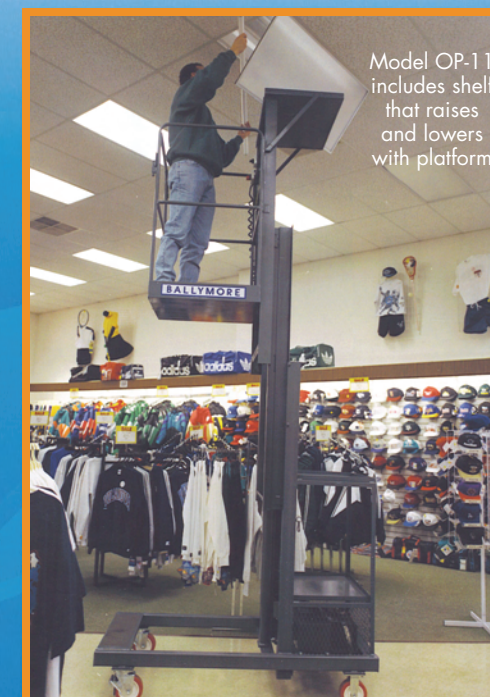

Model OP-11
includes shelf
that raises
and lowers
with platform

INDUSTRIAL CROSSOVERS

Stair Sections (Set of 2) for Industrial Crossovers 2 to 7 Steps... with choice of widths

NO. OF STEPS EACH SECTION	VERTICAL CLEARANCE INCHES	27" OVERALL WIDTH (EXPANDED METAL)		31 1/2" OVERALL WIDTH (SERRATED GRATING)		38 1/2" OVERALL WIDTH (SERRATED GRATING)	
		MODEL#	WEIGHT	MODEL#	WEIGHT	MODEL#	WEIGHT
2 STEPS	28	CS227	253	CS231	254	CS238	276
3 STEPS	38	CS327	310	CS331	325	CS338	351
4 STEPS	48	CS427	378	CS431	393	CS438	428
5 STEPS	58	CS527	445	CS531	465	CS538	505
6 STEPS	68	CS627	517	CS631	537	CS638	583
7 STEPS	78	CS727	600	CS731	630	CS738	680



*Complete model designation includes suffix from "Bridge Sections" table. (i.e., CS327-CB227).

Bridge Sections for Industrial Crossovers

Combine any length with appropriate width stair sections

LENGTH IN INCHES	HORIZONTAL CLEARANCE INCHES	27" OVERALL WIDTH (EXPANDED METAL)		31 1/2" OVERALL WIDTH (SERRATED GRATING)		38 1/2" OVERALL WIDTH (SERRATED GRATING)	
		MODEL#	WEIGHT	MODEL#	WEIGHT	MODEL#	WEIGHT
20	18	-CS227	88	-CS231	95	-CS238	102
30	28	-CS327	111	-CS331	120	-CS338	128
40	38	-CS427	133	-CS431	140	-CS438	153
50	48	-CS527	156	-CS531	165	-CS538	180
60	58	-CS627	195	-CS631	203	-CS638	220

*Complete model designation includes prefix, indication a pair of stair sections from "Stair Sections" table.

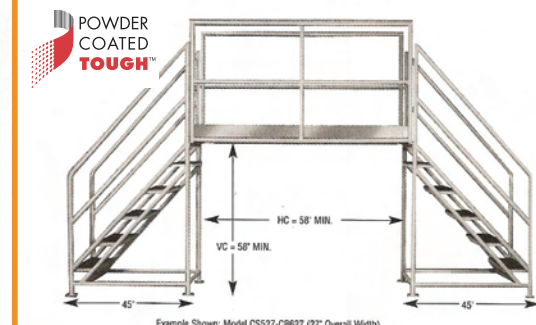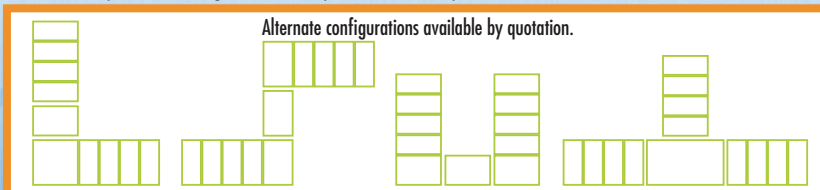

Features:

- Supplied in three pieces: two stair sections and one bridge
- Structural frame and rails are heavy 1 1/4" schedule 40 pipe
- Standard step and bridge tread: expanded metal or serrated grating (Optional solid steel tread with abrasive mat on bridge is available to avoid debris falling onto conveyors)
- Full rails, midrails and toeboards
- Stairway slope allows forward facing descent
- Stair sections have 10" step spacing with 9" of horizontal run per step
- Each stair section has four legs with large, pre-drilled plates to bolt to the floor
- Also available in alternate configurations: U-Shape, Z-Shape, L-Shape, etc.
- Gray powder coat finish
- Rated capacity 800 lbs.
- Maximum use of limited floor space while complying to OSHA requirements

MINI SCISSOR LIFT

Features:


- 500 lb capacity
- Provides working heights to 14'
- Maximum raised platform height of 8' 2"
- Platform height (fully lowered) - 21"
- Platform length - 39"
- Platform width - 24"
- Base size - 45" x 28"
- Shipping dimensions - 45" x 28" x 30" (plus pallet)
- 12 volt DC powered
- Easy to roll, total weight 635 lbs.
- Meets/exceeds ANSI safety standards

**SHIPS KD
FOR REDUCED
SHIPPING COSTS**



MODEL #	WORKING HEIGHT	PLATFORM MAX	PLATFORM MIN	FOOTPRINT W"x L"	OVERALL HEIGHT
MSL-8	14"	8'2"	21"	28" x 45"	64"

CUSTOM VERTICAL ACCESS AIRCRAFT MAINTENANCE PLATFORMS

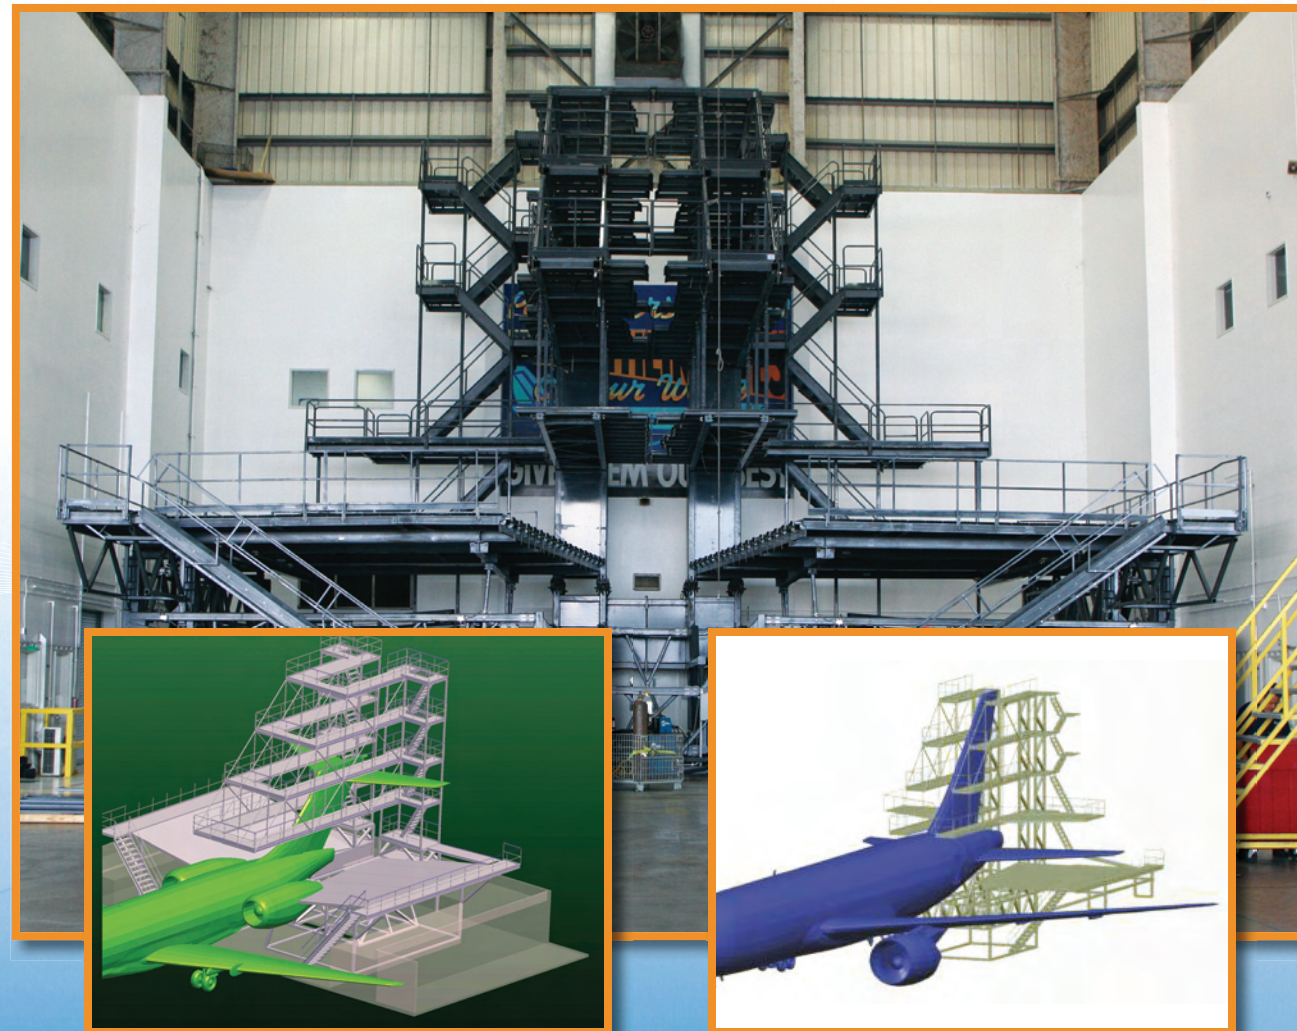

INDUSTRIAL WORK PLATFORMS



**CALL BALLYMORE FOR ALL
YOUR CUSTOM VERTICAL ACCESS REQUIREMENTS
NO JOB TOO BIG OR TOO SMALL**