


BENNING

World Class Power Solutions

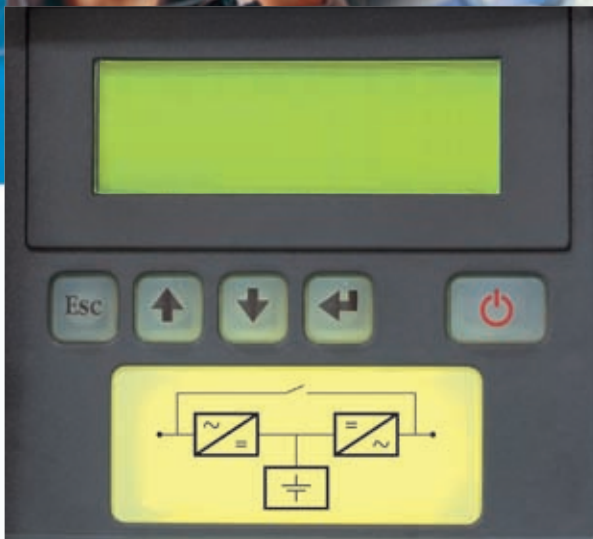

UPS ENERTRONIC S

Uninterruptible Power Supply
for AC-Loads





ENERTRONIC S

powerful, compact and cost efficiency

General remarks

The increasing use of information and data processing systems as well as computer-controlled automation systems requires a reliable uninterrupted power supply.

The ENERTRONIC S series ensures that voltage peaks, voltage distortions and voltage drops in the public mains have no effect on critical loads.



Fig. 1: Possible Irregularities



Fig. 2: ENERTRONIC S 5 kVA

Construction

The modular construction and redundancy are two features of the ENERTRONIC S series. Depending on the required power and the mains failure bypass time, the systems can be individually adapted to the load. As power demands increase, the system can be expanded.

The systems consist of 1,25 kVA power blocks which can be connected in parallel up to a max. output power of 10 kVA. In the event of one power block failing, the defective power block will be separated and the other blocks will continue operating without interruption. N+1 redundancy is therefore possible within the UPS systems. The complete redundancy of all electronic components on the power boards ensures maximum reliability of the UPS system.

In the standard version, each power block has a 36 V 7.2 Ah battery block. With a nominal load of 80% it is therefore possible to obtain a mains failure bypass time of 10 min. To obtain longer bypass times, it is possible to connect several battery blocks per UPS power block in parallel.

The systems are available in two different mechanical versions. Up to 5 kVA, both the UPS power blocks and the battery blocks for 10 min. are installed in one housing (see figure 2).

Systems from 6,25 to 10 kVA require separate electronic and battery housings (see figure 3).

Longer bypass times normally require additional battery housings.

In the standard version, the recharge time of the battery is approx. 6 hours. With longer bypass times, the battery charging time is correspondingly longer.

In such cases, it is possible to install one or several additional charging units with 8 A charging current to reduce the charging time.

ENERTRONIC S

1,25 kVA – 10 kVA

Type table

Output voltage [kVA]	Type	Battery for minutes	Dimensions H x W x D [mm]	Efficiency [%]
1,25	ENERTRONIC S 1-1-1,25-10	10	480 x 270 x 560	90,0
1,25	ENERTRONIC S 1-1-1,25-20	20	480 x 270 x 560	90,0
1,25	ENERTRONIC S 1-1-1,25-30	30	480 x 270 x 560	90,0
1,25	ENERTRONIC S 1-1-1,25-60	60	480 x (2 x 270) x 560	90,0
1,25	ENERTRONIC S 1-1-1,25-120	120	480 x (2 x 270) x 560	90,0
2,5	ENERTRONIC S 1-1-2,5-10	10	480 x 270 x 560	90,0
2,5	ENERTRONIC S 1-1-2,5-20	20	480 x 270 x 560	90,0
2,5	ENERTRONIC S 1-1-2,5-30	30	480x (2 x 270) x 560	90,0
2,5	ENERTRONIC S 1-1-2,5-60	60	480 x (2 x 270) x 560	90,0
2,5	ENERTRONIC S 1-1-2,5-120	120	480 x (3 x 270) x 560	90,0
3,75	ENERTRONIC S 1-1-3,75-10	10	480 x 270 x 560	90,0
3,75	ENERTRONIC S 1-1-3,75-20	20	480 x (2 x 270) x 560	90,0
3,75	ENERTRONIC S 1-1-3,75-30	30	480 x (2 x 270) x 560	90,0
3,75	ENERTRONIC S 1-1-3,75-60	60	480 x (2 x 270) x 560	90,0
3,75	ENERTRONIC S 1-1-3,75-120	120	480 x (3 x 270) x 560	90,0
5,0	ENERTRONIC S 1-1-5,0-10	10	480 x 270 x 560	90,0
5,0	ENERTRONIC S 1-1-5,0-20	20	480 x (2 x 270) x 560	90,0
5,0	ENERTRONIC S 1-1-5,0-30	30	480 x (2 x 270) x 560	90,0
5,0	ENERTRONIC S 1-1-5,0-60	60	480 x (3 x 270) x 560	90,0
5,0	ENERTRONIC S 1-1-5,0-120	120	480 x (4 x 270) x 560	90,0
6,25	ENERTRONIC S 1-1-6,25-10	10	480 x (2 x 270) x 560	90,0
6,25	ENERTRONIC S 1-1-6,25-20	20	480 x (2 x 270) x 560	90,0
6,25	ENERTRONIC S 1-1-6,25-30	30	480 x (3 x 270) x 560	90,0
6,25	ENERTRONIC S 1-1-6,25-60	60	480 x (4 x 270) x 560	90,0
6,25	ENERTRONIC S 1-1-6,25-120	120	480 x (5 x 270) x 560	90,0
7,5	ENERTRONIC S 1-1-7,5-10	10	480 x (2 x 270) x 560	90,0
7,5	ENERTRONIC S 1-1-7,5-20	20	480 x (3 x 270) x 560	90,0
7,5	ENERTRONIC S 1-1-7,5-30	30	480 x (3 x 270) x 560	90,0
7,5	ENERTRONIC S 1-1-7,5-60	60	480 x (4 x 270) x 560	90,0
7,5	ENERTRONIC S 1-1-7,5-120	120	480 x (6 x 270) x 560	90,0
8,75	ENERTRONIC S 1-1-8,75-10	10	480 x (2 x 270) x 560	90,0
8,75	ENERTRONIC S 1-1-8,75-20	20	480 x (3 x 270) x 560	90,0
8,75	ENERTRONIC S 1-1-8,75-30	30	480 x (3 x 270) x 560	90,0
8,75	ENERTRONIC S 1-1-8,75-60	60	480 x (5 x 270) x 560	90,0
8,75	ENERTRONIC S 1-1-8,75-120	120	480 x (7 x 270) x 560	90,0
10	ENERTRONIC S 1-1-10-10	10	480 x (2 x 270) x 560	90,0
10	ENERTRONIC S 1-1-10-20	20	480 x (3 x 270) x 560	90,0
10	ENERTRONIC S 1-1-10-30	30	480 x (3 x 270) x 560	90,0
10	ENERTRONIC S 1-1-10-60	60	480 x (5 x 270) x 560	90,0
10	ENERTRONIC S 1-1-10-120	120	480 x (8 x 270) x 560	90,0

Specifications are subject to change without notice.



ENERTRONIC S

technical specifications

Technical Data

		1,25 kVA	2,5 kVA	3,75 kVA	5 kVA	6,25 kVA	7,5 kVA	8,75 kVA	10 kVA
Typ.		Online system with double conversion							
Voltage form		sinusoidal							
Output power	[VA]	1250	2500	3750	5000	6250	7500	8750	10000
Active power	[W]	875	1750	2625	3500	4375	5250	6125	7000
Input voltage		230 V single phase							
Input voltage range		184 - 264 V at 100 % load 110 - 264 V at 50 % load							
Input frequency		50/60 Hz $\pm$ 2 % auto sense							
Power factor		> 0,99 already at 20 % load							
Output voltage		230 V $\pm$ 1 %							
Output frequency		50/60 Hz synchronised 50/60 Hz $\pm$ 0,1 % quartz synchronised							
Power factor load		0,7							
Back-up time									
at 80 % Load	[min]	10							
at 50 % Load	[min]	20							
Batteries		3 x 12 V 7,2 Ah sealed maintenance free lead acid battery per power board							
Dimensions (H x W x D)	[mm]	475 x 270 x 570				475 x (2 x 270) x 570			
Weight	[kg]	23,5	34	43	53	26,5 + 57,5	29 + 65	31,5 + 72,5	34 + 80
Protection		IP 21							
EMC		EN 50091-2							

Display

Displayed values:

- Input voltage and input current, power, frequency
- Output voltage and output current, power, frequency
- Battery operating data, remaining time
- Total UPS operating time
- Battery test by means of charge state monitoring



Fig. 3: ENERTRONIC S 10 kVA

Fig. 4:
Display



Other features

- Input power factor > 0,99
- THDI < 3 %
- Static bypass
- Class A/B (immunity/emission)
- Input frequency auto sense
- Plug&Play for gensets
- Noise level < 40 dBA
- Long life battery control


ENERTRONIC S

diagnosis and monitoring

Features



Ideal sine output

using double conversion and online operation (VFI SS 111)

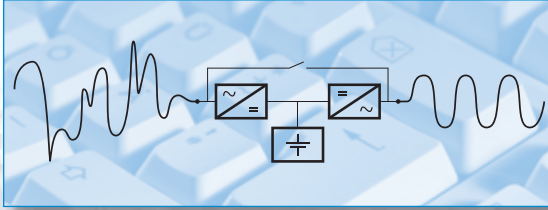


Sinusoidal current consumption (PFC)

according to European standards

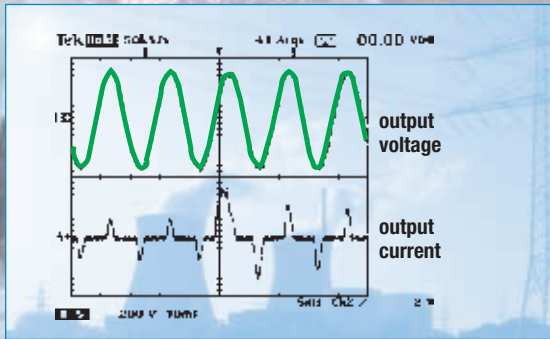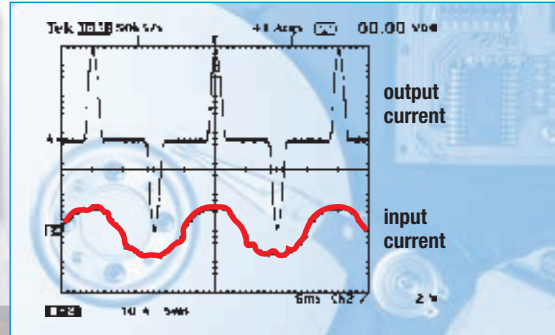

High short circuit current

150 % for 30 sec., 200 % for 5 sec.

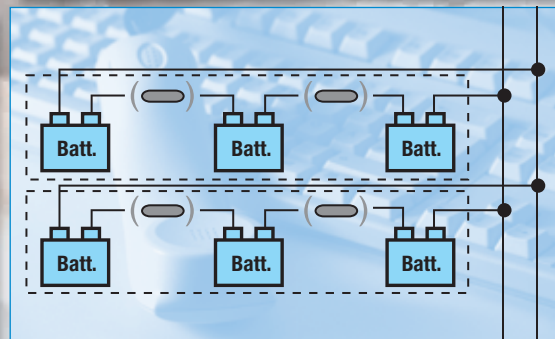

Battery redundancy

with battery blocks connected in parallel

Options

- External manual bypass
- Relay board with three relays
- Remote display



Settings:

- Selection of input and output frequency 50/60 Hz
- Output voltage setting
- Max. battery operating time at battery low voltage
- Bypass settings
- Operating mode online - offline
- Starting operation
- Automatic start after mains return
- Automatic battery test
- Operation with an emergency generator
- Switch-off of the acoustic signal
- Reset of the monitored limiting values
- Redundancy N+X

Shutdown software

The Shutdown Software UPS Management is designed for a controlled shut down of running PC operations before the battery is discharged and the system switches off because of

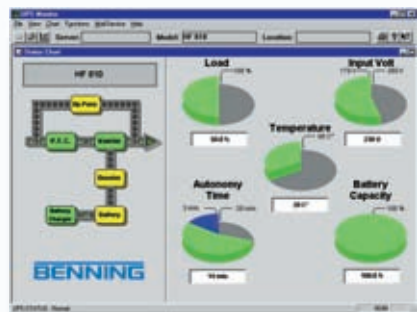


Fig. 5:
Monitoring
software

low battery voltage. It is able to operate with most common operating systems such as Windows, Novell, Linux and Unix. As it is able to manage not only the server but also the clients in one network, this software is the ideal network manager. It monitors the most important UPS parameters (input voltage, used capacity in %, battery capacity and available bypass time), gives a warning to all the users of the network and switches the UPS on and off.


www.benning.de
BENNING worldwide
Austria

Benning GmbH Elektrotechnik und Elektronik
Eduard-Klinger-Str. 9
A-3423 St. Andrä-Wördern
Tel. 0 22 42 / 3 24 16-0
Fax 0 22 42 / 3 24 23
E-Mail: info@benning.at

Belarus

IOOO BENNING Belarus
ul. Derzinskogo, 50
BY-224030, Brest
Tel. 0162 / 22 07 21
Fax 0162 / 22 07 21
E-Mail: info@benning.brest.by

Belgium

Benning Belgium
Power Electronics
Z. 2 Essenestraat 16
B-1740 Ternat
Tel. 02 / 58 287 85
Fax 02 / 58 287 69
E-Mail: info@benning.be

Croatia

Benning Zagreb d.o.o.
Trnjanska 61
HR-10000 Zagreb
Tel. 1 / 63 12 280
Fax 1 / 63 12 289
E-Mail: info@benning.hr

Czech Republic

Benning CR s.r.o.
Zahradní ul. 894
CZ-293 06 Kosmonosy
(Mladá Boleslav)
Tel. 3 26 72 10 03
Fax 3 26 72 25 33
E-Mail: benning@benning.cz

France

Benning Conversion d'énergie
43, avenue Winston Churchill
B.P. 418
F-27404 Louviers Cedex
Tél. 0 2.32.25.23.94
Fax 0 2.32.25.08.64
E-Mail: info@benning.fr

Germany

Benning Elektrotechnik und Elektronik
GmbH & Co.KG
Factory I: Münsterstr. 135-137
Factory II: Robert-Bosch-Str. 20
D-46397 Bocholt
Tel. 0 28 71 / 93-0
Fax 0 28 71 / 9 32 97
E-Mail: info@benning.de

Great-Britain

Benning Power Electronics (UK) Ltd.
Oakley House
Hogwood Lane
Finchampstead
GB-Berkshire
RG 40 4QW
Tel. 0118 9731506
Fax 0118 9731508
E-Mail: info@benninguk.com

Hungary

Benning Kft.
Power Electronics
Rákóczi út 145
H-2541 Lábhatlan
Tel. 033 / 50 76 00
Fax 033 / 50 76 01
E-Mail: benning@vnet.hu

Italy

Benning Conversione di Energia S.r.L.
Via 2 Giugno 1946, 8/B
I-40033 Casalecchio di Reno (BO)
Tel. 0 51 / 75 88 00
Fax 0 51 / 61 67 655
E-Mail: info@benningitalia.com

Netherlands

Benning NL
Power Electronics
Peppelkade 42
NL-3992 AK Houten
Tel. 0 30 / 6 34 60 10
Fax 0 30 / 6 34 60 20
E-Mail: info@benning.nl

Poland

Benning Power Electronics Sp. z o.o.
Korczunkowa 30
PL-05-503 Głusków
Tel. 0 22 / 7 57 84 53
Fax 0 22 / 7 57 84 52
E-Mail: biuro@benning.biz

P. R. China

Benning Power Electronics (Beijing) Co., Ltd.
Tongzhou Industrial Development Zone
1-B BeiEr Street
CN-101113 Beijing
Tel. 010 61568588
Fax 010 61506200
E-Mail: info@benning.cn

Russian Federation

OOO Benning Power Electronics
Moscow region
Domodedovskiy district
Domodedovo, Severnyy zone
Tel. 4 95 / 9 67 68 50
Fax 4 95 / 9 67 68 51
E-Mail: benning@benning.ru

Slovakia

Benning Slovensko, s.r.o.
Kukuríčná 17
SK-83103 Bratislava
Tel. 02 / 44459942
Fax 02 / 44455005
E-Mail: benning@benning.sk

South America

Benning Office South America
Lavalle 637
AR-1876 Bernal, Buenos Aires
Argentina
Tel. 54 / 911 5498 2515
E-Mail: info-argentina@benning.es

South East Asia

Benning Power Electronics Pte Ltd
85, Defu Lane 10
#05-00
SGP-Singapore 539218
Tel. (65) 6844 3133
Fax (65) 6844 3279
E-Mail: sales@benning.com.sg

Sweden

Benning Sweden AB
Box 990, Hovslagarev. 3B
S-19129 Sollentuna
Tel. 08 / 6239500
Fax 08 / 969772
E-Mail: power@benning.se

Switzerland

Benning Power Electronics GmbH
Industriestrasse 6
CH-8305 Dietlikon
Tel. 044 / 8057575
Fax 044 / 8057580
E-Mail: info@benning.ch

Spain


Benning Conversión de Energía S.A.
C/Pico de Santa Catalina 2
Pol. Ind. Los Linares
E-28970 Humanes, Madrid
Tel. 91 / 6048110
Fax 91 / 6048402
E-Mail: benning@benning.es

Ukraine

Benning Power Electronics
3 Sim'yi Sosninykh str.
UA-03148 Kyiv
Tel. 044 / 501 40 45
Fax 044 / 273 57 49
E-Mail: info@benning.ua

U.S.A.

Benning Power Electronics, Inc.
11120 Grader Street
USA-Dallas, TX 75238
Tel. 214 5531444
Fax 214 5531355
E-Mail: sales@benning.us

**ISO
9001**
**ISO
14001**
SCC

BENNING