
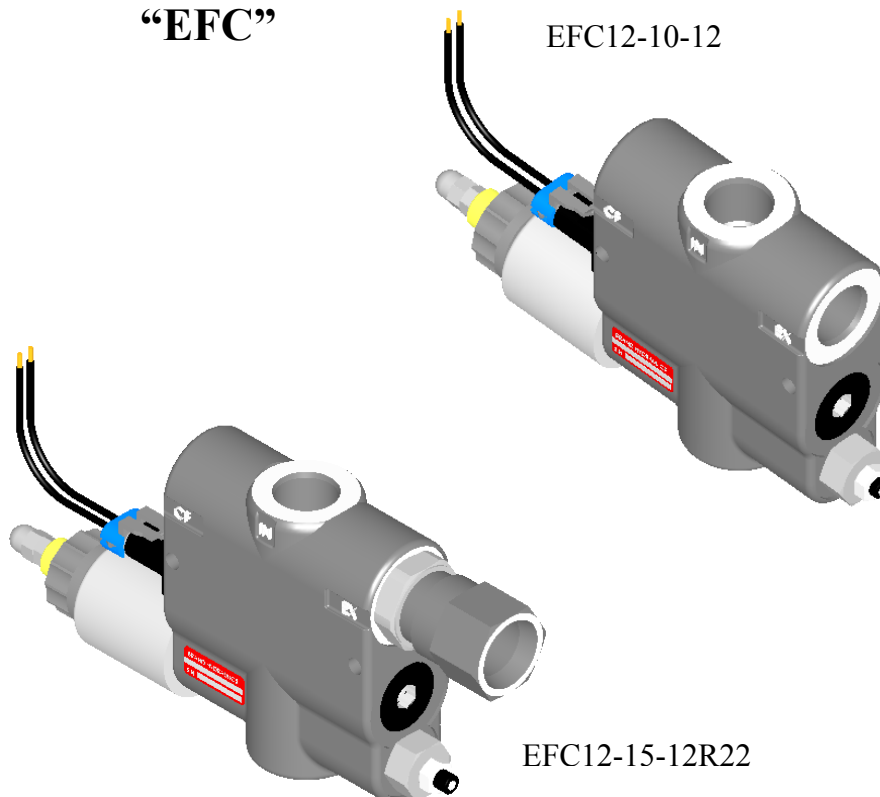
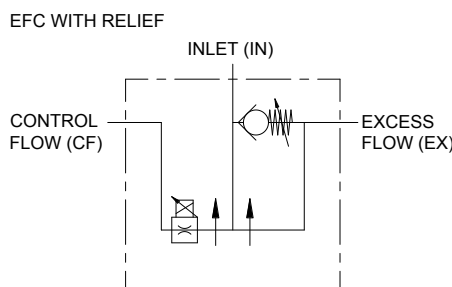


ELECTRONICALLY ADJUSTABLE PROPORTIONAL PRESSURE COMPENSATED FLOW CONTROL

“EFC”

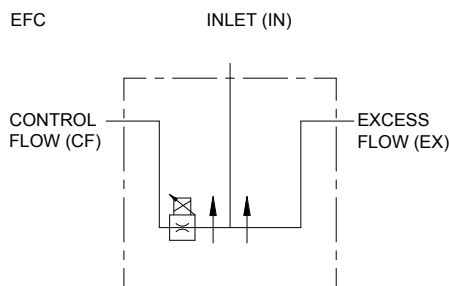

FEATURES:

- **DIAMOND HONED SPOOL BORE** provides consistent spool fit with low leakage.
- **O’RING PORTS** to eliminate leakage.
- **EVERY EFC IS TESTED** for shutoff, linearity, max. flow, crack open and pressure compensation.
- **STANDARD 3-PORT** allows for pressure compensated flow out of the CF and EX ports.
- **MANUAL OVERRIDE** when electrical power is lost.
- **OPTIONAL 2-PORT** allows for pressure compensated flow out of CF port.
- **OPTIONAL FREE REVERSE FLOW** allows fluid to move from the CF port to the inlet.
- **OPTIONAL HIGH LIFT RELIEF.**

SPECIFICATIONS:

- See flow chart for capacity.
- 3000 psi (207 bar) rating.
- Weighs 8-1/2 lbs. (3.9 kg).
- Standard Port size #12SAE (1-1/16 – 12).
- 10-Micron Filtration Recommended.
- Pulse Frequency (90 to 115 hz).
- Coil
 - 12 VDC standard (24 VDC).
 - 9.6 ohms (48 ohms).
 - 15 watts (15 watts).
 - 1.0 amp max (0.5 amp max.).

- **Response Time**
 - 0.035” Standard dash pot (375 ms).
 - 0.020” Dash pot (900 ms).
 - 0.093 Dash pot (175 ms to 350 ms depending on flow).
- **Spool leakage** (3.05 in³/min. @ 1000 psi ((50 ml/min. @ 68.9 bar) on EX port).

MATERIALS:

- Ductile Cast Iron Body
- Heat Treated Steel Spools
- Buna N O’Rings
- Heat Treated Free Reverse Check Seat

EFC – GENERAL INFORMATION

The Brand, electronically adjustable proportional pressure compensated flow control is an electronically controlled version of the original FC51 style flow control valve. The EFC performance as a flow control is very similar to the FC51 because they both use the same spring and compensator spool. Thus, the control flow port (CF) and the excess flow port (EX) remain usable and pressure compensated.

The main advantage of the EFC over the FC51 is that the flow can be adjusted proportionally with a solenoid instead of manually. As the current to the solenoid increases the variable orifice moves proportionally similar to positioning the rotary side lever on the manual FC's. The solenoid is connected to our EC – series controls which can be sold with the EFC. We also give the choice of a dashpot size, which allows the customer to select a valve that responds to the control box at different rates. Other options are 2-port, free reverse flow and high lift ball spring relief.

2-PORT- The 2-port (2P) option is a modified version of the standard 3-port EFC. This option lets the customer use the control flow port while the excess port is plugged. A special compensator spool was designed to eliminate hunting that can occur between pressure compensated valves and pumps. To use the EFC 2-port a pressure compensated pump is required. The 2-port can be converted to a 3-port (by removing the EX plug), but it will not have the same characteristics as the standard 3-port. (See chart on next page for 2-port EFC)

FREE REVERSE FLOW- The free reverse flow option was designed to be used primarily where cylinders and motors are needed to go in reverse. The flow can only go in reverse from controlled flow (CF) to the inlet (IN). Flow is not metered when it goes in reverse. The steel ball seat inside the compensator spool is heat treated to assure a long life.

HIGH LIFT BALL SPRING RELIEF – The high lift ball spring relief (R) reduces plumbing and provides relief protection. Once the pressure on the inlet port increases above the relief setting the relief valve opens and diverts flow to the EX port while maintaining pressure on the IN port. The EX port must be plumbed back to tank for this relief to work. This relief does not chatter and the cracking pressure from low to high flow is virtually the same. The relief is easily adjustable by simply loosening the lock nut and turning the adjusting fitting. (See relief chart on next page)

EFC – EXAMPLES OF COMMON MODEL CODES:

EFC12-10-12	10 gpm (37.9 lpm) 3-port with 12 volt coil
EFC12-15-12R15	15 gpm (56.8 lpm) 3-port, 12 volt coil with 1500 psi (103.4 bar) relief
EFC12-10-122P	10 gpm (37.9 lpm) 2-port with 12 volt coil
CEP1000	10 gpm (37.9 lpm) 3-port with EC-12-01 control

EFC – CREATING A MODEL CODE FOR EFC'S:

E F C	
REVERSE FLOW: C – Free reverse flow Omit – No reverse flow	OPTIONS: 2P – 2 port R15 – Relief set at 1500 psi (103.4 bar) (specify pressure in 100 psi increments)* .093 – 0.093 dashpot orifice .020 – 0.020 dashpot orifice
PORT SIZE: 12 - #12SAE (1-1/16 – 12) ** - Contact factory for others	COIL VOLTAGE & TERMINAL: 12 – 12 volt DC 24 – 24 volt DC PF – Weather pack, female shroud with male pin PM – Weather pack, male tower with female pin
FLOW SETTING: 05 – 0-5 gpm (18.9 lpm) 10 – 0-10 gpm (37.8 lpm) 15 – 0-15 gpm (56.8 lpm) 20 – 0-20 gpm (75.7 lpm) 25 – 0-25 gpm (94.6 lpm)* 30 – 0-30 gpm (113.6 lpm)*	

* - 3 port only

EFC WITH ELECTRONIC CONTROL:

C E P 0 0

REVERSE FLOW:

C – Free reverse flow
Omit – No reverse flow

CONTROLS:

D – EC-12-02 (Dashmount)
Omit – EC -12-01 (Weather proof box)

FLOW SETTING:

05 – 0-5 gpm (18.9 lpm)
10 – 0-10 gpm (37.8 lpm)
15 – 0-15 gpm (56.8 lpm)
20 – 0-20 gpm (75.7 lpm)
25 – 0-25 gpm (94.6 lpm)*
30 – 0-30 gpm (113.6 lpm)*

OPTIONS:


2P – 2 port
R15 – Relief set at 1500 psi (103.4 bar)
(specify pressure in 100 psi increments)*
.093 – 0.093 dashpot orifice
.020 – 0.020 dashpot orifice
Omit – No options

* - 3 port only

EFC FLOW & SOLENOID CURRENT INFO FOR 2-PORT AND 3-PORT:


Flow vs. Solenoid Current for EFC 3-Port

Oil Temp = 100 deg. F w/ 140 - 147 SUS Oil

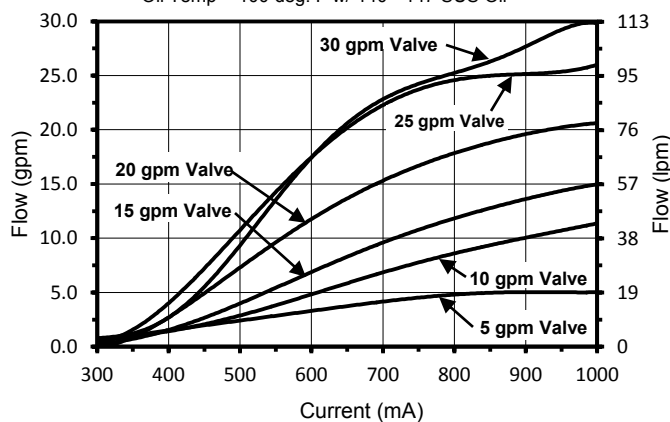


Flow vs. Solenoid Current for EFC 2-Port

Oil Temp = 100 deg. F w/ 140 - 147 SUS Oil

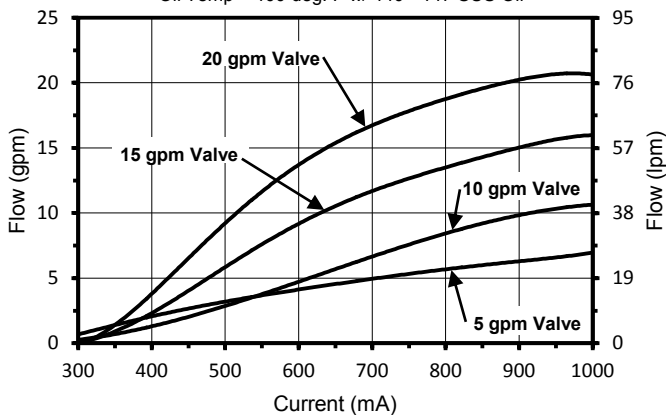


Pressure Drop vs. Flow for EFC Series

Flow (lpm)

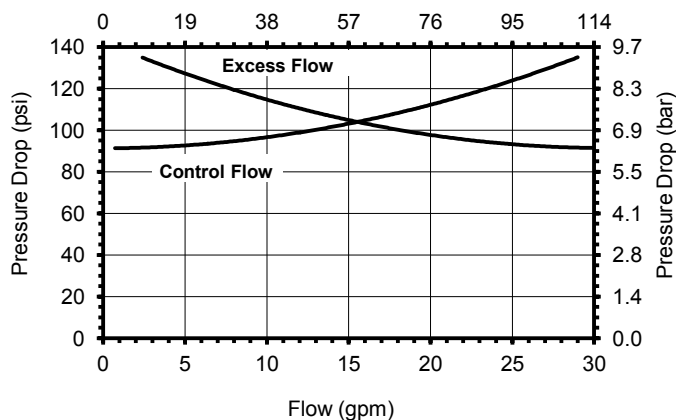


Pressure vs. Flow for EFC with Relief

Flow (lpm)

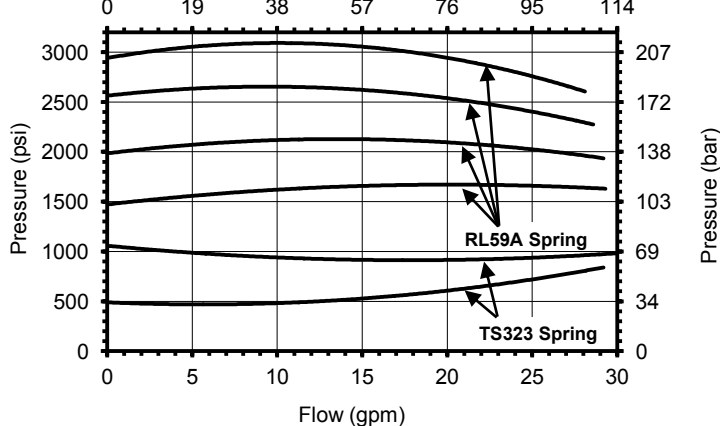

2 & 3 PORT SCHEMATIC DRAWING:

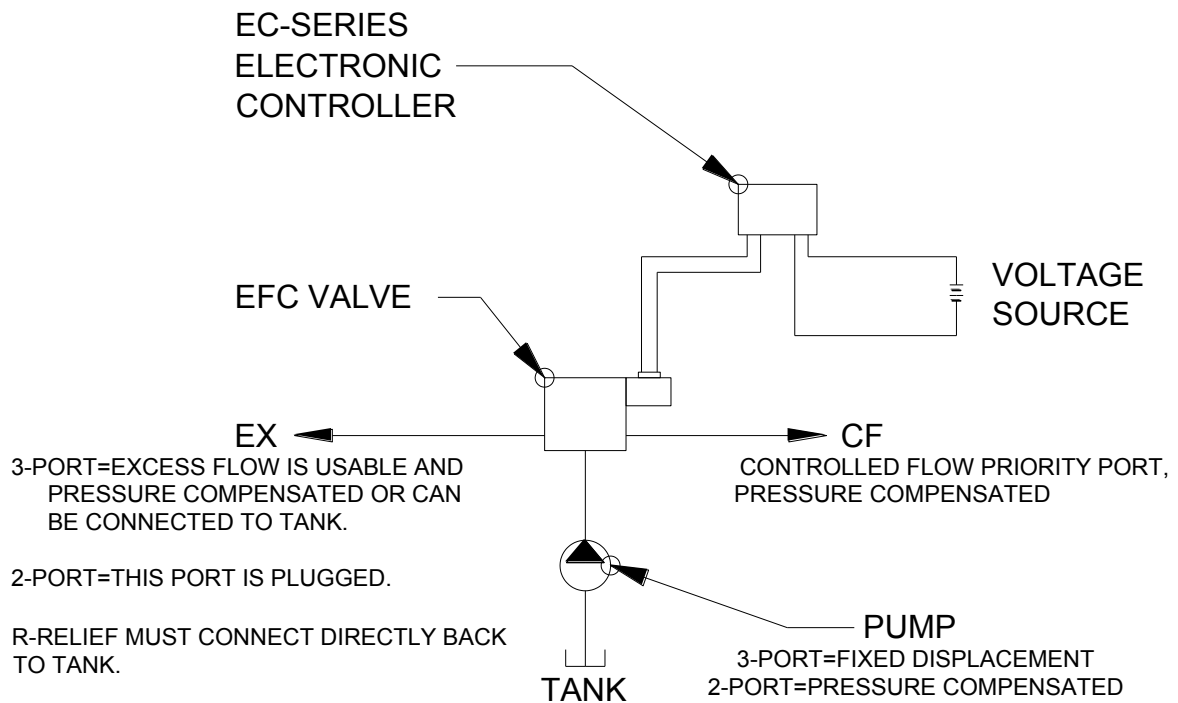

DIMENSIONAL DATA (EFC WITH RELIEF SHOWN):

