

c3controls' terminal blocks are both innovative and user-friendly. They are simple to install and are color-coded for easy circuit identification. From standard feed-through spring clamp or screw clamp to disconnect, fuse holder, and power distribution terminal blocks, we've got what you need.

IEC & NEMA TERMINAL BLOCKS

IEC Screw Clamp Connection	
Feed Through DIN Rail	304
DIN Rail Ground	310
Multi-Conductor Feed Through DIN Rail	312
DIN Rail Multi-Level	313
DIN Rail Fuse Holder	316
DIN Rail Disconnect	319
Power Distribution Block - Panel and DIN Rail Mount	320
Miniature Feed Through Panel Mount	321
IEC Spring Clamp Connection	
Feed Through DIN Rail	322
DIN Rail Ground	325
Multi-Conductor Feed Through DIN Rail	327
Miniature Feed Through Panel Mount	330
IEC Accessories & Markers	331
Guide for Selecting Screw Driver Blade Dimension	334
IEC Plotter Systems & Accessories	335
IEC Dimensions	338
NEMA Screw Clamp	
Feed Through	348
Fusible	350
Disconnecting	350
Accessories	351
Power Blocks & Accessories	352
Dimensions	354



NOTE: The scope (range, description, price, specifications, dimensions, etc.) of the product featured in this section is subject to change without notice. Refer to www.c3controls.com for product updates.

Conformity to Standards: Certifications:

SERIES WTB2 (IEC)
UL 1059

CSA C22.2 No. 158
IEC 60947-1, 60947-7-1



SERIES TB (NEMA)
UL 1059, 486
CSA C22.2 No. 65, 188





UL File #: E145984
(Guide XCFR2, XCFR8)
CSA File #: 232541

UL File #: E145984 (Guide XCFR2)
CSA File #: 47446

Visit www.c3controls.com to download product certifications.

IEC FEED THROUGH DIN RAIL TERMINAL BLOCKS



WTB2-W2

WTB2-W4

SPECIFICATIONS		SINGLE-CIRCUIT TERMINAL BLOCK			SINGLE-CIRCUIT TERMINAL BLOCK		
Certifications		 UL 1059 File #: E145984	 C22.2 No. 158 File #: 232541	 IEC 60947-7-1	 UL 1059 File #: E145984	 C22.2 No. 158 File #: 232541	 IEC 60947-7-1
Voltage Rating	(V)	600	600	750	600	600	750
Maximum Current	(A)	20	20	24	35	25	32
WIRE RANGE							
Solid Strand Conductor	mm²	0.5 - 4			0.5 - 6		
Fine Strand Conductor	mm²	0.5 - 2.5			0.5 - 4		
AWG Conductor		22 - 14			22 - 10	22 - 12	—
Wire Strip Length	(mm/inches)	9 / 0.35			9 / 0.35		
Tightening Torque	(Nm/Lb-in)	0.4 / 7			0.5 / 7		
OPERATING TEMPERATURE							
Operating Temperature		-20 to +80° C (-4 to +176° F)			-20 to +80° C (-4 to +176° F)		
ROHS COMPLIANCE		For RoHS compliance documentation by product, refer to www.c3controls.com					
TERMINAL BLOCKS		CAT. NO.	PCS./PKG.	PRICE/PC.	CAT. NO.	PCS./PKG.	PRICE/PC.
(Standard) Grey		WTB2-W2	100	\$ 0.38	WTB2-W4	100	\$ 0.45
Black		WTB2-W2-BK	100	\$ 0.43	WTB2-W4-BK	100	\$ 0.49
Blue		WTB2-W2-BE	100	\$ 0.43	WTB2-W4-BE	100	\$ 0.49
Green		WTB2-W2-GN	100	\$ 0.43	WTB2-W4-GN	100	\$ 0.49
Orange		WTB2-W2-OR	100	\$ 0.43	WTB2-W4-OR	100	\$ 0.49
Red		WTB2-W2-RD	100	\$ 0.43	WTB2-W4-RD	100	\$ 0.49
White		WTB2-W2-WH	100	\$ 0.43	WTB2-W4-WH	100	\$ 0.49
Yellow		WTB2-W2-YW	100	\$ 0.43	WTB2-W4-YW	100	\$ 0.49
ACCESSORIES (See pages 331-333)		CAT. NO.	PCS./PKG.	PRICE/PC.	CAT. NO.	PCS./PKG.	PRICE/PC.
End Barrier							
Grey, Non-Metallic (Installs on 35mm DIN Rail)		WTB2-EB	50	\$ 0.80	WTB2-EB	50	\$ 0.80
Grey, Non-Metallic (Installs on 32mm and 35mm DIN Rail)		WTB2-EB2	50	\$ 0.80	WTB2-EB2	50	\$ 0.80
Steel (Installs on 35mm DIN Rail)		WTB2-EB3	50	\$ 0.80	WTB2-EB3	50	\$ 0.80
Circuit Bridge							
2 Position		WTB2-W2/2CB	10	\$ 0.55	WTB2-W4/2CB	10	\$ 1.10
3 Position		WTB2-W2/3CB	10	\$ 0.80	WTB2-W4/3CB	10	\$ 1.60
4 Position		WTB2-W2/4CB	10	\$ 1.30	WTB2-W4/4CB	10	\$ 2.10
10 Position		WTB2-W2/10CB	10	\$ 2.60	WTB2-W4/10CB	10	\$ 4.90
End Plate		WTB2-EPW2/4	50	\$ 0.25	WTB2-EPW2/4	50	\$ 0.25
Separator Plate		WTB2-AD2/4	50	\$ 0.27	WTB2-AD2/4	50	\$ 0.27
Partition Plate		WTB2-PPW2/4	50	\$ 0.27	WTB2-PPW2/4	50	\$ 0.27
Marker		WTB2-M5	100	\$ 0.04	WTB2-M6	100	\$ 0.04
Group Markers (See page 331)							
Plated Steel Mounting Rail, DIN							
35mm x 7.5mm - Slotted - 1 Meter		DRMR3	1	\$ 4.50	DRMR3	1	\$ 4.50
35mm x 7.5mm - Slotted - 2 Meters		DRMR6	10	\$ 9.00	DRMR6	10	\$ 9.00
35mm x 15mm - Slotted - 1 Meter		DRMR3D	1	\$ 6.50	DRMR3D	1	\$ 6.50
35mm x 15mm - Slotted - 2 Meters		DRMR6D	1	\$13.00	DRMR6D	1	\$13.00
Aluminum Mounting Rail, DIN							
35mm x 7.5mm - Slotted - 1 Meter		DRMR3A	1	\$ 8.00	DRMR3A	1	\$ 8.00
DIN Rail Support Bracket		WTB2-BRKT1	1	\$ 0.90	WTB2-BRKT1	1	\$ 0.90

SEE BOTTOM OF PAGE 305 FOR COLOR OPTIONS.

IEC FEED THROUGH DIN RAIL TERMINAL BLOCKS


c3controls WTB2 Series of feed through terminal blocks have been designed to meet the strict specifications and standards of UL, CSA, and IEC. The WTB2 Series of terminal blocks is manufactured with a direct mounting foot for 32mm and 35mm standard DIN rails.

In addition to the mounting feature, the WTB2 Series is constructed using only the best available materials for both the housing and clamping bodies and parts. The housing is molded out of an unbreakable high quality thermoplastic — polyamide 6.6. The metal bodies are made of a high quality zinc plated, brass and electrolytic copper to provide excellent conductivity and minimize corrosion problems.

The WTB2 Series accepts wires as small as 0.5mm² (24 AWG) and as large as 120mm² (4/0 AWG), up to 232 Amps. Wiring to the terminal blocks is made easy by the funnel entry design of the housing. Accessories such as circuit bridges, end plates, partition plates, and markers make the WTB2 Series a flexible alternative to any feed through wiring or power distribution application.

SPECIAL FEATURES

C3CONTROLS MANUFACTURES THE MOST INNOVATIVE, USER-FRIENDLY LINE OF TERMINAL BLOCKS ON THE MARKET TODAY!

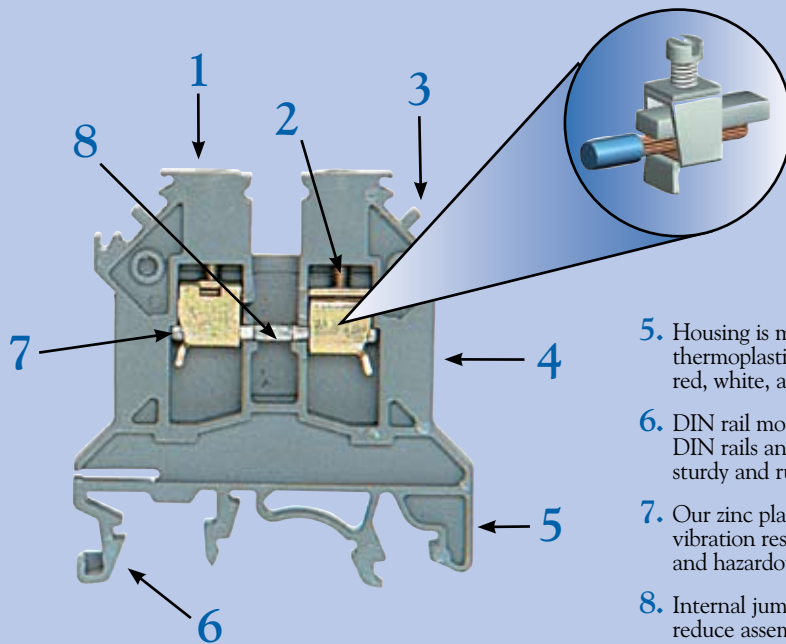



1. Construction provides IP20 protection to guard against accidental contact with live parts — even with accessories installed.
2. Captive terminal screws will not fall out during wiring and are recessed to avoid accidental contact.
3. Marking system allows for fast and easy circuit identification. Blank, custom, and standard markers are available.
4. Funneled wiring entry with finger safe IP20 terminals simplifies wiring for fast and easy installations.
5. Housing is molded out of an unbreakable high quality polyamide 6.6 thermoplastic. Available in eight colors; grey, black, blue, green, orange, red, white, and yellow for quick identification of control circuit types.
6. DIN rail mounting foot allows for direct mounting on 32mm and 35mm DIN rails and is designed for easy snap on, snap off assembly — the most sturdy and rugged mounting foot on the market!
7. Our zinc plated clamping system provides superior conductivity, is vibration resistant, and offers superb corrosion resistance for normal and hazardous environments.
8. Internal jumpers (circuit bridges) free up valuable wiring space and reduce assembly time.

ADDITIONAL COLORS AVAILABLE FOR IEC TERMINAL BLOCKS



IEC FEED THROUGH DIN RAIL TERMINAL BLOCKS

DISCOUNT
SCHEDULE **C**




WTB2-W6

WTB2-W10

SPECIFICATIONS		SINGLE-CIRCUIT TERMINAL BLOCK			SINGLE-CIRCUIT TERMINAL BLOCK		
Certifications		 UL 1059 File #: E145984	 C22.2 No. 158 File #: 232541	 IEC 60947-7-1	 UL 1059 File #: E145984	 C22.2 No. 158 File #: 232541	 IEC 60947-7-1
Voltage Rating	(V)	600	600	750	600	600	750
Maximum Current	(A)	50	50	41	65	65	57
WIRE RANGE							
Solid Strand Conductor	mm ²	1.5 - 10			1.5 - 16		
Fine Strand Conductor	mm ²	1.5 - 6			1.5 - 10		
AWG Conductor		22 - 8			16 - 6	15 - 7	—
Wire Strip Length	(mm/inches)	12 / 0.47			12 / 0.47		
Tightening Torque	(Nm/Lb-in)	0.8 / 9			1.2 / 14		
OPERATING TEMPERATURE							
Operating Temperature		-20 to +80° C (-4 to +176° F)			-20 to +80° C (-4 to +176° F)		
ROHS COMPLIANCE		For RoHS compliance documentation by product, refer to www.c3controls.com					
TERMINAL BLOCKS		CAT. NO.	PCS./PKG.	PRICE/PC.	CAT. NO.	PCS./PKG.	PRICE/PC.
(Standard) Grey		WTB2-W6	100	\$ 0.67	WTB2-W10	100	\$ 0.90
Black		WTB2-W6-BK	100	\$ 0.74	WTB2-W10-BK	100	\$ 0.98
Blue		WTB2-W6-BE	100	\$ 0.74	WTB2-W10-BE	100	\$ 0.98
Green		WTB2-W6-GN	100	\$ 0.74	WTB2-W10-GN	100	\$ 0.98
Orange		WTB2-W6-OR	100	\$ 0.74	WTB2-W10-OR	100	\$ 0.98
Red		WTB2-W6-RD	100	\$ 0.74	WTB2-W10-RD	100	\$ 0.98
White		WTB2-W6-WH	100	\$ 0.74	WTB2-W10-WH	100	\$ 0.98
Yellow		WTB2-W6-YW	100	\$ 0.74	WTB2-W10-YW	100	\$ 0.98
ACCESSORIES (See pages 331-333)		CAT. NO.	PCS./PKG.	PRICE/PC.	CAT. NO.	PCS./PKG.	PRICE/PC.
End Barrier							
Grey, Non-Metallic (Installs on 35mm DIN Rail)		WTB2-EB	50	\$ 0.80	WTB2-EB	50	\$ 0.80
Grey, Non-Metallic (Installs on 32mm and 35mm DIN Rail)		WTB2-EB2	50	\$ 0.80	WTB2-EB2	50	\$ 0.80
Steel (Installs on 35mm DIN Rail)		WTB2-EB3	50	\$ 0.80	WTB2-EB3	50	\$ 0.80
Circuit Bridge							
2 Position		WTB2-W6/2CB	10	\$ 1.20	WTB2-W10/2CB	10	\$ 1.30
3 Position		WTB2-W6/3CB	10	\$ 1.70	WTB2-W10/3CB	10	\$ 1.70
4 Position		WTB2-W6/4CB	10	\$ 2.20	WTB2-W10/4CB	10	\$ 2.30
10 Position		WTB2-W6/10CB	10	\$ 5.20	WTB2-W10/10CB	10	\$ 5.30
End Plate		WTB2-EPW6/10	50	\$ 0.25	WTB2-EPW6/10	50	\$ 0.25
Separator Plate		WTB2-AD6/10	50	\$ 0.27	WTB2-AD6/10	50	\$ 0.27
Partition Plate		WTB2-PPW6/10	50	\$ 0.27	WTB2-PPW6/10	50	\$ 0.27
Marker		WTB2-M8	100	\$ 0.04	WTB2-M10	100	\$ 0.08
Group Markers (See page 331)							
Plated Steel Mounting Rail, DIN							
35mm x 7.5mm - Slotted - 1 Meter		DRMR3	1	\$ 4.50	DRMR3	1	\$ 4.50
35mm x 7.5mm - Slotted - 2 Meters		DRMR6	10	\$ 9.00	DRMR6	10	\$ 9.00
35mm x 15mm - Slotted - 1 Meter		DRMR3D	1	\$ 6.50	DRMR3D	1	\$ 6.50
35mm x 15mm - Slotted - 2 Meters		DRMR6D	1	\$13.00	DRMR6D	1	\$13.00
Aluminum Mounting Rail, DIN							
35mm x 7.5mm - Slotted - 1 Meter		DRMR3A	1	\$ 8.00	DRMR3A	1	\$ 8.00
DIN Rail Support Bracket		WTB2-BRKT1	1	\$ 0.90	WTB2-BRKT1	1	\$ 0.90

SEE BOTTOM OF PAGE 305 FOR COLOR OPTIONS.

IEC FEED THROUGH DIN RAIL TERMINAL BLOCKS

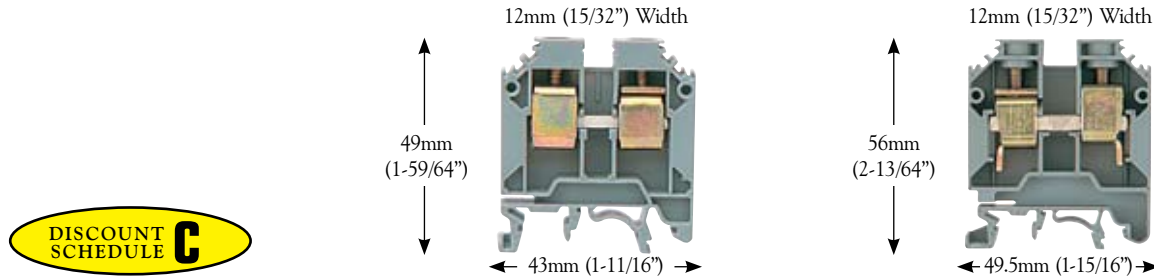


WTB2-W16

WTB2-W25

SPECIFICATIONS		SINGLE-CIRCUIT TERMINAL BLOCK			SINGLE-CIRCUIT TERMINAL BLOCK		
Certifications		 UL 1059 File #: E145984	 C22.2 No. 158 File #: 232541	 IEC 60947-7-1	 UL 1059 File #: E145984	 C22.2 No. 158 File #: 232541	 IEC 60947-7-1
Voltage Rating (V)		600	600	750	600	600	750
Maximum Current (A)		85	85	76	115	115	101
WIRE RANGE							
Solid Strand Conductor	mm²	2.5 - 25			6 - 35		
Fine Strand Conductor	mm²	2.5 - 16			6 - 25		
AWG Conductor		14 - 6			14 - 3	9 - 3	—
Wire Strip Length (mm/inches)		16 / 0.63			18 / 0.71		
Tightening Torque (Nm/Lb-in)		2.0 / 14			2.0 / 14		
OPERATING TEMPERATURE							
Operating Temperature		-20 to +80° C (-4 to +176° F)			-20 to +80° C (-4 to +176° F)		
ROHS COMPLIANCE		For RoHS compliance documentation by product, refer to www.c3controls.com					
TERMINAL BLOCKS		CAT. NO.	PCS./PKG.	PRICE/PC.	CAT. NO.	PCS./PKG.	PRICE/PC.
(Standard) Grey		WTB2-W16	50	\$ 1.47	WTB2-W25	50	\$ 2.10
Black		WTB2-W16-BK	50	\$ 1.60	WTB2-W25-BK	50	\$ 2.25
Blue		WTB2-W16-BE	50	\$ 1.60	WTB2-W25-BE	50	\$ 2.25
Green		WTB2-W16-GN	50	\$ 1.60	WTB2-W25-GN	50	\$ 2.25
Orange		WTB2-W16-OR	50	\$ 1.60	WTB2-W25-OR	50	\$ 2.25
Red		WTB2-W16-RD	50	\$ 1.60	WTB2-W25-RD	50	\$ 2.25
White		WTB2-W16-WH	50	\$ 1.60	WTB2-W25-WH	50	\$ 2.25
Yellow		WTB2-W16-YW	50	\$ 1.60	WTB2-W25-YW	50	\$ 2.25
ACCESSORIES (See pages 331-333)		CAT. NO.	PCS./PKG.	PRICE/PC.	CAT. NO.	PCS./PKG.	PRICE/PC.
End Barrier							
Grey, Non-Metallic (Installs on 35mm DIN Rail)		WTB2-EB	50	\$ 0.80	WTB2-EB	50	\$ 0.80
Grey, Non-Metallic (Installs on 32mm and 35mm DIN Rail)		WTB2-EB2	50	\$ 0.80	WTB2-EB2	50	\$ 0.80
Steel (Installs on 35mm DIN Rail)		WTB2-EB3	50	\$ 0.80	WTB2-EB3	50	\$ 0.80
Circuit Bridge							
2 Position		WTB2-W16/2CB	10	\$ 1.30	WTB2-W25/2CB	10	\$ 1.30
3 Position		WTB2-W16/3CB	10	\$ 1.70	WTB2-W25/3CB	10	\$ 1.70
4 Position		WTB2-W16/4CB	10	\$ 2.30	WTB2-W25/4CB	10	\$ 2.30
10 Position		WTB2-W16/10CB	10	\$ 5.40	WTB2-W25/10CB	10	\$ 5.40
End Plate		—	—	—	WTB2-EPW25	50	\$ 0.45
Separator Plate		WTB2-AD16	50	\$ 0.27	—	—	—
Partition Plate		—	—	—	WTB2-PPW25	50	\$ 0.50
Marker		WTB2-M12	100	\$ 0.08	WTB2-M12	100	\$ 0.08
Group Markers (See page 331)							
Plated Steel Mounting Rail, DIN							
35mm x 7.5mm - Slotted - 1 Meter		DRMR3	1	\$ 4.50	DRMR3	1	\$ 4.50
35mm x 7.5mm - Slotted - 2 Meters		DRMR6	10	\$ 9.00	DRMR6	10	\$ 9.00
35mm x 15mm - Slotted - 1 Meter		DRMR3D	1	\$ 6.50	DRMR3D	1	\$ 6.50
35mm x 15mm - Slotted - 2 Meters		DRMR6D	1	\$13.00	DRMR6D	1	\$13.00
Aluminum Mounting Rail, DIN							
35mm x 7.5mm - Slotted - 1 Meter		DRMR3A	1	\$ 8.00	DRMR3A	1	\$ 8.00
DIN Rail Support Bracket		WTB2-BRKT1	1	\$ 0.90	WTB2-BRKT1	1	\$ 0.90

SEE BOTTOM OF PAGE 305 FOR COLOR OPTIONS.

IEC FEED THROUGH DIN RAIL TERMINAL BLOCKS

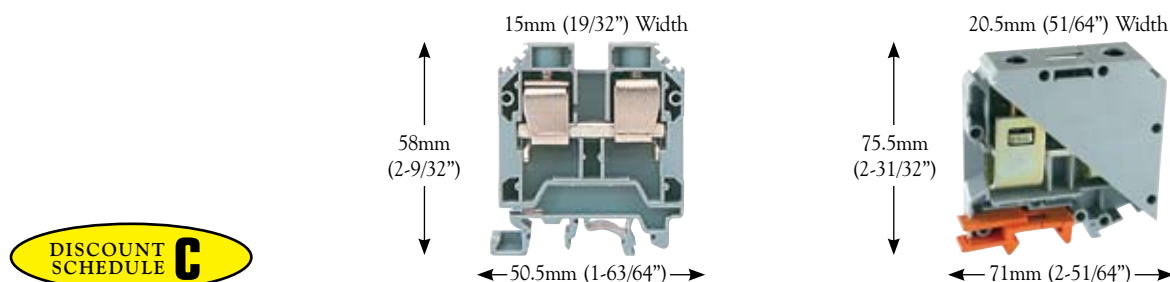


WTB2-W35

WTB2-W70

SPECIFICATIONS		SINGLE-CIRCUIT TERMINAL BLOCK			SINGLE-CIRCUIT TERMINAL BLOCK		
Certifications		 UL 1059 File #: E145984	 C22.2 No. 158 File #: 232541	 IEC 60947-7-1	 UL 1059 File #: E145984	C22.2 No. 158	 IEC 60947-7-1
Voltage Rating	(V)	600	600	750	600	600	1000
Maximum Current	(A)	145	145	145	150	150	150
WIRE RANGE							
Solid Strand Conductor	mm²	10 - 50			16 - 70		
Fine Strand Conductor	mm²	10 - 35			16 - 50		
AWG Conductor		18 - 1 / 0	7 - 2	—	6 - 2 / 0		
Wire Strip Length	(mm/inches)	18 / 0.71			22 / 0.87		
Tightening Torque	(Nm/Lb-in)	2.5 / 25			6.8 / 60		
OPERATING TEMPERATURE							
Operating Temperature		-20 to +80° C (-4 to +176° F)			-20 to +80° C (-4 to +176° F)		
ROHS COMPLIANCE		For RoHS compliance documentation by product, refer to www.c3controls.com					
TERMINAL BLOCKS		CAT. NO.	PCS./PKG.	PRICE/PC.	CAT. NO.	PCS./PKG.	PRICE/PC.
(Standard) Grey		WTB2-W35	50	\$ 2.24	WTB2-W70	20	\$ 7.90
Black		WTB2-W35-BK	50	\$ 2.40	WTB2-W70-BK	20	\$ 8.55
Blue		WTB2-W35-BE	50	\$ 2.40	WTB2-W70-BE	20	\$ 8.55
Green		WTB2-W35-GN	50	\$ 2.40	WTB2-W70-GN	20	\$ 8.55
Orange		WTB2-W35-OR	50	\$ 2.40	WTB2-W70-OR	20	\$ 8.55
Red		WTB2-W35-RD	50	\$ 2.40	WTB2-W70-RD	20	\$ 8.55
White		WTB2-W35-WH	50	\$ 2.40	WTB2-W70-WH	20	\$ 8.55
Yellow		WTB2-W35-YW	50	\$ 2.40	WTB2-W70-YW	20	\$ 8.55
ACCESSORIES (See pages 331-333)		CAT. NO.	PCS./PKG.	PRICE/PC.	CAT. NO.	PCS./PKG.	PRICE/PC.
End Barrier							
Grey, Non-Metallic (Installs on 35mm DIN Rail)		WTB2-EB	50	\$ 0.80	WTB2-EB	50	\$ 0.80
Grey, Non-Metallic (Installs on 32mm and 35mm DIN Rail)		WTB2-EB2	50	\$ 0.80	WTB2-EB2	50	\$ 0.80
Steel (Installs on 35mm DIN Rail)		WTB2-EB3	50	\$ 0.80	WTB2-EB3	50	\$ 0.80
Circuit Bridge							
2 Position		WTB2-W35/2CB	10	\$ 1.30	—	—	—
3 Position		WTB2-W35/3CB	10	\$ 1.70	—	—	—
4 Position		WTB2-W35/4CB	10	\$ 2.30	—	—	—
10 Position		WTB2-W35/10CB	10	\$ 5.40	—	—	—
End Plate		WTB2-EPW35	50	\$ 0.45	—	—	—
Partition Plate		WTB2-PPW35	50	\$ 0.50	—	—	—
Marker		WTB2-M15	100	\$ 0.08	WTB2-M50	100	\$ 0.10
Group Markers (See Page 331)							
Plated Steel Mounting Rail, DIN							
35mm x 7.5mm - Slotted - 1 Meter		DRMR3	1	\$ 4.50	DRMR3	1	\$ 4.50
35mm x 7.5mm - Slotted - 2 Meters		DRMR6	10	\$ 9.00	DRMR6	10	\$ 9.00
35mm x 15mm - Slotted - 1 Meter		DRMR3D	1	\$ 6.50	DRMR3D	1	\$ 6.50
35mm x 15mm - Slotted - 2 Meters		DRMR6D	1	\$13.00	DRMR6D	1	\$13.00
Aluminum Mounting Rail, DIN							
35mm x 7.5mm - Slotted - 1 Meter		DRMR3A	1	\$ 8.00	DRMR3A	1	\$ 8.00
DIN Rail Support Bracket		WTB2-BRKT1	1	\$ 0.90	WTB2-BRKT1	1	\$ 0.90

SEE BOTTOM OF PAGE 305 FOR COLOR OPTIONS.

IEC FEED THROUGH DIN RAIL TERMINAL BLOCKS





WTB2-W95

SPECIFICATIONS		SINGLE-CIRCUIT TERMINAL BLOCK		
Certifications		 UL 1059 File #: E145984	C22.2 No. 158	 IEC 60947-7-1
Voltage Rating (V)		600	600	1000
Maximum Current (A)		230	230	232
WIRE RANGE				
Solid Strand Conductor	mm ²	16 - 120		
Fine Strand Conductor	mm ²	16 - 95		
AWG Conductor		2 - 4 / 0		
Wire Strip Length (mm/inches)		24 / 0.94		
Tightening Torque (Nm/Lb-in)		18.2 / 160		
OPERATING TEMPERATURE				
Operating Temperature		-20 to +80° C (-4 to +176° F)		
ROHS COMPLIANCE		For RoHS compliance documentation by product, refer to www.c3controls.com		
TERMINAL BLOCKS		CAT. NO.	PCS./PKG.	PRICE/PC.
(Standard) Grey		WTB2-W95	10	\$26.00
Black		WTB2-W95-BK	10	\$27.00
Blue		WTB2-W95-BE	10	\$27.00
Green		WTB2-W95-GN	10	\$27.00
Orange		WTB2-W95-OR	10	\$27.00
Red		WTB2-W95-RD	10	\$27.00
White		WTB2-W95-WH	10	\$27.00
Yellow		WTB2-W95-YW	10	\$27.00
ACCESSORIES (See pages 331-333)		CAT. NO.	PCS./PKG.	PRICE/PC.
End Barrier				
Grey, Non-Metallic (Installs on 35mm DIN Rail)		WTB2-EB	50	\$ 0.80
Grey, Non-Metallic (Installs on 32mm and 35mm DIN Rail)		WTB2-EB2	50	\$ 0.80
Steel (Installs on 35mm DIN Rail)		WTB2-EB3	50	\$ 0.80
Marker		WTB2-M50	100	\$ 0.10
Group Markers (See page 331)				
Plated Steel Mounting Rail, DIN				
35mm x 7.5mm - Slotted - 1 Meter		DRMR3	1	\$ 4.50
35mm x 7.5mm - Slotted - 2 Meters		DRMR6	10	\$ 9.00
35mm x 15mm - Slotted - 1 Meter		DRMR3D	1	\$ 6.50
35mm x 15mm - Slotted - 2 Meters		DRMR6D	1	\$13.00
Aluminum Mounting Rail, DIN				
35mm x 7.5mm - Slotted - 1 Meter		DRMR3A	1	\$ 8.00
DIN Rail Support Bracket		WTB2-BRKT1	1	\$ 0.90

DISCOUNT
SCHEDULE **C**

IEC DIN RAIL GROUND TERMINAL BLOCKS



DISCOUNT
SCHEDULE **C**

WTB2-W2/4G


WTB2-W6/10G

SPECIFICATIONS	SINGLE-CIRCUIT TERMINAL BLOCK			SINGLE-CIRCUIT TERMINAL BLOCK		
Certifications	 UL 1059 File #: E145984	 C22.2 No. 158 File #: 232541	 IEC 60947-7-2	 UL 1059 File #: E145984	 C22.2 No. 158 File #: 232541	 IEC 60947-7-2
WIRE RANGE						
Solid Strand Conductor mm ²	0.5 - 6			1.5 - 16		
Fine Strand Conductor mm ²	0.5 - 4			1.5 - 10		
AWG Conductor	22 - 12			16 - 8		
Wire Strip Length (mm/inches)	9 / 0.35			12 / 0.47		
Tightening Torque (Nm/Lb-in)	0.5 / 7			1.2 / 14		
OPERATING TEMPERATURE						
Operating Temperature	-20 to +80° C (-4 to +176° F)			-20 to +80° C (-4 to +176° F)		
ROHS COMPLIANCE	For RoHS compliance documentation by product, refer to www.c3controls.com					
TERMINAL BLOCKS	CAT. NO.	PCS./PKG.	PRICE/PC.	CAT. NO.	PCS./PKG.	PRICE/PC.
Yellow and Green insulation housing with metal mounting foot.	WTB2-W2/4G	50	\$ 2.60	WTB2-W6/10G	50	\$ 2.84
ACCESSORIES (See pages 331-333)	CAT. NO.	PCS./PKG.	PRICE/PC.	CAT. NO.	PCS./PKG.	PRICE/PC.
End Barrier						
Grey, Non-Metallic (Installs on 35mm DIN Rail)	WTB2-EB	50	\$ 0.80	WTB2-EB	50	\$ 0.80
Grey, Non-Metallic (Installs on 32mm and 35mm DIN Rail)	WTB2-EB2	50	\$ 0.80	WTB2-EB2	50	\$ 0.80
Steel (Installs on 35mm DIN Rail)	WTB2-EB3	50	\$ 0.80	WTB2-EB3	50	\$ 0.80
Marker	WTB2-M6	100	\$ 0.04	WTB2-M10	100	\$ 0.08
Group Markers (See page 331)						
Plated Steel Mounting Rail, DIN						
35mm x 7.5mm - Slotted - 1 Meter	DRMR3	1	\$ 4.50	DRMR3	1	\$ 4.50
35mm x 7.5mm - Slotted - 2 Meters	DRMR6	10	\$ 9.00	DRMR6	10	\$ 9.00
35mm x 15mm - Slotted - 1 Meter	DRMR3D	1	\$ 6.50	DRMR3D	1	\$ 6.50
35mm x 15mm - Slotted - 2 Meters	DRMR6D	1	\$13.00	DRMR6D	1	\$13.00
Aluminum Mounting Rail, DIN						
35mm x 7.5mm - Slotted - 1 Meter	DRMR3A	1	\$ 8.00	DRMR3A	1	\$ 8.00
DIN Rail Support Bracket	WTB2-BRKT1	1	\$ 0.90	WTB2-BRKT1	1	\$ 0.90

SCREW CLAMP GROUNDING TERMINALS

Use of grounding terminals instead of grounding studs and wire lugs to terminate ground wires saves installation and wiring time substantially. Grounding terminals clamp mechanically onto the DIN Rail by tightening the center mounting screw, making a reliable electrical connection between the current bar and the DIN Rail. The rail serves as a bus bar and automatically distributes ground potential to all other ground terminals on the same rail. Grounding terminals can also be used as end stops, preventing other terminal blocks and components from moving laterally on the DIN Rail. Grounding terminals are supplied with a green/yellow polyamide 6.6 housing as standard for easy identification and international acceptance. The brass mounting foot is tin-plated for low contact grounding resistance.

IEC DIN RAIL GROUND TERMINAL BLOCKS

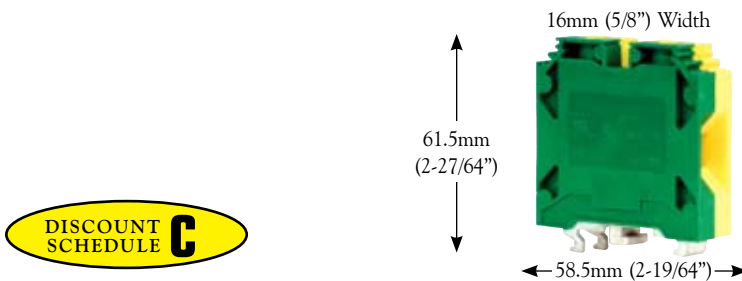


WTB2-W16/35G			
SPECIFICATIONS	SINGLE-CIRCUIT TERMINAL BLOCK		
Certifications	 UL 1059 File #: E145984	 C22.2 No. 158 File #: 232541	 IEC 60947-7-2
WIRE RANGE			
Solid Strand Conductor mm ²	10 - 50		
Fine Strand Conductor mm ²	10 - 35		
AWG Conductor	8 - 2	8 - 3	—
Wire Strip Length (mm/inches)	18 / 0.71		
Tightening Torque (Nm/Lb-in)	2.5 / 25		
OPERATING TEMPERATURE			
Operating Temperature	-20 to +80° C (-4 to +176° F)		
ROHS COMPLIANCE	For RoHS compliance documentation by product, refer to www.c3controls.com		
TERMINAL BLOCKS	CAT. NO.	PCS./PKG.	PRICE/PC.
Yellow and Green insulation housing with metal mounting foot.	WTB2-W16/35G	20	\$ 3.84
ACCESSORIES (See pages 331-333)	CAT. NO.	PCS./PKG.	PRICE/PC.
End Barrier			
Grey, Non-Metallic (Installs on 35mm DIN Rail)	WTB2-EB	50	\$ 0.80
Grey, Non-Metallic (Installs on 32mm and 35mm DIN Rail)	WTB2-EB2	50	\$ 0.80
Steel (Installs on 35mm DIN Rail)	WTB2-EB3	50	\$ 0.80
Marker	WTB2-M15	100	\$ 0.08
Group Markers (See page 331)			
Plated Steel Mounting Rail, DIN			
35mm x 7.5mm - Slotted - 1 Meter	DRMR3	1	\$ 4.50
35mm x 7.5mm - Slotted - 2 Meters	DRMR6	10	\$ 9.00
35mm x 15mm - Slotted - 1 Meter	DRMR3D	1	\$ 6.50
35mm x 15mm - Slotted - 2 Meters	DRMR6D	1	\$13.00
Aluminum Mounting Rail, DIN			
35mm x 7.5mm - Slotted - 1 Meter	DRMR3A	1	\$ 8.00
DIN Rail Support Bracket	WTB2-BRKT1	1	\$ 0.90

MULTI-CONDUCTOR SCREW CLAMP

The multi-conductor screw clamp terminals offer a reliable solution for multiple wire connections. The terminal eliminates conventional cross connections, looping wires and reliability problems encountered when connecting two wires in one clamp. The terminals provide multiple connection points in the terminal itself, and the possibility of further multiplication of connections with circuit bridges. The multi-conductor terminal blocks can even be bridged to standard feed through screw clamp terminal blocks of the same conductor size.

WTB2-W4-12 features one termination point on one side and two termination points on the other side, while the WTB2-W4-22 has two termination points on each side. Bridging facility is at the center of the terminals.

IEC MULTI-CONDUCTOR FEED THROUGH DIN RAIL TERMINAL BLOCKS

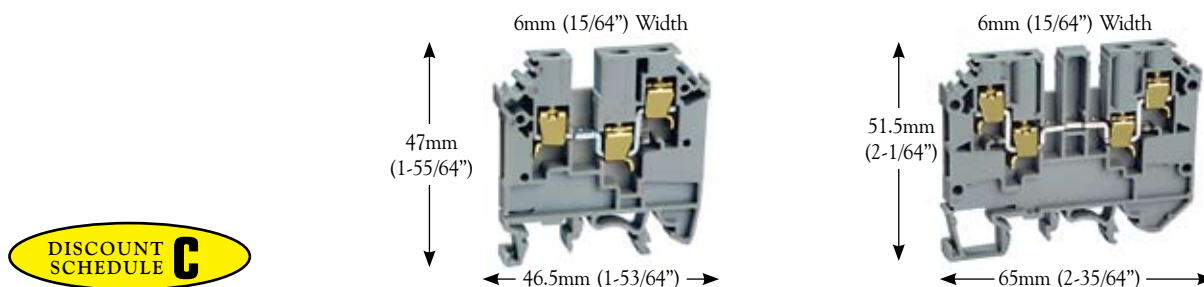

WTB2-W4-12



WTB2-W4-22

SPECIFICATIONS	SINGLE-CIRCUIT TERMINAL BLOCK			SINGLE-CIRCUIT TERMINAL BLOCK		
Certifications	 UL 1059 File #: E145984	 C22.2 No. 158 File #: 232541	 IEC 60947-7-1	 UL 1059 File #: E145984	 C22.2 No. 158 File #: 232541	 IEC 60947-7-1
Voltage Rating (V)	600	600	600	600	600	600
Maximum Current (A)	35	25	32	35	25	32
WIRE RANGE						
Solid Strand Conductor mm ²	0.5 - 4			0.5 - 4		
Fine Strand Conductor mm ²	0.5 - 6			0.5 - 6		
AWG Conductor	22 - 10	22 - 12	—	22 - 10	22 - 12	—
Wire Strip Length (mm/inches)	9 / 0.35			9 / 0.35		
Tightening Torque (Nm/Lb-in)	0.5 / 7			0.5 / 7		
OPERATING TEMPERATURE						
Operating Temperature	-20 to +80° C (-4 to +176° F)			-20 to +80° C (-4 to +176° F)		
ROHS COMPLIANCE						
For RoHS compliance documentation by product, refer to www.c3controls.com						
TERMINAL BLOCKS						
(Standard) Grey	CAT. NO.	PCS./PKG.	PRICE/PC.	CAT. NO.	PCS./PKG.	PRICE/PC.
	WTB2-W4-12	100	\$ 1.47	WTB2-W4-22	50	\$ 1.52
ACCESSORIES (See pages 331-333)						
End Barrier						
Grey, Non-Metallic (Installs on 35mm DIN Rail)	WTB2-EB	50	\$ 0.80	WTB2-EB	50	\$ 0.80
Grey, Non-Metallic (Installs on 32mm and 35mm DIN Rail)	WTB2-EB2	50	\$ 0.80	WTB2-EB2	50	\$ 0.80
Steel (Installs on 35mm DIN Rail)	WTB2-EB3	50	\$ 0.80	WTB2-EB3	50	\$ 0.80
Circuit Bridge						
2 Position	WTB2-W4/2CB	10	\$ 1.10	WTB2-W4/2CB	10	\$ 1.10
3 Position	WTB2-W4/3CB	10	\$ 1.60	WTB2-W4/3CB	10	\$ 1.60
4 Position	WTB2-W4/4CB	10	\$ 2.10	WTB2-W4/4CB	10	\$ 2.10
10 Position	WTB2-W4/10CB	10	\$ 4.90	WTB2-W4/10CB	10	\$ 4.90
End Plate	WTB2-EPW4-12	50	\$ 0.25	WTB2-EPW4-22	50	\$ 0.25
Marker	WTB2-M6	100	\$ 0.04	WTB2-M6	100	\$ 0.04
Group Markers (See page 331)						
Plated Steel Mounting Rail, DIN						
35mm x 7.5mm - Slotted - 1 Meter	DRMR3	1	\$ 4.50	DRMR3	1	\$ 4.50
35mm x 7.5mm - Slotted - 2 Meters	DRMR6	10	\$ 9.00	DRMR6	10	\$ 9.00
35mm x 15mm - Slotted - 1 Meter	DRMR3D	1	\$ 6.50	DRMR3D	1	\$ 6.50
35mm x 15mm - Slotted - 2 Meters	DRMR6D	1	\$13.00	DRMR6D	1	\$13.00
Aluminum Mounting Rail, DIN						
35mm x 7.5mm - Slotted - 1 Meter	DRMR3A	1	\$ 8.00	DRMR3A	1	\$ 8.00
DIN Rail Support Bracket	WTB2-BRKT1	1	\$ 0.90	WTB2-BRKT1	1	\$ 0.90

DOUBLE LEVEL, FEED-THROUGH TERMINALS

The double level terminals facilitate higher termination density without the need to increase the length of the mounting rail. Jumping between terminal blocks can be done at both levels with the circuit bridges. Both levels of the terminal block can also be labeled with terminal block markers. The WTB2-W4DDB internally shorted double level terminals are useful for distribution applications using circuit bridges on the lower level.

IEC DIN RAIL MULTI-LEVEL TERMINAL BLOCKS





WTB2-W4DD

WTB2-W4DDB

SPECIFICATIONS	DOUBLE-CIRCUIT TERMINAL BLOCK			SINGLE-CIRCUIT TERMINAL BLOCK		
Certifications	 UL 1059 File #: E145984	 C22.2 No. 158 File #: 232541	 IEC 60947-7-1	 UL 1059 File #: E145984	 C22.2 No. 158 File #: 232541	 IEC 60947-7-1
Voltage Rating (V)	300	300	400	600	600	400
Maximum Current (A)	35	25	32	35	25	32
WIRE RANGE						
Solid Strand Conductor mm²	0.5 - 6			0.5 - 6		
Fine Strand Conductor mm²	0.5 - 4			0.5 - 4		
AWG Conductor	22 - 10	22 - 12	—	22 - 10	22 - 12	—
Wire Strip Length (mm/inches)	9 / 0.35			9 / 0.35		
Tightening Torque (Nm/Lb-in)	0.5 / 6			0.5 / 7		
OPERATING TEMPERATURE						
Operating Temperature	-20 to +80° C (-4 to +176° F)			-20 to +80° C (-4 to +176° F)		
ROHS COMPLIANCE						
For RoHS compliance documentation by product, refer to www.c3controls.com						
TERMINAL BLOCKS						
(Standard) Grey	CAT. NO.	PCS./PKG.	PRICE/PC.	CAT. NO.	PCS./PKG.	PRICE/PC.
	WTB2-W4DD	100	\$ 1.48	WTB2-W4DDB	100	\$ 2.24
ACCESSORIES (See pages 331-333)						
End Barrier						
Grey, Non-Metallic (Installs on 35mm DIN Rail)	WTB2-EB	50	\$ 0.80	WTB2-EB	50	\$ 0.80
Grey, Non-Metallic (Installs on 32mm and 35mm DIN Rail)	WTB2-EB2	50	\$ 0.80	WTB2-EB2	50	\$ 0.80
Steel (Installs on 35mm DIN Rail)	WTB2-EB3	50	\$ 0.80	WTB2-EB3	50	\$ 0.80
Circuit Bridge						
2 Position	WTB2-W4D/2CB	10	\$ 1.10	WTB2-W4D/2CB	10	\$ 1.10
3 Position	WTB2-W4D/3CB	10	\$ 1.60	WTB2-W4D/3CB	10	\$ 1.60
4 Position	WTB2-W4D/4CB	10	\$ 2.10	WTB2-W4D/4CB	10	\$ 2.10
10 Position	WTB2-W4D/10CB	10	\$ 4.90	WTB2-W4D/10CB	10	\$ 4.90
End Plate	WTB2-EPW4DD	50	\$ 0.60	WTB2-EPW4DD	50	\$ 0.60
Marker	WTB2-M2	100	\$ 0.04	WTB2-M2	100	\$ 0.04
Group Markers (See page 331)						
Plated Steel Mounting Rail, DIN						
35mm x 7.5mm - Slotted - 1 Meter	DRMR3	1	\$ 4.50	DRMR3	1	\$ 4.50
35mm x 7.5mm - Slotted - 2 Meters	DRMR6	10	\$ 9.00	DRMR6	10	\$ 9.00
35mm x 15mm - Slotted - 1 Meter	DRMR3D	1	\$ 6.50	DRMR3D	1	\$ 6.50
35mm x 15mm - Slotted - 2 Meters	DRMR6D	1	\$13.00	DRMR6D	1	\$13.00
Aluminum Mounting Rail, DIN						
35mm x 7.5mm - Slotted - 1 Meter	DRMR3A	1	\$ 8.00	DRMR3A	1	\$ 8.00
DIN Rail Support Bracket	WTB2-BRKT1	1	\$ 0.90	WTB2-BRKT1	1	\$ 0.90

IEC DIN RAIL MULTI-LEVEL TERMINAL BLOCKS

DISCOUNT
SCHEDULE **C**

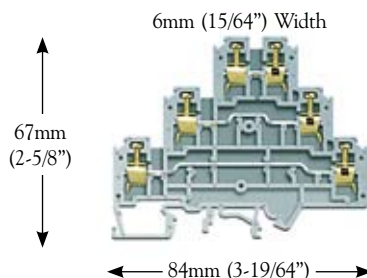

WTB2-TL2

TRIPLE-CIRCUIT TERMINAL BLOCK

 UL 1059 File #: E145984	C22.2 No. 158	 IEC 60947-7-1
---	----------------------	--

WTB2-TL2S

SENSOR TERMINAL BLOCK

 UL 1059 File #: E145984	C22.2 No. 158	 IEC 60947-7-1
---	----------------------	--

SPECIFICATIONS

Certifications	 UL 1059 File #: E145984	C22.2 No. 158	 IEC 60947-7-1	 UL 1059 File #: E145984	C22.2 No. 158	 IEC 60947-7-1
Voltage Rating (V)	300	300	500	300	300	500
Maximum Current (A)	25	25	24	25	25	24

WIRE RANGE

Solid Strand Conductor mm ²	0.5 - 4			0.5 - 4		
Fine Strand Conductor mm ²	0.5 - 2.5			0.5 - 2.5		
AWG Conductor	22 - 12	24 - 12	—	22 - 12	24 - 12	—
Wire Strip Length (mm/inches)	9 / 0.35			9 / 0.35		
Tightening Torque (Nm/Lb-in)	0.4 / 4.5			0.4 / 4.5		

OPERATING TEMPERATURE

Operating Temperature	-20 to +80° C (-4 to +176° F)			-20 to +80° C (-4 to +176° F)		
-----------------------	-------------------------------	--	--	-------------------------------	--	--

ROHS COMPLIANCE

For RoHS compliance documentation by product, refer to www.c3controls.com

TERMINAL BLOCKS

	CAT. NO.	PCS./PKG.	PRICE/PC.	CAT. NO.	PCS./PKG.	PRICE/PC.
--	----------	-----------	-----------	----------	-----------	-----------

(Standard) Grey	WTB2-TL2	50	\$ 1.59	WTB2-TL2S	50	\$ 1.47
-----------------	----------	----	---------	-----------	----	---------

ACCESSORIES (See pages 331-333)	CAT. NO.	PCS./PKG.	PRICE/PC.	CAT. NO.	PCS./PKG.	PRICE/PC.
---------------------------------	----------	-----------	-----------	----------	-----------	-----------

End Barrier						
-------------	--	--	--	--	--	--

Grey, Non-Metallic (Installs on 35mm DIN Rail)	WTB2-EB	50	\$ 0.80	WTB2-EB	50	\$ 0.80
---	---------	----	---------	---------	----	---------

Grey, Non-Metallic (Installs on 32mm and 35mm DIN Rail)	WTB2-EB2	50	\$ 0.80	WTB2-EB2	50	\$ 0.80
--	----------	----	---------	----------	----	---------

Steel (Installs on 35mm DIN Rail)	WTB2-EB3	50	\$ 0.80	WTB2-EB3	50	\$ 0.80
--------------------------------------	----------	----	---------	----------	----	---------

Circuit Bridge						
----------------	--	--	--	--	--	--

2 Position	WTB2-W4D/2CB	10	\$ 1.10	WTB2-W4D/2CB	10	\$ 1.10
------------	--------------	----	---------	--------------	----	---------

3 Position	WTB2-W4D/3CB	10	\$ 1.60	WTB2-W4D/3CB	10	\$ 1.60
------------	--------------	----	---------	--------------	----	---------

4 Position	WTB2-W4D/4CB	10	\$ 2.10	WTB2-W4D/4CB	10	\$ 2.10
------------	--------------	----	---------	--------------	----	---------

10 Position	WTB2-W4D/10CB	10	\$ 4.90	WTB2-W4D/10CB	10	\$ 4.90
-------------	---------------	----	---------	---------------	----	---------

End Plate	WTB2-EPTL2	50	\$ 0.32	WTB2-EPTL2S	50	\$ 0.32
-----------	------------	----	---------	-------------	----	---------

Marker	WTB2-M2	100	\$ 0.04	WTB2-M2	100	\$ 0.04
--------	---------	-----	---------	---------	-----	---------

Group Markers (See page 331)						
------------------------------	--	--	--	--	--	--

Plated Steel Mounting Rail, DIN						
---------------------------------	--	--	--	--	--	--

35mm x 7.5mm - Slotted - 1 Meter	DRMR3	1	\$ 4.50	DRMR3	1	\$ 4.50
----------------------------------	-------	---	---------	-------	---	---------

35mm x 7.5mm - Slotted - 2 Meters	DRMR6	10	\$ 9.00	DRMR6	10	\$ 9.00
-----------------------------------	-------	----	---------	-------	----	---------

35mm x 15mm - Slotted - 1 Meter	DRMR3D	1	\$ 6.50	DRMR3D	1	\$ 6.50
---------------------------------	--------	---	---------	--------	---	---------

35mm x 15mm - Slotted - 2 Meters	DRMR6D	1	\$13.00	DRMR6D	1	\$13.00
----------------------------------	--------	---	---------	--------	---	---------

Aluminum Mounting Rail, DIN						
-----------------------------	--	--	--	--	--	--


35mm x 7.5mm - Slotted - 1 Meter	DRMR3A	1	\$ 8.00	DRMR3A	1	\$ 8.00
----------------------------------	--------	---	---------	--------	---	---------

DIN Rail Support Bracket	WTB2-BRKT1	1	\$ 0.90	WTB2-BRKT1	1	\$ 0.90
--------------------------	------------	---	---------	------------	---	---------

TRIPLE LEVEL, FEED-THROUGH TERMINALS

The triple level terminals are ideal for control systems with three wire DC sensors and actuators. The simplified three level connections facilitate higher wire termination density. The WTB2-TL2 feed-through terminals, with connecting points at all three levels, offer multiple choices of signal and power distribution at any level. The top level of the WTB2-TL2S provides connecting points for the signal while the middle and bottom level connecting points are used for the positive and negative voltage supply connections. In applications where switching indication is required, WTB2-TL2SLP and WTB2-TL2SLN terminal blocks with built-in LED indication are also available.

IEC DIN RAIL MULTI-LEVEL TERMINAL BLOCKS

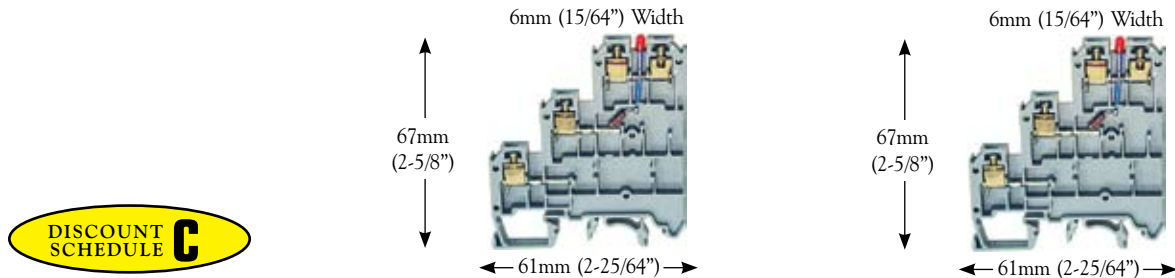


WTB2-TL2SLP®

WTB2-TL2SLN®

SPECIFICATIONS		SENSOR TERMINAL BLOCK WITH LED			SENSOR TERMINAL BLOCK WITH LED		
Certifications		 UL 1059 File #: E145984	C22.2 No. 158	 IEC 60947-7-1	 UL 1059 File #: E145984	C22.2 No. 158	 IEC 60947-7-1
Voltage Rating	(V)	300	300	500	300	300	500
Maximum Current	(A)	25	25	24	25	25	24
WIRE RANGE							
Solid Strand Conductor	mm ²	0.5 - 4			0.5 - 4		
Fine Strand Conductor	mm ²	0.5 - 2.5			0.5 - 2.5		
AWG Conductor		22 - 12	24 - 12	—	22 - 12	24 - 12	—
Wire Strip Length	(mm/inches)	9 / 0.35			9 / 0.35		
Tightening Torque	(Nm/Lb-in)	0.4 / 4.5			0.4 / 4.5		
OPERATING TEMPERATURE							
Operating Temperature		-20 to +80° C (-4 to +176° F)			-20 to +80° C (-4 to +176° F)		
ROHS COMPLIANCE		For RoHS compliance documentation by product, refer to www.c3controls.com					
TERMINAL BLOCKS		CAT. NO.	PCS./PKG.	PRICE/PC.	CAT. NO.	PCS./PKG.	PRICE/PC.
(Standard) Grey		WTB2-TL2SLP	50	\$ 3.06	WTB2-TL2SLN	50	\$ 3.06
ACCESSORIES (See pages 331-333)		CAT. NO.	PCS./PKG.	PRICE/PC.	CAT. NO.	PCS./PKG.	PRICE/PC.
End Barrier							
Grey, Non-Metallic (Installs on 35mm DIN Rail)		WTB2-EB	50	\$ 0.80	WTB2-EB	50	\$ 0.80
Grey, Non-Metallic (Installs on 32mm and 35mm DIN Rail)		WTB2-EB2	50	\$ 0.80	WTB2-EB2	50	\$ 0.80
Steel (Installs on 35mm DIN Rail)		WTB2-EB3	50	\$ 0.80	WTB2-EB3	50	\$ 0.80
Circuit Bridge							
2 Position		WTB2-W4D/2CB	10	\$ 1.10	WTB2-W4D/2CB	10	\$ 1.10
3 Position		WTB2-W4D/3CB	10	\$ 1.60	WTB2-W4D/3CB	10	\$ 1.60
4 Position		WTB2-W4D/4CB	10	\$ 2.10	WTB2-W4D/4CB	10	\$ 2.10
10 Position		WTB2-W4D/10CB	10	\$ 4.90	WTB2-W4D/10CB	10	\$ 4.90
End Plate		WTB2-EPTL2S	50	\$ 0.32	WTB2-EPTL2S	50	\$ 0.32
Marker		WTB2-M2	100	\$ 0.04	WTB2-M2	100	\$ 0.04
Group Markers (See page 331)							
Plated Steel Mounting Rail, DIN							
35mm x 7.5mm - Slotted - 1 Meter		DRMR3	1	\$ 4.50	DRMR3	1	\$ 4.50
35mm x 7.5mm - Slotted - 2 Meters		DRMR6	10	\$ 9.00	DRMR6	10	\$ 9.00
35mm x 15mm - Slotted - 1 Meter		DRMR3D	1	\$ 6.50	DRMR3D	1	\$ 6.50
35mm x 15mm - Slotted - 2 Meters		DRMR6D	1	\$13.00	DRMR6D	1	\$13.00
Aluminum Mounting Rail, DIN							
35mm x 7.5mm - Slotted - 1 Meter		DRMR3A	1	\$ 8.00	DRMR3A	1	\$ 8.00
DIN Rail Support Bracket		WTB2-BRKT1	1	\$ 0.90	WTB2-BRKT1	1	\$ 0.90

Ⓞfor PNP sensors Ⓞfor NPN sensors

IEC DIN RAIL FUSE HOLDER TERMINAL BLOCKS



NOTE: The WTB2-FB1L has a red LED that glows to indicate a blown fuse.

WTB2-FB1				WTB2-FB1L [®]		
SPECIFICATIONS	1/4" X 1-1/4" FUSE			1/4" X 1-1/4" FUSE		
Certifications	 UL 1059 File #: E145984	C22.2 No. 158	 IEC 60947-7-3	 UL 1059 File #: E145984	C22.2 No. 158	 IEC 60947-7-3
Voltage Rating (V)	600	600	600	600	600	600
Maximum Current (A)	6.3	6.3	6.3	6.3	6.3	6.3
WIRE RANGE						
Solid Strand Conductor mm ²	0.5 - 6			0.5 - 6		
Fine Strand Conductor mm ²	0.5 - 4			0.5 - 4		
AWG Conductor	22 - 10			22 - 10		
Wire Strip Length (mm/inches)	9.5 / 0.37			9.5 / 0.37		
Tightening Torque (Nm/Lb-in)	0.5 / 7			0.5 / 7		
OPERATING TEMPERATURE						
Operating Temperature	-20 to +80° C (-4 to +176° F)			-20 to +80° C (-4 to +176° F)		
ROHS COMPLIANCE						
For RoHS compliance documentation by product, refer to www.c3controls.com						
TERMINAL BLOCKS						
(Standard) Grey	CAT. NO.	PCS./PKG.	PRICE/PC.	CAT. NO.	PCS./PKG.	PRICE/PC.
(Standard) Grey for 24V AC/DC	WTB2-FB1	25	\$ 3.30	—	—	—
(Standard) Grey for 110V AC/DC	—	—	—	WTB2-FB1L24	10	\$ 4.90
(Standard) Grey for 220V AC	—	—	—	WTB2-FB1L110	10	\$ 4.90
(Standard) Grey for 220V AC	—	—	—	WTB2-FB1L220	10	\$ 4.90
ACCESSORIES (See pages 331-333)						
End Barrier	CAT. NO.	PCS./PKG.	PRICE/PC.	CAT. NO.	PCS./PKG.	PRICE/PC.
Grey, Non-Metallic (Installs on 35mm DIN Rail)	WTB2-EB	50	\$ 0.80	WTB2-EB	50	\$ 0.80
Grey, Non-Metallic (Installs on 32mm and 35mm DIN Rail)	WTB2-EB2	50	\$ 0.80	WTB2-EB2	50	\$ 0.80
Steel (Installs on 35mm DIN Rail)	WTB2-EB3	50	\$ 0.80	WTB2-EB3	50	\$ 0.80
End Plate	WTB2-EPFB1	50	\$ 0.60	WTB2-EPFB1	50	\$ 0.60
Marker	WTB2-M9	100	\$ 0.06	WTB2-M9	100	\$ 0.06
Group Markers (See page 331)						
Plated Steel Mounting Rail, DIN						
35mm x 7.5mm - Slotted - 1 Meter	DRMR3	1	\$ 4.50	DRMR3	1	\$ 4.50
35mm x 7.5mm - Slotted - 2 Meters	DRMR6	10	\$ 9.00	DRMR6	10	\$ 9.00
35mm x 15mm - Slotted - 1 Meter	DRMR3D	1	\$ 6.50	DRMR3D	1	\$ 6.50
35mm x 15mm - Slotted - 2 Meters	DRMR6D	1	\$13.00	DRMR6D	1	\$13.00
Aluminum Mounting Rail, DIN						
35mm x 7.5mm - Slotted - 1 Meter	DRMR3A	1	\$ 8.00	DRMR3A	1	\$ 8.00
DIN Rail Support Bracket	WTB2-BRKT1	1	\$ 0.90	WTB2-BRKT1	1	\$ 0.90


©with LED indication



FUSE HOLDER TERMINALS

Certain electrical and control systems require fuse protection – fuse holder terminals offer a convenient solution. The fuse holder terminal has a hinged fuse carrier. The fuse can be engaged or disengaged by moving the carrier. Terminals are available to accept 5 x 20mm or 5 x 25mm fuses and 1/4" X 1-1/4" fuses for North American applications. A spare fuse (provided as standard) can be placed in the carrier of WTB2-FB52 terminals. Identification with markers is possible on both the terminals and the fuse carrier. Fuse holder terminals, WTB2-FB52L, include LED indication. A specially designed built-in circuit gives indication when the fuse blows, clearly identifying a fault in the circuit.


IEC DIN RAIL FUSE HOLDER TERMINAL BLOCKS

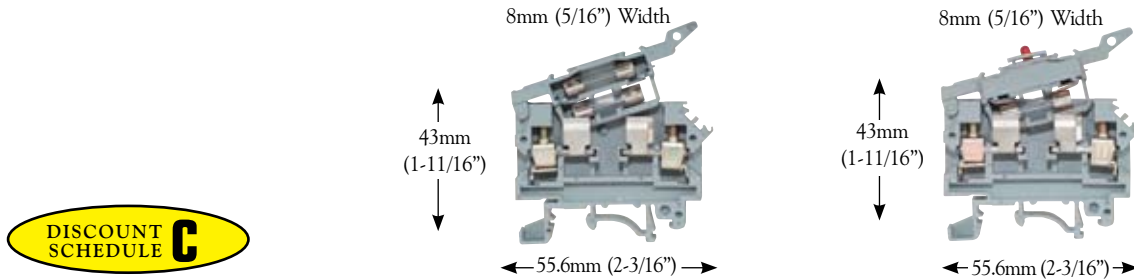

WTB2-FB52				WTB2-FB52L®		
SPECIFICATIONS	5MM X 20/25MM FUSE			5MM X 20/25MM FUSE		
Certifications	 UL 1059 File #: E145984	 C22.2 No. 158 File #: 232541	 IEC 60947-7-3	 UL 1059 File #: E145984	 C22.2 No. 158 File #: 232541	 IEC 60947-7-3
Voltage Rating (V)	600	600	750	600	600	750
Maximum Current (A)	6.3	6.3	6.3	6.3	6.3	6.3
WIRE RANGE						
Solid Strand Conductor mm²	0.5 - 4			0.5 - 4		
Fine Strand Conductor mm²	0.5 - 4			0.5 - 4		
AWG Conductor	22 - 10	22 - 12	—	22 - 10	22 - 12	—
Wire Strip Length (mm/inches)	9.5 / 0.37			9.5 / 0.37		
Tightening Torque (Nm/Lb-in)	0.5 / 7			0.5 / 7		
OPERATING TEMPERATURE						
Operating Temperature	-20 to +80° C (-4 to +176° F)			-20 to +80° C (-4 to +176° F)		
ROHS COMPLIANCE						
For RoHS compliance documentation by product, refer to www.c3controls.com						
TERMINAL BLOCKS						
(Standard) Grey	CAT. NO.	PCS./PKG.	PRICE/PC.	CAT. NO.	PCS./PKG.	PRICE/PC.
(Standard) Grey for 24V AC/DC	WTB2-FB52	100	\$ 2.66	—	—	—
(Standard) Grey for 110V AC/DC	—	—	—	WTB2-FB52L24A	50	\$ 4.70
(Standard) Grey for 220V AC	—	—	—	WTB2-FB52L110A	50	\$ 4.70
	—	—	—	WTB2-FB52L220A	50	\$ 4.70
ACCESSORIES (See pages 331-333)						
	CAT. NO.	PCS./PKG.	PRICE/PC.	CAT. NO.	PCS./PKG.	PRICE/PC.
End Barrier						
Grey, Non-Metallic (Installs on 35mm DIN Rail)	WTB2-EB	50	\$ 0.80	WTB2-EB	50	\$ 0.80
Grey, Non-Metallic (Installs on 32mm and 35mm DIN Rail)	WTB2-EB2	50	\$ 0.80	WTB2-EB2	50	\$ 0.80
Steel (Installs on 35mm DIN Rail)	WTB2-EB3	50	\$ 0.80	WTB2-EB3	50	\$ 0.80
End Plate	WTB2-EPFB52	50	\$ 0.60	WTB2-EPFB52	50	\$ 0.60
Partition Plate	WTB2-PPFB52	50	\$ 0.65	WTB2-PPFB52	50	\$ 0.65
Marker	WTB2-M8® or -M2®	100/100	\$ 0.04/\$ 0.04	WTB2-M8® or -M2®	100/100	\$ 0.04/\$ 0.04
Group Markers (See page 331)						
Plated Steel Mounting Rail, DIN						
35mm x 7.5mm - Slotted - 1 Meter	DRMR3	1	\$ 4.50	DRMR3	1	\$ 4.50
35mm x 7.5mm - Slotted - 2 Meters	DRMR6	10	\$ 9.00	DRMR6	10	\$ 9.00
35mm x 15mm - Slotted - 1 Meter	DRMR3D	1	\$ 6.50	DRMR3D	1	\$ 6.50
35mm x 15mm - Slotted - 2 Meters	DRMR6D	1	\$13.00	DRMR6D	1	\$13.00
Aluminum Mounting Rail, DIN						
35mm x 7.5mm - Slotted - 1 Meter	DRMR3A	1	\$ 8.00	DRMR3A	1	\$ 8.00
DIN Rail Support Bracket	WTB2-BRKT1	1	\$ 0.90	WTB2-BRKT1	1	\$ 0.90

®with LED indication
 ®on terminal
 ®on fuse carrier

IEC DIN RAIL FUSE HOLDER TERMINAL BLOCKS



NOTE: The WTB2-FB130L has a red LED that glows to indicate a blown fuse.

WTB2-FB130-NF

WTB2-FB130L®

SPECIFICATIONS	1/4" X 1-1/4" FUSE			1/4" X 1-1/4" FUSE		
Certifications	 UL 1059 File #: E145984	C22.2 No. 158	 IEC 60947-7-3	 UL 1059 File #: E145984	C22.2 No. 158	 IEC 60947-7-3
Voltage Rating (V)	600	600	750	600	600	750
Maximum Current (A)	30	30	10	30	30	10
WIRE RANGE						
Solid Strand Conductor mm²	0.5 - 16			0.5 - 16		
Fine Strand Conductor mm²	0.5 - 10			0.5 - 10		
AWG Conductor	20 - 6			20 - 6		
Wire Strip Length (mm/inches)	12 / 0.47			12 / 0.47		
Tightening Torque (Nm/Lb-in)	1.6 / 14			1.6 / 14		
OPERATING TEMPERATURE						
Operating Temperature	-20 to +80° C (-4 to +176° F)			-20 to +80° C (-4 to +176° F)		
ROHS COMPLIANCE						
For RoHS compliance documentation by product, refer to www.c3controls.com						
TERMINAL BLOCKS						
	CAT. NO.	PCS./PKG.	PRICE/PC.	CAT. NO.	PCS./PKG.	PRICE/PC.
(Standard) Grey	WTB2-FB130-NF	10	\$ 3.85	—	—	—
(Standard) Grey for 24V AC/DC	—	—	—	WTB2-FB130L24A-NF	10	\$ 5.50
(Standard) Grey for 110V AC/DC	—	—	—	WTB2-FB130L110A-NF	10	\$ 5.50
(Standard) Grey for 220V AC	—	—	—	WTB2-FB130L220A-NF	10	\$ 5.50
ACCESSORIES (See pages 331-333)						
	CAT. NO.	PCS./PKG.	PRICE/PC.	CAT. NO.	PCS./PKG.	PRICE/PC.
End Barrier						
Grey, Non-Metallic (Installs on 35mm DIN Rail)	WTB2-EB	50	\$ 0.80	WTB2-EB	50	\$ 0.80
Grey, Non-Metallic (Installs on 32mm and 35mm DIN Rail)	WTB2-EB2	50	\$ 0.80	WTB2-EB2	50	\$ 0.80
Steel (Installs on 35mm DIN Rail)	WTB2-EB3	50	\$ 0.80	WTB2-EB3	50	\$ 0.80
Marker	WTB2-M10	100	\$ 0.08	WTB2-M10	100	\$ 0.08
Group Markers (See page 331)						
Plated Steel Mounting Rail, DIN						
35mm x 7.5mm - Slotted - 1 Meter	DRMR3	1	\$ 4.50	DRMR3	1	\$ 4.50
35mm x 7.5mm - Slotted - 2 Meters	DRMR6	10	\$ 9.00	DRMR6	10	\$ 9.00
35mm x 15mm - Slotted - 1 Meter	DRMR3D	1	\$ 6.50	DRMR3D	1	\$ 6.50
35mm x 15mm - Slotted - 2 Meters	DRMR6D	1	\$13.00	DRMR6D	1	\$13.00
Aluminum Mounting Rail, DIN						
35mm x 7.5mm - Slotted - 1 Meter	DRMR3A	1	\$ 8.00	DRMR3A	1	\$ 8.00
DIN Rail Support Bracket	WTB2-BRKT1	1	\$ 0.90	WTB2-BRKT1	1	\$ 0.90


®with LED indication



DISCONNECT TERMINALS

Disconnect terminal blocks provide a convenient means for isolating and disconnecting control circuits. The WTB2-FB52DB includes a hinged carrier with a tin plated brass link. The WTB2-DB1 includes a hinged lever operating a knife contact. All screw terminals of the disconnect terminal blocks have special screw heads which accept test probes.

IEC DIN RAIL DISCONNECT TERMINAL BLOCKS

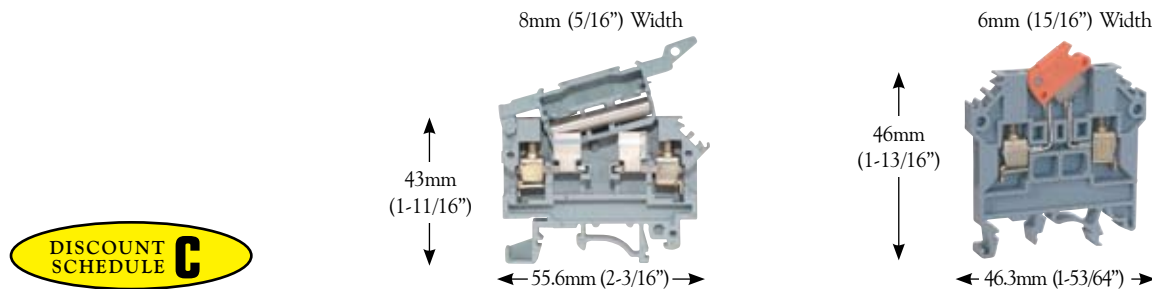


WTB2-FB52DB

WTB2-DB1

SPECIFICATIONS		SINGLE-CIRCUIT TERMINAL BLOCK			SINGLE-CIRCUIT TERMINAL BLOCK		
Certifications		 UL 1059 File #: E145984	 C22.2 No. 158 File #: 232541	 IEC 60947-7-1	 UL 1059 File #: E145984	 C22.2 No. 158 File #: 232541	 IEC 60947-7-1
Voltage Rating	(V)	600	600	750	600	600	750
Maximum Current	(A)	6.3	6.3	6.3	35	16	16
WIRE RANGE							
Solid Strand Conductor	mm ²	0.5 - 4			0.5 - 4		
Fine Strand Conductor	mm ²	0.5 - 4			0.5 - 4		
AWG Conductor		22 - 12			22 - 10	22 - 12	—
Wire Strip Length	(mm/inches)	9.5 / 0.37			9 / 0.35		
Tightening Torque	(Nm/Lb-in)	0.5 / 7			0.5 / 7		
OPERATING TEMPERATURE							
Operating Temperature		-20 to +80° C (-4 to +176° F)			-20 to +80° C (-4 to +176° F)		
ROHS COMPLIANCE		For RoHS compliance documentation by product, refer to www.c3controls.com					
TERMINAL BLOCKS		CAT. NO.	PCS./PKG.	PRICE/PC.	CAT. NO.	PCS./PKG.	PRICE/PC.
(Standard) Grey		WTB2-FB52DB	100	\$ 1.75	WTB2-DB1	50	\$ 1.75
ACCESSORIES (See pages 331-333)		CAT. NO.	PCS./PKG.	PRICE/PC.	CAT. NO.	PCS./PKG.	PRICE/PC.
End Barrier							
Grey, Non-Metallic (Installs on 35mm DIN Rail)		WTB2-EB	50	\$ 0.80	WTB2-EB	50	\$ 0.80
Grey, Non-Metallic (Installs on 32mm and 35mm DIN Rail)		WTB2-EB2	50	\$ 0.80	WTB2-EB2	50	\$ 0.80
Steel (Installs on 35mm DIN Rail)		WTB2-EB3	50	\$ 0.80	WTB2-EB3	50	\$ 0.80
End Plate		WTB2-EPFB52	50	\$ 0.60	WTB2-EPDB1	50	\$ 0.60
Partition Plate		WTB2-PPFB52	50	\$ 0.65	—	—	—
Marker		WTB2-M8 ^① or -M2 ^②	100 / 100	\$ 0.04 / \$ 0.04	WTB2-M6	100	\$ 0.04
Group Markers (See page 331)							
Plated Steel Mounting Rail, DIN							
35mm x 7.5mm - Slotted - 1 Meter		DRMR3	1	\$ 4.50	DRMR3	1	\$ 4.50
35mm x 7.5mm - Slotted - 2 Meters		DRMR6	10	\$ 9.00	DRMR6	10	\$ 9.00
35mm x 15mm - Slotted - 1 Meter		DRMR3D	1	\$ 6.50	DRMR3D	1	\$ 6.50
35mm x 15mm - Slotted - 2 Meters		DRMR6D	1	\$13.00	DRMR6D	1	\$13.00
Aluminum Mounting Rail, DIN							
35mm x 7.5mm - Slotted - 1 Meter		DRMR3A	1	\$ 8.00	DRMR3A	1	\$ 8.00
DIN Rail Support Bracket		WTB2-BRKT1	1	\$ 0.90	WTB2-BRKT1	1	\$ 0.90

①on terminal
②on fuse carrier

IEC POWER DISTRIBUTION TERMINAL BLOCKS




WTB2-PDB80				
SPECIFICATIONS		SINGLE-CIRCUIT TERMINAL BLOCK		
Certifications		 UL 1059 File #: E145984	 C22.2 No. 158	 IEC 60947-7-1
Voltage Rating	(V)	600	600	630
Maximum Current	(A)	80	80	76
WIRE RANGE				
Stranded Conductor	mm ²	Line / Load	3 x 6 - 16	
	mm ²	Load Side	4 x 2.5 - 6	
AWG Conductor		Line / Load	3 x 8 - 4	
		Load Side	4 x 14 - 10	
Wire Strip Length	mm/in	Line / Load	20 / 10.79	
	mm/in	Load Side	10 / 0.39	
Tightening Torque	Nm	Line / Load	1.6 / 14	
	Nm	Load Side	0.8 / 7	
OPERATING TEMPERATURE				
Operating Temperature		-20 to +80° C (-4 to +176° F)		
ROHS COMPLIANCE		For RoHS compliance documentation by product, refer to www.c3controls.com		
TERMINAL BLOCKS		CAT. NO.	PCS./PKG.	PRICE/PC.
(Standard) Grey		WTB2-PDB80	10	\$ 8.50
ACCESSORIES (See pages 331-333)		CAT. NO.	PCS./PKG.	PRICE/PC.
End Barrier				
Grey, Non-Metallic (Installs on 35mm DIN Rail)		WTB2-EB	50	\$ 0.80
Grey, Non-Metallic (Installs on 32mm and 35mm DIN Rail)		WTB2-EB2	50	\$ 0.80
Steel (Installs on 35mm DIN Rail)		WTB2-EB3	50	\$ 0.80
Group Markers (See page 331)				
Plated Steel Mounting Rail, DIN				
35mm x 7.5mm - Slotted - 1 Meter		DRMR3	1	\$ 4.50
35mm x 7.5mm - Slotted - 2 Meters		DRMR6	10	\$ 9.00
35mm x 15mm - Slotted - 1 Meter		DRMR3D	1	\$ 6.50
35mm x 15mm - Slotted - 2 Meters		DRMR6D	1	\$13.00
Aluminum Mounting Rail, DIN				
35mm x 7.5mm - Slotted - 1 Meter		DRMR3A	1	\$ 8.00
DIN Rail Support Bracket		WTB2-BRKT1	1	\$ 0.90

MINIATURE PANEL MOUNT, FEED-THROUGH SCREW CLAMP TERMINALS



The miniature modular panel mounting screw clamp terminals ensure extremely compact wiring. The terminals are “add-on” and can be stacked to form multipole assemblies. The stacked assemblies are fitted with end plates on both ends for easy installation on to the panel. For assemblies of more than twenty terminals, additional end plates must be mounted after every twentieth terminal block for rigidity of the assembly.

IEC MINIATURE FEED THROUGH PANEL MOUNT TERMINAL BLOCKS



WTB2-MW4			
SPECIFICATIONS	SINGLE-CIRCUIT TERMINAL BLOCK		
Certifications	 UL 1059 File #: E145984	 C22.2 No. 158 File #: 232541	 IEC 60947-7-1
Voltage Rating (V)	300	300	400
Maximum Current (A)	35	25	32
WIRE RANGE			
Solid Strand Conductor mm²	0.5 - 6		
Fine Strand Conductor mm²	0.5 - 4		
AWG Conductor	22 - 10	22 - 12	—
Wire Strip Length (mm/inches)	9 / 0.35		
Tightening Torque (Nm/Lb-in)	0.5 / 7		
OPERATING TEMPERATURE			
Operating Temperature	-20 to +80° C (-4 to +176° F)		
ROHS COMPLIANCE			
	For RoHS compliance documentation by product, refer to www.c3controls.com		
TERMINAL BLOCKS			
(Standard) Grey	CAT. NO.	PCS./PKG.	PRICE/PC.
	WTB2-MW4	100	\$0.51
ACCESSORIES (See pages 331-333)			
	CAT. NO.	PCS./PKG.	PRICE/PC.
Circuit Bridge			
2 Position	WTB2-W4/2CB	10	\$1.10
3 Position	WTB2-W4/3CB	10	\$1.60
4 Position	WTB2-W4/4CB	10	\$2.10
10 Position	WTB2-W4/10CB	10	\$4.90
End Plate	WTB2-EPMW4	50	\$0.25
Marker	WTB2-M2	100	\$0.04
Group Markers (See page 331)			

IEC FEED THROUGH DIN RAIL TERMINAL BLOCKS



DISCOUNT
SCHEDULE **C**

WTB2S-W2

WTB2S-W4

SPECIFICATIONS		SINGLE-CIRCUIT TERMINAL BLOCK			SINGLE-CIRCUIT TERMINAL BLOCK		
Certifications		 UL 1059 File #: E145984	 C22.2 No. 158 File #: 232541	 IEC 60947-7-1	 UL 1059 File #: E145984	 C22.2 No. 158 File #: 232541	 IEC 60947-7-1
Voltage Rating	(V)	600	600	750	600	600	750
Maximum Current	(A)	20	20	24	25	25	32
WIRE RANGE							
Solid Strand Conductor	mm ²	0.5 - 4			0.5 - 6		
Fine Strand Conductor	mm ²	0.5 - 2.5			0.5 - 4		
AWG Conductor		22 - 14			22 - 12		
Wire Strip Length	(mm/inches)	9 / 0.35			9 / 0.35		
OPERATING TEMPERATURE							
Operating Temperature		-20 to +80° C (-4 to +176° F)			-20 to +80° C (-4 to +176° F)		
ROHS COMPLIANCE		For RoHS compliance documentation by product, refer to www.c3controls.com					
TERMINAL BLOCKS		CAT. NO.	PCS./PKG.	PRICE/PC.	CAT. NO.	PCS./PKG.	PRICE/PC.
(Standard) Grey		WTB2S-W2	100	\$ 0.47	WTB2S-W4	50	\$ 0.47
Black		WTB2S-W2-BK	100	\$ 0.52	WTB2S-W4-BK	50	\$ 0.52
Blue		WTB2S-W2-BE	100	\$ 0.52	WTB2S-W4-BE	50	\$ 0.52
Green		WTB2S-W2-GN	100	\$ 0.52	WTB2S-W4-GN	50	\$ 0.52
Orange		WTB2S-W2-OR	100	\$ 0.52	WTB2S-W4-OR	50	\$ 0.52
Red		WTB2S-W2-RD	100	\$ 0.52	WTB2S-W4-RD	50	\$ 0.52
White		WTB2S-W2-WH	100	\$ 0.52	WTB2S-W4-WH	50	\$ 0.52
Yellow		WTB2S-W2-YW	100	\$ 0.52	WTB2S-W4-YW	50	\$ 0.52
ACCESSORIES (See pages 331-333)		CAT. NO.	PCS./PKG.	PRICE/PC.	CAT. NO.	PCS./PKG.	PRICE/PC.
End Barrier							
Grey, Non-Metallic (Installs on 35mm DIN Rail)		WTB2-EB	50	\$ 0.80	WTB2-EB	50	\$ 0.80
Grey, Non-Metallic (Installs on 32mm and 35mm DIN Rail)		WTB2-EB2	50	\$ 0.80	WTB2-EB2	50	\$ 0.80
Steel (Installs on 35mm DIN Rail)		WTB2-EB3	50	\$ 0.80	WTB2-EB3	50	\$ 0.80
Circuit Bridge							
(for adjacent terminal blocks)	2 Position	WTB2S-W2/2CB	100	\$ 0.42	WTB2S-W4/2CB	100	\$ 0.47
(for alternate terminal blocks)	2 Position	WTB2S-W2/2AB	100	\$ 0.42	WTB2S-W4/2AB	100	\$ 0.47
End Plate		WTB2S-EPW2	50	\$ 0.25	WTB2S-EPW4	50	\$ 0.25
Partition Plate		WTB2S-PPW2	50	\$ 0.27	WTB2S-PPW4	50	\$ 0.27
Marker		WTB2-M5	100	\$ 0.04	WTB2-M6	100	\$ 0.04
Group Markers (See page 331)							
Plated Steel Mounting Rail, DIN							
35mm x 7.5mm - Slotted - 1 Meter		DRMR3	1	\$ 4.50	DRMR3	1	\$ 4.50
35mm x 7.5mm - Slotted - 2 Meters		DRMR6	10	\$ 9.00	DRMR6	10	\$ 9.00
35mm x 15mm - Slotted - 1 Meter		DRMR3D	1	\$ 6.50	DRMR3D	1	\$ 6.50
35mm x 15mm - Slotted - 2 Meters		DRMR6D	1	\$13.00	DRMR6D	1	\$13.00
Aluminum Mounting Rail, DIN							
35mm x 7.5mm - Slotted - 1 Meter		DRMR3A	1	\$ 8.00	DRMR3A	1	\$ 8.00
DIN Rail Support Bracket		WTB2-BRKT1	1	\$ 0.90	WTB2-BRKT1	1	\$ 0.90

SEE BOTTOM OF PAGE 323 FOR COLOR OPTIONS.

IEC FEED THROUGH DIN RAIL TERMINAL BLOCKS


c3controls WTB2 Series of feed through spring clamp terminal blocks have been designed to meet the strict specifications and standards of UL, CSA, and IEC. The WTB2 Series of terminal blocks is manufactured with a direct mounting foot for 35mm standard DIN rails.

In addition to the mounting feature, the WTB2 Series is constructed using only the best available materials for both the housing and clamping bodies and parts. The housing is molded out of an unbreakable high quality thermoplastic — polyamide 6.6. The metal bodies are made of a high quality zinc plated, brass and electrolytic copper to provide excellent conductivity and minimize corrosion problems.

The WTB2 Series accepts wires as small as 0.5mm² (22 AWG) and as large as 10mm² (8 AWG), up to 50 Amps. The wiring to the terminal blocks is made easy by the funnel entry design of the housing. Accessories such as circuit bridges, end plates, partition plates, and markers make the WTB2 Series a flexible alternative to any feed through wiring or power distribution application.

SPECIAL FEATURES

C3CONTROLS SPRING CLAMP TERMINAL BLOCKS REDUCE INSTALLED COSTS AND ENSURE RELIABLE CONNECTIONS!

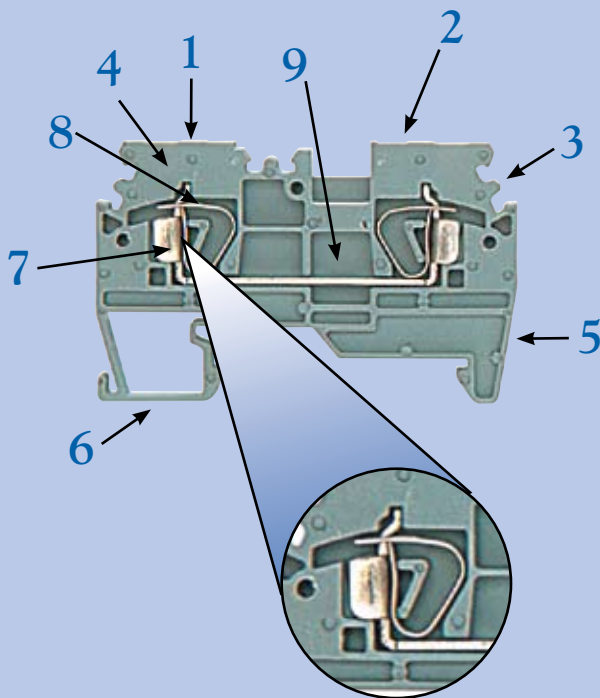


1. Construction provides IP20 protection to guard against accidental contact with live parts — even with accessories installed.
2. Convenient top wiring. The spring clamp is opened with commonly available screwdrivers, enabling the conductor to be easily inserted in the opening of the spring clamp.
3. Marking system allows for fast and easy circuit identification. Blank, custom, and standard markers are available.
4. Funneled-wiring entry with finger safe IP20 terminals simplifies wiring for fast and easy installations.
5. Housing is molded out of an unbreakable high quality polyamide 6.6 thermoplastic. Available in eight colors: grey, black, blue, green, orange, red, white, and yellow for quick identification of control circuit types.
6. DIN rail mounting foot allows for direct mounting on 35mm DIN rails and is designed for easy snap on, snap off assembly — the most sturdy and rugged mounting foot on the market!
7. Our zinc and electroplated clamping yokes and current bars provide superior conductivity, superb corrosion resistance in normal and hazardous environments, and in conjunction with the stainless steel spring clamp are vibration resistant.
8. Pre-loaded 302 stainless steel spring clamps hold the wire securely against the current bar, and won't loosen, even in high vibration applications.
9. Internal jumpers (circuit bridges) are available for adjacent and alternate terminal blocks, which frees up valuable wiring space and reduces assembly time.

ADDITIONAL COLORS AVAILABLE FOR IEC TERMINAL BLOCKS



IEC FEED THROUGH DIN RAIL TERMINAL BLOCKS

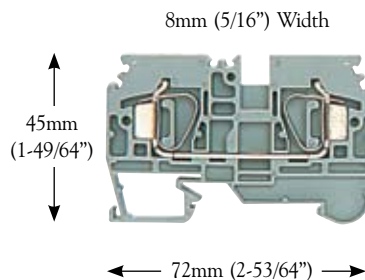

WTB2S-W6			
SPECIFICATIONS	SINGLE-CIRCUIT TERMINAL BLOCK		
Certifications	 UL 1059 File #: E145984	 C22.2 No. 158 File #: 232541	 IEC 60947-7-1
Voltage Rating (V)	600	600	750
Maximum Current (A)	50	50	41
WIRE RANGE			
Solid Strand Conductor mm²	0.5 - 10		
Fine Strand Conductor mm²	0.5 - 6		
AWG Conductor	22 - 8		
Wire Strip Length (mm/inches)	12 / 0.47		
OPERATING TEMPERATURE			
Operating Temperature	-20 to +80° C (-4 to +176° F)		
ROHS COMPLIANCE			
	For RoHS compliance documentation by product, refer to www.c3controls.com		
TERMINAL BLOCKS			
	CAT. NO.	PCS./PKG.	PRICE/PC.
(Standard) Grey	WTB2S-W6	50	\$ 0.74
Black	WTB2S-W6-BK	50	\$ 0.78
Blue	WTB2S-W6-BE	50	\$ 0.78
Green	WTB2S-W6-GN	50	\$ 0.78
Orange	WTB2S-W6-OR	50	\$ 0.78
Red	WTB2S-W6-RD	50	\$ 0.78
White	WTB2S-W6-WH	50	\$ 0.78
Yellow	WTB2S-W6-YW	50	\$ 0.78
ACCESSORIES (See pages 331-333)			
	CAT. NO.	PCS./PKG.	PRICE/PC.
End Barrier			
Grey, Non-Metallic (Installs on 35mm DIN Rail)	WTB2-EB	50	\$ 0.80
Grey, Non-Metallic (Installs on 32mm and 35mm DIN Rail)	WTB2-EB2	50	\$ 0.80
Steel (Installs on 35mm DIN Rail)	WTB2-EB3	50	\$ 0.80
Circuit Bridge			
(for adjacent terminal blocks) 2 Position	WTB2S-W6/2CB	100	\$ 0.66
(for alternate terminal blocks) 2 Position	WTB2S-W6/2AB	100	\$ 0.66
End Plate	WTB2S-EPW6	50	\$ 0.25
Partition Plate	WTB2S-PPW6	50	\$ 0.27
Marker	WTB2-M8	100	\$ 0.04
Group Markers (See page 331)			
Plated Steel Mounting Rail, DIN			
35mm x 7.5mm - Slotted - 1 Meter	DRMR3	1	\$ 4.50
35mm x 7.5mm - Slotted - 2 Meters	DRMR6	10	\$ 9.00
35mm x 15mm - Slotted - 1 Meter	DRMR3D	1	\$ 6.50
35mm x 15mm - Slotted - 2 Meters	DRMR6D	1	\$13.00
Aluminum Mounting Rail, DIN			
35mm x 7.5mm - Slotted - 1 Meter	DRMR3A	1	\$ 8.00
DIN Rail Support Bracket	WTB2-BRKT1	1	\$ 0.90


SEE BOTTOM OF PAGE 323 FOR COLOR OPTIONS.

DISCOUNT
SCHEDULE **C**

SPRING CLAMP GROUND TERMINALS

Spring clamp ground terminal blocks are offered for quick connections and are ideal for use with other spring clamp terminal blocks. The spring clamp is operated by using a screwdriver to provide access for wiring through the opening in the spring clamp. The wire is held against current bar directly by a pre-stressed spring clamp. Specially designed alloy feet help to achieve very low contact resistance and vibration proof grounding. Spring clamp ground terminals can be mounted on 35mm DIN rails along with other terminals, and eliminate the need for a separate grounding bus bar. The ground terminal block profile is the same as the feed through terminal blocks of same wire size.

IEC DIN RAIL GROUND TERMINAL BLOCKS

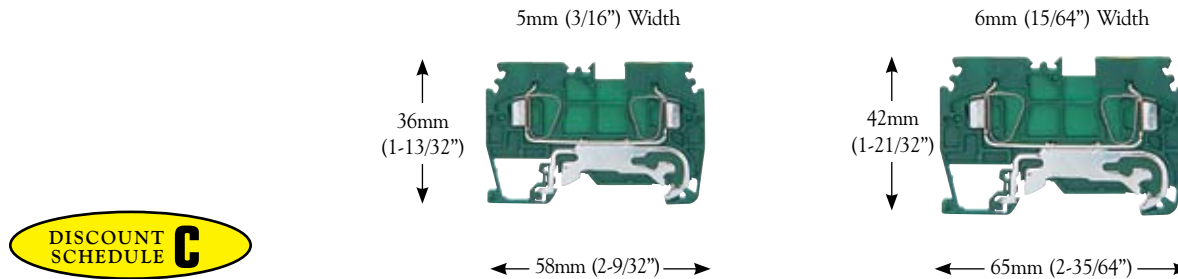


WTB2S-W2G

WTB2S-W4G

SPECIFICATIONS	SINGLE-CIRCUIT TERMINAL BLOCK			SINGLE-CIRCUIT TERMINAL BLOCK		
Certifications	 UL 1059 File #: E145984	C22.2 No. 158	 IEC 60947-7-2	 UL 1059 File #: E145984	C22.2 No. 158	 IEC 60947-7-2
WIRE RANGE						
Solid Strand Conductor mm ²	0.5 - 4			0.5 - 6		
Fine Strand Conductor mm ²	0.5 - 2.5			0.5 - 4		
AWG Conductor	22 - 14			22 - 12		
Wire Strip Length (mm/inches)	9 / 0.35			9 / 0.35		
OPERATING TEMPERATURE						
Operating Temperature	-20 to +80° C (-4 to +176° F)			-20 to +80° C (-4 to +176° F)		
ROHS COMPLIANCE	For RoHS compliance documentation by product, refer to www.c3controls.com					
TERMINAL BLOCKS	CAT. NO.	PCS./PKG.	PRICE/PC.	CAT. NO.	PCS./PKG.	PRICE/PC.
Green insulation housing with metal mounting foot.	WTB2S-W2G	100	\$ 1.75	WTB2S-W4G	50	\$ 1.75
ACCESSORIES (See pages 331-333)	CAT. NO.	PCS./PKG.	PRICE/PC.	CAT. NO.	PCS./PKG.	PRICE/PC.
End Barrier						
Grey, Non-Metallic (Installs on 35mm DIN Rail)	WTB2-EB	50	\$ 0.80	WTB2-EB	50	\$ 0.80
Grey, Non-Metallic (Installs on 32mm and 35mm DIN Rail)	WTB2-EB2	50	\$ 0.80	WTB2-EB2	50	\$ 0.80
Steel (Installs on 35mm DIN Rail)	WTB2-EB3	50	\$ 0.80	WTB2-EB3	50	\$ 0.80
Marker	WTB2-M5	100	\$ 0.04	WTB2-M6	100	\$ 0.04
Group Markers (See page 331)						
Plated Steel Mounting Rail, DIN						
35mm x 7.5mm - Slotted - 1 Meter	DRMR3	1	\$ 4.50	DRMR3	1	\$ 4.50
35mm x 7.5mm - Slotted - 2 Meters	DRMR6	10	\$ 9.00	DRMR6	10	\$ 9.00
35mm x 15mm - Slotted - 1 Meter	DRMR3D	1	\$ 6.50	DRMR3D	1	\$ 6.50
35mm x 15mm - Slotted - 2 Meters	DRMR6D	1	\$13.00	DRMR6D	1	\$13.00
Aluminum Mounting Rail, DIN						
35mm x 7.5mm - Slotted - 1 Meter	DRMR3A	1	\$ 8.00	DRMR3A	1	\$ 8.00
DIN Rail Support Bracket	WTB2-BRKT1	1	\$ 0.90	WTB2-BRKT1	1	\$ 0.90

IEC DIN RAIL GROUND TERMINAL BLOCKS

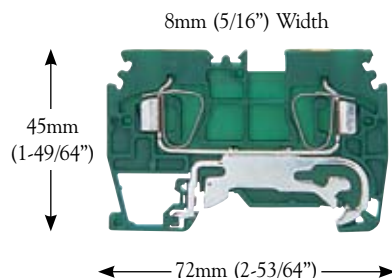


WTB2S-W6G			
SPECIFICATIONS	SINGLE-CIRCUIT TERMINAL BLOCK		
Certifications	 UL 1059 File #: E145984	C22.2 No. 158	 IEC 60947-7-2
WIRE RANGE			
Solid Strand Conductor mm ²	0.5 - 10		
Fine Strand Conductor mm ²	0.5 - 6		
AWG Conductor	22 - 8		
Wire Strip Length (mm/inches)	12 / 0.47		
OPERATING TEMPERATURE			
Operating Temperature	-20 to +80° C (-4 to +176° F)		
ROHS COMPLIANCE	For RoHS compliance documentation by product, refer to www.c3controls.com		
TERMINAL BLOCKS	CAT. NO.	PCS./PKG.	PRICE/PC.
Green insulation housing with metal mounting foot	WTB2S-W6G	50	\$ 2.28
ACCESSORIES (See pages 331-333)	CAT. NO.	PCS./PKG.	PRICE/PC.
End Barrier			
Grey, Non-Metallic (Installs on 35mm DIN Rail)	WTB2-EB	50	\$ 0.80
Grey, Non-Metallic (Installs on 32mm and 35mm DIN Rail)	WTB2-EB2	50	\$ 0.80
Steel (Installs on 35mm DIN Rail)	WTB2-EB3	50	\$ 0.80
Marker	WTB2-M8	100	\$ 0.04
Group Markers (See page 331)			
Plated Steel Mounting Rail, DIN			
35mm x 7.5mm - Slotted - 1 Meter	DRMR3	1	\$ 4.50
35mm x 7.5mm - Slotted - 2 Meters	DRMR6	10	\$ 9.00
35mm x 15mm - Slotted - 1 Meter	DRMR3D	1	\$ 6.50
35mm x 15mm - Slotted - 2 Meters	DRMR6D	1	\$13.00
Aluminum Mounting Rail, DIN			
35mm x 7.5mm - Slotted - 1 Meter	DRMR3A	1	\$ 8.00
DIN Rail Support Bracket	WTB2-BRKT1	1	\$ 0.90

MULTI-CONDUCTOR SPRING CLAMP

The multi-conductor spring clamp terminals offer a reliable solution for multiple wire connections. The terminal eliminates conventional cross connections, looping wires and reliability problems encountered when connecting two wires in one clamp. The terminals provide multiple connection points in the terminal itself, and the possibility of further multiplication of connections with circuit bridges. The multi-conductor terminal blocks can even be bridged to standard feed through spring clamp terminal blocks of same conductor size.

WTB2S-W*-12 features one termination point on one side and two termination points on the other side, while the WTB2S-W*-22 has two termination points on each side. Bridging facility is at the center of the terminals.

IEC MULTI-CONDUCTOR FEED THROUGH DIN RAIL TERMINAL BLOCKS

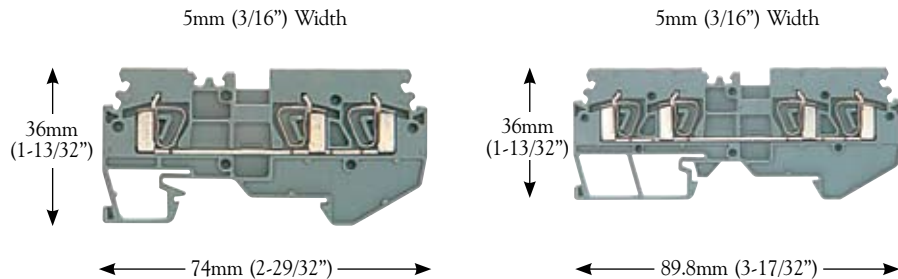


DISCOUNT
SCHEDULE **C**

WTB2S-W2-12

WTB2S-W2-22

SPECIFICATIONS		SINGLE-CIRCUIT TERMINAL BLOCK			SINGLE-CIRCUIT TERMINAL BLOCK		
Certifications		 UL 1059 File #: E145984	C22.2 No. 158	 IEC 60947-7-1	 UL 1059 File #: E145984	C22.2 No. 158	 IEC 60947-7-1
Voltage Rating	(V)	600	600	750	600	600	750
Maximum Current	(A)	20	20	24	20	20	24
WIRE RANGE							
Solid Strand Conductor	mm²	0.5 - 4			0.5 - 4		
Fine Strand Conductor	mm²	0.5 - 2.5			0.5 - 2.5		
AWG Conductor		22 - 14			22 - 14		
Wire Strip Length	(mm/inches)	9 / 0.35			9 / 0.35		
OPERATING TEMPERATURE							
Operating Temperature		-20 to +80° C (-4 to +176° F)			-20 to +80° C (-4 to +176° F)		
ROHS COMPLIANCE		For RoHS compliance documentation by product, refer to www.c3controls.com					
TERMINAL BLOCKS		CAT. NO.	PCS./PKG.	PRICE/PC.	CAT. NO.	PCS./PKG.	PRICE/PC.
(Standard) Grey		WTB2S-W2-12	100	\$ 0.68	WTB2S-W2-22	100	\$ 0.72
ACCESSORIES (See pages 331-333)		CAT. NO.	PCS./PKG.	PRICE/PC.	CAT. NO.	PCS./PKG.	PRICE/PC.
End Barrier							
Grey, Non-Metallic (Installs on 35mm DIN Rail)		WTB2-EB	50	\$ 0.80	WTB2-EB	50	\$ 0.80
Grey, Non-Metallic (Installs on 32mm and 35mm DIN Rail)		WTB2-EB2	50	\$ 0.80	WTB2-EB2	50	\$ 0.80
Steel (Installs on 35mm DIN Rail)		WTB2-EB3	50	\$ 0.80	WTB2-EB3	50	\$ 0.80
Circuit Bridge							
(for adjacent terminal blocks)	2 Position	WTB2S-W2/2CB	100	\$ 0.42	WTB2S-W2/2CB	100	\$ 0.42
(for alternate terminal blocks)	2 Position	WTB2S-W2/2AB	100	\$ 0.42	WTB2S-W2/2AB	100	\$ 0.42
End Plate		WTB2S-EPW2-12	50	\$ 0.32	WTB2S-EPW2-22	50	\$ 0.32
Partition Plate		WTB2S-PPW2-12	50	\$ 0.36	WTB2S-PPW2-22	50	\$ 0.36
Marker		WTB2-M5	100	\$ 0.04	WTB2-M5	100	\$ 0.04
Group Markers (See page 331)							
Plated Steel Mounting Rail, DIN							
35mm x 7.5mm - Slotted - 1 Meter		DRMR3	1	\$ 4.50	DRMR3	1	\$ 4.50
35mm x 7.5mm - Slotted - 2 Meters		DRMR6	10	\$ 9.00	DRMR6	10	\$ 9.00
35mm x 15mm - Slotted - 1 Meter		DRMR3D	1	\$ 6.50	DRMR3D	1	\$ 6.50
35mm x 15mm - Slotted - 2 Meters		DRMR6D	1	\$13.00	DRMR6D	1	\$13.00
Aluminum Mounting Rail, DIN							
35mm x 7.5mm - Slotted - 1 Meter		DRMR3A	1	\$ 8.00	DRMR3A	1	\$ 8.00
DIN Rail Support Bracket		WTB2-BRKT1	1	\$ 0.90	WTB2-BRKT1	1	\$ 0.90

IEC MULTI-CONDUCTOR FEED THROUGH DIN RAIL TERMINAL BLOCKS

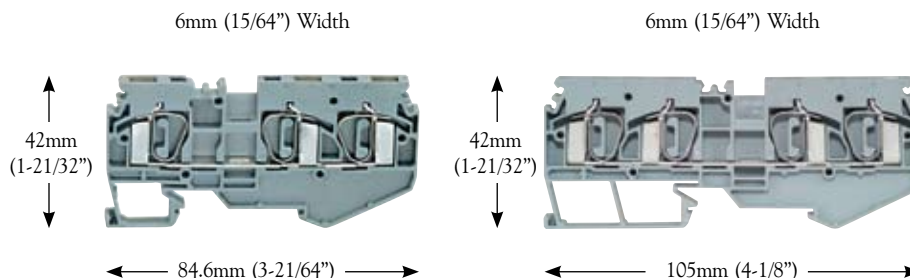


DISCOUNT
SCHEDULE **C**

WTB2S-W4-12

WTB2S-W4-22

SPECIFICATIONS		SINGLE-CIRCUIT TERMINAL BLOCK			SINGLE-CIRCUIT TERMINAL BLOCK		
Certifications		 UL 1059 File #: E145984	C22.2 No. 158	 IEC 60947-7-1	 UL 1059 File #: E145984	C22.2 No. 158	 IEC 60947-7-1
Voltage Rating	(V)	600	600	750	600	600	750
Maximum Current	(A)	25	25	32	25	25	32
WIRE RANGE							
Solid Strand Conductor	mm ²	0.5 - 6			0.5 - 6		
Fine Strand Conductor	mm ²	0.5 - 4			0.5 - 4		
AWG Conductor		22 - 12			22 - 12		
Wire Strip Length	(mm/inches)	9 / 0.35			9 / 0.35		
OPERATING TEMPERATURE							
Operating Temperature		-20 to +80° C (-4 to +176° F)			-20 to +80° C (-4 to +176° F)		
ROHS COMPLIANCE		For RoHS compliance documentation by product, refer to www.c3controls.com					
TERMINAL BLOCKS		CAT. NO.	PCS./PKG.	PRICE/PC.	CAT. NO.	PCS./PKG.	PRICE/PC.
(Standard) Grey		WTB2S-W4-12	100	\$ 0.98	WTB2S-W4-22	100	\$ 1.26
ACCESSORIES (See pages 331-333)		CAT. NO.	PCS./PKG.	PRICE/PC.	CAT. NO.	PCS./PKG.	PRICE/PC.
End Barrier							
Grey, Non-Metallic (Installs on 35mm DIN Rail)		WTB2-EB	50	\$ 0.80	WTB2-EB	50	\$ 0.80
Grey, Non-Metallic (Installs on 32mm and 35mm DIN Rail)		WTB2-EB2	50	\$ 0.80	WTB2-EB2	50	\$ 0.80
Steel (Installs on 35mm DIN Rail)		WTB2-EB3	50	\$ 0.80	WTB2-EB3	50	\$ 0.80
Circuit Bridge							
(for adjacent terminal blocks)	2 Position	WTB2S-W4/2CB	100	\$ 0.47	WTB2S-W4/2CB	100	\$ 0.47
(for alternate terminal blocks)	2 Position	WTB2S-W4/2AB	100	\$ 0.47	WTB2S-W4/2AB	100	\$ 0.47
End Plate		WTB2S-EPW4-12	50	\$ 0.32	WTB2S-EPW4-22	50	\$ 0.32
Partition Plate		WTB2S-PPW4-12	50	\$ 0.36	WTB2S-PPW4-22	50	\$ 0.36
Marker		WTB2-M6	100	\$ 0.04	WTB2-M6	100	\$ 0.04
Group Markers (See page 331)							
Plated Steel Mounting Rail, DIN							
35mm x 7.5mm - Slotted - 1 Meter		DRMR3	1	\$ 4.50	DRMR3	1	\$ 4.50
35mm x 7.5mm - Slotted - 2 Meters		DRMR6	10	\$ 9.00	DRMR6	10	\$ 9.00
35mm x 15mm - Slotted - 1 Meter		DRMR3D	1	\$ 6.50	DRMR3D	1	\$ 6.50
35mm x 15mm - Slotted - 2 Meters		DRMR6D	1	\$13.00	DRMR6D	1	\$13.00
Aluminum Mounting Rail, DIN							
35mm x 7.5mm - Slotted - 1 Meter		DRMR3A	1	\$ 8.00	DRMR3A	1	\$ 8.00
DIN Rail Support Bracket		WTB2-BRKT1	1	\$ 0.90	WTB2-BRKT1	1	\$ 0.90

IEC MULTI-CONDUCTOR FEED THROUGH DIN RAIL TERMINAL BLOCKS

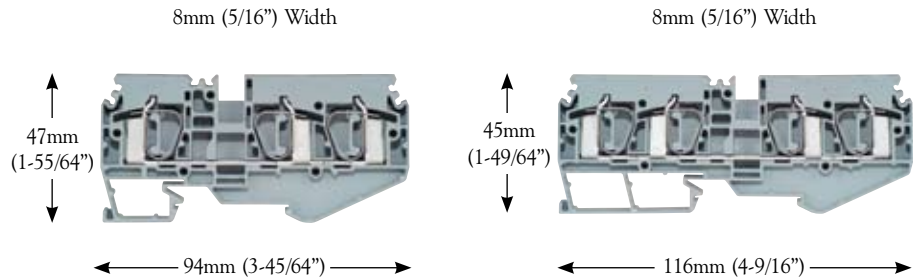

WTB2S-W6-12


WTB2S-W6-22

SPECIFICATIONS		SINGLE-CIRCUIT TERMINAL BLOCK			SINGLE-CIRCUIT TERMINAL BLOCK		
Certifications		 UL 1059 File #: E145984	 C22.2 No. 158 File #: 232541	 IEC 60947-7-1	 UL 1059 File #: E145984	 C22.2 No. 158 File #: 232541	 IEC 60947-7-1
Voltage Rating	(V)	600	600	750	600	600	750
Maximum Current	(A)	50	50	41	50	50	41
WIRE RANGE							
Solid Strand Conductor	mm²	0.5 - 10			0.5 - 10		
Fine Strand Conductor	mm²	0.5 - 6			0.5 - 6		
AWG Conductor		22 - 8			22 - 8		
Wire Strip Length	(mm/inches)	12 / 0.47			12 / 0.47		
OPERATING TEMPERATURE							
Operating Temperature		-20 to +80° C (-4 to +176° F)			-20 to +80° C (-4 to +176° F)		
ROHS COMPLIANCE		For RoHS compliance documentation by product, refer to www.c3controls.com					
TERMINAL BLOCKS		CAT. NO.	PCS./PKG.	PRICE/PC.	CAT. NO.	PCS./PKG.	PRICE/PC.
(Standard) Grey		WTB2S-W6-12	50	\$ 1.32	WTB2S-W6-22	50	\$ 1.70
ACCESSORIES (See pages 331-333)		CAT. NO.	PCS./PKG.	PRICE/PC.	CAT. NO.	PCS./PKG.	PRICE/PC.
End Barrier							
Grey, Non-Metallic (Installs on 35mm DIN Rail)		WTB2-EB	50	\$ 0.80	WTB2-EB	50	\$ 0.80
Grey, Non-Metallic (Installs on 32mm and 35mm DIN Rail)		WTB2-EB2	50	\$ 0.80	WTB2-EB2	50	\$ 0.80
Steel (Installs on 35mm DIN Rail)		WTB2-EB3	50	\$ 0.80	WTB2-EB3	50	\$ 0.80
Circuit Bridge							
(for adjacent terminal blocks) 2 Position		WTB2S-W6/2CB	100	\$ 0.66	WTB2S-W6/2CB	100	\$ 0.66
(for alternate terminal blocks) 2 Position		WTB2S-W6/2AB	100	\$ 0.66	WTB2S-W6/2AB	100	\$ 0.66
End Plate		WTB2S-EPW6-12	50	\$ 0.45	WTB2S-EPW6-22	50	\$ 0.45
Partition Plate		WTB2S-PPW6-12	50	\$ 0.50	WTB2S-PPW6-22	50	\$ 0.50
Marker		WTB2-M8	100	\$ 0.04	WTB2-M8	100	\$ 0.04
Group Markers (See page 331)							
Plated Steel Mounting Rail, DIN							
35mm x 7.5mm - Slotted - 1 Meter		DRMR3	1	\$ 4.50	DRMR3	1	\$ 4.50
35mm x 7.5mm - Slotted - 2 Meters		DRMR6	10	\$ 9.00	DRMR6	10	\$ 9.00
35mm x 15mm - Slotted - 1 Meter		DRMR3D	1	\$ 6.50	DRMR3D	1	\$ 6.50
35mm x 15mm - Slotted - 2 Meters		DRMR6D	1	\$13.00	DRMR6D	1	\$13.00
Aluminum Mounting Rail, DIN							
35mm x 7.5mm - Slotted - 1 Meter		DRMR3A	1	\$ 8.00	DRMR3A	1	\$ 8.00
DIN Rail Support Bracket		WTB2-BRKT1	1	\$ 0.90	WTB2-BRKT1	1	\$ 0.90

MINIATURE PANEL MOUNT, FEED-THROUGH SPRING CLAMP TERMINALS

The miniature modular panel mounting spring clamp terminals ensure extremely compact wiring. The terminals are “add-on” and can be stacked to form multipole assemblies. The stacked assemblies are fitted with end plates on both ends for easy installation on to the panel. For assemblies of more than twenty terminals, additional end plates must be mounted after every twentieth terminal block for rigidity of the assembly. Miniature multi-conductor terminals are also available as a reliable solution for multiple wire connections. The terminal eliminates conventional cross connections, looping wires and reliability problems encountered when connecting two wires in one clamp. WTB2S-MW2-22 features two termination points on each side.

IEC MINIATURE FEED THROUGH PANEL MOUNT TERMINAL BLOCKS

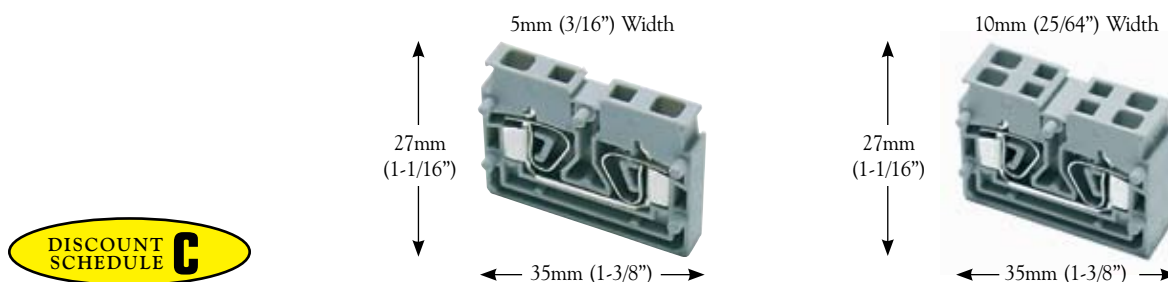

WTB2S-MW2				WTB2S-MW2-22			
SPECIFICATIONS	SINGLE-CIRCUIT TERMINAL BLOCK			SINGLE-CIRCUIT, MULTI-CONDUCTOR TERMINAL BLOCK			
Certifications	 UL 1059 File #: E145984	C22.2 No. 158	 IEC 60947-7-1	 UL 1059 File #: E145984	C22.2 No. 158	 IEC 60947-7-1	
Voltage Rating (V)	600	600	750	600	600	750	
Maximum Current (A)	20	20	24	20	20	24	
WIRE RANGE							
Solid Strand Conductor mm ²	0.5 - 4			0.5 - 4			
Fine Strand Conductor mm ²	0.5 - 2.5			0.5 - 2.5			
AWG Conductor	22 - 14			22 - 14			
Wire Strip Length (mm/inches)	9 / 0.35			9 / 0.35			
OPERATING TEMPERATURE							
Operating Temperature	-20 to +80° C (-4 to +176° F)			-20 to +80° C (-4 to +176° F)			
ROHS COMPLIANCE				For RoHS compliance documentation by product, refer to www.c3controls.com			
TERMINAL BLOCKS		CAT. NO.	PCS./PKG.	PRICE/PC.	CAT. NO.	PCS./PKG.	PRICE/PC.
(Standard) Grey		WTB2S-MW2	50	\$0.51	WTB2S-MW2-22	50	\$0.79
ACCESSORIES (See pages 331-333)		CAT. NO.	PCS./PKG.	PRICE/PC.	CAT. NO.	PCS./PKG.	PRICE/PC.
Circuit Bridge							
(for adjacent terminal blocks) 2 Position	WTB2S-MW2/2CB	100	\$0.42	WTB2S-MW2/2CB	100	\$0.42	
Circuit Bridge Installation Tool	WTB2S-TMW2	1	\$3.00	WTB2S-TMW2	1	\$3.00	
End Plate	WTB2S-EPMW2	50	\$0.25	WTB2S-EPMW2	50	\$0.25	
Marker	WTB2-M5A	100	\$0.04	WTB2-M10A	100	\$0.04	
Group Markers (See page 331)							

END PLATES



Our end plates enclose the open side of the last terminal block in a rail assembly to provide isolation from adjacent equipment and circuits. May also be used as a separator to divide circuits in a terminal block rail assembly. *See applicable terminal block page for end plate part number and ordering information.*

SEPARATOR PLATES



Our separator plate is used to divide circuits in a terminal block rail assembly. *See applicable terminal block page for separator plate part number and ordering information.*

PARTITION PLATES



Our partition plates are used to identify and segregate terminal block groups. In addition, they maintain the required creepage and clearance for electrical isolation. *See applicable terminal block page for partition plate part number and ordering information.*

END BARRIERS



Our end barriers retain the terminal blocks on the mounting rail. *See applicable terminal block page for end barrier part number and ordering information.*

DIN RAIL



We offer two types of 35mm symmetrical DIN rails; steel and aluminum. Our steel DIN rail is zinc with clear chromate plated and is available in either 1m (3.28ft.) or 2m (6.56ft.). The aluminum version is available in 1m (3.28ft.). Each simply fasten by screws to the mounting surface - no special brackets or hardware are needed. Terminal blocks easily snap on to rail. *See applicable terminal block page for DIN rail part number and ordering information.*

DIN RAIL SUPPORT BRACKET



**NEW
PRODUCT
OFFERING!**

Angled bracket raises DIN rail off of mounting panel for easier more convenient wiring of terminal blocks. *See applicable terminal block page for support bracket part number and ordering information.*

CIRCUIT BRIDGES

Internal, Insulated – for Screw Clamp Connection Terminal Blocks



Use our insulated circuit bridges to electrically connect multiple terminal blocks. Our circuit bridges are pre-assembled and available in 2-, 3-, 4-, and 10-position. *See applicable terminal block page for circuit bridge part number and ordering information.*

Insulated Push-In – for Spring Clamp Connection Terminal Blocks



Our insulated push-in circuit bridges provide IP20 protection and simplify the task of cross connection between multiple terminal blocks. Circuit bridges are available for connections between adjacent and alternate terminal blocks. *See applicable terminal block page for circuit bridge part number and ordering information.*

**DISCOUNT
SCHEDULE C**

GROUP MARKERS

Our group markers and group marker holders are used to identify an assembly of adjacent terminals that are associated with a specific function, control circuit, or part of a machine.



GROUP MARKER HOLDER				MARKER		
CODE	PCS./PKG.	PRICE/PC.	FOR USE WITH	CODE	PCS./PKG.	PRICE/PC.
WTB2-GM1	100	\$0.50	WTB2-EB End Barrier	WTB2-M8	100	\$0.40
				WTB2-MGM1	100	\$0.50
WTB2-GM2	100	\$0.50	WTB2-EB End Barrier	WTB2-M8	100	\$0.40
				WTB2-MGM1	100	\$0.50
WTB2-GM3 ^①	100	\$0.50	32mm or 35mm DIN Rail	—	—	—
WTB2-GM4 ^①	100	\$0.50	32mm or 35mm DIN Rail	—	—	—
WTB2-MGM2	100	\$0.50	WTB2-MW4	—	—	—

^① Includes a paper label.

IT'S EASY TO BUILD YOUR OWN TERMINAL MARKERS

Simply pick the code number from each of the sections below and combine them to build your part number. See page 6 for more detailed directions.

IEC Terminal Block Markers

WTB2- I II III IV V

Example: To build one of our most popular Terminal Markers, the part number would be **WTB2 + II + III + IV + V** or **WTB2-M5LIAVL**



I. MARKER TYPE

CODE	DESCRIPTION
WTB2	IEC Terminal Block Marker

**NEW
EXPANDED
PRODUCT
OFFERING!**

SEE PAGE 333 FOR
MARKER ORIENTATION.

II. MARKER DIMENSION

CODE	DESCRIPTION	MARKERS PER STRIP	STRIPS PER PKG.	MARKERS PER PKG.	PRICE EACH PER MARKER (BLANK)	PRICE EACH PER MARKER (PRINTED)
M2	6mm x 5mm Marker	10	10	100	\$0.04	\$0.06
M5A	5mm x 5mm Marker	10	10	100	\$0.04	\$0.06
M5	5mm x 10mm Marker	10	10	100	\$0.04	\$0.06
M6	6mm x 10mm Marker	10	10	100	\$0.04	\$0.06
M8	8mm x 11mm Marker	10	10	100	\$0.04	\$0.06
M9	9mm x 10mm Marker	10	10	100	\$0.06	\$0.09
M10A	10mm x 5mm Marker	10	10	100	\$0.04	\$0.06
M10	10mm x 11mm Marker	10	10	100	\$0.08	\$0.12
M12	12mm x 11mm Marker	10	10	100	\$0.08	\$0.12
M15	15mm x 11mm Marker	10	10	100	\$0.08	\$0.12
M50	20mm x 5mm Marker	1	10	10	\$0.10	—

III. SERIES MARKER OPTIONS

SERIES MARKER OPTIONS

A. NUMBERS

CODE	DESCRIPTION	NO. OF SETS/ MARKERS PER PACKAGE:†	NO. OF SETS/ MARKERS PER PACKAGE:††
(Blank)	(Blank)	10/100	10/100
NS01-10	1 - 10	10/100	10/100
NS11-20	11 - 20	10/100	10/100
NS21-30	21 - 30	10/100	10/100
NS31-40	31 - 40	10/100	10/100
NS41-50	41 - 50	10/100	10/100
NS51-60	51 - 60	10/100	10/100
NS61-70	61 - 70	10/100	10/100
NS71-80	71 - 80	10/100	10/100
NS81-90	81 - 90	10/100	10/100
NS91-100	91 - 100	10/100	10/100
NS01-20	1 - 20	5/100	5/100
NS21-40	21 - 40	5/100	5/100
NS41-60	41 - 60	5/100	5/100
NS61-80	61 - 80	5/100	5/100
NS81-100	81-100	5/100	5/100
NS01-100	1-100	1/100	1/100

B. SPECIAL SYMBOLS AND CHARACTERS

CODE	DESCRIPTION	NO. OF SETS/ MARKERS PER PACKAGE:†	NO. OF SETS/ MARKERS PER PACKAGE:††
(Blank)	(Blank)	10/100	10/100
SS01	L1, L2, L3 T1, T2, T3	15/90	10/60
SS02	1, 3, 5 2, 4, 6	15/90	10/60
SS03	+, -, ⊕	30/90	20/60
SS04	+, -, GND	30/90	20/60

C. LETTERS

CODE	DESCRIPTION	NO. OF SETS/MARKERS PER PACKAGE:†	NO. OF SETS/MARKERS PER PACKAGE:††
(Blank)	(Blank)	10/100	10/100
LSA-J	A - J	10/100	10/100
LSK-T	K - T	10/100	10/100
LSQ-Z	Q - Z	10/100	10/100
LSG-P	G - P	10/100	10/100
LSA-T	A - T	5/100	5/100
LSG-Z	G - Z	5/100	5/100

†WTB2-M2, M5A, M5, M6, M8, M9, M10A, M10 ††WTB2-M12, M15

INDIVIDUAL MARKER OPTIONS

A. NUMBERS

CODE	DESCRIPTION	NO. OF SETS/ MARKERS PER PACKAGE:†	NO. OF SETS/ MARKERS PER PACKAGE:††
(Blank)	(Blank)	10/100	20/100
NI00	0	10/100	20/100
NI01	1	10/100	20/100
NI02	2	10/100	20/100
NI03	3	10/100	20/100
NI04	4	10/100	20/100
NI05	5	10/100	20/100
NI06	6	10/100	20/100
NI07	7	10/100	20/100
NI08	8	10/100	20/100
NI09	9	10/100	20/100
NI10	10	10/100	20/100

B. SPECIAL SYMBOLS AND CHARACTERS

CODE	DESCRIPTION	NO. OF SETS/ MARKERS PER PACKAGE:†	NO. OF SETS/ MARKERS PER PACKAGE:††
(Blank)	(Blank)	10/100	20/100
SI01	L1	10/100	20/100
SI02	L2	10/100	20/100
SI03	L3	10/100	20/100
SI04	T1	10/100	20/100
SI05	T2	10/100	20/100
SI06	T3	10/100	20/100
SI07	+	10/100	20/100
SI08	-	10/100	20/100
SI09	GND	10/100	20/100
SI10	⊕	10/100	20/100
SI11	~	10/100	20/100
SI12	—	10/100	20/100

C. LETTERS

CODE	DESCRIPTION	NO. OF SETS/ MARKERS PER PACKAGE:†	NO. OF SETS/ MARKERS PER PACKAGE:††
(Blank)	(Blank)	10/100	20/100
LIA	A	10/100	20/100
LIB	B	10/100	20/100
LIC	C	10/100	20/100
LID	D	10/100	20/100
LIE	E	10/100	20/100
LIF	F	10/100	20/100
LIG	G	10/100	20/100
LIH	H	10/100	20/100
LIJ	I	10/100	20/100
LIJ	J	10/100	20/100
LIK	K	10/100	20/100
LIL	L	10/100	20/100
LIM	M	10/100	20/100
LIN	N	10/100	20/100
LIO	O	10/100	20/100
LIP	P	10/100	20/100
LIQ	Q	10/100	20/100
LIR	R	10/100	20/100
LIS	S	10/100	20/100
LIT	T	10/100	20/100
LIU	U	10/100	20/100
LIV	V	10/100	20/100
LIW	W	10/100	20/100
LIX	X	10/100	20/100
LIY	Y	10/100	20/100
LIZ	Z	10/100	20/100

IV. ORIENTATION OPTIONS

CODE	DESCRIPTION
(Blank)	—
H	Printed w/Horizontal Orientation
V	Printed w/Vertical Orientation

V. LETTER CASE OPTIONS

CODE	DESCRIPTION
(Blank)	—
U	Uppercase (Capital) Letters
L	Lowercase Letters

DISCOUNT
SCHEDULE **C**

MARKER ORIENTATION


HORIZONTAL



VERTICAL



UPPERCASE



LOWERCASE



QUICK MARKER STRIPS

Custom printed or blank, the WTB2-M quick marker strips are ideally designed to fit blocks of certain widths. An entire strip of markers can be installed at the same time without having to separate the markers, reducing labor and installation time. The Quick Marker Strip Product Guide is below to help match the appropriate marker to each terminal block.

QUICK MARKER STRIP PRODUCT GUIDE

MARKER TYPE	CORRESPONDING TERMINAL BLOCK	
	WTB2-	WTB2S-
WTB2-M2	MW4, W4DD, W4ddb, TL2, TL2S, TL2SL, FB52 ^① , FB525L ^② , FB52DB ^②	—
WTB2-M5A	—	MW2
WTB2-M5	W2	W2, W2G, W2-12, W2-22
WTB2-M6	W4, W2/4G, W4-12, W4-22, DB1	W4, W4G, W4-12, W4-22
WTB2-M8	W6, FB52 ^① , FB52L ^② , FB52DB ^②	W6, W6G, W6-12, W6-22
WTB2-M9	FB1, FB1L	—
WTB2-M10A	—	MW2-22
WTB2-M10	W10, W6/10G	—
WTB2-M12	W16, W25	—
WTB2-M15	W35, W16/35G	—

① Marker installed on screw terminal. ② Marker installed on fuse carrier/disconnect arm.

CUSTOM MARKER STRIPS

WTB2-M marking strips can be custom printed providing unique markers for any application. These markers are available in different sizes. Both alpha and numeric characters and symbols can be printed on the markers.

CUSTOM MARKER STRIPS

CODE	DESCRIPTION	MARKERS PER/PKG.	PRICE EACH MARKER
WTB2-M2-P	Custom White Marker 6mm x 5mm	100	\$0.14
WTB2-M5A-P	Custom White Marker 5mm x 5mm	100	\$0.14
WTB2-M5-P	Custom White Marker 5mm x 10mm	100	\$0.14
WTB2-M6-P	Custom White Marker 6mm x 10mm	100	\$0.14
WTB2-M8-P	Custom White Marker 8mm x 11mm	100	\$0.14
WTB2-M9-P	Custom White Marker 9mm x 10mm	100	\$0.17
WTB2-M10A-P	Custom White Marker 10mm x 5mm	100	\$0.14
WTB2-M10-P	Custom White Marker 10mm x 11mm	100	\$0.20
WTB2-M12-P	Custom White Marker 12mm x 11mm	100	\$0.20
WTB2-M15-P	Custom White Marker 15mm x 11mm	100	\$0.20

Special and custom markers are not available for same day shipping.

DISCOUNT
SCHEDULE **C**

CUSTOM PRINTING SET-UP FEES

Our plotter system and software have almost unlimited capabilities for printing custom terminal block markers. The user-friendly operator views work on a "what you see is what you get" principle. Meaning you can adjust character size and type, rotate characters, and plot symbols from Excel files, text files, database files, and CAD/CAE files.

There is a \$10 set-up fee for c3controls to print custom markers. Submit an Excel file, text file, database file, or CAE/CAD file using your purchase order as the name of the file with the file type extension. If you do not have a file to submit and would prefer c3controls to create the marker file for you, then there is a \$25 fee which includes the printing.

Following is the maximum number of markers in one file:

WTB2-M2, -M5A	1,320 markers
WTB2-M5, -M6, -M8, -M9, -M10	960 markers
WTB2-M10A	660 markers
WTB2-M12, -M15	480 markers

If the number of markers you require exceeds the maximum number of markers in one file, you must submit multiple files. When submitting multiple files, use the following file naming convention (33601 represents your purchase order number, and -1, -2, -3 represents the number of files submitted).

33601-1.xls
33601-2.xls
33601-3.xls

If you have questions regarding custom printing, please contact our customer care department at 724.775.7926.

The following table may be used as a guideline for selecting the appropriate slotted screwdriver blade dimension for use with c3controls' WTB2 series terminal blocks.

GUIDE FOR SELECTING APPROPRIATE SLOTTED SCREWDRIVER BLADE DIMENSION (MM)									
TYPE	CAT NO.	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.5
SCREW CLAMP	WTB2-BRKT1 ^①								
	WTB2-DB1			x					
	WTB2-EB					x			
	WTB2-EB2					x			
	WTB2-EB3								x
	WTB2-FB1			x					
	WTB2-FB130					x			
	WTB2-FB1L			x					
	WTB2-FB52			x					
	WTB2-FB52DB			x					
	WTB2-FB52L			x					
	WTB2-MW4			x					
	WTB2-PDB80			x		x			
	WTB2-TL2	x							
	WTB2-TL2S	x							
	WTB2-TL2SLN	x							
	WTB2-TL2SLP	x							
	WTB2-W10					x			
	WTB2-W10/xCB ^①		x						
	WTB2-W16					x			
	WTB2-W16/35G								x
	WTB2-W16/xCB ^①		x						
	WTB2-W2		x						
	WTB2-W2/4G			x					
	WTB2-W2/xCB ^①		x						
	WTB2-W25						x		
	WTB2-W25/xCB ^①					x			
	WTB2-W35							x	
	WTB2-W35/xCB ^①					x			
	WTB2-W4			x					
	WTB2-W4-12		x						
	WTB2-W4-22		x						
	WTB2-W4/xCB ^①		x						
	WTB2-W4D/xCB ^①		x						
	WTB2-W4DD			x					
	WTB2-W4DDB			x					
	WTB2-W6					x			
	WTB2-W6/10G					x			
	WTB2-W6/xCB ^①		x						
	WTB2-W70								x
	WTB2-W95 ^②								
SPRING CLAMP	WTB2S-MW2		x						
	WTB2S-MW2-22		x						
	WTB2S-W2		x						
	WTB2S-W2-12		x						
	WTB2S-W2-22		x						
	WTB2S-W2G		x						
	WTB2S-W4			x					
	WTB2S-W4-12			x					
	WTB2S-W4-22			x					
	WTB2S-W4G			x					
	WTB2S-W6					x			
	WTB2S-W6-12					x			
	WTB2S-W6-22					x			
	WTB2S-W6G					x			


①x= 2, 3, 4 or 10 ②Phillips nr.2 ③Allen 6mm

VP500 PLOTTER SYSTEM

The VP500 plotter system has been designed specifically for plotting high volume wire and terminal block markers. The VP500 makes traditional plotter systems obsolete. The VP500 provides the simple plug-and-play compatibility and features of modern personal computers and printers, with all of the benefits of a flexible marking system for industrial products.

Following are just a few of the VP500 features:

- Frames for different size markers can be installed on the plotter at the same time – frames can be changed in seconds.
- Operation like a normal printer – pens feature a special seal to prevent them from drying out, and remain in the plotter pen station.
- Auto calibration and a special start-up function ensures neat labeling from the very first marker.
- Ink is supplied by cartridges that can be easily replaced without any mess.
- EK VarioSign labeling software is specially developed for the VP500 plotter, making it quick and easy to develop labeling on a PC – or marker data can be imported from Excel files, text files, database files, or CAE/CAD files.

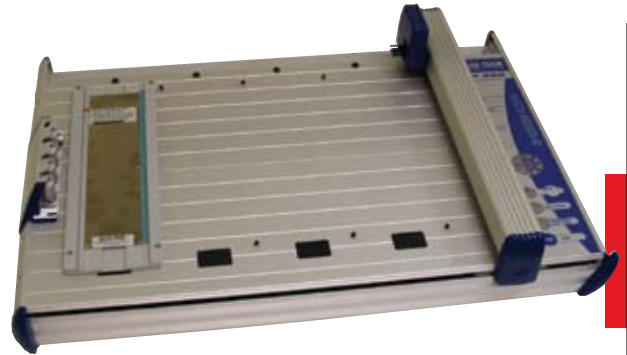

VP500 PLOTTER SYSTEM

CODE	DESCRIPTION	PRICE
WTB2-VP500A	VP500 Plotter System*	\$4,315.00
*VP500 Plotter System comes standard with the following:		
• Plotter	• 1 Pen (0.35mm)	
• EK VarioSign Software	• 5 Ink Cartridges	
• Universal Power Supply	• 20ml Cleaning Fluid	
• Cables	• Cleaning Container	
• 2 Marker Frames (WTB2-VPMF2)		



VS210 PLOTTER SYSTEM

The VS210 plotter system is extremely versatile and easy to use. It can be moved anywhere and operated as a stand-alone plotter without a PC connection. For more demanding requirements, it can be connected to a PC and used with the EK Print software. Because the VS210 is portable and can be battery operated, it is ideal for working on-site. The VS210 is great for small to medium volume wire and terminal block marker plotting requirements.

Following are just a few of the VS210 features:

- Frames for different size markers can be installed on the plotter – frames can be changed in seconds.
- Labeling can be easily defined on the integral keyboard, and “plotting jobs” saved to the internal memory cassette. Or marker data can be downloaded from a PC with the EK Print software. Marker data can be imported from Excel files, text files, or CAE/CAD files.
- Pens simply snap into the pen holder. Ink is supplied by cartridges that can be easily replaced without any mess. Pens are long-lasting, they have a special seal to prevent them from drying out.



VS210 PLOTTER SYSTEM

CODE	DESCRIPTION	PRICE
WTB2-VS210A	VS210 Plotter System*	\$1,775.00
*VS210 Plotter System comes standard with the following:		
• Plotter	• Memory Cassette	
• EK Print Software	• Carrying Case	
• Universal Power Supply		



MARKER FRAMES



CODE	FOR MARKERS	FOR PLOTTER	PRICE
WTB2-VSMF1	WTB2-M2	WTB2-VS210A	\$186.00
WTB2-VPMF1	WTB2-M2	WTB2-VP500A	\$239.00
WTB2-VSMF2	WTB2-M5, -M6, -M8, -M10, -M12, -M15	WTB2-VS210A	\$186.00
WTB2-VPMF2	WTB2-M5, -M6, -M8, -M10, -M12, -M15	WTB2-VP500A	\$239.00
WTB2-VSMF3	WTB2-M9	WTB2-VS210A	\$186.00
WTB2-VPMF3	WTB2-M9	WTB2-VP500A	\$239.00

INK CARTRIDGE



The 1ml black ink cartridge easily inserts into the plotter pen without any mess. This ink cartridge is ideal for use with WTB2-PP** pens.

CODE	DESCRIPTION	PCS./PKG.	PRICE/PC.
WTB2-INKCART1	1ml Ink Cartridge	5	\$3.25

PLOTTER PEN CLEANING FLUID



Fluid to clean dry ink from the tips of the plotter pens.

CODE	DESCRIPTION	PCS./PKG.	PRICE/PC.
WTB2-CLFL10	10ml Cleaning Fluid	2	\$ 9.00
WTB2-CLFL30	30ml Cleaning Fluid	1	\$14.00

PLOTTER PENS



Plotter pens are available in five different tip sizes and are color coded for easy identification of the tip size. Disposable pens are available if you want to avoid cleaning the pens. Pens are supplied with ink from the easily inserted ink cartridges (WTB2-INKCART1).

CODE	DESCRIPTION	FOR PLOTTER	PRICE
WTB2-PP18	0.18mm Plotter Pen (Red)	WTB2-VS210A, WTB2-VP500A	\$116.00
WTB2-PP25	0.25mm Plotter Pen (White)	WTB2-VS210A, WTB2-VP500A	\$116.00
WTB2-PP35	0.35mm Plotter Pen (Yellow)	WTB2-VS210A, WTB2-VP500A	\$116.00
WTB2-PP50	0.50mm Plotter Pen (Brown)	WTB2-VS210A, WTB2-VP500A	\$116.00
WTB2-PP70	0.70mm Plotter Pen (Blue)	WTB2-VS210A, WTB2-VP500A	\$116.00
WTB2-PP1	1.0mm Plotter Pen (Orange)	WTB2-VS210A, WTB2-VP500A	\$116.00
WTB2-PP25D	0.25mm Disposable Pen (White)	WTB2-VS210A, WTB2-VP500A	\$ 68.00
WTB2-PP35D	0.35mm Disposable Pen (Yellow)	WTB2-VS210A, WTB2-VP500A	\$ 68.00

PEN HOLDER



Pen holder can be installed on WTB2-VP500 Plotter head to hold a "sharpie" permanent marker pen.

**NEW
PRODUCT
OFFERING!**

CODE	DESCRIPTION	PCS./PKG.	PRICE/PC.
WTB2-PMA1	Pen Holder	1	\$30.00

DISCOUNT
SCHEDULE **C**

SOFTWARE FOR VP500 PLOTTER

Simple to use, PC software for defining marker labels and downloading the data to a VP500 plotter. The software speeds data entry and makes custom markers easy.



CODE	DESCRIPTION	PRICE
WTB2-VSSW	EK VarioSign Software	\$343.00

System Requirements:

- Pentium II PC (200 MHz or higher)
- 64 MB RAM
- CD-ROM drive
- VGA graphics adapter and monitor (256 colors, resolution 640 x 480)
- Mouse

Operating System:

- Windows 95, 98, ME, NT, 2000, XP

CLEANING CONTAINER FOR PLOTTER PEN CLEANING FLUID



Container for storing plotter pen cleaning fluid.

CODE	DESCRIPTION	PRICE
WTB2-CC1	Cleaning Container	\$19.50

MEMORY CASSETTE FOR VS210 PLOTTER

The memory cassette plugs into the VS210 plotter and enables plotting jobs to be stored in the VS210 (either created on a PC or entered via the integral keyboard) and quickly recalled, without the need for a PC.



CODE	DESCRIPTION	PRICE
WTB2-MEM1	Memory Cassette	\$187.00

STARTER KIT FOR VS210 PLOTTER




The starter kit for the VS210 plotter system includes: one plotter pen (0.35mm), pen cleaning fluid (20ml), and cleaning container. Just add ink and you have everything necessary to start plotting markers.

CODE	DESCRIPTION	PRICE
WTB2-VS210SK1	Starter Kit	\$144.00


DISCOUNT
SCHEDULE **C**

SCREW CLAMP FEED THROUGH


WTB2-W2 (20A)

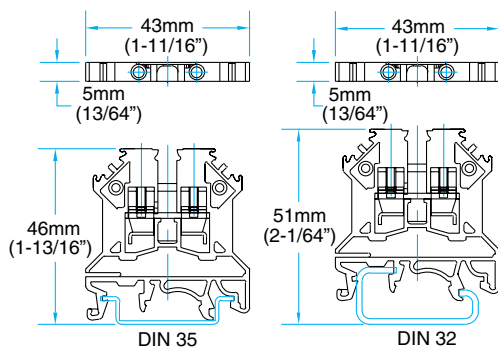


WTB2-W4 (35A)

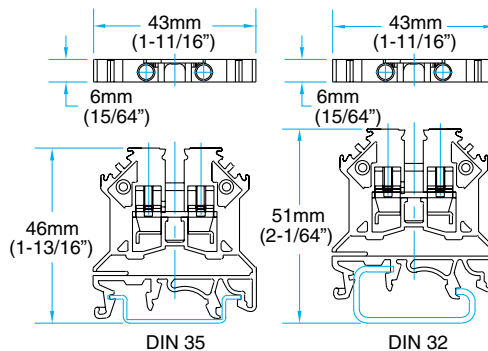


WTB2-W6 (50A)

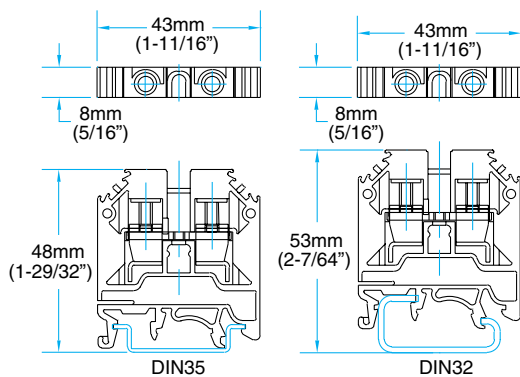


WTB2-W10 (65A)

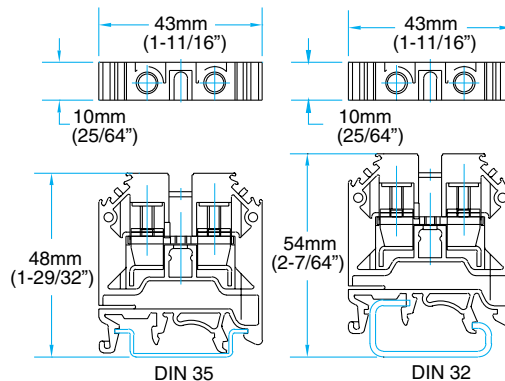

WTB2-W16 (85A)

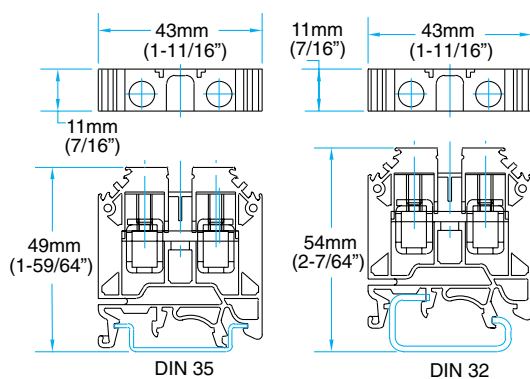


WTB2-W25 (115A)

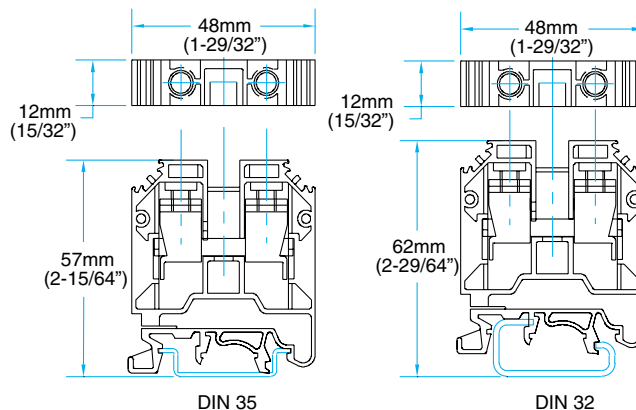


VISIT WWW.C3CONTROLS.COM
TO DOWNLOAD CAD DRAWINGS

**SCREW CLAMP FEED THROUGH
(CONT.)**


WTB2-W35 (145A)

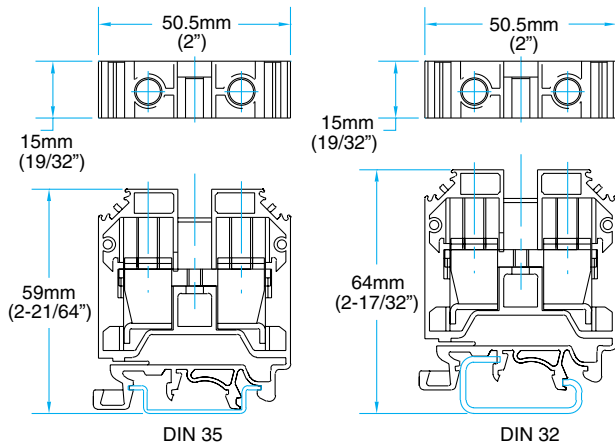
SCREW CLAMP GROUND


WTB2-W2/4G

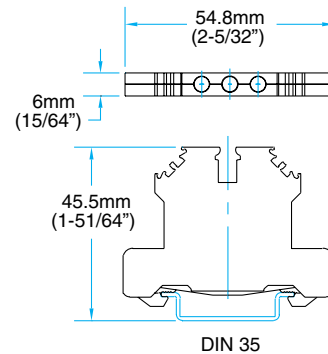


WTB2-W70 (150A)

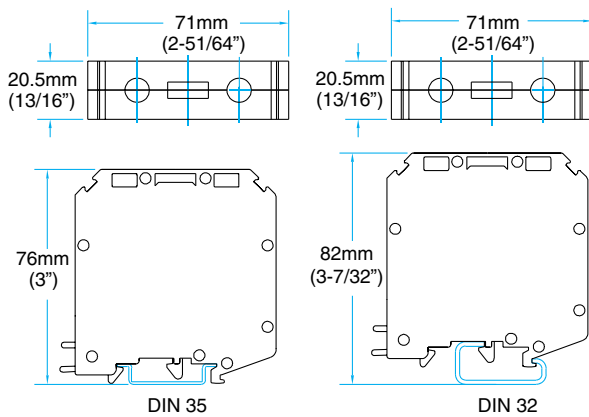


WTB2-W6/10G

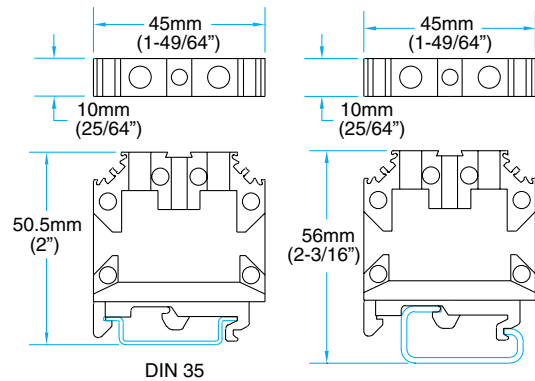

WTB2-W95 (230A)

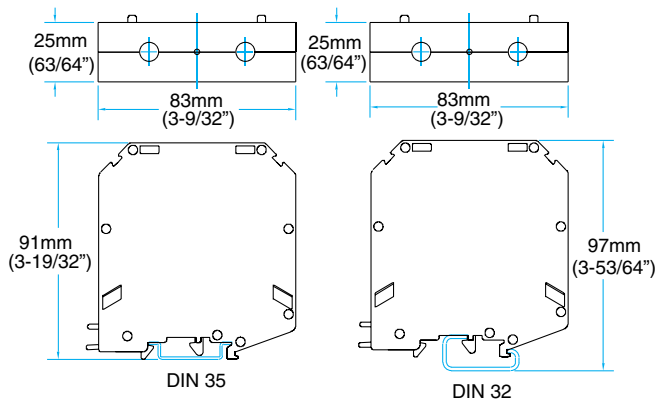


WTB2-W16/35G

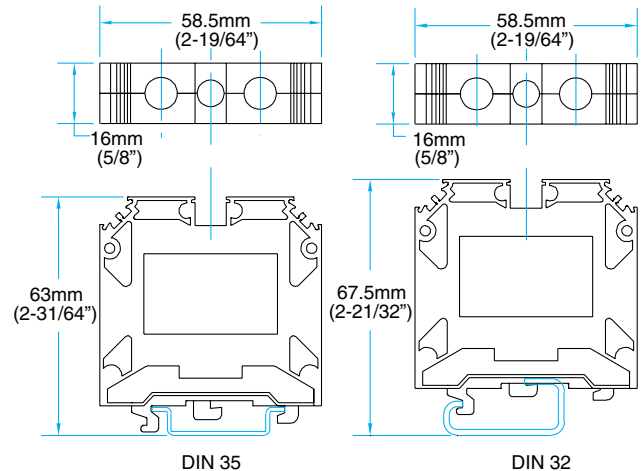


SCREW CLAMP MULTI-CONDUCTOR FEED THROUGH

WTB2-W4-12 (35A)

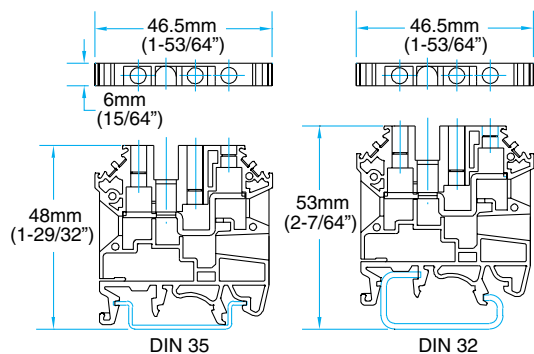


WTB2-W4-22 (35A)

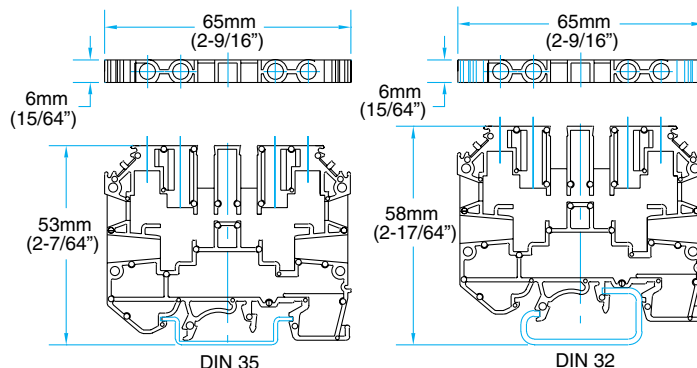


SCREW CLAMP DOUBLE LEVEL FEED THROUGH

WTB2-W4DD, WTB2-W4DDB (35A)

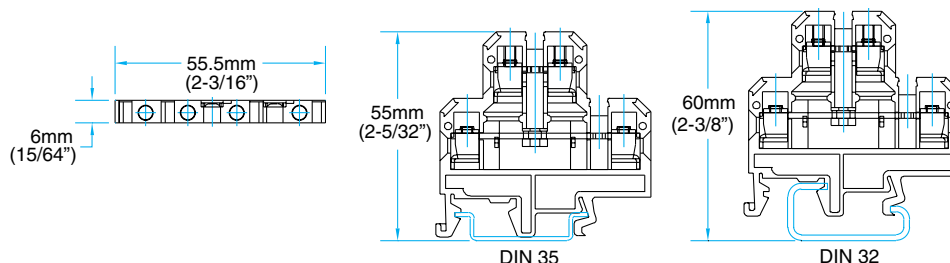


SCREW CLAMP TRIPLE LEVEL

WTB2-TL2 (25A)

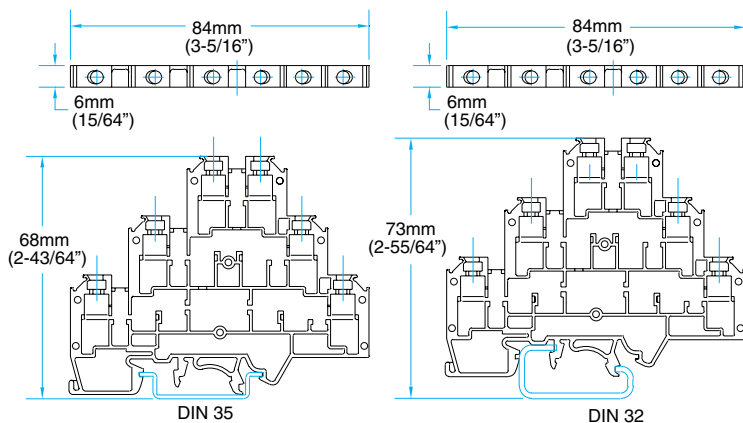


WTB2-TL2S (25A), WTB2-TL2SLP (25A),
WTB2-TL2SLN (25A)

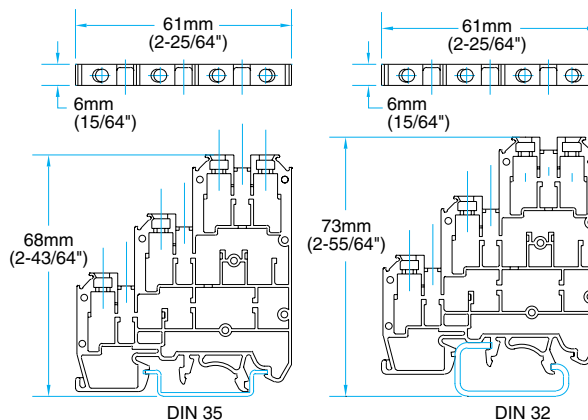


SCREW CLAMP FUSE HOLDER


WTB2-FB1 (6.3A), WTB2-FB1L (6.3A)

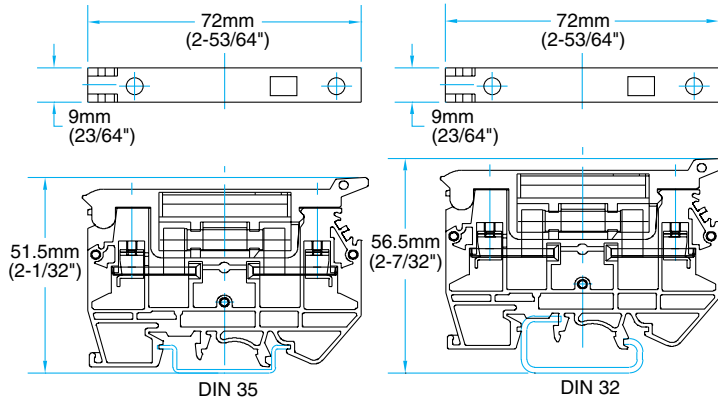


WTB2-FB52 (6.3A), WTB2-FB52L (6.3A)

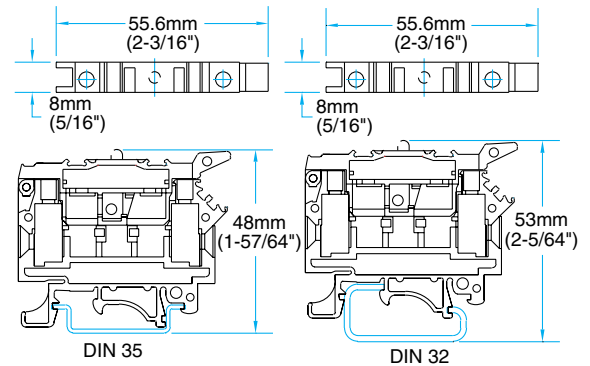


WTB2-FB130 (30A)

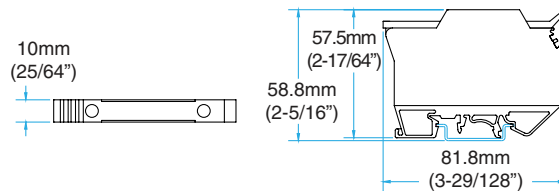
SCREW CLAMP DISCONNECT


WTB2-FB52DB (6.3A)

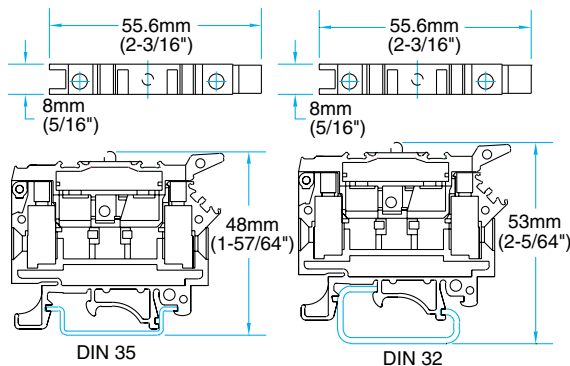


WTB2-DB1 (35A)

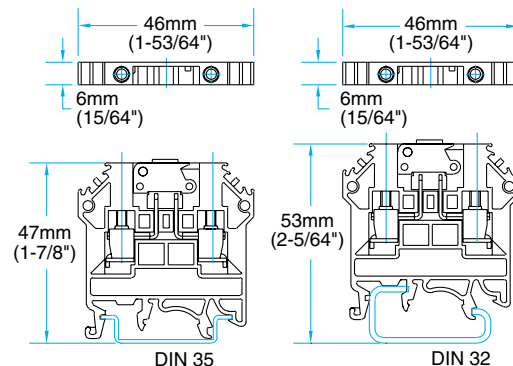
**SCREW CLAMP
POWER DISTRIBUTION**

WTB2-PDB80 (80A)

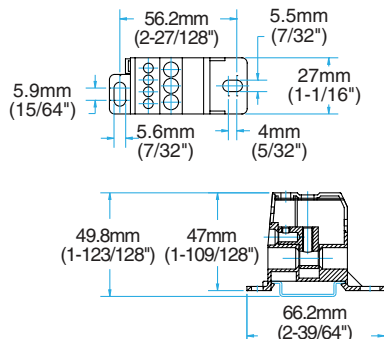

**SCREW CLAMP MINIATURE
FEED THROUGH**

WTB2-MW4 (35A)




SCREW CLAMP END PLATES


WTB2-EPW2/4




WTB2-EPW6/10




WTB2-EPW25




WTB2-EPW35




WTB2-EPW4-12




WTB2-EPW4-22

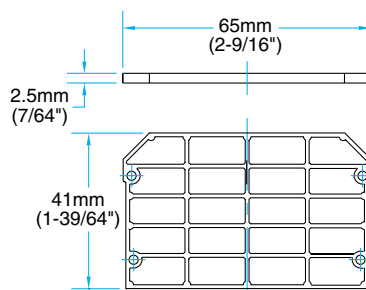


WTB2-EPW4DD




WTB2-EPTL2

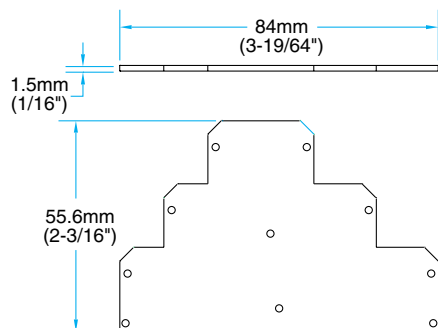


WTB2-EPTL2S

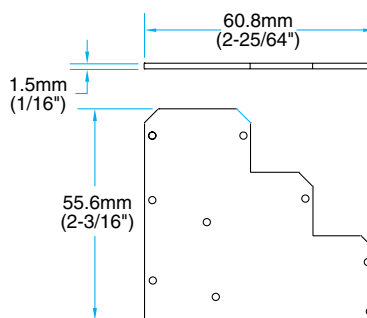


WTB2-EPFB1

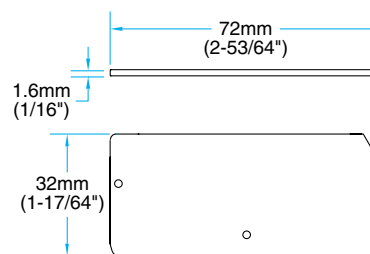


WTB2-EPFB52



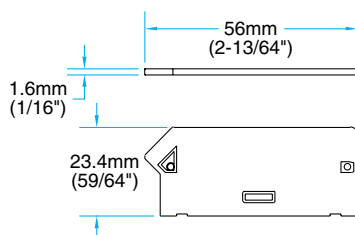


WTB2-EPDB1



WTB2-EPMW4





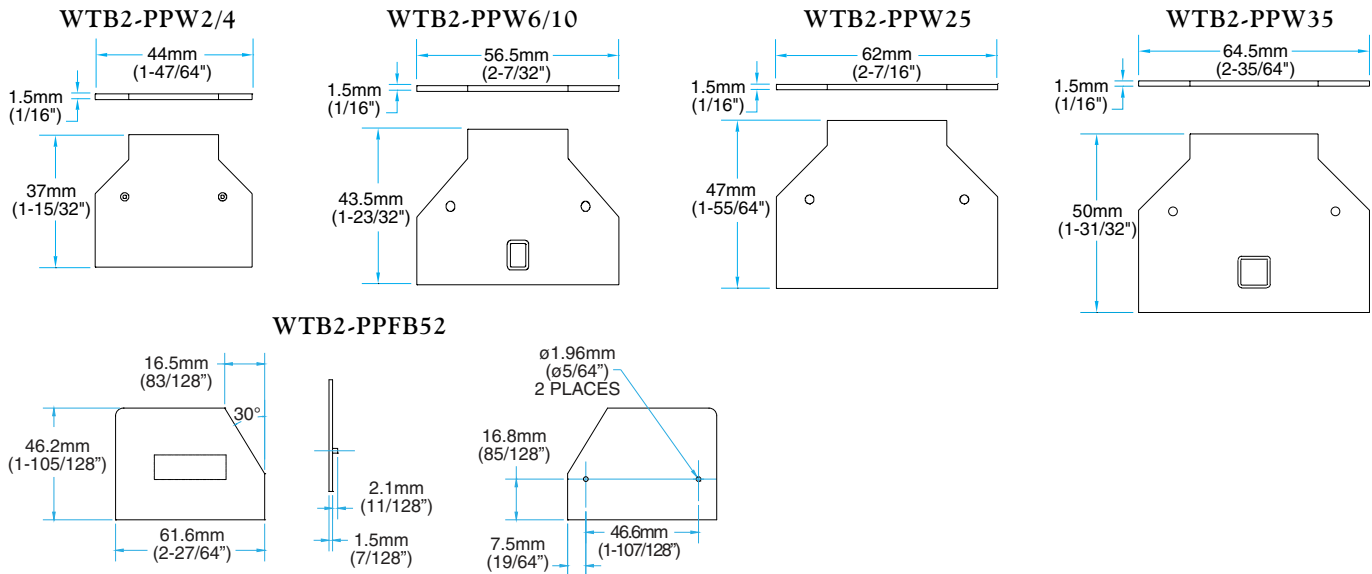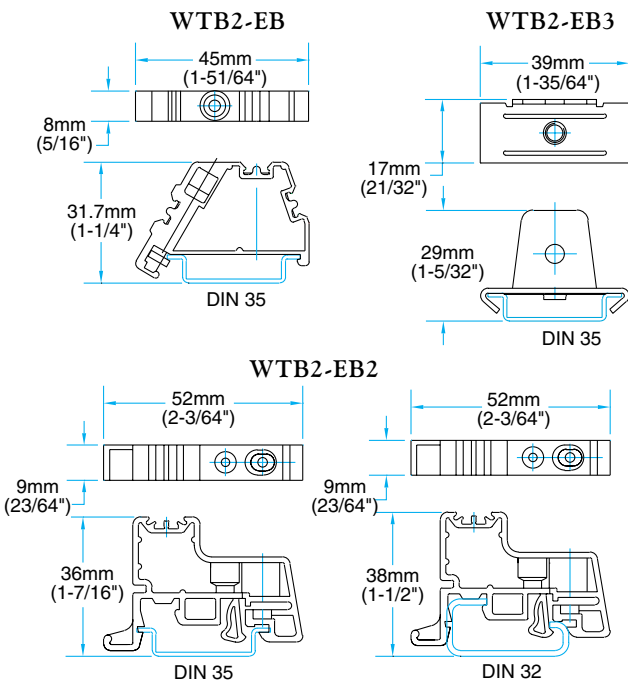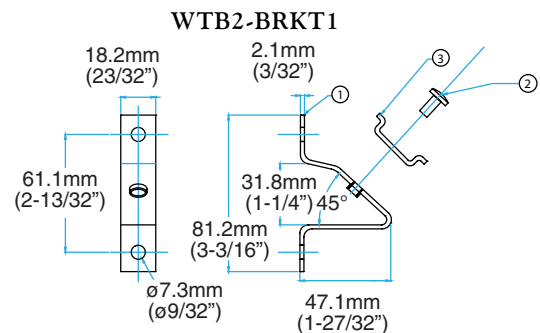SCREW CLAMP PARTITION PLATES

END BARRIERS FOR SCREW CLAMP & SPRING CLAMP TERMINAL BLOCKS

DIN RAIL SUPPORT BRACKET FOR SCREW CLAMP & SPRING CLAMP TERMINAL BLOCKS


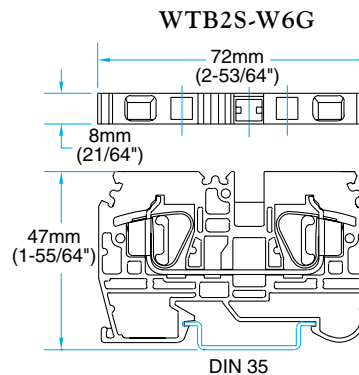
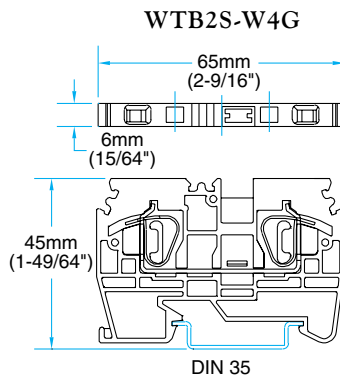

Recommended Mounting - (2) Size M6 [1/4] Machine Screw Max.

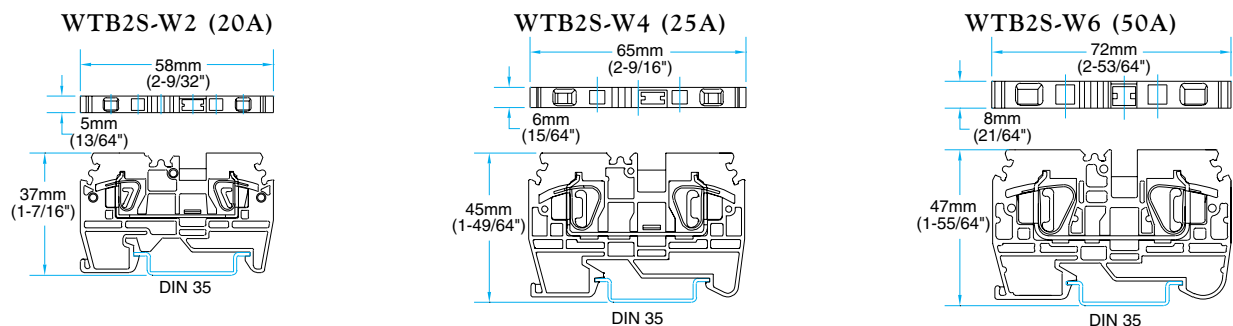COMPLETED ASSEMBLY







Recommended Torque
 1.4Nm (12 Lb-in)


SPRING CLAMP FEED THROUGH


SPRING CLAMP GROUND




SPRING CLAMP MULTI-CONDUCTOR FEED THROUGH

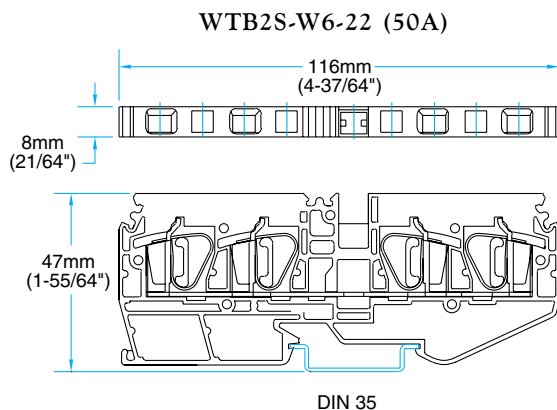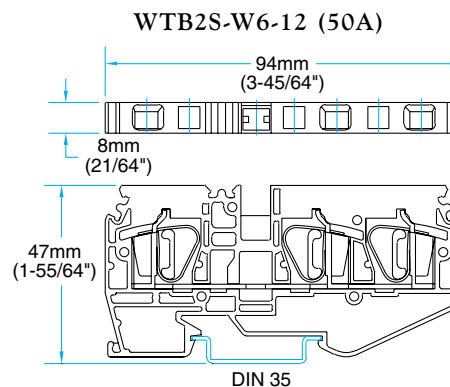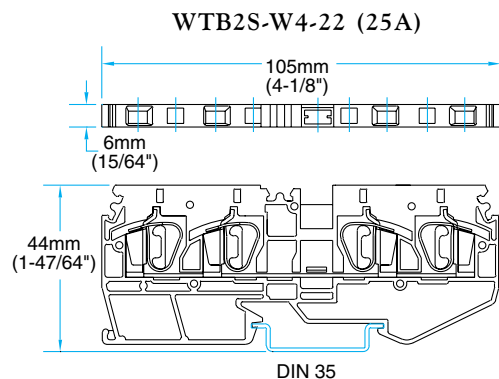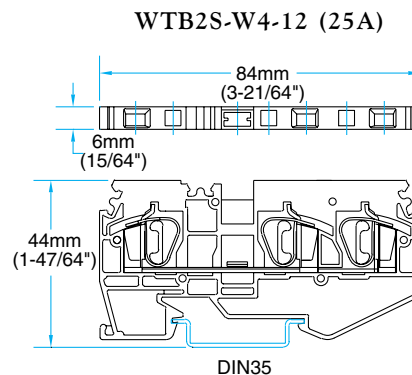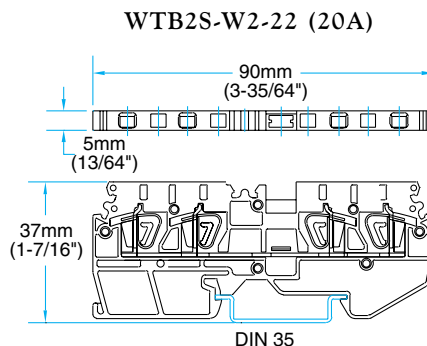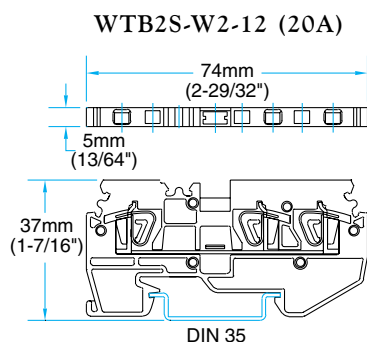


SPRING CLAMP MINIATURE FEED THROUGH PANEL MOUNT


WTB2S-MW2 (20A)




WTB2S-MW2-22 (20A)


SPRING CLAMP END PLATES


WTB2S-EPW2




WTB2S-EPW2-12




WTB2S-EPW2-22

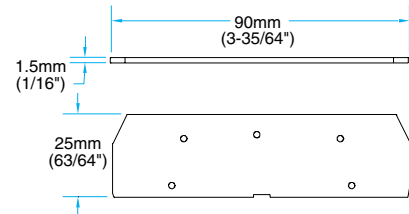


WTB2S-EPW4




WTB2S-EPW4-12

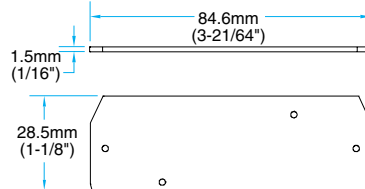


WTB2S-EPW4-22

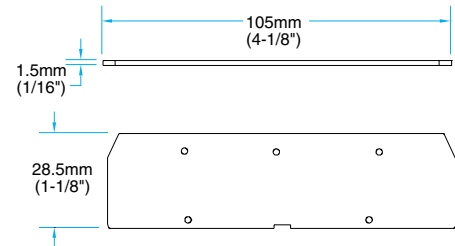


WTB2S-EPW6




WTB2S-EPW6-12

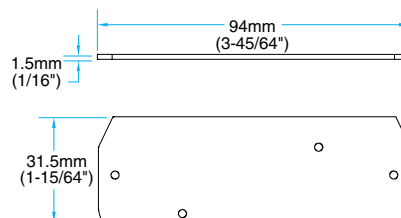

WTB2S-EPW6-22

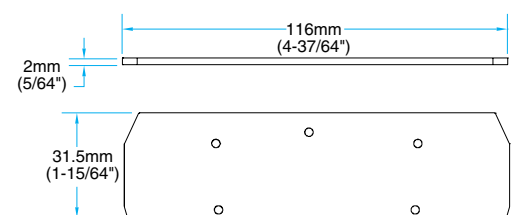

WTB2S-EPMW2



SPRING CLAMP PARTITION PLATES

