


# Military Grade COTS SWITCHES & CIRCUIT BREAKERS





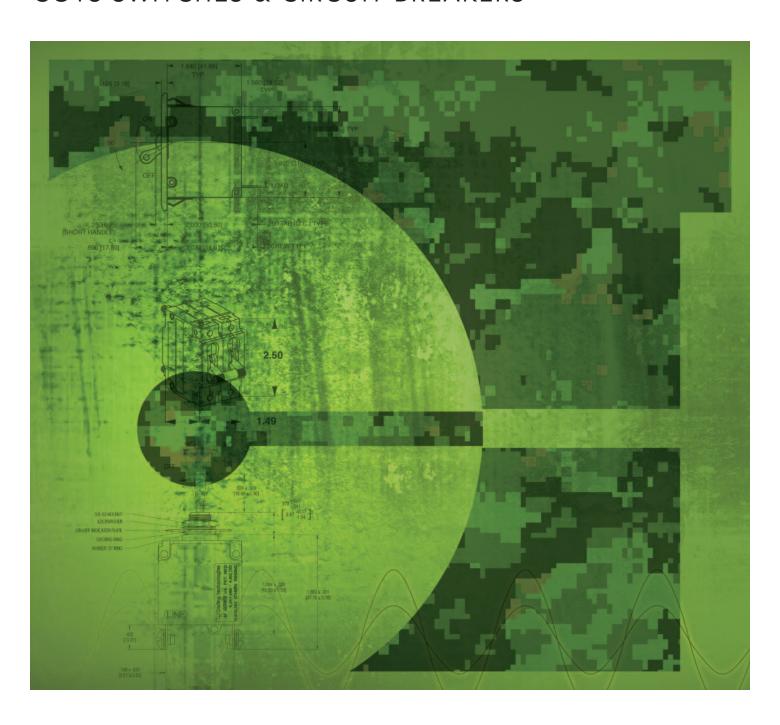

# Military COTS Switches & Circuit Breakers:

Your Military equipment is only as tough as the components used in building it! Carling Technologies products feature a wide range of switches and circuit breakers that were designed and tested to withstand the rigorous military environment. Carling Technologies COTS products provide military OEMs with a reliable and cost effective solution to their design requirements. By drawing upon over 90 years of design excellence, Carling Technologies is also able to provide switch and circuit breaker custom solutions that are sure to be compliant with the most demanding environmental requirements.


## **Contents**


Circuit Breakers	
MS-Series	2
A-Series	4
B-Series	6
C-Series	8
E-Series	10
F-Series	12
Sealed Rocker Switches	
V-Series Contura	14
W-Series	17
L-Series	19
Miniature & Sub-Miniature Switches	
1-Series Rocker	22
2-Series Toggle	23
3-Series Pushbutton	24
4-Series Slider	25
Toggle Switches	
F-Series Single Pole	26
G-Series Double Pole	27
DK/EK-Series Heavy Duty	28

MS-Series Sealed Toggle Circuit Breaker

All MS Series circuit breakers feature a durable metal sealed toggle with a MIL-PRF-39019F ingress protection level rating when mounted in panel, a robust actuator, and sealed bushing. This class leading, low cost, COTS circuit breaker was designed in accordance with requirements of specification MIL PRF-55629 & MIL-STD-202G and is guaranteed to withstand the most rigorous military environment.



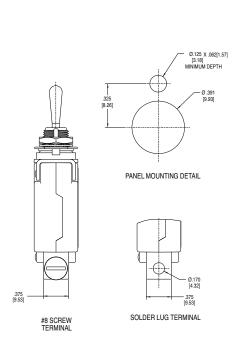

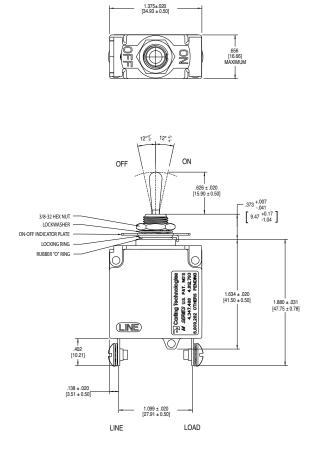

Current Rating .....2 - 25 Amps Voltage Rating ......50 Volts DC Dielectric Strength.....UL,CSA 1500V, 50/60 Hz for one minute between all electrically isolated terminals Insultation Resistance .......Minimum of 100 Megohms @ 500VDC

## **Mechanical**

Endurance	10,000 On-Off operations @ 6 per
	minute with rated current and voltag
Trip Free	Trips on short circuit, overload, even
	when actuator is forcibly held in the
	"On" position
Trip Indication	.The operating handle moves posi-
·	tively to the "Off" position when
	an overload causes the circuit
	breaker to trip

## **Physical**

Number of Poles	1 Pole
Weight	Approximately 1.8 oz (50 G) per pole
Dimensions	See reverse side

## **Environmental**

Designed in accordance with requirements of specification		
MIL PRF-55629 & MIL-STD	0-202G as follows:	
Shock	.Withstands 100G's, 6ms, saw tooth	
	while carrying rated current per	
	Method 213, Condition I. Instanta-	
	neous curves tested at 80% of	
	rated current.	
Vibration	.Withstands 0.060" excursion from	
	10-55 Hz, and 10G's 55-500 Hz, at	
	rated current per Method 204C,	
	Test Condition A. Instantaneous	
	curves tested at 80% of rated current.	
Salt Spray	.Method 101, Condition A (90-95%	
	RH @ 5% NaCl Solution, 96 hrs)	
Moisture Resistance	.Method 106G	
Thermal Shock	.Method 107D, Condition A (Five	
	cycles @ -55°C to +25°C to +85°C	
	to +25°C)	

Ingress Protection Level.....MIL-PRF-55629C when mounted in panel. Other ......Materials used in this product shall

be non-nutrient to fungus growth


**UL Approval Pending** 

Operating Temperature .....-40°C to +85°C


## **Delay Curves**

#### **Dual Rated AC/DC**


Instantaneous

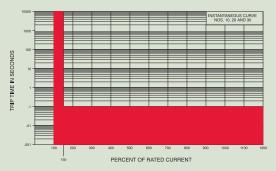

#### Short

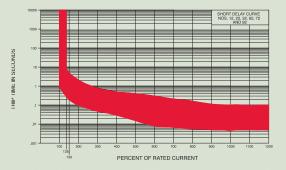


#### Medium

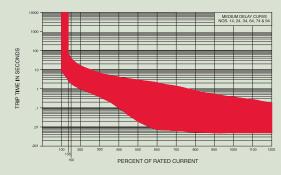

## Resistance, Impedance Values

RESISTANCE, IMPEDANCE VALUES from Line to Load Terminals (Values Based on Series Trip Circuit Breaker)



AMPERE RATING

CURRENT (AMPS)	TOLERANCE (%)
0.20 - 25.0	25%

## **A-Series Circuit Breaker**

Compact in size and well known for its proven reliability, the A-Series utilizes the hydraulic magnetic principle which provides precise operation and performance even when exposed to extremely hot and/or cold application environments. When aesthetics demand a clean contemporary and functional design, the visi-rocker two-color actuator can be specified. A rockerguard and push-to-reset bezel helps prevent inadvertent actuation. A specially constructed version is now available for applications requiring CE markings. In addition, these breakers meet CSA Standard 22.2 No. 100 for the Generator & Welder markets. It can be configured as 1-6 poles (handle), 1-3 poles (rocker), 0.02 - 50 amps, up to 277 VAC or 80 VDC, with a choice of time delays, terminals and actuator colors.



## **Agency Certifications**

#### **UL Recognized**

UL Standard 1077

**P1** 

Protectors Supplementary (Guide CCN/QVNU2, File E75596)

**UL Standard 508** 



UL Standard 1500



**UL Listed** 

UL Standard 489A





CSA Accepted

**TUV** Certified



**VDE** Certified



Component Recognition Program as

Switches, Industrial Control (Guide CCN/NRNT2, File E148683)

Protectors, Supplementary for Marine Electrical & Fuel Systems (Guide PEQZ2, File E75596) Ignition Protection


Communications Equipment (Guide CCN/DITT, File E189195)


Component Supplementary Protector under Class 3215 30, File 047848 0 000 CSA Standard C22.2 No. 235

EN60934, under License No. R72040875


EN60934, VDE 0642 under File No.

10537



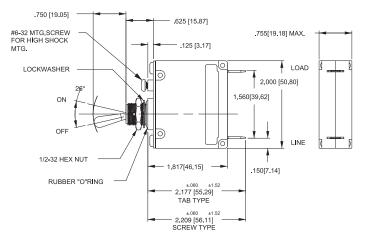


Maximum Voltage	277VAC 50/60 Hz, 80VDC
Current Ratings	Standard current coils: 0.100, 0.250,
	0.500, 0.750, 1.00, 2.50, 5.00, 7.50,
	10.0, 15.0, 20.0, 25.0, 30.0, 35.0,
	40.0, 50.0. Other ratings available -
	consult ordering scheme.
Standard Voltage Coils	DC-6V, 12V; AC-120V, Other ratings
	available, consult ordering scheme.
Auxiliary Switch Rating	SPDT; 10.1 A - 250VAC,
	1.0 A - 65VDC/0.5 A - 80 VDC,
	0.1A - 125VAC (with gold contacts).
Insulation Resistance	Minimum: 100 Megohms at 500 VDC
Dielectric Strength	UL, CSA - 1500V 60 Hz for one
	minute between all electrically
	isolated terminals. A-Series rocker
	circuit breakers comply with the 8mm
	spacing & 3750V dielectric require-
	ments from hazardous voltage to
	operator accessible surfaces per EN
	60950 and VDE 0805.
Resistance, Impedance	Values from Line to Load Terminal -




CURRENT (AMPS)	TOLERANCE (%)
0.10 - 5.0	15%
5.1 - 20.0	25%
20.1 - 50.0	35%

based on Series Trip Circuit Breaker.

#### Pulse Tolerance Curves





## **Mechanical**

Endurance	10,000 ON-OFF operations @ 6 per
	minute; with rated Current & Voltage.
Trip Free	All A-Series Circuit Breakers will trip
	on overload, even when the actuator
	is forcibly held in the ON position.
Trip Indication	The operating actuator moves posi-
	tively to the OFF position when an
	overload causes the circuit breaker
	to trip. When mid-trip handle is speci-
	fied, the handle moves to the mid
	position on electrical trip of the circuit
	breaker. When mid-trip handle with
	alarm switch is specified, the handle
	moves to the mid position & the alarm
	switch actuates when the circuit
	breaker is electrically tripped.

## **Physical**

Number of Poles	1 - 6 Poles (handle) and 1-3 poles (rocker) at 30 Amps or less. 1 and 2 poles at 31 Amps thru 50 Amps.
Internal Circuit	
Configurations	Series, (with or without auxiliary switch), Shunt and Relay with current or voltage trip coils, Dual Coil, Switch Only with or without auxiliary switch.
Weight	Approximately 65 grams/pole.
	(Approximately 2.32 ounces/pole)
Standard Colors	Housing - Black; Actuator- See
	Ordering Scheme.

## **Environmental**

specification MIL-PRF-556	cordance with requirements of 29 & MIL-STD-202 as follows:Withstands 100 Gs, 6ms, sawtooth while carrying rated current per Method 213, Test Condition "I". Instantaneous and ultra-short curves tested @ 90% of rated current.
Vibration	Withstands 0.060" excursion from 10-55 Hz, and 10 Gs 55-500 Hz, at rated current per Method 204C, Test Condition A. Instantaneous and ultrashort curves tested at 90% of rated current.
Moisture Resistance	Method 106D; ten 24-hour cycles @ + 25°C to +65°C, 80-98% RH.56 days @ +85°C, 85% RH.
Salt Spray	Method 101, Condition A (90-95% RH @ 5% NaCl Solution, 96 hrs).
Thermal Shock	.Method 107D, Condition A (Five cycles @ -55°C to +25°C to +85°C to +25°C).

Operating Temperature .....-40° C to +85° C

## **B-Series** Circuit Breaker

Designed specifically for world market applications, the Bseries utilizes the hydraulic magnetic principle which provides precise operation and performance even when exposed to extremely hot and/or cold application environments. Typical applications include power supplies, med<sup>15</sup> ical equipment, office equipment, control panels and marine equipment. In addition, these breakers meet CSA Standard 22.2 No. 100 for the Generator & Welder markets. It can be configured as 1-6 poles, 0.02 - 50 amps, up to 277 VAC or 80 VDC, with choice of time delays, terminals and actuator colors.



### **Agency Certifications**

#### **UL Recognized**

UL Standard 1077

**IR** 

Component Recognition Program as Protectors Supplementary (Guide CCN/QVNU2, File E75596)

**UL Standard 508** 

**IR** 

Switches, Industrial Control (Guide CCN/NRNT2, File E148683)

UL Standard 1500



Protectors, Supplementary for Marine Electrical & Fuel Systems

(Guide PEQZ2, File E75596) Ignition Protection

**UL Listed** 

**UL Standard 489** 



Circuit Breakers, Molded Case, (Guide DIVQ, File E189195)

UL Standard 489A







under Class 3215 30, FIle 047848 0 000

**TUV Certified** 

EN60934, under License No. R72040875




EN60934, VDE 0642 under File

No. 10537

(Guide CCN/DITT, File E189195) Component Supplementary Protector CSA Standard C22.2 No. 235


**VDE** Certified

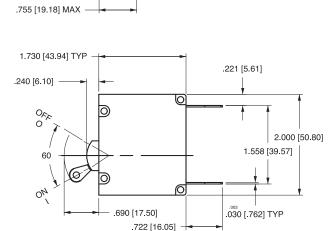


.590 DIA [Ø14.99] .050DIA [Ø1.27] (2 PL)

.096 [2.44] (2 PL)


Maximum Voltage.....277VAC 50/60 Hz, 80VDC Current Ratings.....Standard current coils: 0.100, 0.250, 0.500, 0.750, 1.00, 2.50, 5.00, 7.50, 10.0, 15.0, 20.0, 25.0, 30.0, 35.0, 40.0, 50.0. Other ratings available consult ordering scheme. Standard Voltage Coils .....DC-6V, 12V; AC-120V, Other ratings available, consult ordering scheme. Auxiliary Switch Rating......SPDT; 10.1 A - 250VAC, 1.0 A-65VDC/0.5 A - 80 VDC, 0.1A -125VAC (with gold contacts). Insulation Resistance .......Minimum: 100 Megohms at 500 VDC Dielectric Strength.....UL, CSA - 1500V 60 Hz for one minute between all electrically isolated terminals. A-Series rocker circuit breakers comply with the 8mm spacing & 3750V dielectric requirements from hazardous voltage to operator accessible surfaces per EN 60950 and VDE 0805. Resistance, Impedance......Values from Line to Load Terminal based on Series Trip Circuit Breaker.






CURRENT (AMPS)	TOLERANCE (%)
0.10 - 5.0	15%
5.1 - 20.0	25%
20.1 - 100.0	35%

#### Pulse Tolerance Curves





#### **Mechanical**

Endurance	10,000 ON-OFF operations @ 6
	per minute; with rated Current
	and Voltage.
Trip Free	All B-Series Circuit Breakers will trip
	on overload, even when Handle is
	forcibly held in the ON position.
Trip Indication	The operating Handle moves posi-
	tively to the OFF position when an
	overload causes the breaker to trip.

## **Physical**

Number of Poles	1 - 6 poles at 30 Amps or less. 1 and
	2 poles at 31 Amps thru 50 Amps.
Internal Circuit Config	Series, (with or without auxiliary
	switch), Shunt and Relay with current
	or voltage trip coils, Dual Coil, Switch
	Only (with or without auxiliary switch).
Weight	Approximately 65 grams/pole.
	(Approximately 2.32 ounces/pole)
Standard Colors	Housing- Black; Actuator - See
	Ordering Scheme.

#### **Environmental**

Designed and tested in accordance with requirements of specification MIL-PRF- 55629 and MIL-STD-202 as follows:			
Shock	Withstands 100 Gs, 6ms, sawtooth		
	while carrying rated current per		
	Method 213, Test Condition "I".		
	Instantaneous and ultra-short curves		
	tested @ 90% of rated current.		
Vibration	Withstands 0.060" excursion from 10-		
	55 Hz, and 10 Gs 55-500 Hz, at rated		
	current per Method 204C, Test Con-		
	dition A. Instantaneous and ultrashort		
	curves tested at 90% of rated current.		
Moisture Resistance	Method 106D, i.e., ten 24-hour cycles		
	@ + 25°C to +65°C, 80-98% RH.		
Salt Spray	Method 101, Condition A (90-95%		
	RH @ 5% NaCl Solution, 96 hrs).		
Thermal Shock	Method 107D, Condition A (Five cy-		
	cles @ -55°C to +25°C to +85°C to		
	+25°C).		
Operating Temperature	40° C to +85° C		

7

## **C-Series**

The C-Series circuit breaker was designed for applications that require higher amperage and voltage handling capabilities in a compact design. It is available with American Standard or Metric Threaded Stud terminals, or Saddle Clamp screw terminals. Additional options include mid-trip handle style actuator, solid color rocker actuators and Visirocker two color actuators. The Visi-rocker option can be specified to indicate either the ON or TRIPPED/OFF mode while the optional Rockerguard and Push-To-Reset bezel can help prevent inadvertent actuation.

The C-Series UL489 breakers employ a unique arc chute design which results in obtaining higher interrupting capacities, up to 50,000 amps. Thermoset glass filled polyester half shell construction increases mechanical & electrical strength and the Wiping Contacts - Mechanical linkage with two-step actuation – cleans contacts, provides high, positive contact pressure & longer contact life;

1-6 poles, 0.02 - 100 amps, up to 480 VAC or 80 VDC, UL489 up to 240 VAC or 125 VDC, with choice of time delays and actuator colors.



#### **Agency Certifications**

#### **UL Recognized**

UL Standard 1077



UL Standard 508



UL Standard 1500



#### **UL Listed**

UL Standard 489



UL Standard 489A



tCSA Accepted



Component Recognition Program as Protectors Supplementary (Guide CCN/QVNU2, File E75596)

Switches, Industrial Control (Guide CCN/NRNT2, File E148683)

Protectors, Supplementary for Marine Electrical & Fuel Systems (Guide PEQZ2, File E75596) Ignition Protection

Circuit Breakers, Molded Case, (Guide DIVQ, File E189195)

Communications Equipment (Guide CCN/DITT, File E189195)

Component Supplementary Protector under Class 3215 30, Flle 047848 0 000 CSA Standard C22.2 No. 235

**CSA Certified** 



**TUV Certified** 



**VDE** Certified




Circuit Breaker Model Case (Class 1432 01, File 093910), CSA Standard C22.2 No. 5.1 - M


EN60934, under License No. R72040875


EN60934, VDE 0642 under File No. 10537



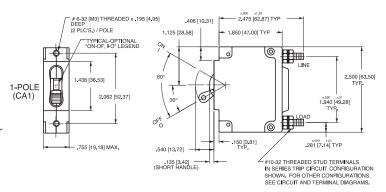


Maximum Voltage.....277VAC 50/60 Hz, 80VDC Current Ratings.....Standard current coils: 0.100, 0.250, 0.500, 0.750, 1.00, 2.50, 5.00, 7.50, 10.0, 15.0, 20.0, 25.0, 30.0, 35.0, 40.0, 50.0. Other ratings available consult ordering scheme. Standard Voltage Coils .....DC-6V, 12V; AC-120V, Other ratings available, consult ordering scheme. Auxiliary Switch Rating......SPDT; 10.1 A - 250VAC, 1.0 A-65VDC/0.5 A - 80 VDC, 0.1A -125VAC (with gold contacts). Insulation Resistance .......Minimum: 100 Megohms at 500 VDC Dielectric Strength.....UL, CSA - 1500V 60 Hz for one minute between all electrically isolated terminals. A-Series rocker circuit breakers comply with the 8mm spacing & 3750V dielectric requirements from hazardous voltage to operator accessible surfaces per EN 60950 and VDE 0805. Resistance, Impedance......Values from Line to Load Terminal based on Series Trip Circuit Breaker.






CURRENT (AMPS)	TOLERANCE (%)
0.10 - 5.0	15%
5.1 - 20.0	25%
20.1 - 100.0	35%

#### Pulse Tolerance Curves





#### Mechanical

Endurance	10,000 ON-OFF operations @ 6
	per minute; with rated Current
	and Voltage.
Trip Free	All B-Series Circuit Breakers will trip
·	on overload, even when Handle is
	forcibly held in the ON position.
Trip Indication	The operating Handle moves posi-
	tively to the OFF position when an
	overload causes the breaker to trip.

## **Physical**

Number of Poles	1 - 6 poles at 30 Amps or less. 1 and
	2 poles at 31 Amps thru 50 Amps.
Internal Circuit Config	Series, (with or without auxiliary
	switch), Shunt and Relay with current
	or voltage trip coils, Dual Coil, Switch
	Only (with or without auxiliary switch).
Weight	Approximately 65 grams/pole.
	(Approximately 2.32 ounces/pole)
Standard Colors	Housing- Black; Actuator - See
	Ordering Scheme.

### **Environmental**

Designed and tested in accordance with requirements of specification MIL-PRF- 55629 and MIL-STD-202 as follows:			
ShockWithstands 100 C			
while carrying rat	ed current per		
Method 213, Tes	t Condition "I".		
Instantaneous an	d ultra-short curves		
tested @ 90% of	rated current.		
VibrationWithstands 0.060	" excursion from		
10-55 Hz, and 10	Gs 55-500 Hz, at		
rated current per	Method 204C,		
Test Condition A.	Instantaneous		
and ultrashort cu	rves tested at 90%		
of rated current.			
Moisture ResistanceMethod 106D, i.e	e., ten 24-hour cycles		
@ + 25°C to +65°	°C, 80-98% RH.		
Salt SprayMethod 101, Cor	ndition A (90-95%		
RH @ 5% NaCl So	olution, 96 hrs).		
Thermal ShockMethod 107D, Co	ondition A (Five		
cycles @ -55°C to	+25°C to +85°C		
to +25°C).			
Operating Temperature40° C to +85° C			

## E-Series Circuit Breaker

Ideally suited for higher amperage applications, the E-Series is available with front and back mounting, screw terminals, stud terminals and heavy duty box wire connectors for solid wire or a pressure plate connector for stranded wire. Consult factory for an optional power selector device.

The E-Series is UL Listed and CSA Certified for Branch Circuit protection which does not require a fuse backup. It is also UL Recognized and CSA Certified as a Supplementary Protector and as a Manual Motor Controller.

1-6 poles, .1 - 100 amps, up to 600 VAC or 125 VDC, with choice of time delays and actuator colors.



## **Agency Certifications**

#### **UL Recognized**

UL Standard 1077

*P*1

Component Recognition Program as Protectors, Supplementary (Guide QVNU2, File E75596)

UL Standard 508



Component Recognition Program as Manual Motor Controls (Guide NLRV2, File E135367)

UL Standard 1500



Protectors, Supplementary for Marine Electrical & Fuel Systems (Guide PEQZ2, File E75596) Ignition Protection

**UL Listed** UL Standard 489



Circuit Breakers, Molded Case (Guide DIVQ, File E129899)





Component Supplementary Protector (Class 3215 30, File 047848 0 000) CSA Standard C22.2 No. 235

**CSA Certified** 



Circuit Breaker Molded Case (Class 1432 01, File 093910), CSA Standard

**TUV** Certified



EN60934 under License No. R72031056

C22.2 No. 5.1 - M

**VDE** Certified



EN60934, VDE 0642 under File No. 10537


## **Electrical**

#### Table A:

Lists UL Listed (489) & CSA Certified (C22.2 No. 5) configurations & performance capabilities as a Molded Case Circuit Breaker.


Actual size

E-SERIES TABLE A : UL489 LISTED BRANCH CIRCUIT BREAKERS						
		VOLTAGE		CURRENT	INTERRUPTING CAPACITY	
	CIRCUIT MAX. RATING				RATING	(AMPS)
CONFIGUR		FREQUENCY	PHASE	FULL LOAD AMPS	WITHOUT BACKUP FUSE	
		80	DC		0.10 - 125	50,000
	SERIES 1.	125	DC		0.10 - 125	10,000
SERIE		120	50 / 60	1	0.10 - 125	10,000
		120 / 240	50 / 60	1	0.10 - 125	10,000
	240	50 / 60	1 & 3	0.10 - 100	5,000	

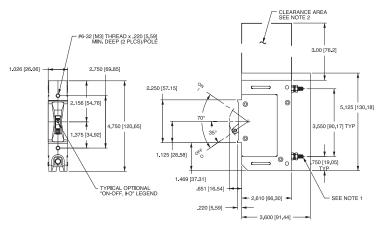


Maximum Voltage	.600VAC 50/60 Hz, 125VDC
	(See Table A)
Current Ratings	Standard current coils: 0.100, 0.250,
_	0.500, 1.00, 2.50, 5.00, 7.50, 10.0,
	15.0, 20.0, 25.0, 30.0, 50.0, 60.0,
	70.0 & 100 Amp.
Auxiliary Switch Rating	.SPDT; 10.1A 250VAC, 1.0A 65VDC;
	0.5A 80VDC, 0.1A 125VAC (with
	gold contacts).
Insulation Resistance	.Minimum of 100 Megohms at
	500 VDC.
Dielectric Strength	.UL, CSA: 2200 V 50/60 Hz for one
	minute between all electrically
	isolated terminals. E-Series Circuit
	Breakers comply with the 8mm
	spacing and 3750V 50/60 Hz dielectric
	requirements from hazardous voltage
	to operator accessible surfaces,
	between adjacent poles and from
	main circuits to auxiliary circuits per
	Publications EN 60950 and VDE 0805.
Resistance, Impedance	.Values from Line to Load Terminal -
	based on Series Trip Circuit Breaker.





CURRENT (AMPS)	TOLERANCE (%)
0.10 - 5.0	± 15%
5.1 - 20.0	± 25%
20.1 - 125.0	± 35%
5.1 - 20.0	± 25%

#### Pulse Tolerance Curves

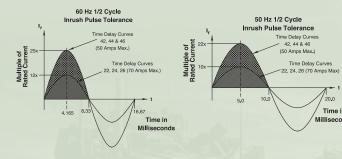

## **Mechanical**

Endurance	10,000 ON-OFF operations @ 6 per minute; with rated Current and Voltage.
Trip Free	All E-Series Circuit Breakers will trip on overload, even when Handle is forcibly held in the ON position.
Trip Indication	The operating Handle moves positively to the OFF position when an overload causes the breaker to trip.

## **Physical**

Number of Poles	.1 - 6
Mounting	.A 3" minimum spacing must be
	provided between the circuit breaker
	arc venting area on back connected
	E-Series circuit breakers and
	grounded obstructions. E-Series
	circuit breakers must be mounted
	on a vertical surface.
Connectors, Box Type	.Front connected E-Series circuit
	breakers are supplied with box
	type pressure connectors that accept
	copper or aluminum conductors
	as follows: 1/0-14 Copper,
	1/0-12 Aluminum.
Internal Circuit	.Series and Switch Only, (with or
Configuration	without auxiliary switch). Shunt with current coils.
Weight	.Approximately 252 grams/pole
9	(Approximately 9 ounces/pole)
Standard Colors	.Housing-Black; Actuator - See
	Ordering Scheme.

## **Environmental**

Designed and tested in accordance with requirements of specification MIL-PRF- 55629 and MIL-STD-202 as follows:
ShockWithstands 100 Gs, 6ms, sawtooth
while carrying rated current per
Method 213, Test Condition "I".
VibrationWithstands 0.060" excursion from
10-55 Hz, and 10 Gs 55-500 Hz, at
rated current per Method 204C,
Test Condition A.
Moisture ResistanceMethod 106D, i.e., ten 24-hour cycles
@ + 25°C to +65°C, 80-98% RH.
Salt SprayMethod 101, Condition A (90-95%
RH @ 5% NaCl Solution, 96 hrs).
Thermal ShockMethod 107D, Condition A
(Five cycles @ -55°C to +25°C to
+85°C to +25°C).
Operating Temperature40° C to +85° C

www.carlingtech.com 11

20.0

Time in Milliseconds

# F-Series Circuit Breaker

F-Series breakers are available with current ratings up to 700 Amps. The optional 25 millivolt metering shunt construction provides a safe method for monitoring current flowing through the breaker by simply connecting a meter with light gauge wire to the appropriate terminals located on the shunt housing at the rear of the breaker. This allows applications to be customized by measuring and displaying percentage of current, watts or safe/danger zones.





250

## **Agency Certifications**

#### **UL Listed**

UL Standard 489A



Circuit Breakers, Molded Case, (Guide DIVQ7, File E129899), UL Standard 489; Complies with the requirements of CSA Standard for Molded Case Circuit Breakers, CAN/CSA - C22.2

No. 5.1 - M

**TUV Certified** 



EN60947-2

Low Voltage Switchgear and Control Gear under License No. R72031058

#### **Electrical**

#### Table A:

Lists UL Listed (489) and CSA Certified (C22.2 NO. 5.1-M) configurations and performance capabilities as a Molded Case Circuit Breaker

F-SERIES TABLE A : UL489 LISTED BRANCH CIRCUIT BREAKERS					
VOLTAGE		DLTAGE	CURRENT	INTERRUPTING	
CIRCUIT			RATING	CAPACITY (AMPS)	
CONFIGURATION	MAX. RATING	FREQUENCY	FULL LOAD AMPS	UL / CSA 1 - 3 POLES	TUV 1 or 2 POLES
SERIES	125	DC	50 - 250	50,000	25,000

#### Table B:


Lists UL Listed configurations and performance capabilities as Circuit Breakers for use in Communications Equipment (Guide DITT, File E189195), under UL489A

F-SERIES TABLE B : UL489 LISTED BRANCH CIRCUIT BREAKERS				
	VO	LTAGE	CURRENT	INTERRUPTING
CIRCUIT			RATING	CAPACITY (AMPS)
CONFIGURATION	MAX. RATING	FREQUENCY	FULL LOAD AMPS	WITHOUT BACKUP FUSE
SERIES	125	DC	251 - 700	50,000




113 [2 87]

7.125 [180.98]

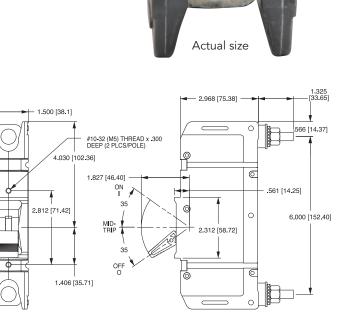

Maximum Voltage	.125VDC
Current Ratings	.Standard current coils: 100, 125, 150,
	175, 225, 250 amps. 300, 350, 400,
	500, 600, 700 amps available as
	parallel pole construction.
Auxiliary Switch Rating	.SPDT; 10.1 Amps @ 250VAC, 1.0
,	Amps @ 65VDC, 0.5 Amps @ 80VDC
	0.1 Amps @ 125VAC (with gold
	contacts).
Insulation Resistance	.Minimum: 100 Megohms at 500 VDC
Dielectric Strength	.1960 VAC, 50/60 Hz for one minute
	between all electrically isolated termi-
	nals, except 2500 VAC for one minute
	between alarm/aux. switch and main
	terminals with contacts in open and
	closed position. F-Series circuit break-
	ers comply with the 8mm spacing &
	3750VAC 50/60 Hz dielectric require-
	ments from hazardous voltage to
	operator accessible surfaces, between
	adjacent poles and from main circuits
	to auxilary circuits per Publications EN
	60950 and VDE 0805.
Resistance, Impedance	.Values from Line to Load Terminal -
	based on Series Trip Circuit Breaker.

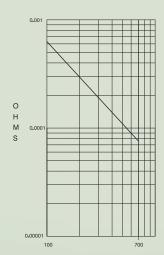

CURRENT	TOLERANCE	
(AMPS)	(%)	
100 - 700	50%	

## Mechanical

Endurance	4000 ON-OFF operations with rated Current & Voltage & 4000 operations with no load (8000 operations total) @ 5 per minute. Parallel Pole con- struction: 1000 operations with rated Current and Voltage @ 5 per minute.
Trip Free	
·	on overload, even when the actuator is forcibly held in the ON position.
Trip Indication	The operating actuator moves positively to the OFF position when an overload causes the circuit breaker to trip.

## **Physical**

Number of Poles	.1 - 3 Poles Note: Ratings over 250 Amps only available with parallel pole.
Internal Circuit Config	Series (with or without auxiliary
	switch), Switch Only (with or without
	auxiliary switch).
Available Accessories	.Factory installed: DC Current Meter-
	ing Shunt (25 mV @lr)
Weight	.Varies depending on construction.
	Consult factory.
Standard Colors	.Housing - Black; Actuator - Black
	or White with contrasting
	ON-OFF legend.

## **Environmental**

Designed and tested in accordance with requirements of specification MIL-PRF-55629 & MIL-STD-202 as follows:		
	Withstands 100 Gs, 6ms, sawtooth	
	while carrying rated current per Method 213, Test Condition "I". Instantaneous and ultra-short curves tested @ 90% of rated current.	
Vibration	Withstands 0.060" excursion from	
	10-55 Hz, and 10 Gs 55-500 Hz, at rated current per Method 204C, Test	
	Condition A. Instantaneous and	
	ultrashort curves tested at 90% of rated current.	
Moisture Resistance	Method 106D; ten 24-hour cycles @ + 25°C to +65°C, 80-98% RH. 56 days @ +85°C, 85% RH.	
Salt Spray	Method 101, Condition A (90-95%	
	RH @ 5% NaCl Solution, 96 hrs).	
Thermal Shock	Method 107D, Condition A (Five cycles @ -55°C to +25°C to +85°C to +25°C).	
Operating Temperature	40° C to +85° C	

# V-Series Contura Switches

V-Series switches offer countless unique options including choices for ratings, colors, illuminations and symbols. These switches feature removable actuators in a choice of actuator styles and colors, and are available in single or double pole configurations. The V-Series switches can be illuminated with either square, oval and/or bar shaped lenses.

Typical Vehicles Applications: Amphibious, Special Task, Armored, SWAT/Assault, Law Enforcement, Mobile Crime Lab, Security and Medical Vehicles.





### Contura II & III

The Contura II & III actuators are constructed of thermoplastic polycarbonate and are offered with either a hard nylon overlay or a "soft-touch" elastomer overlay. These Contura models incorporate aesthetic designs on the top and bottom of the rocker featuring two rows of raised "bumps" on the Contura II and three "indented" lines on the Contura III.




#### Contura V

The symmetrically curved Contura V actuator provides the perfect complement to the Contura IV's "Shape to create a Shape" design concept. With its flush style mounting bracket, Contura V can be mounted in between two Contura IV's, by itself, or in groups.



## Contura X & XI

The raised bracket/bezel on the Contura X & XI helps prevent inadvertent actuation of the rocker, as well as preventing debris from being trapped under the actuator. Both The Contura X concave rocker and the convex style Contura XI are available with a variety of lenses and legends.

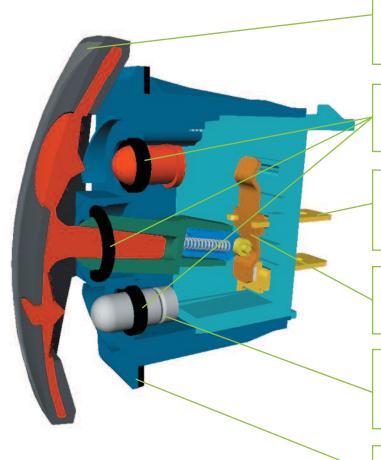

### MAXIMUM DESIGN OPTIONS WITH MINIMUM INVENTORIES

Panel redesign is a snap, requiring no tooling change, with our removable interchangeable actuators. A unique balance between aesthetics and functionality.

#### SEALS OUT WATER, DUST AND DEBRIS

Dual seal protection locks out elements. Certified to IP66/IP68 for front panel components.

#### **CLEAN CONNECTIONS**

Offered in both eight and ten terminal base options to accommodate most any circuit need. AMP & Packard compatible connectors available.

#### WITHSTANDS EXTREME TEMPERATURES

Roller pin mechanism eliminates need for lubricants, so it can withstand from -40°C to +85°C.

#### MULTIPLE LIGHTING OPTIONS


Incandescent lamps & LED lighting. Our LED illumination is offered in a wide array of light intensities, colors, as well as dual level, tri-color, and flashing options.

#### OPTIONAL PANEL SEAL

Helps prevent water/dust ingress behind panel.


DIMENSIONAL SPECIFICATIONS: IN. [MM]

#### **CONTURA II & III STYLE**



8 TERMINAL BASE W/O BARRIERS

CONTURA X & XI STYLE
SHOWN WITH RAISED
BRACKET AND TWO SQUARE
LENSES



10 TERMINAL BASE W/O BARRIERS

Contact Rating	.0.4VA @ 24VDC (MAX) resistive
	15 amps, 125VAC
	10 amps, 250VAC
	1/2 HP 125-250VAC
	20 amps, 4-14VDC
	15 amps, 15-28VDC
	10A, 14VT
	6A, 125VAC L
Dielectric Strength	.1500 Volts RMS
Insulation Resistance	.50 Megaohms
Initial Contact Resistance	.10 milliohms max. @ 4VDC
Life	.50,000- 100,000 cycles
	circuit dependent
Contacts	.Silver alloy, silver tin-oxide, fine silver
Terminals	.Brass or copper/silver plate 1/4"
	(6.3mm) Quick Connect terminations
	standard. Solder lug, Wire Lead

## Mechanical

Endurance.....150,000 cycles minimum

## **Physical**

Lighted	.Incandescent - rated 10,000 hours
	Neon - rated 25,000 hours
	LED - rated 100,000 hours 1/2 life
	(LED is internally ballasted for
	voltages to 24VDC)
Seals	.Internal
	Optional external gasket panel seal
Base	.Polyester blend rated to 125°C with a
	UL flammability rating of 94V0.
Contura II, III, IV, V, VI	
Actuator	.Hard Surface: Basic actuator structure
	molded of thermoplastic polycarbon-
	ate with a hard Nylon 66 thermoplastic
	surface overlay. Soft Surface: Basic
	actuator structure molded of thermo-
	plastic polycarbonate with an elas-
	tomer overlay.
Contura X, XI, XII	

## **Actuator Travel (Angular Displacement)**

Actuator, VP .......Nylon 66 Reinforced rated to 105°C Lens ......Polycarbonate rated at 100°C

2 position	18°
3 positions	9° from center

## **Mounting Specifications**

Panel Thicknes	ss Range	.830[21.08] -	-
# of gaskets	Acceptable Panel Thickness		
0	030 to .250 (.76mm to 4.76mm)	10%	
1	030 to .109 & .147 to .157	1.450[36.83]	TEST CUT HOLE IN ACTUAL
	(.76 to 2.77mm & 3.73 to 3.98mn	n)	MATERIAL
Recommende	d: No gasket with panel thickness	5	
of .032, .062, .	093, .125,.187 or .250		SWITCH
		МО	UNTING HOLE

## **Agency Certifications**















### Environmental

<b>Environmental</b>		
Environmental	IEC 529, BS 549 010. This rating a components of the and signifies protection the prolonged etunder pressure. Immersion under submersion under submersion under 30 minutes. The exceeded these	P68, in accordance with 0, DIN 400 50 & NFC 20 applies to front panel the actual switch only, stection against dust and ffects of immersion The standard test for r pressure requires er one meter of water The V-Series switch has parameters, having and illuminated during
Corrosion	Flowing Mixed	accelerated exposure 7, B-845
Operating Temperature Vibration 1	40°C to + 85°C Per Mil-Std 202F Condition A 0.0 Hz. Tested with ' teria - No loss o	
Vibration 2	Resonance sear 24-50 Hz 0.40 D 50-2000 ±10 G' Results Horizon Random 24 Hz 60 Hz 100 Hz 200 Hz	ch DA
Shock	seconds chatter Per Mil-Std 202 Condition K @ 3 connector. Test circuit during te	F, Method 213B, Test 80G's. Tested with VCH criteria - No loss of st, pre and post test
Salt Spray	contact resistan	, Method 101D, Test
Dust	Per Mil-Std 810	00 Feet/Min, Test
Thermal Shock	Per Mil-Std 202	
Moisture Resistance	Per Mil-Std 202F	st contact resistance ; Method 106F, Test Cri- ost test contact resistance
Ignition Protection	All Contura swite	
		6 for ignition protection,

in addition to conformance with EC directive 94/25/EC for marine products.


# W-Series Fully Sealed Rocker Switches

Carling Technologies set the standard for performance, reliability and aesthetics with the widely successful, often imitated, but never duplicated, V-Series rocker switches. Building further upon that platform, Carling has once again raised the bar with the fully sealed W-Series. The W-Series traditional appearance features complete IP68 protection, even below the panel, where the critical connection is made from your wiring harness. When used in conjunction with the integrated connector, the totally submersible W-Series provides a seal for up to ten individual wires, assuring compatibility with even the most complex circuitry.

The W-Series also offers a wide variety of accoutrements including endless illumination options featuring dual level and multicolor LEDs, progressive and hazard warning circuits, ratings up to 10A 24V, choice of paddle, rocker, locking or laser etched actuators, hundreds of standard legend choices and the electrical performance and reliability that is the hallmark of Carling Technologies products.

Typical Vehicles Applications: Amphibious, Special Task, Armored, SWAT/Assault, Law Enforcement, Mobile Crime Lab, Security and Medical Vehicles.



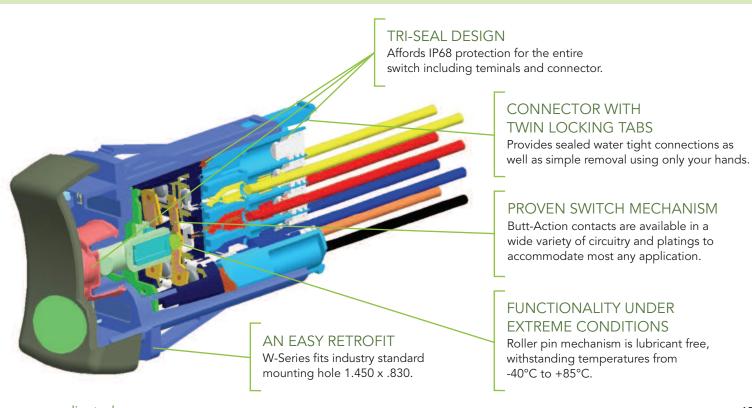

Contact Rating	0.4VA @ 24VDC
	10 amps, 3-24VDC
Dielectric Strength	1500 Volts RMS
Insulation Resistance	50 Megaohms
Initial Contact Resistance.	10 milliohms max. @ 4 VDC
Life	100,000 cycles
Contacts	Silver tin-oxide, 88/12
Terminals	Copper with silver or gold plating.
	Quick Connect terminations.
Voltage	3-24 VDC
Overcurrent	15A for 50 cycles

## **Mechanical**

Endurance250,000 cycles minimum
---------------------------------

## **Physical**

Lighted	.LED - rated 100,000 hours 1/2 life (LED is internally ballasted for voltages to 24 VDC)
Seals	.Neoprene
	.Polyester blend rated to 125C with a
	UL flammability rating of 94V0.
Actuator	Basic actuator structure molded of thermoplastic polycarbonate with a hard Nylon 66 thermoplastic surface overlay.
Lens	.Polycarbonate rated at 100°C
Function	.2 & 3 Position Rocker Style
Operation	.Maintained & Momentary
Base	.PA 6/6 30GF (glass filled)
Actuator	.PA 6/6 13GF
Bracket	.PBT 10GF
Connector	.PBT 10GF, polarized

## **Actuator Travel (Angular Displacement)**

.418 [10.62]

2.162 [54.91]

24° full throw


### **Environmental**


Environmental	IP68, Fully seale	ed
Corrosion/		
Chemical Splash	Flowing Mixed	Gas (FMG)
	Class III 3 year	accelerated exposure
	per ASTM B-82	
Operating Temperature		
Vibration 1		
		06 DA or 10G's 10-500
	Hz.	
Vibration 2		
	24-50 Hz 0.40 [	
	50-2000 ±10 G	•
		tal Axis 3-5 G's max.
	Random	0.07.000.0 ///
	24 Hz	0.06 PSD-Gsq/Hz
	60 Hz	0.50
	100 Hz	0.50
	200 Hz 2000 Hz	0.025 0.025
Handling/Drop		
Salt SprayPer Mil-Std 202F, Method Test Condition A, 48 Hrs.		
Dust		A, 40 1 113.
Thermal Shock		F Method 107F
THE THE SHOCK		A, -55°C to 85°C.
	Test criteria - pr	
	contact resistan	•
Moisture Resistance/		
Humidity	Per Mil-Std 202	F, Method 106F,
		re and post test
	contact resistan	


## **Mounting Specifications**

Panel Thickness Range .032 to .125

For optimum panel fit, the following panel thicknesses are suggested: .032, .062, .093, .125







WCH CONNECTOR (190-31214-001)

DIMENSIONAL SPECIFICATIONS: IN. [MM]

#### **Notes:**

SWITCH SHOWN WITH CONNECTOR INSTALLED

WCH connector is intended for use with Tyco/Amp .110 Junior Power Timer, female contacts, and wire seals. For 14-16 awg wire, specify Tyco/Amp P/N 927766-3. For 16-20 awg wire, specify Tyco/Amp P/N 927770-3. Tyco/Amp cable seal P/N 828904-1 (20-18 awg wire) or P/N 828905-1 (16-14 awg wire) is revquired for each individual wire lead, and Tyco/Amp cable plug, P/N 828922-1, is required to seal each unused connector opening. Consult Tyco/Amp for the cable seal recommended for your specific wire gauge and thickness.

1.000 [25.40]

# L-Series Sealed Switches

Making the right connections has never been easier — with the L-Series Rocker Switch from Carling Technologies. Not only does this innovative switch offer total design flexibility, it has set new standards for both performance and reliability. It's IP67 certified, and able to withstand temperatures from -40°C to +85°C. A 12 terminal switch base accommodates countless switch and lamp circuit combinations. Additional features include LED illuminated lenses or laser etched rockers, as well as 50 [36.8] hundreds of legend choices and several accessories.

Typical Vehicles Applications: Amphibious, Special Task, Armored, SWAT/Assault, Law Enforcement, Mobile Crime Lab, Security and Medical Vehicles.



#### ELIMINATES NEED FOR RETOOLING

Neatly proportioned, our L-Series fits an industry standard mounting hole of 1.734" x .867" (44.0 mm x 22.0 mm).

#### INTEGRATES EASILY INTO YOUR SYSTEM

You can choose from a variety of termination options, including .250 TAB QC & .187 TAB QC. Optional connector allows for prewiring of wire harnesses.

#### **ENSURES GREATER SHOCK PROTECTION**

Welded lamp connection and one-piece internal, jumperless terminal withstand extreme shock and vibration.

#### WITHSTANDS EXTREME TEMPERATURES

Roller pin mechanism eliminates need for lubricants, so it can withstand from -40 $^{\circ}$ C to +85 $^{\circ}$ C.

#### MAXIMIZES YOUR DESIGN FLEXIBILITY

Twelve terminals offer you an extensive range of switch and lamp circuit options, including LED or incandescent illumination.



ā	0.4VA @ 24VDC (MAX) resistive, 15 amps, 125VAC, 10 amps, 250VAC, 20
Dielectric Strength1	amps, 4-14VDC, 15 amps, 15-28VDC 250 Volts RMS between pole to pole, 3750 Volts RMS between live
p	parts and accessible surfaces
Insulation Resistance5	50 Megaohms
Initial Contact Resistance1	10 milliohms max. @ 4VDC
	100,000 cycles maintained, 50,000
C	cycles momentary at rated voltage
Contacts9	20/10 silver-nickel, silver tin-oxide, gold
TerminalsE	Brass or copper/silver plate 3/16" 4.76mm) & 1/4" (6.3mm) Quick Connect terminations standard.

### Mechanical

Endurance.....250,000 cycles minimum

## **Physical**

Lighted	Incandescent - rated 10,000 hours LED - rated 100,000 hours 1/2 life (LED is internally ballasted for voltages to 24 VDC)
Seals	Rocker, base & bracket are sealed.
Base	
Rocker	Nylon 66 Reinforced, rated to 105°C (modular lens). Locking rocker, stan- dard rocker & paddle. Laser etching with a polycarbonate actuator.
Lock	Acetal
Lens	Polycarbonate rated at 100°C.
Bracket	Nylon Zytel
Connector	Nylon 66 rated at 85°C. Polarized.


## **Actuator Travel (Angular Displacement)**

2 position	26°
3 positions	13° from center

## **Environmental**

Environmental	the actual switch index of protect	n, representing an iion as applied to
		ment in accordance S 5490, DIN 400 50 &
Corrosion Resistance		Gas MFG Class III per
		B-845, Method H,
Operating Temperature	40°C to + 85°C	,
Vibration 1	Per Mil-Std 2021	F, Method 204D Test
		6 DA or 10G's 10-500
	Hz. Tested with	
		loss of circuit during
		d post test contact
Vibration 2	resistance.	ch 24-50 Hz 0.40
VIDIALION Z		G's peak. Results
	Horizontal Axis	
	Random	0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
	24 Hz	0.06 PSD-Gsq/Hz
	60 Hz	0.50
	100 Hz	0.50
	200 Hz	0.025
	2000 Hz	0.025
	No loss of circui	t during test;
Shock	<10µ chatter.	F, Method 213B, Test
3110CK		BOG's. Tested with
		Test criteria - No loss
		test, pre, and post
	test contact resi	
Salt Spray	Per Mil-Std 2021	F, Method 101D, Test
	Condition A, 48	
Thermal Shock		
	Condition A, -55	
	lest criteria - pre tact resistance.	e and post test con-
Moisture Resistance		F Method 106F
Wioisture Nesistance	Test Criteria - pr	
	contact resistan	

## **Mounting Specifications**




MOUNTING HOLE


Panel Thickness Range Acceptable Panel Thickness .030 to .156 (.76mm to 3.96mm) Recommended: .030, .062, .093, .125 and .156

#### DIMENSIONAL SPECIFICATIONS: IN. [MM]


L-SERIES SHOWN WITH LASER ETCHED ACTUATOR

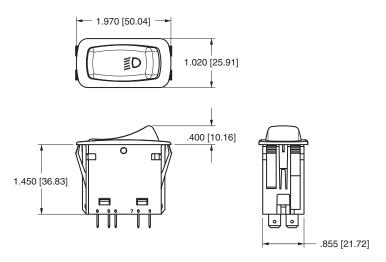


L-SERIES SHOWN WITH ROCKER GUARD

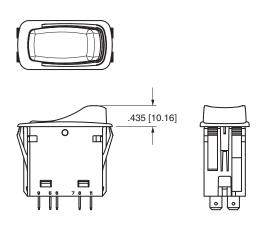

L-SERIES
SHOWN WITH LARGE LENS
AND PADDLE ACTUATOR

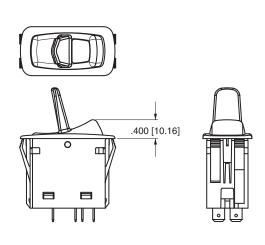

L-SERIES
SHOWN WITH BAR LENS, LOCK
AND CONNECTOR

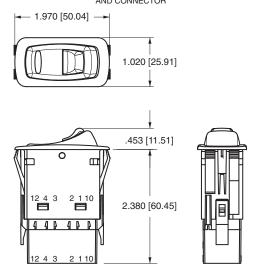



#### L-SERIES CONNECTOR

LC1-01 BLACK .250 TAB CONNECTOR (PACKARD 630 SERIES)

.790 [20.07]

LC2-01 BLACK .187 TAB CONNECTOR (PACKARD 480 SERIES)

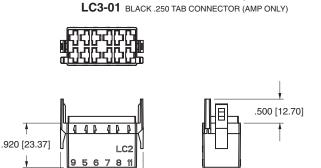

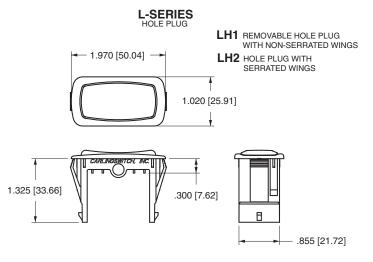


→ 1.710 [43.43] →

# 1-Series Miniature/ Sub-Miniature Switches









Typical Equipment Applications: Communication, GPS Tracking, Radar, Mobile Medical, and Audio/Visual Equipment

## **Specifications**

Electrical Life	. <b>151-Series:</b> 30,000 make &
	break cycles @ full load
	<b>1SS &amp; 1SM-Series:</b> 50,000 make
	& break cycles @ full load
	<b>1M1-Series:</b> 50,000 make &
	break cycles @ full load
	<b>1MS-Series:</b> 30,000 make &
	break cycles @ full load
Contact Resistance	.15-Series: 20 m $\Omega$ max. initial @ 2-4
	VDC 100mA for both silver & gold
	plated contacts
	<b>1M-Series:</b> 10 m $\Omega$ max. initial @ 2-4
	VDC 100mA for both silver & gold
	plated contacts
Insulation Resistance	.1000 MΩ min.
Dielectric Strength	.1500 Volts RMS @ sea level
Operating Temperature	30°C to +85°C
Index of Protection	
	<b>1MS-Series:</b> IP67
Solder Heat Resistance	.MIL-STD-202, Method 210
Actuator Travel	.25°

## **Materials**

Case	all UL 94V-0
	<b>1S1-Series:</b> Dially phthalate (DAP)
	<b>1SS-Series:</b> Glass filled nylon 6/6,
	flame retardant, heat stabilized
	<b>1SM-Series:</b> Glass filled nylon 4/6,
	flame retardant, heat stabilized
	<b>1M1-Series:</b> Dially phthalate (DAP)
	(UL 94V-0)
	<b>1MS-Series:</b> Glass filled nylon 6/6,
	flame retardant, heat stabilized
	(UL 94V-0)
Rocker	<b>1S1-Series:</b> Nylon (UL 94V-0)
	1SS & 1SM-Series: Nylon, black
	standard, internal o-ring sealed
Rocker/Paddle	<b>1M1-Series:</b> Nylon (UL 94V-0)
	1MS-Series: Nylon, black standard,
	internal o-ring sealed
Bushing	<u> </u>
3	<b>1SS-Series:</b> Glass filled nylon 6/6,
	flame retardant, heat stabilized
	(UL 94V-0)
	<b>1SM-Series:</b> Glass filled nylon 4/6,
	flame retardant, heat stabilized
	<b>1M1-Series:</b> Brass, nickel plated
	<b>1MS-Series:</b> Glass filled nylon 6/6,
	flame retardant, heat stabilized
	(UL94V-0)
Housing	<b>151-Series:</b> Stainless Steel
3	<b>1M1-Series:</b> Stainless Steel
	<b>1MS-Series:</b> Spring Steel
Bracket	<b>1M1-Series:</b> Stainless Steel
	1MS-Series: Nylon (UL 94V-0)
Actuator Pivot Retainer	<b>1MS-Series:</b> Stainless Steel
Switch Support	
Terminal Seal	
	1

# 2-Series Miniature/ Sub-Miniature Switches

Typical Equipment Applications: Communication, GPS Tracking, Radar, Mobile Medical, and Audio/Visual Equipment



## **Specifications**


Electrical Life	. <b>25-Series:</b> 30,000 make & break
	cycles @ full load
	2M-Series: 50,000 make & break
	cycles @ full load
Contact Resistance	. <b>2S-Series:</b> 20 m $\Omega$ max. initial @ 2-4
	VDC 100mA for both silver & gold
	plated contacts
	<b>2M-Series:</b> 10 m $\Omega$ max. initial @ 2-4
	VDC 100mA for both silver & gold
	plated contacts
Insulation Resistance	.1000M $\Omega$ min.
Dielectric Strength	.1500 Volts RMS @ sea level
Operating Temperature	
Index of Protection	. <b>2SS &amp; 2SM-Series:</b> IP67
	2MS-Series: IP67
Solder Heat Resistance	.MIL-STD-202, Method 210
Actuator Travel	.25°

## **Materials**

Case	all UL 94V-0
	2\$1-Series: Dially phthalate (DAP)
	<b>2SS-Series:</b> Glass filled nylon 6/6,
	flame retardant, heat stabilized
	2SM-Series: Glass filled nylon
	4/6,flame retardant, heat stabilized
	2M1-Series: Dially phthalate (DAP)
	2MS & 2M2-Series: Glass filled
	nylon 6/6, flame retardant,
	heat stabilized
Toggle	<b>2\$1-Series:</b> Brass, chrome plated
	2SS & 1SM-Series: Brass, chrome
	plated or nylon, internal o-ring sealed
	<b>2M1-Series:</b> Brass, chrome plated
	2MS & 2M2-Series: Brass, chrome
	plated or nylon, internal o-ring sealed
Bushing	· · · · · · · · · · · · · · · · · · ·
	<b>25S-Series:</b> Glass filled nylon 6/6,
	flame retardant, heat stabilized
	(UL 94V-0)
	<b>25M-Series:</b> Glass filled nylon 4/6,
	flame retardant, heat stabilized
	(UL 94V-0)
	2M1-Series: Brass, nickel plated
	2MS & 2M2-Series: Glass filled
	nylon 6/6, flame retardant,
11	heat stabilized (UL 94V-0)
Housing	
Switch Support	
Terminal Seal	Epoxy

# 3-Series Miniature/Sub-Miniature Pushbutton Switches

Typical Equipment Applications: Communication, GPS Tracking, Radar, Mobile Medical, and Audio/Visual Equipment

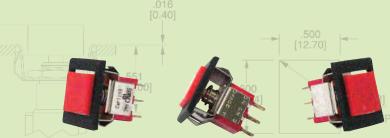

## **Specifications**


Electrical Life	50,000 make & break cycles
	@ full load
Contact Resistance	<b>3SM &amp; 3SS Series:</b> $20 \text{ m}\Omega$ max.
	initial @ 2-4 VDC 100mA for both
	silver & gold plated contacts
	<b>3MN &amp; 3MA-Series:</b> 10 m $\Omega$ max.
	initial @ 2-4 VDC 100mA for both
	silver & gold plated contacts
	<b>3MS-Series:</b> 50 m $\Omega$ max. initial @ 2-4
	VDC 100mA for both silver & gold
	plated contacts
Insulation Resistance	
Dielectric Strength	1500 Volts RMS @ sea level
Operating Temperature	30°C to +85°C
Index of Protection	<b>3SS &amp; 3SM-Series:</b> IP67
	<b>3MS-Series:</b> IP68
Cap Installation Support	<b>3MS-Series:</b> 10 lbs. max.
Solder Heat Resistance	MIL-STD-202, Method 210
Actuator Travel	25°


## **Materials**

Case	.UL 94V-0
	<b>3S1-Series:</b> Dially phthalate (DAP)
	<b>3SS-Series:</b> Glass filled nylon 6/6,
	flame retardant, heat stabilized
	<b>3SM-Series:</b> Glass filled nylon 4/6,
	flame retardant, heat stabilized
	3MN & 3MA-Series: Dially phthalate
	(DAP) (UL 94V-0)
	<b>3MS-Series:</b> Glass filled nylon 6/6,
	flame retardant, heat stabilized
	(UL 94V-0)
Plunger	.3S1-Series: Thermoplastic
	polyester, black
	<b>3SS-Series:</b> Thermoplastic
	polyester (UL 94V-0), with internal
	o-ring seal
	<b>3SM-Series:</b> Glass filled nylon 4/6,
	flame retardant, heat stabilized
	<b>3MN-Series:</b> Thermoplastic
	polyester, black
	3MS & 3MA-Series: Glass filled
	nylon or glass filled polyester
	(UL 94V-0)
Bushing	. <b>3S1-Series:</b> Brass, nickel plated
	<b>3SS-Series:</b> Glass filled nylon 6/6,
	flame retardant, heat stabilized
	(UL 94V-0)
	<b>3SM-Series:</b> Glass filled nylon 6/6,
	flame retardant, heat stabilized
	(UL 94V-0)
	<b>3MN-Series:</b> Brass, nickel plated
	<b>3MA-Series:</b> Zinc, nickel plated
Housing	.3SM & 3SS-Series: Stainless Steel
	<b>3MN &amp; 3MA-Series:</b> Stainless Steel
Switch Support	.3SM & 3SS-Series: Brass, tin plated
	<b>3MS-Series:</b> Stainless Steel
Terminal Seal	.Ероху

4-Series Sub-Miniature & Miniature Slide Switches

Typical Equipment Applications: Communication, GPS Tracking, Radar, Mobile Medical, and Audio/Visual Equipment





## **Specifications**

Electrical Life	30,000 make & break cycles
	@ full load
Contact Resistance	10 m $\Omega$ max. initial @ 2-4 VDC
	100mA for both silver & gold
	plated contacts
Insulation Resistance	1000 MΩ min.
Dielectric Strength	1500 Volts RMS @ sea level
Operating Temperature	30°C to +85°C
Solder Heat Resistance	MIL-STD-202, Method 210
Actuator Travel	25°

## **Materials**

Case	Dially phthalate (DAP) (UL 94V-0)
Slide Handle	
Housing	.Stainless Steel
Terminal Seal	.Ероху



# F-Series Single Pole Toggle Switches

General purpose workhorses with options tailored to meet most any need. Ratings to 20A 277VAC, various actuator, bushing, termination, and circuit choices allow this versatile switch to easily integrate into a variety of different applications. The F-Series has a storied history in the Marine, Food Service, Generator, Industrial Control, and Office Automation markets and is appropriate for usage in low voltage DC applications as well.

Typical Applications: Military/Special Forces Vehicle Controls, Auxiliary Lighting Compressors, General Purpose Control Needs.

#### **Dielectric Strength**


UL/CSA: 1000V - live to dead metal parts

#### **Electrical Life**

50,000 cycles- maintained 25,000 cycles- momentary

## Mechanical Life 100,000 cycles Operating Temperature 0°F to 150°F (-17.8°C to +65.6°C)



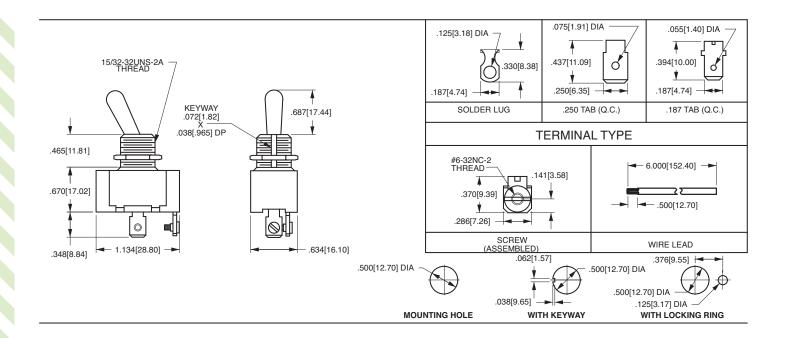

## G-Series Toggle Switches

General purpose toggle switches with options tailored to meet almost any need. Features such as ratings to 20A 277VAC, international approvals, various actuators, bushing, termination, and circuit choices allow this toggle switch to be easily integrated into a variety of different applications.

Typical Applications: Military/Special Forces Vehicle Controls, Auxiliary Lighting Compressors, General Purpose Control Needs.

#### **Dielectric Strength**

UL/CSA: 1000V - live to dead metal parts & opposite polarity VDE: 4000V - live to dead metal parts; 1250V opposite polarity & across open contacts

#### **Electrical Life**


50,000 cycles- maintained 25,000 cycles- momentary

## **Mechanical Life** 100,000 cycles

**Operating Temperature** 

32°F to 185°F (0° to 85°C)



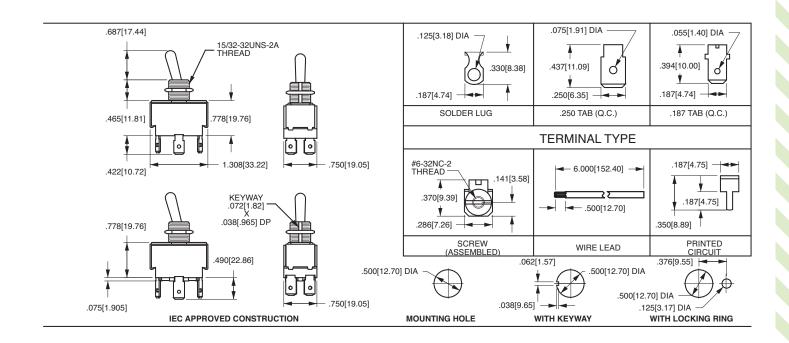

**DK/EK-Series Heavy Duty** 


The switch that can handle your heavy duty requirements. Single or double pole with wire lead or screw terminations, and ratings to 20A 125V 10A 250V, the ac/dc DK/EK-Series is the most heavy duty toggle switch in the Carling line. Its sturdy metal construction and stiff actuation force will withstand the abuses of virtually any stringent application. The quick make/quick break contact mechanism is ideal for high voltage DC applications. The DK/EK-Series has long been a staple of the Industrial Motor control and General Purpose market segments.

Typical Applications: General Purpose High Circuit, High Voltage AC/DC Controls, Motor Controllers

### **Dielectric Strength**

UL/CSA: 1000V - live to dead metal parts & opposite polarity **Electrical Life** 25,000 cycles Mechanical Life 100,000 cycles Operating Temperature 0°F to 150°F (-17.8°C to +65.6°C)



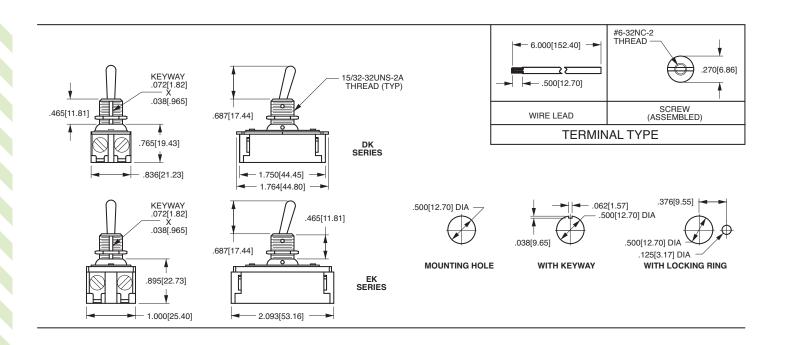





## Carling Technologies™

Innovative Designs. Powerful Solutions.

## World-Wide

### **Corporate Headquarters**

60 Johnson Avenue Plainville, CT 06062 860/793-9281 Fax: 860/793-9231

E-mail: info@carlingtech.com www.carlingtech.com

#### **Europe/Middle East/Africa**

Carling Technologies Ltd. Devon, England Int + 44 (0)1392-364422 Fax: Int + 44 (0)1392-364477 E-mail: ltdsales@carlingtech.com

#### Asia/Pacific

Carling Technologies Asia-Pacific Ltd. Kowloon, Hong Kong Int + 852-2737-2277

Fax: Int + 852-2736-9332

E-mail: sales@carlingtech.com.hk

#### Additional Carling Technologies Offices

East Region Sales Office, CT ersm@carlingtech.com

West Region Sales Office, CA wrsm@carlingtech.com

GmbH, Germany gmbh@carlingtech.com

SARL, France, sarl@carlingtech.com

Asia-Pacific Ltd., Shanghai, China capsh@online.sh.cn

Pune, India india@carlingtech.com

taiwan@carlingtech.com



#### Moritz Aerospace

#### Moritz Aerospace, Inc.

2317 Topaz Drive Hatfield, PA 19440 215/996-9211 Fax: 215/996-0945

E-mail: sales@moritzaero.com www.moritzaero.com

## Maretron

#### Maretron, LLC

Suite 10 Phoenix AZ 85021 Phone: (602) 861-1707 Fax: (602) 861-1777 sales@maretron.com www.maretron.com

9014 N. 23rd Avenue

