



**Your Global Partner
in Lighting Solutions**

General Lighting LED

**High Quality
Rapid Delivery
Personal Service**



LED Lighting

Index

❖ Replacement Lamps - E26/E27 Base

- A19 7W
- A19D 7W
- AR111 10W
- PAR16 3W 1LED
- PAR16 3.5W 3LED
- PAR20 6W 3LED
- PAR30 10W 6LED
- PAR30 12W 24°/50°
- PAR30D 8W 50°/65°
- PAR38 15W 9LED
- PAR38 18W 24°/50°
- PAR38D 10W 50°/65°

❖ Replacement Lamps – GU Series

- GU10 3W 1LED
- GU10 3.5W 3 LED

❖ Replacement Lamps – MR Series

- MR11 1.5W
- MR16 3W 1LED
- MR16 3.5W 3LED
- MR16 5W 1LED
- MR16 5W 5LED

❖ Area Lighting

- Indoor Area
 - 60W High Bay
 - 110W High Bay
- Outdoor Area
 - WK60
 - WK120
- Street/Work Light
 - E40

❖ Panel Lighting

- 2'x4' 120W Panel
- 1'x2' 40W Panel
- 1'x4' 60W Panel
- 2'x2' 60W Panel
- 1'x1' 20W Panel

❖ Elevator

- L1383
- L1385
- LGBF

❖ T8-Tubes

- T8 Tube 60cm
- T8 Tube 120cm



599 Bond Street, Lincolnshire, IL 60069-4226

(847) 821-1199; (800) 572-4168; (847) 821-1133 (Fax)

www.ceclighting.com



LED Lighting

A19




Product Features

- Unique design for perfectly optical performance
- Color stability over life
- High brightness LED
- No UV/IR
- RoHS compliant

Product Specifications

- | | |
|-------------------------|--------------|
| • Total Power | 7W |
| • Input Voltage | 100-240Vac |
| • Base Type | E26/E27 |
| • Surface Temp | <65°C |
| • Operating Temperature | -20°C - 40°C |
| • LED lifetime(L70) | 30,000hrs |
| • Dimmable | No |

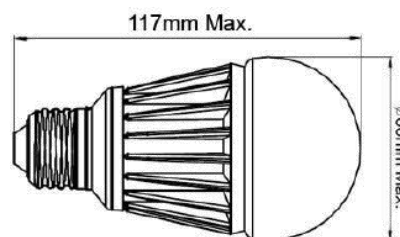

Color Temperature	CCT(K)	Lumens	CRI
Cool White	5500	380	>80
Warm White	3000	340	>80

Your Global Partner in **Lighting** Solutions



599 Bond Street, Lincolnshire, IL 60069-4226

(847) 821-1199; (800) 572-4168; (847) 821-1133 (Fax)

www.ceclighting.com



LED Lighting

A19D




Product Features

- Unique design for perfectly optical performance
- Color stability over life
- High brightness LED
- No UV/IR
- RoHS compliant

Product Specifications

- Total Power 7W
- Input Voltage 100-240Vac
- Base Type E26/E27
- Beam Angle(s) 210°
- Surface Temp <70°C
- Operating Temperature -20°C - 40°C
- LED lifetime(L70) 30,000hrs
- Weight 4.58oz
- Dimmable Yes
- Safety

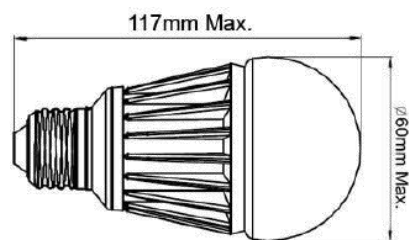

Stock#	Color Temperature	CCT(K)	Lumens	CRI
LA19D-7-W	Cool White	5500	350	>65
LA19D-7-WW	Warm White	3000	250	>80

Your Global Partner in **Lighting** Solutions



599 Bond Street, Lincolnshire, IL 60069-4226

(847) 821-1199; (800) 572-4168; (847) 821-1133 (Fax)

www.ceclighting.com



LED Lighting

AR111





Product Features

- Low heat generation
- Energy saving product
- High brightness
- Instant start-up
- No UV/IR
- Long life, minimum maintenance costs
- RoHS compliant

Product Specifications

- | | |
|-------------------------|--------------|
| • Total Power | 10W |
| • Input Voltage | 100-240Vac |
| • Base Type | E26/E27 |
| • Beam Angle(s) | 40° |
| • Surface Temp | <70°C |
| • Operating Temperature | -20°C - 40°C |
| • LED lifetime(L70) | 50,000hrs |
| • Weight | 6.7oz |
| • Dimmable | No |



■ Unit: mm

■ Tolerance: ±1mm

Color Temperature	CCT(K)	Lumens	CRI
Cool White	5500	620	72
Neutral White	4000	600	72
Warm White	3000	560	80

Your Global Partner in **Lighting** Solutions



599 Bond Street, Lincolnshire, IL 60069-4226

(847) 821-1199; (800) 572-4168; (847) 821-1133 (Fax)

www.ceclighting.com



LED Lighting

PAR16 3W 1LED




Product Features

- Low heat generation
- Energy saving product
- High brightness
- Instant start-up
- No UV/IR
- Long life, minimum maintenance costs
- RoHS compliant

Product Specifications

- Total Power 3W
- Input Voltage 100-240Vac
- Base Type E26/E27
- Beam Angle(s) 36°
- Surface Temp <70°C
- Operating Temperature -20°C - 40°C
- LED lifetime(L70) 25,000hrs
- Weight 2.1oz
- Dimmable No

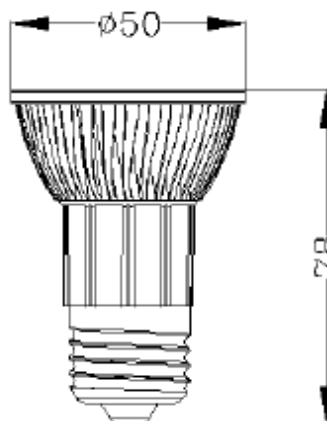

Unit: mm

Tolerance: ± 1 mm

Stock#	Color Temperature	CCT(K)	Lumens	CRI
LJDR-3-W	Cool White	5500	130	72
	Neutral White	4000	120	73
LJDR-3-WW	Warm White	3000	110	80

Your Global Partner in Lighting Solutions



599 Bond Street, Lincolnshire, IL 60069-4226

(847) 821-1199; (800) 572-4168; (847) 821-1133 (Fax)

www.ceclighting.com



LED Lighting

PAR16 3.5W 3LED




Product Features

- Low heat generation
- Energy saving product
- High brightness
- Instant start-up
- No UV/IR
- Long life, minimum maintenance costs
- RoHS compliant

Product Specifications

- Total Power 3.5W
- Input Voltage 100-240Vac
- Base Type E26/E27
- Beam Angle(s) 45°
- Surface Temp <70°C
- Operating Temperature -20°C - 40°C
- LED lifetime(L70) 25,000hrs
- Weight 1.9oz
- Dimmable No

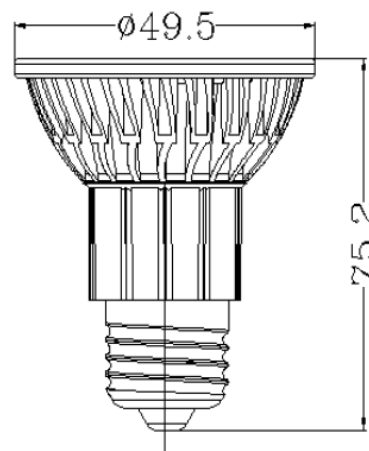

Unit: mm
Tolerance: ±1mm

Stock#	Color Temperature	CCT(K)	Lumens	CRI
LPAR16-360-W	Cool White	5500	210	72
	Neutral White	4000	200	73
LPAR16-360-WW	Warm White	3000	180	80

Your Global Partner in **Lighting** Solutions



599 Bond Street, Lincolnshire, IL 60069-4226

(847) 821-1199; (800) 572-4168; (847) 821-1133 (Fax)

www.ceclighting.com



LED Lighting

PAR20 6W 3LED




Product Features

- Low heat generation
- Energy saving product
- High brightness
- Instant start-up
- No UV/IR
- Long life, minimum maintenance costs
- RoHS compliant

Product Specifications

- Total Power 6W
- Input Voltage 100-240Vac
- Base Type E26/E27
- Beam Angle(s) 45°
- Surface Temp <65°C
- Operating Temperature -20°C - 40°C
- LED lifetime(L70) 50,000hrs
- Dimmable No

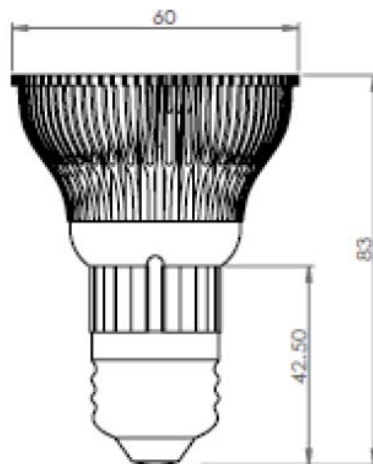

Stock#	Color Temperature	CCT(K)	Lumens	CRI
LPAR20-660-W	Cool White	5500	330	72
LPAR20-660-WW	Warm White	3000	300	80

Your Global Partner in **Lighting** Solutions



599 Bond Street, Lincolnshire, IL 60069-4226

(847) 821-1199; (800) 572-4168; (847) 821-1133 (Fax)

www.ceclighting.com



LED Lighting

PAR30 10W 6LED





Product Features

- Low heat generation
- Energy saving product
- High brightness
- Instant start-up
- No UV/IR
- Long life, minimum maintenance costs
- RoHS compliant

Product Specifications

- Total Power 10W
- Input Voltage 100-240Vac
- Base Type E26/E27
- Beam Angle(s) 40°
- Surface Temp <65°C
- Operating Temperature -20°C - 40°C
- LED lifetime(L70) 50,000hrs
- Weight 6.3oz
- Dimmable No



Unit: mm

Tolerance: ±1mm

Color Temperature	CCT(K)	Lumens	CRI
Cool White	5500	620	72
Neutral White	4000	600	73
Warm White	3000	560	80

Your Global Partner in **Lighting** Solutions



599 Bond Street, Lincolnshire, IL 60069-4226
(847) 821-1199;(800) 572-4168;(847) 821-1133 (Fax)
www.ceclighting.com



LED Lighting

PAR30 12W 5LED




Product Features

- High brightness LED lighting technology
- Advanced heat management
- Available wide and narrow beam angles: 24° & 50°
- Equipped with fuse and flame retardant plastics
- IP54 compliant
- RoHS compliant
- LED chip: CREE

Product Specifications

- | | |
|-------------------------|--------------|
| • Total Power | 12W |
| • Input Voltage | 100-240Vac |
| • Base Type | E26/E27 |
| • Beam Angle(s) | 24° & 50° |
| • Surface Temp | <65°C |
| • Operating Temperature | -20°C - 40°C |
| • LED lifetime(L70) | 30,000hrs |
| • Dimmable | No |

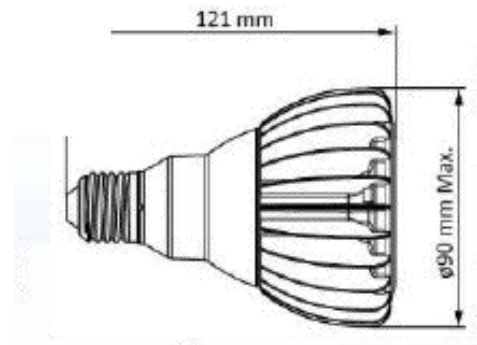

Color Temperature	CCT(K)	Lumens	CRI
Cool White	5500	700	>75
Warm White	3000	500	>80



Your Global Partner in **Lighting** Solutions





599 Bond Street, Lincolnshire, IL 60069-4226

(847) 821-1199;(800) 572-4168;(847) 821-1133 (Fax)

www.ceclighting.com



LED Lighting

PAR30D 8W 50°/65°




Product Features

- Unique design for perfectly optical performance
- Advanced heat management technology
- Available wide and narrow beam angles: 50° & 65°
- High brightness LED
- No UV/IR
- RoHS compliant

Product Specifications

- Total Power 8W
- Input Voltage 100-240Vac
- Base Type E26/E27
- Beam Angle(s) 50° & 65°
- Surface Temp <70°C
- Operating Temperature -20°C - 40°C
- LED lifetime(L70) 30,000hrs
- Weight 8.8oz
- Dimmable Yes
- Safety

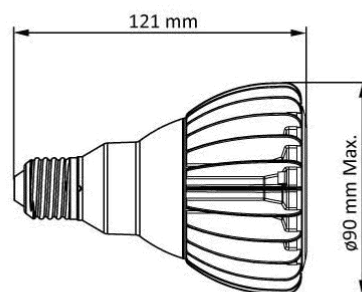

Stock#	Color Temperature	CCT(K)	Lumens	CRI
LPAR30D-840-W	Cool White	5500	450	>65
LPAR30D-840-WW	Warm White	3000	350	>80
LPAR30D-880-W	Cool White	5500	450	>65
LPAR30D-880-WW	Warm White	3000	350	>80



Your Global Partner in **Lighting** Solutions





599 Bond Street, Lincolnshire, IL 60069-4226

(847) 821-1199; (800) 572-4168; (847) 821-1133 (Fax)

www.ceclighting.com



LED Lighting

PAR38 15W 9LED





Product Features

- Low heat generation
- Energy saving product
- High brightness
- Instant start-up
- No UV/IR
- Long life, minimum maintenance costs
- RoHS compliant

Product Specifications

- Total Power 15W
- Input Voltage 100-240Vac
- Base Type E26/E27
- Beam Angle(s) 40°
- Surface Temp <65°C
- Operating Temperature -20°C - 40°C
- LED lifetime(L70) 50,000hrs
- Weight 11.5oz
- Dimmable No



Unit: mm
Tolerance: ±1mm

Color Temperature	CCT(K)	Lumens	CRI
Cool White	5500	850	72
Neutral White	4000	820	73
Warm White	3000	800	80

Your Global Partner in **Lighting** Solutions



599 Bond Street, Lincolnshire, IL 60069-4226
(847) 821-1199;(800) 572-4168;(847) 821-1133 (Fax)

www.ceclighting.com



LED Lighting

PAR38 18W 7LED




Product Features

- High brightness LED lighting technology
- Advanced heat management
- Available wide and narrow beam angles: 24° & 50°
- Equipped with fuse and flame retardant plastics
- IP54 compliant
- No UV/IR
- RoHS compliant
- LED chip: CREE

Product Specifications

- | | |
|-------------------------|--------------|
| • Total Power | 18W |
| • Input Voltage | 100-240Vac |
| • Base Type | E26/E27 |
| • Beam Angle(s) | 24° & 50° |
| • Surface Temp | <65°C |
| • Operating Temperature | -20°C - 40°C |
| • LED lifetime(L70) | 30,000hrs |
| • Dimmable | No |

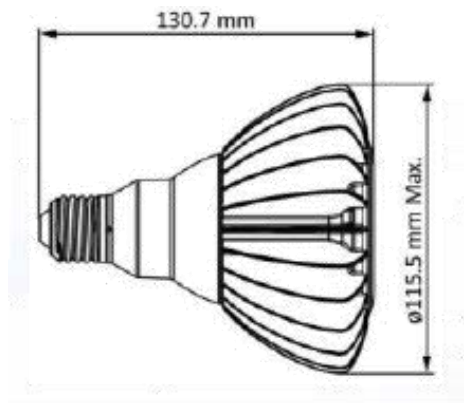

Color Temperature	CCT(K)	Lumens	CRI
Cool White	5500	900	>75
Warm White	3000	700	>80



Your Global Partner in **Lighting** Solutions





599 Bond Street, Lincolnshire, IL 60069-4226

(847) 821-1199;(800) 572-4168;(847) 821-1133 (Fax)

www.ceclighting.com



LED Lighting

PAR38D 10W 50°/65°




Product Features

- Unique design for perfectly optical performance
- Advanced heat management technology
- Available wide and narrow beam angles: 50° & 65°
- High brightness LED
- No UV/IR
- RoHS compliant

Product Specifications

- Total Power 10W
- Input Voltage 100-240Vac
- Base Type E26/E27
- Beam Angle(s) 50° & 65°
- Surface Temp <70°C
- Operating Temperature -20°C - 40°C
- LED lifetime(L70) 30,000hrs
- Dimmable Yes
- Safety

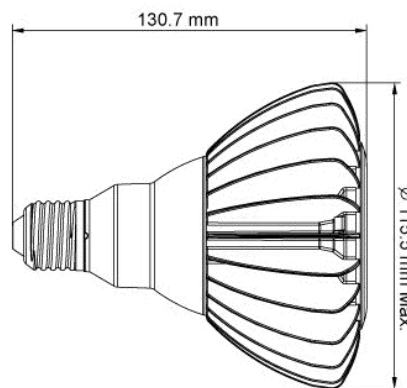

Stock#	Color Temperature	CCT(K)	Lumens	CRI
LPAR38D-1040-W	Cool White	5500	550	>65
LPAR38D-1040-WW	Warm White	3000	410	>80
LPAR38D-1080-W	Cool White	5500	550	>65
LPAR38D-1080-WW	Warm White	3000	410	>80



Your Global Partner in **Lighting** Solutions





599 Bond Street, Lincolnshire, IL 60069-4226

(847) 821-1199; (800) 572-4168; (847) 821-1133 (Fax)

www.ceclighting.com



LED Lighting

GU10 3W 1LED




Product Features

- Low heat generation
- Energy saving product
- High brightness
- Instant start-up
- No UV/IR
- Long life, minimum maintenance costs
- RoHS compliant

Product Specifications

- Total Power 3W
- Input Voltage 100-240Vac
- Base Type GU10
- Beam Angle(s) 36°
- Surface Temp <70°C
- Operating Temperature -20°C - 40°C
- LED lifetime(L70) 25,000hrs
- Weight 1.9oz
- Dimmable No

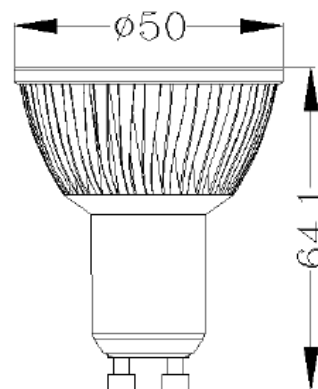

Unit: mm

Tolerance: ± 1mm

Stock#	Color Temperature	CCT(K)	Lumens	CRI
LJDC-3-W	Cool White	5500	130	72
	Neutral White	4000	120	73
LJDC-3-WW	Warm White	3000	110	80

Your Global Partner in Lighting Solutions



599 Bond Street, Lincolnshire, IL 60069-4226

(847) 821-1199; (800) 572-4168; (847) 821-1133 (Fax)

www.ceclighting.com



LED Lighting

GU10 3.5W 3LED




Product Features

- Low heat generation
- Energy saving product
- High brightness
- Instant start-up
- No UV/IR
- Long life, minimum maintenance costs
- RoHS compliant

Product Specifications

- Total Power 3.5W
- Input Voltage 100-240Vac
- Base Type GU10
- Beam Angle(s) 45°
- Surface Temp <70°C
- Operating Temperature -20°C - 40°C
- LED lifetime(L70) 25,000hrs
- Weight 1.7oz
- Dimmable No

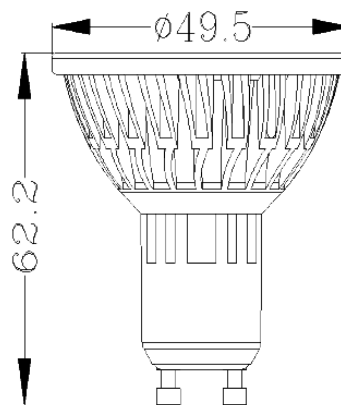

Unit: mm
Tolerance: ±1mm

Color Temperature	CCT(K)	Lumens	CRI
Cool White	5500	210	72
Neutral White	4000	190	73
Warm White	3000	180	80

Your Global Partner in **Lighting** Solutions



599 Bond Street, Lincolnshire, IL 60069-4226

(847) 821-1199; (800) 572-4168; (847) 821-1133 (Fax)

www.ceclighting.com



LED Lighting

MR11




Product Features

- Low heat generation
- Energy saving product
- High brightness
- Instant start-up
- No UV/IR
- Long life, minimum maintenance costs
- RoHS compliant

Product Specifications

- Total Power 1.5W
- Input Voltage 12V ac/dc
- Base Type GU4
- Beam Angle(s) 60°
- Surface Temp <70°C
- Operating Temperature -20°C - 40°C
- LED lifetime(L70) 25,000hrs
- Weight 0.65oz
- Dimmable No

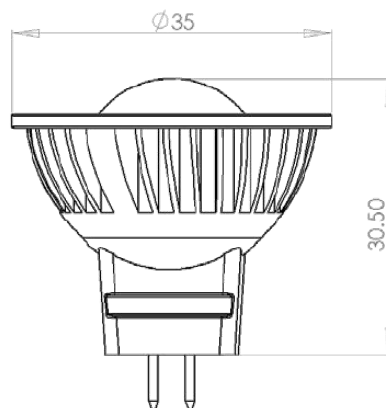

Unit:mm

Stock#	Color Temperature	CCT(K)	Lumens	CRI
LMR11-1-W	Cool White	5500	60	78
LMR11-1-WW	Warm White	3000	40	78

Your Global Partner in **Lighting** Solutions



599 Bond Street, Lincolnshire, IL 60069-4226

(847) 821-1199; (800) 572-4168; (847) 821-1133 (Fax)

www.ceclighting.com



LED Lighting

MR16 3W 1LED




Product Features

- Low heat generation
- Energy saving product
- High brightness
- Instant start-up
- No UV/IR
- Long life, minimum maintenance costs
- RoHS compliant

Product Specifications

- Total Power 3W
- Input Voltage 12V ac/dc
- Base Type GU5.3
- Beam Angle(s) 36°
- Surface Temp <70°C
- Operating Temperature -20°C - 40°C
- LED lifetime(L70) 25,000hrs
- Weight 1.5oz
- Dimmable No

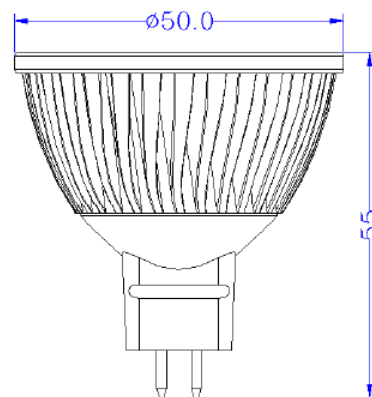

Unit: mm

Tolerance: ± 1 mm

Stock#	Color Temperature	CCT(K)	Lumens	CRI
LMR16-3-W	Cool White	5500	130	72
	Neutral White	4000	120	73
LMR16-3-WW	Warm White	3000	110	80

Also available in colors - red, green, blue and yellow

Your Global Partner in Lighting Solutions



599 Bond Street, Lincolnshire, IL 60069-4226

(847) 821-1199; (800) 572-4168; (847) 821-1133 (Fax)

www.ceclighting.com



LED Lighting

MR16 3.5W 3LED




Product Features

- Low heat generation
- Energy saving product
- High brightness
- Instant start-up
- No UV/IR
- Long life, minimum maintenance costs
- RoHS compliant

Product Specifications

- Total Power 3.5W
- Input Voltage 12V ac/dc
- Base Type GU5.3
- Beam Angle(s) 45°
- Surface Temp <70°C
- Operating Temperature -20°C - 40°C
- LED lifetime(L70) 25,000hrs
- Weight 1.5oz
- Dimmable No

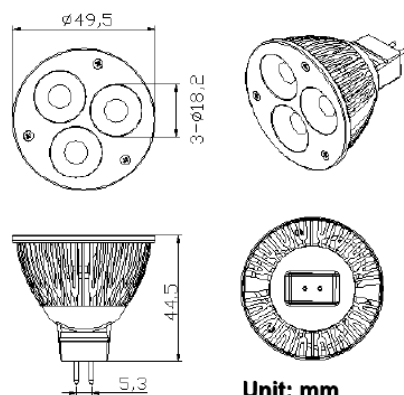

Unit: mm
Tolerance: ±1mm

Stock#	Color Temperature	CCT(K)	Lumens	CRI
LMR16-345-W	Cool White	5500	210	72
	Neutral White	4000	200	73
LMR16-345-WW	Warm White	3000	180	80

Your Global Partner in **Lighting** Solutions



599 Bond Street, Lincolnshire, IL 60069-4226

(847) 821-1199; (800) 572-4168; (847) 821-1133 (Fax)

www.ceclighting.com



LED Lighting

MR16 5W 1LED




Product Features

- Low heat generation
- Energy saving product
- High brightness
- Instant start-up
- No UV/IR
- Long life, minimum maintenance costs
- RoHS compliant

Product Specifications

- | | |
|-------------------------|--------------|
| • Total Power | 5W |
| • Input Voltage | 12V ac/dc |
| • Base Type | GU5.3 |
| • Beam Angle(s) | 30° |
| • Surface Temp | <70°C |
| • Operating Temperature | -20°C - 40°C |
| • LED lifetime(L70) | 50,000hrs |
| • Weight | 1.5oz |
| • Dimmable | No |

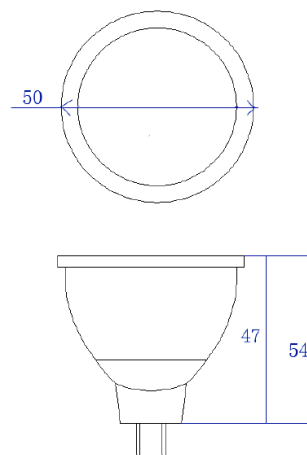

Unit: mm

Tolerance: ±1mm

Color Temperature	CCT(K)	Lumens	CRI
Cool White	5500	360	72
Neutral White	4000	320	73
Warm White	3000	300	80

Your Global Partner in **Lighting** Solutions



599 Bond Street, Lincolnshire, IL 60069-4226

(847) 821-1199; (800) 572-4168; (847) 821-1133 (Fax)

www.ceclighting.com



LED Lighting

MR16 5W 5LED




Product Features

- Low heat generation
- Energy saving product
- High brightness
- Instant start-up
- No UV/IR
- Long life, minimum maintenance costs
- RoHS compliant

Product Specifications

- | | |
|-------------------------|--------------|
| • Total Power | 5W |
| • Input Voltage | 12V ac/dc |
| • Base Type | GU5.3 |
| • Beam Angle(s) | 40° |
| • Surface Temp | <70°C |
| • Operating Temperature | -20°C - 40°C |
| • LED lifetime(L70) | 50,000hrs |
| • Weight | 1.5oz |
| • Dimmable | No |

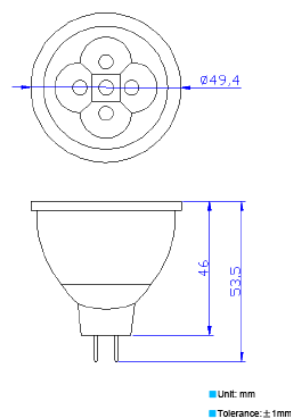

Color Temperature	CCT(K)	Lumens	CRI
Cool White	5500	320	72
Neutral White	4000	280	73
Warm White	3000	270	80

Your Global Partner in **Lighting** Solutions



599 Bond Street, Lincolnshire, IL 60069-4226

(847) 821-1199; (800) 572-4168; (847) 821-1133 (Fax)

www.ceclighting.com



LED Lighting

60W High Bay




Product Features

- Energy saving product
- High brightness
- Instant start-up
- No UV/IR
- Long life, minimum maintenance costs
- RoHS compliant
- 30pcs 2W High Power LED

Product Specifications

- | | |
|-------------------------|--------------|
| • Total Power | 60W |
| • Input Voltage | 100-277Vac |
| • Beam Angle(s) | 120° |
| • Surface Temp | <70°C |
| • Operating Temperature | -20°C - 40°C |
| • LED lifetime(L70) | 50,000hrs |
| • Weight | 2.2lb |
| • Dimmable | No |

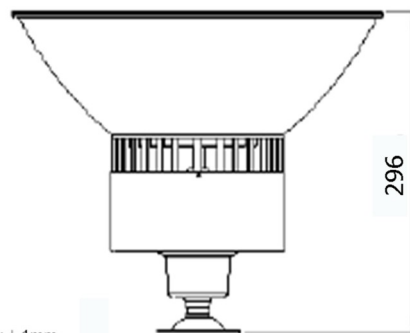

Color Temperature	CCT(K)	Lumens	CRI
Cool White	5500-6500	3000	72

Your Global Partner in **Lighting** Solutions



599 Bond Street, Lincolnshire, IL 60069-4226

(847) 821-1199; (800) 572-4168; (847) 821-1133 (Fax)

www.ceclighting.com



LED Lighting

120W High Bay




Product Features

- Energy saving product
- High brightness
- Instant start-up
- No UV/IR
- Long life, minimum maintenance costs
- RoHS compliant
- 60pcs 2W High Power LED

Product Specifications

- | | |
|-------------------------|--------------|
| • Total Power | 120W |
| • Input Voltage | 100-277Vac |
| • Beam Angle(s) | 120° |
| • Surface Temp | <70°C |
| • Operating Temperature | -20°C - 40°C |
| • LED lifetime(L70) | 50,000hrs |
| • Weight | 3.3lb |
| • Dimmable | No |

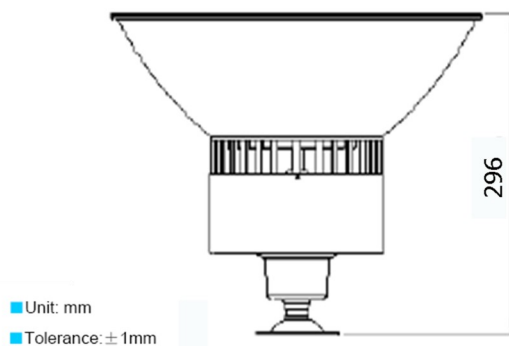

Color Temperature	CCT(K)	Lumens	CRI
Cool White	5500-6500	6500	72

Your Global Partner in **Lighting** Solutions



599 Bond Street, Lincolnshire, IL 60069-4226

(847) 821-1199;(800) 572-4168;(847) 821-1133 (Fax)

www.ceclighting.com



LED Lighting

WK60




Product Features

- Outdoor area work light
- Advanced heat management technology
- High brightness LED
- Equipped with fuse and flame retardant plastics
- IP65 compliant

Product Specifications

- Total Power 60W
- Input Voltage 100-277Vac
- Beam Angle(s) 45°
- Surface Temp <65°C
- Operating Temperature -20°C - 50°C
- LED lifetime(L70) 50,000hrs
- Weight 17.6lb
- Safety

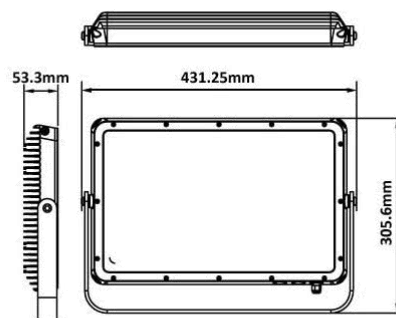

Color Temperature	CCT(K)	Lumens	CRI
Cool White	5500-6500	3600	>65

Your Global Partner in **Lighting** Solutions



599 Bond Street, Lincolnshire, IL 60069-4226

(847) 821-1199;(800) 572-4168;(847) 821-1133 (Fax)

www.ceclighting.com



LED Lighting

WK120




Product Features

- Outdoor area work light
- Advanced heat management technology
- High brightness LED
- Equipped with fuse and flame retardant plastics
- IP65 compliant

Product Specifications

- Total Power 120W
- Input Voltage 100-277Vac
- Beam Angle(s) 45°
- Surface Temp <65°C
- Operating Temperature -20°C - 50°C
- LED lifetime(L70) 50,000hrs
- Weight 19.4lb
- Safety

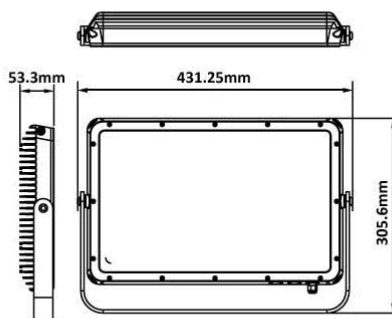

Color Temperature	CCT(K)	Lumens	CRI
Cool White	5500-6500	5800	>65

Your Global Partner in **Lighting** Solutions



599 Bond Street, Lincolnshire, IL 60069-4226

(847) 821-1199; (800) 572-4168; (847) 821-1133 (Fax)

www.ceclighting.com



LED Lighting

E40 Street Lamp



Product Features

- High brightness
- Long life, up to 50,000 hours
- Robust design - shock and vibration resistant
- Easy installation - Fits standard Edison 40 socket
- High efficiency - Power factor >90%

Product Specifications

- | | |
|-------------------------|--------------|
| • Total Power | 28W |
| • Input Voltage | 85-265Vac |
| • Base Type | E40 |
| • Surface Temp | <70°C |
| • Operating Temperature | -30°C - 40°C |
| • LED lifetime(L70) | 50,000hrs |
| • Weight | 2.2lb |
| • Dimmable | No |



Color Temperature	CCT(K)	Lumens	CRI
Cool White	5500	3200	>70
Neutral White	4000	2800	>70
Warm White	3000	2400	>70

Your Global Partner in **Lighting** Solutions



599 Bond Street, Lincolnshire, IL 60069-4226

(847) 821-1199; (800) 572-4168; (847) 821-1133 (Fax)

www.ceclighting.com



LED Lighting

Panel Light 2'x4'



Product Features

- High brightness LED lighting technology
- Flush mount
- Aluminum alloy housing
- No flicker or adverse glare
- No UV/IR
- RoHS compliant
- Proprietary housing design for best thermal management

Product Specifications

- | | |
|-------------------------|-------------|
| • Total Power | 120W |
| • Input Voltage | 100-277Vac |
| • Beam Angle(s) | 120° |
| • Surface Temp | <70°C |
| • Operating Temperature | -5°C - 40°C |
| • LED lifetime(L70) | 50,000hrs |
| • Dimensions | 2' x 4' |
| • Dimmable | No |

Color Temperature	CCT(K)	Lumens	CRI
Neutral White	4000	7000	>70



Your Global Partner in **Lighting** Solutions





599 Bond Street, Lincolnshire, IL 60069-4226

(847) 821-1199; (800) 572-4168; (847) 821-1133 (Fax)

www.ceclighting.com



LED Lighting

Panel Light 1'x2'



Product Features

- High brightness LED lighting technology
- Flush mount
- Aluminum alloy housing
- No flicker or adverse glare
- No UV/IR
- RoHS compliant
- Proprietary housing design for best thermal management

Product Specifications

- | | |
|-------------------------|-------------|
| • Total Power | 40W |
| • Input Voltage | 100-277Vac |
| • Beam Angle(s) | 120° |
| • Surface Temp | <70°C |
| • Operating Temperature | -5°C - 40°C |
| • LED lifetime(L70) | 50,000hrs |
| • Dimensions | 1' x 2' |
| • Dimmable | No |

Color Temperature	CCT(K)	Lumens	CRI
Neutral White	4000	2200	>70

Your Global Partner in **Lighting** Solutions



599 Bond Street, Lincolnshire, IL 60069-4226

(847) 821-1199; (800) 572-4168; (847) 821-1133 (Fax)

www.ceclighting.com



LED Lighting

Panel Light 1'x4'



Product Features

- High brightness LED lighting technology
- Flush mount
- Aluminum alloy housing
- No flicker or adverse glare
- No UV/IR
- RoHS compliant
- Proprietary housing design for best thermal management

Product Specifications

- | | |
|-------------------------|-------------|
| • Total Power | 60W |
| • Input Voltage | 100-277Vac |
| • Beam Angle(s) | 120° |
| • Surface Temp | <70°C |
| • Operating Temperature | -5°C - 40°C |
| • LED lifetime(L70) | 50,000hrs |
| • Dimensions | 1' x 4' |
| • Dimmable | No |

Color Temperature	CCT(K)	Lumens	CRI
Neutral White	4000	3600	>70



Your Global Partner in **Lighting** Solutions





599 Bond Street, Lincolnshire, IL 60069-4226

(847) 821-1199; (800) 572-4168; (847) 821-1133 (Fax)

www.ceclighting.com



LED Lighting

Panel Light 2'x2'



Product Features

- High brightness LED lighting technology
- Flush mount
- Aluminum alloy housing
- No flicker or adverse glare
- No UV/IR
- RoHS compliant
- Proprietary housing design for best thermal management

Product Specifications

- | | |
|-------------------------|-------------|
| • Total Power | 60W |
| • Input Voltage | 100-277Vac |
| • Beam Angle(s) | 120° |
| • Surface Temp | <70°C |
| • Operating Temperature | -5°C - 40°C |
| • LED lifetime(L70) | 50,000hrs |
| • Dimensions | 2' x 2' |
| • Dimmable | No |

Color Temperature	CCT(K)	Lumens	CRI
Neutral White	4000	3600	>70

Your Global Partner in **Lighting** Solutions



599 Bond Street, Lincolnshire, IL 60069-4226

(847) 821-1199; (800) 572-4168; (847) 821-1133 (Fax)

www.ceclighting.com



LED Lighting

Panel Light 1'x1'



Product Features

- High brightness LED lighting technology
- Flush mount
- Aluminum alloy housing
- No flicker or adverse glare
- No UV/IR
- RoHS compliant
- Proprietary housing design for best thermal management

Product Specifications

- | | |
|-------------------------|-------------|
| • Total Power | 20W |
| • Input Voltage | 100-277Vac |
| • Beam Angle(s) | 120° |
| • Surface Temp | <70°C |
| • Operating Temperature | -5°C - 40°C |
| • LED lifetime(L70) | 50,000hrs |
| • Dimensions | 1' x 1' |
| • Dimmable | No |

Color Temperature	CCT(K)	Lumens	CRI
Neutral White	4000	1100	>70



Your Global Partner in **Lighting** Solutions





599 Bond Street, Lincolnshire, IL 60069-4226

(847) 821-1199; (800) 572-4168; (847) 821-1133 (Fax)

www.ceclighting.com



LED Lighting

L1383 Elevator





Product Features

- Bulb type: 2W 1383 LED bulb
- Light source: 2W High Power LED
- Aluminum housing
- No UV/IR
- Long life: >25,000 hours

Product Specifications

- Total Power 2W
- Input Voltage 12V ac/dc
- Base Type BA15S
- Beam Angle(s) 60°
- Surface Temp <65°C
- Operating Temperature -20°C - 40°C
- LED lifetime(L70) 25,000hrs
- Weight 1.3oz
- Dimmable No



Unit:mm

Stock#	Color Temperature	CCT(K)	Lumens	CRI
L1383-WW	Cool White	5500	80	72
	Neutral White	4000	70	72
	Warm White	3000	60	80

Your Global Partner in **Lighting** Solutions



599 Bond Street, Lincolnshire, IL 60069-4226

(847) 821-1199; (800) 572-4168; (847) 821-1133 (Fax)

www.ceclighting.com



LED Lighting

L1385 Elevator





Product Features

- Low heat generation
- Energy saving product
- High brightness
- No UV/IR
- Long life, minimum maintenance costs
- Long life: >25,000 hours

Product Specifications

- | | |
|-------------------------|--------------|
| • Total Power | 2W |
| • Input Voltage | 24Vdc |
| • Base Type | BA15S |
| • Beam Angle(s) | 60° |
| • Surface Temp | <60°C |
| • Operating Temperature | -20°C - 40°C |
| • LED lifetime(L70) | 25,000hrs |
| • Dimmable | No |



Stock#	Color Temperature	CCT(K)	Lumens
L1385-WW	Cool White	5500	80
	Neutral White	4000	70
	Warm White	3000	60

Your Global Partner in **Lighting** Solutions



599 Bond Street, Lincolnshire, IL 60069-4226

(847) 821-1199; (800) 572-4168; (847) 821-1133 (Fax)

www.ceclighting.com



LED Lighting

LGBF Elevator




Product Features

- Bulb type: 2W GBF LED bulb
- Light source: 2W High Power LED
- Aluminum housing
- No UV/IR
- Long life: >25,000 hours

Product Specifications

- | | |
|-------------------------|--------------|
| • Total Power | 2W |
| • Input Voltage | 12V ac/dc |
| • Base Type | BA15D |
| • Beam Angle(s) | 60° |
| • Surface Temp | <65°C |
| • Operating Temperature | -20°C - 40°C |
| • LED lifetime(L70) | 25,000hrs |
| • Weight | 1.05oz |
| • Dimmable | No |

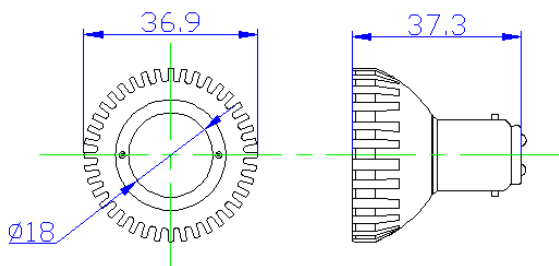

Stock#	Color Temperature	CCT(K)	Lumens	CRI
LGBF-WW	Cool White	5500	80	72
	Neutral White	4000	70	72
	Warm White	3000	60	80

Your Global Partner in **Lighting** Solutions



599 Bond Street, Lincolnshire, IL 60069-4226

(847) 821-1199; (800) 572-4168; (847) 821-1133 (Fax)

www.ceclighting.com



LED Lighting

T8 Tube




Product Features

- LED T8 Energy saving light
- Instant start-up
- Long life, minimum maintenance costs
- CE and RoHS compliant
- Aluminum tube, excellent thermal performance
- No UV /IR

Product Specifications

- Total Power 9W & 16W
- Input Voltage 100-240Vac
- Surface Temp <50°C
- Operating Temperature -20°C - 40°C
- Dimmable No
- CRI 70



Model	Dimensions (mm)
T8-600mm	L x D = 589 x 26 mm
T8-1200mm	L x D = 1198 x 26 mm

Color Temperature	Tube Length	Watt(W)	CCT(K)	Lumens
Cool White	60cm	9	6000	650
Neutral White	60cm	9	4000	630
Warm White	60cm	9	3000	610
Cool White	120cm	16	6000	1300
Neutral White	120cm	16	4000	1250
Warm White	120cm	16	3000	1200



Your Global Partner in **Lighting** Solutions

