




HVAC/R

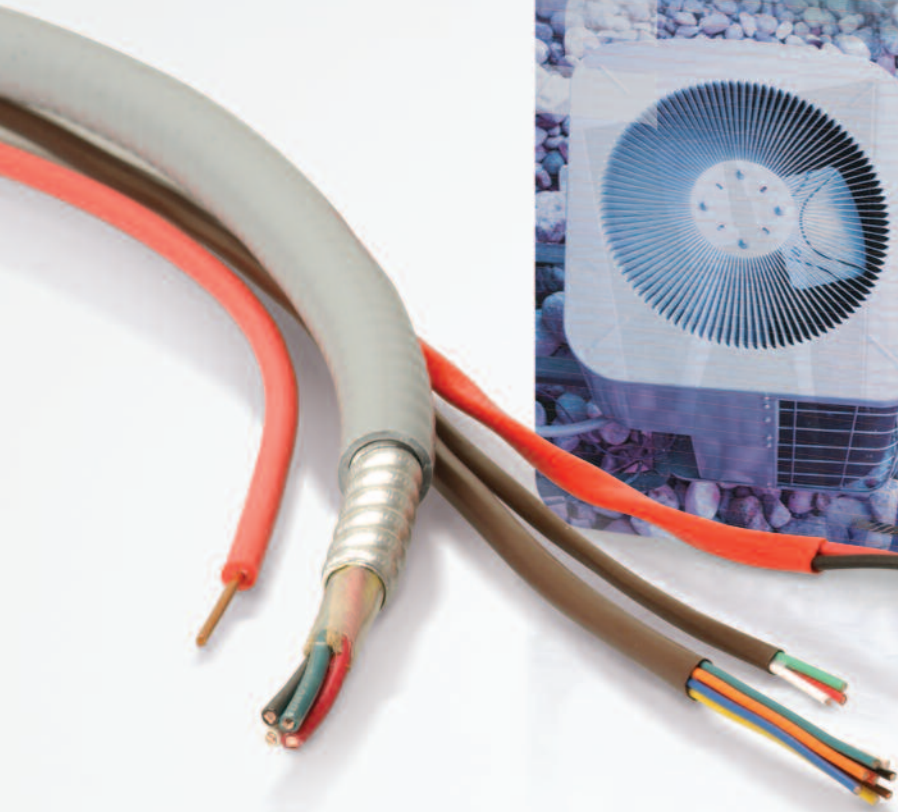

**BARON**™

Coleman Cable Inc

# A Tradition of Excellence...

# For Exceptional Performance.

**Coleman Cable Inc.** is a worldwide leader in the development, design, manufacture, marketing & distribution of wire and cable products. A Broad Range of Products, Innovative Solutions, Recognized Brands, and a Solid Service Platform are the foundation that Coleman Cable's Dedicated, Professional People build upon to create Customer Value. These characteristics, combined with strategic acquisitions, such as Copperfield, establish and strengthen Coleman Cable's leadership position as one of the premier US-based manufacturers of electrical, electronic and assembled wire and cable products.

The **Coleman Cable Baron®** brand is one of the most trusted names in the HVAC/R market for reliability, innovation and quality performance. Our product offering provides cable solutions for virtually every HVAC/R application. Coleman Cable's technical expertise and commitment to innovation ensure the most advanced and highest quality HVAC/R cable on the market.

The Baron Baro-Pak™ self-dispensing package is the only thermostat wire package on the market today that is engineered to save you time and money. It eliminates the need for heavy cumbersome reels while offering superior protection, effortless payout and efficient storage for unused wire. Baro-Pak's unique stacking ability allows you to pull 2, 3 or more constructions at the same time, with minimal set up. The package comes in both 250 ft. and 500 ft. put-ups.


The Baro-Split™ mini-split cables are a versatile solution to providing power and control for your mini-split installations. Mini-split installers and HVAC contractors looking to save on labor costs while meeting local codes for mini-split sub-power feeds are making Coleman Cable's Baro-Split the cables of choice. With safety, versatility and labor savings that can't be beat, choose Baro-Split cables for your next mini-split installation.



# Thermostat Cables



## 18 AWG SOL BC – Baro-Pak™ – Brown



| Part Number | No of Cond | Wt/ 1000' | Std Pkg |
|-------------|------------|-----------|---------|
| 55302-55-07 | 2          | 13        | 1 x 500 |
| 55303-55-07 | 3          | 16        | 1 x 500 |
| 55304-54-07 | 4          | 28        | 1 x 250 |
| 55305-54-07 | 5          | 29        | 1 x 250 |
| 55306-54-07 | 6          | 35        | 1 x 250 |
| 55307-54-07 | 7          | 41        | 1 x 250 |
| 55308-54-07 | 8          | 47        | 1 x 250 |
| 55309-54-07 | 9          | 52        | 1 x 250 |
| 55310-54-07 | 10         | 54        | 1 x 250 |
| 55312-54-07 | 12         | 69        | 1 x 250 |

ETL Type CL2, CETL Listed Type CL2 or CMH/FT1,  
NEC Article 725, Put-up = 250' (54), 500' (55),  
Color Code: Brown (07)


## 20 AWG SOL BC – Baro-Pak™ – Brown



| Part Number | No of Cond | Wt/ 1000' | Std Pkg |
|-------------|------------|-----------|---------|
| 55202-55-07 | 2          | 8         | 1 x 500 |
| 55203-55-07 | 3          | 10        | 1 x 500 |
| 55204-54-07 | 4          | 14        | 1 x 250 |
| 55205-54-07 | 5          | 17        | 1 x 250 |
| 55206-54-07 | 6          | 21        | 1 x 250 |
| 55207-54-07 | 7          | 24        | 1 x 250 |
| 55208-54-07 | 8          | 28        | 1 x 250 |
| 55209-54-07 | 9          | 32        | 1 x 250 |
| 55210-54-07 | 10         | 36        | 1 x 250 |
| 55212-54-07 | 12         | 46        | 1 x 250 |

ETL Type CL2, CETL Type CL2 or CMH/FT1,  
NEC Article 725, Put-up = 250' (54), 500' (55),  
Color Code: Brown (07)

## 18 AWG SOL BC BaroStat™ – Reels – Brown



| Part Number | No of Cond | Wt/ 1000' | Std Pkg |
|-------------|------------|-----------|---------|
| 55302-05-07 | 2          | 14        | 4 x 500 |
| 55303-05-07 | 3          | 19        | 4 x 500 |
| 55304-04-07 | 4          | 25        | 4 x 250 |
| 55305-04-07 | 5          | 31        | 4 x 250 |
| 55306-04-07 | 6          | 37        | 4 x 250 |
| 55307-04-07 | 7          | 44        | 4 x 250 |
| 55308-04-07 | 8          | 50        | 4 x 250 |
| 55309-04-07 | 9          | 55        | 4 x 250 |
| 55310-04-07 | 10         | 61        | 4 x 250 |
| 55312-04-07 | 12         | 72        | 1 x 250 |

ETL Type CL2, CETL Type CL2 or CMH/FT1, NEC Article 725,  
Put-up = 250' (04), 500' (05), Color Code: Brown (07)

## 20 AWG SOL BC BaroStat™ – Reels – Brown



| Part Number | No of Cond | Wt/ 1000' | Std Pkg |
|-------------|------------|-----------|---------|
| 55202-05-07 | 2          | 9         | 4 x 500 |
| 55203-05-07 | 3          | 12        | 4 x 500 |
| 55204-04-07 | 4          | 16        | 4 x 250 |
| 55205-04-07 | 5          | 19        | 4 x 250 |
| 55206-04-07 | 6          | 23        | 4 x 250 |
| 55207-04-07 | 7          | 26        | 4 x 250 |
| 55208-04-07 | 8          | 30        | 4 x 250 |
| 55209-04-07 | 9          | 34        | 4 x 250 |
| 55210-04-07 | 10         | 38        | 4 x 250 |
| 55212-04-07 | 12         | 46        | 4 x 250 |

ETL Type CL2, CETL Listed CL2 or CMH/FT1,  
NEC Article 725, Put-up = 250' (04), 500' (05)  
Color Code: Brown (07)

## 18 AWG SOL BC BaroStat™ – Reels – White



| Part Number | No of Cond | Wt/ 1000' | Std Pkg |
|-------------|------------|-----------|---------|
| 55302-05-01 | 2          | 14        | 4 x 500 |
| 55303-05-01 | 3          | 19        | 4 x 500 |
| 55304-04-01 | 4          | 25        | 4 x 250 |
| 55305-04-01 | 5          | 31        | 4 x 250 |
| 55306-04-01 | 6          | 37        | 4 x 250 |
| 55307-04-01 | 7          | 44        | 4 x 250 |
| 55308-04-01 | 8          | 50        | 4 x 250 |
| 55309-04-01 | 9          | 55        | 4 x 250 |
| 55310-04-01 | 10         | 61        | 4 x 250 |

ETL Type CL2, CETL Type CL2 or CMH/FT1, NEC Article 725,  
Put-up = 250' (04), 500' (05), Color Code: White (01)



## 16 AWG SOL BC BaroStat™ – Reels

| Part Number | No of Cond | Wt/ 1000' | Std Pkg |
|-------------|------------|-----------|---------|
| 55403-05-07 | 3          | 31        | 1 X 500 |
| 55405-05-07 | 5          | 49        | 1 x 500 |
| 55406-05-07 | 6          | 58        | 1 x 500 |
| 55408-05-07 | 8          | 75        | 1 x 500 |
| 55410-05-07 | 10         | 98        | 1 x 500 |

ETL Type CL2, CETL Listed, Type CM/CL2 or CMM/FT1,  
NEC Article 725, Put-up = 250' (04), 500' (05),  
Color Code: Brown (07)

# Thermostat & Control Cables



## 18 AWG STR BC Shielded Thermostat Cable – Reels



| Part Number | No of Cond | Wt/ 1000' | Std Pkg |
|-------------|------------|-----------|---------|
| 95214-05-09 | 2          | 20        | 1 x 500 |
| 95214-50-09 | 2          | 20        | 8 x 50  |
| 95218-05-09 | 3          | 26        | 1 x 500 |
| 67003-05-09 | 4          | 33        | 1 x 500 |
| 67003-50-09 | 4          | 33        | 8 x 50  |
| 67006-05-09 | 6          | 44        | 1 x 500 |
| 67008-05-09 | 8          | 56        | 1 x 500 |

ETL Type CMR/CL3R, CETL Type CMG/FT4,  
NEC Article 725 & 800, Copper Stranding: 7 x 0.0152,  
Put-up = 500' (05), 50' (50), Color Code: Gray (09)

## 18 AWG SOL BC Baroplen™ Plenum Cable – Reels



| Part Number | No of Cond | Wt/ 1000' | Std Pkg |
|-------------|------------|-----------|---------|
| 55502-05-23 | 2          | 16        | 4 x 500 |
| 55503-05-23 | 3          | 22        | 4 x 500 |
| 55504-04-23 | 4          | 29        | 4 x 250 |
| 55505-04-23 | 5          | 35        | 4 x 250 |
| 55506-04-23 | 6          | 42        | 4 x 250 |
| 55508-04-23 | 8          | 55        | 4 x 250 |

ETL Type CMP/CL2P, CETL Type CMP/FT6,  
NEC Article 725 & 800, Put-up = 250' (04), 500' (05),  
Color Code: Beige (23)


## 18 AWG STR BC Shielded Plenum Cable – Reels



| Part Number | No of Cond | Wt/ 1000' | Std Pkg |
|-------------|------------|-----------|---------|
| 75902-05-23 | 2          | 22        | 1 x 500 |
| 75903-05-23 | 3          | 28        | 1 x 500 |
| 75904-05-23 | 4          | 37        | 1 x 500 |
| 75905-05-23 | 5          | 45        | 1 x 500 |
| 75906-05-23 | 6          | 47        | 1 x 500 |
| 75908-05-23 | 8          | 60        | 1 x 500 |

ETL Type CMP/CL3P, CETL Type CMP/FT6,  
NEC Article 725 & 800, Copper Stranding: 7 x 0.0152,  
Put-up = 500' (05), Color Code: Beige (23)

## 18 AWG SOL BC – Baro-Pak™ Canadian LVT



| Part Number | No of Cond | Wt/ 1000' | Std Pkg |
|-------------|------------|-----------|---------|
| 55382-54-07 | 2          | 13        | 1 x 250 |
| 55383-54-07 | 3          | 16        | 1 x 250 |
| 55384-54-07 | 4          | 23        | 1 x 250 |
| 55385-54-07 | 5          | 29        | 1 x 250 |
| 55386-54-07 | 6          | 35        | 1 x 250 |
| 55387-54-07 | 7          | 41        | 1 x 250 |
| 55388-54-07 | 8          | 47        | 1 x 250 |
| 55389-54-07 | 9          | 52        | 1 x 250 |
| 55390-54-07 | 10         | 54        | 1 x 250 |
| 55392-54-07 | 12         | 69        | 1 x 250 |

UL Listed Type CL2, CUL Listed Type CM or CMH/FT4,  
NEC Article 725, Put-up = 250' (54)  
Color Code: Brown (07)

# Fire Alarm Cable

## 18 AWG SOL Fire Alarm Cable



| Part Number | No of Cond | Wt/ 1000' | Std Pkg  |
|-------------|------------|-----------|----------|
| 98820-05-04 | 2          | 18        | 1 x 500  |
| 98820-06-04 | 2          | 16        | 1 x 1000 |
| 98804-06-04 | 4          | 27        | 1 x 1000 |
| 98806-06-04 | 6          | 40        | 1 x 1000 |

UL Listed Type FPLR, CUL Listed Type CMG/FT4,  
NEC Article 760, Put-up = 1000' (06), 500' (05),  
Color Code: Red (04)

## 18 AWG SOL Shielded Fire Alarm Cable



| Part Number | No of Cond | Wt/ 1000' | Std Pkg  |
|-------------|------------|-----------|----------|
| 98300-06-04 | 2          | 20        | 1 x 1000 |
| 98831-06-04 | 4          | 30        | 1 x 1000 |

ETL Type FPLR, CETL Type CMG/FT4, NEC Article 760,  
Put-up = 1000' (06), Color Code: Red (04)

## 18 AWG SOL Plenum Fire Alarm Cable



| Part Number | No of Cond | Wt/ 1000' | Std Pkg  |
|-------------|------------|-----------|----------|
| 81802-06-04 | 2          | 18        | 1 x 1000 |
| 81804-05-04 | 4          | 31        | 1 x 500  |
| 81804-06-04 | 4          | 28        | 1 x 1000 |
| 81806-06-04 | 6          | 43        | 1 x 1000 |

ETL Type FPLP, CETL Type CMG/FT6, NEC Article 760,  
Put-up = 1000' (06), 500' (05), Color Code: Red (04)

## 18 AWG SOL Plenum Shielded Fire Alarm Cable



| Part Number | No of Cond | Wt/ 1000' | Std Pkg  |
|-------------|------------|-----------|----------|
| 85802-05-04 | 2          | 23        | 1 x 500  |
| 85802-06-04 | 2          | 20        | 1 x 1000 |
| 85804-05-04 | 4          | 36        | 1 x 500  |
| 85804-06-04 | 4          | 33        | 1 x 1000 |

ETL Type FPLP, CETL Type CMP/FT6, NEC Article 760,  
Put-up = 1000' (06), 500' (05), Color Code: Red (04)



# Building Wire & Control Cables



## Type TFFN/THHN Vinyl/Nylon Jacket – STR



| Part Number | Description | Pkg Wt | Std Pkg |
|-------------|-------------|--------|---------|
| 51012-03-XX | 16 TFFN*    | 17     | 8 x 100 |
| 51013-03-XX | 14 THHN*    | 21     | 8 x 100 |
| 51014-03-XX | 12 THHN*    | 27     | 8 x 100 |
| 51016-03-XX | 10 THHN*    | 39     | 8 x 100 |
| 51017-03-XX | 8 THHN      | 29     | 4 x 100 |
| 51011-05-XX | 18 TFFN     | 18     | 4 x 500 |
| 51012-05-XX | 16 TFFN     | 26     | 4 x 500 |
| 51013-05-XX | 14 THHN*    | 36     | 4 x 500 |
| 51014-05-XX | 12 THHN*    | 52     | 4 x 500 |
| 51016-05-XX | 10 THHN*    | 21     | 1 x 500 |
| 51017-05-XX | 8 THHN      | 34     | 1 x 500 |

UL Listed Type STR BC, 90°C 600 Volt, Put-up = 500' (05), 100' (03), Color Code: White (01), Yellow (02), Red (04), Green (05), Blue (06), Black (08)

\* CUL T90 Nylon

## Type TFN/THHN Vinyl/Nylon Jacket – SOL



| Part Number | Description | Pkg Wt | Std Pkg |
|-------------|-------------|--------|---------|
| 51791-05-XX | 18 TFN      | 18     | 4 x 500 |
| 51792-05-XX | 16 TFN      | 24     | 4 x 500 |
| 51041-05-XX | 14 THHN*    | 36     | 4 x 500 |
| 51042-05-XX | 12 THHN*    | 52     | 4 x 500 |
| 51043-05-XX | 10 THHN*    | 80     | 4 x 500 |

UL Listed Type SOL BC, 90°C 600 Volt.

Put-up = 500' (05), Color Code: Various

\* CUL T90 Nylon

## Non Metallic Building Wire – Baro-Pak™



| Part Number | Description | Pkg Wt | Std Pkg |
|-------------|-------------|--------|---------|
| 55550-04-01 | 14/3 w/grd  | 19     | 1 x 250 |
| 55551-04-02 | 12/3 w/grd  | 28     | 1 x 250 |
| 55552-04-03 | 10/3 w/grd  | 42     | 1 x 250 |
| 55553-54-01 | 14/2 w/grd  | 15     | 1 x 250 |
| 55554-54-02 | 12/2 w/grd  | 21     | 1 x 250 |
| 55555-54-03 | 10/2 w/grd  | 32     | 1 x 250 |
| 55553-B8-01 | 14/2 w/grd  | 24     | 6 x 50  |
| 55554-B8-02 | 12/2 w/grd  | 31     | 6 x 50  |
| 55555-B8-03 | 10/2 w/grd  | 44     | 6 x 50  |

Put-up = 250' (54), (04), 50' Knock out box (B8)

Color Code: White (01), Yellow (02), Orange (03)

## Portable Cord & Temporary Power



| Part Number | Description | Pkg Wt | Std Pkg |
|-------------|-------------|--------|---------|
| 23225-04-08 | 18/2        | 44     | 1 x 250 |
| 23325-04-08 | 18/3        | 55     | 1 x 250 |
| 23425-04-08 | 18/4        | 66     | 1 x 250 |
| 23226-04-08 | 16/2        | 54     | 1 x 250 |
| 23326-04-08 | 16/3        | 67     | 1 x 250 |
| 23426-04-08 | 16/4        | 78     | 1 x 250 |
| 23227-04-08 | 14/2        | 68     | 1 x 250 |
| 23327-04-08 | 14/3        | 84     | 1 x 250 |
| 23427-04-08 | 14/4        | 104    | 1 x 250 |
| 23228-04-08 | 12/2        | 97     | 1 x 250 |
| 23328-04-08 | 12/3        | 133    | 1 x 250 |
| 23428-04-08 | 12/4        | 157    | 1 x 250 |

UL/CSA Listed Type SJEOOW/SJTOOW (TPE), 300 Volt, NEC Article 400, Put-up = 250' (04), Color Code: Black (08)

## Corra/Clad™ Type MC Metal Clad Power Supply



| Part Number | Description | Pkg Wt | Std Pkg |
|-------------|-------------|--------|---------|
| 92252-04-45 | 12/2        | 91     | 1 x 250 |
| 92283-04-45 | 12/2 w/Grnd | 119    | 1 x 250 |
| 92452-04-45 | 14/2        | 69     | 1 x 250 |
| 92483-04-45 | 14/2 w/Grnd | 88     | 1 x 250 |
| 92652-04-45 | 16/2        | 47     | 1 x 250 |
| 92852-04-45 | 18/2        | 40     | 1 x 250 |

UL Listed Type FPL SOL BC, 90°C 600 Volt, NEC Article 334, Put-up = 250' (04), Color Code: Aluminum (45)

## SBC PVC Oil Burner Ignition Wire – STR



| Part Number  | Description | Pkg Wt | Std Pkg |
|--------------|-------------|--------|---------|
| 614124-48-08 | 14 STR      | 38     | 1 x 250 |

UL Listed, Type BC, Put-up = 250' (48), Color Code: Black (08)



# Baro-Split™ Cables

**NEW**

## 14 AWG Baro-Split™ Corra/Clad® MC Cable

- Meets Mini-Split manufacturer's specifications
- Meets all national codes
- Suitable for outdoor use, under concrete, direct burial and through finished walls or ceilings



| Part Number | Description                     | Pkg Wt | Std Pkg |
|-------------|---------------------------------|--------|---------|
| 92484-04-09 | 14/3 SOL w/grnd, 250ft reel     | 43     | 1 x 250 |
| 92484-50-09 | 14/3 SOL w/grnd, 50ft coil      | 38     | 5 x 50  |
| 10576-00-00 | Liquid-tight MC cable connector | 3      | 25      |

UL Listed, Put Up = 250' (04), 50' (50), Color Code: Gray (09)  
 \* 50ft coil includes one liquid-tight MC connector

**NEW**

## 14 AWG Baro-Split™ Compact 600® THHN Power Cable

- Meets Mini-Split manufacturer's specifications
- Install in NEC approved cable trays within local code compliances
- TPE jacket is UV resistant and direct burial rated



| Part Number | Description   | Pkg Wt | Std Pkg |
|-------------|---------------|--------|---------|
| 60444-04-08 | 14/4 SOL THHN | 28     | 1 x 250 |
| 60444-50-08 | 14/4 SOL THHN | 20     | 4 x 50  |
| 60707-04-08 | 14/7 STR THHN | 44     | 1 x 250 |

UL Listed, Type TC, 600V, -40°C to 90°C  
 Put Up = 250' (04), 50' (50), Color Code: Black (08)

**NEW**

## 18 AWG Stranded Shielded Plenum Control Cable for Mini-Split Application



| Part Number | No of Cond | Wt/ 1000' | Std Pkg  |
|-------------|------------|-----------|----------|
| 75902-05-23 | 2          | 22        | 1 x 500  |
| 75903-05-23 | 3          | 28        | 1 x 500  |
| 75904-05-23 | 4          | 37        | 1 x 500  |
| 75905-05-23 | 5          | 45        | 1 x 500  |
| 75906-05-23 | 6          | 49        | 1 x 500  |
| 75908-05-23 | 8          | 62        | 1 x 500  |
| 75910-06-23 | 10         | 79        | 1 x 1000 |
| 75912-06-23 | 12         | 92        | 1 x 1000 |

ETL Type CMP/CL3P, CETL Type CMP/FT6,  
 Put Up = 500' (05), 1000' (06), Color Code: Beige (23)

**NEW**

## 16 AWG Stranded Shielded Plenum Control Cable for Mini-Split Application



| Part Number | No of Cond | Wt/ 1000' | Std Pkg  |
|-------------|------------|-----------|----------|
| 75702-06-23 | 2          | 33        | 1 x 1000 |
| 75703-06-23 | 3          | 47        | 1 x 1000 |
| 75704-06-23 | 4          | 55        | 1 x 1000 |
| 75705-05-23 | 5          | 68        | 1 x 500  |
| 75706-05-23 | 6          | 80        | 1 x 500  |
| 75708-05-23 | 8          | 95        | 1 x 500  |

ETL Type CMP/CL3P, CETL Type CMP/FT6,  
 Put Up = 500' (05), 1000' (06) Color Code: Beige (23)

## 18 AWG STR BC Shielded Thermostat Cable – Reels



| Part Number | No of Cond | Wt/ 1000' | Std Pkg |
|-------------|------------|-----------|---------|
| 95214-05-09 | 2          | 20        | 1 x 500 |
| 95214-50-09 | 2          | 20        | 8 x 50  |
| 95218-05-09 | 3          | 26        | 1 x 500 |
| 67003-05-09 | 4          | 33        | 1 x 500 |
| 67003-50-09 | 4          | 33        | 8 x 50  |
| 67006-05-09 | 6          | 44        | 1 x 500 |
| 67008-05-09 | 8          | 56        | 1 x 500 |

ETL Type CMR/CL3R, CETL Type CMG/FT4,  
 NEC Article 725 & 800, Copper Stranding: 7 x 0.0152,  
 Put-up = 500' (05), 50' (50), Color Code: Gray (09)

# Cord Products

## Vinyl Outdoor Extension Cords



Molded, water resistant connectors with reinforced blades make these cords suitable for outdoor use.



| Cat No | Wire Ga/Cond | Wire Type | Color  | Length in Ft | Package Type | 125V Rating | Master Pack | Master Wt | Master Pack Cube |
|--------|--------------|-----------|--------|--------------|--------------|-------------|-------------|-----------|------------------|
| 02307  | 16/3         | SJTW      | Orange | 25           | Sleeve       | 13A         | 12          | 25        | .76              |
| 02308  | 16/3         | SJTW      | Orange | 50           | Sleeve       | 13A         | 12          | 46        | 1.16             |
| 02309  | 16/3         | SJTW      | Orange | 100          | Sleeve       | 10A         | 6           | 45        | 1.19             |
| 02407  | 14/3         | SJTW      | Red    | 25           | Sleeve       | 15A         | 12          | 35        | .90              |
| 02408  | 14/3         | SJTW      | Red    | 50           | Sleeve       | 15A         | 6           | 29        | .82              |
| 02409  | 14/3         | SJTW      | Red    | 100          | Sleeve       | 13A         | 6           | 60        | 1.41             |
| 02587  | 12/3         | SJTW      | Yellow | 25           | Sleeve       | 15A         | 12          | 40        | 1.21             |
| 02588  | 12/3         | SJTW      | Yellow | 50           | Sleeve       | 15A         | 6           | 40        | 1.41             |
| 02589  | 12/3         | SJTW      | Yellow | 100          | Sleeve       | 15A         | 4           | 52        | 1.41             |



## Neon Stripes™ Extension Cords



| Part Number | Description                                                        | AWG | Outlets | Ft/Package  |
|-------------|--------------------------------------------------------------------|-----|---------|-------------|
| 02548       | 12/3 SJTW insulated extension cord - 50 feet with indicator light  | 12  | 1       | 50' sleeve  |
| 02549       | 12/3 SJTW insulated extension cord - 100 feet with indicator light | 12  | 1       | 100' sleeve |

**Color Code:**  
Silver/Blue (NV),  
Purple/White (P1),  
Yellow/Purple (22),  
Orange/Blue (3V),  
Red/White (41),  
Green/Yellow (52),  
Green/Red (54),  
Blue/Yellow (62),  
Blue/Red (64),  
Pink/Green (77)

## LED Work Lights



| Part Number | Description                | Package Type | Pack Qty | Master Wt |
|-------------|----------------------------|--------------|----------|-----------|
| 05952       | TwistBrite™ LED work light | clamshell    | 4        | 6         |
| 05953       | 30 LED work light          | clamshell    | 4        | 6         |

## Work Light Bonus Pack



| Part Number | Description                                                                | Package Type | Pack Qty | Master Wt |
|-------------|----------------------------------------------------------------------------|--------------|----------|-----------|
| 05955       | 13W fluorescent light w/ outlet and magnet, plus BONUS 25' Push-Lock™ cord | clamshell    | 4        | 16        |



**BARON**

# Power Supply Cords

## (Pigtails) Right-Angle Plugs



| Part Number | Description   | Pkg Wt | Std Pkg |
|-------------|---------------|--------|---------|
| 55243-88-09 | 3' 16/3 SPT-2 | 13     | 50      |
| 55244-88-09 | 4' 16/3 SPT-2 | 15     | 50      |
| 55245-88-09 | 5' 16/3 SPT-2 | 18     | 50      |
| 55246-88-09 | 6' 16/3 SPT-2 | 25     | 50      |
| 55248-88-09 | 8' 16/3 SPT-2 | 30     | 50      |
| 55225-88-09 | 5' 14/3 SPT-3 | 18     | 50      |
| 55226-88-09 | 6' 14/3 SPT-3 | 25     | 50      |

UL/CSA Listed Type SPT-2/SPT-3, Color Code: Gray (09)

## (Pigtails) Straight Plugs



| Part Number  | Description   | Pkg Wt | Std Pkg |
|--------------|---------------|--------|---------|
| 55233-88-08  | 3' 16/3 SPT-2 | 13     | 50      |
| 55234-88-08  | 4' 16/3 SPT-2 | 15     | 50      |
| 55235-88-08  | 5' 16/3 SPT-2 | 18     | 50      |
| 55236-88-08  | 6' 16/3 SPT-2 | 25     | 50      |
| 55238-88-08  | 8' 16/3 SPT-2 | 30     | 50      |
| 09733-88-09* | 3' 16/3 SPT-3 | 6      | 25      |
| 09734-88-09* | 4' 16/3 SPT-3 | 9      | 25      |
| 09736-88-09* | 6' 16/3 SPT-3 | 12     | 25      |
| 09743-88-23* | 3' 14/3 SPT-3 | 10     | 25      |
| 09746-88-23* | 6' 14/3 SPT-3 | 18     | 25      |

UL/CSA Listed Type SPT-2 or SPT-3,  
Color Code: Black (08), Gray (09), Beige (23)

\* UL Listed

# Range & Dryer Cords

## Range Cords



| Part Number | Description       | Pkg Wt | Std Pkg |
|-------------|-------------------|--------|---------|
| 09014-88-09 | 4' 6/2 & 8/1 SRDT | 24     | 12      |
| 09015-88-09 | 5' 6/2 & 8/1 SRDT | 28     | 12      |
| 09016-88-09 | 6' 6/2 & 8/1 SRDT | 33     | 12      |

UL Listed, 3-Wire, Flat Cord, NEMA 10-50P, 125/250V, 50 AMP. Right angle male plug guards against accidental pull out. Color Code: Gray (09)

## Range Cords



| Part Number | Description       | Pkg Wt | Std Pkg |
|-------------|-------------------|--------|---------|
| 09044-88-08 | 4' 6/2 & 8/2 SRDT | 35     | 12      |
| 09045-88-08 | 5' 6/2 & 8/2 SRDT | 42     | 12      |
| 09046-88-08 | 6' 6/2 & 8/2 SRDT | 50     | 12      |

UL Listed, 4-Wire, Round Cord, NEMA 14-50P, 125/250V, 45 AMP. Right angle male plug guards against accidental pull out. Color Code: Black (08)


## Dryer Cords



| Part Number | Description  | Pkg Wt | Std Pkg |
|-------------|--------------|--------|---------|
| 09124-88-09 | 4' 10/3 SRDT | 15     | 12      |
| 09125-88-09 | 5' 10/3 SRDT | 19     | 12      |
| 09126-88-09 | 6' 10/3 SRDT | 21     | 12      |

UL Listed, 3-Wire, Flat Cord, NEMA 10-30P, 125/250V, 30 AMP. Right angle male plug guards against accidental pull out. Color Code: Gray (09)

## Dryer Cords



| Part Number | Description  | Pkg Wt | Std Pkg |
|-------------|--------------|--------|---------|
| 09154-88-08 | 4' 10/4 SRDT | 25     | 12      |
| 09155-88-08 | 5' 10/4 SRDT | 30     | 12      |
| 09156-88-08 | 6' 10/4 SRDT | 34     | 12      |

UL Listed, 4-Wire, Round Cord, NEMA 14-50P, 125/250V, 30 AMP. Right angle male plug guards against accidental pull out. Color Code: Black (08)

## Air Conditioner Extension Cords



| Part Number | Description    | Pkg Wt | Std Pkg |
|-------------|----------------|--------|---------|
| 03531-33-23 | 3' 14/3 SPT-3  | 17     | 36      |
| 03532-33-23 | 6' 14/3 SPT-3  | 18     | 24      |
| 03533-33-23 | 9' 14/3 SPT-3  | 19     | 18      |
| 03535-33-23 | 12' 14/3 SPT-3 | 16     | 12      |
| 03536-33-23 | 15' 14/3 SPT-3 | 21     | 12      |

UL Listed. Right angle male plug guards against accidental pull out. Color code: Beige (23)

## Air Conditioner Whips



| Part Number           | Description       | Pkg Wt | Std Pkg |
|-----------------------|-------------------|--------|---------|
| <b>METAL FITTINGS</b> |                   |        |         |
| 57514-00-00           | 1/2" x 4', 10 STR | 43     | 24      |
| 57516-00-00           | 1/2" x 6', 10 STR | 53     | 24      |
| 57504-00-00           | 3/4" x 4', 8 STR  | 62     | 24      |
| 57506-00-00           | 3/4" x 6', 8 STR  | 82     | 24      |
| <b>PVC FITTINGS</b>   |                   |        |         |
| 57515-00-00           | 1/2" x 4', 10 STR | 43     | 24      |
| 57517-00-00           | 1/2" x 6', 10 STR | 53     | 24      |
| 57505-00-00           | 3/4" x 4', 8 STR  | 62     | 24      |
| 57507-00-00           | 3/4" x 6', 8 STR  | 82     | 24      |

UL/CUL Listed, THHN STR

# Voice & Data Cables

## Category 5e: Enhanced Data Cable – Twisted Pair



| Part Number         | Number of Pairs | AWG Conductor<br>Nom Size Diameter | NOM Insulation Thickness | NOM Jacket Thickness | NOM OD | Wt/ 1000' | Listed Type |
|---------------------|-----------------|------------------------------------|--------------------------|----------------------|--------|-----------|-------------|
| 96263<br>Non-Plenum | 4               | 24 .0201                           | .008"                    | .020"                | .220"  | 21        | CMR<br>FT4  |
| 966956<br>Plenum    | 4               | 24 .0201                           | .008"                    | .015"                | .180"  | 19        | CMP<br>FT6  |

UL or ETL Verified to ANSI/TIA/EIA-568B, Category 5E.  
Exceeds: ANSI/TIA/EIA-568B, Category 5E, UL 1666,  
(CMR) FT4, NFPA 262 (CMP) FT6, tested to 350 MHz.

Conductors: 24 AWG Solid Bare Copper  
Insulation: Polyethylene (Non-Plenum) and FEP (Plenum)  
Jacket: PVC (non-Plenum) or Low Smoke PVC (Plenum)  
Jacket Color: Gray (09) and Blue (06) (other colors available - contact factory)  
Electricals: 24 AWG - Mutual Capacitance 20.0 Pt./Ft. Maximum  
DC Resistance 28.6 OHMS/1000' Maximum  
Applications: Gigabit Ethernet  
Fast Ethernet  
1,000/100/10 Base-T

**Chart No. 12 (Insulation Code)**

|              |              |
|--------------|--------------|
| White/Blue   | Blue Solid   |
| White/Orange | Orange Solid |
| White/Green  | Green Solid  |
| White/Brown  | Brown Solid  |

## Category 6 Cable: 600MHZ – Twisted Pair – Installation Friendly



| Part Number         | Number of Pairs | AWG Conductor<br>Nom Size Diameter | NOM Insulation Thickness | NOM Jacket Thickness | NOM OD | Wt/ 1000' | Listed Type    |
|---------------------|-----------------|------------------------------------|--------------------------|----------------------|--------|-----------|----------------|
| 97272<br>Non-Plenum | 4               | 23 .023                            | .008"                    | .230"                | 70%    | 26        | CMR/MPR<br>FT4 |
| 977964<br>Plenum    | 4               | 23 .023                            | .008"                    | .206"                | 74%    | 24        | CMP<br>FT6     |

Exceeds TIA/EIA Draft 9 Category 6, tested to 250 MHz

Conductors: 23 AWG Bare Copper  
Insulation: Polyethylene (Non-Plenum) and FEP (Plenum)  
Jacket: PVC (Non-Plenum) or Low Smoke PVC (Plenum)  
Jacket Color: White (01), Orange (03), Green (05), Blue (06), Gray (09)  
(other colors available - contact factory)  
Electricals: 24 AWG - Mutual Capacitance 20.0 Pt./Ft. Maximum  
DC Resistance 28.6 OHMS/1000' Maximum  
Tested: 600 MHz  
Applications: Gigabit Ethernet  
Fast Ethernet  
1000 Base-T  
Systems Approval: Category 6

**Chart No. 12 (Insulation Code)**

|              |              |
|--------------|--------------|
| White/Blue   | Blue Solid   |
| White/Orange | Orange Solid |
| White/Green  | Green Solid  |
| White/Brown  | Brown Solid  |



# Product innovation for the **HVAC Market**



## **Baro-Split™ Mini-Split Cables**

Mini-split installers and HVAC contractors looking to save on labor costs while meeting local codes for mini-split sub-power feeds are making Coleman Cable's Baro-Split the cables of choice.

Baro-Split Corra/Clad® MC cable consists of UL listed THHN soft drawn annealed solid copper conductors, cabled with fillers and wrapped with an overall solid Flexi-Rib™ aluminum sheath. The continuous sheath provides watertight protection and it is covered with a PVC outer jacket for outdoor use or direct burial. Baro-Split Corra/Clad® MC cables are UL approved and meet or exceed the requirements of NEC Article 330.

Baro-Split Compact 600® and Baro-Split Shielded Low Voltage cables offer additional options to provide power and control for your mini-split installations. With safety, versatility and labor savings that can't be beat, choose Baro-Split cables for your next mini-split installation.



# Coleman Cable HVAC/R Products

Marketed under the Baron™ Brand name, Coleman Cable manufactures one of the most comprehensive lines of HVAC/R cable and related product available today. Our product offering

## Why Coleman Cable?

- Industry Leader - Baron™ Brand
- Manufactured in ISO-9000 facilities
- Multi-vendor friendly
- Inventory availability:
  - Full Line
  - Multiple Color
  - Reliable Delivery

provides cable solutions for virtually every HVAC/R application. Coleman Cable's technical expertise and commitment to innovation ensure the most advanced and highest quality HVAC/R cable on the market.



## Packaging Options\*

### Coleman Cable offers six types of packaging options


- Baro-Pak™
- Knock-Out Box
- Pull-Out Box
- Reels
- Reel-in-Box
- Signa-Coil



All provide fast and easy cable access. Kinks and twists are eliminated. You get tangle-free cable delivery each and every time. These durable, compact designs save on installation time while reducing waste and material costs. They can be easily stacked to save room.

*\*Not all options are available for each product*

## Coleman Cable Part Legend

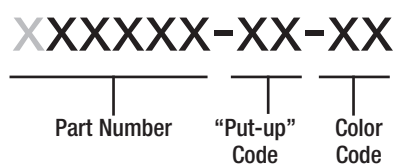

| Put-ups                        | Code |
|--------------------------------|------|
| Reel, 250 ft                   | 04   |
| Reel, 500 ft                   | 05   |
| Reel, 1,000 ft                 | 06   |
| Reel-in-box, 1,000 ft          | 16   |
| RabbitPull™ Pull-Box, 500 ft   | 45   |
| RabbitPull™ Pull-Box, 1,000 ft | 46   |
| Baro-Pak™ 250 ft               | 54   |
| Baro-Pak™ 500 ft               | 55   |
| Baro-Pak™ 1,000 ft             | 56   |

| Colors      | Code |
|-------------|------|
| White       | 01   |
| Yellow      | 02   |
| Orange      | 03   |
| Red         | 04   |
| Green       | 05   |
| Blue        | 06   |
| Brown       | 07   |
| Black       | 08   |
| Gray        | 09   |
| Pink        | 11   |
| Purple      | 13   |
| Clear       | 18   |
| Fluorescent |      |
| Pink        | 21   |
| Ivory       | 22   |
| Natural     | 23   |
| Beige       | 33   |
| Red Striped |      |
| CorraClad™  | 44   |



# Exceptional Performance

is reflected in everything we do.

**Coleman Cable Inc.** customers know they can rely on us to consistently deliver a broad range of wire and cable products and innovative solutions backed by recognized brands. These characteristics combined with a solid service platform and dedicated professional people, create a dynamic customer value that's exclusive to Coleman Cable.

## **Broad Range of Products –**

We provide one of the most extensive and diverse lines of electrical, electronic and assembled products in the industry. Through research, development and strategic acquisitions, such as Copperfield, we continue to enhance our product mix to meet customer needs.

## **Innovative Solutions –**

From custom cables for industrial, aerospace or military applications to the latest in electronic cables for security systems, you'll find Coleman Cable at the forefront of product and technology innovation.

## **Recognized Brands –**

Seoprene®, Royal®, Baron™, Road Power®, Signal®, Copperfield®, Excelene™ and Polar/Solar® all are leaders in their respective markets. Our distributors know that when they provide these leading brands to their customers, they receive instant acceptance and credibility in the marketplace.

## **Solid Service Platform –**

We utilize more than 2 million sq ft of strategically located, state-of-the-art, ISO-certified manufacturing and distribution facilities. This national footprint and extensive investment in service systems powers us to deliver more than 70,000 SKUs with a better than 97% first-fill rate.

## **Dedicated Professional People –**

We deliver strong performance because our people deliver strong performance every day. We've built a culture that puts customer needs first, making us easy to do business with and placing us at the top of our customers' list of suppliers.

## **Customer Value –**

A Broad Range of Products, Innovative Solutions, Recognized Brands, and a Solid Service Platform are the foundation that Coleman Cable's Dedicated, Professional People build upon to create Customer Value.

