

DiVAL⁺

Safety & Supplies for Life

Fall Protection Catalog

**DiVal Safety is an
Authorized Distributor of**



And Much, Much More!

Keeping Buffalo & Everyone Else SAFE!



The cover photo shows the construction site of the Buffalo Sabres' HARBORCENTER project, taken by Sabres staff photographer Bill Wippert. The 650,000 square foot HARBORCENTER opens this fall with two NHL size rinks, the Academy of Hockey, IMPACT Sports high-performance training facility, the two-story (716) Food and Sport restaurant, a unique Tim Hortons dedicated to the life and career of the hockey legend, and a 750 space parking ramp. A 205 room, full-service Marriott Hotel is scheduled to open on the property in spring 2015.



Order by Phone:
800.343.1354
7am - 5pm EST Monday - Friday.



Order by Fax:
716.874.4686
24 Hours a Day. Every Day.



Order by Web:
www.DiValSafety.com
24 Hours a Day. Every Day.



Order by E-Mail:
orders@divalsafety.com
24 Hours a Day. Every Day.



Order by Mail:
DiVal Safety Equipment, Inc.
1721 Niagara Street, Buffalo, New York 14207

Table of Contents

Pages

Harnesses	3-6	Confined Space Equipment	19
Rescue	6,23,24	Tree & Pole Climbing	19
Lanyards	7	Horizontal Lifelines ...	20
Self Retracting Lifelines	8-13	Safety Nets	20
Rope Grabs	13	Climbing Equipment ..	21
Carabiners	14	Body Belts	21
Anchors	14-17	Pulleys	23,25
Rope	15,22,25	Descent Equipment ...	24
Leading Edge SRL ...	16	Roof Safety Equipment	26-27
Roofers Kits	17	Tool Lanyards	28-31
Self-Retracting Lanyards	18	Tie Hooks	31
Tripods	18-19		

PAYMENT OPTIONS

We accept cash, check, charge, or account



Pricing in this catalog may be subject to change at any time.

Select the Proper Fall Protection Equipment: Self Retracting Lifeline or Shock-Absorbing Lanyard?

Illustration: Self-Retracting Lifeline with D-Bolt Anchorage Connector


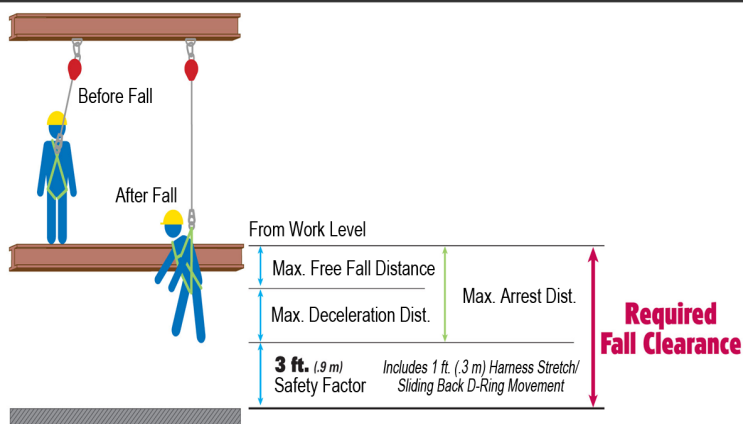


Illustration: Shock-Absorbing Lanyard with Cross-Arm Strap Anchorage Connector

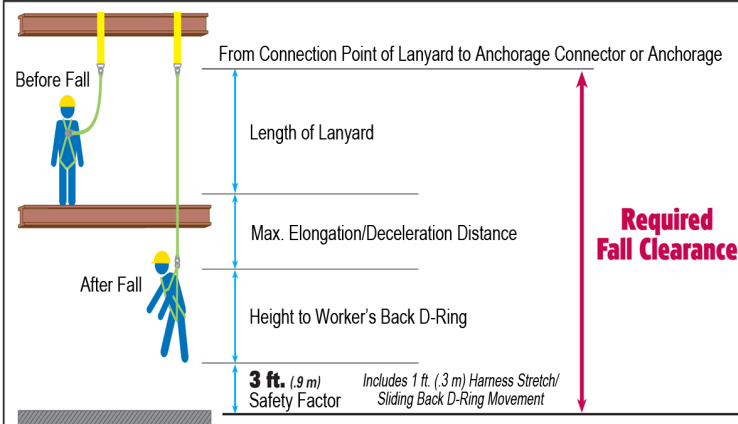

ANSI Z359.1-2007 Safety Requirements for Personal Fall Arrest Systems, Subsystems and Components

This Standard includes a few key changes and additions:

1. The definition section(s) of the original Standard has been removed. All terminology and definitions are now encompassed in the ANSI Z359.0 Standard.
2. The gate hook strength of snap hooks and carabiners has significantly changed. Section 3.2.1.4

Tensile Test

Tensile loads that a snap hook and carabiner must withstand remain the same as the existing Standard – 5,000 lbs. (22.2kN)

Gate Face Test




Gate face strength requirements have changed from 220 lbs. (1kN) (old Standard) to 3,600 lbs. (16kN) (new Standard).

Side Load Test

Side of gate strength requirements have changed from 350 lbs. (1.55kN)(old Standard) to 3,600 lbs. (16kN)(new Standard).

Minor Axis Test

Minor axis strength of non-captive eye snap hooks or carabiners must be 3,600 lbs. (16kN). This is new to the Standard.



Buckle Types




Mating Buckle

To connect the **mating buckle**, push the center bar buckle completely through the square link and allow it to fall into place. Pull web end to tighten.



Quick-Connect Buckle

Quick-Connect Buckles for chest and leg straps interlock similar to a seat belt for easy donning and feature a dual-tab release mechanism to prevent accidental opening.



Friction Buckle

To adjust the **friction buckle**, simply pass the webbing over the knurled bar and back down between the knurled bar and frame. Pull web end to tighten.



Tongue Buckle

The **tongue buckle** works similar to a belt buckle. Insert the loose strap of webbing through the tongue buckle placing the buckle tongue through the appropriate grommet hole. Push remaining webbing through the keeper.

Economical Full Body Harness



Basic all purpose harness provides safety and economy. Continuous web style harness features 1 dorsal D-Ring, 3-point adjustability, lanyard keeper hook, stress indicator safety tabs and mating buckle leg straps. 5,000 lb minimum break strength webbing. Meets or exceeds applicable OSHA and ANSI standards.



- Item #DV7007** **\$49.50**
Universal, Red Color
- Item #DV7007XXL** **\$59.75**
2X-Large, Black Color
- Item #DV7007XXXL** **\$69.75**
3X-Large, Black Color

Universal Contractor Style Harness



Contractor series universal fit full body harness features 5-point adjustability including front torso adjusters, tongue buckle legs and main buckle chest strap. Contains 1 dorsal D-Ring. Other features include lanyard keeper hook, 9 position leg adjustments and stress indicating safety tabs. 5,000 lb minimum break strength webbing. Meets or exceeds applicable OSHA and ANSI standards.



- Item #DV7016** **\$69.75**
Universal
- Item #DV7016XL** **\$69.75**
X-Large
- Item #DV7016XXL** **\$74.50**
2X-Large
- Item #DV7016XXXL** **\$77.90**
3X-Large



Industrial Style Full Body Harness w/ D-Rings

Professional grade full body harness with back and side D-Rings for fall arrest and positioning. Featuring 5-point adjustability including front torso adjusters, tongue buckle legs, mating buckle chest strap, 7-1/2" stay put shoulder pads and 4" waist pad. Other features include 2 lanyard keeper hooks, 9 position leg adjustments and impact indicating safety tabs.



- Item #DV7078SM** **\$99.90**
Small / Medium
- Item #DV7078LX** **\$99.90**
Large / X-Large



Titanium® Belted Full Body Harness

Combine the benefits of longer life and damage resistance, with the comfort and pliability of traditional personal fall arrest components. Padded dorsal D-Ring and shoulder assembly with protective outer skin. Features Microshield®, a thin film poly-coat technology providing longer life and superior wear resistance. Twin torso keepers for stowing idle lanyard connectors. Paired friction roller adjusters on front torso. Durable 6" waist pad assembly with protective outer skin. Belted construction, tongue buckle legs, mating buckle chest and 3 D-Rings.



- Item #7078SMT** **\$174.00**
Small / Medium
- Item #7078LXT** **\$174.00**
Large / X-Large



FlowTech® Belted Full Body Harness

FallTech® FlowTech® belted construction full body harness provides cool comfort with FlowScape® shoulder, leg and waist pads. Features 3 D-Rings, back and sides. 5 point adjustability. Quick connect legs and chest. 2 lanyard keepers. Aluminum hardware for lighter weight. Extreme duty with a removable work belt. Meets ANSI Z359.1-2007 and Z359.12-2009 standards.



- Item #7089SM** **\$265.00**
- Item #7089MD** **\$265.00**
- Item #7089LG** **\$265.00**
- Item #7089XL** **\$265.00**



Titanium® Non-Belted Full Body Harness

FallTech®'s Durable Titanium® non-belted full body harness is complete with one back D-ring, tongue buckle legs and mating buckle chest. Offers a padded dorsal D-ring and shoulder assembly with protective outer skin, as well as twin torso keepers for stowing idle lanyard connectors. MicroShield® thin film poly-coat technology, provides longer life and superior wear resistance. Paired friction roller adjusters on front torso. Webbing made of polyester with minimum of 5,000 lbs tensile strength.



- Item #7008T** **\$109.75**

Miller AirCore™ Harness

The most unique and innovative fall protection available, this lightweight full-body harness is designed with breathable, open-core padding technology that provides optimal air flow, while reducing heat and moisture entrapment. DuraFlex® stretchable webbing provides greater flexibility and increased comfort. Additional features include an easy, one hand adjustment shoulder cam buckles and stand up back D-ring. Meets and or exceeds OSHA and ANSI requirements for fall protection. Sold by the each.



by Honeywell



A Miller AirCore™ Harness w/ QC Chest Strap & TB Leg Strap

Miller AirCore™ fall protection harness with (QC) Quick Connect chest and (TB) Tongue Buckle leg straps. **\$212.75**

Item #ACTBSMGN Small / Medium
Item #ACTBUGN Large / X-Large
Item #ACTB23XLGN 2X-Large / 3X-Large

D Miller AirCore™ Harness w/ QC Leg Straps & Side D-Rings

Miller AirCore™ fall protection harness with (QC) Quick Connect chest and (QC) Quick Connect leg straps and side D-Rings. **\$234.00**

Item #ACQCDMGN Small / Medium
Item #ACQCUGN Large / X-Large
Item #ACQCD23XLGN 2X-Large / 3X-Large

B Miller AirCore™ Harness w/ QC Buckles

Miller AirCore™ fall protection harness with (QC) Quick Connect chest and (QC) Quick Connect leg straps. **\$219.00**

Item #ACQCSMGN Small / Medium
Item #ACQCUGN Large / X-Large
Item #ACQC23XLGN 2X-Large / 3X-Large

E Miller AirCore™ Harness w/ TB Legs, Side D-Rings & Belt

Miller AirCore™ fall protection harness with (QC) Quick Connect chest and (TB) Tongue Buckle leg straps, side D-Rings and removable belt. **\$238.00**

Item #ACTBBDPSMGN Small / Medium
Item #ACTBBDPUGN Large / X-Large
Item #ACTBBDP23XLGN 2X-Large / 3X-Large

C Miller AirCore™ Harness w/ TB Legs & Side D-Rings

Miller AirCore™ fall protection harness with (QC) Quick Connect chest, (TB) Tongue Buckle leg straps and side D-Rings. **\$234.00**

Item #ACTBDISMGN Small / Medium
Item #ACTBDUGN Large / X-Large
Item #ACTBD23XLGN 2X-Large / 3X-Large

F Miller AirCore™ Harness w/ QC Buckles, Side D-Rings & Belt

Miller AirCore™ fall protection harness with (QC) Quick Connect chest and leg straps, side D-Rings and removable belt. **\$238.00**

Item #ACQCBDPISMGN Small / Medium
Item #ACQCBDPUGN Large / X-Large
Item #ACQCBDP23XLGN 2X-Large / 3X-Large

DuraFlex® Stretchable Harness w/ D-Rings

Miller stretchable duraflex harness with tongue buckles. DuraFlex® Harnesses conform to the shape of the worker, stretching with every movement, so there is no bunching, binding or kinking. With comfort unsurpassed, DuraFlex Harnesses offer wider end-user acceptance, and, a comfortable harness is worn properly, enhancing compliance and safety on the jobsite. Because DuraFlex® Harnesses are stretchable, the worker has greater mobility with less fatigue. All Miller premium harnesses are rated to 400 lbs (181.4kg) capacity. Self-contained label pack encapsulates labels minimizing damage and loss. Integrated and oversized pull-free lanyard rings. Specially-formulated elastomer webbing that stretches to provide greater comfort, improved safety and increased productivity. Soft and flexible D-ring back pad further enhances comfort.

MILLER
by Honeywell



Item #E650-4

\$136.50

DuraFlex® Full Body Stretchable Harness

Miller DuraFlex® full body harness - fully adjustable. Increase productivity and compliance with harnesses that fit comfortably. DuraFlex® harnesses are constructed of a blend of nylon, polyester and a specially formulated elastomer that stretches for a continually conforming fit with no bunching, binding or kinking. DuraFlex® harnesses increase mobility, decrease fatigue and are more likely to be worn correctly, increasing worker safety. Patterned upper webbing and solid leg straps make orienting and donning the harness easier. Webbing protected with non-stick coating for longer performance life. Unlike natural rubber, the elastomer resists wear from the sun, heat and moisture. All harnesses meet ANSI and OSHA requirements. Rated 400 lbs Back D-ring. Friction buckle shoulder straps. Mating buckle leg and chest straps.

MILLER
by Honeywell



Item #E850

\$127.50

FALLTECH®

Class 2 Hi-Viz Vest Harness w/ 3 D-Rings

Durable mesh fabric provides breathability and comfort. Internal donning cloak enjoin harness and vest. Vest-cut design provides improved access to user's belt and pants pockets. Features include 3 D-Rings, back and side, tongue buckle legs and mating buckle chest, Class 2 vest, lime. Zippered side vents for easy access to side D-Rings. Full-sized front and rear pockets on vest. Non-belted with one lanyard keeper. ANSI compliant DOT Class 2 reflective vest. High-visibility lime color.



Item #7018SMMD

Small / Medium

\$189.50

Item #7018LGXL

Large / X-Large

\$189.50

Item #7018XXLXXXL

2X-Large / 3X-Large

\$189.50

Delta™ Arc Flash Harness and Lanyard Kit, 6'

Delta™ harnesses combine a set of "industry-first" advancements, with popular features making them the workhorse of the industry. They feature coated, corrosion-resistant hardware, water-repellent and abrasion-resistant webbing and a build quality that is second to none. The Delta™ pad also incorporates a web spreading design, positioning webbing wider apart on shoulder straps to eliminate abrasion on your neck. Kit includes 1110752 arc flash nylon harness with web loop and 1240861 arc flash 6 ft. shock absorbing lanyard, carrying bag (size large). Meets ASTM F887-11 standards.

**DBI
SALA**



Item #1150054

\$239.30

ExoFit NEX™ Construction Harness

ExoFit NEX™ construction style harness with locking quick connect buckles, side and back D-Rings, sewn-in hip pad and removable body belt. With first-of-its-kind features and benefits, the ExoFit NEX™ provides the highest level of safety and the utmost comfort with technologically advanced hardware, soft yet extremely durable anti-absorbent webbing, strategically placed padding, Repel™ technology web, molded lanyard keepers, protective shoulder caps, Revolver™ torso vertical adjusters. Includes a reflective material throughout the harness that increases worker safety in low visibility environments, built in carrying pocket sized for a cell phone, i-Safe enabled, and integrated suspension trauma straps for post fall-arrest comfort. Max Capacity 420 lbs Harness Weight 3.6 lbs Meets or exceeds all applicable industry standards including OSHA and ANSI.

**DBI
SALA**



Item #1113121 Small

\$330.00

Item #1113124 Medium

\$330.00

Item #1113127 Large

\$330.00

Delta™ Vest Style Harness

Delta No-Tangle™ design for added comfort and easy donning. Spring loaded stand-up back D-Ring ensures fast, easy, and safe connections. Adjustable non-slip parachute buckle chest strap with easy to use revolver torso strap adjusters and lanyard keepers. Parachute mating buckles on lower shoulder and leg straps for quick, easy adjustments. Polyester webbing construction for added durability. Plated hardware for corrosion resistance. Universal sized. Meets or exceeds all applicable industry standards including OSHA, ANSI.

**DBI
SALA**



Item #L2001

\$84.75

Pass-thru buckle leg straps

Item #1102000

\$99.00

Tongue buckle leg straps



3M

Premium Full Body Harness w/ Attached PRD

3M™ Elavation™ full body harness with attached Latchways Personal Rescue Device™ (PRD™). A premium fall protection harness that may help to simplify rescue and reduce rescue time. The harness features a quick connect chest buckle, leg connection, with D-Ring. The lightweight unobtrusive rescue device is contained in a small “backpack” that integrates rescue capabilities into your personal fall arrest equipment. In the event of a fall arrest, activation may be achieved by simply pulling the release cord, allowing the Latchways PRD™ to gently lower the user to the ground, unassisted, in a controlled descent speed. The PRD™ device can easily be activated by another if unable to self rescue. Features 65 feet of rope, which is released at a controlled rate through an integrated braking mechanism.

Item #PRD7510QSM/MD	Small / Medium	\$1538.00
Item #PRD7510QL/XL	Large / X-Large	\$1538.00
Item #PRD7510QXXL	2X-Large	\$1538.00
Item #PRDRESCPOLE	PRD Rescue Pole	\$323.75

Advantage™ 4430 Series Quick Attach Full Body Harness

Sellstrom® Advantage™ 4430 series quick attach full body harness. Features a 1.75” chemical resistant polyester webbing with 5 woven-in 3M™ reflective tracers. This makes it easy to be seen in low light or when there is a need to be seen. Safe-T-Fold® stress indicator alerts the user when harness has been stressed. Harness adjusts at chest, legs and shoulders for a comfortable fit.

Item #4431PC2HV	\$90.90
With Friction Leg Straps	
Item #4431PT2HVR	\$118.00
With Tongue Buckles Leg Straps	



#4431PT2HVR



#4431PC2HV



sellstrom®
Product that works.

FALLTECH® Journeyman Rescue Retrieval Harness

Rescue Retrieval Harness with D-Rings on shoulders and one on back. Journeyman universal fit harness features heavy duty webbing throughout torso and legs, 5-point adjustability with mating buckle, chest and tongue buckle legs. Contains 2 shoulder D-Rings and 1 back D-Ring.

Item #7027P \$119.50



FALLTECH® Web D-Ring Extender, 16”

FallTech D-ring extender allows snap hook attachment to the dorsal D-ring on the full body harness, which reduces the user's reach needed for connection of the energy absorbing lanyard or self-retracting device.

Item #736616 \$33.75



Class 2 Heavy-Duty Two-Tone Vest

RADIANS

Features heavy duty #5 front zipper, reinforced webbing and rear D-ring pass through for fall protection. Has a 2” glass bead reflective tape, 1” contrasting trim and reflective edging. 6 pockets with Dual mic tabs. Grommets at neck for tool keepers/lanyards. Made of ANSI rated mesh front and back with solid material pockets.



Item #SV6HG(size) LG-XL \$22.50
Available at additional cost: 2XL, 3XL

Float Tux PFD Full Body Harness w/C02 Cartridge

Class 2 safety vest harness features reflective webbing, side and dorsal D-rings, and pass through buckles. A clear window for easy inspection of the PFD (personal flotation device) indicator, the Float Tux Harness is ideal for use in construction applications near water. The Float Tux inflates automatically when submerged in water, and can also be inflated manually by pulling its rip-chord. Float Tux Harnesses are suitable for Personal Fall Arrest, Restraint, Work Positioning, and Rescue/Confined Space applications.

For all applications: worker weight capacity range (including all clothing, tools, and equipment) is 130-310 lbs, or up to 420 lbs if used in combination with equipment explicitly certified for such use. Compliant with OSHA 1910, OSHA 1926 subpart, OSHA 1915, ANSI Z359.1-2007, and ANSI A10.32-2012 regulations. Personal Flotation Device (PFD) is USCG Type 2 and Type V approved. High-visibility orange vest.

Item #02810	Medium	\$498.00
Item #02820	Large	\$498.00
Item #02830	X-Large	\$498.00
Item #02840G	2X-Large	\$515.00




GUARDIAN
FALL PROTECTION
PERFORMANCE SAFETY GEAR



Tie Back Wrap Tech Lanyard

Heavy-duty single leg construction of 1" internal webbing with outer tubular jacket designed specifically for tie-back. Tear-away absorber design limits fall forces up to 900 lbs Exclusive ViewPack™ design combines integral protection of labels and view-window for inspection of internal energy. Twist-lock captive-eye carabiners with 5000 lbs gate strength for tie-back onto leg without the use of D-rings. Forged steel snap hooks with 3600 lbs gate strength.

Item #DV8241 \$66.50
Item #DV8241Y \$98.75
 (w/100% Tie-Off)

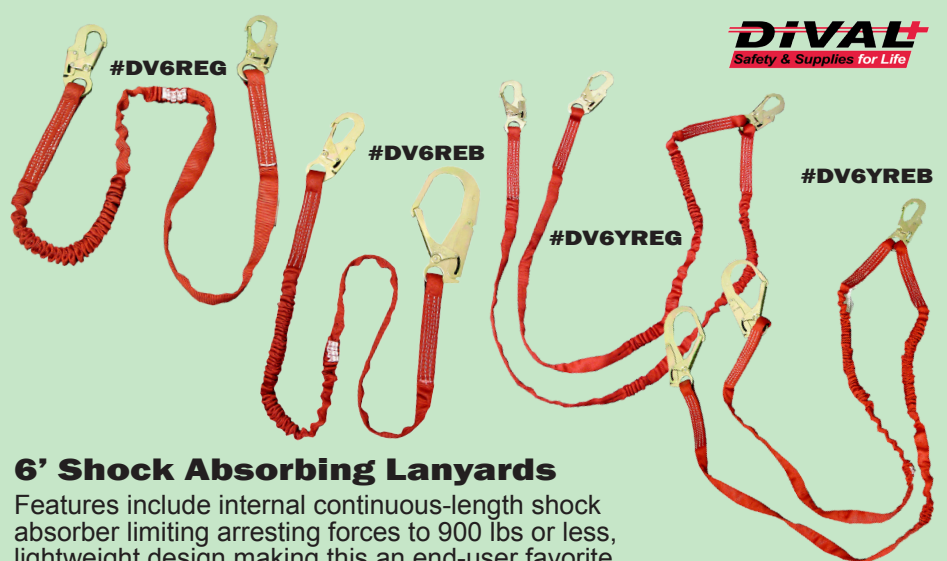

6' Shock Absorbing Lanyards

Features include internal continuous-length shock absorber limiting arresting forces to 900 lbs or less, lightweight design making this an end-user favorite, 1-1/4" tubular webbing which has a tensile strength of 6,000 lbs and meets or exceeds the requirements of OSHA 1926 and ANSI Z359. Red.

DiVal 6' Shock Absorbing Lanyard with Internal Shock Pack

Item #DV6REG	Snap Hook	\$39.75
Item #DV6REB	Rebar Hook	\$42.75
Item #DV6YREG	Snap Hook w/ 100% Tie-Off Y-line	\$59.75
Item #DV6YREB	Rebar Hook w/ 100% Tie-Off Y-line	\$69.75

EZ Stop® II Tie-Back Shock Absorbing Lanyard

Tieback lanyards are available with standard snap hooks, aluminum rebar hooks, flat steel rebar hooks, and carabiner ends. Large flat steel rebar hook with tieback connection provides greater versatility in the field. Floating d-rings adjust to anchor around various structures on a job site. Abrasion resistant tubular webbing covers a 9,800 lbs polyester web for ultimate durability. Available in single and double leg models for 100% tie-off. Meets all applicable industry standards including OSHA and ANSI Z359.

A Item #1241106	Single Leg	1 D-Ring	2 Snap Hooks	\$109.60
B Item #1241124	Single Leg	1 D-Ring	Snap & Alum. Rebar Hooks	\$153.00
C Item #1241125	Single Leg	1 D-Ring	Snap & Steel Rebar Hooks	\$136.75
D Item #1241206	Double Leg	2 D-Ring	2 Snap Hooks	\$159.00
E Item #1241219	Double Leg	2 D-Ring	Snap & Alum. Rebar Hooks	\$199.50
F Item #1241220	Double Leg	2 D-Ring	Snap & Steel Rebar Hooks	\$230.00



FORCE2™ Shock Absorbing Lanyard

Ideal when there is no overhead anchorage and your only option is to tie-off at your feet. It can be used for up to a 12' (3.7 m) free fall and limits the average forces below 1,800 lbs (8kN). It can also be used as a standard lanyard up to a 6' free fall for workers that require a capacity of 311 lbs to 420 lbs (141 kg to 190 kg).

Item #L3300DP4 4' Length \$101.50
Item #L3300DP6 6' Length \$104.35





Manyard Shock Absorbing Lanyard

With 20 years of design refinement, the "original" Manyard Shock-Absorbing Lanyards are unsurpassed in the market for safety, comfort and mobility. Specially-woven shock-absorbing inner core smoothly expands up to 42" (1.1m) to reduce fall arrest forces. Heavy-duty tubular outer jacket serves as a back-up lanyard. Unique warning flag provides visual proof that a lanyard has been involved in a fall and must be removed from service. Max Working Load: 310 lbs -140.62 kg. OSHA 1926.502, 1910.66; ANSI A10.32; and CSA Z259.2.2 Type 1.

Item #216WLS4	4' Length	2 Snap Hooks	\$69.75
Item #216WLS6	6' Length	2 Snap Hooks	\$71.00
Item #219WRS6	6' Length	1 Snap & 1 Rebar Hook	\$98.75



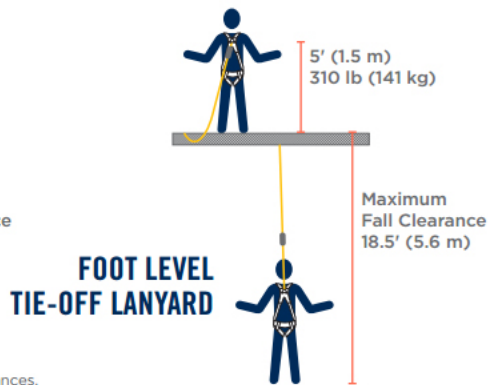

Always refer to user manual for fall clearances.



NANO-LOK™ EDGE Self-Retracting Lifeline

Specifically designed for foot level tie-off and sharp **Edge** applications. Ergonomically designed for comfort. Integrated, backpack-style energy absorber and connector work together to limit forces on both the worker and the impacted edge. Backpack design stays tight to the harness and evenly disperses the unit's weight. Easy-to-install connector providing 360 degrees of rotation. The direct-to-harness connection provides seamless integration of the energy absorber and leaves the D-Ring open for rescue or other equipment. Tough and flexible galvanized 8' x 3/16" cable lifeline provides maximum range of motion, durability and cut resistance. Lightweight, impact-resistant thermoplastic housing provides maximum durability. Bright orange color provides great visibility for workers on the jobsite. Meets all applicable ANSI and OSHA standards.

COMPARE FOR YOURSELF

	NANO-LOK™ edge	Foot Level Tie-Off Lanyard	Other Personal SRL	Other Traditional Lanyards
Foot level tie-off	✓	✓	✗	✗
Sharp edge	✓	✗	✗	✗
Retractable lifeline	✓	✗	✓	✗
Clearance Foot level tie-off, 310 lb (141 kg) worker and gear	16 ft (4.9 m)	18.5 ft (5.6 m)	✗ Not designed for foot level tie-off apps	✗ Not designed for foot level tie-off apps
Max. average arresting force Foot level tie-off, 310 lb (141 kg) worker and gear	900 lb (4 kN)	1350 lb (6 kN)	✗ Exceeds 1800 lb (8 kN)	✗ Exceeds 1800 lb (8 kN)
Working length	8 ft (2.4 m)	6 ft (1.8 m)	Various	6 ft (1.8 m)

Nano-Lok™ Edge Single Cable Unit

Item #3500213	Tie-Back, 9', Wrapbox	\$285.00
Item #3500216	Alum. Rebar Lock Hook	\$290.00
Item #3500212	Steel Rebar Lock Hook	\$285.00
Item #3500247	Alum. Rebar Hook	\$266.00
Item #3500248	Steel Rebar Hook	\$285.00
Item #3500210	Steel Snap Hook	\$270.00
Item #3500211	Steel Swivel Snap Hook	\$280.00
Item #3500214	Alum. Captive Carabiner	\$280.00
Item #3500215	Alum. Snap Hook	\$285.00

Nano-Lok™ Edge 100% Tie-Off Unit

Item #3500228	Tie-Back, 9', Wrapbox	\$495.00
Item #3500231	Alum. Rebar Lock Hook	\$505.00
Item #3500227	Steel Rebar Lock Hook	\$495.00
Item #3500249	Alum. Rebar Hook	\$455.00
Item #3500246	Steel Rebar Hook	\$495.00
Item #3500225	Steel Snap Hook	\$465.00
Item #3500226	Steel Swivel Snap Hook	\$485.00
Item #3500229	Alum. Captive Carabiner	\$485.00
Item #3500230	Alum. Snap Hook	\$495.00

DuraTech® 6' Self-Retracting Device

The quick stopping power of the DuraTech® 6' provides protection for lower clearances, and the shorter fall distance reduces arrest forces compared to traditional lanyards. Designed for comfort and all day wear, the lightweight DuraTech® 6' is tailored for a wide array of job sites – delivering a safety solution that yields maximum durability, versatility and productivity. Features a glass-reinforced polycarbonate housing, which is more durable than typical plastic housings, and multiple connector choices to meet workplace demands. Impact-resistant over molded side-walls. Abrasion-resistant webbing outlasts the competition. Meets OSHA and ANSI Z359.14-2012 standards.



#82706TB3

Item #	Legs	Housing Swivel Eye Connectors	Leg End Connectors	
82706SA1	1	None; Swivel-Eye Only	Steel Snap Hook	\$113.05
82706SA2	1	None; Swivel-Eye Only	Steel Swivel Snap Hook	\$130.15
82706SA3	1	None; Swivel-Eye Only	Steel Rebar Hook	\$152.00
82706SB1	1	Steel Carabiner w/ Pin	Steel Snap Hook	\$149.15
82706SB2	1	Steel Carabiner w/ Pin	Steel Swivel Snap Hook	\$166.25
82706SB3	1	Steel Carabiner w/ Pin	Steel Rebar Hook	\$188.10
82706TB1	2	Carabiner w/ Align. Clip	Steel Snap Hook	\$283.10
82706TB2	2	Carabiner w/ Align. Clip	Steel Swivel Snap Hook	\$315.40
82706TB3	2	Carabiner w/ Align. Clip	Steel Rebar Hook	\$360.05

Sealed-Blok™ SRL w/ Swivel Snap Hook & Anchorage Carabiner

All dynamic components including the motor spring and brake system are sealed inside the housing, isolated from foreign elements. Cast aluminum housing and heavy gauge steel end-plates resist damage and provide corrosion resistance. Built-in carrying handle makes transport and anchoring safe and easy. Maintains consistent lifeline retraction, proper fall arrest distances and forces. Anti-ratcheting brake stops falls within inches and limits arresting forces. Features: Environmentally sealed dynamic components. Extremely durable construction. Anti-ratcheting locking system. Built-in carrying handle. Swiveling snap hook with impact indicator. Large pivoting anchorage loop. Saflok™ anchorage carabiner. Reserve lifeline system. Ergonomic cable handle equipped with i-Safe™. 420 lbs capacity.

**** Note 50', 85' and 130' Sealed-Blok™ SRL's come with 4' Cable Tie-Off Adaptor**

Stainless Steel Cable

Item #3400827	15'	\$1007.90
Item #3400802	30'	\$1303.15
Item #3400902	50'	\$1844.40
Item #3400862	85'	\$2579.50
Item #3400967	130'	\$3583.55

Galvanized Steel Cable


Item #3400825	15'	\$936.10
Item #3400800	30'	\$1,180.00
Item #3400900	50'	\$1630.95
Item #3400860	85'	\$2277.05
Item #3400965	130'	\$3134.65



Workman® Twin Leg Personal Fall Limiter

The Workman® Twin Leg Personal Fall Limiter increases worker productivity by providing greater mobility and continuous connection (100% tie-off) while moving from one location to another. Features the patent-pending ARCA™ Harness Connection. The innovative ARCA Harness Connection makes the Workman Personal Fall Limiter easier to use than any product on the market. Simply insert D-ring into the slot and you're ready to work. This intuitive design offers several important safety features. Features include: Dual-locking cams offer redundancy of connection - only a single cam is required to maintain connection. Locking cams move in opposite directions to prevent accidental disengagement. Locking cam guards help to prevent unintentional contact with cam. High-strength cam design - only one cam is needed to maintain secure attachment. Compact, lightweight design to increase user acceptance. Impact-absorbing protective bumpers for durability. Robust thermoplastic housing for increased service life. 6' working length to achieve required mobility. 400 lbs capacity to reduce complexity of product selection. Fall arrest distance to less than 42" to allow for use in low-clearance applications. Fall arrest forces limited to less than 900 lbs to reduce impact on users. Arresting force: 900 lbs for workers 310 lbs and under. 1800 lbs for workers 311-400 lbs. ANSI and CSA compliant.

Item #10118937	With 2.50" Snaphook (36CL), 6'	\$336.90
Item #10120050	With 2.44" Aluminum Snaphook (AL36CL), 6'	\$346.55
Item #10120052	With 0.83" Snaphook (36C) 6'	\$294.20
Item #10125271	With 1.00" Swivel Snaphook (FP5K) 6' w/ Tie Back	\$388.65
Item #10125272	With 1.00" Swivel Snaphook (FP5K) 7.5' w/ Tie Back	\$388.65

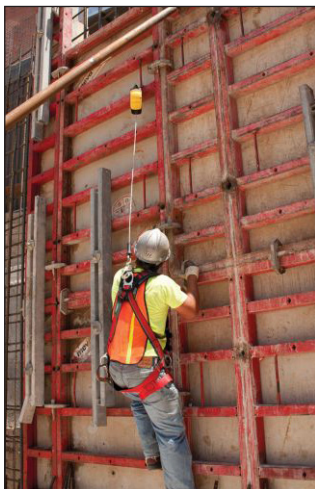

Workman® Self-Retracting Lanyard w/ Swivel Snaphook & Load Indication

With lightweight design, durable thermoplastic housing and impact-absorbing bumpers, the Workman SRL is not only well accepted by users, but also provides years of dependable service. 400 lbs working capacity for increased versatility. Integral, ergonomic carrying handle for easier transport and installation. 3/4" Swivel snaphook with load indicator at lifeline end greatly limits twisting of cable; also alerts users that Workman SRL has been involved in a fall. Certification to ANSI Z359.14-2012 and CSA Z259.2.2 for compliance. Meets all OSHA requirements.

Item #10119507	30' Galvanized	\$426.20
Item #10120724	30' Stainless Steel	\$452.70
Item #10121834	50' Galvanized	\$554.35
Item #10121778	50' Stainless Steel	\$597.05



Talon™ Quick Connect SRL w/ Snap Hook, 8'

Engineered for reliable protection that locks when it should; won't lock when it shouldn't. The extremely lightweight design (just under 3 lbs!) and quick-connect system gives you freedom of movement without compromising safety. 310 lbs capacity and swivel hook web lifeline end. Due to the small size and light weight, Talon™ can be connected directly to the back of a harness for added mobility. 8' of 1" nylon webbing. All metal braking system for durability. Self-locking swivel snap hook with impact indicator. Designed for smooth consistent operation. Meets or exceeds all applicable industry standards including OSHA, ANSI and the stringent ANSI Z359.

Item #3101001 \$265.00



Rebel™ SRL w/ Carabiner & Snap Hook

The industry's lightest and most compact SRL. Aluminum housing construction, weighing less than 6 lbs. Best lifeline length-to-weight ratio in the industry. Unique super strength thin webbing for total security and added length in a compact SRL. Unique speed sensing brake reduces clearance requirements and limits average arresting forces to 900 lbs. Double locking snap hook on lifeline, 3/4" opening carabiner on housing. Meets or exceeds all applicable industry standards including OSHA, ANSI and the stringent ANSI Z359.

Item #AD111A 11' \$149.75
Item #AD120A 20' \$355.00



Talon™ Tie Back SRL, Single Leg, 9-1/2'

The Tie-Back Talon's design eliminates the need for an anchorage connector like a tie-off adapter, fixed beam anchor or D-ring plate. With the use of the 5,000 lbs gated snap hooks designed for tie-back use and three layers of abrasion resistant webbing, the end of the lifeline can be wrapped around anchorages and tie-back into itself. This eliminates the need for a separate anchor connector. Three layers of webbing in the tie-back area of the lifeline provide more abrasion resistance for added safety. 4 lbs.

Item #3101300 \$255.00



TurboLite™ w/ Twist Lock Carabiner, 6'

Miller TurboLite Personal Fall Limiter (PFL) with steel twist-lock carabiner for anchor point attachment. An alternative to shock absorbent lanyards. Features include 6' of working capacity, engineered webbing for greater abrasion resistance, and a built in swivel that prevents the lifeline from twisting. Extremely compact and lightweight. Rated for up to 400 lbs. Meets all applicable OSHA, ANSI and CSA standards.

Item #MFL1/6FT With Snap Hook \$155.00
Item #MFL2/6FT With Rebar Hook \$189.60



by Honeywell



TwinTurbo™ SRL w/ Locking Rebar, 6'

Miller Twin Turbo D-Ring connector provides 100% tie-off when working with a low fall clearance. New patent-pending Miller Twin Turbo D-Ring Connector easily adapts two (2) lightweight Miller TurboLite Personal Fall Limiters (PFLs) for continuous 100% tie-off fall protection. Replacement for double-legged shock-absorbing lanyards. Innovative design that easily connects to the back D-ring of any fall protection harness which increases worker productivity and versatility with freedom of movement and less restrictive than other units on the market. Permits TurboLite PFLs to swivel in multiple directions for greater mobility; the swivel action prevents webbing from twisting and binding inside of the unit. Webbing payout smoothly extends/retracts without interruption. Easy-to-use and assemble/disassemble. Meets all applicable OSHA, ANSI and CSA requirements.

Item #MFLB3/6FT With Locking Snap Hooks \$341.00
Item #MFLB4/6FT With Aluminum Rebar Snap Hooks \$385.00



by Honeywell



Nano-Lok™ Self Retracting Lifelines

Replace your lanyard to reduce fall distance and improve your safety program with the Nano-Lok™ Self Retracting Lifeline. Nano-Lok™ is ergonomically designed for ease-of-use and is ideal for direct connection to most harnesses. The unique twin-leg SRL quick connector design leaves the dorsal D-ring available for other uses and provides a snug fit which is virtually unnoticeable on your back. 420 lbs capacity. Weighs under 3 lbs and has a built in shock absorber with impact indicator.

Item #	Anchorage	Hook	
3101215	Steel Carabiner	Steel Snap	\$146.50
3101227	Quick Connector	Alum. Rebar	\$185.00
3101228	Quick Connector	Steel Snap	\$155.00
3101229	Steel Carabiner	Steel Rebar	\$189.00



Nano-Lok™ Twin Leg SRL w/ Quick Connector

Ergonomically designed for ease-of-use and is ideal for direct connection to most harnesses. The unique quick connector design leaves the dorsal D-ring available for other uses and provides a snug fit. Virtually unnoticeable on your back. Extremely compact and lightweight. Features an impact resistant housing with automatic quick activating arrestor. Six foot retractable lifeline provides continuous fall protection without restrictions. 420 pound weight capacity. Weighs under 6 lbs!

Item #	Hook Style	
3101276	2 Alum. Snap Hooks	\$325.00
3101277	2 Alum. Rebar Hooks	\$567.50






Fall Protection Self Retracting Lifeline Block Repairs



We Service:

- (SRL) Self Retracting Lifeline Blocks
- Knowledgeable and Trained Staff to Inspect, Repair, Reassemble and Certify SRLs
- Fix and Repair Lifelines and Blocks
- Factory Trained & Certified Technicians
- Full Complement of Repair Parts
- Service All Blocks
- **Quick Turnaround!**

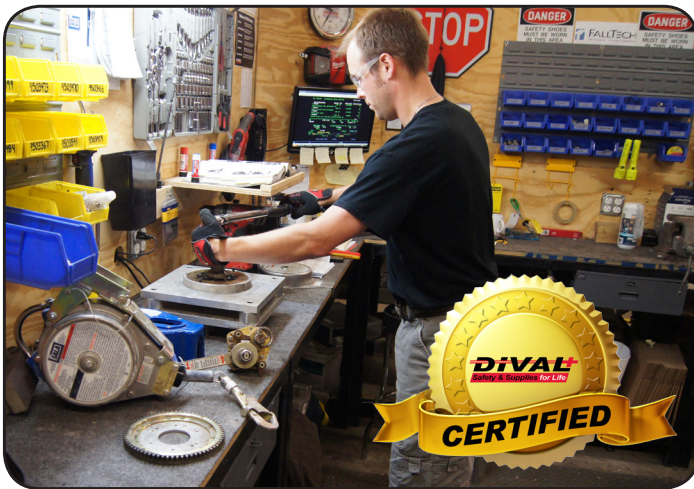

Fall Protection Safety Training

According to OSHA 1926.503(a)(1), "The employer shall provide a training program for each employee who might be exposed to fall hazards. The program shall enable each employee to recognize the hazards of falling and shall train each employee in the procedures to be followed in order to minimize these hazards." Workers need fall protection when accessing unprotected areas at a height of six feet or more. Frequency of this training is initially, and "When the employer has reason to believe that any affected employee who has already been trained does not have the understanding and skill required" (1926.503(c)). Job descriptions include, but are not limited to construction trades, mechanical and electrical maintenance employees; painters; utility company employees, steel workers and iron workers.

Our training gives your employees the knowledge needed to identify when fall protection is needed and how to choose, wear and maintain proper fall protection equipment. Training will cover the regulatory requirements and safe work practices to help prevent accidents and injuries.

For Facility or Site Supervisors, we also offer the two-day intermediate level course for those who must also serve as the "Competent Person" required by OSHA 1926.32(f), 1926.500 and 1910 standards.

From required training to Fall Protection Policy and Program writing, give our Compliance Specialists a call to satisfy all of your needs.

- | | |
|-----------------------|---|
| Item #ST014 | Fall Protection Safety Training - "Worker" (1 hour) |
| Item #ST014-CP | Fall Protection - Competent Person (2 day) |
| Item #TRPART | Policy/Program Writing |

**Call For
Pricing**



DuraTech® Galvanized SRL w/ Snap Hook, 60' FALLTECH®

Galvanized steel cable and CNC machined aluminum housing and drum. The internal brake is constructed with a hard-wearing bronze ratchet center and pawls with an alloy steel pressure plate. Also features a load-indicating snap hook for attachment to the back D-Ring of your full body harness. 3/16" Galvanized steel cable has a tensile strength of 4,000 lbs. Aluminum housing and drum are durable, lightweight and resistant to corrosion. Housing features built-in carry handle. High-strength aluminum-alloy main shaft for lighter weight. Spring and ball buffer assembly prevents lock-up from free-wheeling. Includes free tag line to prevent free-wheeling. DiVal is an authorized service center. Reduces arrest forces to less than 900 lbs. Weighs only 30 lbs. Meets the requirements of OSHA 1926 and ANSI Z359.



Item #7265 \$685.00

Rebel™ Leading Edge SRL w/ Shock Absorber, 20ft

Designed for leading edge applications. Allows users to tie-off at foot level and was put through extensive sharp edge testing to ensure absolute protection against sharp, abrasive and leading edges. A robust design with a heavy-duty thermoplastic housing ensures longevity. Rebel™ is designed with the worker in mind, featuring a stackable space-maximizing design and an impact indicator to provide easy verification of whether the equipment has been involved in a fall. An SRL's lifeline will extend as the user moves away, and retract automatically enabling the user to move about within a recommended working area at normal speeds. Should a fall occur, a speed sensing brake system will activate stopping the fall and reducing the forces imposed on the user to safe levels. Stackable housing design. Built-in carrying handle. 20 ft. (6.1m) 7/32" (5.5mm) galvanized steel cable lifeline. Internal and external energy absorption systems. Swiveling self-locking snap hook with impact indicator. Reserve lifeline system. Swiveling anchorage point. Side lifeline exit with ergonomic handle. High strength, corrosion resistant components. Self-locking anchorage carabiner.



Item #3590540 \$477.60

MightyLite™ Leading Edge SRL

Miller® MightyLite™ Leading Edge self retracting lifeline. Features a durable, corrosion-resistant stainless steel and aluminum construction with 3/16" galvanized wire rope lifeline, integrated leading edge shock-absorbing pack, carabiner and tagline. Quick, easy installation with a dual swivel design to minimize lifeline twisting during use. Dual capacity rated for up to 310 lbs when working in leading edge applications and up to 400 lbs when mounted overhead. Meets and or exceeds OSHA, ANSI, Class B Leading Edge requirements for fall protection.



by Honeywell



Item #RL20G7LE20FT	20'	\$785.00
Item #RLS30GLE30FT	30'	\$990.00
Item #RL50G7LE50FT	50'	\$1605.55
Item #RL65G7LE65T	65'	\$1385.00

Ultra-Lok™ SRL w/ Swivel Snap Hook & Shock Absorber

Designed for leading edge applications. Ultra-Lok™ self retracting lifelines (SRL's) are rugged, yet extremely lightweight and superbly engineered devices you can count on for safety, efficiency and comfort. Stainless steel components, an anti-ratcheting twin disk brake system and a semi-sealed design provide the user with a system built to last. Our SRLs are backed by decades of proven field service for absolute confidence, safety and reliability. An SRL's lifeline will extend as the user moves away, and retract automatically enabling the user to move about within a recommended working area at normal speeds. Should a fall occur, a speed sensing brake system will activate stopping the fall and reducing the forces imposed on the user to safe levels. Galvanized steel cable lifeline. Internal and external energy absorption systems. Constant moving brake system pawls. Swiveling anchorage point. Swiveling snap hook with impact indicator. Reserve lifeline system. Ergonomic cable handle equipped with i-Safe™.



Item #3504422	15'	\$841.30
Item #3504500	30'	\$965.00
Item #3504600	55'	\$1339.05



FALLTECH® Falltech Permanent Roof Anchor, Alloy Steel D-Rings

FallTech's Double D-ring permanent roof anchor installs under ridge cap roofing materials. Made from quality materials, the 17" stainless steel strap and alloy steel d-rings provide secure anchorage on roof peaks of 1/12 or greater.

Item #7431 \$21.75



Dyna-Lock Leading Edge SRL, 20'

MSA SRL, nylon, dyna-lock with 3-1/2' shock absorber, 20' can be used as a standard SRL or in leading edge applications where the edge is at least 1/4" thick cold or hot rolled steel. Three independent locking mechanisms provide proven dependability in corrosive or freezing environments. Sure-Stop shock absorber limits arresting forces to 900 lbs or less.



Item #10095644 \$515.00

Contractor SRL Galvanized Cable w/ Carabiner

FallTech Contractor SRL, Galvanized Cable with 1 Connecting Carabiner and 1 Load-indicating Swivel Carabiner. FallTech's Contractor Series Cable SRLs feature an independent alloy steel frame for superior strength and durability with an aluminum drum center and glass-filled Nylon housing to reduce the weight of this rugged device. The high-performance inertial brake utilizes an over-sized brake pad for unmatched performance. This work-horse manages arresting forces and deceleration distances at a fraction of the cost of most SRL's. Rugged construction for superior wear and performance. Load-indicating swivel carabiner clearly shows when a fall event has occurred indicating the device should be removed from service.

 **FALLTECH**



Item #727620	20'	\$325.00
Item #727630	30'	\$370.00
Item #727650	50'	\$499.00

Cable Self-Retracting Lanyard

Titan self-retracting lifelines (SRL's) can be used for a full-range of applications including construction and general maintenance. Constructed of durable, impact-resistant housings with steel frames, Titan SRL's are designed to endure the demands of rigorous work environments. Quick activating stainless steel braking system. No annual factory recertification is required, except in Canada. Lanyard end locking snap hook with swivel and connecting carabiner is included. All cable is 3/16" galvanized wire rope. Meets OSHA 1926.502.

MILLER

by Honeywell



Item #TR20/20FT	20'	\$410.00
Item #TR30/30FT	30'	\$470.00
Item #TR50/50FT	50'	\$665.00
Item #TR65/65FT	65'	\$1090.00

Rebel™ Self Retracting Lifeline Cable

Features include rugged, lightweight thermoplastic housing making it easy use, relocate and built to last. Integrated handle makes transport, set-up, use and storage quick and easy. Stackable housing design allows for stacking of multiple SRL's on top of each other to reduce overall space needed during storage. Swiveling self-locking snap hook with impact indicator automatically locks and closes for added safety, swivels to limit lifeline twisting for ease-of-use and provides visual indication of fall arrest. Speed sensing all metal brake system stops a falling worker within inches, and provides smooth consistent operation allowing the user to maintain normal work pace and not be interrupted with constant lock ups. Specialized internal absorption system maintains safe fall arrest forces for users and tools up to 420 lbs (190 kg). Side lifeline exit with ergonomic handle, swiveling anchorage point, and self-locking anchorage carabiner. Stainless steel and zinc plated steel hardware provides added corrosion resistance and extends the life of the device. Galvanized steel cable lifeline provides added field longevity, the retractable design provides freedom of movement, keeps the lifeline out of the worker's way and reduces dragging, snagging and trip falls. Meets all ANSI and OSHA applicable standards.

Item #3590517	20'	\$345.00
Item #3590500	33'	\$415.00
Item #3590550	50'	\$345.00



PROTECTA

Web Fall Limiter

Overhead Retractor; with 1 Steel Snap Hook; 1 Swivel and 1 Connecting Carabiner. 8' working length for enhanced user mobility. Steel frame with PVC cover and polyester webbing with 5000 lbs tensile strength. Inertial brake system. Max. Capacity: 310 lbs, Max. Freefall: 2'. Meets OSHA standards CFR1926.502, CFR1910.66 and ANSI Z359.14-2012, Class A.

 **FALLTECH**



Item #8262 **\$169.00**

DuraTech® 10' SRD w/ Steel Carabiner & Snap Hook

FallTech's DuraTech® 10' Web Self-Retracting Device (SRD) is a compact, long-lasting SRD that's built to work in the harshest environments and to outlast the competition. Features Average arrest forces under 900 lbs with 44" stopping distance. Internal brake eliminates need for bulky external shock pack. Impact-resistant over molded side-walls. Integral Visual Load Impact indicator. Cycle-tested, high-performance main spring. Lightweight, without sacrificing durability. Specifications: Tensile Strength: Minimum 3000 lbs. Maximum Capacity: 310 lbs. Maximum Deceleration: 28". Maximum Arrest Force: 1800 lbs.

 **FALLTECH**



Item #82710SC1 **\$151.05**

Reload™ SRL w/ Snap Hook & Carabiner

ReLoad™ retractable lanyard. 7' long 3/4" wide web lifeline with snap hook at lanyard end and carabiner. Meets ANSI Z359.1-2007 standards for 3600 lbs connector gates. Constantly moving, the 100% Full Contact™ locking mechanism; cannot freeze, hang or corrode. 310 lbs rated, meets requirements of OSHA 1910.66 and 1926.502, ANSI Z359.14-2012 and CSA Z259.2.2-98.

3M



Item #REW7 **\$166.20**



Carabiners

Carabiners are designed to anchor a fall protection component using only one hand. The gate automatically closes and locks, ensuring a secure hold. Meets ANSI Z359.12 standard. Gate rated 3600 lbs. Available in three sizes: 3/4", 1-3/16" and 2" opening.

Item #SH523	3/4" Opening	\$29.75
Item #KH200SG1	3/4" Screwgate	\$31.00
Item #SH106	1-3/16" Opening	\$33.50
Item #SH108	2" Opening	\$41.05

Pass-Thru Anchor Slings



Designed to provide safe and strong connections to a wide variety of anchor-age points. Features heavy-duty 1-3/4" polyester webbing with rugged forged alloy-steel hardware. 3" wear pad protects primary webbing from cuts and abrasion. 1 regular D-Ring for connection to fall deceleration device and 1 large D-Ring for pass-thru, wrap-around cinching. Can be used repeatedly.



Item #7336	3'	\$26.50
Item #7372	6'	\$34.20
Item #737210	10'	\$49.60
Item #737214	14'	\$59.95



GUARDIAN
FALL PROTECTION
PERFORMANCE SAFETY GEAR

Beamer™ 2000 Sliding Beam Anchor, 3½" - 14"

A versatile fall arrest anchor designed for use both overhead and at foot level. Attachable to both steel I and H beams, the Beamer 2000™ offers nylon bushings to provide smooth movement along the beam, that also function as impact indicators in the event of a fall.

Item #00101 **\$145.60**



Glyder2™ Beam Anchor, 3½" to 14"

Provides complete horizontal mobility, tie-off overhead or at your feet (use w/ Force2™ shock absorbing lanyard when used at foot level for I-Beams up to 1¼" thick). Anchor effortlessly slides across the beam on its wear pads, eliminating metal-to-metal contact. Meets ANSI and OSHA applicable standards.

Item #2104700 **\$169.75**



SteelGrip Dual Ratchet I-Beam Anchor, 4" - 14"

Flange bar made of high quality aluminum alloy and will hold up to 425 lbs. Alloy steel jaws have superior strength and nylon slider pads on jaws provide workers with trailing mobility. Ratcheting design provides easy adjustment with thumb latches. Fits 4" to 14" flange width.

Item #7530FA **\$139.50**



Temporary Wedge Concrete Anchor

Unique engineered solution designed for use in cured, existing concrete structures. It can be installed in minutes with simple tools and relocated as needed. 3/4" anchor is rated at 5000 lbs and is suitable for single users. Economical because it can be used again and again.


Item #7440 **\$103.00**



Portable Concrete Anchor, 3/4" Diameter

Reusable connectors are designed for use in concrete applications. Can be used vertically or overhead/ceiling surface applications. Designed for use in cured concrete with a compression strength of at least 3000 psi. Model number 496 is a 5000 lb anchor for single user with 400 lbs maximum capacity.


Item #496 **\$119.00**



Concrete D-Ring Anchor w/ One Bolt

Compact, reliable connection point for your fall protection system. A simple, versatile and safe concrete anchor solution - for use in temporary or even permanent applications. Installs into 11/16", 18mm or 3/4" holes - only standard drill bits needed.


Item #2104560 **\$81.85**

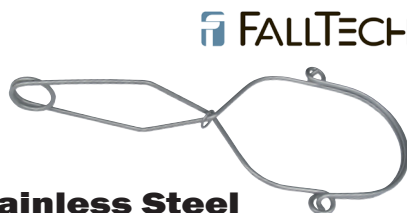

Stainless Steel Wireform Anchor

Stainless Steel with squeeze-open attachment provides simple installation for temporary use. Intended only for overhead applications.

Item #7407 **\$41.50**



10K Mega Swivel Hybrid Anchor Connector

MSA 10K Mega Swivel Hybrid Anchor Connector with D-Ring. Max Capacity: 10,000 lbs. MEGA Swivel technology. Designed for repeated use; durable and 100% retrievable.

Item #10144957 **\$215.00**

5K Drop-Through Anchor



MSA 5K drop-through anchor connector with swivel D-Ring. ¼" steel plate with 8½" cable attached to swiveling D-ring. Drop through opening in any 1¼" - 2" substrate that can support fall protection requirements. For use as a 5000 lbs overhead anchor.



Item #10144960 **\$120.00**

Rope Grab

This DBI-SALA® rope grab automatically follows you, giving you greater freedom of movement and virtually hands-free operation. Using a cam lever as well as a friction sensitive brake to lock the rope grab onto the lifeline in case of a fall, even if the operator holds the device open in a panic situation. Use on 5/8" polyester/polypropylene rope. Use with 3' shock absorbing lanyard. Maximum length lanyard that can be used with rope grabs is 3'. Meets all ANSI and OSHA applicable standards.

Item #LS1441 \$125.00

5/8" Rope Diam.

Item #LS1442 \$149.00

3/4" Rope Diam.



Hinged Self-Tracking Rope Grab w/ 3' Lanyard

Rugged alloy steel rope grab features hinged construction for ease of attachment as well as a positive lock and safety cam for superior safety. Tough alloy steel construction. Threaded lock with positive secondary is secure and easy to operate. 2" eye for excellent connector compatibility and easy handling. For use with 5/8" rope. Unique gravity operated safety cam prevents improper attachment. Meets the requirements of OSHA 1926 and ANSI Z359.

Item #7358 \$106.00



5/8" Rope

Featuring a double locking snap hook at one end this 5/8" 3-strand polyester rope offers superior resistance to abrasion and UV light. Exclusive steel thimble resists wear and extends the life of the line. Meets the requirements of OSHA 1926 and ANSI Z359.

Item #L1364DB25 25' \$46.75

Item #L1364DB30 30' \$58.95

Item #L1364DB50 50' \$72.75

Item #L1364DB100 100' \$104.00

Item #L1364DB150 150' \$151.75

Item #L1364DB200 200' \$188.00



Hinged Self-Tracking Rope Grab, 5/8"

Hinged Self-Tracking rope grab features hinged construction for ease of attachment as well as a positive lock and safety cam for superior safety. Tough alloy steel construction. Threaded lock with positive secondary is secure and easy to operate. 2" eye for excellent connector compatibility and easy handling. For use with 5/8" rope. Unique gravity operated safety cam prevents improper attachment. Meets the requirements of OSHA 1926 and ANSI Z359. Maximum length lanyard that can be used with a rope grab is 3' shock absorbing lanyard.

Item #CLC7479 \$85.75



Flexible Counterweight

DBI-SALA® flexible counterweight. With weighing nothing more than 5 lbs, the counterweight allows for more efficient tension for lifeline operation.

Item #L1583 \$28.75



Universal Suspension Workseat

Cushioned padded seat with breathable mesh lining provides the ultimate in comfort and performance when working in suspension for long periods of time. Easy adjust hardware allows the seat to be adjusted for varying degrees of suspension. Durable polyester rugged construction endures rough use, standing up to long periods of outdoor elements including sun exposure without tearing or fraying for added longevity. Easy positioned of back when not in use, enabling the user to climb unhindered to their required work location. High strength corrosion resistant hardware provides strong, fast and safe connections, plated hardware is extremely corrosion resistant.

Item #1150414 \$189.50



Fixed Beam Anchor

DBI-SALA® fixed beam anchor. Anchor is easily installed horizontally or vertically by sliding the adjustable hook-end down to the flange and securing a pin. Easily adjust to exactly where you want it in any orientation or direction. Fits 1-1/2" thick flange, 2-1/2" - 12" width. 5000 lbs minimum strength in any direction. Meets or exceeds all applicable industry standards including OSHA, ANSI and the stringent ANSI Z359.

Item #2108406 2-1/2" to 12" \$307.00

Item #2108407 2-1/2" to 18" \$361.75

Seat Board Chair w/ Belt, 12" x 24" x 1"

Boatswains Chair - Size: Large (40" - 48" waist). Seat board (12" x 24" x 1") for added support and comfort. Integrated tongue buckle body belt with back D-Ring for added support and versatility. 1-3/4" wide latex treated polyester webbing construction for added durability. Cadmium plated alloy steel hardware for strength and corrosion resistance. Meets or exceeds all applicable industry standards including OSHA and ANSI.

Item #L1204 \$139.75



Perimeter Limiter Leading Edge Anchor, 7 1/2'

DBI-SALA®'s Perimeter Limiter leading edge anchor is ideal for concrete decking construction by providing overhead anchorages for up to 2 users. Freestanding, non-penetrating design allows the anchor to be ready to use once placed on the decking structure. Overhead anchorages for two users reduce the fall distances imposed on the users while minimizing swing falls. Large foam filled trailer tires allow the Perimeter Limiter to be very maneuverable around the decking application, plus they will never go flat! The mast and anchorage arm can rotate around the weighted base giving you ultimate freedom of movement. Accessory holes on the vertical and main horizontal arms for addition of rescue winches or jobsite boxes. Additional weight and taller mast can be added to make the unit extend from 7-1/2' to 9-1/2' in height.



Item #2100090 \$9445.00

Rotating Multi-Use D-Ring Anchor



FallTech® rotating multi-use D-Ring anchor. Designed to offer maximum flexibility, versatility and safety. Provides custom anchorage solutions for concrete and steel applications. Features an anchor bracket with integral D-Ring. Concrete screw anchor. Universal bushing. Designed for installation in concrete, secured with a supplied anchor. Maximum capacity 310 lbs. Meets ANSI Z359.1-2007 standards.

Item #7451A w/ Concrete Screw
Item #7451AC Anchor
Item #7451C w/ Expansion Bolt

\$45.60
\$37.05
\$81.70



Permanent Truss Anchor Kit



Provides a permanent safety solution for workers performing work on building exteriors and roofs. Stainless Steel construction for extended life in all climates. May be installed during and after construction, connector hole 11/16", anchor height: 10-3/4", EPDM flange: 10" x 10", polypropylene protective cap: 6-3/4" with 15" zip-tie. Max capacity 425 lbs.

Item #7429SSK \$46.50



Reusable Hinged Roof Anchor w/ D-Ring

Heavy-Duty alloy steel construction. Hinged design conforms to most roof peaks and can be mounted perfectly flat as well. It is economical because it can be used again and again. Holes are clearly marked for use with either nails or screws. Screw holes are counter-sunk so screws are flush with the anchor.

Item #7410 \$24.50/EA



Single Use Roof Anchor w/ Nails

FallTech® Single use roof anchor with nails. This is a single-use temporary anchor that can be removed or hammered down after use. Users are able to fold/ bend the anchor to fit any roof peak. Includes 10-pack of nails.

Item #744410 3/PK \$55.00/PK



Reusable Hinged Roof Anchor For Wood Roofs

Installs to sloped or flat wood and metal decking roofs. Fast and easy nail or screw installation - Fastener kit included. Hinged design with D-ring. Durable and corrosion resistant construction. Compact and lightweight design. Portable and reusable. Capacity: 310 lbs. Meets OSHA 1910.66 and OSHA 1926.502 standards.

Item #2103676 \$32.10/EA



Universal Roof Top Anchor

Installs to 24 gauge or thicker metal, 5/8" (1.6cm) wood and 3,000 PSI (21 MPa) concrete roofs. Accommodates roof ribs 10"-20" (25.4-50.1cm) apart in 1" (2.5cm) increments. For use on flat or sloped (up to 3:12 pitch) roof decks. Extremely fast and efficient installation. Unique load distributing design protects roof user.

Item #2100133 \$389.55/EA



Snappy Disposable Roof-Anchors, 8/PK

Disposable anchors designed to fit any pitch size roof. This product is easy to install simply by nailing it into the truss, nails included. Meets all applicable standards for fall arrest and the fasteners are provided.

Item #00711 8/PK \$54.75/PK



Knock Down Disposable Roof Anchor

The unique design provides workers with a fall protection anchor during initial construction, and can simply be "knocked-down" and shingled over when the job is complete. Complies with OSHA 1926.502 requirements. Zinc plated steel. Includes 12 anchors and 120 16d nails. Weight capacity: 310 lbs.


Item #2103680 \$71.05/PK



FallTech® Parapet Wall Clamp & Window/Door Opening Anchors

FallTech® Parapet Wall Clamp and Window/Door Opening anchors are used primarily as overhead fall arrest anchorages for connecting vertical lifelines and self-retracting devices, both anchorage connectors install without tools and are lightweight enough to be safely moved as work locations change. Features durable steel and aluminum construction for secure attachment and extended service life; high degree of adjustability for use in a wide variety of work locations multiple anchors can be used in succession to provide workers with potential for 100% tie-off; offer standard D-Ring connection for attaching wide variety of Personal Fall Arrest Systems; OSHA compliant and designed for fall arrest or restraint.

 FALLTECH®

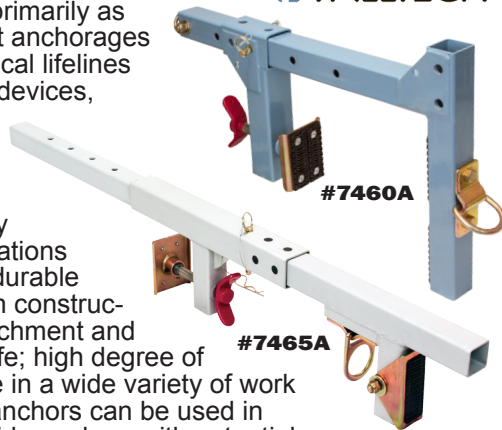

Item #7460A Parapet Wall Clamp, 15" **\$303.05**
Item #7465A Window/Door Anchor, 21"-51" **\$303.05**

Rental Mansafe Freestanding Anchor

Rental MSA ManSafe freestanding constant force post. Does not attach to the working surface and installer will never have to lift more than 55 lbs at a time. Designed for use on nominally flat roofs with a maximum pitch of 5 degrees. Tested and approved for use on concrete, single-ply membrane, asphalt-sanded, asphalt-stone chipped and steel roof profiles. Post is omni-directional and will provide an anchor point when properly installed for one worker. Meets OSHA regulations. 880 lbs unit.

 **DiVal**
 Safety & Supplies for Life



Call For Pricing

Item #REN-046

Heavy Duty Reusable Roof Anchor

Constructed of 1/4" thick steel tips, bendable middle roof anchor comes complete with zinc plated forged alloy steel O-Ring. Just nail (twelve 16D {penny}) or bolt (six 1/4" x 2-1/2" or longer lag screws) into the sheathing and joist, rafter, etc. (roof member). Designed to be removable, it may be used again after an inspection. 5000 lbs minimum breaking strength. Length when flat is 25", weight is 4.4 lbs. Meets or exceeds all applicable industry standards including OSHA, ANSI and the stringent ANSI Z359.

 **DBI SALA**



Item #2103673 **\$77.50/EA**

Reusable Global Heavy Duty Roof Anchor

Universal anchor that gives you the choice of installing the anchor at the peak of the roof, up to a 12/12 pitch or in the field using our hex head screws or duplex nails. You can install through sheathing into the top chord, through sheathing only, or through existing roofing and sheathing. The anchor is supplied with all the necessary fasteners and is used for fall arrest or fall restraint.

 **GUARDIAN**
 FALL PROTECTION
 PERFORMANCE SAFETY GEAR



Item #00485 **\$58.90/EA**

Reusable Halo Heavy-Duty Roof Anchor

The removable and reusable 1/4" thick steel roof anchor is complete with a zinc plated forged alloy steel O-ring. It can be nailed or bolted into the roof member. It's design allows it to be used again after an inspection, and can withstand 5000 lbs minimum breaking strength. The anchor is supplied with all necessary fasteners. Used for fall arrest or fall restrained is part of the residential horizontal lifeline system.

 **GUARDIAN**
 FALL PROTECTION
 PERFORMANCE SAFETY GEAR



Item #00482 **\$44.50/EA**



Protecta® Compliance Roofers Kit, 50'

Each kit offers a complete set-up including anchorage device, body support and connecting component for convenient compliance and safety on the job. Protecta™ Compliance In Can Roofers Kit features designs that incorporate improved fit, updated colors, and durable yet lightweight construction. Provides greater comfort and added safety which translates to reduced worker fatigue and increased productivity. Meets all ANSI and OSHA applicable standards. Harness holds up to 310 lbs.

- Complete roofer's fall protection system in one handy container
- Reusable durable roof anchor with fasteners
- Lightweight FIRST™ harness with pass-thru buckle legs and 5-point adjustment
- Compact rope adjuster with built-in 2' PRO™ shock absorbing lanyard
- Durable & lightweight 5/8" diameter, 50' blended lifeline with snap hook
- Durable bucket with handle

Item #2199811 **\$159.00**

Confined Space Tripod Kit w/ 60' Winch



Features three steel head plates to provide added strength and durability. Extruded aluminum legs with cast aluminum head and feet provide light weight strength. Slip-resistant foot belting keeps tripod position secure. Also features cable detent pins to secure telescoping leg adjustment and an integral composite pulley within tripod head. LiftTech 60' winch used for confined space entry and retrieval with a Bi-directional brake for user safety and smooth operation. 8:1 mechanical advantage for ease-of-use and includes bracket for mounting to tripod. Compliant with OSHA CFR1926.502, CFR1910.66 and ANSI A10.32-2004, Z359.1-2007 standards.



Item #7505 \$2075.00

Confined Space Tripod Kit w/ 60' 3-Way SRL



FallTech® confined space tripod kit. Kit includes tripod, 3-way self retracting lifeline (SRL) and storage bags. Features three steel head plates to provide added strength and durability. Extruded aluminum legs with cast aluminum head and feet provide light weight strength. Slip-resistant foot belting keeps tripod position secure. Also features cable detent pins to secure telescoping leg adjustment and an integral composite pulley within tripod head. Pulley and bracket are for use with 3-way SRL or confined space winch. Includes three anchor-points on the tripod head for use with additional equipment. Compliant with OSHA CFR1926.502, CFR1910.66 and ANSI A10.32-2004, Z359.1-2007 standards. For use in overhead applications - maximum allowable freefall equals 2 feet.



Item #7501FT \$2725.00

Gravity SureLine™ Horizontal Lifeline w/ Bypass

Offer unique, exclusive bypass shuttles enabling two workers to share a line and pass each other while maintaining 100% tie-off. Easy installation at temporary work sites is suspended between two approved anchor points to provide worker fall protection during horizontal movement. Lightweight system is rated for two people. Incorporates combination clamp/thimble that enables effortless lifeline tensioning. Includes integral shock absorber. Meets OSHA regulations, ANSI 10.32.

Item #10150416 40' Steel Cable with Turnbuckle **\$569.50**
Item #10150418 60' Steel Cable with Turnbuckle **\$594.10**
Item #10150424 60' Black Rope **\$746.10**
Item #10150414 60' Rope with (2) Polyester Anchorage Straps **\$647.40**



Suspension Trauma Safety Strap

DBI-SALA®'s suspension trauma strap allows the worker, who is suspended, to stand up in their harness and to relieve the pressure being applied to the arteries and veins around the top of legs. To attach simply choke the pack around the harness at the hip. After a fall, the packs can be unzipped, deploying the web loop and hook straps together to stand in with your feet. Fits most harnesses, styles and brands. Flame resistant version (#9505712) also available. Reusable.



Item #9501403 Regular Version **\$25.75**
Item #9505712 Flame Resistant **\$39.50**

Miller Relief Step™ Safety Device



The Miller 9099 Relief Step™ is designed to relieve suspension trauma after a fall arrest. OSHA states that suspension trauma can occur within minutes after a fall, while waiting for rescue. The average fall rescue time is 15 minutes. The Relief Step provides support and helps blood circulation until rescue. Small and lightweight, the Relief Step attaches to any brand/style full-body harness.



Item #9099 \$20.85

Ultra-Lok™ Leading Edge SRL

Designed for leading edge applications. Rugged and extremely lightweight thermoplastic housing. Semi-sealed design. Galvanized steel cable lifeline. Stainless steel dynamic components. Internal and external energy absorption systems. Anti-ratcheting twin disk brake system. Constant moving brake system pawls. Swiveling anchorage point.



Item #3504422 15' **\$841.30**
Item #3504500 30' **\$965.00**
Item #3504600 55' **\$1339.05**

Dyna-Lock Leading Edge SRL, 20'

MSA SRL, nylon, dyna-lock w/ 3-1/2' shock absorber, 20' can be used as a standard SRL or in leading edge applications where the edge is at least 1/4" thick cold or hot rolled steel. Three independent locking mechanisms provide proven dependability in corrosive or freezing environments. Sure-Stop shock absorber limits arresting forces to 900 lbs or less.



Item #10095644 \$515.00

Rental Adjustable Workman Tripod

Rental MSA 8' Tripod with (10011744) 3-way SRL 50' Lynx Rescuer. 50' Lynx Rescuer includes stainless steel cable, mounting bracket, and pulley. Features allow for a field arrest of unit if rescuer is engaged for retrieval. Meets ANSI Z359.1-2007 and all applicable OSHA standards.



DiVal
Safety & Supplies for Life

Call For Pricing

Item #REN-047

Rental MSA 8' Tripod w/ 50' Lynx Winch-Hoist

Rental MSA 8' Tripod with (10016569) 50' Lynx personnel, material winch-hoist. 50' Lynx hoist includes 3/16" galvanized cable, mounting bracket, and pulley. Features allow for 310 lb working limit load for personnel or a 620 lbs load for material. Air drive option enables powered lifting or lowering. Meets ANSI Z359.1-2007 and all applicable OSHA standards.



DiVal
Safety & Supplies for Life

Call For Pricing

Item #REN-048

Rental Truck Mount Hitch Sleeve

Rental Miller DuraHoist truck mount hitch sleeve for Miller Davit Arm (Ren-045). Designed to install into a 2" (.05m) receiver on an attendant vehicle to provide a portable anchor point for confined space entry/retrieval, rescue and fall arrest applications.



DiVal
Safety & Supplies for Life

Call For Pricing

Item #REN-045TM

Rental Lynx® Rescuer SRL w/ Lockout, 50'

Rental MSA Lynx® Rescuer Self-Retracting Lifeline with Lockout. Provides fall arrest and emergency lifting and lowering for confined space. Features a 3/16" diameter stainless steel line. 50' total length.




DiVal
Safety & Supplies for Life

Call For Pricing

Item #REN-044

Rental Portable DuraHoist Confined Space System

Rental Miller DuraHoist portable confined space 4-piece system. Miller DuraHoist confined space systems provide safe, lightweight and portable solutions for a variety of confined space applications, including confined space entry, rescue, positioning and personnel/material handling. Lightweight, high-strength aluminum construction for easy handling and long service life. Modular design adapts to many applications, lowering cost of ownership and providing effective safety solutions. Designed for manhole and confined space entry/retrieval and fall arrest applications. System breaks down into four lightweight aluminum components for easy storage, transport and set-up. No tools required for assembly. Overall system height adjusts from 79" (2.01m) to 100" (2.54m). Mast offset adjusts from 12" (.30m) to 29" (.74m). Four-piece system with ManHandler hoist/winch w/65' (20m) of 3/16" (4.76mm) galvanized steel cable. Optional truck hitch mount also available REN-045TM.

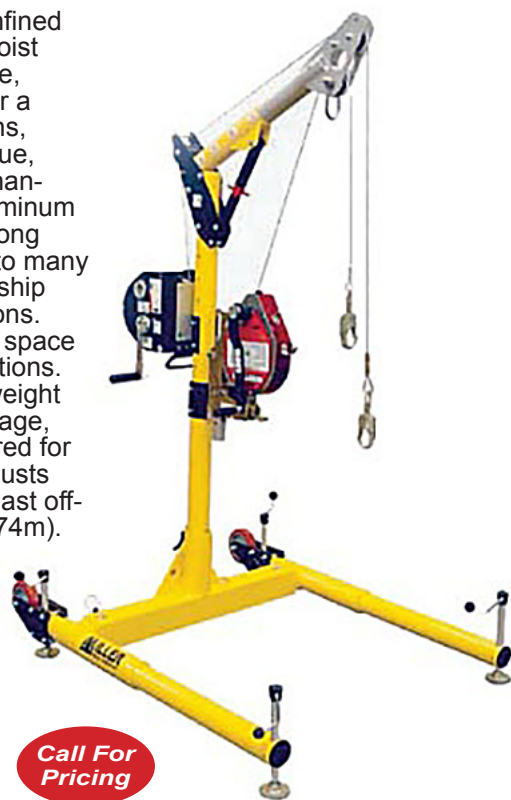

DiVal
Safety & Supplies for Life

Call For Pricing

Item #REN-045

"Y" Lanyard w/ Snap Hooks & D-Ring

DBI-SALA® Rescue Y-Lanyard. 1-3/4" web with locking snap hooks at each end of leg. D-Ring at center top of lanyard for a connection point. 2' length. Typically used with wristlets or harnesses with shoulder D-Rings. Includes spreader bar for tangle free work.



DBI SALA

Item #1231460

\$106.50/EA

Rescue Yoke Wristlets

DBI-SALA®, yoke, choker style wristlets designed for rescue and retrieval. Position hands and arms above the head to prevent worker's shoulders from catching on obstructions during retrieval.



DBI SALA

Item #1001210

\$56.50/EA

Journeyman Rescue Retrieval Harness

Rescue Retrieval Harness with D-Rings on shoulders and one on back. Journeyman universal fit harness features heavy duty webbing throughout torso and legs, 5-point adjustability with mating buckle, chest and tongue buckle legs. Contains 2 shoulder D-Rings and 1 back D-Ring.



FALLTECH

Item #7027P

\$119.50

FallTech Horizontal Life Line System

FallTech 2-Person Temporary Horizontal Lifeline Kit. Requires no special tools and can be installed and removed in minutes. Features high-strength, 12-strand braided rope HLL with alloy steel tensioning device. Kit includes: 1x Synthetic rope, 1x line tensioner, 2x Carabiners, 2x O-Rings, 2x Pass-through anchors, and storage bag.

Item #770003	30'
Item #770006	60'
Item #770001	100'

 FALLTECH®



\$515.00
\$565.00
\$610.00

4-Person Temporary Horizontal Lifeline Kit

FallTech 4-Person Temporary Horizontal Lifeline Kit, 30'. Requires no special tools and can be installed and removed in minutes. Features high-strength, double-braided rope HLL with alloy steel tensioning device. Kit includes: 1x Synthetic rope, 1x line tensioner, 4x O-Rings, 2x Carabiners, 2x Pass-through anchors, and storage bag.

Item #777030 30'

 FALLTECH®




\$880.00

Sayline™ Cable Horizontal Lifeline System

The Sayline™ cable system is highly portable and ideal for use in situations where welding, sparks or harsh environments are present or where minimal clearance exists. This all-metal system is durable enough to be left in place for long periods of time and light enough to be moved easily from one job to another. Engineered with DBI-SALA attention to quality and detail, the Sayline™ system will work alongside you during maintenance, bridgework, construction and manufacturing with absolute safety. Sayline™ system is a complete kit that is easily installed with no special tools or equipment. System is lightweight and extremely portable allowing you to move it and reuse it over and over again. Complete with cable lifeline assembly and turnbuckle device to tension for ease-of-use. Incorporates the Zorbit shock absorber for added safety, it allows you to use a standard 5000 lbs rated anchorage connector such as our tie-off adapter, fixed beam anchor, D-ring anchorage plate, etc. Meets or exceeds all applicable industry standards including OSHA and ANSI.

 DBI-SALA®

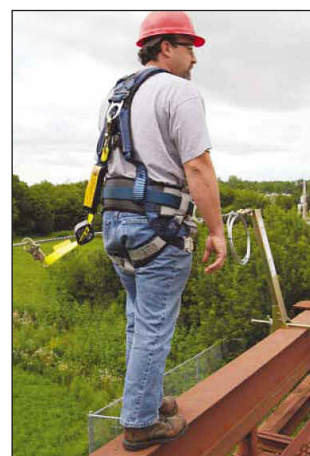

Item #7602020	20'	\$823.00
Item #7602030	30'	\$843.00
Item #7602040	40'	\$899.00
Item #7602050	50'	\$918.00
Item #7602060	60'	\$940.00
Item #7602070	70'	\$929.00
Item #7602080	80'	\$935.00
Item #7602090	90'	\$941.00

Personnel Safety Net

Personnel safety net with debris liner and hooks. Made of high tenacity synthetic mesh and border rope are designed to absorb shock. Tested to meet or exceed ANSI A10.11 (dated 1989). Net shown is in-cludes debris liner. Attachment hooks are 4' on center and staggered for attachment to other nets. Several standard sizes available. Custom sizes available upon request as well.



Item #PSNC1515	15' x 15'	\$835.50
Item #PSNC1520	15' x 20'	\$1081.20
Item #PSNC1525	15' x 25'	\$1266.00
Item #PSNC2020	20' x 20'	\$1313.20
Item #PSNC2030	20' x 30'	\$1782.50

 **DIVAL+**
Safety & Supplies for Life

Adjust-A-Net™ Personnel Net System

Patent pending design allows Adjust-A-Net to adjust to different sizes in minutes. Simply gather the net on one or two sides, then use the patent pending strap system to secure the net in the desired size and dimension. Reduce sag with quick-adjust buckle release. 3-1/2" mesh is the smallest in the industry for better protection. A specially designed coating protect against the damaging effects of UV light, resists abrasion and securely bonds all convergent points. Net complies with ANSI and OSHA regulations. Available in a range of sizes.



Item #4100101	20' x 40'	\$1161.50
Item #4100102	25' x 50'	\$1622.85
Item #4100103	30' x 60'	\$2254.75

 DBI-SALA®

2D & 4D Lineman Belt w/ Tongue Buckle & Floating D-Rings

Features rolled edges that add durability and comfort at the hips. Tongue buckle style body belt. 2 large S-shape full-floating D-rings at hips. Made with 100% top grain leather from Red Wing, MN. Built-in tool snaps and rings. Integral leather tape thong. Metal ID plate with vinyl label, equipped with i-Safe™.

** 4D Lineman SEAT-BELT also features a built-in contoured comfort and support system. Unique design moves center of gravity upward. Gut strap with locking quick connect buckle. 2 small D-rings for fall restrict device. Built-in tool snaps and rings.



2D Belts - Size Listing

Item #1001379	D-18	\$339.50
Item #1001380	D-19	\$339.50
Item #1001381	D-20	\$339.50
Item #1001382	D-21	\$339.50
Item #1001383	D-22	\$339.50
Item #1001384	D-23	\$339.50
Item #1001385	D-24	\$339.50
Item #1001386	D-25	\$339.50
Item #1001387	D-26	\$339.50
Item #1001388	D-27	\$339.50
Item #1001389	D-28	\$339.50
Item #1001390	D-29	\$356.50
Item #1001391	D-30	\$356.50

4D Belts - Size Listing

Item #1001392	D-18	\$492.00
Item #1001393	D-19	\$492.00
Item #1001394	D-20	\$492.00
Item #1001395	D-21	\$492.00
Item #1001396	D-22	\$492.00
Item #1001397	D-23	\$492.00
Item #1001398	D-24	\$492.00
Item #1001399	D-25	\$512.10
Item #1001400	D-26	\$492.00
Item #1001401	D-27	\$492.00
Item #1001402	D-28	\$492.00
Item #1001403	D-29	\$517.00
Item #1001404	D-30	\$517.00

Hydra-Cool™ Tree and Pole Climber

Exclusive Hydra-Cool™ Climber Pads for superior support and comfort. Top layer: Moisture-wicking with both cooling and thermal insulating properties. Bottom layer: PORON® cushioning absorbs impact, resists water, and conforms to the leg for comfort. Protective polyurethane-coated leather resists weathering, water absorption, and cracking. One size fits most. Climbing pads come with steel inserts. Sold in pairs.

Item #2214K	Pads w/ Metal Inserts	\$168.60
Item #2214ARSK	Claw Hooks w/ Ankle Straps	\$155.95
Item #221486K	Pole Climber Set w/ Hooks & Pads	\$299.60
Item #221407K	Tree Climber Set w/ Hooks & Pads	\$310.35



KLEIN TOOLS

Cynch Lok™ Pole Fall Restricting Device

Cynch-Lok™ features almost effortless adjustment. It allows you to easily hitch-hike poles (reposition, move or jump the strap upwards) with a hand position that's comfortable. It also moves past obstacles without difficulty. Exterior straps can be changed depending on the type and size of pole you're climbing. Interchangeability eliminates the need to purchase multiple devices and adds to Cynch-Lok's longevity by allowing you to replace components. Cynch-Lok's unique design cinches around a pole in the event of a cut-out or fall. When used correctly, it limits your fall distances in accordance with CSA standards. For distribution poles. Available in two sizes.



Item #	Pole Diameter	Pole Circumference	Weight	
1204057	Min 5.5", Max 16"	Min 17.5, Max 50"	4.5 lb (2.0 kg)	\$539.00
1204058	Min 5.5", Max 37"	Min 17.5, Max 116"	4.5 lb (2.0 kg)	\$580.00



Saflok™ Pole Climbing Anchor System

The Saflok™ Pole Anchor system provides utility pole climbers with 100% fall protection. This unique system allows workers to free climb poles and work around obstructions such as multiple conductors, equipment, vines and other natural obstructions. It allows workers to quickly and safely climb the pole prior to connecting their work positioning system. This system can also make rescuing a fallen worker fast and easy. Standard System comes with Anchor Tube, 80' (24.3m) of 5/8" (16mm) High Dielectric Rope, Installation / Removal Tool, 1 Carabiner, Robe Grab with Integrated Shock Absorbing Lanyard, and Carrying Bag.

Standard System

Item #2104800 \$549.00

Advanced System

Item #2104801 \$671.45

Advanced System Includes:
Everything Above, Plus 1 Additional Carabiner, Chain Tensioner, and Web Loop



Adjustable Rope Lanyard w/ Locking Hooks, 3' to 6'

Positioning Rope Lanyard. This system holds the worker in place while keeping his/her hands free to work. Whenever the worker leans back the system is activated. However, the personal positioning system is not designed for fall arrest purposes. Designed for "work positioning."


Item #6910-16 \$49.75



CMC Rescue Static-Pro Rope

CMC Rescue Static-Pro™ Lifeline Rope, 1/2". An extremely low-stretch kernmantle rescue lifeline constructed of 100% high-tenacity polyester fiber. Excellent choice for high lines, long rappels and many mechanical advantage haul systems. Its low electrical conductivity has advantages when working on towers or charged electrical equipment. Polyester fibers will not absorb fibers and have better resistance to acid. These ropes are favored for their excellent hand, knotability and UV resistance. UL Classified to NFPA Standards. Made in the U.S.A. 1/2" total diameter.

Item #281200FT	White/Blue Stripe	\$1.27 /FT
Item #281201	Orange/White Stripe	\$1.44 /FT
Item #281202	Blue/White Stripe	\$1.44 /FT
Item #281203	Red/White Stripe	\$1.44 /FT
Item #281207	Yellow/White Stripe	\$1.44 /FT



New England KMIII Kernmantle Ropes

New England KM-III 32-Strand Static rope, 300'. A polyester sheath with nylon core allows for an incredibly smooth sheath, higher tensile strengths, and superior handling characteristics. Best used in applications in rappelling, caving, rescue, top roping, fixed rope applications, hauling and, life saving. NFPA and CE1891 approved and certified. 1/2" diameter. 300' total length.

Item #330016330	White (330')	\$313.50 /RL
Item #33011600300	Red	\$282.25 /RL
Item #33021600300	Green	\$282.25 /RL
Item #33031600300	Blue	\$282.25 /RL
Item #33041600300	Black	\$282.25 /RL
Item #33051600300	Orange	\$282.25 /RL

CMC Rescue Rope Bags

Solid performer for years, these popular rope bags feature a variety of innovative elements. Contoured backpack-style shoulder straps offer greater comfort when carrying a heavy bag. Bag tops are made of rugged pack cloth for easier closing. Handles, just inside the top, can be used to hold the bag open for quicker stuffing or to carry the bag from the top, haul-bag style. A soft rubber side-carrying handle is comfortable on the hand. The bottom of the bag has a large grommet to pass the rope through, plus sewn web loops to tie the rope end off inside or outside of the bag. These rope bags are all CORDURA® nylon and features an external web handle.



Item #430201	ORG	150' - 200' Cap.	\$62.00
Item #430205	BLK	150' - 200' Cap.	\$62.00
Item #430302	BLU	150' - 200' Cap.	\$73.00
Item #430402	BLU	325' - 400' Cap.	\$76.00



New England MultiLine II Ropes

New England's most popular 3-strand bull rope. Composite rope made of polyester yarns wrapped around a core of polyolefin in each strand. Spun polyester is added to the surface for better grip and chafe protection. Identified by 2 orange markers on the surface strand. Available in 150' sections, 600' spools or cut to order. 7300-20 series is 5/8" diameter and is 8,200 tensile strength. 7300-24 series is 3/4" diameter and is 10,500 tensile strength.

Item #	Diameter	Length	
7300-20-150	5/8"	150'	\$135.00 /RL
7300-20-600	5/8"	600'	\$480.00 /RL
7300-24-150	3/4"	150'	\$160.00 /RL
7300-24-600	3/4"	600'	\$588.00 /RL



KMIII Static 1/2" Kernmantle Ropes

New England KMIII static 1/2", 12mm kernmantle rope. KMIII static rope is a balanced construction consisting of a continuous filament polyester cover braided over a unidirectional nylon core. KMIII is designed to meet the rigorous requirements associated with rescue and rappelling operations. KMIII is dual certified (CE and NFPA). Applications include, vertical lifeline, rappelling, caving, canyoneering, work positioning, high lines, fall protection, and climbing. White rope with blue tracers.

Item #3300-16-100	100'	\$95.00 /RL
Item #3300-16-150	150'	\$142.50 /RL
Item #3300-16-600	600'	\$531.75 /RL
Item #3300-16-1200	1200'	\$1062.50 /RL



CMC Rescue ProSeries® Reflective RIT Rope, 5.6mm

CMC Rescue ProSeries® Reflective RIT Rope. The already high visibility RIT Rope with Technora® and polyester sheath has been improved by adding a strand of highly reflective 3M™ tape. The 100% Technora® core provides high strength in adverse conditions. The line is supple enough to pack easily, but firm enough to feel against the floor when following it in low-visibility conditions when wearing gloves. 5.6mm diameter.

Item #292005	\$1.13 /FT
---------------------	-------------------



CMC Rescue Escape Line Kernmantle Rope, 8.2mm

CMC Rescue Escape Line Kernmantle Rope. Low-stretch kernmantle escape line rope provides outstanding performance with its polyester sheath covering a nylon case. Large enough for easy handling, while still compact when stuffed in a bag or pocket. Bright orange color provides high visibility. UL certified to NFPA standards. 8.2mm total diameter. Made in the U.S.A. Escape line rope.

Item #K05100	\$1.05 /FT
---------------------	-------------------

CMC Rescue Pulley, 1/2" Diameter

This lightweight, full-strength, Prusik-minding pulley is ideal for mountain rescue, swiftwater, or other technical teams where equipment weight is a significant consideration. Sealed ball bearings provide high efficiency and aluminum side plates protect the rope. An extremely low-profile stainless steel axle assembly reduces snagging on rocks, roots, and uneven surfaces.



Item #300301 \$60.00

CMC Rescue ProSeries® Pulley

No detail has been overlooked in this high-efficiency pulley. This compound or complex system workhorse features a precision sealed ball bearing to minimize loss of mechanical advantage. The large carabiner hole supports multiple carabiners, and the smooth, rounded edges on the high-strength aluminum side plates minimize rope fraying. The bottom is shaped for maximum efficiency with Prusik hitches but also works well with Gibbs-type ascenders. Large anodized aluminum sheaves provide efficiency, and low-profile axle fasteners reduce snags when the pulley is moving.



Item #	Pulley	Color	Dimensions	
300441	Single	Blue	2-1/4" x 1/2"	\$100.00
300442	Double	Gold	2-1/4" x 1/2"	\$136.00
300461CMC	Single	Red	3-3/4" x 1/2"	\$131.00

CMC Rescue NFPA Rescue 8 Descender, Aluminum

Machined from 1/2" (12.5mm) plate, the Rescue 8 design has been refined for even better performance with today's selection of rescue rope. Descenders no longer routinely use 5/8" (16mm) rope, so the smaller dimensions of the Rescue 8 provide greater control.



Item #300840 \$63.00

CMC Rescue Single Swivel Pulley, Stainless Steel

The Prusik-minding pulley (PMP) is ideal for high anchor points or tripod use. The rotating swivel aligns the rope with the direction of the pull. Its stainless steel sheave can be used with either rescue rope or wire cable. By combining the swivel with the pulley, overall system length is minimized, increasing travel.



Item #300430 \$126.00

CMC Rescue Rack w/ Turbo Bar

The CMC Rescue Rack offers several innovative features to provide enhanced performance. The "fat" aluminum bars provide excellent control for rescue loads. The bars are center drilled to reduce weight and allow better heat dissipation. The finish also prevents transfer of material to the rope, common with bare aluminum bars.



Item #300890 \$152.00

CMC Rescue Escape Artist Rescue Descender

The Escape Artist is quickly becoming the industry standard, thanks to its hands-free edge transition and optimal descent control. Intended to be pre-rigged on an escape line and kept ready for immediate use, the Escape Artist pays out the rope smoothly and then locks when loaded, leaving both hands free to negotiate the exit. Squeezing the lever controls the descent rate.



Item #300913 \$130.00

CMC Rescue MPD G-Use Rated Descent Control Pulley

The MPD allows you to go from lowering to raising without changing hardware. More than nine years of research and development went into the patented Multi-Purpose Device (MPD), which features major innovations in advanced technical hardware for rope rescue professionals. For more info please visit www.DiValSafety.com



Item #333000 \$695.00

Petzl Self-Braking Descender, Large

An excellent descender for working on rope, the Petzl IDs auto-locking feature combines with a locking position for the handle. Additional safety features include an anti-panic function that stops the descent if the handle is pulled too far and an anti-error safety catch that reduces the risk of an accident from incorrect rigging on the rope. Maximum descent distance: 660' (200 m).



Item #345D23 \$250.00

CMC Rescue ProSeries® Carabiners

The first aluminum carabiner to meet NFPA strength requirements for general use. Patented key-lock design eliminates snagging when removing the carabiner from your harness.



Item #300221
Screw-Lock, 1.1" Opening **\$38.00**

Item #300253 (Red)
Auto-Lock, 2.1" Opening **\$61.00**

Item #300262
Manual-Lock, 1.1" Opening **\$49.00**

CMC Rescue 100% Stainless Steel Carabiners

The most corrosion-resistant carabiner available. Compact enough to operate easily with one hand and has a side-swing gate. Will fit over a standard litter rail. The key-lock design eliminates snagging.



Item #300010CMC
(0.9" Opening) **\$48.00**

Item #300011
ANSI Cert. (0.9" Opening) **\$50.00**

CMC Rescue Extra Large Steel D Carabiner

Made of 1/2" (12.7mm) diameter heat-treated steel stock, this industrial sized, high-strength carabiner features a wide gate opening, useful for attaching to rungs on aerial ladders, buckets and industrial rescue or rope access anchor points that are too big for most rescue carabiners. The screw-lock gate opening is a full 1.53" (39mm).



Item #371290 \$37.75

Rescue NoWorries™ Rope Stop Descenders

Descent device easily regulates friction and provides a smooth descent in varied conditions. The handle acts as a dynamic variable friction lever, capable of going from a complete stop to complete go, allowing the user to regulate the descent providing greater flexibility with larger loads. The self-braking system allows you to stop the descent if you let go of the handle and protects you if you were to become unconscious during a descent.

Item #	Stop Style	Material	Suits Rope	
8700068	Single	Alum	7/16"-1/2"	\$119.05
8700070	Single	SS	7/16"-1/2"	\$168.30
8700071	Single (Double Rope)	Alum	7/16"-1/2"	\$131.45
8700077	Double	Alum	1/2"	\$255.10
8700079	Double	Alum	7/16"	\$220.15
8700081	Double	SS	7/16"	\$382.95



RopeCraft™ Rescue & Descent Mechanical Rope Protection

Utilizing a series of rollers that aid in guiding and protecting moving rope with minimal friction, these aluminum mechanical rope protectors guide your rope over an edge, along the ground, or prevent lines from tangling when using multiple ropes.

Item #	Edge Use	Rigging Pts.	
8700141	Man Made	8 on each bay	\$261.90
8700142	Natural	4	\$339.10
8700302	Both	4 end quick links	\$146.35



Rescue & Descent OzPod™ Modular Rescue Frame

A total edge management system designed to provide a raised anchor point above a hole, adjacent to an exposed edge, or cantilevered over an exposed edge to provide a safe and easy method for access and rescue. Its versatile modular design allows it to be configured into a variety of multipurpose rated rescue frames depending on the specific application required. It can be used as a luffing edge rescue frame, a tripod, or as a mobile building maintenance unit.

Item #8700006

\$5092.50



Universal Suspension Workseat

Wide sturdy seat for added stability and mobility when working in suspension or industrial rope access applications to reduce fatigue when suspended in a harness for long periods of time, while allowing complete leg mobility and freedom of movement for climbing. Cushioned padded seat with breathable mesh lining provides the ultimate in comfort and performance when working in suspension for long periods of time. Easy adjust hardware allows the seat to be adjusted for varying degrees of suspension. Durable polyester rugged construction endures rough use, standing up to long periods of outdoor elements including sun exposure without tearing or fraying for added longevity.

Item #1150414

\$189.50



Rescue & Descent ExPlorer™ Retrofit Chest Ascender

This compact and lightweight retrofit chest ascender is designed to easily fit between the suspension and fall arrest sternum D-Rings of your climbing or rescue harness to create a simple, versatile and efficient climbing/positioning system. Features a lower hole for easy connection to your harness via quick-link or carabiner and an upper webbing slot with attachment kit for increased versatility and ease of installation. An integral webbing slot in combination with the attachment kit keeps the ascender in place during suspension for smooth operation. Twisted body ensures rope remains close to the body for easier ascending while providing easy access to the cam.

Item #8700522

\$68.05



Rescue & Descent ExPlorer™ Hand Ascender

The handheld ascender is used in combination with your climbing or rescue harness to create a high performance, versatile and efficient ascent system that utilizes a locking cam for ascending rope lifelines. Ergonomically shaped and includes a comfort grip handle for added ease-of-use in a variety of conditions and ascents. Features 4 rigging points, 2 at the top and 2 at the bottom for organizing your lines and the attachment of connecting devices such as carabiners, lanyards, foot loops and other equipment to create a diverse range of effective and safe ascent systems.

Item #8700523 Left Hand

\$82.45

Item #8700524 Right Hand

\$82.45



RigMaster™ Rescue & Descent Aluminum Rigging Plate

The rigging plate provides a lightweight solution that is ideal for simple anchor systems and load distribution, ensuring neat, tangle free and organized lines. Small lightweight design provides greater flexibility with anchor points. High strength to weight ratio. Engineered for maximum strength while using minimal material providing a heavy duty rigging plate that is lightweight, easy to carry, use and rig. Durable aluminum construction with anodized gold finish for superior corrosion resistance, strength and durability.

Item #2189996 14 pt. Rectangular

\$90.65

Item #2189998 10 pt. Oval w/ Rubber Ring

\$56.75

Item #2189997 6 pt. Triangle

\$31.95

Item #2189999 5 pt. Paw Shaped

\$31.95



Rescue & Descent Rigging Pulley

Ideal for use in rope hauling and lowering systems or in multiple pulley systems. Incorporates swivel cheeks that extend beyond the surface of the rope protecting it from abrasions, while allowing you to place the rope in the pulley at any point along the line. Sintered self lubricating bushing spreads the load over a larger area of the axle. Stainless steel axle. Permanently riveted. Anodized aluminum construction.



Item #	Style	Diameter	Suits Rope	
8700012	Single	1.50"	up to .44" (11mm)	\$35.55
8700018	Single	2.00"	up to .50" (13mm)	\$58.25
8700014	Double	2.00"	up to .50" (13mm)	\$127.80
8700017	Triple	2.00"	up to .50" (13mm)	\$209.25
8700021	Single, Double Ended	2.00"	up to .50" (13mm)	\$54.10
8700015	Double, Double Ended	2.00"	up to .50" (13mm)	\$127.80
8700528	Triple, Double Ended	2.00"	up to .50" (13mm)	\$209.25
8700013	Prusik Minding Single	1.50"	up to .44" (11mm)	\$55.65
8700022	Prusik Minding Single	2.00"	up to .50" (13mm)	\$81.95



Rescue & Descent Carabiner

Serves as a link to securely attach components between equipment, operator and anchorage offering maximum strength and durability. Built to stand-up to the toughest environments, providing added longevity.

***All Carabiners have at least a 5000 lbs Min. Breaking Strength**



Item #	Style	Mat. - Opening	Lock Mech.	
8700561	Oval w/ Pin Eye	Steel 0.63"	Screw Gate	\$17.50
8700167	Oval	Alum. 0.75"	Screw Gate	\$20.50
8700168	SM Offset D	Alum. 0.63"	Screw Gate	\$23.25
8700201	LG Offset D	Steel 1.13"	Screw Gate	\$21.50
2000172	LG Offset D	SS 1.00"	Auto, Triple Action	\$69.50
8700200	SM Offset D	Alum. 0.63"	Auto, Triple Action	\$20.50
8700198	MD Offset D	Alum. 0.88"	Screw Gate	\$26.00
2000171	MD Offset D	Alum. 0.98"	Auto, Double Action	\$26.50
9509238	Delta Quick Link	Steel 0.25"	Manual Screw	\$5.90
8700425	D Style Quick Link	Steel 0.38"	Manual Screw	\$33.75



Rescue & Descent Kernmantle Rope

Ideal for use in a wide variety of rescue and industrial applications requiring the added safety and performance. High performance rope that is less likely to fray or snag. High strength and hard wearing. The protective outer sheath delivers greater resistance to minor cuts, abrasions, chemicals and grime, as well as heat resistance. Integral tracer thread for easy identification and traceability.




Item #	Style	Size	Length	Color	
8705115	Both Ends Finished w/ Thimble	.44" (11mm)	50 ft	Blk/Org	\$110.00
8705116	Both Ends Finished w/ Thimble	.44" (11mm)	100 ft	Blk/Org	\$165.00
8705117	Both Ends Finished w/ Thimble	.44" (11mm)	200 ft	Blk/Org	\$295.00
8705118	Both Ends Finished w/ Thimble	.44" (11mm)	325 ft	Blk/Org	\$455.00
8705119	Both Ends Finished w/ Thimble	.44" (11mm)	410 ft	Blk/Org	\$550.00
8705120	Both Ends Finished w/ Thimble	.44" (11mm)	650 ft	Blk/Org	\$830.00
8705122	Both Ends Finished w/ Thimble	.50" (13mm)	50 ft	Blk/Org	\$130.00
8705123	Both Ends Finished w/ Thimble	.50" (13mm)	100 ft	Blk/Org	\$207.15
8705124	Both Ends Finished w/ Thimble	.50" (13mm)	200 ft	Blk/Org	\$375.00
8705125	Both Ends Finished w/ Thimble	.50" (13mm)	325 ft	Blk/Org	\$567.45
8705126	Both Ends Finished w/ Thimble	.50" (13mm)	410 ft	Blk/Org	\$688.70
8705127	Both Ends Finished w/ Thimble	.50" (13mm)	650 ft	Blk/Org	\$1057.30
8700600	Sewn Loop Chest Prusik	.25" (6mm)	1.7 ft	Red/Ylw	\$20.75
8700601	Sewn Loop Chest Prusik	.25" (6mm)	3.9 ft	Red/Ylw	\$26.50
8700602	Sewn Loop Purcel	.25" (6mm)	5.6 ft	Red/Ylw	\$32.15
8700603	Sewn Loop Prusik Foot End	.25" (6mm)	3 ft	Ylw/Blk	\$26.50
8700604	Sewn Loop Prusik Head End	.25" (6mm)	5.6 ft	Ylw/Blk	\$37.00
8700605	Sewn Bound Loop Prusik, MD	.31" (8mm)	1.3 ft	Blu/Blk	\$16.75
8700606	Sewn Bound Loop Prusik, MD	.31" (8mm)	1.8 ft	Blu/Blk	\$17.25
8700607	Sewn Bound Loop Prusik, MD	.31" (8mm)	2.1 ft	Blu/Blk	\$18.00



Residential Guardrail System

The Guardian Fall Protection Residential Guardrail System is a specialized bracket and guardrail assembly intended for steep roofs of pitches from 6/12 to 16/12. This versatile and lightweight system is easy to install and remove, and is compact for convenient storage. Composed of powder-coated steel, it is designed for superior durability and weather resistance. 2" x 6" toeboards are required for use with the Residential Guardrail System, and must be installed according to equipment instruction specifications. Roof Bracket includes Guardrail Holder and Bracing Support. Adjustable to fit a roof pitch between 6/12 and 12/12. Versatile and cost effective. Slotted for easy removal. Lightweight and compact for storage.

Item #15173 \$109.00

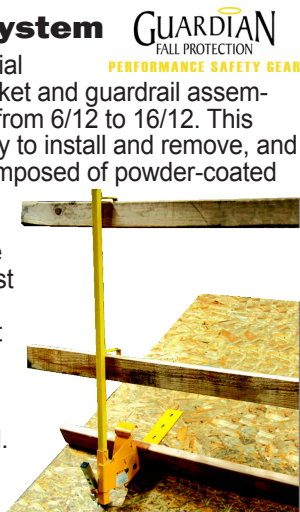

Guardian Parapet Clamp Guardrail

The Guardian Fall Protection Parapet Clamp Guardrail is an economical and easy to use system. An often overlooked option in the world of fall protection, guardrails and warning lines function to block workers from exposure to fall hazards, often entirely eliminating the need for other types of fall protection equipment. Each clamp is provided with a corresponding guardrail post, which is compatible with both 2" x 4" boards and snap-on metal rails. This system can fit any parapet from 4" to 24" in width, and an entire system can be easily installed by one person, frequently without the need for ladders or scaffolding. Features easy installation by one person without ladders or scaffolding, adjusts to wall widths between 4" to 24", and complies with OSHA standards.

Item #15170 \$127.75



BARGARD Protector Cap



Designed to protect against nuisance injuries from open rebar. A10 fits 3/8" to 1-1/4" diameter rebar and 1-3/4" ID pipe. A20 fits rebar 1" to 2-1/4" diameter.



Item #A10 \$0.75/EA
Item #A20 \$1.10/EA

MICROCHEM® 2000 Coverall with Pass-Thru for Fall Arrest Lanyard

MICROCHEM® 2000 Coverall with hood and pass-thru. Low hazard liquid chemical repellence, particle protection, protection from pesticides and barrier to biological agents. Anti-static treated and optimized body fit improves wearer comfort and safety. Features a high quality two-way stretch microporous polyethylene film layer, nonwoven inner, bound seams and pass thru device for use with fall arrest equipment. White. 25 per case.

Item #MG20D28(size)* LG-XL \$169.75/CS
***Available at additional cost 2XL-5XL**



PC110 Rebar Cap



Rebar cap fits rebar sizes #3 to 9, 3/8" to 7/8". Stands up to weather and temperature conditions. Safety orange color provides visibility and compliance. Meets CAL OSHA construction compliance. 3.5" x 3.5" square. 3" high.




Item #PC110 \$2.30/EA

Safety Boot Temporary Guardrail System

Safety Maker Safety Boot temporary guardrail system. Safety Boots are molded in one piece from a durable, high-impact, safety yellow polymer. Provides a method for a temporary, freestanding guardrail and stair rail system. Can be used for edge protection on most structures. Easy installation.

Item #SB004 \$29.95/EA



Pennant Markers

Attention getting pennants are ideal for marking areas for high visibility. 9" by 12" bright multi-colored flags attached to a 60' line.

\$7.35

Item #PM60RE Red Colored
Item #PM60YE Yellow Colored
Item #0118895 Multi Colored



N-Top Reflective Delineator Post

JBC Safety N-Top Reflective Delineator Post, 42". Made from blow-molded linear low-density polyethylene which offers superior resistance to impact over a wide temperature. Has permanently installed high intensity 2" x 3" reflective bands and is bright red-orange in color for maximum visibility. Flared out at the base for easy assembly. Post meets MUTCD and NCHRP-350 standards.

PVC Octagonal Delineator (#B08) Base sold separately. Made from 100% recycled PVC in an octagonal shape for stability allowing an increased angle of recovery. Base meets MUTCD and NCHRP-350 standards. 8 lbs.

Item #NTOP3M 42" Delineator Post \$12.70
Item #B08 8 lb. Delineator Base \$9.70





Guardian Single Reusable Stanchion

Specially designed for use with a reusable warning line. Warning lines and guard-rail systems function to block worker from exposure to fall hazards, often entirely eliminating the need for other types of fall protection equipment. Warning line must be between 34" to 39" above working surface. The Single Stanchion weighs only 23 lbs, is 39" tall, and is composed of powder-coated steel for superior durability and weather resistance. It is easy to install, and its convenient handle facilitates simple transportation. Maximum space between Single Stanchions is 50". Single Stanchions must be placed minimum 6 feet from all leading edges of fall hazards, and 10 feet from leading edges perpendicular to the direction of any mechanical equipment. Compliant with all OSHA 1910 and OSHA 1926 Subpart M regulations.

Item #15225 \$165.60

Guardian Warning Flag Replacement Line, 100'


The Guardian Fall Protection Replacement Flag Line is compliant with the Guardian Goose and Single Stanchions, as well as the Permanent Warning Line Mast, and is a component of a complete and OSHA compliant warning line system. Its heavy duty nylon cord is supremely durable, and its large, heat-sealed flags are spaced every two feet for extra visibility. Features large, heat-sealed flags, heavy duty nylon cord, and is OSHA compliant.

Item #15231 \$48.75

G-Rail Free Standing Safety Rail

The Guardian Fall Protection Guardrail is part of the ultimate free-standing fall prevention system - the G-Rail. An often overlooked option in the world of fall protection, guardrails and warning lines function to block workers from exposure to fall hazards, often entirely eliminating the need for other types of fall protection equipment. The Guardrail component of the G-Rail System is made from powder-coated steel for supreme durability and weather resistance, and is compatible with both the Multi-Directional Baseplate and standard baseplate options. The guardrail is part of the ultimate free standing portable fall prevention system and requires no rooftop surface attachment. Color Yellow. Meets all applicable OSHA and ANSI standards.

Item #15183 6' Rail \$138.00
Item #15182 8' Rail \$186.00
Item #15181 10' Rail \$199.00

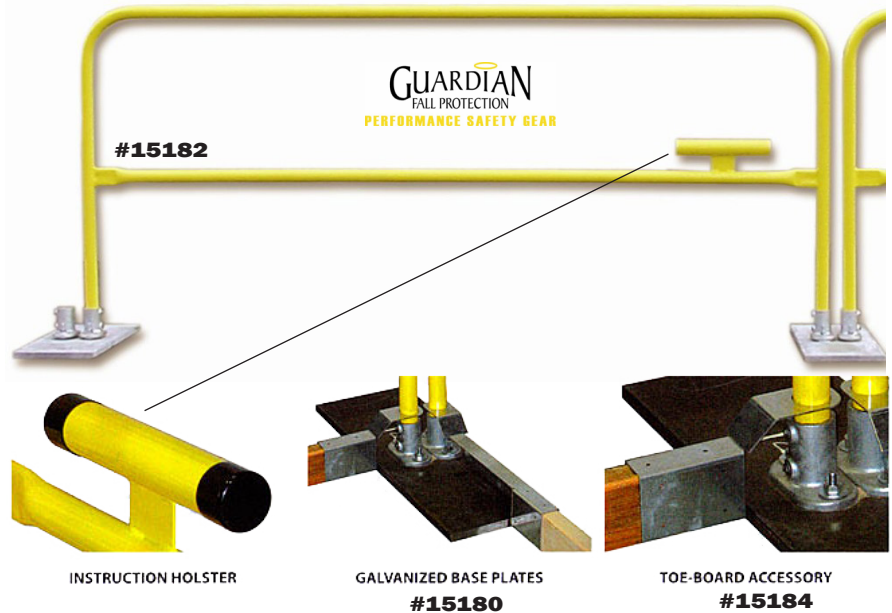

Guardian Toeboard Attachment

The Guardian Fall Protection Short Toeboard Attachment is intended for use with the standard Guardrail Baseplate. It requires no penetration of the substrate, and is composed of hot dipped galvanized steel for increased durability and weather resistance. This attachment provides easy adaptability of guardrail systems, and complies with both OSHA and ANSI standards.

Item #15184 Short Toeboard \$21.50
Item #15185 Long Toeboard \$21.50

Guardian Guardrail Baseplate, Steel/Aluminum

The Guardian Baseplate is the standard option for the attachment and anchorage of Guardian Guardrails, and is one of the two baseplate options for the ultimate free-standing fall prevention system, the G-Rail. It is composed of hot dipped, galvanized steel for superior durability and weather resistance, and will never contribute to rooftop stain or rust. Features base support to Guardian Fall Protection G-Rail System, skid resistant, and requires no rooftop attachment.

Item #15180 \$203.00


DiVal Safety can assist you with a
Custom Roof Audit
Performed by one of our
Fall Protection Specialists.
Contact us Today!

USING SQUIDS® TOOL CONNECTORS

STEP 1: CHOOSE YOUR TOOL TAIL



WEB TAIL



ELASTIC LOOP

STEP 2: CHOOSE YOUR TOOL TRAP



TAPE TRAP



COLD SHRINK TRAP

STEP 3: CHOOSE YOUR LANYARD STYLE



STRETCH CORD



COIL



RETRACTABLE



WRIST

Squids® 3700 Web Tool Tails™, 2 Lbs

Web Tool Tails™ provide retrofit attachment points to a variety of tools and equipment up to 2 lbs using Squids® Tape or Cold Shrink Traps™. Ultra strength nylon webbing with fully enclosed plated D-ring for secure attachment. High tensile strength nylon thread and web catch with double stitch for a more durable stopping point. Third party tested using a 2:1 safety factor.

Item #19703	Black, 3-1/2"	\$6.10
Item #19704	Orange, 4-1/2"	\$6.10
Item #19705	Black, 5-1/2"	\$6.10
Item #19706	Orange, 6-1/2"	\$6.10
Item #19708	Black, 8-1/2"	\$6.10



Squids® 3703 Elastic Loop Tool Tails™

Elastic Loop Tool Tails™ provide retrofit attachment points to a variety of tools and equipment. These Tool Tails can also be used as an anchor point on a belt, harness or separate structure. Stretch cord surrounded by tubular nylon webbing. Lock stitching at both ends for extra security. Adjustable barrel lock for tool attachment. Fully enclosed plated O-ring for secure attachment. Doubles as an anchor loop for belt, harness or separate structure.

Item #19765	10 lbs, 11" (w/ Swivel end)	\$9.95
Item #19767	15 lbs, 11"	\$7.80
Item #19769E	15 lbs, 18"	\$9.20



Squids® 3750 Tape Trap™

Captures Squids® Tool Tails™ securing a safe connection point to tools like no other attachment tape on the market. Quickly wraps on a variety of hand tools, power tools and other equipment providing security and added grip. Non-silicone based makeup works well in a variety of applications. No adhesives so it can be replaced without a mess. Sealed and set with heat application to finish application and secure. Cut and puncture resistant compared to other tool tapes. Material content and finish provides added grip to the handle of a tool. Maximum safe working capacity: 15 lbs (6.8 kg) depending on length, tool, tail and lanyard used.

Item #19760	Orange, 12' roll	\$14.20
Item #19761E	Orange, 30' roll	\$32.80



Squids® 3723 Cold Shrink Trap™

Cold Shrink Traps™ capture Squids® Elastic Tool Tails™ creating a retrofit connection point for tethering. Cold Shrink technology from 3M™ requires no heat source. No additional tools needed to ensure a secure connection on tool. EPDM rubber material resists acids, alkalis and extreme temperatures. This patent pending application is the quickest and easiest way to create an attachment point. Maximum safe working capacity depends on tool, tail and lanyard used. Third party tested using a 2:1 safety factor.

Item #	Diameter	Length	Max. Cap.	
19723	0.75" - 1.50"	3"	5 lbs	\$7.35
19724	1.25" - 1.75"	4"	10 lbs	\$8.80
19726	1.75" - 2.50"	6"	15 lbs	\$12.80



#3150



#3155

Squids® Hard Hat Lanyard, Hi-Viz Lime

Easily and comfortably secures a hard hat to a worker to prevent the item from falling. Comfortably attaches to hard hats and other headwear. Double lock plastic buckle attaches for fall protection. Comfortable high stretch elastic material.

Item #3150	Buckle	\$3.35
Item #3155	Clamp	\$3.35

SQUIDS® LANYARD SELECT-O-MATIC

Tables are good. They help us make sense of our lives. Scan the table below to select the right lanyard for your needs and tools.

MODEL NUMBER	LOCKING CARABINER	CAPTIVE EYE CARABINER	WORKING CAPACITY POUNDS	WORKING CAPACITY KILOGRAMS	TESTED SAFETY FACTOR	SWIVEL
3100	NO	YES	10	4.6	2	NO
3101	YES	YES	15	6.8	2	NO
3102	NO	YES	5	2.3	2	NO
3108	YES	YES	10	4.6	2	NO
3109	YES	YES	15	6.8	2	YES
3110	NO	YES	10	4.6	2	NO
3111	YES	YES	15	6.8	2	NO
3115	NO	YES	2	0.9	2	YES
3119	YES	YES	20	9.0	2	YES
3311	YES	YES	15	6.8	2	NO

SQUIDS® CARABINER CLASS

With four different styles of 'biners our tool lanyards offer the feature set you need to safely connect and perform the task at hand.

Now all captive eye designs, our 'biner options include corrosion resistance, self-locking, swivel design and light weight designs.


Don't want a 'biner at all? Don't worry Squids has you covered with no metal options as well. Check out this quick glance chart and take your pick!



CARABINER STYLE:
Triple Action with Swivel
MODEL #s:
3109, 3119



CARABINER STYLE:
Self-Locking
MODEL #s:
3108



CARABINER STYLE:
Manual Lock Stainless Steel
MODEL #s:
3000, 3001, 3101, 3111,
3311, 3130



CARABINER STYLE:
Single Action
MODEL #s:
3100, 3110, 3102

Note: 3104 and 3115 are loop only with no carabiner connectors



Squids® 3109/3119 Triple Locking Carabiner, Lime

Heavy-duty (8KN) triple-locking carabiner tethers tools to help prevent injury, damage and lost productivity from dropped objects. Swiveling triple locking carabiner provides secure connection and prevents twisting and tangling while performing tasks. Stretch cord surrounded by tubular nylon webbing. Lock stitching at both ends for extra security. Carabiner features 360° swivel captive-eye. Adjustable barrel lock for tool attachment.

Item #	Carabiners	Length	Max. Cap.	
3109	1	35" - 42"	15 lbs	\$29.90
3109EXT	1	42" - 54"	15 lbs	\$30.65
3119	2	35" - 42"	20 lbs	\$49.90
3119EXT	2	42" - 54"	20 lbs	\$50.65

Squids® 3100/3110 Carabiner, 10 Lbs

Tool lanyard carabiner: tethers tools to help prevent injury, damage and lost productivity from dropped objects. Stretch cord surrounded by tubular nylon webbing. Lock stitching at both ends for extra security. Aluminum carabiner with adjustable barrel lock for tool attachment.

Item #	Carabiners	Length	Color	
3100BLK	1	35" - 42"	Black	\$7.20
19003	1	35" - 42"	Lime	\$7.20
3100EXTBLK	1	42" - 54"	Black	\$7.40
3100EXTL	1	42" - 54"	Lime	\$7.40
3110BLK	2	35" - 42"	Black	\$8.85
3110L	2	35" - 42"	Lime	\$8.85
3110EXTBLK	2	42" - 54"	Black	\$9.15
3110EXTL	2	42" - 54"	Lime	\$9.15

Squids® 3101/3111 SS Carabiner, 15 Lbs, Lime

Stainless steel screw gate tool lanyard, carabiner: stainless steel carabiners with locking screw gates for a sure connection in corrosive environments. Stretch cord surrounded by tubular nylon webbing. Lock stitching at both ends for extra security. Stainless steel carabiners for corrosion resistance. Captive eye carabiner with screw gate for locking connection. Adjustable barrel lock for tool attachment.

Item #	Carabiners	Length	
3101	1	35" - 42"	\$12.80
3101EXT	1	42" - 54"	\$13.50
3111	2	35" - 42"	\$18.50
3111EXT	2	42" - 54"	\$19.20

Squids® 3102/3104 Detachable Tool Lanyard, 5 Lbs

Tethered tools help to prevent injury, damage and lost productivity from dropped objects. Compatible with 3103BLK and 3103E lanyard loop accessories. Stretch cord surrounded by tubular nylon webbing. Lock stitching at both ends for extra security. Adjustable barrel lock for tool attachment. Modular quick connecting buckle for exchanging multiple tools.

Item #	End Type	Length	Color	
3102BLK	Carabiner	35" - 42"	Black	\$8.10
3102E	Carabiner	35" - 42"	Lime	\$8.10
3102EXTBLK	Carabiner	42" - 54"	Black	\$8.35
3102EXTL	Carabiner	42" - 54"	Lime	\$8.35
19104E	Loop	35" - 42"	Lime	\$7.80
3103BLK	3/pk Detachable Loops		Black	\$3.15
3103E	3/pk Detachable Loops		Lime	\$3.15

Squids® 3108 Self Locking Single Carabiner, 10 Lbs

Heavy-duty tool lanyard carabiner that self-locks to worker or anchor for added security. Shorter length helps prevent tools from hitting the deck. Stretch cord surrounded by tubular nylon webbing. Lock stitching at both ends for extra security. Adjustable barrel lock for tool attachment. Length: 28" to 35".



Item #19008

\$19.50

Squids® 3311 Twin Leg Triple Carabiner, 15 Lbs

Stainless steel screw gate tool lanyard, twin leg triple carabiner. Stainless steel carabiner with locking screw gates make for a sure connection in more corrosive environments. Dual leg for multiple connections. Stretch cord surrounded by tubular nylon webbing. Lock stitching at both ends for extra security. Twin leg for connecting multiple tools or having 100% tie-off of single tools. Stainless steel carabiners for corrosion resistance. Captive eye carabiner with screw gate for locking connection. Length: 35" to 42".



Item #3311L

\$31.35

Squids® Retractable Stainless Steel Carabiner

Locks into place at desired length preventing tangles and work under tension while securing tools. Self-setting pawls set desired lanyard length up to 48". ABS thermoplastic housing for ultimate durability. Nickel-plated swiveling top ring for 360 degree rotation. Stainless steel carabiners (#304) for corrosion resistance. Technora cord for ultimate strength and durability. Modular quick connecting buckle for exchanging multiple tools.



Item #3000E Carabiner Attachment


\$28.50

Item #3001E Loop Attachment

\$28.50

Squids® Accessory Pack Retractable

Retractable tool lanyard pack includes 3 accessories that attach to retractable lanyards for quick exchange of multiple tools. Compatible with retractable lanyards. Modular quick connecting buckle for exchanging multiple tools.

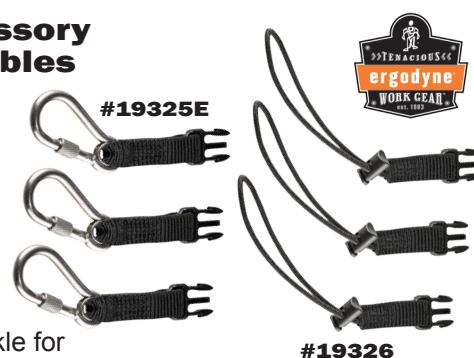

Item #19325E Carabiner Set

\$18.50

Item #19326 Loop Set

\$8.50

Squids® Coiled Cable Lanyard w/ Carabiners

Spiraled cable design stays close to anchor reducing loose ends and trip hazards. Constructed with vinyl covered aircraft cable for ultimate strength and durability. Stainless steel carabiner connectors with captive eyes. Maximum capacity 5 lbs.



Item #19130E Hi-Viz Lime

\$14.20

Item #19131 Orange

\$15.65

Squids® 3115 Wrist Tool Lanyard, 2 Lbs

Wrist tool lanyard, tether tools help prevent injury, damage and lost productivity from dropped objects. Polyester webbing cuff secures to wrist. Ribbed pull cord. Adjustable barrel lock for tool attachment. Maximum safe working capacity, 2 lbs. Tether length: 7-1/2". Wrist measurement: 5" - 7" (small/medium), 7" - 8-1/2" (large/X-large).



Item #3115S/M SM/MD

\$1.70

Item #3115L/XL LG/XL

\$1.70

Industrial Grade Saddle Vent® Confined Space Ventilation Blower Kit for Non-Hazardous Locations

The Saddle Vent® allows unrestricted entry and exit and improves ambient light in a confined space opening. The Saddle Vent® only takes up 3" in a manhole opening and functions as a fresh air conduit to the workers in the confined space. With the Saddle Vent® in place, continuous ventilation is supplied to the workers by eliminating the need to remove the air duct each time a worker enters or exits the confined space.

Standard 8" electric blower kit includes: centrifugal blower, industrial Saddle Vent®, 90° elbow for Saddle Vent®, 15' duct, 6' duct, duct canister and universal mount.

Item #SVBE8SCUP

\$1275.00




Squids® Super Duty Tie Hook w/ 360° Swivel

Reusable tie hook for organizing and cinching hoses, cords, pipe and almost anything else. It's a reusable sliding belt lock mechanism with high tensile strength, and weather resistant Nylon 66. Excellent resistance to oil, salt, solvents, and alkali. Has a 360° swivel neck attachment, with a temperature range of -40°F to 176°F. Will turn cluttered messes into a well organized work area.



Item #	Tie Hook	Length	Max. Cap.	
3510S	Small Hook	11.8"	22 lbs	\$2.65
3510M	Small Hook	15.8"	22 lbs	\$2.85
3510L	Small Hook	19.7"	22 lbs	\$3.10
3530S	Large Hook	11.8"	22 lbs	\$3.10
3530M	Large Hook	15.8"	22 lbs	\$3.30
3530L	Large Hook	19.7"	22 lbs	\$3.60
3540S	Locking Hook	11.8"	44 lbs	\$3.40
3540M	Locking Hook	15.8"	44 lbs	\$3.65
3540L	Locking Hook	19.7"	44 lbs	\$3.95
3560M	Handle Grip	15.8"	44 lbs	\$3.70
3560L	Handle Grip	19.7"	44 lbs	\$4.00
3580M	Double Belt	15.8"	55 lbs	\$3.85
3580L	Double Belt	19.7"	55 lbs	\$4.45

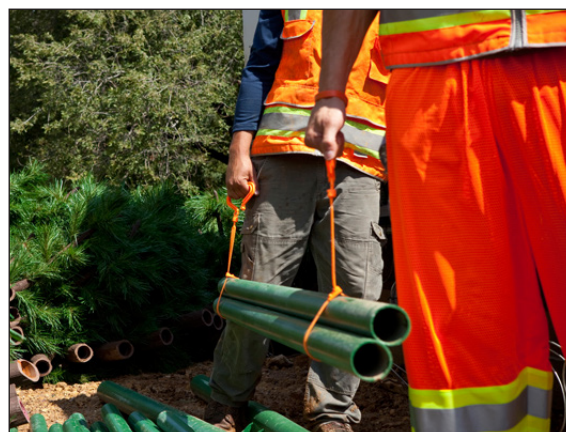

Proto® Tool Lanyard

Proto® Tool Lanyard. Steel carabiner for tool attachment. Stretch cord constructed with elastic nylon. Lock stitching at both ends for extra security.



Item #JLAN15LBSSRP	Elastic Lanyard w/ Screw Gate Carabiner	32" - 48" Length	15 lbs Max. Cap.	\$22.05
Item #JLAN15LBSSCAR	Elastic Lanyard w/ Stainless Steel Carabiner	32" - 48" Length	15 lbs Max. Cap.	\$21.95
Item #JLAN15LB3LK	Elastic Lanyard w/ Triple Lock Carabiners	32" - 48" Length	15 lbs Max. Cap.	\$44.35
Item #JLAN15LBDSS	Elastic Lanyard w/ 2 Stainless Steel Carabiners	27" - 52" Length	15 lbs Max. Cap.	\$25.30
Item #JLAN20LBD3LK	Elastic Lanyard w/ 2 Triple Lock Carabiners	27" - 52" Length	20 lbs Max. Cap.	\$59.35
Item #JLAN25LBDSS	Elastic Lanyard w/ 2 Stainless Steel Carabiners	41" - 118" Length	25 lbs Max. Cap.	\$63.75
Item #JLAN40LBD3LKSW	Web Lanyard w/ 2 Triple Lock Swivel Carabiners	48" Length	40 lbs Max. Cap.	\$66.20
Item #JLAN40LBD3LK	Web Lanyard w/ Triple Lock Carabiner	48" Length	40 lbs Max. Cap.	\$49.45
Item #JLANHATRD	Hard Hat Tether (Hard Hat Not Included)	16" Length		\$6.50

Xtirpa™ Davit Arm w/ Secondary Block Adapter, 24" Length

Xtirpa™ Davit arm with secondary block adapter for fall protection and retrieval facilitates access to confined spaces. Use with Xtirpa™ manhole guard, #IN2108 or #IN2324. Equipped with 5,000 lbs anchor point. Unit weight: 33 lbs, 24" length.

Item #IN2210 \$3396.25

Xtirpa™ Portable Manhole Guard w/ Integrated Mast & Adjustable Feet

Xtirpa™ portable manhole guard. Integrated mast is used in conjunction with a 24" davit arm, #IN2210, for confined-space fall protection and retrieval. Comes with adjustable feet for simple leveling of system.


Item #IN2108 42" H x 38" W x 38" D 29 lbs \$4821.25

Item #IN2324 42" H x 52" W x 52" D 44 lbs \$5351.70

Xtirpa™ Adjustable Manhole Collar, Fits 32" - 42" Diameter

Xtirpa™ adjustable manhole collar. Adjustable fall arrest/ retrieval manhole collar adjusts from 32" to 42" in diameter. Provides a portable base for a confined-space system by fitting within a manhole opening. For use with 24" mast #IN2003 and davit arm #IN2210.

Item #IN2269 \$4235.40

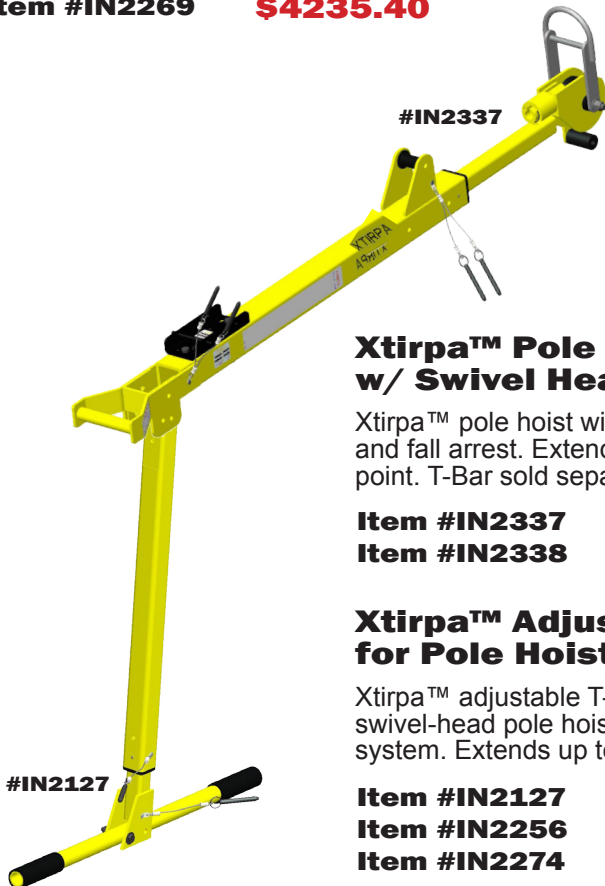

Xtirpa™ Pole Hoist w/ Swivel Head

Xtirpa™ pole hoist with swivel head. For vertical and horizontal retrieval and fall arrest. Extends with two fixed angles. Use with certified anchor point. T-Bar sold separately.

Item #IN2337 48" - 72" \$2731.25
Item #IN2338 57" - 102" \$3260.50

Xtirpa™ Adjustable T-Bar for Pole Hoist

Xtirpa™ adjustable T-bar, short. Adjustable T-bar attaches to adjustable swivel-head pole hoist, #IN2337 or #IN2338, for base stability of pole hoist system. Extends up to 48" in length.

Item #IN2127 Short, Up to 48" \$1084.60
Item #IN2256 Long, 46-4/5" - 74-4/5" \$1084.60
Item #IN2274 12" - 14" \$1084.60