

● CABLE MARKER

Material: Made up of PVC. Oil and erosion resistant, heat resistant up to 85 °C
Feature: Hollow inside , elastic, the diameter can change according to wire.

Ref.	Model	Approx Wire		Markers	Packing (Pcs/Roll)	Item Code
		SQ	mm ²			
	EC-0	0.75~1.5	2.0~3.2	0-9 A~Z + -/∅	1000	0053000
	EC-1	0.75~3.5	3.0~4.2		1000	0053001
	EC-2	3.5~8.0	3.6~7.4		500	0053002
	EC-3	5.2~10.0	5.2~10.0		250	0053003



● DESCRIPTION

Material: Made up of PVC. Oil and erosion resisted
Used for flat wire circle size from 3.5mm-7.0mm

Model	Approx Wire		Markers	Packing (Pcs/Roll)	Item Code
	SQ	mm ²			
EC-J	2-8	0.5-7.0	0-9 A~Z + -/∅	500	0053004

● STRIP CABLE MARKER

Ref.	Model	Dimensions		Packing (Pcs/Roll)	Item Code
		L(mm)	W(mm)		
	MS-65	65	10	100	0053065
	MS-90	90	10	100	0053090
	MS-130	130	10	100	0053130




● TIE MOUNTS

Ref.	Model	Dimensions			Screw Hole (mm)	Packing (Pcs/Bag)	Item Code
		L×W	H(mm)	T(mm)			
	TM-20	20×20	6.1	5.0	2.9	100	0053020
	TM-25	25×25	7.5	6.2	3.5	100	0053025
	TM-30	30×30	8.7	6.4	4.5	100	0053030
	TM-40	40×40	6.4	10.8	/	100	0053040





● DIMENSION



● SELF-LOCKING NYLON CABLE TIE

Material: Nylon 66,94V-2 certificated by UL. Heat-resistant, erosion resistant, insulate well and hard to get aging.
Operating temperature:-40℃ to 85℃.
Color:Natural,UV black and the other colours available on request.

Ref.	Model	L		W (mm)	Bundle Dia. (mm)	Tensile Strength		Packing (Pcs/Bag)	Item Code
		Inch	mm			LBS	KGS		
	2.5×60	2.4"	60	2.5	2-11	18	8	100	0025060
	2.5×80	3.2"	80	2.5	2-16	18	8	100	0025080
	2.5×100	4.0"	100	2.5	2-22	18	8	100	0025100
	2.5×120	4.7"	120	2.5	2-30	18	8	100	0025120
	2.5 × 150	6.0"	150	2.5	2-35	18	8	100	0025150
	2.5×200	8.0"	200	2.5	2-40	18	8	100	0025200



3.6×100	4.0"	100	3.5	3-22	40	18	100	0036100
3.6×120	4.7"	120	3.5	3-30	40	18	100	0036120
3.6×150	6.0"	150	3.5	3-35	40	18	100	0036150
3.6×180	7.0"	180	3.5	3-42	40	18	100	0036180
3.6×200	8.0"	200	3.5	3-50	40	18	100	0036200
3.6×250	10"	250	3.5	3-65	40	18	100	0036250
3.6×280	11"	280	3.5	3-70	40	18	100	0036280
3.6×300	12"	300	3.5	3-80	40	18	100	0036300
3.6×370	14.5"	370	3.5	3-102	40	18	100	0036370

4.8×150	5.9"	150	4.8	3-30	50	22	100	0048150
4.8×180	7.1"	180	4.8	3-42	50	22	100	0048180
4.8×200	8.0"	200	4.8	3-50	50	22	100	0048200
4.8×250	10"	250	4.8	3-65	50	22	100	0048250
4.8×280	11"	280	4.8	3-70	50	22	100	0048280
4.8×300	12"	300	4.8	3-82	50	22	100	0048300
4.8×350	14"	350	4.8	3-90	50	22	100	0048350
4.8×380	15"	380	4.8	3-102	50	22	100	0048380
4.8×400	16"	400	4.8	3-105	50	22	100	0048400
4.8×450	18"	450	4.8	3-130	50	22	100	0048450
4.8×500	16"	500	4.8	3-150	50	22	100	0048500

7.2×150	6.0"	150	7.0	3-33	85	38	100	0072150
7.2×200	8.0"	200	7.0	3-50	85	38	100	0072200
7.2×250	10"	250	7.0	4-63	85	38	100	0072250
7.2×300	12"	300	7.0	4-82	85	38	100	0072300
7.2×350	14"	350	7.0	4-90	120	55	100	0072350
7.2×380	15"	380	7.0	4-98	85	38	100	0072380
7.2×400	16"	400	7.0	4-105	120	55	100	0072400
7.2×450	18"	450	7.0	4-118	120	55	100	0072450
7.2×500	20"	500	7.0	4-150	120	55	100	0072500



10×400	16"	750	9.0	4-105	175	80	100	0100400
10×450	18"	450	9.0	4-118	175	80	100	0100450
10×500	20"	500	9.0	4-150	175	80	100	0100500
10×550	21.6"	550	9.0	8-160	175	80	100	0100550
10×600	23.6"	650	9.0	8-175	175	80	100	0100600
10×650	25.6"	700	9.0	8-190	175	80	100	0100650
10×700	28.3"	720	9.0	10-205	175	80	100	0100700
10×760	30.4"	760	9.0	10-225	175	80	100	0100760
10×800	31.5"	800	9.0	10-240	175	80	100	0100800
10×920	36.25"	920	9.0	10-265	175	80	100	0100020
10×1000		1020	9.0	10-295	175	80	100	0101000


Note: Please mention the packing way when ordering.

● CIRCLE CABLE CLIP

Material: PE or PP, steel nail

Application: A cable fixer for general indoor wiring


Usage: Put the cable under the clip and hammer the nail into the wall to fix the cable



Ref.	Model	Dimensions(mm)			Packing (Pcs/Bag)	Item Code
		H	B	Nail		
	R-3.5MM	4.5	3.5	1.7 × 14	100	0218035
	R-4MM	5.3	4	1.7 × 14	100	0218040
	R-5MM	6.3	5	1.7 × 14	100	0218050
	R-6MM	7.4	6	1.85 × 16	100	0218060
	R-7MM	8.4	7	1.85 × 18	100	0218070
	R-8MM	9.4	8	1.95 × 19	100	0218080
	R-9MM	10.4	9	2.05 × 22	100	0218090
	R-10MM	11.4	10	2.3 × 23	100	0218100
	R-12MM	13.4	12	2.35 × 25	100	0218120
	R-14MM	16.4	14	2.35 × 30	100	0218140
	R-16MM	17.7	16	2.35 × 32	100	0218160
	R-18MM	19.7	18	2.6 × 38	100	0218180
	R-20MM	22.2	20	2.7 × 40	100	0218200
	R-22MM	25.0	22	2.9 × 43	50	0218220
	R-25MM	27.7	25	3.2 × 50	50	0218250
	R-30MM	33.1	30	3.5 × 55	25	0218300
	R-32MM	35.6	32	3.5 × 55	25	0218320
	R-35MM	36.6	35	3.5 × 60	20	0218350
	R-40MM	45.2	40	3.5 × 65	12	0218400

Note: Please mention the packing way when ordering.

● FLAT CABLE CLIP



Ref.	Model	Dimensions(mm)				Packing (Pcs/Bag)	Item Code
		H	A	B	Nail		
	F-4MM	6.0	3.8	4	1.7 × 14	100	0206004
	F-5MM	6.0	3.8	5	1.7 × 14	100	0206005
	F-6MM	6.5	4.1	6	1.7 × 16	100	0206006
	F-7MM	7.0	4.7	7	1.9 × 16	100	0206007
	F-8MM	7.5	5.0	8	2.1 × 19	100	0206008
	F-9MM	8.2	5.4	9	2.1 × 20	100	0206009
	F-10MM	8.6	5.7	10	2.3 × 21	100	0206010
	F-12MM	9.0	6.1	12	2.3 × 23	100	0206012
	F-14MM	11.0	8.0	14	2.3 × 25	100	0206014

Note: Please mention the packing way when ordering.

● HEAT SHRINKABLE TUBING

Heat shrinkable Tubing has excellent up-flammability and insulation. The shrinking temperature is very low and it can shrink very quickly. It is suitable for various electric insulation and bonding of cables and connectors and widely applied for connecting or end-handing, electric wire, insulating and harness of electric wire, corrosion-proof of metallic rods or tubes, and antenna protection.

● FUNCTION

1. Wire coat and insulation.
2. Make the joint of terminal block and wire insulated.
3. Divide the colors.
4. Water-proof.
5. Protection and insulation of insitors and electrical capacitors.

● STANDARD COLOR

Black, White, Red, Yellow, Green, Brown, Grey, Orange And Purple.


Ref.	Model	I.D (mm)	Supplied State Thickness (mm)	I.D (mm)	After State Thickness (mm)	Packing (m/Roll)	Item Code
	TJ-1	1	0.2±0.05	0.5	0.4±0.05	200	0210010
	TJ-1.5	1.5	0.2±0.05	0.75	0.4±0.05	200	0210015
	TJ-2	2	0.25±0.05	1	0.45±0.1	200	0210020
	TJ-2.5	2.5	0.25±0.05	1.25	0.45±0.1	200	0210025
	TJ-3	3	0.25±0.05	1.5	0.45±0.1	200	0210030
	TJ-3.5	3.5	0.25±0.05	1.75	0.45±0.1	200	0210035
	TJ-4	4	0.25±0.05	2	0.45±0.1	200	0210040
	TJ-5	5	0.35±0.05	2.5	0.55±0.1	100	0210050
	TJ-6	6	0.35±0.05	3	0.55±0.1	100	0210060
	TJ-7	7	0.35±0.05	3.5	0.55±0.1	100	0210070
	TJ-8	8	0.35±0.05	4	0.55±0.1	100	0210080
	TJ-9	9	0.35±0.05	4.5	0.55±0.1	100	0210090
	TJ-10	10	0.35±0.05	5	0.6±0.1	100	0210100
	TJ-11	11	0.35±0.05	5.5	0.6±0.1	100	0210110
	TJ-12	12	0.35±0.05	6	0.7±0.1	100	0210120
	TJ-13	13	0.35±0.1	6.5	0.4±0.05	100	0210130
	TJ-14	14	0.35±0.1	7	0.4±0.05	100	0210140
	TJ-15	15	0.35±0.1	7.5	0.4±0.05	100	0210150
	TJ-16	16	0.35±0.1	8	0.4±0.05	100	0210160
	TJ-17	17	0.35±0.1	8.5	0.4±0.05	100	0210170
	TJ-18	18	0.4±0.1	9	0.8±0.1	100	0210180
	TJ-20	20	0.5±0.1	10	0.9±0.1	100	0210190
	TJ-22	22	0.5±0.1	11	0.9±0.1	100	0210200
	TJ-25	25	0.5±0.1	12.5	0.9±0.1	50	0210250
	TJ-28	28	0.5±0.1	14	0.9±0.1	50	0210280
	TJ-30	30	0.5±0.1	15	1.0±0.2	50	0210300
	TJ-35	35	0.5±0.1	17.5	1.0±0.2	50	0210350
	TJ-40	40	0.5±0.1	20	1.0±0.2	50	0210400
	TJ-50	50	0.5±0.1	25	1.0±0.2	25	0210500
	TJ-60	60	0.6±0.1	30	1.2±0.2	25	0210600
	TJ-70	70	0.6±0.1	35	1.2±0.2	25	0210700
	TJ-80	80	0.6±0.1	40	1.2±0.2	25	0210801
	TJ-90	90	0.6±0.1	45	1.3±0.2	25	0210900
	TJ-100	100	0.7±0.1	50	1.3±0.2	25	0211000

• PLASTIC CABLE GLAND

Material: nylon66, 94V-2 agree, tight ring from rubber, oil resistant
Feature: special design, good strengthsile. The cable can be insert straight through and tighten up Easy without dismantling the fixed terminals
Application: used for machinery control box, distribution plate, machine and electrical etc.
Protection class: IP68
Color: grey, black

Ref.	Model	AG mm	Cable Range (mm)	GL mm	H mm	Packing (Pcs/Bag)	Item code
	PG7	M12 X 1.5	3-6.5	8	22	100	0167070
	PG9	M16 X 1.5	4-8	8	26	100	0167090
	PG11	M18 X 1.5	5-10	8	27	100	0167110
	PG13.5	M20 X 1.5	6-12	9	28	100	0167135
	PG16	M22 X 1.5	10-14	10	30	100	0167160
	PG19	M24 X 1.5	12-16	10	30	100	0167190
	PG21	M25 X 1.5	13-18	10	35	100	0167210
	PG25	M30 X 1.5	16-21	11	34	100	0167250
	PG29	M36 X 1.5	18-25	12	40	50	0167290
	PG36	M40 X 1.5	22-32	14	48	50	0167360
	PG42	M50 X 1.5	32-38	14	49	20	0167420
	PG48	M63 X 1.5	37-44	14	50	20	0167480


• DIMENSION

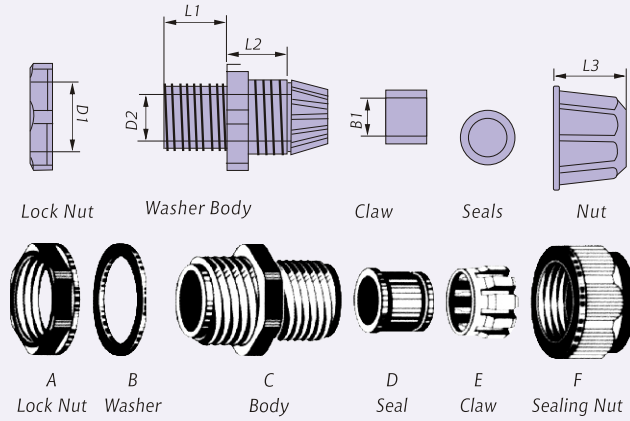


Ref.	Model	Cable Range(mm)	Thread O. D. L2(mm)	Thread Length L1(mm)	Packing (Pcs./Bag)	Item Code
	MG12A	4.5~8	12	9	100	0168120
	MG16A	6~10	16	15	100	0168160
	MG20A	9~14	20	15	100	0168200
	MG25A	13~18	25	15	100	0168250
	MG32A	18~25	32	15	20	0168320
	MG40A	24~30	40	20	20	0168400
	MG50A	31~41	50	22	20	0168500
	MG63A	44~51	63	25	20	0168630
	MG90A	66~77	90	25	5	0168900

• METAL CABLE GLAND

Material: Brass plating nickel.
Clamp joint: Nylon.
Seal part material: NBR.
Temperature range: -40℃ to 100℃ up to 120℃.
Protection class: IP68.

Ref.	Model	Range of bayonet(mm)	Dimensions (mm)			Packing (Pcs/Bag)	Item Code
			AG	GL	H		
 	DJ12	4-7	M12 X 1.5	6	19	100	0131215
	DJ14	3-6	M14 X 1.5	6	19	100	0131415
	DJ16	4-8	M16 X 1.5	7	20	100	0131615
	DJ18	6-10	M18 X 1.5	8	21	100	0131815
	DJ20	6-10	M20 X 1.5	8	22	100	0132015
	DJ22	10-14	M22 X 1.5	9	22	100	0132215
	DJ24	10-14	M24 X 1.5	10	22	100	0132415
	DJ27	13-18	M27 X 2	11	25	50	0132715
	DJ30	13-18	M30 X 2	11	25	50	0133015
	DJ33	15-22	M33 X 2	11	28	50	0133315
	DJ36	18-25	M36 X 2	11	29	24	0133615
	DJ42	22-28	M42 X 2	12	29	16	0134215
	DJ48	25-32	M48 X 2	13	35	9	0134815
	DJ54	32-38	M54 X 2	14	37	9	0135415
	DJ60	37-44	M60 X 2	14	38	9	0136015
	DJ63	37-44	M63 X 2	14	38	9	0136315

Ref.	Model	Dimensions(mm)				Weight (g)	Packing Pcs/box	Item Code
		H	D	d	L			
 	SC(JGA)-10	5.3	6.6	4.7	27.5	2.8	1000	0940010
	SC(JGA)-16	6.4	7.8	5.6	29.5	4.8	1000	0940016
	SC(JGA)-25	8.3	9.5	7.1	39.0	8.5	400	0940025
	SC(JGA)-35	8.3	10.8	8.2	44.0	12.5	200	0940035
	SC(JGA)-50	10.3	13.0	10.0	50.5	18.5	100	0940050
	SC(JGA)-70	12.6	14.7	11.5	54.6	20.0	800	0940070
	SC(JGA)-95	12.8	16.7	15.5	58.8	33.5	50	0940095
	SC(JGA)-120	12.8	19.0	15.6	69.0	43.0	40	0940120
	SC(JGA)-150	12.8	21.0	16.5	76.5	56.5	30	0940150
	SC(JGA)-185	16.5	23.0	18.4	80.2	85.0	20	0940185
	SC(JGA)-240	16.5	26.4	21.2	89.0	116.5	20	0940240
	SC(JGA)-300	16.5	28.6	23.4	95.0	140.5	10	0940300
	SC(JGA)-400	116.5	34.0	27.0	113.0	265.0	10	0940400
	SC(JGA)-500	20.5	38.0	31.0	123.0	369.0	8	0940500
	SC(JGA)-630	20.5	45.0	37.0	133.0	550.5	4	0940630

● **COPPER LUG**


High conductivity seamless copper tube to BS 2874-C101 ASTM B152-C11000

● **FEATURES**

Provided with inspection window, thus ensuring full conductor insertion. Entrance chamfered to facilitate cable entry smoothly & easily. High wall thickness, giving termination, excellent electrical & mechanical properties. Simple installation with readily available tools.

● **FINISH**

Uniformly Electro-tin plated for operating temperatures upto 150°C. For operating temperatures above 150°C upto 350°C Electrolytic nickel plated is suggested.


Ref.	Model	Dimensions(mm)				Packing (Pcs/Box)	Item Code
		A	D	d	L		
	SC(JGK)-1.5	4.2, 5.2	3.5	1.8	18	2000	0930001
	SC(JGK)-2.5	4.2, 5.2, 6.2	4.0	2.5	19	2000	0930002
	SC(JGK)-4	5.2, 6.2	4.8	3.1	21	1000	0930004
	SC(JGK)-6	5.2, 6.2, 8.2	5.5	3.8	24	1000	0930006
	SC(JGK)-10	6.2, 8.2	6.8	4.8	25.5	1000	0930010
	SC(JGK)-16	6.2, 8.2, 10.5	7.5	5.5	30.5	400	0930016
	SC(JGK)-25	8.2, 8.2, 10.5	9.0	7.0	34	400	0930025
	SC(JGK)-35	6.2, 8.2, 10.5, 12.5	10.5	8.2	38	200	0930035
	SC(JGK)-50	8.2, 10.5, 12.5	12.5	9.8	45	100	0930050
	SC(JGK)-70	8.2, 10.5, 12.5	14.5	11.5	50	100	0930070
	SC(JGK)-95	10.5, 12.5	17.5	13.8	55.5	50	0930095
	SC(JGK)-120	10.5, 16.5	19.5	15.5	63	50	0930120
	SC(JGK)-150	12.5, 16.5	21.0	16.5	71	30	0930150
	SC(JGK)-185	16.5	23.5	18.8	78	20	0930185
	SC(JGK)-240	16.5	26.5	21.0	92	20	0930240
	SC(JGK)-300	16.5, 20.5	30.0	24.0	102	10	0930300
	SC(JGK)-400	16.5, 20.5	34.0	26.5	113	10	0930400
	SC(JGK)-500	16.5, 20.5	38.0	30.0	123	8	0930500
	SC(JGK)-630	20.5	45.0	35.0	135	4	0930630

● **SPIRAL WRAPPING BANDS**

Material: PE

Usage: fix one end with safety belt fist, then circle the wires clockwise to make them tighten.

Application: a protection wear for electric wires, and make them insulation and look nice.

Ref.	Model	Dimension(mm)			Wrapping Range(mm)	Item Code
		d	D	W		
	SWB-06	4	6	7.0	4-50	0193306
	SWB-08	6	8	10.8	6-60	0193308
	SWB-10	7.5	10	11.4	7.5-60	0193310
	SWB-12	9	12	13.9	9-65	0193320
	SWB-16	12	15	15.0	12-75	0193316
	SWB-19	15	19	18.2	15-100	0193319
	SWB-25	20	24	19.6	20-130	0193325
						

● **HIGH VOLTAGE INSULATOR**

1. Material: Bulk molding compound, unsaturated polyester.


2. Nut inserts: Brass, various specifications are available.

3. Test specifications: JIS C3801 and JIS C3851.

4. Color: Dark brown or dark red.

Ref.	Model	End diameters (A/B).mm	Height(H).mm	Surface leakage distance, mm	Rated voltage. KV	Item Code
	EL-30N	100	310	630	36	0512034
	EL-24	70	210	356	24	0512240
	EL-15	70	142	210	15	0512150
	EL-12	58	130	172	12	0512120
	EL-6M	70	90	125	7.2	0512063
	EL-3M	70	60	88	3.6	0512033
	V6090	60	90	140	8.5	0206090
	V60155	60	155	197	12	0260155
	V70210	70	210	285	22	0270210
	J06-170	80	300	520	36	1006170

● **DIMENSION**

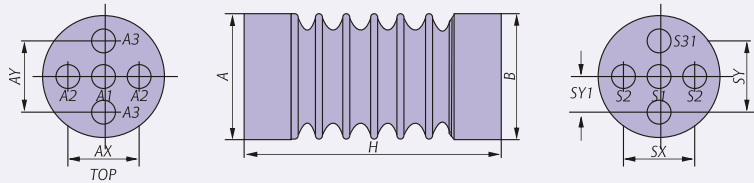

● **SM INSULATOR**

Ref.	Model	Tensile Strength(LBS)	Torque Strength (FT LBS)	Withstand Voltage(kV)	Screw	Case Qty.(Pcs)	Item Code
	SM25	500	6	6	M6	600	0191325
	SM30	550	8	8	M8	500	0191330
	SM35	600	10	10	M8	400	0191335
	SM40	650	10	12	M8	300	0191340
	SM45	1000	20	15	M8	300	0191345
	SM51	1000	20	15	M8	320	0191351
	SM60	1500	40	10	M8	150	0191360
	SM76	1500	40	25	M10	120	0191376

● SAFETY-TYPE WIRE JOINTS

Shell material: Nylon 66, 94V-2.

Usage: peel the coat of wire, then insert to tube, use pincers to fix them

Feature: Nylon shell, long copper tube, easy to conduct electricity and hold wire tightly.


Ref.	Model	Altitude (mm)	Width(mm)		ID of copper tube (mm)	Suitable wires		Packing (Pcs/Bag)	Item Code
			B	C		mm ²	AWG		
	CHS-φ3	17.8	7.2	3.6	2.5	1.25	22-16	100	0381903
	CHS-φ4	21.0	8.2	4.0	2.9	2	16-14	100	0381904
	CHS-φ5	22.5	9.0	4.8	3.9	5.5	12-10	100	0381905
	CHS-φ6	25.0	10.0	5.6	4.5	8	8	100	0381906
	CHS-φ7	24.2	11.0	6.5	5.4	10	8-6	100	0381907
	CHS-φ8	25.6	11.8	7.5	6.0	13	6	100	0381908
	CHS-φ10	29.5	13.5	9.3	7.5	16	4	100	0381910

● EXPAND NAILS

Material: made up of PE

Color: white, grey

Ref.	Model	Dimension(mm)			Packing (Pcs/Bag)	Item Code
		L	D	d		
	EN-06	29.8	6.0	4.9	100	0351406
	EN-08	38.6	7.9	5.3	100	0351408
	EN-10	42.7	9.9	5.8	100	0351410
	EN-12	47.9	11.6	6.3	100	0351412




● R TYPE CABLE CLAMPS

Material: nylon 66, 94V-2.

Usage: put cable in, fix by screw



Ref.	Model	A(mm)	B(mm)	C		D(mm)	Packing (Pcs/Bag)	Item Code
				MM	INCH			
	S-1/8R	9.5	9.6	3.2	1/8"	19.8	100	0380108
	S-3/16R	9.6	9.6	4.8	3/16"	19.8	100	0380316
	S-1/4R	12.0	10.0	6.35	1/4"	22.0	100	0380104
	S-5/16R	12.0	10.0	7.9	5/16"	22.0	100	0380516
	S-3/8R	12.5	12.0	9.5	3/8"	24.0	100	0380308
	S-1/2R	15.2	12.0	12.7	1/2"	31.0	100	0380102
	S-5/8R	18.2	12.0	15.8	5/8"	34.3	100	0380508
	S-3/4R	18.2	12.0	19.4	3/4"	35.0	100	0380304
	S-1R	22.0	12.0	25.4	1"	43.0	100	0380100
	S-17/16R	24.0	12.0	27.5	17/16"	50.0	100	0381716
	S-5/4R	26.2	12.0	31.8	1 1/4"	46.2	100	0380504
	S-3/2R	30.0	12.0	36.7	1 1/2"	50.0	100	0380302



● WIRE CONNECTORS

Material: UL Nylon66, with spring inside then


Usage: peel wire coat, insert the wire in, the tighten.

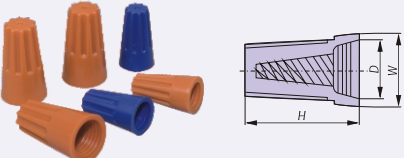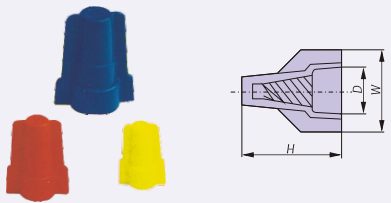Ref.	Model	Height (mm)	Width (mm)	Inner Dia D(mm)	Suitable wire	Packing (Pcs/Bag)	Item Code
	G-P71	15	8.7	6.5	Min #20×1 + #22×1 Max#16×2	100	0371671
	G-P72	18	10.0	7.5	Min #20×3 Max#16×3	100	0371672
	G-P73	23	11.2	9.5	Min #20×3 Max#16×3 + #18×1	100	0371673
	G-P74	24.2	13.6	10.8	Min #14×1 + #18×1 Max#14×4 + #18×1	100	0371674
	G-P75	27.8	16.1	12.7	Min #14×2 Max#10×2 + #12×2	100	0371675
	G-P1	22.0	19.0	9.8	Min #18×2 Max#12×3	100	0371601
	G-P2	29.0	22.0	12.5	Min #14×2 Max#10×4	100	0371602

● VINYL WIRE END CAPS


Material: made up of PVC

Color: red, white, blue, yellow, black, green, brown available upon special request.

Ref.	Model	mm ²	Dimension(mm)		Packing (Pcs/Bag)	Item Code
			D1Φ	D2Φ		
	V-1.25	1.25	3.3	3.1	1000	0220012
	V-2	2	4.5	3.7	1000	0220020
	V-3.5	3.5	5.7	4.1	1000	0220035
	V-5.5	5.5	5.7	5.2	1000	0220055
	V-8	8	7.2	6.2	1000	0220080
	V-14	14	10.0	8.0	1000	0220140
	V-22	22	12.0	9.5	1000	0220221
	V-38	38	14.0	11.8	1000	0220380
	V-60	60	16.8	13.5	1000	0220600
	V-70	70	18.0	15.0	1000	0220700
	V-80	80	19.0	16.0	1000	0220800
	V-100	100	22.0	18.0	1000	0221000
	V-125	125	24.0	20.0	1000	0221250
	V-150	150	24.4	22.0	1000	0221500
	V-200	200	32.0	24.0	1000	0222000
	V-250	250	38.0	26.5	1000	0222500
	V-325	325	38.0	29.0	1000	0223250
	V-400	400	44.0	37.0	1000	0224000
	V-560	500	46.0	40.4	1000	0225600
	V-630	630	52.0	45.0	1000	0226300

● PIN INSULATED TERMINALS

Ref.	Model	F Φ (mm)	Dimension (mm)			Color	Packing (Pcs/Bag)	Item Code
			L	H	D Φ			
Lead section:0.5~1.5mm²(22-16) I _{max} = 19A								
	PTV1.25-9	1.9	19.0	10.0	4.3	Red	1000	0212509
	PTV1.25-10	1.9	20.0	10.0	4.3	Red	1000	0212510
	PTV1.25-12	1.9	22.0	10.0	4.3	Red	1000	0212512
	PTV1.25-13	1.9	23.0	10.0	4.3	Red	1000	0212513

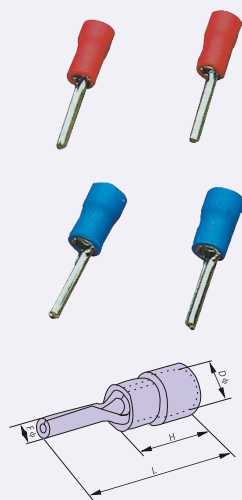

Lead section:1.5~2.5mm²(16~14) I_{max}= 27A

	PTV2-9	1.9	19.0	10.0	4.9	Blue	1000	0210009
	PTV2-10	1.9	20.0	10.0	4.9	Blue	1000	0212010
	PTV2-12	1.9	22.0	10.0	4.9	Blue	1000	0212012
	PTV2-13	1.9	23.0	10.0	4.9	Blue	1000	0220013


Lead section:4~6mm²(12~10) I_{max}= 48A

	PTV5.5-13	2.8	25.5	12.5	6.7	Yellow	1000	0255013
--	-----------	-----	------	------	-----	--------	------	---------

● CHIP-SHAPED PRE-INSULATING TERMINAL



Ref.	Model	Dimension (mm)					Color	Packing (Pcs/Bag)	Item Code
		B	L	F	D	H			
Lead section:0.5~1.5mm ² (22-16) I _{max} = 19A									
	DBV1.25-10	2.4	20.0	10.0	4.3	10	Red	1000	0112510
	DBV1.25-11	2.4	21.0	11.0	4.3	10	Red	1000	0112511
	DBV1.25-14	2.4	24.0	14.0	4.3	10	Red	1000	0112514
	DBV1.25-18	2.4	28.0	18.0	4.3	10	Red	1000	0112518

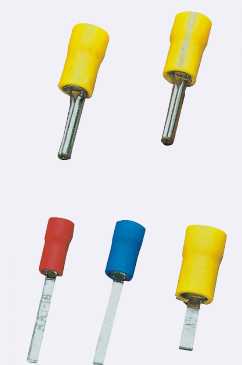


Lead section:1.5~2.5mm²(16~14) I_{max}= 27A


	DBV2-9	2.5	19.0	9.0	4.9	10	Blue	1000	0120009
	DBV2-10	2.5	24.0	14.0	4.9	10	Blue	1000	0120010
	DBV2-18	2.5	28.0	18.0	4.9	10	Blue	1000	0120018

Lead section:4~6mm²(12~10) I_{max}= 48A

	DBV5.5-10	2.8	22.5	10.0	5.6	13	Yellow	1000	0155010
	DBV5.5-14	4.5	26.5	14.0	5.6	13	Yellow	1000	0155014
	DBV5.5-18	4.5	30.5	18.0	5.6	13	Yellow	1000	0155018



● SPADE INSULATED TERMINALS

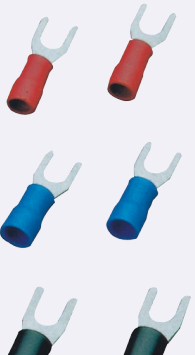Ref.	Model	USA Screw	d2 (mm)	Dimension (mm)					Color	Packing (Pcs/Bag)	Item Code
				B	L	F	D Φ	H			
Lead section:0.5~1.5mm²(22~16) I _{max} =9A											
	SV1.25-3	#4	3.2	5.7	21.2	6.5	4.3	10.0	Red	1000	0125300
	SVS1.25-3.5	#6	3.7	5.7	21.2	6.5	4.3	10.0	Red	1000	0125351
	SVL1.25-3.5	#6	3.7	6.4	21.2	6.5	4.3	10.0	Red	1000	0125352
	SVS1.25-4	#8	4.3	6.4	21.2	6.5	4.3	10.0	Red	1000	0125401
	SVM1.25-4	#8	4.3	7.2	21.2	6.5	4.3	10.0	Red	1000	0125402
	SVL1.25-4	#8	4.3	8.1	21.2	6.5	4.3	10.0	Red	1000	0125403
	SVS1.25-5	#10	5.3	8.1	21.2	6.5	4.3	10.0	Red	1000	0125501
	SVL1.25-5	#10	5.3	9.5	21.2	6.5	4.3	10.0	Red	1000	0125502
	SVS1.25-6	1/4	6.5	9.5	21.2	6.5	4.3	10.0	Red	1000	0125601
	SVL1.25-6	1/4	6.5	12.0	21.2	11.0	4.3	10.0	Red	1000	0125602



Lead section:1.5~2.5mm²(16~14) I_{max}= 27A

	SV-3	#4	3.2	5.7	21.2	6.5	4.9	10.0	Blue	1000	0200300
	SVS2-3.5	#6	3.7	5.7	21.2	6.5	4.9	10.0	Blue	1000	0200351
	SVL2-3.5	#6	3.7	6.4	21.2	6.5	4.9	10.0	Blue	1000	0200352
	SVS2-4	#8	4.3	6.4	21.2	6.5	4.9	10.0	Blue	1000	0200401
	SVM2-4	#8	4.3	7.2	21.2	6.5	4.9	10.0	Blue	1000	0200402
	SVL2-4	#8	4.3	8.1	21.2	6.5	4.9	10.0	Blue	1000	0200403
	SVS2-5	#10	5.3	8.1	21.2	6.5	4.9	10.0	Blue	1000	0200501
	SVL2-5	#10	5.3	9.5	21.2	6.5	4.9	10.0	Blue	1000	0200502
	SVS2-6	1/4	6.5	9.5	21.2	6.5	4.9	10.0	Blue	1000	0200601
	SVL2-6	1/4	6.5	12.0	21.2	11.0	4.9	10.0	Blue	1000	0200602

Lead section:2.5~4mm²(14~12) I_{max}= 37A

	SV3.5-4	#8	4.3	8.0	24.8	7.0	6.2	12.5	Black	1000	0350400
	SV3.5-5	#10	5.3	8.0	24.8	7.0	6.2	12.5	Black	1000	0350500
	SV3.5-6	1/4	6.5	12.0	28.0	12.1	6.2	12.5	Black	1000	0350600

Lead section:4~6mm²(12~10) I_{max}= 48A

	SV5.5-3.5	#6	3.7	8.3	25.2	7.5	6.7	12.5	Yellow	1000	0550350
	SVS5.5-4	#8	4.3	8.3	25.2	7.5	6.7	12.5	Yellow	1000	0550401
	SVL5.5-4	#8	4.3	9.0	23.9	7.5	6.7	12.5	Yellow	1000	0550402
	SV5.5-5	#10	5.3	9.0	23.9	7.5	6.7	12.5	Yellow	1000	0550500
	SVS5.5-6	1/4	6.5	9.0	23.9	7.5	6.7	12.5	Yellow	1000	0550601
	SVL5.5-6	1/4	6.5	12.0	31.2	12.0	6.7	12.5	Yellow	1000	0550602
	SV5.5-8	5/16	8.4	14.0	30.0	11.5	6.7	12.5	Yellow	1000	0550800

• RING INSULATED TERMINALS

Ref.	Model	USA Screw	d2 (mm)	Dimension (mm)					Color	Packing (Pcs/Bag)	Item Code
				B	L	F	D Φ	H			

Lead section:0.5~1.5mm²(22-16) I_{max}=19A

RV1.25-3	#4	3.2	5.7	17.8	4.95	4.3	10.0	Red	1000	1125300
RVS1.25-3.5	#6	3.7	5.7	17.8	4.95	4.3	10.0	Red	1000	1125351
RVM1.25-3.5	#6	3.7	6.6	20.1	6.3	4.3	10.0	Red	1000	1125352
RVL1.25-3.5	#6	3.7	8.0	21.5	7.0	4.3	10.0	Red	1000	1125353
RVS1.25-4	#8	4.3	6.6	20.1	6.3	4.3	10.0	Red	1000	1125401
RVL1.25-4	#8	4.3	8.0	21.5	7.0	4.3	10.0	Red	1000	1125402
RV1.25-5	#10	5.3	8.0	21.5	7.0	4.3	10.0	Red	1000	1125500
RV1.25-6	1/4	6.5	11.6	27.5	11.1	4.3	10.0	Red	1000	1125600
RV1.25-8	5/16	8.4	11.6	27.5	11.1	4.3	10.0	Red	1000	1125808
RV1.25-10	3/8	10.5	13.6	31.6	13.9	4.3	10.0	Red	1000	1125100

Lead section:1.5-2.5mm²(16~14) I_{max}=27A

RV2-3	#4	3.2	6.6	17.8	4.3	4.9	10.0	Blue	1000	1200300
RVS2-3.5	#6	3.7	6.6	17.8	4.3	4.9	10.0	Blue	1000	1200351
RVM2-3.5	#6	3.7	6.6	21.0	7.0	4.9	10.0	Blue	1000	1200352
RVL2-3.5	#6	3.7	8.5	22.5	7.75	4.9	10.0	Blue	1000	1201353
RVS2-4	#8	4.3	6.6	21.0	7.0	4.9	10.0	Blue	1000	1200401
RVL2-4	#8	4.3	8.5	22.5	7.75	4.9	10.0	Blue	1000	1200402
RVS2-5	#10	5.3	8.5	22.5	7.75	4.9	10.0	Blue	1000	1200501
RVL2-5	#10	5.3	9.5	22.5	7.25	4.9	10.0	Blue	1000	1200502
RV2-6	1/4	6.5	12.0	27.6	11.0	4.9	10.0	Blue	1000	1200600
RV2-8	5/16	8.4	12.0	27.6	11.0	4.9	10.0	Blue	1000	1200800
RV2-10	3/8	10.5	13.6	30.2	13.9	4.9	10.0	Blue	1000	1201000

Lead section:2.5~4mm²(14~12) I_{max}=37A

RV3.5-4	#8	4.3	8.0	24.5	7.7	6.2	12.5	Black	1000	1350400
RVS3.5-5	#10	5.3	8.0	24.5	7.7	6.2	12.5	Black	1000	1350501
RVL3.5-5	#10	5.3	12.0	27.9	7.7	6.2	12.5	Black	1000	1350502
RV3.5-6	1/4	6.5	12.0	27.9	7.7	6.2	12.5	Black	1000	1350600

Lead section:4~6mm²(12~10) I_{max}=48A

RV5.5-3.5	#6	3.7	7.2	21.4	5.9	6.7	12.5	Yellow	1000	1550350
RVS5.5-4	#8	4.3	7.2	21.5	5.9	6.7	12.5	Yellow	1000	1550401
RVL5.5-4	#8	4.3	9.5	25.5	8.3	6.7	12.5	Yellow	1000	1550402
RV5.5-5	#10	5.3	9.5	25.5	8.3	6.7	12.5	Yellow	1000	1550500
RV5.5-6	1/4	6.5	12.0	31.5	13.0	6.7	12.5	Yellow	1000	1550600
RV5.5-8	5/16	8.4	15.0	33.7	13.7	6.7	12.5	Yellow	1000	1550800
RV5.5-10	3/8	10.5	15.0	33.7	13.7	6.7	12.5	Yellow	1000	1551000
RV5.5-12	1/2	13.0	19.2	38.1	16.0	6.7	12.5	Yellow	1000	1551200

• MALE INSULATED DISCONNECTS

Ref.	Model	Meme tab (mm)	Thickness (mm)	Dimension (mm)					Packing (Pcs/Bag)	Item Code
				B	d Φ	D Φ	L	H		

Lead section:0.5~1.5mm²(22~16) I_{max}=10A

MDD1.25-110(5)	0.5×2.8	0.5	2.8	1.7	4.3	17.7	10	1000	1251105
MDD1.25-110(8)	0.8×2.8	0.8	2.8	1.7	4.3	17.7	10	1000	1251108
MDD1.25-187(5)	0.5×4.75	0.5	4.75	1.7	4.3	20.0	10	1000	1251875
MDD1.25-187(8)	0.8×4.75	0.8	4.75	1.7	4.3	18.5	10	1000	1251878
MDD1.25-250	0.8×6.35	0.4	6.35	1.7	4.3	21.0	10	1000	1252500

Lead section:1.5-2.5mm²(16-14) I_{max}=15A

MDD2-187(5)	0.5×4.75	0.5	4.75	2.3	4.3	20.0	10	1000	2001875
MDD2-187(8)	0.8×4.75	0.8	4.75	2.3	4.3	18.5	10	1000	2001878
MDD2-250	0.8×6.35	0.4	6.35	2.3	4.3	21.0	10	1000	2002500

Lead section:4~6mm²(12~10) I_{max}=24A

MDD5.5-250	0.8×6.35	0.4	6.35	3.4	5.7	25.0	10	1000	2550250
------------	----------	-----	------	-----	-----	------	----	------	---------

• FEMALE INSULATED DISCONNECTS

Ref.	Model	Meme tab (mm)	Thickness (mm)	Dimension (mm)					Packing (Pcs/Bag)	Item Code
				B	d Φ	D Φ	L	H		

Lead section:0.5~1.5mm²(22~16) I_{max}=10A




FDD1.25-110(5)	0.5×2.8	0.3	3.8	1.70	3.80	19.0	10	1000	0251105
FDD1.25-110(8)	0.8×2.8	0.3	3.8	1.70	3.80	19.0	10	1000	0251108
FDD1.25-187(5)	0.5×4.75	0.35	5.6	1.70	3.80	19.0	10	1000	0251875
FDD1.25-187(8)	0.8×4.75	0.35	5.6	1.70	3.80	19.0	10	1000	0251878
FDD1.25-205	1.5×5.2	0.35	6.5	1.70	3.80	20.0	10	1000	0125205
FDD1.25-250	0.8×6.35	0.4	7.4	1.70	3.80	21.0	10	1000	0125250

Lead section:1.5~2.5mm²(16~14) I_{max}=15A

FDD2-110(5)	0.5×0.8	0.3	3.8	2.3	4.3	19.0	10	1000	0201105
FDD2-110(8)	0.8×2.8	0.3	3.8	2.3	4.3	19.0	10	1000	0201108
FDD2-187(5)	0.5×4.75	0.35	5.6	2.3	4.3	19.0	10	1000	0201875
FDD2-187(8)	0.8×4.75	0.35	5.6	2.3	4.3	19.0	10	1000	0201878
FDD2-205	0.5×5.2	0.35	6.5	2.3	4.3	20.0	10	1000	0200205
FDD2-250	0.8×6.35	0.4	7.4	2.3	4.3	21.0	10	1000	0200250
FDD2-312	0.8×0.8	0.4	9.0	2.3	4.3	23.0	10	1000	0200312

Lead section:4~6mm²(12~10) I_{max}=24A

FDD5.5-250	0.5×6.35	0.4	7.4	3.4	5.7	25.0	14	1000	0550250
FDD5.5-375	1.2×9.4	0.5	10.9	3.4	5.7	29.6	14	1000	0550375

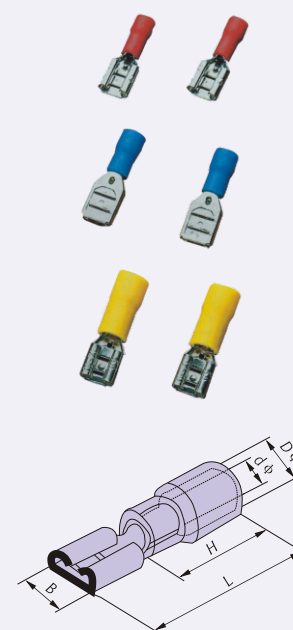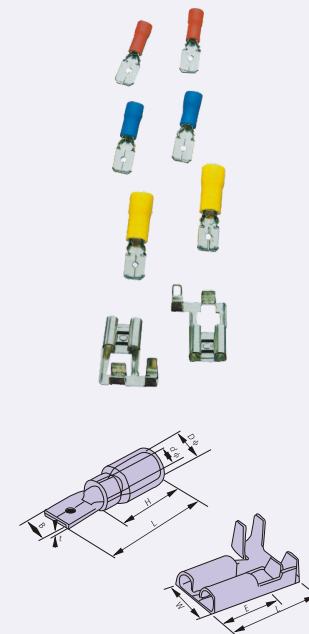

● BUTT INSULATED CONNECTORS

Ref.	Model	AWG	mm ²	Dimension (mm)			I _{max} (A)	Color	Packing (Pcs/Bag)	Item Code
				I	DΦ	L				

Insulated butt connectors

BV1.25	22~16	0.5~1.5	15.0	1.7	26.0	19	Red	1000	0100125
BV2	16~14	1.5~2.5	15.0	2.3	26.0	27	Blue	1000	0100200
BV5.5	12~10	4~6	15.0	3.4	26.0	48	Yellow	1000	0200550
BV8	#8	6~10	21.0	4.5	32.0	62	Red	1000	0200800
BV14	#6	10~16	26.0	5.8	42.0	88	Blue	1000	0101400
BV22	#4	16~25	29.0	7.7	50.0	115	Yellow	1000	0102200
BV38	#2	35~50	32.0	9.4	55.0	160	Red	1000	0103800

Insulated butt connectors


PVT1.25	22~16	0.5~1.5	8.0	1.7	16.0	19A	Red	1000	0110125
PVT2	16~14	1.5~2.5	8.0	2.3	16.0	27A	Blue	1000	0110200
PVT5.5	12~10	4~6	8.5	3.4	20.5	48A	Yellow	1000	0110550



● NAKED TERMINAL IN THE MIDDLE

Ref.	Model	Dimension (mm)			Conductor section		Packing (Pcs/Bag)	Item Code
		L	DΦ	dΦ	A.W.G	mm ²		

B-1.25	15.0	3.3	1.7	22~16	0.5~1.5	1000	0010125
B-2	15.0	4.0	2.3	16~14	1.5~2.5	1000	0010200
B-3.5	15.0	5.0	3.0	14~12	2.5~4.0	1000	0010350
B-5.5	15.0	5.5	3.4	12~10	4.0~6.0	1000	0010550
B-8	21.0	7.1	4.5	#8	10.0	1000	0010080
B-14	26.0	9.0	5.8	#6	16.0	1000	0010140
B-22	29.0	11.4	7.7	#4	25.0	1000	0010220
B-38	32.0	13.3	9.4	#2	35.0	1000	0010380
B-60	36.0	15.4	11.4	1/0	50.0	1000	0010600
B-70	37.0	17.5	13.3	2/0	70.0	1000	0010700
B-80	38.0	19.4	14.5	3/0	95.0	1000	0010800
B-100	38.0	22.0	16.4	4/0	120.0	1000	0010100
B-150	54.0	26.5	19.5	250~300MCM	150.0	1000	0011500
B-180	57.0	28.5	21.0	300~350MCM	185.0	1000	0011800
B-200	63.0	32.5	24.0	400MCM	240.0	1000	0012000
B-325	72.0	37.0	28.0	500~600MCM	300.0	1000	0013250

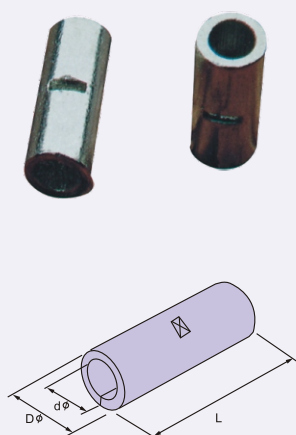

● BULLET & RECEPTACLE INSULATED DISCONNECTS

Ref.	Model	Thickness (mm)	Dimension(mm)						Color	Packing (Pcs/Bag)	Item Code
			bΦ	F	DΦ	dΦ	H	L			

Lead section: 0.5~1.5mm²(22~16) I_{max} = 10A

MPD1.25-156	0.4	4.0	11.0	2.7	1.7	10.0	21.0	Red	1000	0120156
-------------	-----	-----	------	-----	-----	------	------	-----	------	---------

Lead section: 1.5~2.5mm²(16~14) I_{max} = 15A

MPD2-156	0.4	4.0	16.0	2.7	1.7	10.0	21.0	Blue	1000	0200156
MPD2-195	0.4	5.0	16.0	2.7	1.7	10.0	21.0	Blue	1000	0200195

Lead section: 4~6mm²(12~10) I_{max} = 24A

MPD5.5-195	0.4	4.0	11.0	4.5	3.4	14.0	25.0	Yellow	1000	0550195
------------	-----	-----	------	-----	-----	------	------	--------	------	---------

Lead section: 0.5~1.5mm²(22~16) I_{max} = 10A


FRD1.25-156	0.4	5.4	16.0	2.7	1.7	13.0	24.5	Red	1000	1125156
-------------	-----	-----	------	-----	-----	------	------	-----	------	---------

Lead section: 1.5~2.5mm²(16~14) I_{max} = 15A

FRD2-156	0.4	4.0	6.3	3.3	2.3	14.0	24.5	Blue	1000	1200156
FRD2-195	0.4	5.0	7.0	3.3	2.3	14.0	24.5	Blue	1000	1200195

Lead section: 4~6mm²(12~10) I_{max} = 24A

FRD5.5-195	0.4	5.0	7.0	4.5	2.4	14.0	29.5	Yellow	1000	1550195
------------	-----	-----	-----	-----	-----	------	------	--------	------	---------

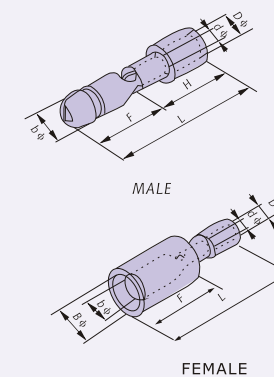

● FULLY VINYL INSULATED DISCONNECTS

Ref.	Model	Meme Tab (mm)	Dimension(mm)					Packing (Pcs/Bag)	Item Code
			W	B	DΦ	dΦ	L		

Lead section: 0.5~1.5mm²(22~16) I_{max} = 10A


FDFD1.25-187(5)	0.5 × 4.75	5.6	3.28	4.0	1.7	20.0	1000	2251875
FDFD1.25-187(8)	0.8 × 4.75	5.6	3.28	4.0	1.7	20.0	1000	2251878
FDFD1.25-250	0.8 × 6.35	7.4	3.28	4.0	1.7	21.5	1000	1250250

Lead section: 1.5~2.5mm²(16~14) I_{max} = 15A

FDFD2-187(5)	0.5 × 4.75	5.6	5.0	4.5	2.3	20.0	1000	0021875
FDFD2-187(8)	0.8 × 4.75	5.6	5.0	4.5	2.3	20.0	1000	0021878
FDFD2-250	0.8 × 6.35	7.4	5.0	4.5	2.3	21.5	1000	0202500

Lead section: 4~6mm²(12~10) I_{max} = 24A

FDFD5.5-250	0.8 × 6.35	7.4	6.6	5.7	3.4	25.5	1000	0552500
-------------	------------	-----	-----	-----	-----	------	------	---------

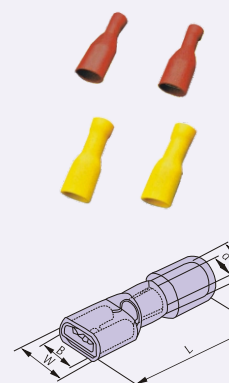

● PIGGY BACK DISCONNECTS

Ref.	Model	Meme Tab (mm)	Dimension(mm)						Packing (Pcs/Bag)	Item Code
			B	B1	B	D Φ	d Φ	L		

Lead section:0.5~1.5mm²(22~16) I_{max}=10A


PBDD1.25-250	0.8×6.35	7.4	6.3	10.0	3.8	1.7	21.5	1000	1125250
--------------	----------	-----	-----	------	-----	-----	------	------	---------

Lead section:0.5~1.5mm²(22~16) I_{max}=10A

PBDD2-250	0.8×6.35	7.4	6.3	10.0	4.3	2.3	21.5	1000	1200250
-----------	----------	-----	-----	------	-----	-----	------	------	---------


Lead section:4~6mm²(12~10) I_{max}=24A

PBDD5.5-250	0.8×6.35	7.4	6.3	14.0	5.7	3.4	25.0	1000	1550250
-------------	----------	-----	-----	------	-----	-----	------	------	---------

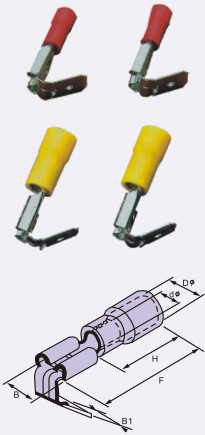



● TUBE NAKED TERMINAL

Ref.	Model	Dimension(mm)					Conductor section		Packing (Pcs/Bag)	Item Code
		L	D	C	B	W	A.W.G	mm²		

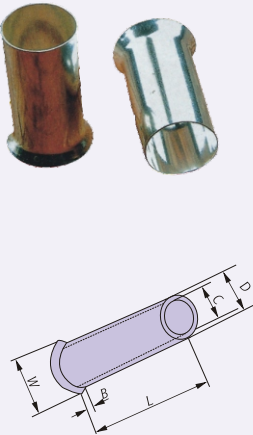

EN0506	6.0	1.3	1.0	0.7	2.1	#22	0.5	1000	0100506
EN7506	6.0	1.5	1.2	0.7	2.5	#20	0.75	1000	0107506
EN1006	6.0	1.7	1.4	0.7	2.7	#18	1.0	1000	0101006
EN1010	10.0	1.7	1.4	0.7	2.7	#18	1.0	1000	0101010
EN1507	7.0	2.0	1.7	1.0	3.5	#16	1.5	1000	0101507
EN1510	10.0	2.0	1.7	1.0	3.5	#16	1.5	1000	0101510
EN2507	7.0	2.5	2.2	1.0	2.5	#14	2.5	1000	0102507
EN2512	12.0	2.5	2.2	1.0	2.5	#14	2.5	1000	0102512
EN4009	9.0	3.2	2.8	1.0	4.0	#12	4.0	1000	0104009
EN4012	12.0	3.2	2.8	1.0	4.0	#12	4.0	1000	0104012
EN6010	10.0	3.9	3.5	1.0	4.8	#10	6.0	1000	0106010
EN6012	12.0	3.9	3.5	1.0	4.8	#10	6.0	1000	0106012
EN6015	15.0	3.9	3.5	1.0	4.8	#10	6.0	1000	0106015
EN10-12	12.0	4.9	4.5	1.2	5.8	#7	10.0	1000	0110012
EN10-15	15.0	4.9	4.5	1.2	5.8	#7	10.0	1000	0110015
EN10-18	18.0	4.9	4.5	1.2	5.8	#7	10.0	1000	0110018
EN16-12	12.0	6.2	5.8	1.5	7.5	#5	16.0	1000	0116012
EN16-15	15.0	6.2	5.8	1.5	7.5	#5	16.0	1000	0116015
EN16-18	18.0	6.2	5.8	1.5	7.5	#5	16.0	1000	0116018
EN25-16	16.0	7.9	7.5	1.8	9.2	#4	25	1000	0125016
EN25-22	22.0	7.9	7.5	1.8	9.2	#4	25	1000	0125022
EN35-16	16.0	8.7	8.3	2.0	10	#2	35	1000	0135016
EN35-25	25.0	8.7	8.3	2.0	10	#2	35	1000	0135025
EN50-20	20.0	10.9	1.3	2.0	12.4	#1	50	1000	0150020
EN50-25	25.0	10.9	1.3	2.0	12.4	#1	50	1000	0150025

Ref.	Model	Dimension(mm)						Conductor section		Insulation Color	Packing (Pcs/Bag)	Item Code
		F	L	W	B	D	C	A.W.G	mm²			



E0506	6.0	12.0	2.6	6.0	1.3	1.0	#22	0.5	Orange	1000	0000506
E0508	8.0	14.0	2.6	6.0	1.3	1.0	#22	0.5	White	1000	0000508
E0510	10.0	16.0	2.6	6.0	1.3	1.0	#22	0.5		1000	0000510
E0512	12.0	18.0	2.6	6.0	1.3	1.0	#22	0.5		1000	0000512

E7506	6.0	12.4	3.5	6.4	1.5	1.2	#20	0.75	White	1000	0007506
E7508	8.0	14.6	3.5	6.4	1.5	1.2	#20	0.75	Blue	1000	0007508
E7510	10.0	16.4	3.5	6.4	1.5	1.2	#20	0.75		1000	0007510
E7512	12.0	18.4	2.8	6.4	1.5	1.2	#20	0.75		1000	0007512
E7518	18.0	24.4	2.8	6.4	1.5	1.2	#20	0.75		1000	0007518

E1006	6.0	12.4	2.8	6.4	1.7	1.4	#18	1.0	Yellow	1000	0001006
E1008	8.0	14.6	2.8	6.4	1.7	1.4	#18	1.0	Red	1000	0001008
E1010	10.0	16.4	2.8	6.4	1.7	1.4	#18	1.0		1000	0001010
E1012	12.0	18.4	4.0	6.4	1.7	1.4	#18	1.0		1000	0001012

E1508	8.0	14.6	4.0	6.4	2.0	1.7	#16	1.5	Red	1000	0001508
E1510	10.0	16.4	4.0	6.4	2.0	1.7	#16	1.5	Blue	1000	0001510
E1518	18.0	24.4	3.0	6.4	2.0	1.7	#16	1.5		1000	0001518

E2508	8.0	15.2	3.0	7.5	2.6	2.3	#14	2.5	Blue	1000	0002508
E2512	12.0	19.0	3.0	7.5	2.6	2.3	#14	2.5	Grey	1000	0002512
E2518	18.0	25.0	3.0	7.5	2.6	2.3	#14	2.5		1000	0002518

E4009	9.0	16.5	4.4	7.5	3.2	2.8	#12	4.0	Grey	1000	0004009
E4012	12.0	19.5	4.4	7.5	3.2	2.8	#12	4.0	Orange	1000	0004012
E4018	18.0	25.5	4.4	7.5	3.2	2.8	#12	4.0		1000	0004018

E6012	12.0	20.0	6.3	8.0	3.9	3.5	#10	6.3	Black	1000	0006012
E6018	18.0	26.0	6.3	8.0	3.9	3.5	#10	6.3	Green	1000	0006018

E10-12	12.0	21.5	7.6	9.5	4.9	4.5	#7	10.0	Milky white	1000	0010012
E10-18	18.0	27.5	7.6	9.5	4.9	4.5	#7	10.0	Brown green	1000	0010018

E16-12	12.0	22.0	8.8	10.2	6.2	5.8	#5	16.0	Green	1000	0016012
E16-18	18.0	28.2	8.8	10.2	6.2	5.8	#5	16.0	Milky white	1000	0016018

E25-16	16.0	29.0	11.2	13.0	7.9	7.5	#4	25.0	Brown green	1000	0025016
E25-22	22.0	35.0	11.2	13.0	7.9	7.5	#4	25.0	Black	1000	0025022



E35-16	16.0	30.0	12.7	14.0	8.7	8.3	#2	35.0	Greyish	1000	0035016
E35-25	25.0	39.0	12.7	14.0	8.7	8.3	#2	35.0	Brown	1000	0035025

E50-20	20.0	36.0	15.3	16.0	10.9	10.3	#1	50.0	Olive	1000	0050020
E50-25	25.0	41.0	15.3	16.0	10.9	10.3	#1	50.0		1000	0050025

• SLOTTED MOUTH TYPE WIRING DUCT

Material: Made up of PVC (grey), good insulation and heat-resistant up to 85°C
Feature: Made up of duct bottom and lid, with two out-holes designed at the bottom

Ref.	Model	H × W	Contained Wire (1.52)	Length (m)	Case Qty. (Pcs)	Item Code
	PXC-2015	20 × 15	5-10PCS	2	200	1002015
	PXC-2020	20 × 20	10-15PCS	2	100	1002020
	PXC-2025	20 × 25	10-20PCS	2	100	1002025
	PXC-2525	25 × 25	10-25PCS	2	100	1002525
	PXC-2545	25 × 45	25-40PCS	2	100	1002545
	PXC-3015	30 × 15	5-15PCS	2	200	1003015
	PXC-3020	30 × 20	10-20PCS	2	100	1003020
	PXC-3025	30 × 25	15-25PCS	2	100	1003025
	PXC-3030	30 × 30	20-30PCS	2	100	1003030
	PXC-3035	30 × 35	30-45PCS	2	100	1003035
	PXC-3040	30 × 40	35-50PCS	2	100	1003040
	PXC-3050	30 × 50	45-60PCS	2	100	1003050
	PXC-3525	35 × 25	25-35PCS	2	100	1003525
	PXC-3535	35 × 35	40-55PCS	2	100	1003535
	PXC-4025	40 × 25	20-40PCS	2	100	1004025
	PXC-4030	40 × 30	35-50PCS	2	100	1004030
	PXC-4035	40 × 35	40-50PCS	2	100	1004035
	PXC-4040	40 × 40	45-55PCS	2	100	1004040
	PXC-4060	40 × 60	60-80PCS	2	100	1004060
	PXC-4525	45 × 25	25-40PCS	2	100	1004525
	PXC-4535	45 × 35	40-55PCS	2	100	1004535
	PXC-4545	45 × 35	60-70PCS	2	100	1004545
	PXC-4565	45 × 65	90-100PCS	2	100	1004565
	PXC-5015	50 × 15	25-35PCS	2	100	1005015
	PXC-5025	50 × 25	25-45PCS	2	100	1005025
	PXC-5030	50 × 30	30-55PCS	2	100	1005030
	PXC-5035	50 × 35	50-60PCS	2	100	1005035
	PXC-5040	50 × 40	60-70PCS	2	100	1005040
	PXC-5045	50 × 45	70-85PCS	2	100	1005045
	PXC-5050	50 × 50	90-100PCS	2	100	1005050
	PXC-5055	50 × 55	100-110PCS	2	100	1005055
	PXC-5060	50 × 60	95-105PCS	2	100	1005060
	PXC-5080	50 × 80	180-200PCS	2	60	1005080
	PXC-50100	50 × 100	220-250PCS	2	60	1050100
	PXC-6040	60 × 40	90-100PCS	2	100	1006040
	PXC-6060	60 × 60	140-160PCS	2	100	1006060
	PXC-6525	65 × 25	100-110PCS	2	100	1006525
	PXC-6545	65 × 45	180-200PCS	2	100	1006545
	PXC-6565	65 × 65	140-160PCS	2	80	1006565
	PXC-8035	80 × 35	160-180PCS	2	60	1008035
	PXC-8045	80 × 45	180-200PCS	2	60	1008045
	PXC-8050	80 × 50	200-220PCS	2	60	1008050
	PXC-8055	80 × 55	240-290PCS	2	60	1008055
	PXC-8080	80 × 80	280-350PCS	2	36	1018080
	PXC-80100	80 × 100	300-400PCS	2	36	1080100
	PXC-100100	100 × 100	300-400PCS	2	36	1100100

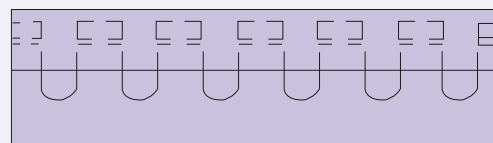

• SOLD WIRING DUCT

Material: made up of PVC(WHITE), good insulation and heat-resistant up to 85°C.
Struction: made up of duct bottom and lid.
Application: used in stage, electric, air conditioning or indoors.
Feature: solid design, especially for anti-dust and mouse.

Ref.	Model	H × W	Contained Wire (1.52)(Pcs)	Length (m)	Item Code
	PZC-1015	10 × 15	3-5	2	1011015
	PZC-1020	10 × 20	3-6	2	1011020
	PZC-1025	10 × 25	5-10	2	1011025
	PZC-1525	15 × 25	5-10	2	1011525
	PZC-2030	20 × 30	10-20	2	1012030
	PZC-2035	20 × 35	15-25	2	1012035
	PZC-2540	25 × 40	20-40	2	1012540
	PZC-3050	30 × 50	30-50	2	1013050
	PZC-3060	30 × 60	50-65	2	1013060
	PZC-5080	50 × 80	180-200	2	1015080
	PZC-50100	50 × 100	220-250	2	1150100
	PZC-80100	80 × 100	260-350	2	1180100
	PZC-100100	100 × 100	300-400	2	2100100



• METAL FLEXIBLE PIPES

Material: Galvanized steel band, PVC coated (DJSB type)
Feature: light, super-soft, good bending performance
The inner smoothness makes the entry of wire very easy
Application: used for the wire/cable protection for machine, mansions and factory building.
Provide insulation for wires/cables protected. beside, the cable's bending and beautiful outlook can Be ensured
Usage: put the wires/cables through the pipes before fitting the joint


Ref.	Model		Spec.	Outside Dia. (mm)		Bending Radius(mm)	Max.axial Tension(kg)	Packing (m)	Item Code	
	DJS	DJSB		DJS	DJSB				DJS	DJSB
	DJS-6	DJSB-6	Φ 6	8.2	9	40	335	200	0030006	0031006
	DJS-8	DJSB-8	Φ 8	11	11.8	45	470	100	0030008	0031008
	DJS-10	DJSB-10	Φ 10	13.5	14.5	55	590	100	0030010	0031010
	DJS-12	DJSB-12	Φ 12	15.5	16.5	60	710	100	0030012	0031012
	DJS-13	DJSB-13	Φ 13	16.5	17.5	65	765	100	0030013	0031013
	DJS-15	DJSB-15	Φ 15	19	20.2	80	885	100	0030015	0031015
	DJS-16	DJSB-16	Φ 16	20	21.2	85	940	100	0030016	0031016
	DJS-19	DJSB-19	Φ 19	23.3	24.5	95	1120	50	0030019	0031019
	DJS-20	DJSB-20	Φ 20	24.3	25.5	100	1180	50	0030020	0031020
	DJS-25	DJSB-25	Φ 25	30.3	31.7	120	1450	50	0030025	0031025
	DJS-32	DJSB-32	Φ 32	38	39.6	150	1885	25	0030032	0031032
	DJS-38	DJSB-38	Φ 38	45	46.6	180	2240	25	0030038	0031038
	DJS-51	DJSB-51	Φ 51	58	59.5	220	3000	20	0030051	0031051
	DJS-64	DJSB-64	Φ 64	72.5	73.5	310	3770	10	0030064	0031064
	DJS-75	DJSB-75	Φ 75	83.5	84.5	350	4405	10	0030075	0031075
	DJS-100	DJSB-100	Φ 100	108.5	109	410	4700	10	0030100	0031100



• PIN TYPE TERMINAL ROW


Material: copper

1P Structure size drawing

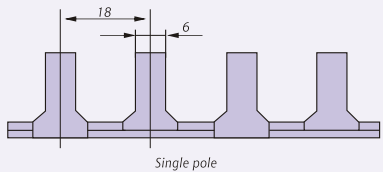


Model: P101
Item Code: 0032101
Poles: 1P

2P Structure size drawing

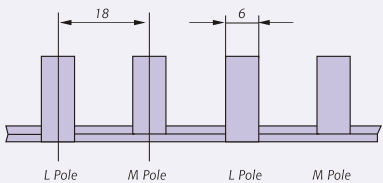


Model: P102
Item Code: 0032102
Poles: 2P

3P Structure size drawing

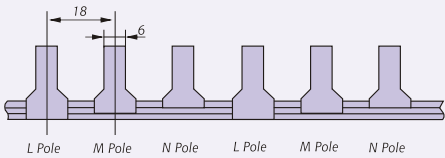

Model: P103
Item Code: 0032103
Poles: 3P


4P Structure size drawing



Model: P104
Item Code: 0032104
Poles: 3P


• DPN TYPE TERMINAL ROW

1P Structure size drawing

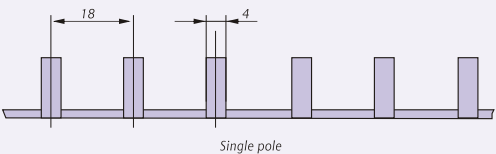


Model: D101
Item Code: 0033101
Poles: 1P

2P Structure size drawing

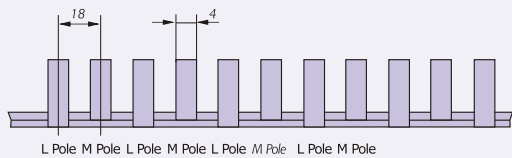


Model: D102
Item Code: 0033102
Poles: 2P

3P Structure size drawing

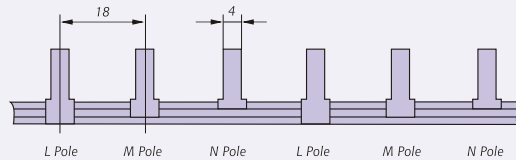

Model: D103
Item Code: 0033103
Poles: 3P


4P Structure size drawing

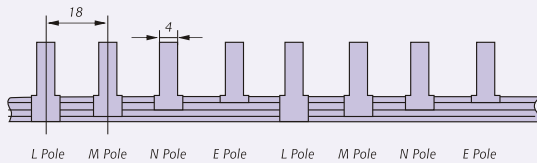

Model: D104
Item Code: 0033104
Poles: 4P


• U TYPE TERMINAL ROW

1P Structure size drawing

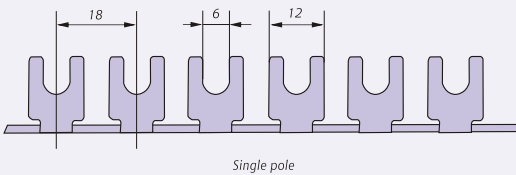


Model: U 101
Item Code: 0034101
Poles: 1P

2P Structure size drawing

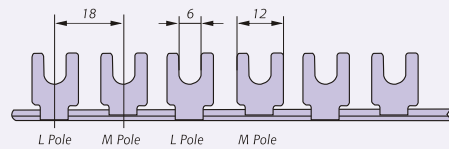


Model: U 102
Item Code: 0034102
Poles: 2P

3P Structure size drawing







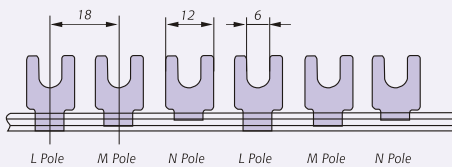



Model: U 103
Item Code: 0034103
Poles: 3P

U 4P Structure size drawing




Model: U 104
Item Code: 0034104
Poles: 4P




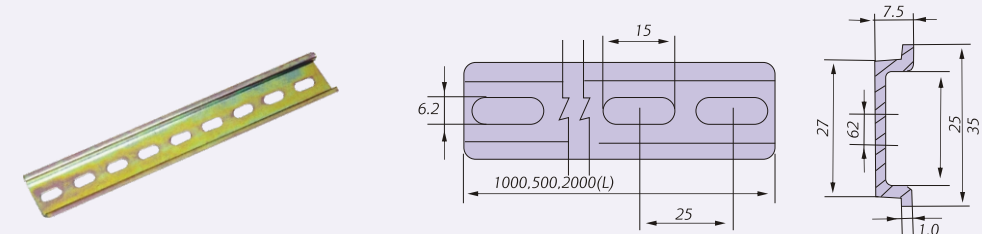


Model: Dt8500
Item Code: 0018500

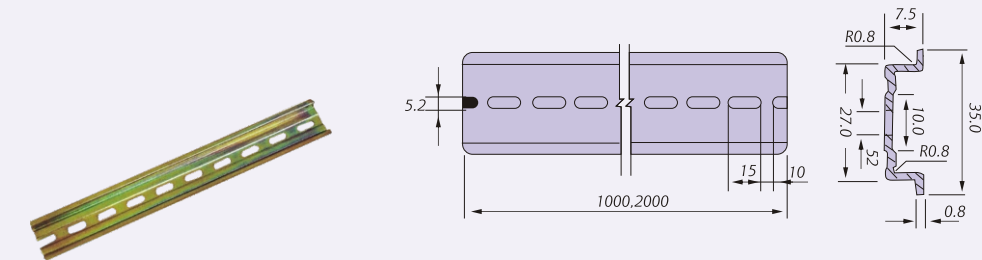


Model: Dt9600
Item Code: 0019600

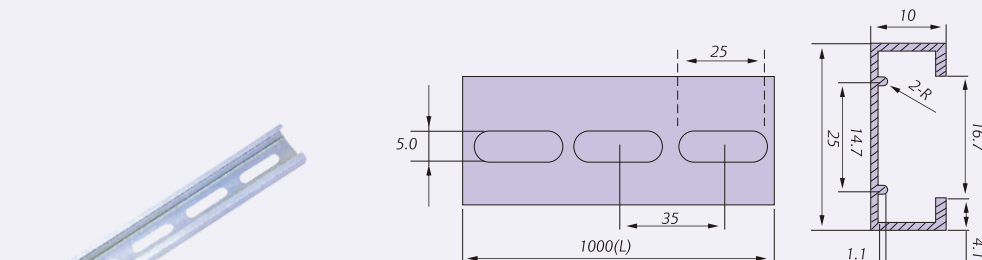

Model: Dt7800
Item Code: 0017800

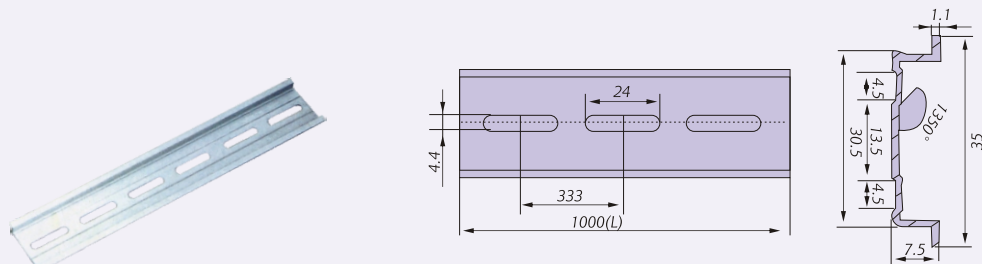

Model: Dt6800
Item Code: 0016800

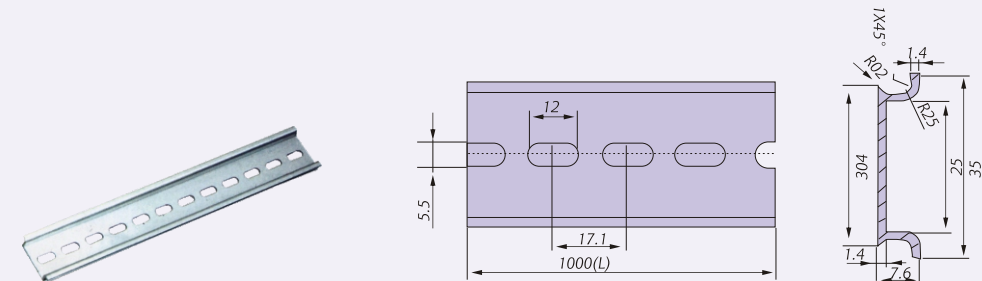

Model: Dt5600
Item Code: 0015600