


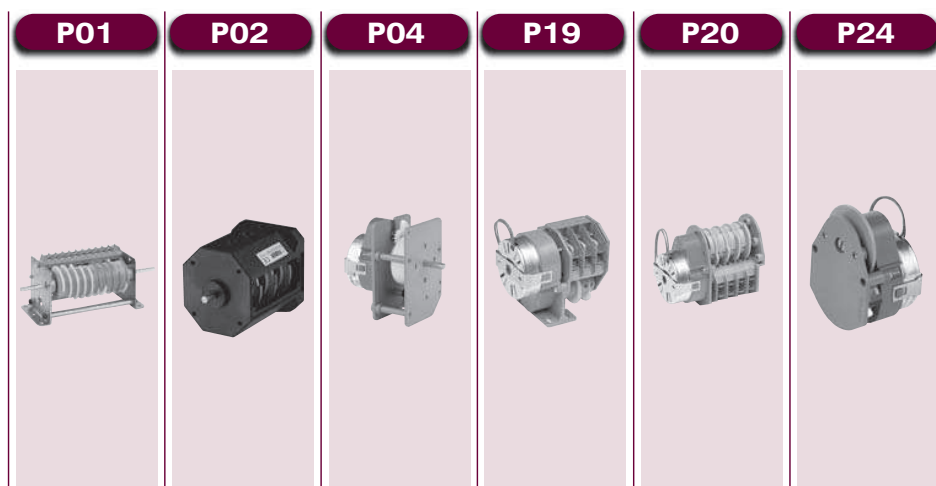

Specifications

Max. number of contacts	20	6	2	5	5	1
2 speeds						
Potentiometer pre-arrangement						
Higher torque motor equipped						
External drive	•	•				
Logarithmic scale			•			
Quick start cam						
Cam with removable strikers				•		
Cam with fixed strikers						

Mounting:

35 mm DIN rail (EN50022)						
screw fixing	•	•		•		
panel-fixing			•		•	•

Technical data page	9.5	9.6	9.7	9.8	9.9	9.10
----------------------------	-----	-----	-----	-----	-----	------

Accessories page	12.8	12.8	12.8	12.8	12.8	12.8
-------------------------	------	------	------	------	------	------

A black and white photograph of a mechanical device, likely a pump or motor, with a cylindrical body and a handle. The device is shown from a side-on perspective, highlighting its industrial design. It features a main cylindrical body with a handle on top and a smaller cylindrical component on the side. The device is mounted on a base and has a power cord attached to the back. The background is a plain, light-colored surface.

20	5	5	2	5	20	2
•	•				•	
•						
•						
•	•					
•						•
•	•			•	•	•
9.11 ÷ 9.15	9.16 ÷ 9.18	9.19	9.20	9.21	9.22 ÷ 9.24	9.25
12.8 ÷ 12.9	12.8	12.8	12.8	12.8	12.8	12.8