


Firestone

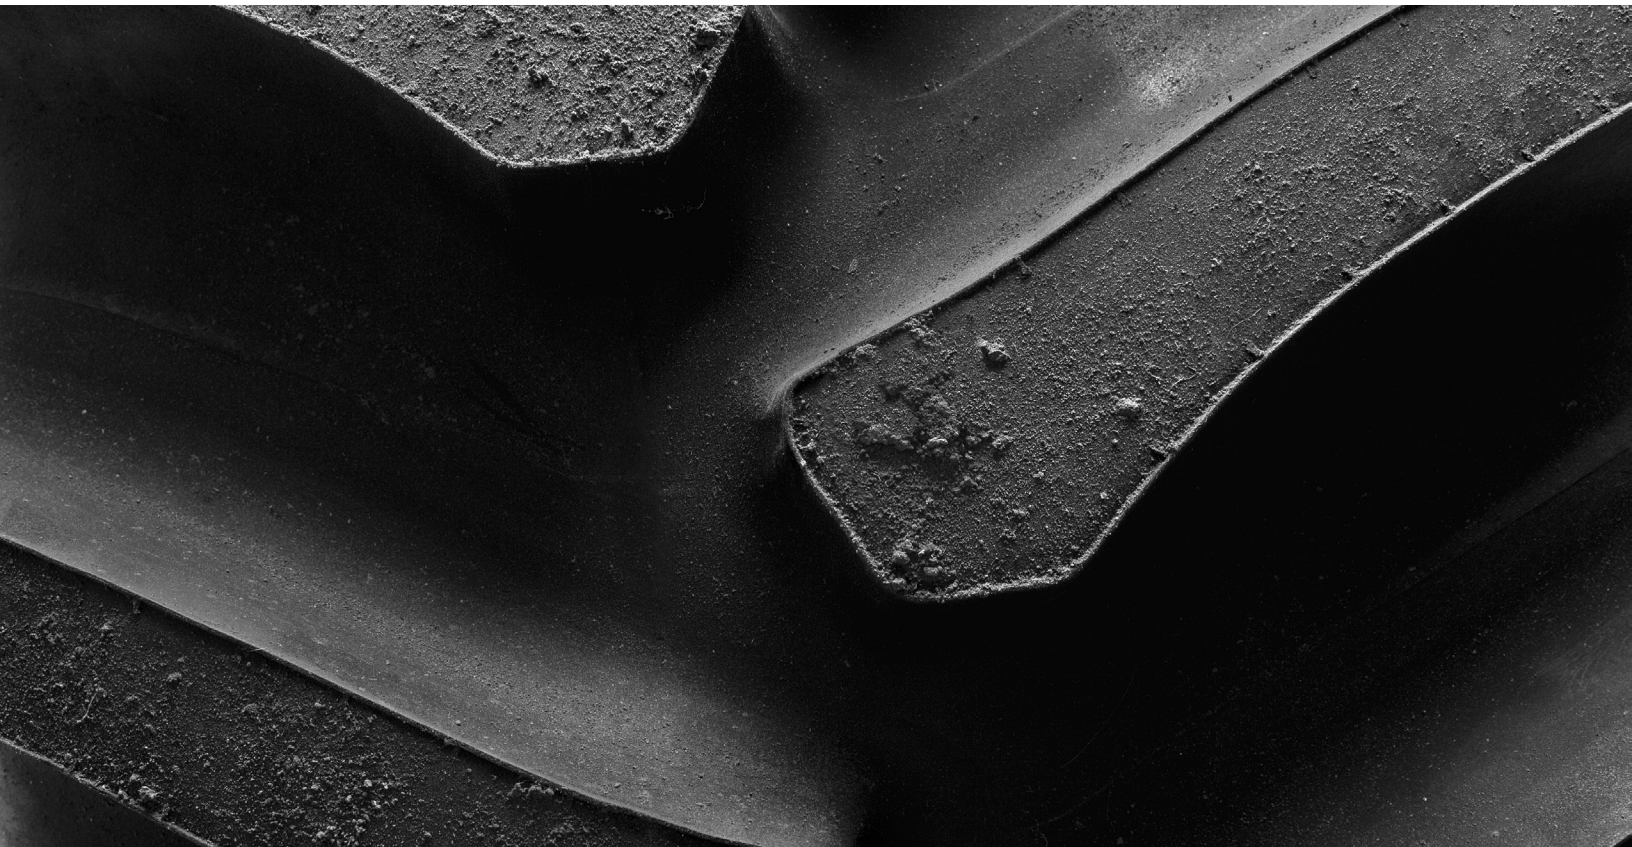

FIRESTONE AG TIRE PRODUCT CATALOG

LISTED BY PRODUCT | UPDATED 4.1.11

AGRICULTURAL | AG FLOTATION | FORESTRY | CONSTRUCTION | COMPACT/GARDEN



Size	Ply	Weight	Tread	Article	Old Article
------	-----	--------	-------	---------	-------------



RADIAL ALL TRACTION 23° TLR1

Premium radial for traction, durability and road wear.
O.E.M. choice for 2WD, 4WD and MFWD tractors.
23° long bar/long bar tread design sets the standard for the industry.

24.5R32	1*	589	53	352-926	-
30.5LR32	3*	734	55	356-204	-
900/60R32 (35.5LR32)	176A8	936	61	362-800	-
480/85R34 (18.4R34)	149A8	331	50	362-392	-
520/85R34	162A8	474	52	371-249	352-950
23.1R34	1*	517	52	352-969	-
420/85R38	144A8	147	48	379-120N	-
480/80R38 (18.4R38)	149A8	365	50	362-341	-
520/85R38 (20.8R38)	155A8	442	52	362-375	-
480/80R42 (18.4R42)	151A8	420	50	362-324	-
480/80R42 (18.4R42)	154A8	428	50	364-092	-
520/85R42 (20.8R42)	157A8	492	52	362-358	-
520/85R42 (20.8R42)	165A8	519	52	369-600	-
14.9R46	4*	318	47	343-323	-
420/80R46	151A8	382	49	352-829	-
420/80R46	4*	406	48	371-640	-
480/80R46	158A8	459	50	362-273	-



RADIAL 23° TLR1

Delivers all the benefits of a radial at a great value.
23° long bar/long bar tread design for superior traction and cleaning. O.E.M. choice for combines.

18.4R34	1*	316	49	354-740	-
15.5R38	1*	242	45	354-767	-
18.4R38	2*	346	49	359-823	-
20.8R38	2*	416	50	362-204	-
18.4R42	3*	380	49	362-212	-
20.8R42	2*	448	50	355-399	-



RADIAL ALL TRACTION FWD TLR1

Specifically designed for use on MFWD tractors -
O.E.M. choice. Curved bar design for better traction.

16.9R24	2*	240	49	340-405	-
14.9R26	3*	198	47	340-456	-
420/85R26 (16.9R26)	138A8	250	49	362-528	-
18.4R26	2*	304	50	340-421	-
340/85R28 (13.6R28)	127A8	174	47	362-545	-
380/85R28 (14.9R28)	133A8	221	49	362-562	-
420/85R28 (16.9R28)	139A8	250	48	362-579	-
380/85R30 (14.9R30)	135A8	224	47	362-596	-
420/90R30 (16.9R30)	142A8	272	49	362-613	-

Size	Ply	Weight	Tread	Article	Old Article
------	-----	--------	-------	---------	-------------



RADIAL ALL TRACTION FWD TLR1

Specifically designed for use on MFWD tractors -
O.E.M. choice. Curved bar design for better traction.

380/85R34 (14.9R34)	137A8	247	47	362-630	-
385/85R34	145B	253	47	379-290N	-
380/85R34 (14.9R34)	146B	260	47	358-665	-



RADIAL DEEP TREAD 23° TLR1W

23° tread design at a deeper R-1W tread depth.
Delivers even wear, long life and smooth ride.

480/80R38 (18.4R38)	149A8	392	63	362-749	-
520/85R38 (20.8R38)	155A8	494	69	362-766	-
650/85R38	173A8	743	70	362-987	-
800/70R38	173A8	970	74	359-548	-
480/80R42 (18.4R42)	151A8	443	63	362-409	-
480/80R42 (18.4R42)	154A8	465	63	364-058	-
520/85R42 (20.8R42)	157A8	528	69	362-426	-
480/80R46 (18.4R46)	158A8	497	63	362-256	-
520/85R46 (20.8R46)	158A8	608	64	362-851	-
480/80R50	159A8	535	63	360-090	-
IF480/80R50	166B	547	63	374-496N	-
IF480/95R50	163B	613	63	375-635N	-



RADIAL 4000 TLR1W

Multi-angle R-1W tread designed for Euro-style
tractors and wet soil conditions. Used in vineyards
and orchards.

7.50R16	102A8	42	33	364-976	-
7.50R18	104A8	42	33	364-993	-
280/70R16	112A8	46	38	365-010	-
280/70R18	114A8	66	38	365-027	-
280/70R20	116A8	67	38	365-826	-
300/70R20	120A8	75	40	365-044	-
360/70R20	129A8	109	40	365-843	-



RADIAL 6000 TLR1W

Multi-angle curved lug design reduces wear on the
road while providing good traction in the field. Firm
buttressed lugs reduces squirm for long even wear.

280/85R24	115A8	99	49	368-801C	-
340/85R24	125A8	145	55	368-835C	-
340/85R28	127A8	165	60	368-903C	-

Size	Ply	Weight	Tread	Article	Old Article
------	-----	--------	-------	---------	-------------



RADIAL 7000 TLR1W

R-1W tread and 45° tread bars for more traction in wet conditions. Wide spaces between lugs ensure thorough self-cleaning and stronger pull.

460/85R30 (18.4R30)	145A8	277	62	352-683C	-
650/75R30	163A8	537	62	356-220C	-



RADIAL 8000 TLR1W

Designed to be on rear axle of high powered tractors. Gives excellent all round performance in both normal and soft, wet conditions. Longer lugs for improved road wear.

420/85R30	140A8	251	56	368-920C	-
420/85R34	142A8	275	58	368-937C	-
460/85R34	147A8	313	59	368-971C	-
480/70R34	143A8	295	57	368-954C	-
480/70R38	145A8	326	57	369-005C	-



PERFORMER 70 TLR1W

Designed to be on rear axle of high powered tractors. Gives excellent all round performance in both normal and soft, wet conditions. Longer lugs for improved road wear.

380/70R24	125A8	153	54	379-341N	362-042
420/70R24	130D	175	55	379-188	368-886



PERFORMER 85 TLR1W

Designed to be on rear axle of high powered tractors. Gives excellent all round performance in both normal and soft, wet conditions. Longer lugs for improved road wear.

280/85R24	115B	99	49	377-148	368-801
320/85R24	131B	107	50	377-165	368-818
340/85R24	125B	125	55	377-199	368-835
380/85R24	131B	153	55	376-961	368-869
420/85R24	137B	191	58	377-182	368-784
320/85R28	124B	121	52	377-335	368-852
340/85R28	127B	141	60	377-216	368-903
380/85R28	133B	163	60	377-301	370-960
420/85R28	139B	220	49	378-661	-
420/85R30	140B	223	56	377-403	368-920
420/85R34	142B	249	58	377-318	368-937
460/85R34	147B	291	59	377-233	368-971
420/85R38	144B	274	58	377-352	368-988
460/85R38	149B	318	59	377-386	369-022
520/85R38	155B	416	59	378-576	-

Size	Ply	Weight	Tread	Article	Old Article
------	-----	--------	-------	---------	-------------



RADIAL 9000 TLR1W (TRACTOR)

Multi-angle R-1W tread designed for Euro-style tractors and wet soil conditions. Specially sized for narrow row crop and vegetable farming.

480/65R24	140A8	235	51	365-673	-
540/65R24	140A8	270	55	359-165	-
540/65R30	150A8	330	54	363-055	-
480/70R34	155A8	361	60	361-763	-
320/85R38 (12.4R38)	138A8	204	51	360-074	-
540/65R38	147A8	377	55	359-157	-
600/65R38	153A8	470	59	358-673	-
650/65R38	157A8	541	63	358-185	-
900/50R42	168A8	924	78	359-394	-
380/90R50	151A8	369	57	362-050	-
380/90R54	152A8	403	57	362-069	-



RADIAL 9000 TLR1W (SPRAYER)

Multi-angle R-1W tread specifically designed for sprayer applications.

290/95R34	131A8	180	49	359-211	-
320/85R34 (12.4R34)	133A8	182	51	359-238	-
320/85R38 (12.4R38)	143A8	204	51	359-092	-
600/65R38	165A8	505	59	361-933	-
320/90R42 (12.4R42)	139A8	225	52	359-106	-
320/90R46 (12.4R46)	148A8	249	54	357-774	-
380/90R46 (14.9R46)	152B	358	57	359-939	-
IF380/90R46	168B	390	57	375-686N	-
230/95R48	134A8	192	49	356-263	-
320/90R50	148A8	262	54	358-118	-



RADIAL 9000 EVOL TLR1W

Multi-angle R-1W tread designed for Euro-style tractors and wet soil conditions. Specially sized for narrow row crop and vegetable farming.

540/65R30	150D	303	55	362-834C	-
540/65R34	152D	335	55	371-181C	-
650/65R38	163D	534	63	371-164C	-

Size	Ply	Weight	Tread	Article	Old Article
------	-----	--------	-------	---------	-------------



RADIAL 9100 TLR1
 New 105 aspect ratio for large sprayers. Larger footprint for less compaction. Additional lugs for better comfort and wear.

380/105R50	168A8	481	49	362-919	-
------------	-------	-----	----	----------------	---



RADIAL ALL TRACTION DT TLR1W
 Multi-angle R-1W tread for excellent grip and extended tire life. Designed for both broad land and narrow row crop farming.

320/85R24 (12.4R24)	122A8	137	51	362-681	-
340/85R24 (13.6R24)	125A8	161	53	362-698	-
380/85R24 (14.9R24)	131A8	200	55	362-715	-
480/70R28	140A8	295	55	351-563	-
600/65R28	147A8	388	65	360-058	-
380/85R30 (14.9R30)	135A8	241	61	364-551	-
420/90R30 (16.9R30)	145A8	291	62	364-602	-
480/70R30	152A8	335	55	355-569	-
480/80R30 (18.4R30)	145A8	322	62	362-732	-
600/70R30	152A8	428	65	360-163	-
IF600/70R30	159B	432	65	375-703N	-
600/70R30	162A8	441	65	362-307	-
650/75R32	172A8	614	70	361-925	-
800/65R32 (30.5LR32)	172A8	854	74	357-685	-
380/85R34 (14.9R34)	137A8	261	61	364-585	-
420/85R34 (16.9R34)	147A8	308	59	360-155	-
IF420/85R34	152B	321	59	374-513N	-
380/80R38 (14.9R38)	142A8	267	57	360-171	-
IF380/80R38	149B	283	57	378-627N	-
IF420/85R38	153B	316	59	378-882N	-
600/65R28	154A8	395	65	371-266	-
710/70R38	166A8	759	74	355-542	-
IF710/70R38	178B	744	73	378-219N	362-664
620/70R42	160A8	620	66	356-271	-
620/70R42	166A8	617	66	374-479N	356-271
710/70R42	168A8	788	74	358-320	-
IF710/70R42	179B	802	74	373-697N	362-115
320/90R54 (12.4R54)	143A8	277	56	359-580	-
320/90R54 (12.4R54)	149A8	294	56	358-339	-

Size	Ply	Weight	Tread	Article	Old Article
------	-----	--------	-------	---------	-------------



SUPER ALL TRACTION 23° TTR1

Long-wear premium bias for plowing, fertilizing and planting. O.E.M. choice for 2WD, 4WD, MFWD tractors and combines.

28L-26	14	449	57	351-938	-
18.4-34	8	227	50	343-560	-
20.8-34	8	264	52	343-579	-
16.9-38	8	215	49	343-587	-
18.4-38	8	276	50	343-595	-
20.8-38	10	325	51	343-633	-
20.8-38	8	327	52	343-609	-
18.4-42	10	303	50	343-641	-
20.8-42	10	358	52	343-668	-



SUPER ALL TRACTION 23° TLR1

Long-wear premium bias for plowing, fertilizing and planting. O.E.M. choice for 2WD, 4WD, MFWD tractors, combines, and construction equipment.

23.1-26	8	329	53	344-095	-
23.1-26	12	356	53	344-052	-
23.1-26	14	383	53	362-460	-
28L-26	12	423	57	344-060	-
24.5-32	12	389	53	344-079	-
30.5L-32	12	576	54	344-087	-
30.5L-32	14	613	54	351-067	-
30.5L-32	16	630	54	351-075	-
18.4-34	12	264	50	343-676	-
23.1-34	8	387	53	344-109	-
12.4-38	14	210	45	355-577	-
18.4-38	14	337	50	343-692	-
20.8-42	14	406	52	352-888	-



SUPER ALL TRACTION 23° HD TLR1 SS

Designed for cotton picker applications. Rounded shoulder to eliminate tread lug compression. Stronger carcass.

520/85D38 (20.8D38)	173A8	481	46	363-038	-
---------------------	-------	-----	----	----------------	---



SUPER ALL TRACTION FWD TLR1

Specifically designed for front positions of MFWD tractors and a perfect mate for our SAT 23°. Excellent wear resistance.

16.9-24	10	200	49	343-889	-
14.9-26	10	174	48	343-897	-
16.9-26	10	220	49	343-900	-
18.4-26	6	228	50	343-846	-

Size	Ply	Weight	Tread	Article	Old Article
------	-----	--------	-------	---------	-------------



SUPER ALL TRACTION FWD TLR1

Specifically designed for front positions of MFWD tractors and a perfect mate for our SAT 23°. Excellent wear resistance.

18.4-26	10	251	50	343-919	-
13.6-28	10	161	47	343-927	-
14.9-28	10	189	48	343-935	-
16.9-28	10	231	49	343-943	-
14.9-30	10	198	47	343-951	-



SUPER ALL TRACTION II 23° TLR1

Modern tread design to maximize traction and improve ride. Increased footprint minimizes soil compaction. Increased number of lugs vs. Traction Field & Road for better road wear and ride.

200/85D14	92A6	27	32	365-571	-
9.5-16	4	46	40	376-808N	351-814
250/85D16.5	8	48	40	365-401	-
9.5-24	6	65	40	371-351	338-370
11.2-24	4	83	41	365-163	357-995
11.2-24	8	87	41	365-180	352-012
12.4-24	4	98	43	365-299	-
12.4-24	8	101	43	372-541N	365-231
13.6-24	8	125	43	372-575N	369-719
14.9-24	6	128	44	365-061	-
14.9-24	8	130	48	373-238	358-002
12.4-28	6	110	43	365-452	-
13.6-28	6	124	44	365-265	-
14.9-28	6	147	44	365-078	351-830
16.9-28	6	170	47	365-469	351-679
16.9-30	6	174	47	365-282	-
18.4-30	8	222	49	372-626N	365-486
18.4-34	8	242	49	372-592N	367-203
15.5-38	8	184	44	372-524N	367-186
18.4-38	8	255	50	372-507N	367-220
20.8-38	8	340	52	367-237	-



TRACTION FIELD & ROAD TTR1

A great general agricultural tire with 23° tread and a value price. Full range of sizes available. Also used on construction compaction equipment.

12.4-16	4	66	45	345-202	-
14.9-26	6	121	48	345-288	-
16.9-26	6	155	48	355-119	-
18.4-26	8	197	50	345-326	-
18.4-28	6	185	50	338-494	-
23.1-30	8	342	53	338-613	-

	Size	Ply	Weight	Tread	Article	Old Article
	TRACTION FIELD & ROAD TTR1					
	A great general agricultural tire with 23° tread and a value price. Full range of sizes available. Also used on construction compaction equipment.					
	23.1-30	12	344	53	364-857	-
	16.9-34	6	173	49	338-060	-
	9.5-36	4	73	40	338-443	-
	13.6-38	4	144	47	338-036	-
	13.6-38	6	157	47	338-087	-
	14.9-38	6	180	48	338-516	-
	16.9-38	6	194	49	338-141	-
	9.5-42	6	90	45	338-532	-

	TRACTION FIELD & ROAD TLR1					
	A great general agricultural tire with 23° tread and a value price. Full range of sizes available. Also used on construction compaction equipment.					
	18.4-16.1	8	155	50	359-564	-
	8.3-24	4	47	38	351-644	-
	12.4-24	12	112	45	357-987	-
	16.9-24	8	155	49	359-505	-
	18.4-26	12	223	50	362-443	-
	13.6-28	12	138	47	361-917	-
	12.4-42	6	140	45	355-097	-
	12.4-42	10	165	45	358-630	-

	FIELD & ROAD TTR1					
	Great value in a replacement rear for older tractors. 23° long bar/long bar tread.					
	11.2-28	4	72	37	304-743	-
	11.2-28	6	78	37	361-623	-
	9.5-32	4	61	36	304-794	-
	11.2-36	4	90	37	304-808	-
	12.4-36	4	102	39	304-816	-
	12.4-36	10	135	39	319-872	-
	13.6-36	4	115	41	304-824	-
	11.2-38	4	96	37	304-832	-
	12.4-38	4	111	39	304-840	-
	12.4-38	6	122	39	304-921	-
	12.4-38	8	127	39	354-805	-

	Size	Ply	Weight	Tread	Article	Old Article
	<u>FIELD & ROAD TLR1</u>					
	Great value in a replacement rear for older tractors. 23° long bar/long bar tread.					
	11.2-38	4	99	37	355-003	-
	<u>PULLER 2000 TLP1</u>					
	The only tire designed specifically for pulling competitions. Full-width tread for more ground contact and special puller rubber compound for maximum pull.					
	24.5-32	10	396	8	369-685	358-096
	30.5L-32	HP	471	8	361-992	-
	<u>IRRIGATION SPECIAL TTR1</u>					
	Extra-deep 23° tread with large footprint for less compaction and better traction in mud. Rugged nylon cord body with flexible sidewall and tough tread rubber.					
	11.2-24	4	64	32	349-984	-
	14.9-24	4	107	36	322-679	-
	<u>IRRIGATION SPECIAL TLR1</u>					
	Extra-deep 23° tread with large footprint for less compaction and better traction in mud. Rugged nylon cord body with flexible sidewall and tough tread rubber.					
	11.2-24	4	65	32	321-893	-
	14.9-24	4	108	36	322-377	-
	<u>CHAMPION HYDRO ND TLR1</u>					
	Non-directional tread pattern for equal traction in forward and reverse direction. Rubber compounds are formulated for extended life and with special additives to resist weather checking and dry rotting.					
	380/85D24	C	118	35	373-765N	-
	290/85D38	4	108	35	374-785N	-
	<u>RADIAL CHAMP SPADE GRIP TLR2</u>					
	Longer footprint for more traction in muddy soil conditions. Excellent for rice and sugar cane applications.					
	16.9R28	2*	307	94	352-527	-
	18.4R28	2*	384	100	352-748	-
	16.9R30	3*	313	94	359-386	-
	18.4R38	2*	449	100	353-140	-
	20.8R38	2*	559	105	353-167	-
	18.4R42	2*	505	100	354-376	-
	480/70R34	146A8	385	100	369-668N	-

Size	Ply	Weight	Tread	Article	Old Article
------	-----	--------	-------	---------	-------------

RADIAL CHAMP SPADE GRIP TLR2

520/85R34	162A8	525	105	371-232N	-
520/85R42 (20.8R42)	157A8	616	105	371-198	-
520/85R42 (20.8R42)	165A8	671	105	371-215N	371-198
320/90R46 (12.4R46)	148A8	268	82	363-004	-
18.4R46	3*	538	100	359-378	-
520/85R46 (20.8R46)	158A8	637	105	369-651N	-



CHAMPION SPADE GRIP TTR2

Extra-deep 23° tread with large footprint for less compaction and better traction in mud. O.E.M. choice for rice and sugar cane applications.

14.9-24	8	200	90	352-837	-
23.1-30	8	434	109	311-189	-
24.5-32	10	546	112	311-626	-
18.4-34	6	305	100	311-154	-
23.1-34	8	513	109	311-375	-
13.6-38	6	191	86	332-984	-
15.5-38	6	239	86	311-219N	-
18.4-38	8	364	100	311-448	-
20.8-38	10	472	105	311-529	-
13.6-46	6	236	86	332-976	-



CHAMPION SPADE GRIP TLR2

Extra-deep 23° tread with large footprint for less compaction and better traction in mud. O.E.M. choice for rice and sugar cane applications.

14.9-24	12	219	90	359-610	-
16.9-26	10	242	94	326-712	-
18.4-26	6	279	100	358-266	-
18.4-26	10	277	100	326-445	-
23.1-26	10	424	100	362-647	-
28L-26	12	584	109	358-282	-
18.4-30	6	280	100	358-274	-
18.4-30	10	301	100	342-432	-
30.5L-32	14	762	114	358-231	-
35.5L-32	12	932	120	358-258	-
18.4-38	14	411	100	343-110	-
20.8-38	14	516	105	351-970	-
20.8-42	14	600	103	352-918	-

Size	Ply	Weight	Tread	Article	Old Article
 ALL NON-SKID TRACTOR TTR3 Button tread for minimum soil disturbance. O.E.M. choice for combines, grain wagons and highway mowers.					
9.5-24	4	41	14	306-096	-
13.6-28	6	105	24	306-193	-

 ALL NON-SKID TRACTOR TLR3 Button tread for minimum soil disturbance. O.E.M. choice for combines, grain wagons, highway mowers and compaction equipment.					
18.4-16.1	6	123	28	320-943	-
8.3-24	4	48	18	351-733	-
14.9-24	6	126	23	359-556	-
16.9-24	6	154	28	351-709	-
16.9-24	10	175	28	358-789	-
18.4-26	6	193	29	315-958	-
18.4-26	12	211	29	369-753	315-966
23.1-26	8	262	21	345-377	-
23.1-26	12	287	21	323-527	-
23.1-26	14	290	21	378-491N	-
28L-26	12	312	21	351-008	-
28L-26	16	392	21	362-220	-
24.5-32	12	391	35	322-296	-
24.5-32	16	499	35	360-384	-
30.5L-32	14	533	38	359-904	-
30.5L-32	16	627	38	357-758	-
35.5L-32	20	709	39	357-820	-

 ALL NON-SKID II TRACTOR TLR3 Button tread for minimum soil disturbance. O.E.M. choice for combines, grain wagons and highway mowers.					
28L-26	12	381	34	351-857	-
28L-26	16	437	34	362-085	-

 TURF & FIELD TTR3 Excellent for drive axle use in golf courses and parks. Treads lightly on the green; no special rims are required.					
13.6-16 (7R)	4	61	12	345-210	-

Size	Ply	Weight	Tread	Article	Old Article
------	-----	--------	-------	---------	-------------



TURF & FIELD TLR3

Excellent for drive axle use in golf courses and parks. Treads lightly on the green; no special rims are required.

9.5-16	6	42	19	351-776	-
21.5L-16.1	6	186	33	312-770	-
21.5L-16.1	10	193	33	355-887	-
9.5-22	4	49	19	358-649	-



FLOTATION ALL TERRAIN TLHF1

Weight distributed across huge footprint for less compaction. Great at low inflation pressures for flotation over soil and sand.

66X44.00-25	6	508	13	341-940	-
66X44.00-25	16	689	13	354-511	-
57X31.00-26	6	349	13	362-077	-



FLOTATION ALL TERRAIN WTP TLHF1

Weight distributed across huge footprint for less compaction. Great at low inflation pressures for flotation over soil and sand.

66X44.00-25	16	738	13	361-747	-
66X44.00-25	20	736	13	371-674	-



FLOTATION FREE ROLLING TLHF2

Gives fertilizer trucks long wear on paved roads and traction in wet fields. Delivers moderate steering traction.

48X25.00-20	12	298	32	360-422	-
48X31.00-20	14	361	32	360-430	-



FLOTATION 23° (CENTER RIB) TLHF2

Center rib for extended driving on pavement during transportation. 23° high-flotation tread design.

48X25.00-20	10	260	32	328-057	-
-------------	----	-----	----	----------------	---



FLOTATION 23° (CENTER RIB) TLHF2

Center rib for extended driving on pavement during transportation. 23° high-flotation tread design.

48X31.00-20	14	317	32	361-984	-
-------------	----	-----	----	----------------	---

Size	Ply	Weight	Tread	Article	Old Article
------	-----	--------	-------	---------	-------------



FLOTATION 23° DEEP TREAD TLHF3

Large footprint, deep 23° tread for flotation, traction and long wear. Firestone's top-of-the-line for high horsepower tractors.

42X25.00-20	12	279	58	358-304	-
48X25.00-20	10	355	58	344-184	-
48X31.00-20	14	422	58	361-976	-
54X37.00-25	12	588	61	352-055	-
66X43.00-25	10	830	74	340-693	-
66X43.00-25	16	862	74	358-312	-



FLOTATION 23 DEEP TREAD TLHF3

Large footprint, deep 23° tread for flotation, traction and long wear. Firestone's top-of-the-line for high horsepower tractors.

68X50.00-32	24	1220	80	374-462N	-
-------------	----	------	----	-----------------	---



FLOTATION 23° DEEP TREAD TLHF3

Large footprint, deep 23° tread for flotation, traction and long wear. Firestone's top-of-the-line for high horsepower tractors.

73X44.00-32	12	1048	77	328-669	-
73X44.00-32	16	1116	77	358-835	-
76x50.00-32	16	1591	80	359-866	-
76x50.00-32	20	1620	80	369-702	-



RADIAL FLOTATION 23° TLHF3

All the advantages of a radial in a flotation tire. Large footprint minimizes yield-robbing compaction.

1050/50R25	172B	1065	74	359-041	-
------------	------	------	----	----------------	---



FLOTATION IMPLEMENT TL13

Designed for free rolling wheels on trailers, wagons and implements. Carries heavy loads while minimizing damage to fields and crops.

600/55-22.5	16	320	35	364-653	-
700/50-22.5	16	342	35	359-033	-

	Size	Ply	Weight	Tread	Article	Old Article
	<u>CHAMPION GUIDE GRIP SINGLE RIB TTF1</u>					
	Perfect for wet cane and rice fields. Smooth tread with one heavy rib.					
	5.50-16	4	18	30	342-920	-
	<u>CHAMPION GUIDE GRIP 4-RIB TTF2</u>					
	4-rib tread gives flotation and resistance to side slip. O.E.M. preferred tire.					
	10.00-16	8	45	27	339-814	-
	<u>CHAMPION GUIDE GRIP 4-RIB TLF2</u>					
	4-rib tread gives flotation and resistance to side slip. O.E.M. preferred tire.					
	9.5L-15	8	36	23	375-227	368-478
	11L-15	8	49	34	376-570N	339-806
	7.50-16	8	32	20	374-717	367-985
	6.50-16	6	28	19	368-036	339-741
	10.00-16	6	49	27	339-849	-
	10.00-16	8	52	27	339-865N	-
	10.00-16	10	53	27	368-750	-
	11.00-16	8	67	29	339-873	-
	11.00-16	12	77	29	342-602	-
	14L-16.1	8	89	33	365-537	-
	14L-16.1	12	101	33	359-432	-
	16.5L-16.1	8	131	36	339-938	-
	<u>GUIDE GRIP 3-RIB TTF2</u>					
	Wide 3-rib design for all types of farming conditions. Rugged Firestone construction.					
	5.00-15	4	12	12	375-278N	368-274
	<u>GUIDE GRIP 3-RIB TLF2</u>					
	Wide 3-rib design for all types of farming conditions. Rugged Firestone construction.					
	7.5L-15	6	27	19	374-666N	368-291

	Size	Ply	Weight	Tread	Article	Old Article
	<u>CHAMPION GUIDE GRIP 3-RIB TTF2</u>					
	Wide 3-rib design for all types of farming conditions. Rugged Firestone construction.					
	6.50-16	6	26	22	374-683	368-393
	10.00-16	8	52	33	350-877	-
	11.00-16	8	70	35	350-885	-
	7.50-20	6	46	26	352-594	-

	<u>CHAMPION GUIDE GRIP 3-RIB TLF2</u>					
	Wide 3-rib design for all types of farming conditions. Rugged Firestone construction.					
	11L-15	8	45	27	375-142	339-806
	6.00-16	6	24	19	374-700	368-376
	7.50-16	8	39	24	374-751	368-427

	<u>CHAMPION GUIDE GRIP 3-RIB HD TLF2</u>					
	3-rib design with heavier-duty construction. Self-cleaning tread.					
	14L-16.1	8	81	41	354-449	-
	14L-16.1	10	96	41	322-687	-
	11.00-24	12	121	35	359-440	-

	<u>3-RIB STUBBLE STOMPER TLF2</u>					
	Wide 3-rib design for all types of farming conditions. High-density rubber to resist stubble-related wear and damage.					
	10.00-16	8	61	33	357-847	-
	11.00-16	8	80	35	357-855	-

	<u>4-RIB STUBBLE STOMPER TLF2</u>					
	4-rib tread gives flotation and resistance to side slip. High-density rubber to resist stubble related wear and damage.					
	10.00-16	8	56	27	357-898	-
	11.00-16	8	76	27	357-901	-

Current Tire List

Size	Ply	Weight	Tread	Article	Old Article
------	-----	--------	-------	---------	-------------



IMPLEMENT STUBBLE STOMPER TL1

High-density rubber makes no-till no problem.
Special cut-resistant sidewall.

5.90-15	4	19	7	362-034	-
31X13.50-15	10	69	12	359-025	-



TURF STUBBLE STOMPER TLG2

Perfect for golf course and park work. Rugged stubble stomper tread rubber for long, reliable wear.

31X13.50-15	10	62	11	362-190	-
-------------	----	----	----	----------------	---



HIGHWAY SPECIAL TL1

D.O.T. approved for highway speeds with intermittent highway use only. Several sizes available.

9.5L-15FI	E	45	11	374-598	364-738
11L-15FI	F	56	11	374-581	364-772
12.5L-15FI	F	67	11	374-564	364-806



FARM IMPLEMENT TTI1

Designed for free-rolling wheels on wagons and trailers. Stubble stomper high-density tread rubber and cut-resistant sidewall.

8.5L-14	6	20	8	339-148	-
6.00-16	6	17	8	339-199	-
12.5L-16	8	40	8	339-474	-



FARM IMPLEMENT TL1

Designed for free-rolling wheels on wagons and trailers. Stubble stomper high-density tread rubber and cut-resistant sidewall.

9.5L-14	8	28	8	358-940	-
11L-14	8	32	8	350-028	-
5.90-15	4	15	7	339-288	-
6.70-15	4	18	7	339-296	-
6.70-15	6	18	7	375-652N	-
7.60-15	8	24	8	339-369	339-229
9.5L-15	8	30	8	339-377	339-237
9.5L-15	12	36	8	355-860	-
11L-15	8	33	8	339-547	339-431
11L-15	12	41	8	339-482	-
12.5L-15	10	40	8	339-598	-
12.5L-15	12	47	8	354-538	-

Size	Ply	Weight	Tread	Article	Old Article
------	-----	--------	-------	---------	-------------



FARM IMPLEMENT TL1

Designed for free-rolling wheels on wagons and trailers. Stubble stomper high-density tread rubber and cut-resistant sidewall.

12.5L-15	18	48	7	378-457N	-
27X9.50-15	8	28	10	357-804	351-792
11L-16	8	37	8	359-831	339-466
12.5L-16	12	50	8	339-490	-
12.5L-16	14	61	8	356-840	-
14L-16.1	8	70	12	354-686	-
14L-16.1	12	83	12	365-520	-
14L-16.1	14	86	12	376-876N	-
16.5L-16.1	10	109	14	339-636	-
16.5L-16.1	14	120	14	342-483	-
7.50-20	6	35	8	339-326	-



FARM TIRE TL1

Designed for free rolling wheels of wagons and trailers. Tread design is similar to passenger car tires.

10.00-15	8	43	11	329-614	-
----------	---	----	----	----------------	---



FARM TIRE L TL1

Designed for free rolling wheels on wagons and trailers. Shock-fortified nylon cord body.

19L-16.1	12	119	16	359-777	-
21.5L-16.1	10	148	14	318-507	-
21.5L-16.1	14	164	14	325-848	-



RIB IMPLEMENT TTI1

5 rib tread enables tire to grip hillsides. A versatile tire for many kinds of free-rolling applications.

5.00-15	4	12	6	375-346N	368-512
4.00-18	4	10	7	368-087	-
9.00-24	8	54	12	356-212	-

	Size	Ply	Weight	Tread	Article	Old Article
--	------	-----	--------	-------	---------	-------------



RIB IMPLEMENT TL11
 5 rib tread enables tire to grip hillsides. A versatile tire for many kinds of free-rolling applications.

31X13.50-15	8	55	12	355-518	-
31X13.50-15	12	66	12	358-622	-
11.25-20	14	73	13	362-970N	-
11.25-24	8	77	13	324-221	-
11.25-24	12	96	13	355-534	-
11.25-28	12	116	13	326-453	-



DUO RIB PLANTER TTI1
 Specifically designed for firming soil around seed as it's planted. Extra-deep ribs keep tractor in line.

7.60-15	6	24	21	325-864	-
---------	---	----	----	----------------	---



DUO RIB PLANTER TL11
 Specifically designed for firming soil around seed as it's planted. Extra deep ribs keep tractor in line.

7.50-20	4	45	24	313-424	-
---------	---	----	----	----------------	---



RIB DUPLEX FARM TL11
 Wide rib tread for excellent flotation. Non-directional tread design.

36X16-17.5	8	111	16	318-523	-
36X16-17.5	14	123	16	361-968	-



ALL NON-SKID FARM TL12
 Implement application for minimum ground disturbance. Non-aggressive multi-block tread.

16.5L-16.1	6	83	19	310-514	-
13.50-16.1	10	90	19	325-015	-
16.5L-16.1	10	100	19	317-365	-

	Size	Ply	Weight	Tread	Article	Old Article
	<u>POWER IMPLEMENT (a) TLI3</u>					
	Designed for traction wheels on self-powered machines like loaders. Delivers performance and long wear.					
	5.00-15	4	15	15	310-069	-
	<u>POWER IMPLEMENT (b) TLI3</u>					
	Designed for traction wheels on self-powered machines like loaders. Delivers performance and long wear.					
	7.60-15	6	26	16	340-529	340-510
	21.5L-16.1	8	190	33	359-408	-
	21.5L-16.1	14	219	33	359-416	-
	<u>POWER IMPLEMENT (c) TLI3</u>					
	Designed for traction wheels on self-powered machines like loaders. Delivers performance and long wear.					
	13.50-16.1	8	85	23	342-688	-
	<u>NON-DIRECTIONAL DUPLEX FARM TLI3</u>					
	Wide tread reduces compaction. Non-directional tread designed to provide positive traction.					
	40X19-19.5	14	197	26	323-004	-
	<u>FOR SPL WTP CRC TTLS2</u>					
	Built specifically for logging service with CRC (Cut Resistant Compound). 23° tread bar is 25% deeper at center; up to 42% thicker than agricultural tires.					
	18.4-26	10	334	64	361-771	-
	23.1-26	10	516	67	361-798	-
	23.1-26	14	547	67	361-801	-
	16.9-30	10	350	61	361-844	-
	18.4-34	10	390	64	361-887	-
	<u>FOR SPL WTP CRC TLLS2</u>					
	Built specifically for logging service with CRC (Cut Resistant Compound). 23° tread bar is 25% deeper at center; up to 42% thicker than agricultural tires.					
	28L-26	12	680	70	362-477	361-828
	28L-26	14	698	70	362-494	361-836
	24.5-32	16	746	70	364-704	-
	30.5L-32	20	961	70	371-538	-
	35.5L-32	20	1238	81	371-572	-

Size	Ply	Weight	Tread	Article	Old Article
 FOR SPL CRC SEVERE SVC TLLS2 Up to 25% better wear and improved cut resistance. A 20% stronger sidewall and 20% stronger base gauge for better puncture resistance.					
28L-26	16	733	70	362-511	-
30.5L-32	26	988	70	371-555	-
35.5L-32	24	1296	81	371-606	-

 FORESTRY ENV LUG TL Trademarked 23° tread designed as an "environmental lug". For small logging forwarders and harvesters.					
600/55-26.5	20	385	32	359-289	-
700/50-26.5	20	419	32	359-297	-
710/45-26.5	20	436	32	371-623	-

 FORESTRY TRACTION LUG TLHF1 Steel tread plies and special tread and sidewall rubber reduces downtime. Trademarked 23° tread designed as a "traction lug".					
60065B34	14	590	67	359-068	-
70055B34	14	656	67	359-076	-

 FLOTATION 23° DT LOGGER WTP TLHF3 23° deep tread provides a combination of flotation and traction. Delivers up to 20% in fuel savings.					
54X37.00-25	12	726	61	352-063	-
54X37.00-25	20	766	61	373-102	-
66X43.00-25	14	1099	74	354-392	-
66X43.00-26	14	1078	74	354-422	-
68X50.00-32	16	1414	80	343-137	-
73X44.00-32	16	1425	77	343-366	-
76X50.00B32	16	1721	80	359-130	-

 FLOTATION 23° DT LOGGER WTP TLHF4 For logging service on forwarders and harvesters. Extra deep tread for maximum traction in wet swampy areas.					
67X34.00-25	14	1084	112	354-902	-
67X34.00-26	14	1085	112	354-899	-

Size	Ply	Weight	Tread	Article	Old Article
------	-----	--------	-------	---------	-------------

	<u>FLOTATION 23° XDT LOGGER TLHF4</u>				
	For logging service on forwarders and harvesters. 23° "environmental lug" tread for excellent traction - even with heavy loads.				
	66X43.00-25	14	1366	109	354-325 -
	66X43.00-26	14	1350	109	354-333 -

	<u>RADIAL DURAFORCE AT-R TLR4</u>				
	A new radial R-4 non-directional knobby design that provides superior forward and reverse traction, minimal noise, minimal vibration and improved ride comfort. More resistance to irregular wear patterns.				
	320/80R18 (12.5/80R18)	134A8	96	31	365-656 -

	<u>RADIAL DURAFORCE RT TLR4</u>				
	A new radial R-4 directional design that provides superior traction, minimal noise, minimal vibration and improved ride comfort. More resistance to irregular wear patterns.				
	500/70R24	164A8	267	34	376-842N -
	500/70R24 (19.5LR24)	157A8	250	34	371-657 -

	<u>RADIAL ALL TRACTION UTILITY TLR4</u>				
	Excellent backhoe and construction equipment choice. Gives long tread life on hard surface roads.				
	17.5LR24	2*	202	32	351-989 -

	<u>ALL TRACTION UTILITY TTR4</u>				
	For backhoe and construction equipment on and off the road. Gives long tread life on hard surface roads.				
	14.9-28	8	149	33	306-371 -

	<u>ALL TRACTION UTILITY TLR4</u>				
	For backhoe and construction equipment on and off the road. Gives long tread life on hard surface roads.				
	14.9-24	8	136	33	351-849 -
	14.9-24	12	151	33	358-584 -
	16.9-24	8	156	34	309-281 -
	16.9-24	12	175	34	363-990 -
	420/70-24	6	137	34	351-040 -
	17.5L-24	8	160	32	315-486 -
	17.5L-24	10	176	32	325-880 -
	18.4-24	8	178	35	316-083 -
	18.4-24	12	201	35	355-224 -

Size	Ply	Weight	Tread	Article	Old Article
------	-----	--------	-------	---------	-------------



ALL TRACTION UTILITY TLR4

For backhoe and construction equipment on and off the road. Gives long tread life on hard surface roads.



19.5L-24	10	217	34	326-054	-
19.5L-24	12	217	34	322-148	-
21L-24	12	253	35	321-370	-
21L-24	16	276	35	327-727	-
21L-24	18	287	35	372-762	-
16.9-28	8	178	34	354-813	-
16.9-28	12	191	34	364-007	-
18.4-28	12	218	35	355-410	-
21L-28	14	302	36	356-093	-



INDUSTRIAL TURF & FIELD TLR3

Designed for drive axles on golf course, park and cemetery equipment - minimizes turf damage. Gives long tread life on hard surface roads.



19.5L-24	10	223	27	356-190	-
----------	----	-----	----	----------------	---



INDUSTRIAL SPECIAL TLF3

Designed for front wheels on backhoe loaders. Provides durability and wear on hard soil, asphalt and concrete.



11L-15	8	38	14	316-024	-
11L-15	10	47	14	326-011	-
7.50/8.00-16	10	45	13	314-013	-
11L-16	10	46	14	314-625	-
11L-16	12	46	14	326-089	-
14.5/75-16.1	10	84	19	321-567	-



TRANSPORT DUPLEX TL NY

Used on hay balers and other equipment to provide proper load carrying capacity and smooth ride.

15-19.5NHS	14	139	19	370-637	-
------------	----	-----	----	----------------	---



INDUSTRIAL POWER IMPLEMENT TLI3

Light industrial use. Deep overlapping bar cleats and low profile provide excellent traction and flotation with skid-steer loaders.



12.5L-15	8	42	22	340-561	-
16.5L-16.1	6	81	25	340-618	-
16.5L-16.1	10	103	25	342-467	-

Size	Ply	Weight	Tread	Article	Old Article	
	<u>ALL TRACTION UTILITY TTI3</u>					
	Excellent tread wear on roads. Special durable rubber compounds.					
	12.0/12.5-18	12	81	32	342-505C	
	10.0/10.5-20	10	69	24	342-548	-
	<u>ALL TRACTION UTILITY TLI3</u>					
	Excellent tread wear on roads. Special durable rubber compounds.					
	10.5/80-18	10	66	28	351-741	
	12.5-20	10	92	30	358-398C	-
	<u>IND FLOTATION 23° TLG1</u>					 
	Traction tire for compact tractors. 23° high-flotation tread for excellent traction in all soil conditions.					
	31X15.50-15	8	68	23	314-420	
	<u>SUPER TRACTION LOADER TLI3</u>					  
	Light industrial use. Deep overlapping bar cleats and low profile provide excellent traction and flotation with skid-steer loaders.					
	27X8.50-15	6	27	13	350-672	
	12.5/80-18	12	93	32	359-912	-
	<u>SUPER TRACTION DUPLEX TL NY</u>					  
	Light industrial use. Deep overlapping bar cleats provide excellent traction and flotation.					
	215/65D14NHS 106A2		29	17	365-588	
	14-17.5NHS	10	86	22	416-177	-
	15-19.5NHS	12	117	26	416-517	-
	15-22.5NHS	16	180	25	359-599	-
	<u>DURAFORCE HEAVY DUTY TL</u>					  
	Extra-wide lugs for extended life. Rim deflector, heavier ply ratings and tough tread reduces downtime.					
	265/70D16.5 (10-16.5)	8	50	20	362-123	
	305/70D16.5 (12-16.5)	10	62	22	362-131	367-390
	355/70D17.5 (14-17.5)	10	88	24	362-158N	371-453

Size	Ply	Weight	Tread	Article	Old Article
------	-----	--------	-------	---------	-------------



DURAFORCE DEEP TREAD TL

The deep tread DuraForce DT tire. Heavy-duty sidewall, rim deflector and tough rubber compounds keep skid and aerial equipment rolling.



215/70D15 (27x 8.50-15)	8	41	22	360-449	-
260/65D15 (27x10.50-15)	8	46	24	360-457	-
390/60D15 (31x15.50-15)	8	95	30	360-465	-
265/70D16.5 (10-16.5)	8	62	26	360-473	-
305/70D16.5 (12-16.5)	10	86	28	360-414	-
305/70D16.5 (12-16.5)	12	90	28	373-170	-
330/55D16.5	10	81	26	360-481	-
395/55D16.5	12	104	28	360-503	-



DURAFORCE SUPER DEEP TREAD TL

Super deep tread for added wear and puncture resistance. Large center tread element for more even wear.



305/70D16.5 (12-16.5)	12	110	47	365-724	-
-----------------------	----	-----	----	----------------	---



DURAFORCE NON-DIRECTIONAL TLNHS

Designed for skid-loader, aerial and backhoe equipment. Heavy-duty sidewall, tread rubber and aggressive rim deflector.



355/70D17.5 (14-17.5)	10	117	24	361-666	-
355/70D17.5 (14-17.5)	14	126	24	361-674	-
385/65D19.5 (15-19.5)	12	158	25	361-682	-
385/65D19.5 (15-19.5)	16	182	25	361-690	-
385/65D22.5 (15-22.5)	16	205	25	361-704	-
445/65D19.5 (18-19.5)	16	225	28	361-712	-
445/65D22.5 (18-22.5)	16	247	28	361-720	-



RANCHER TTG1

Designed for use in vineyards. Tread stays cleaner and provides hold on hills.

8.0/75-15	6	29	25	361-941C	-
-----------	---	----	----	-----------------	---



FLOTATION SUPER ALL TERRAIN TL

New compact tractor tire engineered to minimize soil compaction. Delivers flotation for smooth ride and consistent tread profile regardless of tire size.

215/65D14	4	21	10	365-622	-
265/55D16.5	93A8	30	10	365-350	-
320/55D16.5	89A8	45	11	365-384	-
380/70D19.5	4	88	16	365-639	-

	Size	Ply	Weight	Tread	Article	Old Article
	<u>FLOTATION SUPER ALL TERRAIN TL</u>					
	New compact tractor tire engineered to minimize soil compaction. Delivers flotation for smooth ride and consistent tread profile regardless of tire size.					
	460/60D24	135A8	119	17	365-418	-
	<u>TURF & FIELD TLG2</u>					
	Low-profile design provides excellent traction. Extra flotation for minimum ground disturbance.					
	29X1200-15	6	41	11	359-785	-
	31X13.50-15	8	53	11	354-856	-
	<u>FARM SERVICE RIB TTNV</u>					
	3-rib front tire designed for small ag tractors. Designed for positive steering control in loose soil conditions and side slopes.					
	4.00-9	2	6	12	344-621B	-
	4.50-10	4	7	13	344-648B	-
	6-12	4	9	11	344-699B	-
	<u>FARM SERVICE DIA TTNV</u>					
	Small diameter turf tire designed for small tractors. Provides maximum flotation and minimum turf damage on lawns, cemeteries, golf courses and sandy soils.					
	6-14	4	10	10	344-362B	-
	7-14	4	13	11	344-370B	-
	11.2-24	4	61	21	344-869B	-
	<u>FARM SERVICE LUG-15 TTNV</u>					
	Great in hard or soft soil conditions. Low bar angle optimizes traction.					
	9.5-16	6	43	42	344-907B	-
	<u>FARM SERVICE LUG-18 TTNV</u>					
	Great in hard or soft soil conditions. Low bar angle optimizes traction.					
	8.3-22	6	49	109	378-695B	-

	Size	Ply	Weight	Tread	Article	Old Article
	<u>FARM SERVICE LUG-M TTNy</u>					
	Specially designed for front positions of MFWD tractors. Engineered for optimum ride, comfort and wear.					
	180/85D12	4	19	35	364-908B	-
	<u>ALL TRACTION FIELD & ROAD TLG1</u>					
	23° tread design for superior traction. Nylon cord body for durability and long life.					
	8-16	6	31	22	360-376	-
	<u>FARM SERVICE LUG-M TTNy</u>					
	Specially designed for front positions of MFWD tractors. Engineered for optimum ride, comfort and wear.					
	8-16	6	30	39	344-508B	-
	<u>PILLOW DIA TLNy</u>					
	High flotation for carts and mowers. Small block tread is gentle on turf.					
	24X8.50-14	4	17	11	344-591B	-
	<u>PILLOW DIA TTNy</u>					
	High flotation for carts and mowers. Small block tread is gentle on turf.					
	212/80D15	4	26	11	344-575B	-
	<u>PILLOW DIA 1 TTNy</u>					
	High flotation for carts and mowers. Small block tread is gentle on turf.					
	475/65D20	4	113	17	352-624B	-

Current Tire List

Size	Ply	Weight	Tread	Article	Old Article
 <u>AG MOWER M40B TLNY</u> High flotation design prevents turf damage while mowing. Great traction and hold on hills.					
315/75D15	4	47	11	354-848B	-