



120
AC
VOLT

ACCESSORIES
Enhancements
Page 50

UPLIGHTING
Techniques
Page 4

DOWNLIGHTING
Techniques
Page 4

MOUNTING DEVICES
Page 137

DIRECTIONAL LIGHTS

120 volt Incandescent/Halogen



**DL-20-MR16-AC-L-BRT**

75w MR16 (EYC) (75w max.)

Cast Aluminum

**DL-20-NL-EC-BRS/FA-26-BRS**

PAR20 None Supplied (50w max.)

Solid Brass

DL-20-NL, DL-20-MR16T, DL-AR70T SERIES SPECIFICATIONS:**Construction—DL-20-BRS:** Cast brass Bullet; adjustable cast brass swivel**DL-20:** Cast aluminum Bullet; adjustable cast aluminum swivel**CDL-20:** Composite Bullet; adjustable composite swivel**Collars—EC:** Cast aluminum extension cap, brass for -BRS fixtures, composite for -CDL fixtures**AC:** Cast aluminum angle collar, brass for -BRS fixtures, composite for -CDL fixtures**O-Ring:** Silicone high-temperature red O-ring**Lens—DL-20-BRS:** Convex high impact clear tempered glass**DL-20, CDL-20:** High impact clear tempered glass**Socket:** High temperature ceramic medium base with 250° C silicone lead wires**Wiring:** Standard 120 volt; black, white and ground, 9" lead wires**Finish:** Optional finishes available; page 8

Catalog Number	Description	Max. Wattage	Lamp Supplied	Standard Finish
----------------	-------------	--------------	---------------	-----------------

PAR20 LAMP FIXTURES—120 VOLT

Outdoor-rated PAR20 lamps (not supplied) must be used with the PAR20 light fixtures listed below.

DL-20-NL	PAR20 aluminum Bullet, no collar	50w	None	Black texture
DL-20-NL-BRS	PAR20 brass Bullet, no collar	50w	None	Unfinished brass
CDL-20-NL-BLT	PAR20 composite Bullet, no collar	50w	None	Black texture
DL-20-NL-EC	PAR20 aluminum Bullet, extension cap, lens	50w	None	Black texture
DL-20-NL-EC-BRS	PAR20 brass Bullet, extension cap, lens	50w	None	Unfinished brass
CDL-20-NL-EC-BLT	PAR20 composite Bullet, extension cap, lens	50w	None	Black texture

DL-20-NL-AC and DL-20-AC-BRS fixtures below supplied without lens; convex and flat lenses are available as accessories.






DL-20-NL-AC	PAR20 aluminum Bullet with angle collar	50w	None	Black texture
DL-20-NL-AC-BRS	PAR20 brass Bullet with angle collar	50w	None	Unfinished brass
CDL-20-NL-AC	PAR20 composite Bullet with angle collar	50w	None	Black texture

MR16 LAMP FIXTURES—12 VOLT WITH TRANSFORMER**120v. Lamp Options:** See pages 143-144 group E

DL-20-MR16T	Aluminum Bullet, transformer, ext. cap, lens	75w	75w MR16 (EYC)	Black texture
DL-20-MR16T-BRS	Brass Bullet, transformer, ext. cap, lens	75w	75w MR16 (EYC)	Unfinished brass
CDL-20-MR16T-BLT	Composite Bullet, transformer, ext. cap, lens	75w	75w MR16 (EYC)	Black texture
DL-20-AC-MR16T	Aluminum Bullet with angle collar, lens	75w	75w MR16 (EYC)	Black texture
DL-20-AC-MR16T-BRS	Brass Bullet with angle collar, lens	75w	75w MR16 (EYC)	Unfinished brass
CDL-20-AC-MR16T	Composite Bullet with angle collar, lens	75w	75w MR16 (EYC)	Black texture

AR70 LAMP FIXTURES—12 VOLT WITH TRANSFORMER**120v. Lamp Options:** See page 145 group I

DL-20-AR70T	Aluminum Bullet, transformer, ext. cap, lens	75w	75w MR16 (EYC)	Black texture
DL-20-AR70T-BRS	Brass Bullet, transformer, ext. cap, lens	75w	75w MR16 (EYC)	Unfinished brass
CDL-20-AR70T-BLT	Composite Bullet, transformer, ext. cap, lens	75w	75w MR16 (EYC)	Black texture
DL-20-AC-AR70T	Aluminum Bullet with angle collar, lens	75w	75w MR16 (EYC)	Black texture
DL-20-AC-AR70T-BRS	Brass Bullet with angle collar, lens	775w	75w MR16 (EYC)	Unfinished brass
CDL-20-AC-AR70T	Composite Bullet with angle collar, lens	75w	75w MR16 (EYC)	Black texture

**DL-20-NL****DL-20-NL-EC****DL-20-NL-AC****DL-20-NL SERIES RECOMMENDED ENHANCEMENTS:**

FA-08-06	Round 1/4" Hex Cell Louver
FA-10-20-BLUE	Blue Tempered Glass Lens
FA-10-20-GREEN	Green Tempered Glass Lens
FA-38	Aluminum Extension Cap with Tempered Glass Lens
FA-38-AC	Aluminum Angle Cap with Tempered Glass Lens
FA-94-[Color]	6" Extra-Long Aluminum Extension Shield with powder coat options
FA-98-20	Linear Spread Tempered Glass Lens
FA-99-20	Convex Tempered Glass Lens
FA-104-20	Wide Spread Tempered Glass Lens Softener

**DL-20-NL-BAR on FA-26-BAR**

PAR20 None Supplied (50w max.)

Solid Brass






DL-30-NL-BRS on FA-26-BRS
PAR30 None Supplied (70w max.)
Solid Brass




DL-30-NL-AC-RST on FA-111-RST
PAR30 None Supplied (70w max.)
Cast Aluminum

DL-30-NL SERIES SPECIFICATIONS:



- Construction**—**DL-30-BRS:** Cast brass Bullet; adjustable cast brass swivel
DL-30: Cast aluminum Bullet; adjustable cast aluminum swivel
- Lens:**—**DL-30-BRS:** Convex high impact clear tempered glass
DL-30: High impact clear flat tempered glass
- Collars**—**EC:** Cast aluminum extension cap, brass for -BRS fixtures, composite for -CDL fixtures
AC: Cast aluminum angle collar, brass for -BRS fixtures, composite for -CDL fixtures
- O-Ring:** Silicone high-temperature red O-ring
- Socket:** High temperature ceramic medium base with 150° C silicone lead wires, brass nickel plated contact
- Wiring:** Standard 120 volt; black, white and ground, 9" lead wires
- Finish:** Optional finishes available; page 8



DL-30-NL



DL-30-NL-EC



DL-30-NL-AC

Catalog Number	Description	Max. Wattage	Lamp Supplied	Standard Finish
----------------	-------------	--------------	---------------	-----------------

PAR30 LAMP FIXTURES—120 VOLT

Outdoor-rated PAR30 lamps (not supplied) must be used with the PAR30 light fixtures listed below.

DL-30-NL	PAR30 aluminum Bullet	50w	None	Black texture
DL-30-NL-BRS	PAR30 brass Bullet	50w	None	Unfinished brass
DL-30-NL-EC	PAR30 aluminum Bullet with extension cap	50w	None	Black texture
DL-30-NL-EC-BRS	PAR30 brass Bullet with extension cap	50w	None	Unfinished brass
DL-30-NL-AC fixture below supplied without lens; convex and flat lenses are available as accessories.				
DL-30-NL-AC	PAR30 aluminum Bullet with angle collar	50w	None	Black texture
DL-30-NL-AC-BRS	PAR30 brass Bullet with angle collar	50w	None	Unfinished brass

DL-30-NL SERIES RECOMMENDED ENHANCEMENTS:

FA-08-30	Round 1/4" Hex Cell Louver
FA-10-30-BLUE	Blue Tempered Glass Lens
FA-10-30-GREEN	Green Tempered Glass Lens
FA-40	Aluminum Extension Cap
FA-40-AC	Aluminum Angle Cap
FA-95-[Color]	8" Extra-Long Aluminum Extension Shield with powder coat options
FA-98-30	Linear Spread Tempered Glass Lens
FA-99-30	Convex Tempered Glass Lens
FA-104-30	Wide Spread Tempered Glass Lens Softener






PAR PHOTOMETRICS



Appendix
Page 149

**DL-38-EC-L-NL-BRT**

PAR38 None Supplied (150w max.)
Cast Aluminum

**C/DL-38-NL****C/DL-38-NL-EC-L****C/DL-38-NL-AC-L****DL-38-NL-AC-L-BRS**

PAR38 None Supplied (150w max.)
Solid Brass

DL-38-NL SERIES SPECIFICATIONS:

Construction—**DL-38-BRS:** Cast brass Bullet; adjustable cast brass swivel
DL-38: Cast aluminum Bullet; adjustable cast aluminum swivel
CDL-38: Composite Bullet; adjustable composite swivel

Collars—**EC:** Cast aluminum extension cap, brass for -BRS fixtures, composite for -CDL fixtures
AC: Cast aluminum angle collar, brass for -BRS fixtures, composite for -CDL fixtures


O-Ring: Silicone high-temperature red O-ring

Lens: Convex high impact clear tempered glass

Socket: High temperature ceramic medium base with 150° C silicone lead wires, brass nickel plated contact, for compact fluorescent GX23 bi-pin with type-1 outdoor magnetic clamped core ballast

Wiring: Standard 120 volt; black, white and ground, 9" lead wires

Finish: Optional finishes available; page 8

**DL-38-NL-BRS/FA-26**

on FA-26-BRS
Solid Brass

Catalog Number	Description	Max. Wattage	Lamp Supplied	Standard Finish
----------------	-------------	--------------	---------------	-----------------

PAR38 LAMP FIXTURES—120 VOLT

Outdoor-rated PAR38 lamps (not supplied) must be used with the PAR38 light fixtures listed below.

Fixtures below are supplied without lenses; convex and flat lenses are available as accessories.

DL-38-NL	PAR38 aluminum Bullet, no collar	150w	None	Black texture
DL-38-NL-BRS	PAR38 brass Bullet, no collar	150w	None	Unfinished brass
CDL-38-NL-BLT	PAR38 composite Bullet, no collar	150w	None	Black texture
DL-38-NL-EC	PAR38 aluminum Bullet with extension cap	150w	None	Black texture
DL-38-NL-EC-BRS	PAR38 brass Bullet with extension cap	150w	None	Unfinished brass
CDL-38-NL-EC-BLT	PAR38 composite Bullet with extension cap	150w	None	Black texture
CDL-38-NL-AC	PAR38 composite Bullet with angle collar	150w	None	Black texture
DL-38-NL-AC-BRS	PAR38 brass Bullet with angle collar	150w	None	Unfinished brass
DL-38-NL-AC	PAR38 aluminum Bullet with angle collar	150w	None	Black texture
CDL-38-NL-AC	PAR38 composite Bullet with angle collar	150w	None	Black texture

Fixtures below are supplied with lenses.

DL-38-NL-EC-L	PAR38 aluminum Bullet, extension cap, lens	150w	None	Black texture
DL-38-NL-EC-L-BRS	PAR38 brass Bullet, extension cap, lens	150w	None	Unfinished brass
CDL-38-NL-EC-L-BLT	PAR38 composite Bullet, extension cap, lens	150w	None	Black texture
DL-38-NL-AC-L-BRS	PAR38 brass Bullet, angle collar, lens	150w	None	Unfinished brass
DL-38-NL-AC-L	PAR38 aluminum Bullet, angle collar, lens	150w	None	Black texture
CDL-38-NL-AC-L	PAR38 composite Bullet, angle collar, lens	150w	None	Black texture

COMPACT FLUORESCENT LAMP FIXTURES—120 VOLT

Fixtures for 13 watt quad cool white fluorescent lamps are listed below, supplied with extension collars and convex lenses. For composite add **C** prefix to catalog number.


DL-38-NL-FL-13	Aluminum Bullet with flat cap	13w	None	Black texture
DL-38-NL-FL-13-BRS	Brass Bullet with flat cap	13w	None	Unfinished brass
DL-38-NL-AC-FL-13	Aluminum Bullet with angle collar	13w	None	Black texture
DL-38-NL-AC-FL-13-BRS	Brass Bullet with angle collar	13w	None	Unfinished brass

Fixtures for 2 x 13 watt quad cool white fluorescent lamps are listed below.

DL-38-NL-FL-26	Aluminum Bullet with flat cap	2 x 13w	None	Black texture
DL-38-NL-FL-26-BRS	Brass Bullet with flat cap	2 x 13w	None	Unfinished brass
DL-38-NL-AC-FL-26	Aluminum Bullet with angle collar	2 x 13w	None	Black texture
DL-38-NL-AC-FL-26-BRS	Brass Bullet with angle collar	2 x 13w	None	Unfinished brass

DL-38-NL SERIES RECOMMENDED ENHANCEMENTS:

FA-08-38	Round 1/4" Hex Cell Louver
FA-10-38-BLUE	Blue Tempered Glass Lens
FA-10-38-GREEN	Green Tempered Glass Lens
FA-36	Aluminum Extension Cap
FA-36-BRS	Brass Extension Cap
CFA-36	Composite Extension Cap
FA-36-AC	Aluminum Angle Collar
FA-36-AC-BRS	Brass Angle Collar
CFA-36-AC	Composite Angle Collar
FA-37-GLASS	Clear Convex Tempered Glass Lens
FA-96-[Color]	10" Extra-Long Aluminum Extension Shield with powder coat options
FA-98-38	Linear Spread Tempered Glass Lens
FA-99-30	Convex Tempered Glass Lens
FA-104-38	Wide Spread Tempered Glass Lens Softener

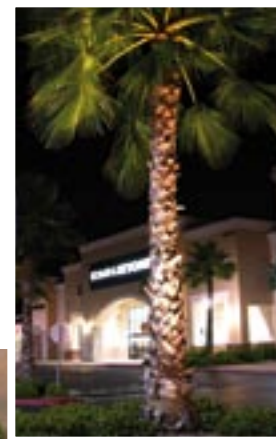

PAR PHOTOMETRICS



Appendix A
Page 149