



# FLUORESCENT LIGHTS

120v., 220v., 240v., 277 volt



UPLIGHTING



Techniques  
Page 4

ACCESSORIES



Enhancements  
Page 124

MOUNTING DEVICES



Page 137



**FFL-5-WBR on FA-26-WBR**  
5w Lamp (7w max.)  
Extruded Aluminum



**FFL-5-HE on FA-26-BLT**  
5w Lamp (7w max.)  
Extruded Aluminum



**FFL-7-TRC on FA-26-TRC**  
7w Lamp (7w max.)  
Extruded Aluminum



**FFL-7-HE on FA-26-BLT**  
7w Lamp (7w max.)  
Extruded Aluminum

## FFL-5, 7 COMPACT FLUORESCENT SERIES SPECIFICATIONS:

**Construction:** Extruded aluminum floodlight with adjustable cast aluminum swivel

**Reflector:** Highly polished specular aluminum

**Lens:** High-impact clear acrylic

**Hood Extension (-HE models):** Heavy-duty stamped aluminum

**Ballast:** Type 1 outdoor magnetic clamped core for all 120 volt compact fluorescent lights

Primary amp draw for 120v. is 0.165 amp, not including lamp wattage

**Note:** 5 and 7 watt lamps operate off the same ballast and socket; 5, or 7 watt lamps may be interchanged within the fixture to achieve different light intensities

**Socket:** G23 bi-pin

**Lamp life:** 10,000+ hours average rating

**Wiring:** 120 volt standard

**Mounting:** None supplied, FA-26 Pedestal recommended. See "Mounting Devices" section

**Finish:** Black texture polyester powder coat—optional finishes available; page 8

| Catalog Number                                      | Description                                            | Max. wattage | (Specify)          |                 |
|-----------------------------------------------------|--------------------------------------------------------|--------------|--------------------|-----------------|
|                                                     |                                                        |              | Lamp Supplied      | Standard Finish |
| <b>FFL-5, 7</b>                                     | Extruded alum. floodlight, 120v.                       | 7w           | 5 or 7 watt (41°K) | Black texture   |
| <b>FFL-5, 7-HE</b>                                  | Extruded alum. floodlight with hood extension, 120v.7w | 7w           | 5 or 7 watt (41°K) | Black texture   |
| For catalog numbers below, specify at time of order |                                                        |              |                    |                 |
| <b>FFL-5, 7-220V</b>                                | Extruded alum. floodlight, 220v.                       | 7w           | 5 or 7 watt (41°K) | Black texture   |
| <b>FFL-5, 7-HE-220V</b>                             | Extruded alum. floodlight, hood extension, 220v.       | 7w           | 5 or 7 watt (41°K) | Black texture   |
| <b>FFL-5, 7-240V</b>                                | Extruded alum. floodlight, 240v.                       | 7w           | 5 or 7 watt (41°K) | Black texture   |
| <b>FFL-5, 7-HE-240V</b>                             | Extruded alum. floodlight, hood extension, 240v.       | 7w           | 5 or 7 watt (41°K) | Black texture   |
| <b>FFL-5, 7-277V</b>                                | Extruded alum. floodlight, 277v.                       | 7w           | 5 or 7 watt (41°K) | Black texture   |
| <b>FFL-5, 7-HE-277V</b>                             | Extruded alum. floodlight, hood extension, 277v.       | 7w           | 5 or 7 watt (41°K) | Black texture   |

### RECOMMENDED ENHANCEMENTS:

**Lamp Options:** See page 148, group M. Warm white lamps also available

**FA-06-5, 7** 1/4" Mini Hex Cell Louver

**FA-09-5, 7-BLUE** Blue Plastic Gel


**FA-09-5, 7-GREEN** Green Plastic Gel

**FA-26** Commercial Mounting Pedestal


**FA-26-R** Commercial Mounting Pedestal with receptacle

**FA-39** Commercial Mounting Pedestal with 6 ft. power cord

**-HE** Hood Extension




**FFL-5,7**




**FFL-5,7-HE**




## FFL-5, 7 COMPACT FLUORESCENT SERIES SPECIFICATIONS (continued)

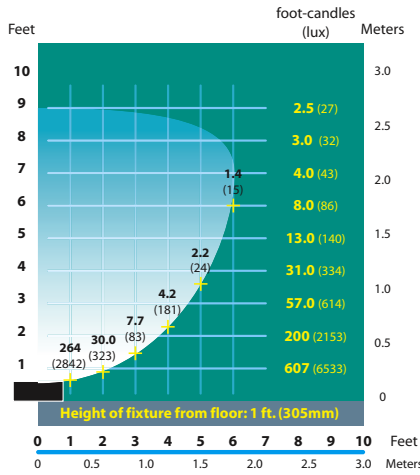


FFL-5 Half Spread Photometrics

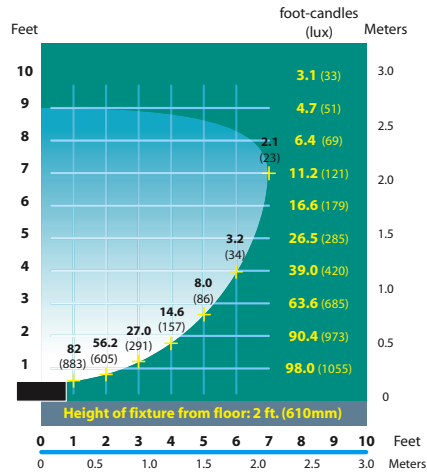


FFL-5 Half Spread Photometrics

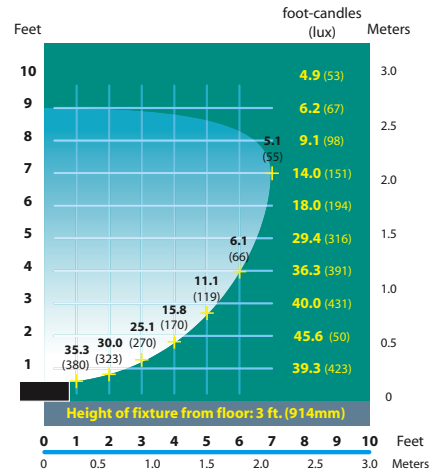


FFL-5 Half Spread Photometrics

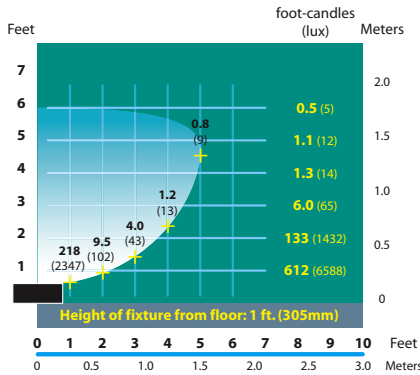


FFL-5-HE Half Spread Photometrics

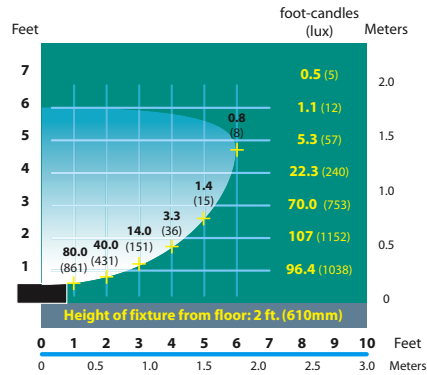


FFL-5-HE Half Spread Photometrics

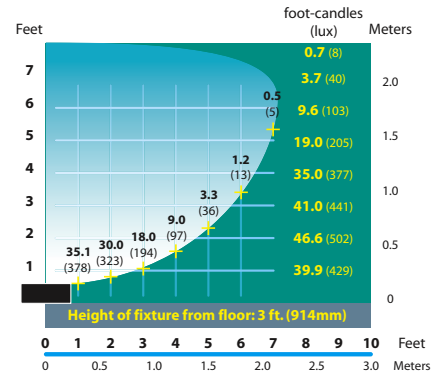


FFL-5-HE Half Spread Photometrics

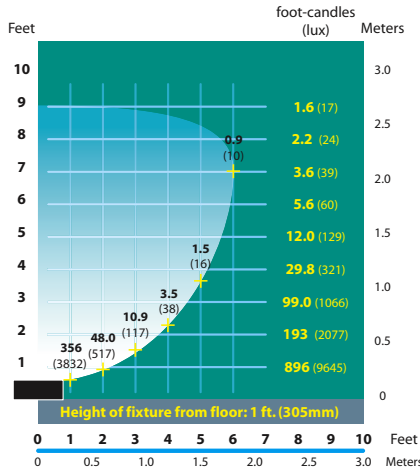


FFL-7 Half Spread Photometrics

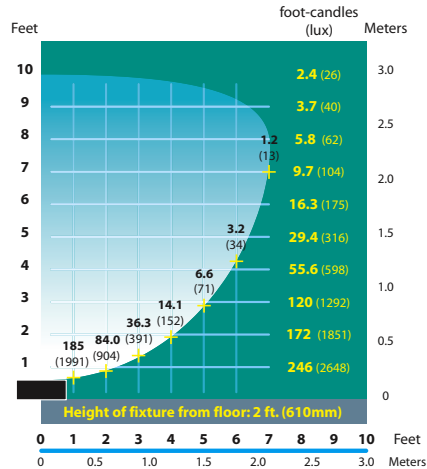


FFL-7 Half Spread Photometrics

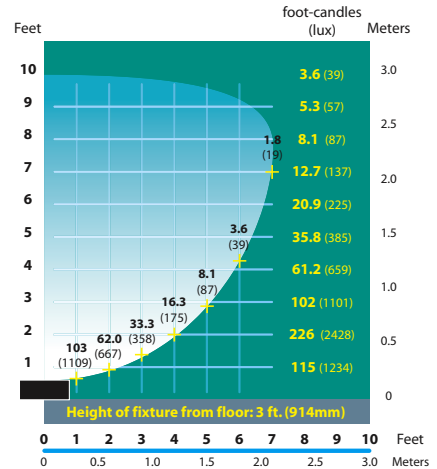


FFL-7 Half Spread Photometrics

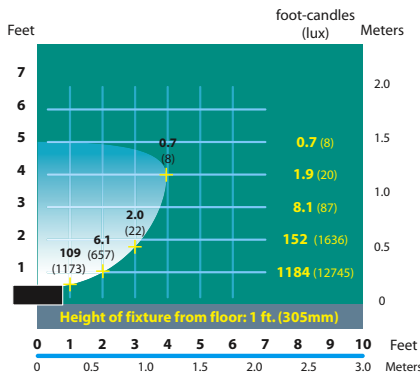

FFL-7-HE Half Spread Photometrics

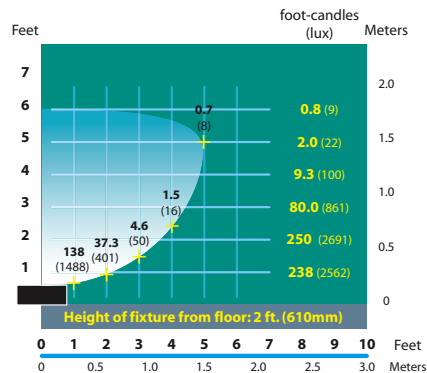

FFL-7-HE Half Spread Photometrics

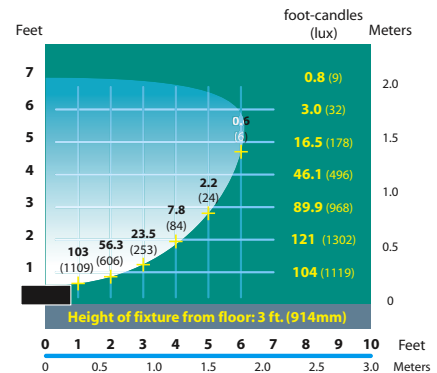

FFL-7-HE Half Spread Photometrics





**FFL-9-HTX on FA-26-HTX**  
9w Lamp (9w max.)  
Extruded Aluminum



**FFL-9-HE**  
9w Lamp (9w max.)  
Extruded Aluminum



**FFL-13-COP on FA-26-BRS**  
13w Lamp (13w max.)  
Solid Copper



**FFL-13-HE**  
13w Lamp (13w max.)  
Extruded Aluminum

## FFL-9, 13 SERIES LIGHT SPECIFICATIONS:

**Construction:** Extruded aluminum floodlight with adjustable cast aluminum swivel

**Reflector:** Highly polished specular aluminum

**Lens:** High-impact clear acrylic

**Hood Extension (-HE models):** Heavy-duty stamped aluminum

**Ballast:** Type 1 outdoor magnetic clamped core for all 120 volt compact fluorescent lights  
Primary amp draw for 120v. is 0.165 amp, not including lamp wattage

**Socket:** G23 bi-pin for 9 watt, GX23 for 13 watt

**Lamp life:** 10,000+ hours average rating

**Wiring:** 120 volt standard

**Mounting:** None supplied, FA-26 Pedestal recommended. See Mounting section, page 137

**Finish:** Black texture polyester powder coat—optional finishes available; page 8

For 220 volt and 240 volt options available, contact factory

| Catalog Number        | Description                                      | Max. wattage | Lamp Supplied  | Standard Finish   |
|-----------------------|--------------------------------------------------|--------------|----------------|-------------------|
| <b>FFL-9</b>          | Extruded alum. floodlight, 120v.                 | 9w           | 9 watt (41°K)  | Black texture     |
| <b>FFL-9-HE</b>       | Extrudedalum. floodlight, hood extension, 120v.  | 9w           | 9 watt (41°K)  | Black texture     |
| <b>FFL-9-COP</b>      | Formed copper fixture, brass swivel, 120v.       | 9w           | 9 watt (41°K)  | Unfinished copper |
| <b>FFL-9-277V</b>     | Extruded alum. floodlight, 277v.                 | 9w           | 9 watt (41°K)  | Black texture     |
| <b>FFL-9-HE-277V</b>  | Extruded alum. floodlight, hood extension, 277v. | 9w           | 9 watt (41°K)  | Black texture     |
| <b>FFL-13</b>         | Extruded alum. floodlight, 120v.                 | 13w          | 13 watt (41°K) | Black texture     |
| <b>FFL-13-HE</b>      | Extrudedalum. floodlight, hood extension, 120v.  | 13w          | 13 watt (41°K) | Black texture     |
| <b>FFL-13-COP</b>     | Formed copper fixture, brass swivel, 120v.       | 13w          | 13 watt (41°K) | Unfinished copper |
| <b>FFL-13-277V</b>    | Extruded alum. floodlight, 277v.                 | 13w          | 13 watt (41°K) | Black texture     |
| <b>FFL-13-HE-277V</b> | Extruded alum. floodlight, hood extension, 277v. | 13w          | 13 watt (41°K) | Black texture     |

## RECOMMENDED ENHANCEMENTS:

**Lamp Options:** See page 148, group M. Warm white (27°K) and other lamps also available

**FA-06-9, 13** 1/4" Mini Hex Cell Louver

**FA-09-9, 13-BLUE** Blue Plastic Gel


**FA-09-9, 13-GREEN** Green Plastic Gel

**FA-26** Commercial Mounting Pedestal


**FA-26-R** Commercial Mounting Pedestal with receptacle

**FA-39** Commercial Mounting Pedestal with 6 ft. power cord


**-HE** Hood Extension




**FFL-9**



**FFL-9-HE**



**FFL-13**




**FFL-13-HE**




**FFL-13-CAM on FA-26-CAM**  
13w Lamp (13w max.)  
Extruded Aluminum




## FFL-9, 13 SERIES SPECIFICATIONS (continued)

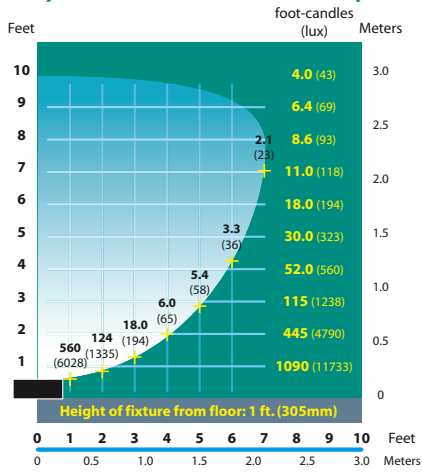


FFL-9 Half Spread Photometrics

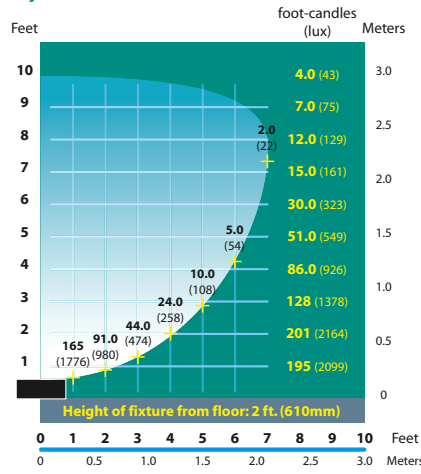


FFL-9 Half Spread Photometrics

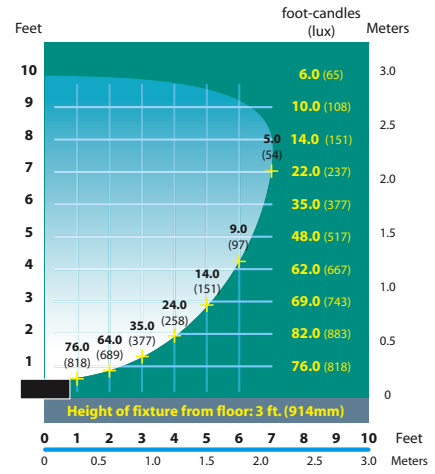


FFL-9 Half Spread Photometrics

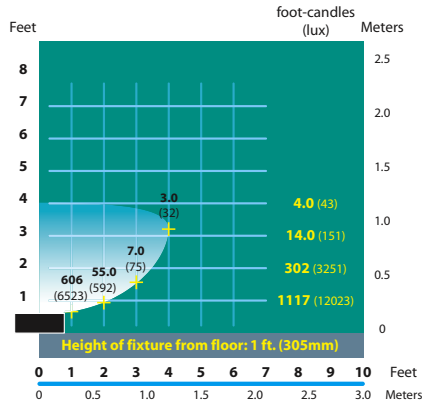


FFL-9-HE Half Spread Photometrics

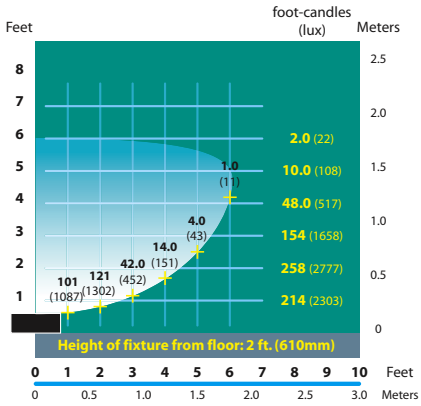


FFL-9-HE Half Spread Photometrics

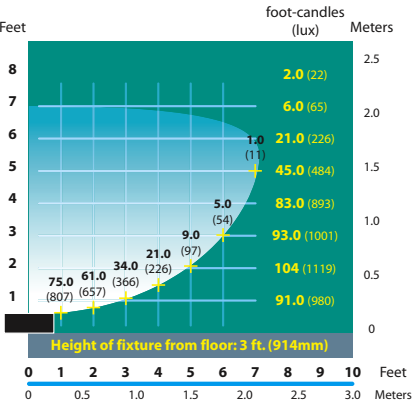


FFL-9-HE Half Spread Photometrics

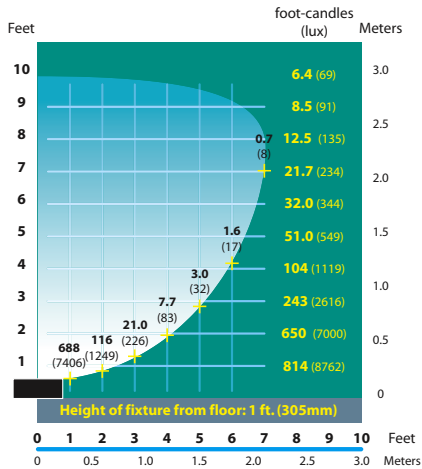


FFL-13 Half Spread Photometrics

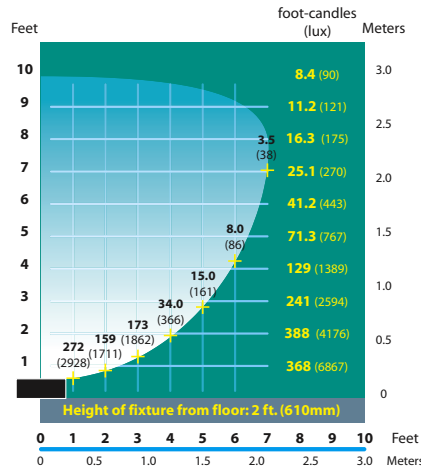


FFL-13 Half Spread Photometrics

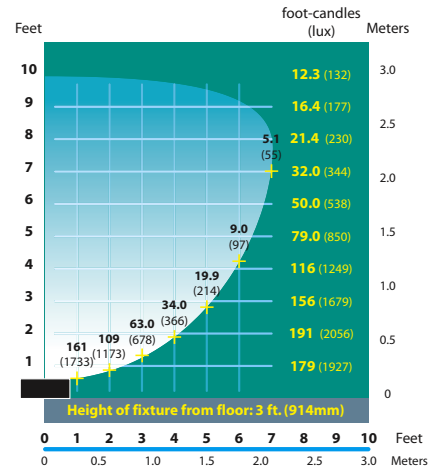


FFL-13 Half Spread Photometrics

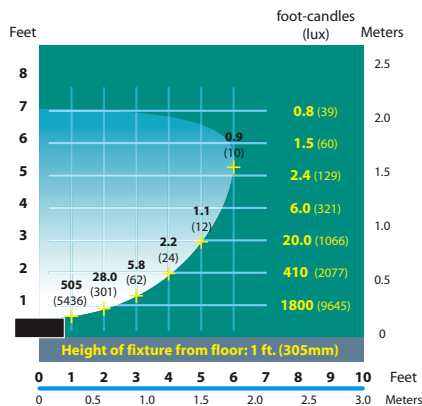

FFL-13-HE Half Spread Photometrics

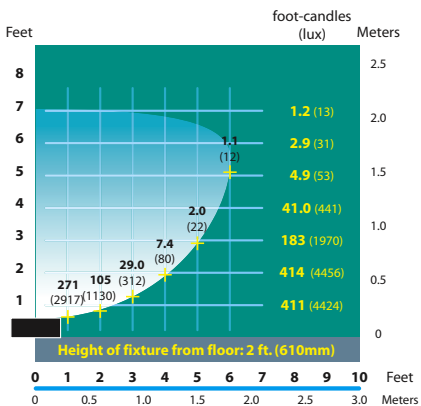

FFL-13-HE Half Spread Photometrics

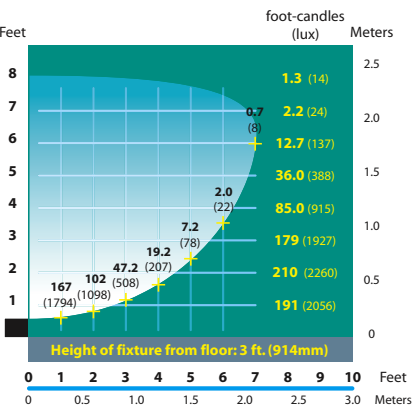

FFL-13-HE Half Spread Photometrics





**FFL-26 on FA-26**  
2 x 13w Lamp (26w max.)  
Extruded Aluminum



**FFL-26-HE ON FA-26**  
2 x 13w Lamp (26w max.)  
Extruded Aluminum

### FFL-26 SERIES LIGHT SPECIFICATIONS:

- Construction:** Extruded aluminum floodlight with adjustable cast aluminum swivel  
**Reflector:** Highly polished specular aluminum  
**Lens:** High-impact clear acrylic  
**Hood Extension (-HE models):** Heavy-duty stamped aluminum  
**Ballast:** 2 x type 1 outdoor magnetic clamped core for all 120 volt compact fluorescent lights  
 Primary amp draw for 120v. is 0.165 amp, not including lamp wattage  
**Socket:** 2 x GX23 bi-pin, 330 amps  
**Lamp life:** 10,000+ hours average rating  
**Wiring:** Standard 120 volt  
**Mounting:** None supplied, FA-26 Pedestal recommended. See Mounting section, page 137  
**Finish:** Black texture polyester powder coat—optional finishes available; page 8








For 220 volt and 240 volt options available, contact factory

| Catalog Number        | Description                                      | Max. wattage | Lamp Supplied      | Standard      |
|-----------------------|--------------------------------------------------|--------------|--------------------|---------------|
| <b>FFL-26</b>         | Extruded alum. floodlight, 120v.                 | 26w          | 2 x 13 watt (41°K) | Black texture |
| <b>FFL-26-HE</b>      | Extruded alum. floodlight, hood extension, 120v. | 26w          | 2 x 13 watt (41°K) | Black texture |
| <b>FFL-26-277V</b>    | Extruded alum. floodlight, 277v.                 | 26w          | 2 x 13 watt (41°K) | Black texture |
| <b>FFL-26-HE-277V</b> | Extruded alum. floodlight, hood extension, 277v. | 26w          | 2 x 13 watt (41°K) | Black texture |

### RECOMMENDED ENHANCEMENTS:

**Lamp Options:** See page 148, group M. Warm white (27°K) and other lamps also available

- FA-06-26** 1/4" Mini Hex Cell Louver  
**FA-09-26-BLUE** Blue Plastic Gel  
**FA-09-26-GREEN** Green Plastic Gel  
**FA-26** Commercial Mounting Pedestal  
**FA-26-R** Commercial Mounting Pedestal with receptacle  
**FA-39** Commercial Mounting Pedestal with 6 ft. power cord  
**-HE** Hood Extension

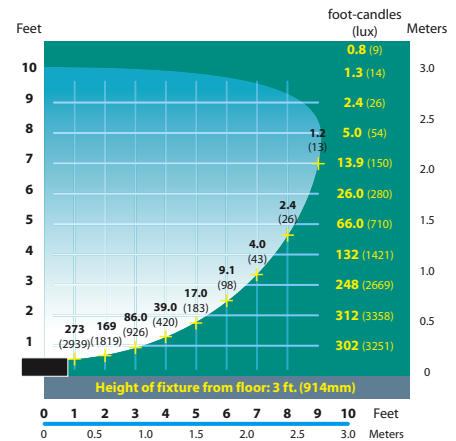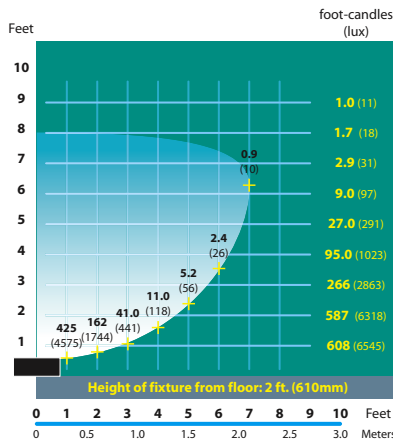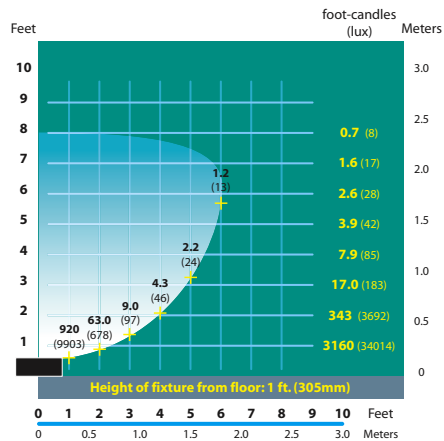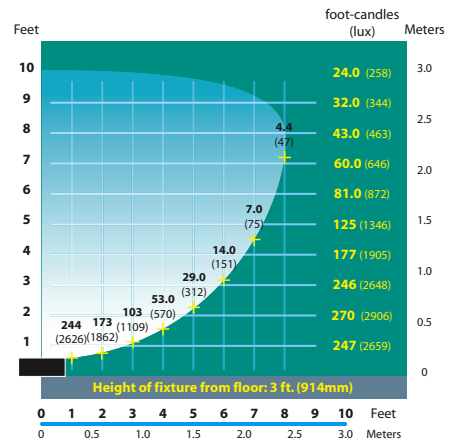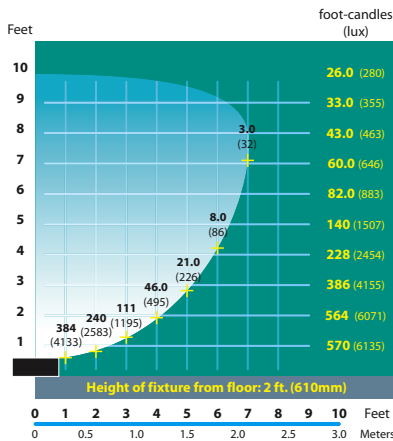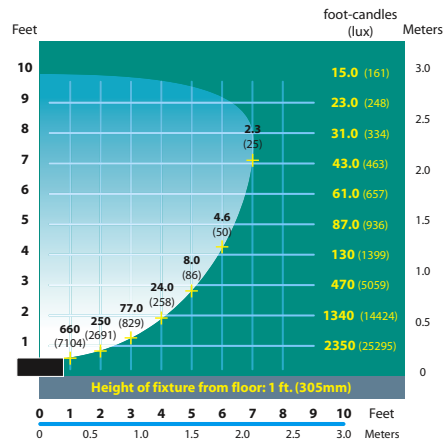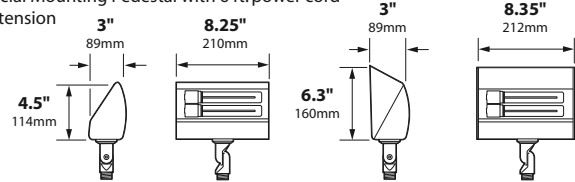



**FFL-52-3F**

4 x 13w Fluorescent (52w max.)  
Extruded Aluminum

### FFL-52, FFL-78 SERIES LIGHT SPECIFICATIONS:

**Construction:** Extruded aluminum floodlight with adjustable cast aluminum swivel

**Reflector:** Highly polished specular aluminum

**Lens:** High-impact clear acrylic

**Ballast:** 120 volt, Type 1 Outdoor, clamp core magnetic, 6 x FFL-78, 4 x FFL-52

**Lamp:** 13 watt cool white (41°K) compact fluorescent, 10,000 hours average rating

**Socket:** GX23 bi-pin








**Wiring:** Standard 120 volt, black, white and ground

**Mounting:** None supplied, FA-26 Pedestal recommended. See Mounting section, page 137

**Finish:** Black texture polyester powder coat

For 220, 240 and 277 volt options available, contact factory

| Catalog Number | Description                             | Max. wattage | Lamp Supplied      | Standard Finish |
|----------------|-----------------------------------------|--------------|--------------------|-----------------|
| FFL-52-3F      | 36" Extruded aluminum floodlight, 120v. | 52w          | 4 x 13 watt (41°K) | Black texture   |
| FFL-52-3F-277V | 36" Extruded aluminum floodlight, 277v. | 52w          | 4 x 13 watt (41°K) | Black texture   |
| FFL-78-4F      | 48" Extruded aluminum floodlight, 120v. | 78w          | 6 x 13 watt (41°K) | Black texture   |
| FFL-78-4F-277V | 48" Extruded aluminum floodlight, 277v. | 78w          | 6 x 13 watt (41°K) | Black texture   |

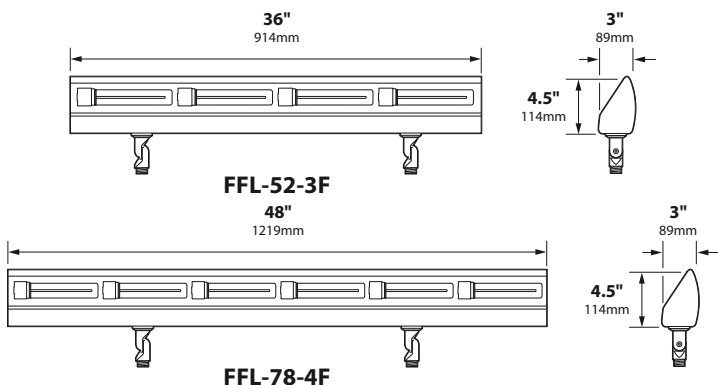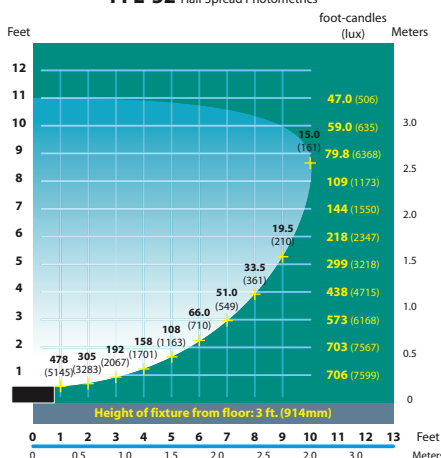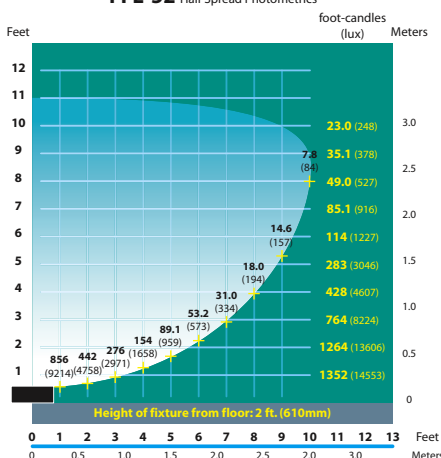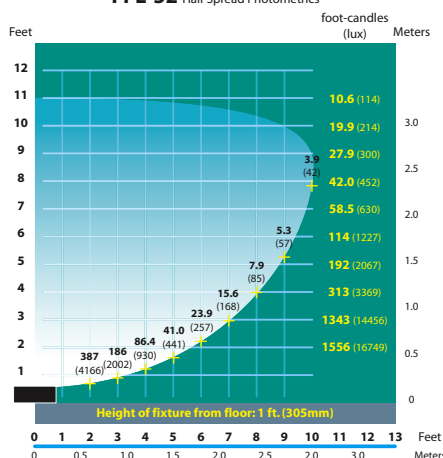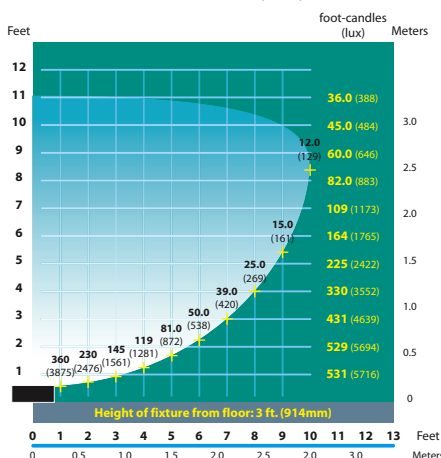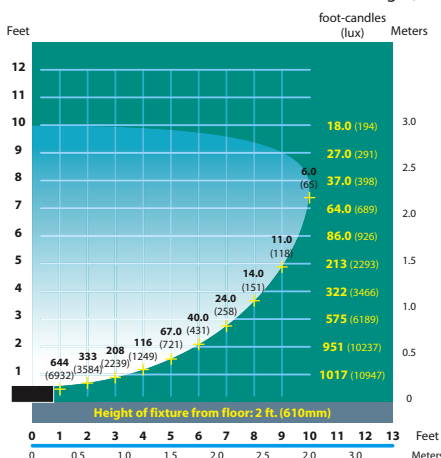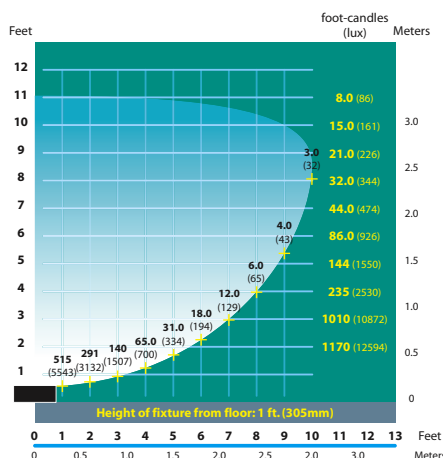

#### RECOMMENDED ENHANCEMENTS:

**Lamp Options:** See page 148, group M. Warm white lamps also available

|          |                                                    |
|----------|----------------------------------------------------|
| FA-26    | Commercial Mounting Pedestal                       |
| FA-26-R  | Commercial Mounting Pedestal with receptacle       |
| FA-39    | Commercial Mounting Pedestal with 6 ft. power cord |
| -HE      | Hood Extension                                     |
| FA-06-52 | 36" 1/4" Hex Cell Louver                           |
| FA-06-78 | 48" 1/4" Hex Cell Louver                           |



**FFL-78-4F**

6 x 13w Fluorescent (78w max.)  
Extruded Aluminum






**FFL-54-T5 HO on FA-26-BLT**  
54w Fluorescent (54w max.)  
Extruded Aluminum

### FFL-24, -39, -54-T5HO SERIES SPECIFICATIONS:

- Construction:** Extruded aluminum floodlight with adjustable cast aluminum swivel  
**Reflector:** Highly polished specular aluminum  
**Lens:** High-impact clear acrylic  
**Ballast:** 120/230/277 volt, Type 1 Outdoor, high-frequency electronic  
**Wiring:** Standard 120 volt, black, white and ground  
**Mounting:** None supplied, FA-26 Pedestal recommended. See Mounting section, page 137  
**Finish:** Black texture polyester powder coat, optional powder coat finish available on page 5

For 2 lamp units, add **-2L** to catalog number

| Catalog Number         | Description                             | Wattage | Lamp Supplied      | Standard Finish |
|------------------------|-----------------------------------------|---------|--------------------|-----------------|
| <b>FFL-24-T5HO-30K</b> | 24" extruded aluminum floodlight, 120v. | 24w     | 1 x 24 watt (30°K) | Black texture   |
| <b>FFL-24-T5HO-35K</b> | 24" extruded aluminum floodlight, 120v. | 24w     | 1 x 24 watt (35°K) | Black texture   |
| <b>FFL-24-T5HO-41K</b> | 24" extruded aluminum floodlight, 120v. | 24w     | 1 x 24 watt (41°K) | Black texture   |
| <b>FFL-24-T5HO-50K</b> | 24" extruded aluminum floodlight, 120v. | 24w     | 1 x 24 watt (50°K) | Black texture   |
| <b>FFL-39-T5HO-30K</b> | 35" extruded aluminum floodlight, 120v. | 39w     | 1 x 39 watt (30°K) | Black texture   |
| <b>FFL-39-T5HO-35K</b> | 35" extruded aluminum floodlight, 120v. | 39w     | 1 x 39 watt (35°K) | Black texture   |
| <b>FFL-39-T5HO-41K</b> | 35" extruded aluminum floodlight, 120v. | 39w     | 1 x 39 watt (41°K) | Black texture   |
| <b>FFL-39-T5HO-50K</b> | 35" extruded aluminum floodlight, 120v. | 39w     | 1 x 39 watt (50°K) | Black texture   |
| <b>FFL-54-T5HO-30K</b> | 47" extruded aluminum floodlight, 120v. | 54w     | 1 x 54 watt (30°K) | Black texture   |
| <b>FFL-54-T5HO-35K</b> | 47" extruded aluminum floodlight, 120v. | 54w     | 1 x 54 watt (35°K) | Black texture   |
| <b>FFL-54-T5HO-41K</b> | 47" extruded aluminum floodlight, 120v. | 54w     | 1 x 54 watt (41°K) | Black texture   |
| <b>FFL-54-T5HO-50K</b> | 47" extruded aluminum floodlight, 120v. | 54w     | 1 x 54 watt (50°K) | Black texture   |

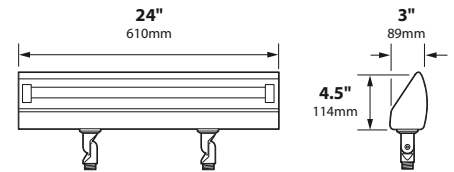

**FFL-24T5HO**

### RECOMMENDED ENHANCEMENTS:

**Lamp Options:** See page 148, group M

|                |                                              |                 |                          |
|----------------|----------------------------------------------|-----------------|--------------------------|
| <b>FA-26</b>   | Commercial Mounting Pedestal                 | <b>FA-06-24</b> | 24" 1/4" Hex Cell Louver |
| <b>FA-26-R</b> | Commercial Mounting Pedestal with receptacle | <b>FA-06-35</b> | 35" 1/4" Hex Cell Louver |
| <b>-HE</b>     | Hood Extension                               | <b>FA-06-47</b> | 47" 1/4" Hex Cell Louver |



**FFL-24-T5HO-BLT on FA-26-BLT**  
24 watt fluorescent (24w max.)  
Extruded Aluminum




**FFL-24-T5HO-BLT on FA-26-BLT**  
24 watt fluorescent (24w max.)  
Extruded Aluminum





**FFL-39-T5HO-BLT on FA-26-BLT**  
39 watt fluorescent (39w max.)  
Extruded Aluminum

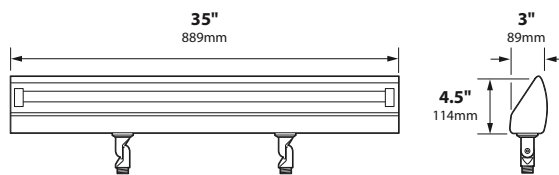


**FFL-39T5HO**



**FFL-39-T5HO-BLT on FA-26-BLT**  
39 watt fluorescent (39w max.)  
Extruded Aluminum



**FFL-54-T5HO-BLT on FA-26-BLT**  
54 watt fluorescent (54w max.)  
Extruded Aluminum

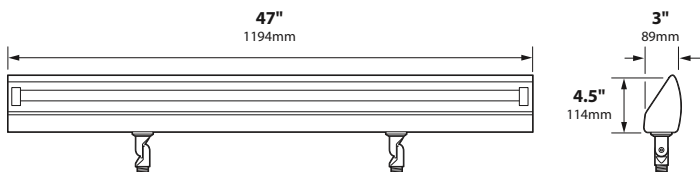


**FFL-54T5HO**




**FFL-54-T5HO-BLT on FA-26-BLT**  
54 watt fluorescent (54w max.)  
Extruded Aluminum




### FFL-24, -39, -54-T5HO SERIES SPECIFICATIONS (continued)

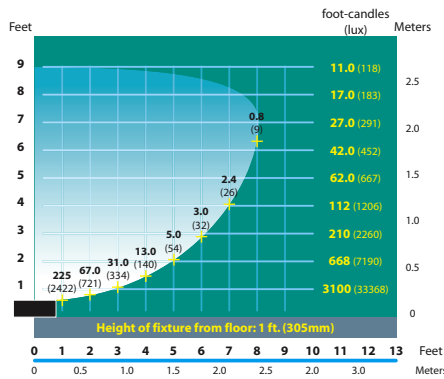


FFL-24T5HO Half Spread Photometrics

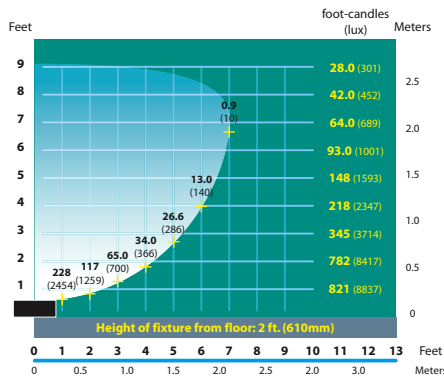


FFL-24T5HO Half Spread Photometrics

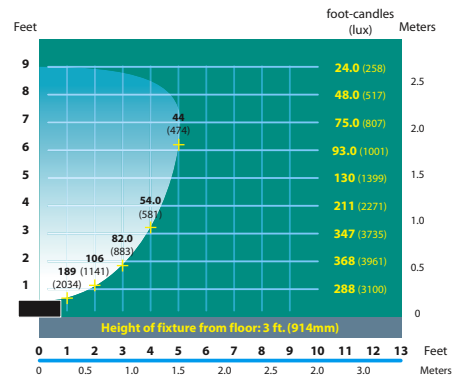


FFL-24T5HO Half Spread Photometrics

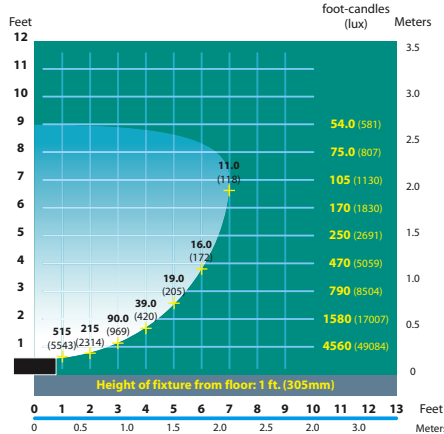


FFL-39T5HO Half Spread Photometrics

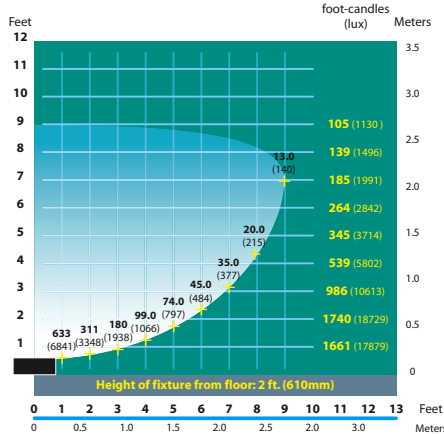


FFL-39T5HO Half Spread Photometrics

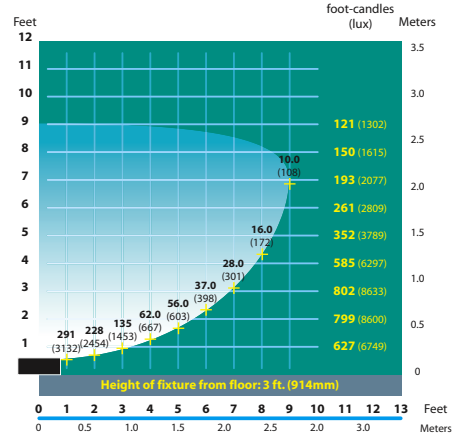


FFL-39T5HO Half Spread Photometrics

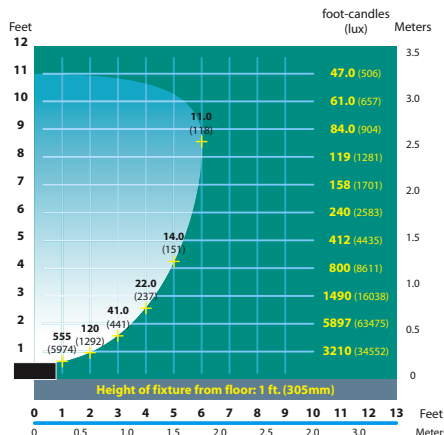

FFL-54T5HO Half Spread Photometrics

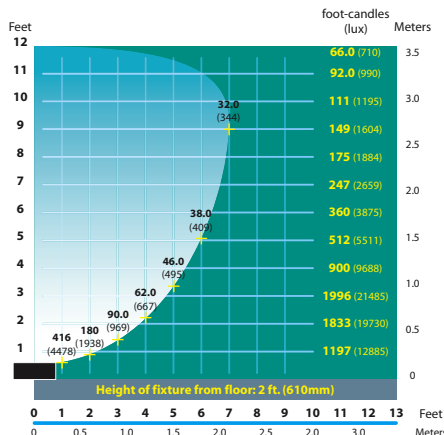

FFL-54T5HO Half Spread Photometrics

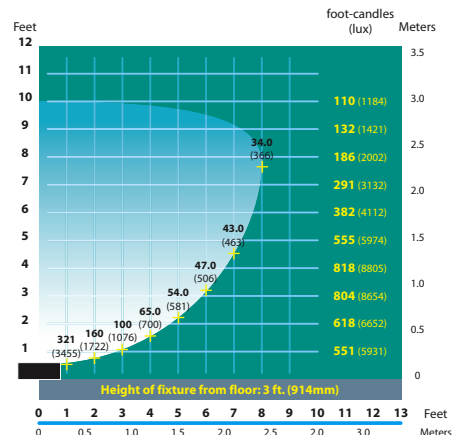

FFL-54T5HO Half Spread Photometrics

### ENHANCEMENTS FOR FFL-24, -39, -54-T5HO SERIES COMPACT FLUORESCENT LIGHTS


For available powder coat finishes, see page 8.  
See Lamp Options on page 143 for a complete array of available lamps.

**FA-06-5, 7** 1/4" Mini Hex Cell Louver for FFL-5, 7  
**FA-09-5, 7-BLUE** Blue Plastic Gel for FFL-5, 7  
**FA-09-5, 7-GREEN** Green Plastic Gel for FFL-5, 7


**FA-06-9, 13** 1/4" Mini Hex Cell Louver for FFL-13  
**FA-09-9, 13-BLUE** Blue Plastic Gel for FFL-13  
**FA-09-9, 13-GREEN** Green Plastic Gel for FFL-13

**FA-06-26** 1/4" Mini Hex Cell Louver for FFL-26  
**FA-09-26-BLUE** Blue Plastic Gel for FFL-26  
**FA-09-26-GREEN** Green Plastic Gel for FFL-26


**FA-26** Commercial Mounting Pedestal; see "Mounting Devices" section for complete details  
**FA-26-R** Commercial Mounting Pedestal with receptacle  
**FA-39** Commercial Mounting Pedestal with 6 ft. power cord  
**-HE** Hood Extension




**FA-06-5, 7**  
for FFL-5, 7




**FA-06-9, 13**  
for FFL-9, 13




**FA-06-26**  
for FFL-26



**FA-09-5, 7**  
for FFL-5, 7



**FA-09-9, 13**  
for FFL-9, 13



**FA-09-26**  
for FFL-26

