


18w Lamp (25w max.)
Solid Copper



18w Lamp (25w max.)
Solid Brass



Construction—**SL-05-BRS:** Heavy-duty spun brass
SL-05: Heavy-duty spun aluminum
SL-05-COP: Heavy-duty spun copper
SL-06-BRS: Cast brass
SL-06: Cast aluminum
 All equipped with 18" long baby oval brass chain and cast brass hoop




Wiring: Black 2 foot 18/2 zip cord. Consult factory for additional lengths

Finish—SL-05-BRS, SL-06-BRS: Unfinished brass


SL-05-COP: Unfinished copper
SL-05, SL-06: Black texture polyester powder coat
 Optional finishes available; page 8

Catalog Number	Description
SL-05	4.5" spun aluminum Bell
SL-05-BRS	4.5" spun brass Bell
SL-05-COP	4.5" spun copper Bell
SL-06	4.5" cast aluminum Tulip
SL-06-BRS	4.5" cast brass Tulip


12v. Lamp Options: See page 143 groups A, B, D

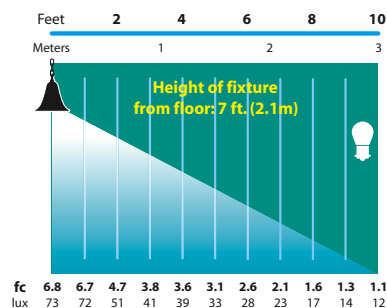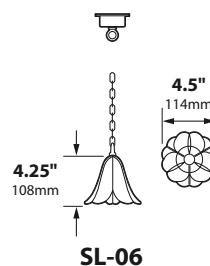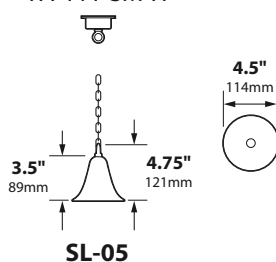


SL-05
Half Spread Photometrics
20 ft. (6.0m) diameter

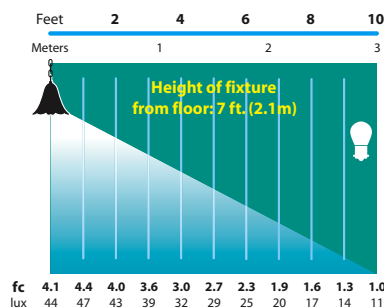

SL-06
Half Spread Photometrics
20 ft. (6.0m) diameter

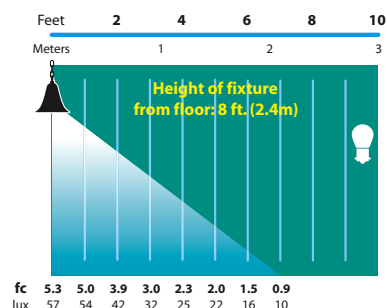

SL-05
Half Spread Photometrics
14 ft. (4.3m) diameter

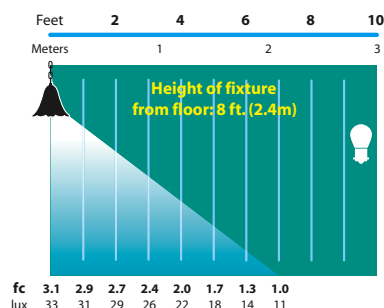

SL-06
Half Spread Photometrics
14 ft. (4.3m) diameter

12v. fixtures: 25 foot 16/2 fixture lead wire available; add **-25F** to catalog number. For use with Focus CPC or hub supplied by others.



**SL-12-BRS-BAR**


18w Lamp (25w max.)
Solid Brass

**SL-14-COP**

18w Lamp (25w max.)
Solid Copper

**SL-15-BAR**

18w Lamp (25w max.)
Solid Brass

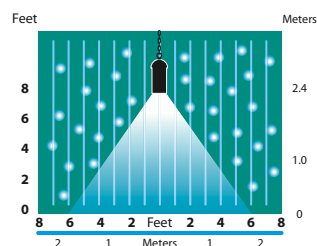**SL-15 Light Distribution****SL-12-BRS, SL-12 SPECIFICATIONS:**

Construction: Solid brass, stamped and welded, 18" long baby oval brass chain and cast brass hoop

Lens: Gold iridescent glass, White Cracked Ice (-ICE) plastic lens available

Lamp: 18 watt, S-8 #1141 (25 watt max.)

Lamp life: 1200 hours average rating for S-8 #1141

Socket: Single contact bayonet, brass nickel plated screw shell (Ba15s) with 200°C lead wires

Wiring: Black 2 foot 18/2 zip cord. Consult factory for additional lengths

Mount: FA-111-SM-H hanging fixture mini junction box

Finish–SL-12-BRS: Unfinished brass

SL-12: Black texture


Optional finishes available; page 8

Catalog Number	Description	Finish
SL-12	Hanging Brass Lantern	Black texture
SL-12-BRS	Hanging Brass Lantern	Unfinished brass

**RECOMMENDED ENHANCEMENTS FOR SL-12 SERIES:**

12v. Lamp Options: See page 143 groups A, B, D

120v. Lamp Options: See page 148 groups N, O, P

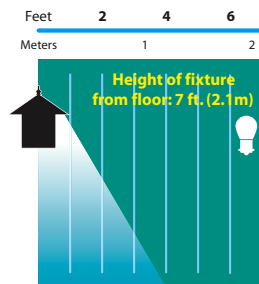**SL-12**

Half Spread Photometrics
8 ft. (2.4m) diameter

SL-14, SL-15 SERIES SPECIFICATIONS:



Construction: Hanging cast aluminum cylinder, 18" long baby oval brass chain with cast brass hoop

Socket: Single contact bayonet, brass nickel plated screw shell (Ba15s) with 200°C lead wires


Wiring: Black 2 foot 18/2 zip cord. Consult factory for additional lengths

Mount: FA-111-SM-H hanging fixture mini junction box

Finish: Optional finishes available; page 8

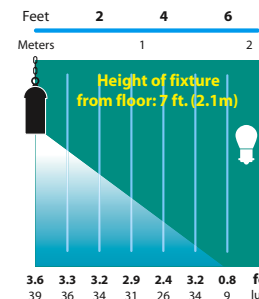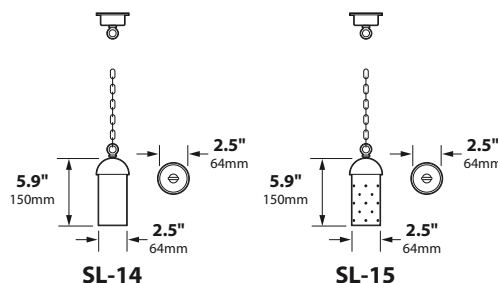**SL-14, SL-15**

Half Spread Photometrics
12 ft. (3.7m) diameter

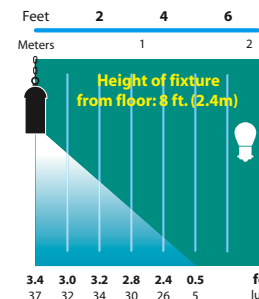**SL-14**

Half Spread Photometrics
12 ft. (3.7m) diameter

Catalog Number	Description	Standard Finish
The following fixtures are equipped with 18 watt (#1141) lamp, 25w maximum		
SL-14	Extruded aluminum hanging cylinder	Black texture
SL-14-BRS	Extruded brass hanging cylinder	Unfinished brass
SL-14-COP	Extruded copper hanging cylinder, brass top	Unfinished copper
The following fixtures are equipped with 20 watt ALR12 FL (GBF) lamp, double contact (Ba15d), 20 watt maximum. 4000+ hours average rating.		
SL-15	Extruded aluminum hanging cylinder with starlight holes	Black texture
SL-15-BRS	Extruded brass hanging cylinder with starlight holes	Unfinished brass
SL-15-COP	Rolled/stamped copper hanging cylinder, brass top, starlight holes	Unfinished copper

RECOMMENDED ENHANCEMENTS FOR SL-14, SL-15 SERIES:

12v. Lamp Options: See page 143 groups A, B, D

ALR12 FIXTURES

The following fixtures are equipped with 20 watt ALR12 FL (GBF) lamp, double contact (Ba15d), 20 watt maximum. 4000+ hours average rating.

SL-14-ALR12	Extruded aluminum hanging cylinder	Black texture
SL-14-ALR12-BRS	Extruded brass hanging cylinder	Unfinished brass
SL-14-ALR12-COP	Extruded copper hanging cylinder, brass top	Unfinished copper

ALR18 FIXTURES

The following fixtures are equipped with 50 watt ALR18 FL (GBK) lamp, double contact (Ba15d), 50 watt maximum. 4000+ hours average rating.


SL-14-ALR12	Extruded aluminum hanging cylinder	Black texture
SL-14-ALR12-BRS	Extruded brass hanging cylinder	Unfinished brass
SL-14-ALR12-COP	Extruded copper hanging cylinder, brass top	Unfinished copper

RECOMMENDED ENHANCEMENTS FOR SL-14-ALR SERIES:

12v. Lamp Options: See page 145 groups J, K



12v. fixtures: 25 foot 16/2 fixture lead wire available; add -25F to catalog number. For use with Focus CPC or hub supplied by others.

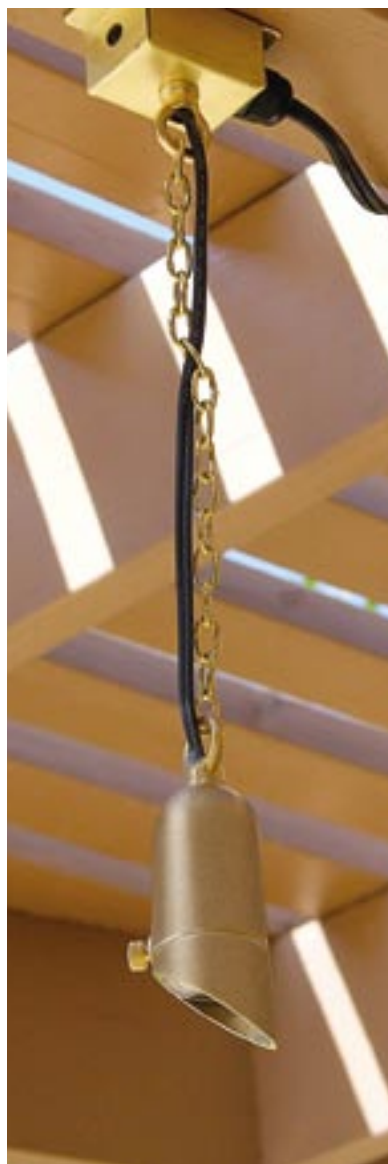**SL-22-BRS**

20w MR16 FL Lamp (20w max.)
Solid Brass

**SL-23-BRS**

20w MR11 FL Lamp (20w max.)
Solid Brass

SL-22-BRS, SL-22 SPECIFICATIONS:

Construction–SL-22-BRS: Cast brass body and cap
SL-22: Cast aluminum body and cap
All equipped with 18" long baby oval brass chain and cast brass hoop

Lens: 1/8" Clear tempered glass

Gasket: High temperature silicone red O-ring

Lamp: 20 watt, MR16 FL (BAB) (20 watt max.)

Lamp life: 5000 hours average rating; also available 10,000 hour MR16, add -10K to catalog no.

Socket: High temperature ceramic GU5.3 bi-pin with 250° C silicone lead wires

Wiring: Black 2 foot 18/2 zip cord. Consult factory for additional lengths

Mount: FA-111-SM-H hanging fixture mini junction box

Finish–SL-22-BRS: Unfinished brass

SL-22: Black texture polyester powder coat
Optional finishes available; page 8

Catalog Number Description

SL-22	2.5" cast aluminum mini Hanging Bullet
SL-22-BRS	2.5" cast brass mini Hanging Bullet

RECOMMENDED ENHANCEMENTS FOR SL-22 SERIES:

12v. Lamp Options: See pages 143-144 group E, MR16

FA-08-21	Round 1/8" Hex Cell Louver
FA-11-BLUE	Blue Tempered Glass Lens
FA-11-GREEN	Green Tempered Glass Lens
FA-98	Linear Spread Tempered Glass Lens
FA-104	Wide Spread Tempered Glass Lens Softener

SL-23 SERIES SPECIFICATIONS:

Construction–SL-23-BRS, SL-23-ALR-BRS: Cast brass
SL-23, SL-23-ALR: Cast aluminum
All equipped with 18" long baby oval brass chain and cast brass hoop

Lens: 1/8" Clear tempered glass

Gasket: High temperature silicone red O-ring

Lamp supplied–SL-23-BRS, SL-23: 20 watt, MR11 FL (FTD), 20 watt maximum

SL-23, SL-23-ALR: 20 watt, ALR12 FL (GBF), 20 watt maximum

Lamp life: 2000 hours average rating for MR11, 4000 hours average rating for ALR12

Lamp socket: High temperature ceramic GZ4 bi-pin with 250° C silicone lead wires for MR11. Double contact bayonet base (Ba15d) for ALR12

Wiring: Black 2 foot 18/2 zip cord. Consult factory for additional lengths

Mount: FA-111-SM-H hanging fixture mini junction box

Finish–SL-23-BRS, SL-23-ALR-BRS: Unfinished brass

SL-22, SL-23-ALR: Black texture polyester powder coat
Optional finishes available; page 8





Catalog Number Description

Catalog Number	Description	Lamp
SL-23	2" cast aluminum mini Bullet	MR11 FL
SL-23-BRS	2" cast brass mini Bullet	MR11 FL
SL-23-ALR12	2" cast aluminum mini Bullet	ALR12 FL
SL-23-ALR12-BRS	2" cast brass mini Bullet	ALR12 FL

RECOMMENDED ENHANCEMENTS FOR SL-23 SERIES:

12v. Lamp Options: See page 144 group E, MR11

FA-08-17	Round 1/8" Hex Cell Louver
FA-10-17-BLUE	Blue Tempered Glass Lens
FA-10-17-GREEN	Green Tempered Glass Lens
FA-98-17	Linear Spread Tempered Glass Lens
FA-104-17	Wide Spread Tempered Glass Lens Softener

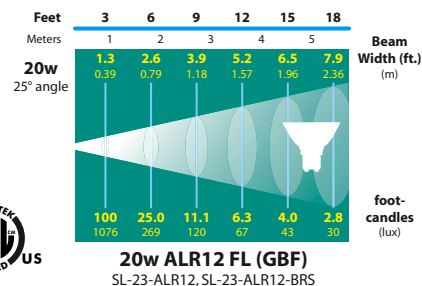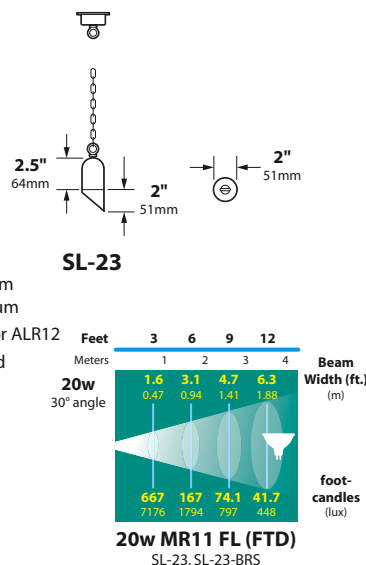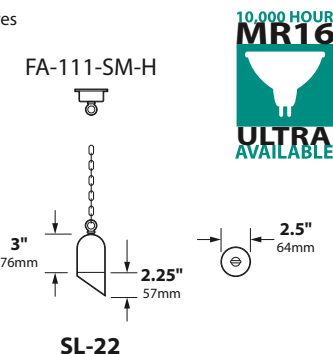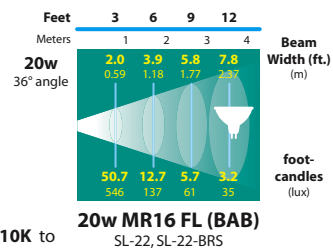



SL-34-S8	SL-34-MR11	SL-34-MR16
18w Lamp (25w max.)	20w MR11 Lamp (20w max.)	20w MR16 FL Lamp (20w max.)
Solid Copper	Solid Copper	Solid Copper

SL-34 SERIES SPECIFICATIONS:

Construction: Extruded copper cylinder, 18" long baby oval brass chain with cast brass hoop

Wiring: Black 2 foot 18/2 zip cord. Consult factory for additional lengths

Socket–SL-34-MR8, SL-34-MR11: GZ4 base, bi-pin, ceramic with 250°C wires

SL-34-MR16: GU5.3 base bi-pin, ceramic with 250°C wires

SL-34-S8/H: Single contact bayonet, brass nickel plated screw shell (Ba15s) with 200°C lead wires

SL-34-AR12: Double contact bayonet, brass nickel plated screw shell (Ba15d) with 200°C lead wires

Mount: FA-111-SM-H hanging fixture mini junction box

Standard finish: Unfinished copper, optional finishes available; page 8

Catalog Number	Description	Max. Wattage	Lamp supplied
SL-34-S8	Extruded copper hanging light	25w	18 watt (#1141), SC
SL-34-MR8	Extruded copper hanging light	25w	20 watt MR8 FL
SL-34-H	Extruded copper hanging light	25w	20 watt T-4 halogen, SC
SL-34-HBP	Extruded copper hanging light	25w	20 watt T-3 halogen, bi-pin

RECOMMENDED ENHANCEMENTS FOR SL-34 SERIES (SC):

12v. Lamp Options: See page 143 groups A, B, D, only single contact lamp options available

FA-08-23 Round 1/8" Mini Hex Cell Louver

Catalog Number	Description	Max. Wattage	Lamp supplied
SL-34-MR11	Extruded copper hanging light	20w	20 watt MR11 FL (FTD)
SL-34-ALR12	Extruded copper hanging light	20w	20 watt ALR12 FL (GBF)

RECOMMENDED ENHANCEMENTS FOR SL-34MR-11, SL-34-ALR12 SERIES:

12v. Lamp Options: See page 144, 145 groups F, J

FA-08-17 Round 1/8" Mini Hex Cell Louver

Catalog Number	Description	Max. Wattage	Lamp supplied
SL-34-MR16	Extruded copper hanging light	20w	20 watt MR16 FL (BAB)

RECOMMENDED ENHANCEMENTS FOR SL-34-MR16 SERIES:

12v. Lamp Options: See page 144, 145 groups F, J

FA-08-17 Round 1/8" Mini Hex Cell Louver



SL-39-BRS
20w MR8 FL Lamp (20w max.)
Solid Brass

SL-39-BRS, SL-39 SERIES SPECIFICATIONS:

Construction–SL-39-BRS: Cast brass mini Bullet

SL-39: Cast aluminum mini Bullet

All equipped with 18" long baby oval brass chain with cast brass hoop

Lens: 1/8" clear tempered glass

Gasket: High temperature silicone red O-ring

Lamp: 20 watt, MR8 FL (20 watt max.)

Lamp life: 2000 hours average rating

Socket: High temperature ceramic GZ4 bi-pin with 250° C silicone lead wires

Wiring: Black 2 foot 18/2 zip cord. Consult factory for additional lengths

Mount: FA-111-SM-H hanging fixture mini junction box

Finish–SL-39-BRS: Unfinished brass

SL-39: Black texture polyester powder coat

Optional finishes available; page 8

Catalog Number	Description
SL-39	1.5" cast aluminum Hanging mini Bullet
SL-39-BRS	1.5" cast brass Hanging mini Bullet

RECOMMENDED ENHANCEMENTS FOR SL-39 SERIES:

12v. Lamp Options: See page 145 group G

FA-08-23 Round 1/8" Hex Cell Louver


FA-11-23-BLUE Blue Tempered Glass Lens

FA-11-23-GREEN Green Tempered Glass Lens


FA-104-23 Wide Spread Tempered Glass Lens Softener




SL-34-MR8




SL-34-MR11




SL-34-MR16

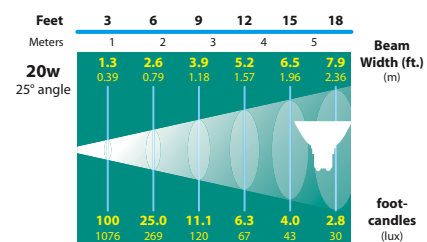


20w ALR12 FL (GBF)
SL-34-ALR12

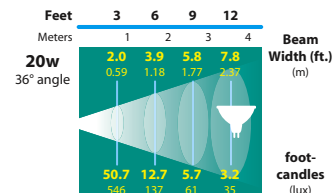


20w MR16 FL (BAB)
SL-34-MR16

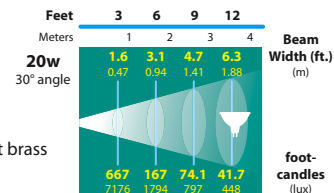

20w MR11 FL (FTD)
SL-34-MR11

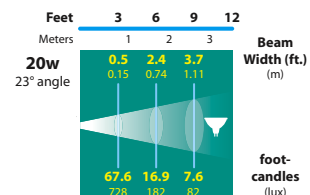

20w MR8 FL
SL-34-MR8, SL-39



SL-39

