



**PL-01-BAR**

18w Lamp (25w max.)
Solid Brass

**PL-02-LEAVES-COP**

18w Lamp (25w max.)
Solid Copper

**PL-03-BRS**

Top View
Solid Brass

PL-03-BAV

18w Lamp (25w max.)
Solid Brass

PL-01-BRS, PL-02-BRS, PL-02-LEAVES-BRS, PL-03-BRS SPECIFICATIONS:

Construction: Cast brass Mushroom Hat (PL-02 has spun brass China Hat); extruded brass stanchion

Lamp: 18 watt S-8 #1141; 1200 hours average rating (25w max.)

Socket: Single contact bayonet, brass nickel plated screw shell (Ba15s); double contact bayonet base (Ba15d) for 120v., both with 200° C silicone lead wires

Wiring: Black 3 foot 18/2 zip cord from base of fixture (12v. only)

Connection: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only) 12v. only

Mounting: FA-03-BRS 9" brass stake, tapped 1/2" NPS

Finish: Unfinished brass—optional acid treated finishes available; page 8

PL-02-COP, PL-02-LEAVES-COP SPECIFICATIONS:

Construction: Heavy-duty spun copper Bell; extruded copper gooseneck

Lamp, socket, wiring, connection and mounting: See above

Finish: Unfinished copper—optional acid treated finishes available; page 8

PL-01, PL-02, PL-02-LEAVES, PL-03 SPECIFICATIONS:


Construction: Cast aluminum Mushroom Hat; extruded aluminum stanchion

Lamp, socket, wiring, connection and mounting: See above



Mounting: FA-03 black 9" ABS stake, tapped 1/2" NPS

Finish: Black texture polyester powder coat—optional finishes available; page 8



Catalog Number	Description
PL-01	18w cast aluminum 5.5" China Hat
PL-01-BRS	18w cast brass 5.5" China Hat
PL-02	18w cast aluminum 4.5" Bell Hat
PL-02-BRS	18w spun brass 4.5" Bell Hat
PL-02-COP	18w spun copper 4.5" Bell Hat
PL-02-LEAVES	18w cast aluminum 4.5" Bell Hat with leaves
PL-02-BRS-LEAVES	18w spun brass 4.5" Bell Hat with leaves
PL-02-COP-LEAVES	18w spun copper 4.5" Bell Hat with leaves
PL-03	18w cast aluminum 5.5" Shell Hat
PL-03-BRS	18w cast brass 5.5" Shell Hat

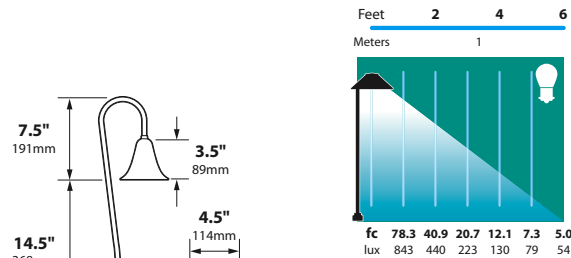**PL-01**


Half Spread Photometrics
12 ft. (3.7 m) diameter

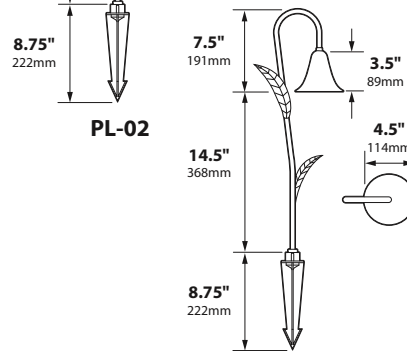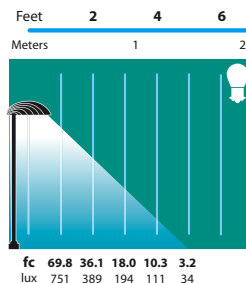**PL-02****PL-02-LEAVES****PL-03**

Half Spread Photometrics
10 ft. (3.0m) diameter

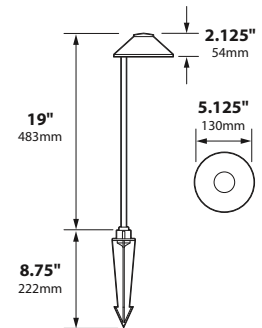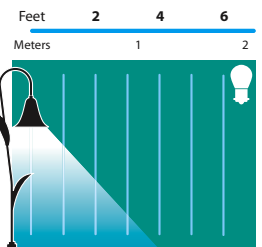**PL-01****PL-02, PL-02-LEAVES**

Half Spread Photometrics
8 ft. (2.4m) diameter

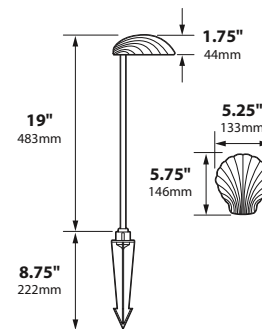**PL-03****RECOMMENDED ENHANCEMENTS FOR PL-01, -02, -03 SERIES:**

12v. Lamp Options: See page 143 groups A, B, D

120v. Lamp Options: See page 148 groups N, O






PL-04-LEAVES-BRS

18w Lamp (25w max.)
Solid Brass




PL-04-BAV

18w Lamp (25w max.)
Solid Brass

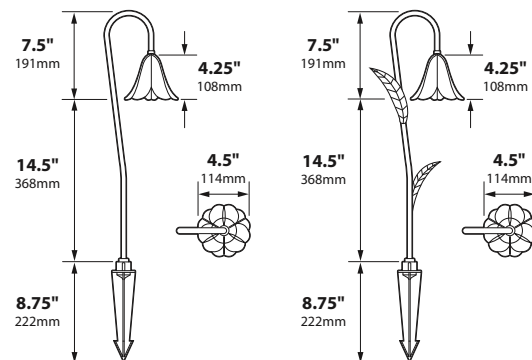

PL-04

PL-04-LEAVES

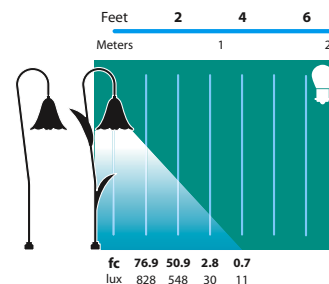

PL-04, PL-04-LEAVES

Half Spread Photometrics
8 ft. (2.4m) diameter



PL-05-BRS

18w Lamp (25w max.)
Solid Brass

PL-04-BRS, PL-04-LEAVES-BRS, PL-05-BRS, PL-06-BRS SPECIFICATIONS:

Construction: Cast brass Tulip, Mushroom and Starfish Hat. Extruded brass stanchion

Lamp: 18 watt S-8 #1141; 1200 hours average rating (25w max.)

Socket: Single contact bayonet, brass nickel plated screw shell (Ba15s); double contact bayonet base (Ba15d) for 120v., both with 200° C silicone lead wires

Wiring: Black 3 foot 18/2 zip cord from base of fixture (12v. only)

Connection: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only) 12v. only

Mounting: FA-03-BRS 9" brass stake, tapped 1/2" NPS

Finish: Unfinished brass—optional acid treated finishes available; page 8

PL-04, PL-04-LEAVES, PL-05, PL-06 SPECIFICATIONS:

Construction: Cast aluminum Tulip, Mushroom, or Starfish Hat; extruded aluminum stanchion

Lamp, socket, wiring, connection and mounting: See above


Mounting: FA-03 black 9" ABS stake, tapped 1/2" NPS

Finish: Black texture polyester—

Optional powder coat finishes available; page 8

10,000 HOUR
XENON
&
HALOGEN
AVAILABLE

Catalog Number	Description
PL-04	18w cast aluminum 4.5" Tulip Hat
PL-04-BRS	18w cast brass 4.5" Tulip Hat
PL-04-LEAVES	18w cast alum. 4.5" Tulip Hat with leaves
PL-04-BRS-LEAVES	18w cast brass 4.5" Tulip Hat with leaves
PL-05	18w cast aluminum 6" Mushroom Hat
PL-05-BRS	18w cast brass 6" Mushroom Hat
PL-06	18w cast aluminum 7" Starfish Hat
PL-06-BRS	18w cast brass 7" Starfish Hat

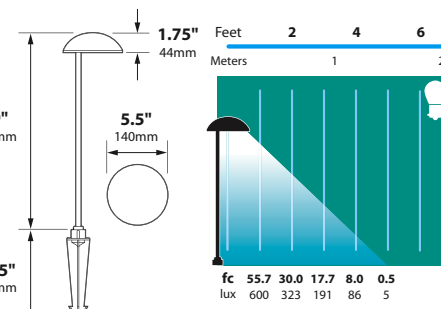

PL-05

PL-05
Half Spread Photometrics
10 ft. (3.0m) diameter




PL-06-BRS


Top View
Solid Brass

PL-06-BRS

18w Lamp (25w max.)
Solid Brass

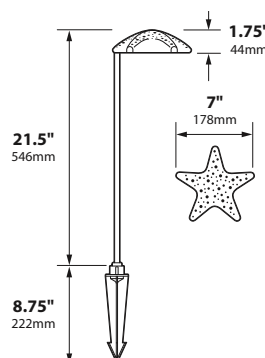


PL-06

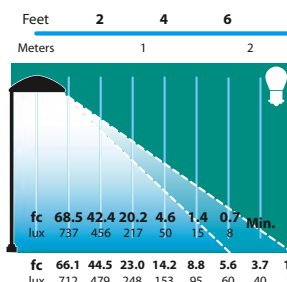

PL-06

Half Spread Photometrics
16 ft. (4.9m) diameter



RECOMMENDED ENHANCEMENTS FOR PL-04, -05, -06 SERIES:

12v. Lamp Options: See page 143 groups A, B, D; **120v. Lamp Options:** See page 148 groups N, O

12v. fixtures: 25 foot 16/2 fixture lead wire available; add -25F to catalog number. For use with Focus CPC or hub supplied by others.






PL-07-BRS


18w Lamp (25 watt max.)

Solid Brass

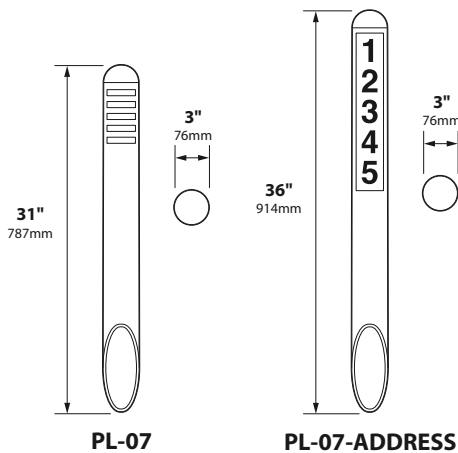

PL-07

PL-07-ADDRESS

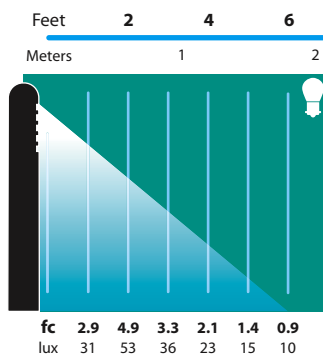

PL-07

Light Distribution and Photometrics
6 ft. (1.8m) radius

PL-07 SERIES SPECIFICATIONS (12 VOLT):

Construction: PL-07 Series: Black 3.5" O.D. ABS post with cast aluminum top

PL-07-ALUM Series: Cast aluminum top, extruded aluminum post

PL-07-BRS Series: Cast brass top, extruded brass post

PL-07-COP Series: Cast brass top, extruded copper post

PL-07-L Series: Materials are same as above, post is 4.5" diameter

Lens: White high-impact acrylic

Reflector: Highly polished specular aluminum

Lamp: 18 watt S-8 #1141; 1200 hours average rating (25w max.)


Socket: Single contact bayonet, brass nickel plated screw shell (Ba15s); double contact bayonet base (Ba15d) for 120v., both with 200° C silicone lead wires

Wiring: Black 3 foot 18/2 zip cord from base of fixture (12v. only)

Connection: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only) 12v. only

Mounting: 4 x FA-42-FIN stabilizing fins (supplied)


Finish: Optional finishes available; page 8

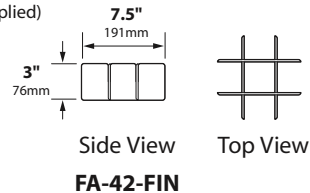

Side View

Top View

FA-42-FIN



FA-42-FIN
Installed on PL-07



Catalog Number	Description	Lamp Supplied	Standard Finish
12 VOLT			
PL-07	ABS 180° mini bollard, black	18 watt S-8 #1141	Black texture
PL-07-RBV	Same as above, hand-applied finish	18 watt S-8 #1141	Rubbed verde
PL-07-ALUM	Aluminum 180° mini bollard	18 watt S-8 #1141	Black texture
PL-07-BRS	Brass 180° mini bollard	18 watt S-8 #1141	Brass, unfinished
PL-07-COP	Copper 180° mini bollard	18 watt S-8 #1141	Copper, unfinished

12 VOLT HALOGEN ADDRESS

Please supply wattage, color of light bulbs and address numbers at time of order. They are factory-installed 2"-high black Helvetica vinyl numbers. 1 to 5 bulbs in fixture; dependent upon quantity of vinyl address numerals ordered.





PL-07-ADDRESS-H	ABS address mini bollard, black	1 to 5 halogen (5w)	Black texture
PL-07-ADDRESS-H-RBV	Same as above, hand-applied finish	1 to 5 halogen (5w)	Rubbed verde
PL-07-ADDRESS-H-ALUM	Aluminum address mini bollard	1 to 5 halogen (5w)	Black texture
PL-07-ADDRESS-H-BRS	Brass address mini bollard	1 to 5 halogen (5w)	Brass, unfinished
PL-07-L-ADDRESS-H	ABS address 4.5" dia. bollard, black	1 to 5 halogen (5w)	Black texture
PL-07-L-ADDRESS-H-RBV	Same as above, hand-applied finish	1 to 5 halogen (5w)	Rubbed verde
PL-07-L-ADDRESS-H-ALUM	Aluminum address bollard	1 to 5 halogen (5w)	Black texture



PL-07-ADDRESS-120V


2 x 13 watt Compact Fluorescent (26w max.)

Black ABS Plastic






Finish: Optional finishes available; page 8

See page 148 group M

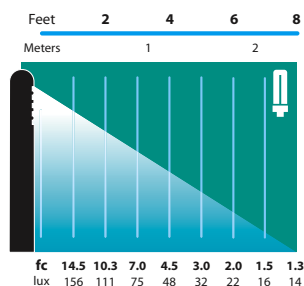


PL-07-FL-7
Light Distribution and Photometrics
8 ft. (2.4m) radius





Construction: Stamped solid brass housing; 1/2" O.D. extruded brass (PL-09-BRS) or aluminum (PL-09) gooseneck
Lens: Gold iridescent glass, White Cracked Ice (-ICE) plastic lens available
Lamp: 18 watt S-8 #1141; 1200 hours average rating (25w max.)
Socket: Single contact bayonet, brass nickel plated screw shell (Ba15s); double contact bayonet base (Ba15d) for 120v., both with 200° C silicone lead wires
Wiring: Black 3 foot 18/2 zip cord from base of fixture (12v. only)
Connection: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only) 12v. only
Mounting: FA-03-BRS 9" brass stake, tapped 1/2" NPS
Finish: Unfinished brass—optional finishes available; page 8

Feet	2	4	6	8	10
Meters	1	2			3
fc	12.6	12.4	8.3	5.4	3.6
lux	136	133	89	58	39
fc	2.5	1.7	1.3	1.0	0.5
lux	27	18	14	11	5

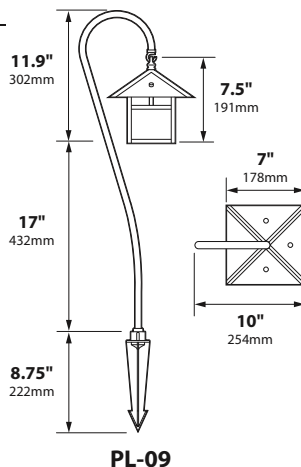

Construction: Cast brass 6" Scallop or 8" Mushroom Hat; extruded brass stanchion

Lens: High-impact clear acrylic lens for 120v. only

PL-11-FL-5, 7-120V only: 5 or 7 watt compact fluorescent, 10,000 hour average rating

Lamp: 18 watt S-8 #1141; 1200 hours average rating (25w max.)

Socket: Single contact bayonet, brass nickel plated screw shell (Ba15s); double contact bayonet base (Ba15d) for 120v., both with 200° C silicone lead wires

Wiring: Black 3 foot 18/2 zip cord from base of fixture (12v. only)

Connection: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only) 12v. only




Mounting: FA-03-BRS 9" brass stake, tapped 1/2" NPS, no mount supplied with PL-11-FL-5, 7; FA-26 is recommended

Finish: Unfinished brass—optional acid treatment finishes available: page 8

Construction: Cast aluminum 5" Scallop or 8" Mushroom Hat; extruded aluminum stanchion
Lens, lamp, socket, wiring and connection: See above
Mounting: FA-03 black 9" ABS stake, tapped 1/2" NPS, no mount supplied with PL-11-FL-5, 7; FA-26 is recommended
Finish: Black texture polyester powder coat—optional finishes available; page 8

The following fixtures are supplied with compact fluorescent 41°K lamps:

PL-11-FL-5,7	Cast aluminum 8" Mushroom Hat	5 or 7 watt
PL-11-BRS-FL-5,7	Cast brass 8" Mushroom Hat	5 or 7 watt

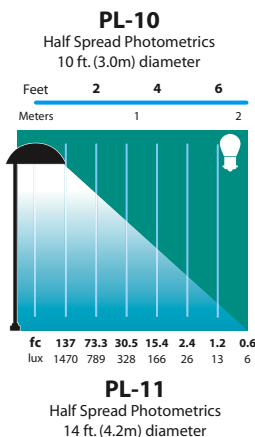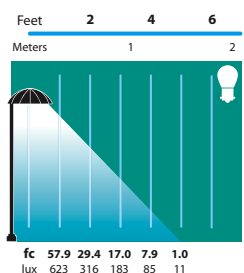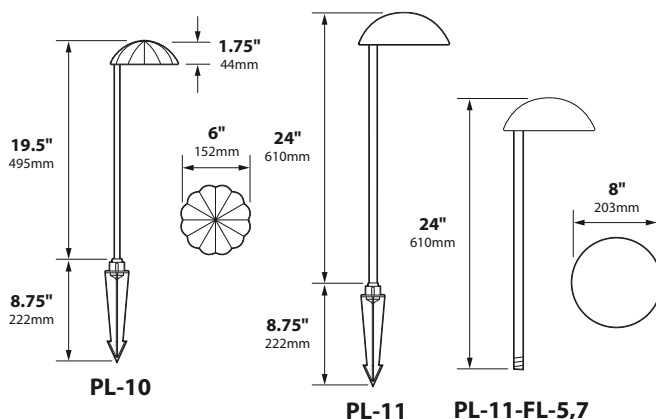

**PL-12-BRS**

18w Lamp (25w max.)
Solid Brass

**PL-13-COP**

18w Lamp (25w max.)
Solid Copper

**PL-14-BRS**

18w Lamp (25w max.)
Solid Brass

PL-12-BRS, PL-12 SPECIFICATIONS:

Construction: Cast brass (PL-12-BRS) or aluminum (PL-12) Oriental Hat; extruded brass stanchion

Lamp: 18 watt S-8 #1141; 1200 hours average rating (25w max.)

Socket: Single contact bayonet, brass nickel plated screw shell (Ba15s); double contact bayonet base (Ba15d) for 120v., both with 200° C silicone lead wires

Wiring: Black 3 foot 18/2 zip cord from base of fixture (12v. only)

Connection: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only) 12v. only

Mounting: FA-03-BRS 9" brass stake, tapped 1/2" NPS (FA-03-ABS for PL-12)

Finish: Unfinished brass (PL-09-BRS) or black texture (PL-09)–optional finishes available; page 8

PL-13-COP SPECIFICATIONS:

Construction: Heavy-duty spun copper Bell; extruded copper gooseneck with leaves

Lamp: 18 watt S-8 #1141; 1200 hours average rating (25w max.)

Socket: Single contact bayonet, brass nickel plated screw shell (Ba15s); double contact bayonet base (Ba15d) for 120v., both with 200° C silicone lead wires

Wiring: Black 3 foot 18/2 zip cord from base of fixture (12v. only)

Connection: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only) 12v. only

Mounting: FA-03-BRS 9" brass stake, tapped 1/2" NPS

Finish: Unfinished copper–optional acid treated finishes available; page 8

PL-14-BRS SPECIFICATIONS:

Construction: Heavy-duty stamped brass Pyramid; extruded square brass stanchion

Lamp: 18 watt S-8 #1141; 1200 hours average rating (25w max.)


Socket: Single contact bayonet, brass nickel plated screw shell (Ba15s); double contact bayonet base (Ba15d) for 120v., both with 200° C silicone lead wires

Wiring: Black 3 foot 18/2 zip cord from base of fixture (12v. only)



Connection: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only) 12v. only

Mounting: FA-03-BRS 9" brass stake, tapped 1/2" NPS


Finish: Unfinished brass–optional acid treated finishes available; page 8

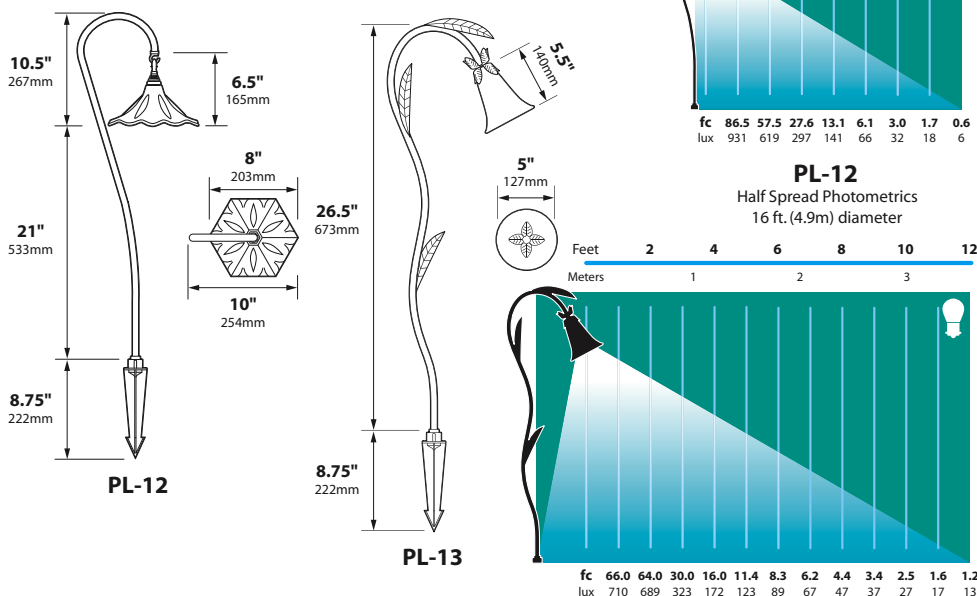**Catalog Number Description**

PL-12	18w cast aluminum 8" Oriental Hat
PL-12-BRS	18w cast aluminum 8" Oriental Hat
PL-13-COP	18w heavy-duty spun copper 5.5" Bell with leaves
PL-14-BRS	18w heavy-duty stamped brass 5" Pyramid Hat

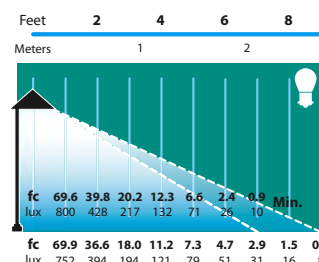

Max. Ground Coverage

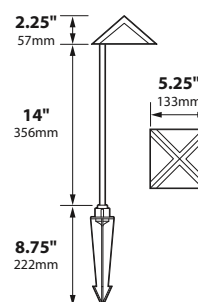PL-13
Half Spread Photometrics
24 ft. (7.3m) diameter**PL-14****RECOMMENDED ENHANCEMENTS FOR PL-12, -13, -14 SERIES:**

12v. Lamp Options: See page 143 groups A, B, D

120v. Lamp Options: See page 148 groups N, O

12v. fixtures: 25 foot 16/2 fixture lead wire available; add **-25F** to catalog number. For use with Focus CPC or hub supplied by others.

**PL-15-COP**

18w Lamp (25w max.)
Solid Copper

PL-15-COP SPECIFICATIONS:

Construction: Heavy-duty spun copper Bell; 1/2" O.D. extruded copper goose neck

Lamp: 18 watt S-8 #1141; 1200 hours average rating (25w max.)

Socket: Single contact bayonet, brass nickel plated screw shell (Ba15s); double contact bayonet base (Ba15d) for 120v, both with 200° C silicone lead wires


Wiring: Black 3 foot 18/2 zip cord from base of fixture (12v. only)

Connection: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only) 12v. only


Mounting: FA-03-BRS 9" brass stake, tapped 1/2" NPS

Finish: Unfinished copper, optional acid treatments available; page 8

Catalog Number	Description
PL-15-COP	18w heavy-duty copper 5.5" Spun Copper Bell

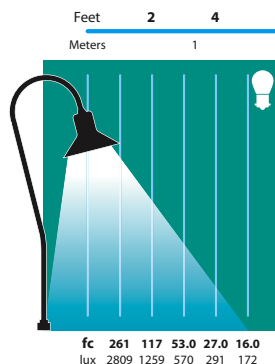**PL-15**

Half Spread Photometrics
10 ft. (3.0m) diameter

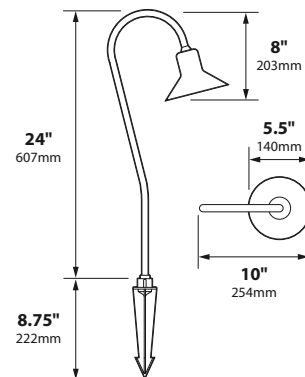**PL-15****RECOMMENDED ENHANCEMENTS FOR PL-15 SERIES:**

12v. Lamp Options: See page 143 groups A, B, D

120v. Lamp Options: See page 148 groups N, O

**PL-16-COP**

18w Lamp (25w max.)
Solid Copper

PL-16-COP SPECIFICATIONS:

Construction: Heavy-duty spun copper Bell; extruded copper side mount stanchion

Lamp: 18 watt S-8 #1141; 1200 hours average rating (25w max.)


Socket: Single contact bayonet, brass nickel plated screw shell (Ba15s); double contact bayonet base (Ba15d) for 120v, both with 200° C silicone lead wires

Wiring: Black 3 foot 18/2 zip cord from base of fixture (12v. only)


Connection: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only) 12v. only

Mounting: FA-03-BRS 9" brass stake, tapped 1/2" NPS

Finish: Unfinished copper, optional acid treatments available; page 8

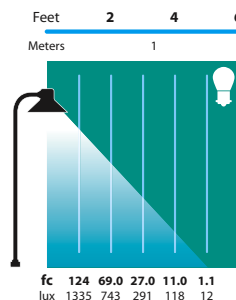**PL-16**

Half Spread Photometrics
10 ft. (3.0m) diameter

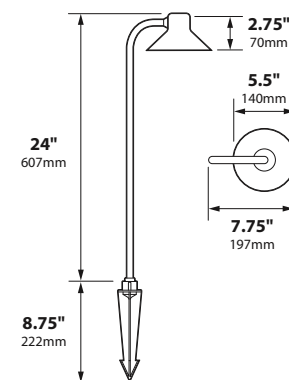**PL-16**

Catalog Number	Description
PL-16-COP	18w heavy-duty copper 5.5" side mount Bell

RECOMMENDED ENHANCEMENTS FOR PL-16 SERIES:

12v. Lamp Options: See page 143 groups A, B, D

120v. Lamp Options: See page 148 groups N, O

10,000 HOUR
XENON
&
HALOGEN
AVAILABLE



12v. fixtures: 25 foot 16/2 fixture lead wire available; add -25F to catalog number. For use with Focus CPC or hub supplied by others.