



SPECIALTY LIGHTS

StepLights/Brick Lights – 12 volt/120 volt







**SL-02-VERT-BAV**18w Lamp (25w max.)
Solid Brass**SL-02-AL-COP**18w Lamp (25w max.)
Solid Copper**SL-02-BRS**18w Lamp (25w max.)
Solid Brass**SL-02-BAR**18w Lamp (25w max.)
Solid Brass**SL-02 RESIDENTIAL STEP LIGHT SERIES SPECIFICATIONS:****Face plate:** Heavy-duty stamped brass (-BRS), copper (-COP), stainless steel (-SS), or aluminum**Back box housing:** White powder coated galvanized steel**Gasket:** Black neosponge 0.190" thick closed cell**Lens (-AL models):** White high-impact acrylic**Socket:** Single contact bayonet; brass nickel plated Ba15s with 200° C silicone lead wires**Lamp life:** 1200 hours average rating for S-8 #1141**Wiring:** Black 3 foot 18/2 zip cord**Connection:** FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only)**Finish:** Optional finishes available; page 8

Catalog Number	Catalog Number Face Plate Only	Description	Face Plate Standard Finish
SL-02	FA-50	Stamped aluminum 4 louver step light	Black texture
SL-02-BRS	FA-50-BRS	Stamped brass 4 louver step light	Brushed brass
SL-02-COP	FA-50-COP	Stamped copper 4 louver step light	Brushed copper
SL-02-SS	FA-50-SS	Stamped stainless steel 3 louver step light	Brushed stainless
SL-02-3L	FA-50-3L	Stamped aluminum 3 louver step light	Black texture
SL-02-3L-BRS	FA-50-3L-BRS	Stamped brass 3 louver step light	Brushed brass
SL-02-3L-COP	FA-50-3L-COP	Stamped copper 3 louver step light	Brushed copper
SL-02-3L-SS	FA-50-3L-SS	Stamped stainless steel 3 louver step light	Brushed stainless
SL-02-AL	FA-51	Stamped aluminum lensed step light	Black texture
SL-02-AL-BRS	FA-51-BRS	Stamped brass lensed step light	Brushed brass
SL-02-AL-COP	FA-51-COP	Stamped copper lensed step light	Brushed copper
SL-02-AL-SS	FA-51-SS	Stamped stainless steel lensed step light	Brushed stainless
SL-02-VERT	FA-80	Stamped aluminum 4 louver vertical step light	Black texture
SL-02-VERT-BRS	FA-80-BRS	Stamped brass 4 louver vertical step light	Brushed brass
SL-02-VERT-COP	FA-80-COP	Stamped copper 4 louver vertical step light	Brushed copper
SL-02-VERT-SS	FA-80-SS	Stamped stainless steel 3 louver vertical step light	Brushed stainless

BACK BOXES ONLY






Catalog Number	Description	Lamp and Voltage
FA-56	Stamped galvanized box with lamp and socket	18w SC (12v.)
FA-56-H	Stamped galvanized box with lamp and socket	20w halogen SC (12v.)
FA-56-X	Stamped galvanized box with lamp and socket	20w xenon SC (12v.)
FA-56-T7	Stamped galvanized box with lamp and socket	15w T7 DC (120v.)
FA-56-T8	Stamped galvanized box with lamp and socket	25w T8 DC (120v.)

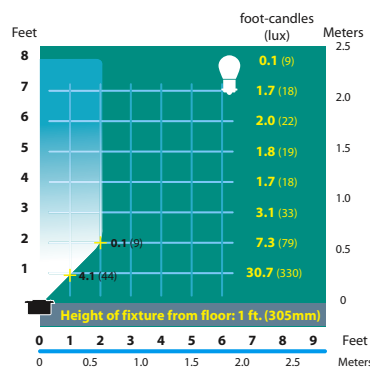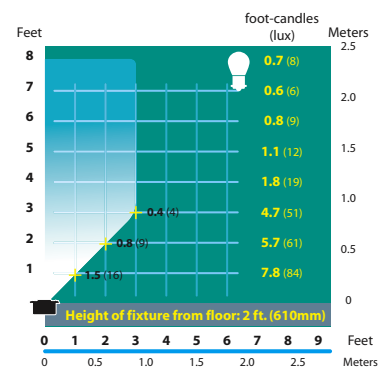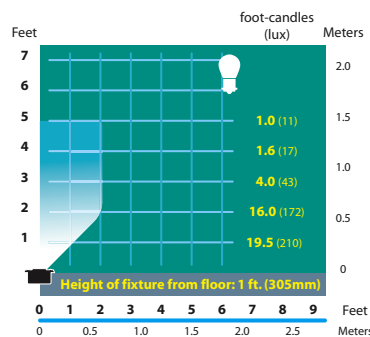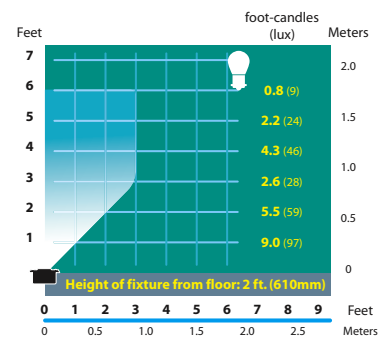RECOMMENDED ENHANCEMENTS:**12v. Lamp Options:** See page 143 groups A, B, D**120v. Lamp Options:** See page 148 groups N, O**SL-02** Half Spread Photometrics**SL-02** Half Spread Photometrics**SL-02-3L** Half Spread Photometrics**SL-02-3L** Half Spread Photometrics

SL-02 series continued on next page

12v. fixtures: 25 foot 16/2 fixture lead wire available; add -25F to catalog number. For use with Focus CPC or hub supplied by others.

SL-02 RESIDENTIAL STEP LIGHT SERIES SPECIFICATIONS (continued)

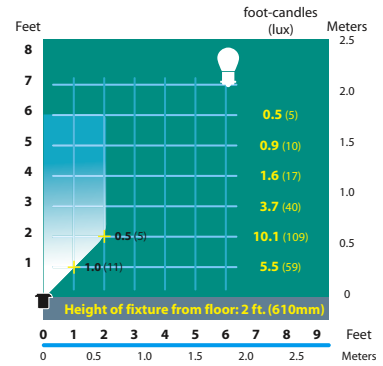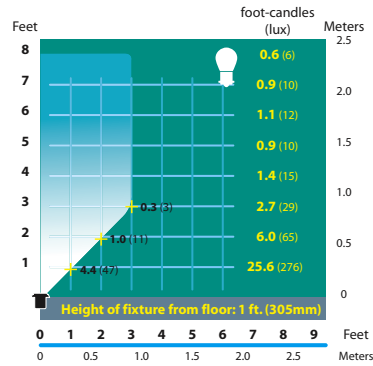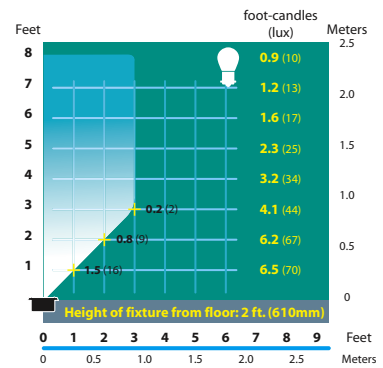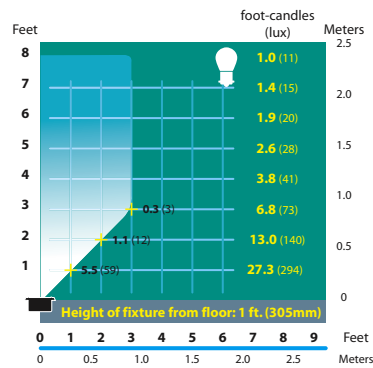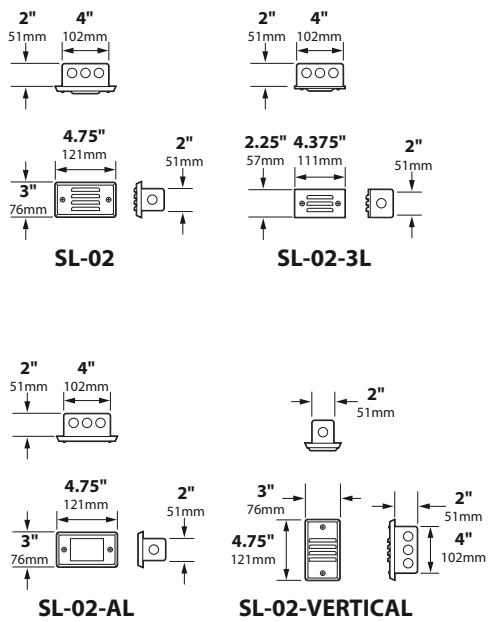

SL-02
 18w Lamp (25w max.)
 Aluminum

12v. fixtures: 25 foot 16/2 fixture lead wire available; add **-25F** to catalog number. For use with Focus CPC or hub supplied by others.

**SL-04-BAV**

2 x 18w Lamp (50w max.)
Solid Brass

**SL-04-AL-BAR**

2 x 18w Lamp (50w max.)
Solid Brass

**SL-04-3L-BRS**

2 x 18w Lamp (50w max.)
Solid Brass

**SL-04-COP**

2 x 18w Lamp (50w max.)
Solid Copper

SL-04 RESIDENTIAL BRICK LIGHT SERIES SPECIFICATIONS:

Face plate: Heavy-duty stamped brass (-BRS), copper (-COP), stainless steel (-SS), or aluminum

Back box housing: White powder coated aluminum

Gasket: Black neosponge 0.190" thick closed cell

Lens (-AL models): White high-impact acrylic

Lamps: 2 x 18 watt, S-8 #1141 (50 watt max.)

Socket: Single contact bayonet; brass nickel plated Ba15s with 200° C silicone lead wires

Lamp life: 1200 hours average rating for S-8 #1141

Wiring: Black 3 foot 18/2 zip cord

Connection: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only)

Finish: Optional finishes available; page 8



Catalog Number	Catalog Number Face Plate Only	Description	Face Plate Standard Finish
SL-04	FA-52	Stamped aluminum 4 louver brick light	Black texture
SL-04-BRS	FA-52-BRS	Stamped brass 4 louver brick light	Brushed brass
SL-04-COP	FA-52-COP	Stamped copper 4 louver brick light	Brushed copper
SL-04-SS	FA-52-SS	Stamped stainless steel 4 louver brick light	Brushed stainless
SL-04-3L	FA-52-3L	Stamped aluminum 3 louver brick light	Black texture
SL-04-3L-BRS	FA-52-3L-BRS	Stamped brass 3 louver brick light	Brushed brass
SL-04-3L-COP	FA-52-3L-COP	Stamped copper 3 louver brick light	Brushed copper
SL-04-3L-SS	FA-52-3L-SS	Stamped stainless steel 3 louver brick light	Brushed stainless
SL-04-AL	FA-53	Stamped aluminum lensed brick light	Black texture
SL-04-AL-BRS	FA-53-BRS	Stamped brass lensed brick light	Brushed brass
SL-04-AL-COP	FA-53-COP	Stamped copper lensed brick light	Brushed copper
SL-04-AL-SS	FA-53-SS	Stamped stainless steel lensed brick step light	Brushed stainless

BACK BOXES ONLY

Catalog Number	Description	Lamp and Voltage
FA-58	Stamped aluminum box with lamp and socket, white	2 x 18w SC (12v.)
FA-58-H	Stamped aluminum box with lamp and socket, white	2 x 20w halogen (12v.)
FA-58-X	Stamped aluminum box with lamp and socket, white	2 x 20w Xenon (12v.)
FA-58-T7	Stamped aluminum box with lamp and socket, white	2 x 15w T7 (120v.)
FA-58-T8	Stamped aluminum box with lamp and socket, white	2 x 25w T8 (120v.)


RECOMMENDED ENHANCEMENTS:

12v. Lamp Options: See page 143 groups A, B, D


120v. Lamp Options: See page 148 groups N, O




SL-04 series continued on next page

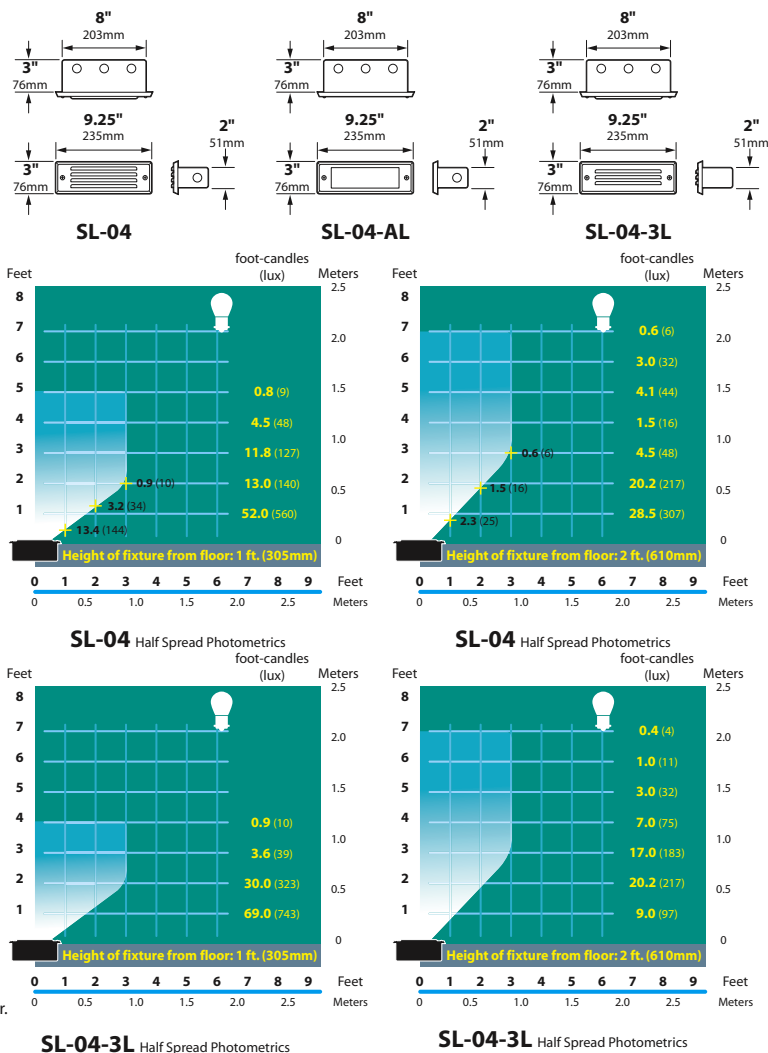

SL-04 RESIDENTIAL BRICK LIGHT SERIES SPECIFICATIONS (continued)

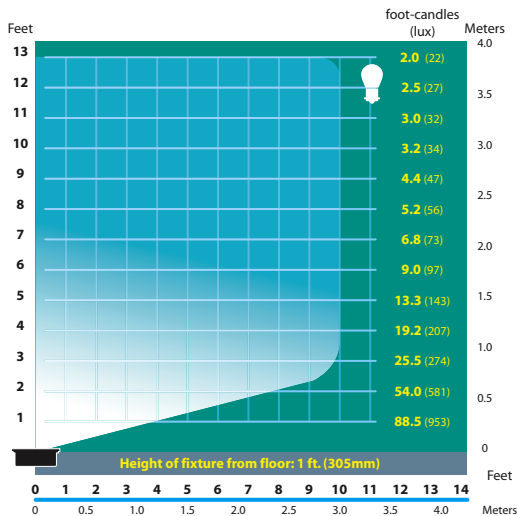

SL-04-AL Half Spread Photometrics

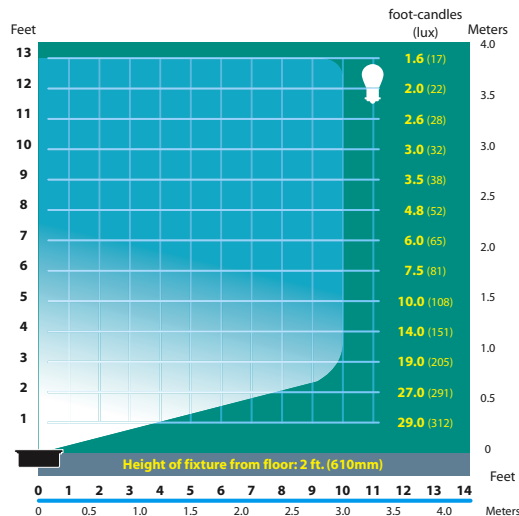

SL-04-AL Half Spread Photometrics



SL-08-BRS
2 x 18w Lamp (50w max.)
Solid Brass



SL-08-AL-BAV
2 x 18w Lamp (50w max.)
Solid Brass

SL-08 COMMERCIAL BRICK LIGHT SERIES SPECIFICATIONS:

Face plate: Cast brass (-BRS) or cast aluminum

Back box housing: White powder coated cast aluminum
-BRS models have unfinished brass housing

Gasket: Black neosponge 0.190" thick closed cell

Lens: Clear high impact acrylic (AL models-white high-impact acrylic)

Reflector: Highly polished specular aluminum

Lamp (incandescent models): 2 x 18 watt, S-8 #1141 (50 watt max.)

(T10 models): None supplied; rated for 40 watt T10

(FL models): 5, 7, 9 compact fluorescent, 41°K

Socket (incandescent models): Single contact bayonet; brass nickel plated Ba15s with 200° C silicone lead wires

(T10 models): High temperature ceramic medium base with 250° C silicone lead wires


(FL models): G23 bi-pin for 5 or 7 watt or GX23 bi-pin for 13 watt, with type-1 outdoor magnetic clamped core ballast

Lamp life: 1200 hours average rating for S-8 #1141, 10,000 hour for compact fluorescent


Wiring: Black 3 foot 18/2 zip cord for 12v., 120v.: standard black, white and ground, 18 gauge

Connection: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only) 12v. only

Finish: Optional finishes available; page 8



SL-08







SL-08-AL



SL-08 series continued on next page

12v. fixtures: 25 foot 16/2 fixture lead wire available; add -25F to catalog number. For use with Focus CPC or hub supplied by others.

SL-08 COMMERCIAL BRICK LIGHT SERIES SPECIFICATIONS (continued)

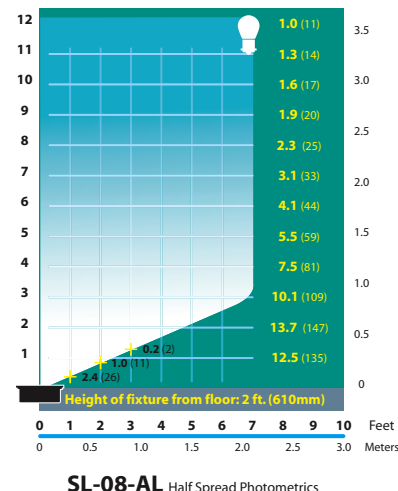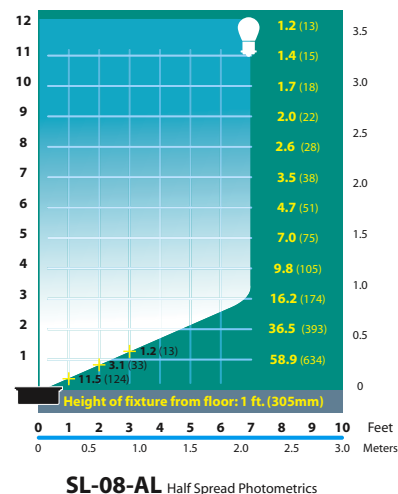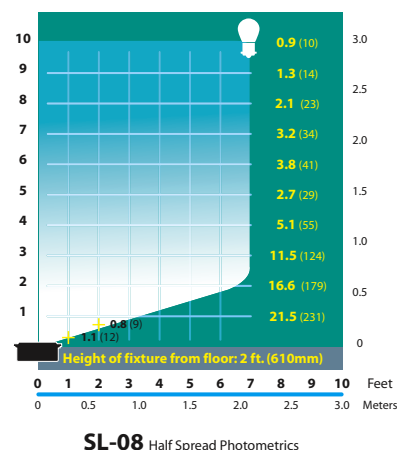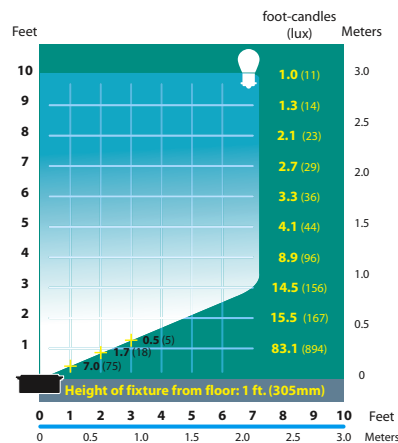

Note: Specify 1/2" end holes for end feed through at the time of order.

Catalog Number	Catalog Number Face Plate Only	Description	Face Plate Standard Finish
SL-08	FA-54	Cast aluminum 3 louver brick light, clear acrylic lens	Black texture
SL-08-BRS	FA-54-BRS	Cast brass 3 louver brick light, clear acrylic lens	Solid brass
SL-08-AL	FA-55	Cast aluminum white acrylic lensed brick light	Black texture
SL-08-AL-BRS	FA-55-BRS	Cast brass white acrylic lensed brick light	Solid brass
	FA-54-120V	Cast alum. 3 louver brick light, 120v., clear glass lens	Black texture
	FA-54-120V-BRS	Cast brass 3 louver brick light, 120v., clear glass lens	Solid brass
	FA-55-120V	Cast aluminum white acrylic glass lensed brick light, 120v.	Black texture
	FA-55-120V-BRS	Cast brass white acrylic glass lensed brick light, 120v.	Solid brass

120 VOLT COMPACT FLUORESCENT

Fluorescent fixtures have 5, 7 or 9 watt compact fluorescent lamps, 9 watt maximum. Specify wattage.

SL-08-FL-5, 7, 9	Cast aluminum 3 louver brick light, clear acrylic lens	Black texture
SL-08-FL-5, 7, 9-BRS	Cast brass 3 louver brick light, clear acrylic lens	Solid brass
SL-08-AL-FL-5, 7, 9	Cast aluminum lensed brick light, white acrylic lens	Black texture
SL-08-AL-FL-5, 7, 9-BRS	Cast brass lensed brick light, clear white acrylic lens	Solid brass

120 VOLT T10

The following fixtures are ready for 20-40 watt T10 bulbs, supplied without lamps.

SL-08-T10-NL	Cast aluminum 3 louver brick light, clear glass lens	Black texture
SL-08-T10-NL-BRS	Cast brass 3 louver brick light, clear glass lens	Solid brass
SL-08-AL-T10-NL	Cast aluminum lensed brick light, white glass lens	Black texture
SL-08-AL-T10-NL-BRS	Cast brass lensed brick light, white glass lens	Solid brass



BACK BOXES ONLY

Catalog Number	Description	Lamp and Voltage
FA-60	Cast aluminum box with lamp and socket	2 x 18w single contact (12v.)
FA-60-H	Cast aluminum box with lamp and socket	2 x 20w halogen (12v.)
FA-60-FL	Cast aluminum box with lamp and socket	5, 7, 9 watt comp. fluor. (specify) (120v.)
FA-60-MR16	Cast aluminum box with lamp and socket	20w MR16 FL (BAB) (12v.)
FA-60-X	Cast aluminum box with lamp and socket	2 x 20w Xenon (12v.)
FA-60-T7	Cast aluminum box with lamp and socket	2 x 15w T7 (120v.)
FA-60-T8	Cast aluminum box with lamp and socket	2 x 25w T8 (120v.)
FA-60-T10-NL	Cast aluminum box with medium base socket	(T10, 120v. option)
FA-60-BRS	Cast brass box with lamp and socket	2 x 18w SC (12v.)
FA-60-BRS-H	Cast brass box with lamp and socket	2 x 20w halogen (12v.)
FA-60-BRS-FL	Cast brass box with lamp and socket	5, 7, 9 watt comp. fluor. (specify) (120v.)
FA-60-BRS-MR16	Cast brass box with lamp and socket	20w MR16 FL (BAB) (12v.)
FA-60-BRS-X	Cast brass box with lamp and socket	2 x 20w Xenon (12v.)
FA-60-BRS-T7	Cast brass box with lamp and socket	2 x 15w T7 (120v.)
FA-60-BRS-T8	Cast brass box with lamp and socket	2 x 25w T8 (120v.)
FA-60-BRS-T10-NL	Cast brass box with medium base socket	(T10, 120v. option)

RECOMMENDED ENHANCEMENTS:

12v. Lamp Options: See page 143 groups A, B, D

120v. Lamp Options: See page 148 groups M, N, O

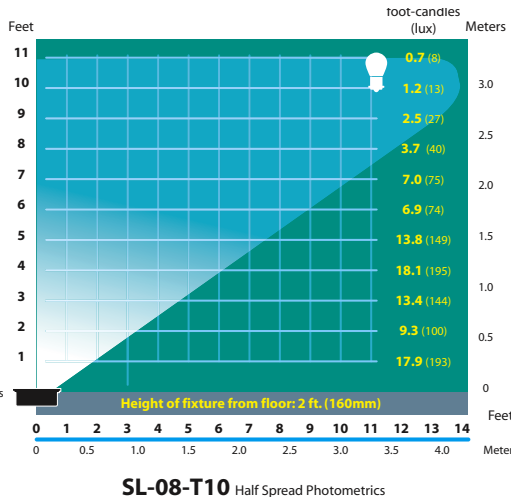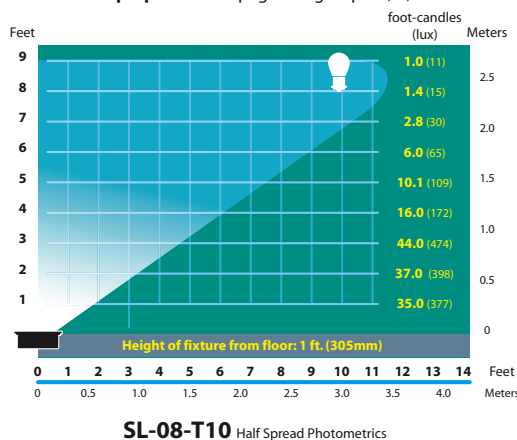


SL-08-BRS
2 x 18w Lamp (50w max.)
Solid Brass




SL-08 series continued on next page

12v. fixtures: 25 foot 16/2 fixture lead wire available; add -25F to catalog number.
For use with Focus CPC or hub supplied by others.


SL-08 COMMERCIAL BRICK LIGHT SERIES COMPACT FLUORESCENT SPECIFICATIONS (continued)

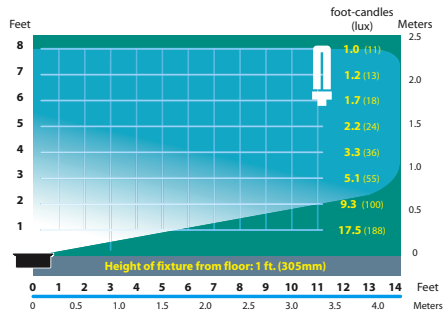


SL-08-AL-FL-5 Half Spread Photometrics (5w)

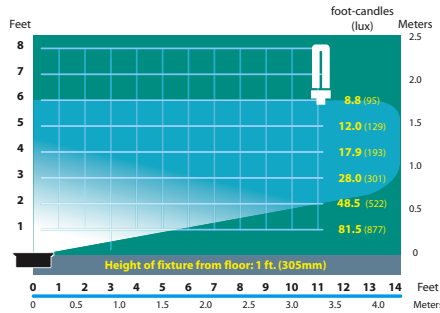


SL-08-AL-FL-7 Half Spread Photometrics (7w)

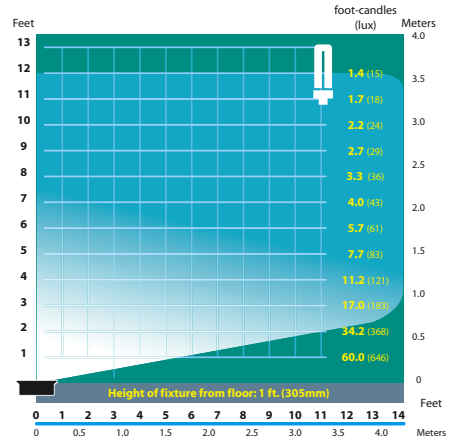


SL-08-AL-FL-9 Half Spread Photometrics (9w)

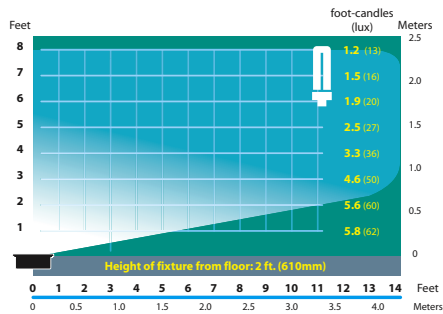


SL-08-AL-FL-5 Half Spread Photometrics (5w)

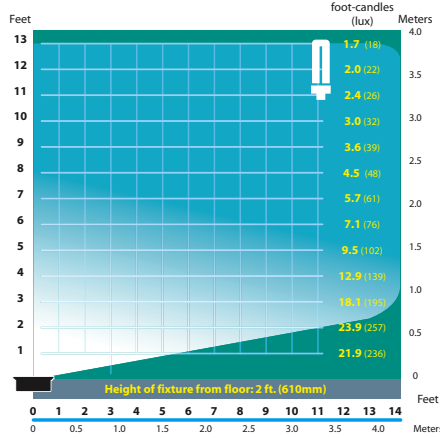


SL-08-AL-FL-7 Half Spread Photometrics (7w)

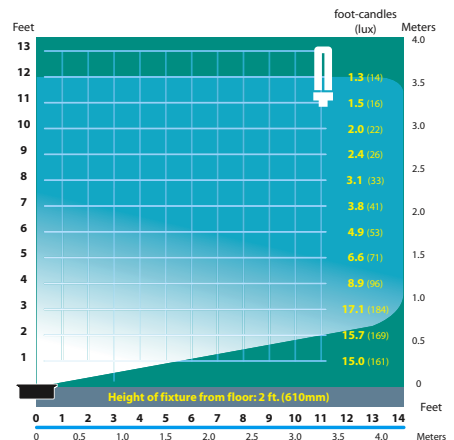


SL-08-AL-FL-9 Half Spread Photometrics (9w)

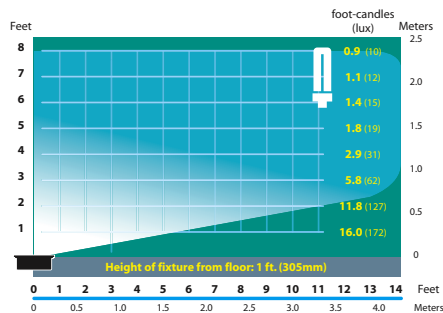


SL-08-FL-5 Half Spread Photometrics (5w)

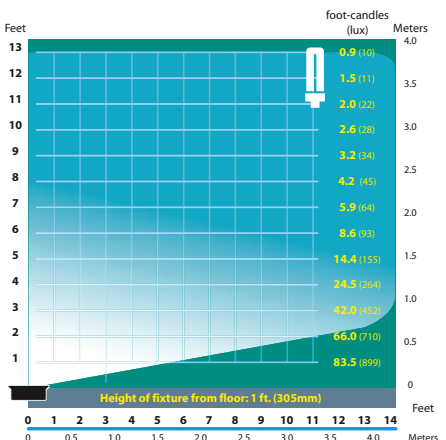


SL-08-FL-7 Half Spread Photometrics (7w)

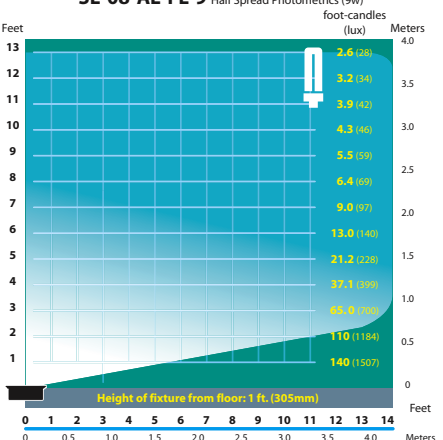


SL-08-FL-9 Half Spread Photometrics (9w)

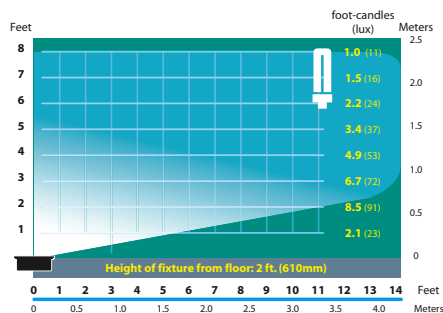

SL-08-FL-5 Half Spread Photometrics (5w)

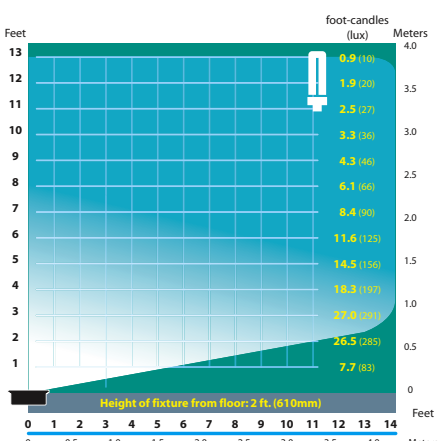

SL-08-FL-7 Half Spread Photometrics (7w)

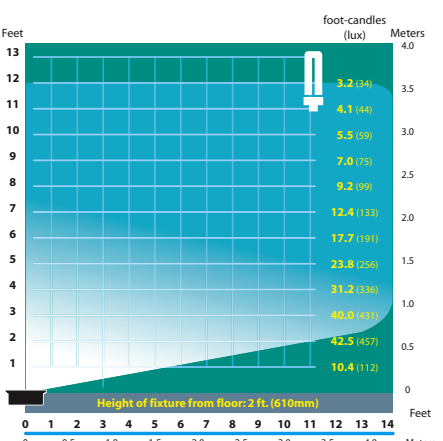

SL-08-FL-9 Half Spread Photometrics (9w)



**SL-17-BAV**

18w Lamp (25w max.)
Solid Brass

**SL-17-AL-BAR**

18w Lamp (25w max.)
Solid Brass

**SL-17-BRS**

18w Lamp (25w max.)
Solid Brass

SL-17 COMMERCIAL STEP LIGHT SERIES SPECIFICATIONS:

Face plate: Cast brass (-BRS) or cast aluminum

Back box housing: White powder coated cast aluminum
-BRS model is unfinished brass

Gasket: Black neosponge 0.190" thick closed cell

Lens (-AL models): High-impact acrylic, MR16 models have tempered glass

Reflector: Highly polished specular aluminum

Lamp: 18 watt, S-8 #1141; 1200 hours average rating (25 watt max.)

20w MR16 FL (BAB) on -MR16 models, 5000 hours average rating (25 watt max.)

Socket-S-8: Single contact bayonet; brass nickel plated Ba15s with 200° C silicone lead wires
MR16: high temperature ceramic GU5.3 bi-pin with 250° C silicone lead wires

Wiring: Black 3 foot 18/2 zip cord

Connection: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only)

Finish: Optional finishes available; page 8

Catalog Number	Catalog Number Face Plate Only	Description	Lens Material	Face Plate Standard Finish
The following models are supplied with 18 watt S-8 #1141 lamp, 25 watt maximum				
SL-17	FA-47	Cast aluminum 3 louver step light	Clear acrylic	Black texture
SL-17-BRS	FA-47-BRS	Cast brass 3 louver step light	Clear acrylic	Solid brass
SL-17-AL	FA-48	Cast aluminum lensed step light	White acrylic	Black texture
SL-17-AL-BRS	FA-48-BRS	Cast brass lensed step light	White acrylic	Solid brass
The following models are supplied with 20 watt MR16 FL (BAB), 25 watt maximum				
SL-17-AL-MR16	FA-48-MR16	Cast aluminum lensed step light	Linear spread glass	Black texture
SL-17-AL-MR16-BRS	FA-48-MR16-BRS	Cast brass lensed step light	Linear spread glass	Solid brass
	FA-47-120V	Cast aluminum 3 louver step light, 120v.	Clear glass	Black texture
	FA-47-120V-BRS	Cast brass 3 louver step light, 120v.	Clear glass	Solid brass
	FA-48-120V	Cast aluminum louvered step light, 120v.	White glass	Black texture
	FA-48-120V-BRS	Cast brass louvered step light, 120v.	White glass	Solid brass

BACK BOXES ONLY



Note: Specify 1/2" end holes for end feed through at the time of order.

Catalog Number	Description	Lamp and Voltage
FA-65	Cast aluminum box with lamp and socket	18w SC (12v.)
FA-65-H	Cast aluminum box with lamp and socket	20w halogen (12v.)
FA-65-X	Cast aluminum box with lamp and socket	20w Xenon (12v.)
FA-65-MR16	Cast aluminum box with lamp and socket	20w MR16 FL (BAB) (12v.)
FA-65-T7	Cast aluminum box with lamp and socket	15w T7 (120v.)
FA-65-T8	Cast aluminum box with lamp and socket	25w T8 (120v.)
FA-65-BRS	Cast brass box with lamp and socket	18w SC (12v.)
FA-65-BRS-H	Cast brass box with lamp and socket	20w halogen (12v.)
FA-65-BRS-X	Cast brass box with lamp and socket	20w Xenon (12v.)
FA-65-BRS-MR16	Cast brass box with lamp and socket	20w MR16 FL (BAB) (12v.)
FA-65-BRS-T7	Cast brass box with lamp and socket	15w T7 (120v.)
FA-65-BRS-T8	Cast brass box with lamp and socket	25w T8 (120v.)

RECOMMENDED ENHANCEMENTS:

12v. Lamp Options: See page 143 groups A, B, D


120v. Lamp Options: See page 148 groups N, O

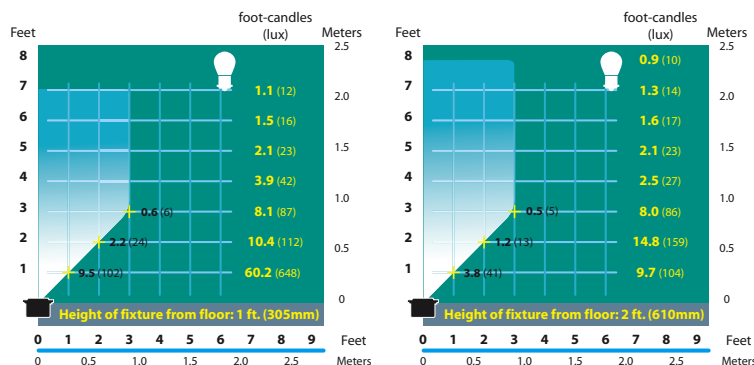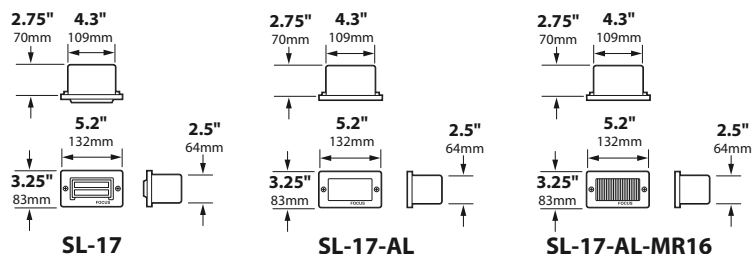**SL-17** Half Spread Photometrics**SL-17** Half Spread Photometrics


SL-17 series continued on next page

12v. fixtures: 25 foot 16/2 fixture lead wire available; add **-25F** to catalog number. For use with Focus CPC or hub supplied by others.


SL-17 STEP LIGHT SERIES SPECIFICATIONS (continued)

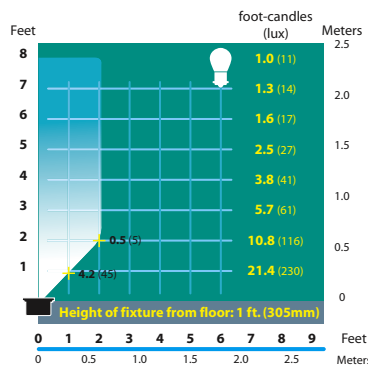


SL-17-AL Half Spread Photometrics

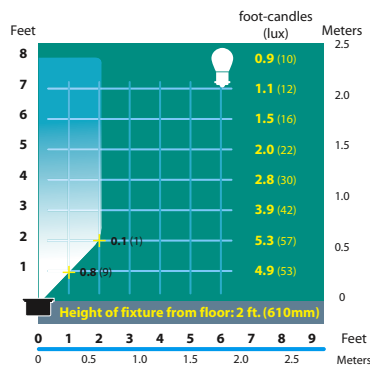

SL-17-AL Half Spread Photometrics

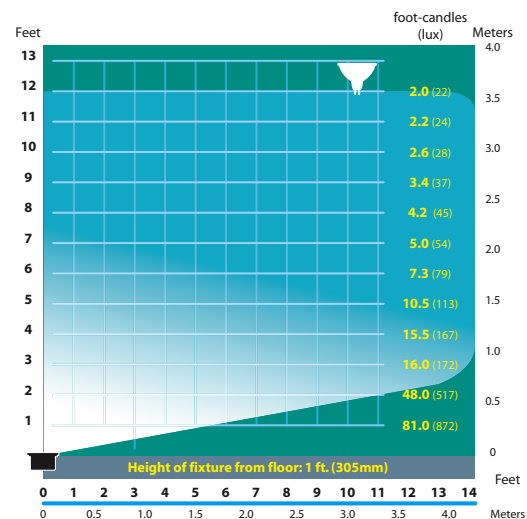

SL-17-AL-MR16 Half Spread Photometrics (20w)

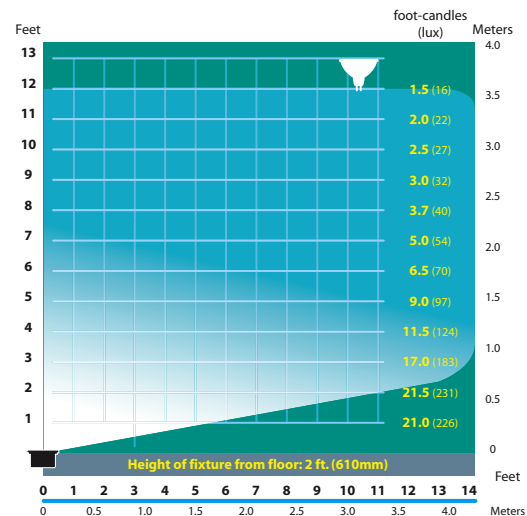


SL-17-AL-MR16 Half Spread Photometrics (20w)



SL-30-BAR
18w Lamp (25w max.)
Solid Brass




SL-30-BAV
18w Lamp (25w max.)
Solid Brass



SL-30

SL-30 COMMERCIAL STEP LIGHT SERIES SPECIFICATIONS:

- Back box housing:** White powder coated cast aluminum
-BRS models have unfinished brass housing
- Gasket:** Black neosponge 0.190" thick closed cell
- Lens (-AL models):** High-impact acrylic; -MR16 models have tempered glass
- Reflector:** Highly polished specular aluminum
- Lamp:** 18 watt, S-8 #1141; 1200 hours average rating (25 watt max.)
20w MR16 FL (BAB) on -MR16 models, 5000 hours average rating (25 watt max.)
- Socket-S-8:** Single contact bayonet; brass nickel plated Ba15s with 200° C silicone lead wires
MR16: high temperature ceramic GU5.3 bi-pin with 250° C silicone lead wires
- Wiring:** Black 3 foot 18/2 zip cord
- Connection:** FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only)
- Finish:** Optional finishes available; page 8



Catalog Number	Catalog Number Face Plate Only	Description	Lens Material	Face Plate Standard Finish
SL-30	FA-140	Cast aluminum 1 louver step light	White acrylic	Black texture
SL-30-BRS	FA-140-BRS	Cast brass 1 louver step light	White acrylic	Solid brass
SL-30-MR16		Cast aluminum lensed step light	Linear spread glass	Black texture
SL-30-MR16-BRS	FA-140-MR16-BRS	Cast brass lensed step light	Linear spread glass	Solid brass
	FA-140-120V	Cast aluminum 1 louver step light, 120v.	White glass	Black texture
	FA-140-120V-BRS	Cast brass 1 louver step light, 120v.	White glass	Solid brass

RECOMMENDED ENHANCEMENTS:


- 12v. Lamp Options:** See page 143-144 groups A, B, D, E
- 120v. Lamp Options:** See page 148 groups N, O




SL-30 series continued on next page

12v. fixtures: 25 foot 16/2 fixture lead wire available; add -25F to catalog number. For use with Focus CPC or hub supplied by others.


SL-30 STEP LIGHT SERIES SPECIFICATIONS (continued)

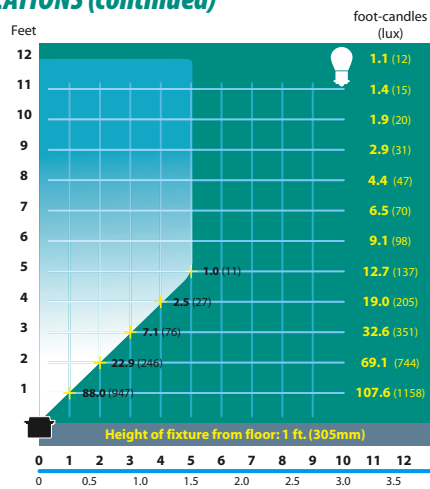


SL-30 Half Spread Photometrics

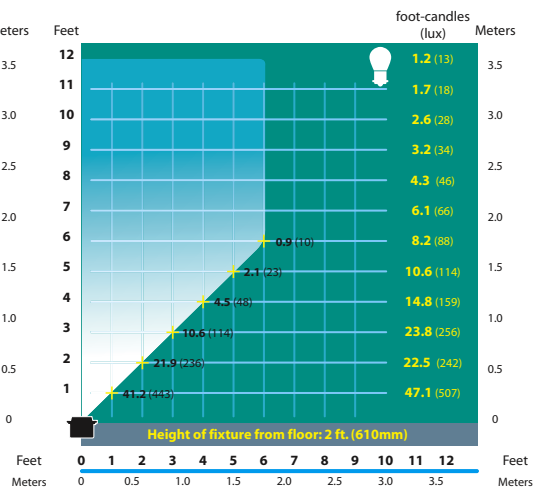

SL-30 Half Spread Photometrics

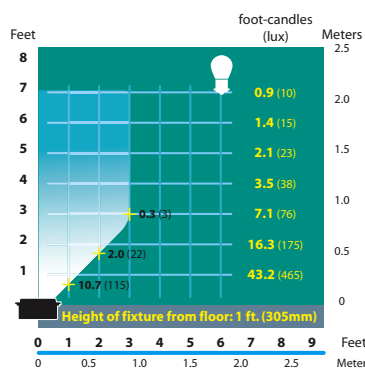

SL-31 Half Spread Photometrics

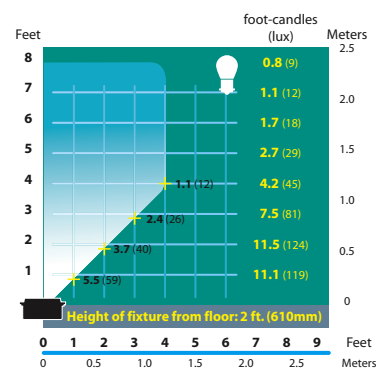

SL-31 Half Spread Photometrics

SL-31 COMMERCIAL BRICK LIGHT SERIES SPECIFICATIONS:

Face plate: Cast brass (-BRS) or cast aluminum

Back box housing: White powder coated cast aluminum
-BRS models have unfinished cast brass housing

Gasket: Black neosponge 0.190" thick closed cell

Reflector: Highly polished specular aluminum

Lamp (incandescent models): 2 x 18 watt, S-8 #1141 (50 watt max.)

(T10 models): None supplied; rated for 40 watt T10

(FL models): 5, 7, 9 compact fluorescent, 41°K

Socket (incandescent models): Single contact bayonet; brass nickel plated Ba15s with 200° C silicone lead wires

(T10 models): High temperature ceramic medium base with 200° C silicone lead wires


(FL models): G23 bi-pin for 5, 7 or 9 watt, with type-1 outdoor magnetic clamped core ballast

Lamp life: 1200 hours average rating for S-8 #1141, 10,000 hours average rating for compact fluorescent

Wiring: Black 3 foot 18/2 zip cord for 12v. Standard black, white, and ground, 18 gauge for 120v.

Connection: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only) 12v. only

Finish: Optional finishes available; page 8



Catalog Number	Catalog Number Face Plate Only	Description	Lens Material	Face Plate Standard Finish
INCANDESCENT				
2 x 18 watt S-8 #1141, 50 watt maximum				
SL-31	FA-141	Cast aluminum louvered step light	White glass	Black texture
SL-31-BRS	FA-141-BRS	Cast brass louvered step light	White glass	Solid brass
RECOMMENDED ENHANCEMENTS:				
12v. Lamp Options: See page 143 groups A, B, D				
120v. Lamp Options: See page 148 groups N, O				
MR16 LAMPS				
20 watt MR16 FL (BAB), 50 watt maximum				
SL-31-MR16	FA-141-MR16	Cast aluminum louvered step light	Linear spread glass	Black texture
SL-31-MR16-BRS	FA-141-MR16-BRS	Cast brass louvered step light	Linear spread glass	Solid brass

RECOMMENDED ENHANCEMENTS:

12v. Lamp Options: See pages 143-144 group E, MR16



12v. fixtures: 25 foot 16/2 fixture lead wire available; add -25F to catalog number. For use with Focus CPC or hub supplied by others.

**SL-31-BAR**

2 x 18w Lamps (2 x 25w max.)
Solid Brass

**SL-24-BAV**

18w Lamp (25w max.)
Solid Brass

**SL-24-BRS**

18w Lamp (25w max.)
Solid Brass

SL-31 COMMERCIAL BRICK LIGHT SERIES SPECIFICATIONS (continued)

T10 LAMPS

Medium base 20 through 40 watt T10, 40 watt maximum, fixture supplied without lamp.

SL-31-T10-NL	FA-141	Cast aluminum 1 louver step light	White glass	Black texture
SL-31-T10-NL-BRS	FA-141-BRS	Cast brass 1 louver step light	White glass	Solid brass

120 VOLT COMPACT FLUORESCENTS

5, 7, or 9 watt compact fluorescents, please specify at time of order.

SL-31-FL-5, 7, 9	FA-141	Cast aluminum 1 louver step light	White glass	Black texture
SL-31-FL-5, 7, 9-BRS	FA-141	Cast brass 1 louver step light	White glass	Solid brass

RECOMMENDED ENHANCEMENTS:

120v. Lamp Options: See page 148 group M

BACK BOXES ONLY

Note: Specify 1/2" end holes for end feed through at the time of order.

Catalog Number	Description	Lamp and Voltage
FA-65	Cast aluminum box with lamp and socket	18w SC (12v.)
FA-60	Cast aluminum box with lamp and socket	2 x 18w SC (12v.)
FA-60-H	Cast aluminum box with lamp and socket	2 x 20w halogen (12v.)
FA-60-FL	Cast aluminum box with lamp and socket	5, 7, or 9w comp. fluor. (specify wattage) (120v.)
FA-60-MR16	Cast aluminum box with lamp and socket	20w MR16 FL (BAB) (12v.)
FA-60-X	Cast aluminum box with lamp and socket	2 x 20w Xenon (12v.)
FA-60-T7	Cast aluminum box with lamp and socket	2 x 15w T7 (120v.)
FA-60-T8	Cast aluminum box with lamp and socket	2 x 25w T8 (120v.)
FA-60-T10	Cast aluminum box with medium base socket	(T10, 120v. option)
FA-60-BRS	Cast brass box with lamp and socket	2 x 18w SC (12v.)
FA-60-BRS-H	Cast brass box with lamp and socket	2 x 20w halogen (12v.)
FA-60-BRS-FL	Cast brass box with lamp and socket	5, 7, or 9w comp. fluor. (specify wattage) (120v.)
FA-60-BRS-MR16	Cast brass box with lamp and socket	20w MR16 FL (BAB) (12v.)
FA-60-BRS-X	Cast brass box with lamp and socket	2 x 20w Xenon (12v.)
FA-60-BRS-T7	Cast brass box with lamp and socket	2 x 15w T7 (120v.)
FA-60-BRS-T8	Cast brass box with lamp and socket	2 x 25w T8 (120v.)
FA-60-BRS-T10	Cast brass box with medium base socket	(T10, 120v. option)

SL-24 COMMERCIAL STEP LIGHT SERIES SPECIFICATIONS:

Back box housing: Heavy duty stamped aluminum with eight 1/2" knockouts, white finish

Front cover: Cast aluminum

Lens: White high impact acrylic, linear spread glass for SL-24-MR16

Gasket: Black neosponge 0.190" thick closed cell

Reflector: Highly polished specular aluminum

Lamp-SL-24, SL-24-BRS: 18 watt S-8 #1141 (35 watt max.)

SL-24-MR16, SL-24-MR16-BRS: 20 watt MR16 (BAB), (35 watt max.)

Socket: Single contact bayonet base (Ba15s)-brass nickel plated screw shell and spring (12v.); bi-pin GU5.3 MR16 ceramic with 250° C lead wires (12v.)

Lamp life: 1200 hours average rating for S-8 #1141, 5000 hours average rating for MR16

Wiring: Black 5 foot 18/2 zip cord (12v. only)

Connection: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only)

Finish: Optional finishes available; page 8


Catalog Number	Description
SL-24	Cast aluminum step eyebrow
SL-24-BRS	Cast brass step eyebrow
SL-24-MR16	Cast aluminum step eyebrow
SL-24-MR16-BRS	Cast brass step eyebrow




RECOMMENDED ENHANCEMENTS:

12v. Lamp Options: See pages 143-144 groups A, B, D, E


120v. Lamp Options: See page 148 groups P, Q

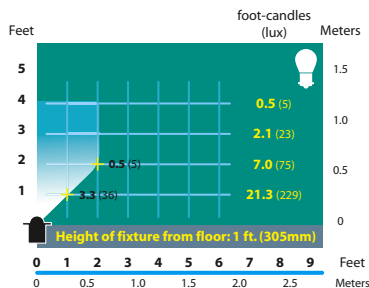

SL-24 Half Spread Photometrics

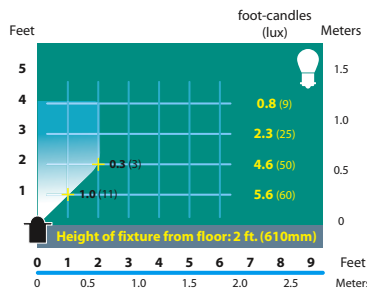

SL-24 Half Spread Photometrics

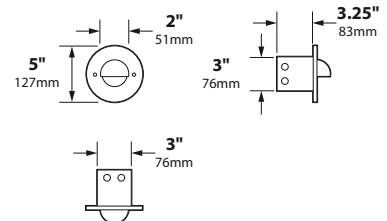

SL-24



12v. fixtures: 25 foot 16/2 fixture lead wire available; add **-25F** to catalog number. For use with Focus CPC or hub supplied by others.