



Wall Mount Lights – 12 volt/120 volt

SPECIALTY LIGHTS



ACCESSORIES



Enhancements
Page 102

WALL LIGHTING



Techniques
Page 4





SL-05-WM-BRS

18w Lamp (25w max.)
Solid Brass



SL-06-WM-BRS

18w Lamp (25w max.)
Solid Brass

SL-05-WM-BRS, SL-05-WM, SL-06-WM-BRS, SL-06-WM SPECIFICATIONS:

Construction–SL-05-WM-BRS: Heavy-duty spun brass with stamped brass wall bracket

SL-05-WM: Heavy-duty spun aluminum with stamped aluminum wall bracket

SL-06-WM-BRS: Cast brass

SL-06-WM: Cast aluminum

Lamp: 18 watt, S-8 #1141 (25 watt max.)

Lamp life: 1200 hours average rating for S-8 #1141

Socket: Single contact bayonet, brass nickel plated screw shell (Ba15s)
200°C silicone lead wires

Wiring: Black 5 foot 18/2 zip cord

Mounting: Back plate and screws supplied


Finish: Optional finishes available; page 8

Catalog Number	Description	Material
SL-05-WM	4.5" Bell Hat	Aluminum
SL-05-WM-BRS	4.5" Bell Hat	Brass
SL-06-WM	4.5" Tulip Hat	Aluminum
SL-06-WM-BRS	4.5" Tulip Hat	Brass

RECOMMENDED ENHANCEMENTS FOR SL-05-WM, SL-06-WM:


12v. Lamp Options: See page 143 groups A, B, D

10,000 HOUR
XENON
&
HALOGEN
AVAILABLE

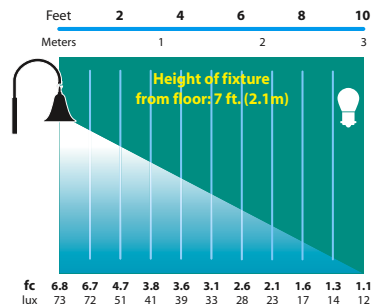


SL-05-WM

Half Spread Photometrics
10 ft. (3.0m) radius

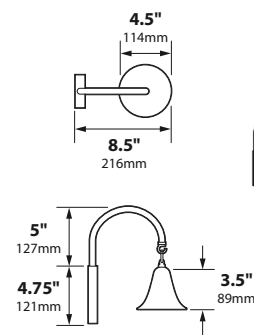


SL-05-WM

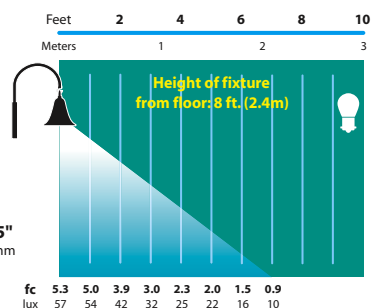


SL-05-WM

Half Spread Photometrics
7 ft. (2.1m) radius

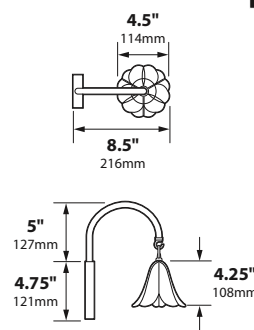


SL-06-WM

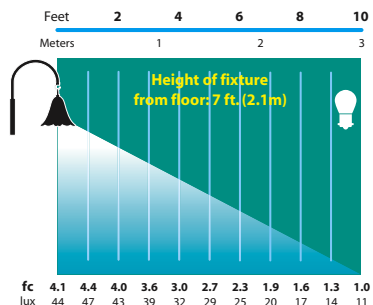

SL-06-WM

Half Spread Photometrics
10 ft. (3.0m) radius

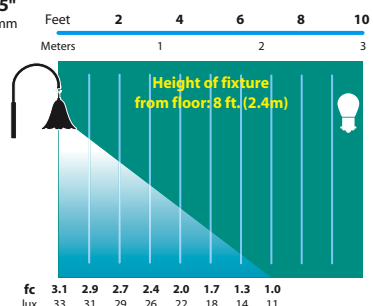



SL-06-WM

Half Spread Photometrics
7 ft. (2.1m) radius



**SL-13-WM-BRS**

18w Lamp (25w max.)
Solid Brass

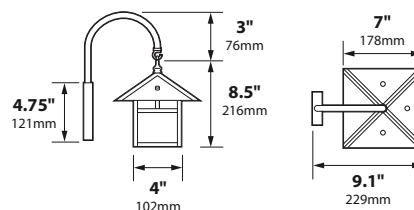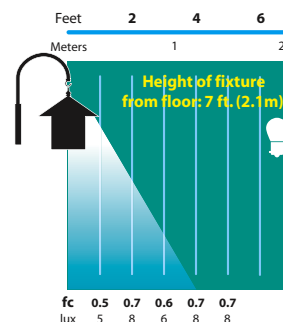**SL-13****SL-13**

Half Spread Photometrics
4 ft. (1.2m) radius

SL-13-WM-BRS, SL-13-WM SPECIFICATIONS:

Construction: Solid brass lantern, stamped and welded

Lens: Gold iridescent glass, Cracked Ice (-ICE) plastic lens available

Lamp: 18 watt, S-8 #1141 (25 watt max.)

Lamp life: 1200 hours average rating for S-8 #1141

Socket: Single contact bayonet, brass nickel plated screw shell (Ba15s) 200°C silicone lead wires

Wiring: Black 5 foot 18/2 zip cord

Mounting: Back plate and screws supplied

Finish-SL-13-WM-BRS: Unfinished brass

SL-13-WM: Black texture

Optional finishes available; page 8

**RECOMMENDED ENHANCEMENTS FOR SL-13-WM:**

12v. Lamp Options: See page 143 groups A, B, D

120v. Lamp Options: See page 148 groups N, O

Catalog Number	Description	Material
SL-13-WM	Brass Lantern	Brass with black texture finish
SL-13-WM-BRS	Brass Lantern	Brass

**SL-16 -BAV**

18w Lamp (25w max.)
Solid Brass

SL-16-BRS, SL-16 SPECIFICATIONS:

Construction-SL-16-BRS: Extruded brass cylinder

SL-16: Extruded aluminum cylinder

Lamp: 18 watt, S-8 #1141 (25 watt max.)

Lamp life: 1200 hours average rating for S-8 #1141

Socket: Single contact bayonet, brass nickel plated screw shell (Ba15s) 200°C silicone lead wires

Wiring: Black 5 foot 18/2 zip cord

Mounting: FA-24 with screws

Finish-SL-16-BRS: Unfinished brass



SL-16: Black texture

Optional finishes available; page 8

RECOMMENDED ENHANCEMENTS FOR SL-16:

12v. Lamp Options: See page 143 groups A, B, D

Catalog Number	Description	Material
SL-16	Wall Mount Cylinder up/down light	Aluminum
SL-16-BRS	Wall Mount Cylinder up/down light	Brass

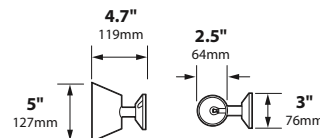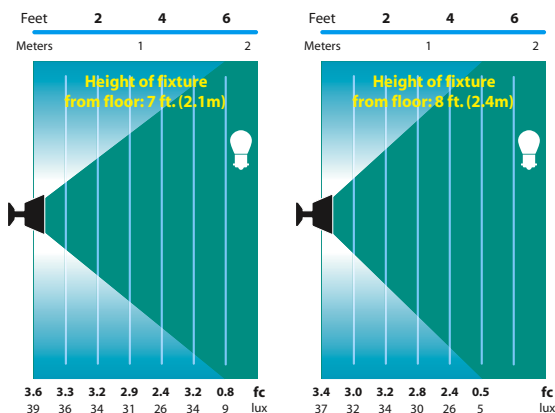**SL-16****SL-16**

Light Distribution and Photometrics
6 ft. (1.8m) radius

SL-16

Light Distribution and Photometrics
5 ft. (1.5m) radius

12v. fixtures: 25 foot 16/2 fixture lead wire available; add -25F to catalog number. For use with Focus CPC or hub supplied by others.





SL-06-XBAS-BRS, SL-06-XBAS SPECIFICATIONS:

Construction–SL-06-XBAS-BRS: Solid brass tulip
SL-06-XBAS: Cast aluminum tulip
All supplied with 18" long baby oval brass chain with cast brass hoop

Lamp: 20 watt, xenon single contact base (25 watt max.)

Lamp life: 10,000 hours average rating for xenon

Socket: Single contact bayonet, brass nickel plated screw shell (Ba15s)
200°C silicone lead wires

Wiring: Black 10 foot 18/2 zip cord

Mounting: FA-111 hanging mini junction box supplied


Finish–SL-06-XBAS-BRS: Unfinished brass

SL-06-XBAS: Black texture

Optional finishes available; page 8

Note: 3 x 18" chains with snap hooks for quick connection to basket (not supplied). 10 feet of 18/2 lead wire supplied. White 18/2 lead wire is standard with white fixture, all other fixtures have black 18/2 wire.

Catalog Number	Description	Material
SL-06-XBAS	Hanging Basket Light	Aluminum
SL-06-XBAS-BRS	Hanging Basket Light	Brass

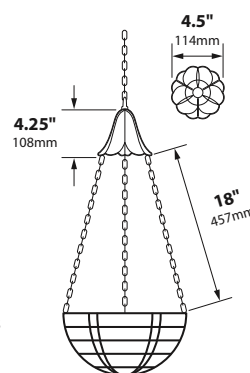

SL-06XBAS
(Basket not included)

10,000 HOUR
XENON
&
HALOGEN
AVAILABLE



SL-06-XBAS-BAR

20w Xenon Lamp (25w max.)
Solid Brass

