

Please select from the Table of Contents
All manufacturer list prices are shown in U.S. Dollars

Task Lighting Products

Portable Utility Lights

5 Types of Light Sources




Incandescent

Uses commonly available and inexpensive, standard (R-40 or PAR) incandescent bulbs up to 300 Watt flood lights.



Quartz Halogen

High light output from weatherproof aluminum die-cast light heads - uses 500 Watt bulbs (included).



Fluorescent

Uses compact, low energy use, long life 55 Watt Fluorescent bulb(included) - shade remains Cool-to-the-Touch.

Metal Halide

Longest lamp life - highest light output - lowest energy usage per lumens produced -uses 100 Watt metal halide HID lamp (included).



LED

Uses compact, low energy use, long life 55 Watt Fluorescent bulb(included) - shade remains Cool-to-the-Touch.

Light Selection Chart & Illumination Levels

LIGHT SOURCE:		INCANDESCENT		QUARTZ HALOGEN		FLUORESCENT		METAL HALIDE		LED	
# OF LIGHTEADS		1	2	1	2	1	2	1	2	1	2
MAX. WATTAGE		300	600	500	1,000	55	110	100	200	12	24
MAX. LUMENS		3,700	7,400	11,000	22,000	3,000	6,000	9000	18000	960	1,920
AVG. BULB LIFE (HRS.)		2,000		2,000		10,000		15000		50,000	
WIRE GUARD INCLUDED		Yes		Yes		Yes		Yes		Yes	
BULB INCLUDED		No		Yes		Yes		Yes		Yes	
LIGHT SOURCE ILLUMINATION LEVELS											
Measured Footcandles & Distance from Light Source (open area)	5' ft.	44.9	82.6	74.4	137.3	20.0	35.8	562	890	224.5	456.8
	10' ft.	20.8	38.9	36.1	65.9	8.7	14.8	148.1	244.1	121.4	258.8
	20' ft.	7.8	14.3	13.2	24.6	3.1	5.1	66.5	113.3	29.0	64.0
	30' ft.	4.0	6.9	6.6	12.3	1.7	2.5	47.1	68.7	14.2	31.4

6 Types of Bases and Mounts




Pedestal Base

- 16 gauge round steel tube construction
- Height adjustable from 5'-6" to 8'-6" high
- 18" heavy duty steel base



Cart Base

- 16 gauge round steel tube construction
- Height adjustable from 5' to 8' high
- 10" diameter solid rubber wheels

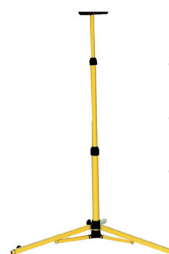


Tripod Base

- 20 gauge round steel tube construction
- Height adjustable from 3' to 6'-6" high
- Base covers 46" diameter area



Floor Base

- 12 ga. steel base
- Handle included
- Base covers 16" diameter area



Clamp-On Mount

- Clamp secures lighthouse to most surfaces up to 3"



Magnet Mount

- 210 lb. magnetic strength
- 1/4" steel arm
- Extends 6" from mounting surface

ATTENTION

Fluorescent and HID lamps contain mercury. Dispose of these lamps according to local, state, or federal laws. For further information on local, state, or other requirements for disposal of mercury-containing lamps, see <http://www.lamprecycle.com>.

Portable Utility Lights


Incandescent, Fluorescent, and LED Series

Features

- Chip resistant safety yellow & black powder coating finish for high visibility and durability
- 15' long 18/3 SJT, 120V cordset with NEMA 15-5 grounded plug
- Aluminum shade is 9-3/8" long with 7-3/4" diameter opening and will swivel 300° horizontally and 210° vertically
- On/Off switch & wire guard included on each lighthead
- ETL C/US Listed for indoor applications only

Lamp Specifications

- * INC models do not include an incandescent bulb.
- * FL models include a 55w spiral Fluorescent bulb and internal reflector for maximum lumination at shorter distances.
- * LED models are designed with an acrylic lens cover over each of the 12 single Watt LED emitters. Constructed with narrow 15° angle beam generating 960 lumens per bulb.

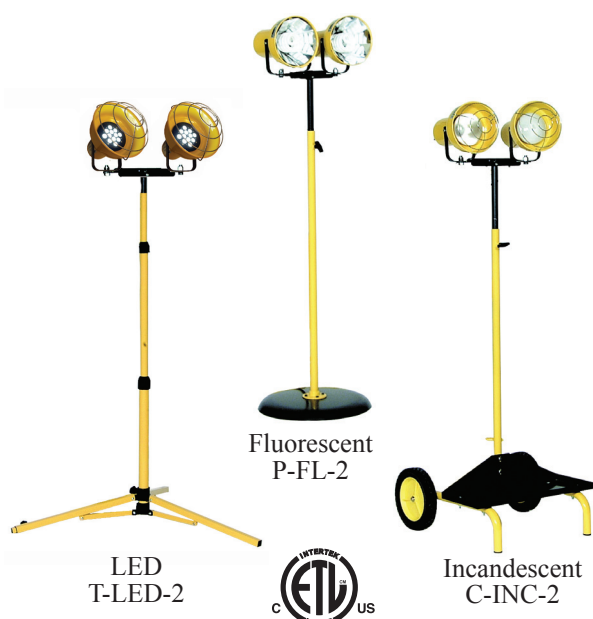

LED
T-LED-2

Fluorescent
P-FL-2



Incandescent
C-INC-2



Incandescent
M-INC-1



Fluorescent
CP-FL-1



LED
F-LED-1

Standard Models

UPC# 686334	MODEL	LAMP SOURCE	BASE TYPE	TOTAL MAX WATTS	# OF LIGHT HEADS	WT. (LBS.)	LIST
479967	P-INC-1	INCANDESCENT	PEDESTAL	300	1	35	245
479974	P-INC-2			600	2	39	319
479899	C-INC-1		CART	300	1	31	319
479905	C-INC-2			600	2	35	392
480024	T-INC-1		TRIPOD	300	1	13	135
480031	T-INC-2			600	2	17	208
480109	F-INC-1		FLOOR	300	1	8	140
480147	CP-INC-1		CLAMP	300	1	7	110
480185	M-INC-1		MAGNET	300	1	6	122
479981	P-FL-1	FLUORESCENT	PEDESTAL	55	1	35	324
479998	P-FL-2			110	2	39	465
479929	C-FL-1		CART	55	1	31	399
479936	C-FL-2			110	2	35	539
480062	T-FL-1		TRIPOD	55	1	13	214
480079	T-FL-2			110	2	17	355
480123	F-FL-1		FLOOR	55	1	8	220
480161	CP-FL-1		CLAMP	55	1	7	189
480208	M-FL-1		MAGNET	55	1	6	202
487245	P-LED-1	LED	PEDESTAL	12	1	37	526
487252	P-LED-2			24	2	42	880
487269	C-LED-1		CART	12	1	33	599
487276	C-LED-2			24	2	38	954
487283	T-LED-1		TRIPOD	12	1	15	416
487290	T-LED-2			24	2	20	770
487306	F-LED-1		FLOOR	12	1	10	421
487313	CP-LED-1		CLAMP	12	1	9	391
487320	M-LED-1		MAGNET	12	1	8	403

Note: All above models are shipped in ONE Carton

Individual Portable Light Components - Replacement Bulbs

UPC# 686334	MODEL	DESCRIPTION	Watts	USED WITH	WT. (LBS.)	LIST
485050	SSE-55	Fluorescent Bulb	55	ALL FL Lighthead	1	50
470858	LED-12	LED Bulb	12	ALL LED Lighthead	1	281
310598	QHL-500	Quartz Halogen Lamp	500	ALL QH Lighthead	1	15
310680	MH-100	Metal Halide Bulb	100	ALL MH Lighthead	1	92

Portable Utility Lights


Quartz Halogen and Metal Halide Series

Features

- Chip resistant safety yellow & black powder coating finish for high visibility and durability
- 15' long 18/3 SJT, 120V cordset with NEMA 15-5 grounded plug
- Shade will swivel 300° horizontally and 210° vertically
- On/Off switch, bulb, & wire guard included on each lighthead

Lamp Specifications

- * QH models include a 500W Quartz Halogen bulb and weatherproof die cast aluminum lighthead with impact resistant lens. Each shade size is 9" wide x 7-1/4" high x 9-3/4" deep. ETL C/US listed for semi-protected outdoor use.
- * MH models include a 100W Metal Halide bulb and are designed with an aluminum shade measuring 11-3/4 long with a 7-3/4" opening. Constructed with interior electronic ballast and polished aluminum reflector for the highest lumen output of all the portable light series. ETL C/US listed for indoor use.

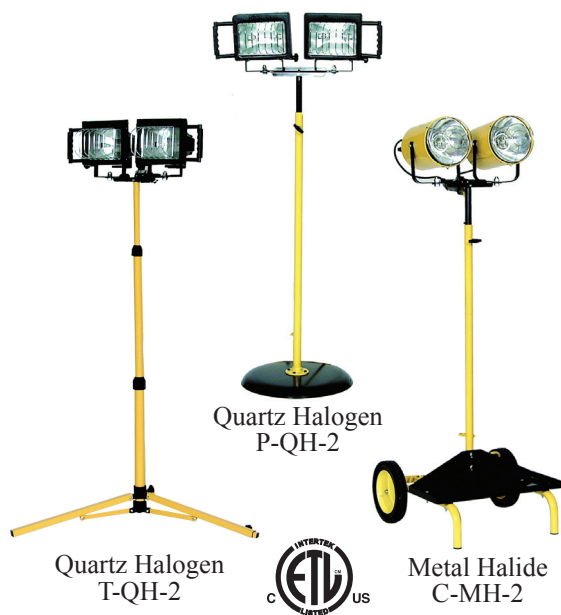

Quartz Halogen
M-QH-1

Quartz Halogen
CP-QH-1

Metal Halide
F-MH-1

Standard Models

UPC# 686334	MODEL	LAMP SOURCE	BASE TYPE	TOTAL MAX WATTS	# OF LIGHT HEADS	WT. (LBS.)	LIST
479868	P-QH-1	QUARTZ HALOGEN	PEDESTAL	500	1	36	251
479875	P-QH-2			1000	2	41	312
479912	C-QH-1		CART	500	1	32	324
479882	C-QH-2			1000	2	37	386
480048	T-QH-1		TRIPOD	500	1	14	140
480055	T-QH-2			1000	2	19	202
480116	F-QH-1		FLOOR	500	1	9	148
480154	CP-QH-1		CLAMP	500	1	8	117
480192	M-QH-1		MAGNET	500	1	7	129
480000	P-MH-1	METAL HALIDE	PEDESTAL	100	1	38	710
480017	P-MH-2			200	2	45	1182
479943	C-MH-1		CART	100	1	34	784
479950	C-MH-2			200	2	41	1255
480086	T-MH-1		TRIPOD	100	1	16	599
480093	T-MH-2			200	2	23	1071
480130	F-MH-1		FLOOR	100	1	11	607
480178	CP-MH-1		CLAMP	100	1	10	576
480215	M-MH-1		MAGNET	100	1	9	588

Individual Portable Light Components - Lightheads and Bases


UPC# 686334	MODEL	TYPE	DESCRIPTION	TOTAL MAX WATTS	# OF LIGHT HEADS	WT. (LBS.)	LIST
480222	INC-1	LIGHthead	INCANDESCENT	300	1	4	77
480321	INC-2			600	2	7	175
480307	FL-1		FLUORESCENT	55	1	5	159
480345	FL-2			110	2	8	319
487368	LED-1		LED	12	1	6	410
487375	LED-2			24	2	9	811
480291	QH-1		QUARTZ HALOGEN	500	1	5	111
480338	QH-2			1000	2	10	186
480314	MH-1		METAL HALIDE	100	1	7	540
480352	MH-2			200	2	14	1025
480277	PED	BASE	PEDESTAL	-	-	31	196
480284	CRT		CART	-	-	27	221
480239	TRI		TRIPOD	-	-	9	93
480260	FLR		FLOOR	-	-	4	74
480246	CLP		CLAMP	-	-	2	37
480253	MAG		MAGNET	-	-	3	49

Heavy Duty Portable Utility Lights



Quartz Halogen Light Heads

- (2) 500 Watt weatherproof die cast aluminum lightheads with 15' long, 3-conductor cord, and plug
- Quartz halogen lamps
- Impact resistant lens
- On-Off switch
- OSHA approved wire guards and bulb included with each lighthead

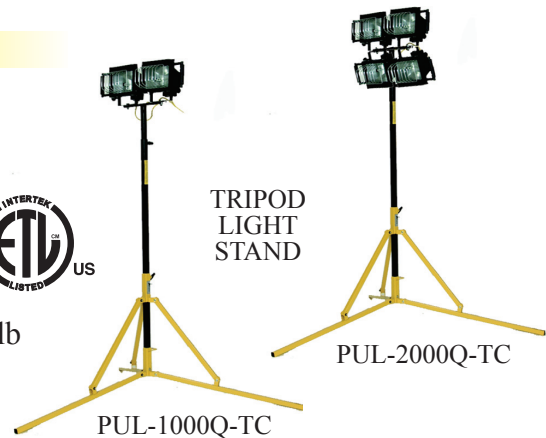

Cart Light Stand With GFCI Features

- Upright adjust from 5' to 8' high
- 10" diameter rubber wheels
- 15' all-weather, water and oil resistant SJTW 18/3 cordset and molded NEMA 5-15 plug
- Weatherproof electrical box with a 15 Amp GFCI duplex receptacle

Tripod Light Stand Features

- Square 12 gauge steel tubing construction
- Adjustable legs fold up for storage, fold flat for sand bagging or can be set and locked at 6", 12", 18" or 24" ground clearances
- Height adjustable from 5' to 11' high
- Safety stop mechanism, at full extension, prevents the mast from being pulled out of the base
- 15' all-weather, water and oil resistant SJTW 18/3 cordset and molded NEMA 5-15 plug

Standard Models

UPC# 686334	MODEL	BASE TYPE	BULBS	WATTS	VOLTS	MAX LUMENS	AVE. BULB LIFE (HRS)	SHIPPING WT. (LBS)	LIST
446785	PUL-1000Q-CD	CART	500W Quartz Halogen	1000	120	22,000	2,000	50	649
446839	PUL-1000Q-TC	TRIPOD						41	686
446846	PUL-2000Q-TC	TRIPOD		2000		44,000		45	927

Commercial Duty Portable Utility Lights

CL 300 (Incandescent - Clamp on Model)



Features

- Ceramic socket will accept incandescent bulbs A-19, R-40 or PAR bulbs up to 300 Watt. Fixture will also accept infrared heat lamps up to 250 Watt
- 8' long - 18/3 SPT cordset with NEMA 5-15 plug

Standard Models

UPC# 686334	MODEL	BASE TYPE	BULBS	MAX. WATTS	VOLTS	MAX LUMENS	AVE. BULB LIFE HOURS	SHIPPING WT. (LBS)	LIST
445078	CL-300	CLIP-ON	300W Incandescent	300	120	11000	2000	3	52

All models are shipped in ONE carton. *Bulb not included.

Machine Tool Lights

Water Resistant Fluorescent Tube Lights



Features

- ETL C/US Listed for NEMA Type 13 applications - oil / water / coolant spray areas (not submersible) and dusty atmospheres.
- Available with a durable, lightweight, economical, shatter resistant polycarbonate tube housing
- Model 21-TLB-IB-C includes a borosilicate (or glass) lens for greater scratch & chemical resistance
- Stainless steel mounting hardware and fluorescent bulb are included
- 8' long, 18/3 SJTOW cord with NEMA 5-15 plug on models with cords
- EOB units with internal ballast are factory wired for 120V w/ 8' long cordset. Units can be field converted for direct wiring for 90V to 277V. Terminal block provided for easy wire installation.

Standard Models

UPC# 686334	MODEL #	MODEL SERIES	WATTS	VOLTS	LUMENS	OVERALL LENGTH	TUBE MATERIAL	BALLAST INCLUDED	SHIPPING WT. (LBS)	LIST
282345	15-TLP-IB-C	REMOTE BALLAST WITH CORDSET	18	120V	1250	15"	Polycarbonate	Yes	9	459
282130	21-TLB-IB-C		36		2900	21"	Glass	Yes	10	526
282321	21-TLP-IB-C		36		2900	21"	Polycarbonate	Yes	10	490
482943	23-TLP-EOB-C	INTERNAL BALLAST WITH CORDSET	18	90 to 277V	1250	23"	Polycarbonate	Yes	6	392
482950	29-TLP-EOB-C		36		2900	29"	Polycarbonate	Yes	7	416
484343	29-TLP-A	REMOTE BALLAST	50	120V	4300	29"	Polycarbonate	Yes	7	441
282499	52-TLP-A		100		8400	52"	Polycarbonate	Yes	12	607
482936	23-TLP-24VDC	INTERNAL BALLAST	18	24VDC*	1250	23"	Polycarbonate	Yes	6	386

* Includes 2 ft. lead wires

Accessories - Magnetic Base and Replacement Lamps



UPC# 686334	MODEL	DESCRIPTION	USED WITH	WT. (LBS.)	LIST
445757	TL-MB	Magnetic Bases & Fasteners (Pair)	ALL Tube Lights	1	56
310338	TL-RB-18	Fluorescent Replacement Bulb, 18W, PL-L	All 18 Watt Models	1	58
310086	TL-RB-36	Fluorescent Replacement Bulb, 36W, PL-L	All 36 Watt Models	1	62
310826	TL-RB-50	Fluorescent Replacement Bulb, 50W, PL-L	All 50 & 100 Watt Models	1	68

Heavy Duty Machine Tool Lights

Incandescent

Features

- Patented disc and collar swivel joints with adjustable bar knobs for securing arms into a variety of positions
- Shades constructed of a 22-gauge steel and arms made of 5/8" steel tubing, with reach from 25" to 44"
- Charcoal gray powder coated finish
- Horizontal or vertical bolt down mounting bracket
- 10 amp rocker type on-off switch and lamp socket
- Includes an 8' 18/3 SJTO Cordset with NEMA 5-15 molded grounded plug for 120-Volt operation
- FTT Model includes (2) 13-Watt fluorescent twin tubes, internal white reflector, and protective acrylic lens
- Bulb not included with BH, BP, or VCX Models

Standard Models

UPC#	MODEL	BULB TYPE	BULB DESCRIPTION	WATTS	MAX LUMENS	AVE. BULB LIFE (HRS)	OVER-ALL REACH	WT. (LBS.)	LIST
686334									
381871	5-BH-701A	Incandescent	60W medium base A-19	60	870	1,000	25"	5	150
381895	55-BH-701A						35"		160
381925	66-BH-701A						44"		165
381956	55-BP-701A		75W medium base A-19	75	1220	750	35"	6	174
442887	66-BP-701A						44"		179
381215	55-VCX-701B		100W medium base A-19, R-30 or PAR 38	100	1470	750	29"	6	185
381314	66-VCX-701B						38"		192
283632	66-FTT26-701B	Fluorescent	(2) 13W Twin Tubes	26	1800	10,000	38"	9	340



Medium Duty, Flexible Arm, Incandescent, Machine Tool Lights

Features

- Chrome plated, flexible arm
- 8' 18/3 or 18/2 SPT cordset with molded plug
- Turn knob on-off switch
- Phenolic shade with spun aluminum inner reflector on R - series
- Bulb not included

Standard Models

UPC#	MODEL	BULB	BASE	MAX LUMEN	OVER-ALL REACH	WT. (LBS.)	LIST
686334							
445764	15-MC-901	25 Watt	Vertical Bolt-on Base	180	15"	2	68
442305	12-R-M-3	60 Watt	Magnetic Base	865	12"	3	119



Illuminated Fluorescent Magnifiers

Features

- 5", 8-diopter (3X power) magnifying clear lens for 200% magnification of an object with a focal length of 5"
- Suspension spring balanced arm assembly allowing up to 45" reach, with finger tighten control knobs to lock arms and shade into position
- 18/3-wire, grounded, 6' cordset & molded NEMA 15-5 plug
- Housing consists of a sturdy white plastic 8-1/2" shade with an on-off rocker switch and glare protection cover located on the top of the shade
- Includes die-cast clamp-on base to attach to a flat surface up to 2-1/2" thick
- Factory installed 22W, 120V, T-9 deluxe cool white circline fluorescent lamp and protective lens

Standard Models

UPC#	MODEL	MAGNIFICATION POWER	BULB	WATTS	MAX LUMENS	AVE. BULB LIFE (HRS)	OVER-ALL REACH	SHIPPING WT. (LBS.)	LIST
686334									
485159	45-MAG-W	3X	22W. Circline	22	1800	16,000	45"	10	205
312035	MAG-22W	22W., 120V., T-9 deluxe cool white circline replacement lamp						1	26




Loading Dock Lights - LED Dock Light

Fully Assembled & Modular Dock Lights

Light Head Features

- Chip resistant safety yellow & black powder coating finish for high visibility and durability
- 5' long 18/3 SJT, 120V cordset with NEMA 15-5 grounded plug
- On/Off switch & wire guard included on each lighthouse
- 1-1/2" square, 14-gauge, steel tubing
- 3" x 5" x 3/16" mounting plate attached with (4) 3/8" bolts (not supplied)
- (5) Lighting Sources to select from: Incandescent, Quartz Halogen, LED, Metal Halide, or Fluorescent
- (3) Arms Lengths: 24", 40", or 60" (plus 25" Flex Arm, incandescent only)
- VA models include (2) dock arms with a Vertical Adjustment bracket allowing outer arm to adjust from 300° horizontally and 210° vertically
- All light heads will swivel 300°
- Bulbs included with all lighthouses, except Incandescent models
- ETL C/US Listed for indoor applications only, except QH models are semi-protected outdoor

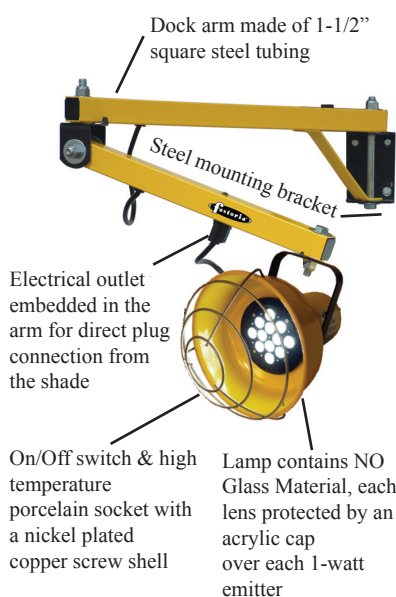

Light Selection Chart & Illumination Levels

DESCRIPTION		Incandescent	Quartz Halogen	LED	Metal Halide	Fluorescent
MAX. WATTAGE		300	500	12	100	55
MAX. LUMENS		3,700	11,000	960	9,000	3,000
AVG. BULB LIFE (HRS.)		2,000	2,000	50,000	15,000	10,000
BULB INCLUDED		No	Yes	Yes	Yes	Yes
LIGHT SOURCE ILLUMINATION LEVELS						
Measured Footcandles & Distance from Light Source (inside trailer)	10' ft.	15	28	121	142	9
	20' ft.	5	14	29	55	3
	30' ft.	3	8	14	18	2
	40' ft.	2	5	4	9	---
	50' ft.	---	3	3	7	---


Dock Light Performance Testing

We measured light levels (in footcandles) inside a 8' x 9' x 53' trailer with a wooden floor and ceiling and white fiberglass walls. A matrix of nine measurements were taken at five work plains inside the trailer. Averages were figured along the center work plane of the trailer.

These charts measure the overall quality of truck trailer illumination from a selection of light sources. Many other factors such as: cost of energy, safety, availability of fixtures, cost of labor and replacement lamps should figure into your final decision.

Light Source and Color Characteristics	10 ft.	20 ft.	30 ft.	40 ft.	50 ft.
100W Metal Halide (Bright White)	142	55	18	9.1	7.3
12W LED (Cool White)	121	29	14	3.7	3.2
500W Quartz Halogen (Bright White)	28	14	8	5.3	3.1
300W Incandescent (Off White)	15	5	3	2.1	---
55W Fluorescent (Bright White)	9	3	2	---	---

Note: Above measurements are measured in footcandles

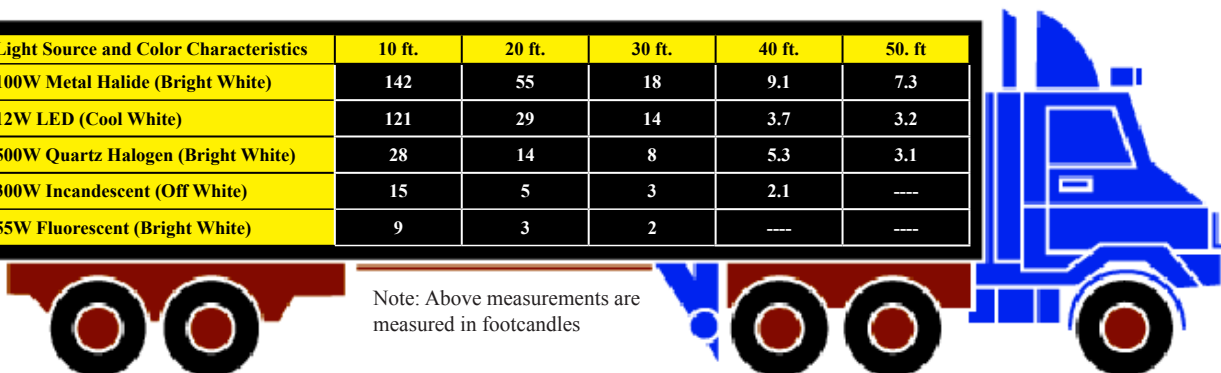

Loading Dock Lights

Fully Assembled Standard Duty Loading Dock Arms

(Light Head and Arm Bolted Together and Shipped in One Carton)

Standard Models



Incandescent



Quartz



Metal Halide

UPC# 686334	MODEL	ARM LENGTH	# OF ARMS	MAX WATTS	WT. (LBS.)	LIST
INCANDESCENT						
446648	DKL-24-A	24"	1	300	10	172
385404	DKL-25-FLX	25"	1		19	179
446655	DKL-40VA-A	40"	2		14	189
446662	DKL-60VA-A	60"	2		17	228
QUARTZ HALOGEN						
446709	DKL-24-QH-A	24"	1	500	11	203
446716	DKL-40VA-QH-A	40"	2		15	227
459587	DKL-40VA-SQH-B	40"	2		7	353
446723	DKL-60VA-QH-A	60"	2		18	265
LED						
470827	DKL-24-LED	24"	1	12	11	447
470834	DKL-40VA-LED	40"	2		15	464
470841	DKL-60VA-LED	60"	2		18	503
METAL HALIDE						
446730	DKL-24-MH-A	24"	1	100	13	582
446747	DKL-40VA-MH-A	40"	2		17	614
446754	DKL-60VA-MH-A	60"	2		21	651
FLUORESCENT						
470797	DKL-24-FL-A	24"	1	55	11	221
470803	DKL-40VA-FL-A	40"	2		15	246
470810	DKL-60VA-FL-A	60"	2		18	283

Ceiling Mounted Incandescent Flex Arm



Features

- Flexible elastomer arm moves when hit and then returns light to original position
- Ceramic socket will accept incandescent bulbs, R-40 or PAR bulbs up to 300W
- On-off toggle switch on light head

Standard Models

UPC# 686334	MODEL	ARM LENGTH	WATTS	VOLTS	MAX LUMENS	AVE. BULB LIFE (HRS)	WT. (LBS.)	LIST
385404	DKL-25-FLX	25"	300	120	3,700	2000	7	179

*Bulb not included.

Light Head Accessories

Standard Models



LG-1

UPC# 686334	MODEL	DESCRIPTION	WATTS	USED WITH	WT. (LBS.)	LIST
331326	LG-1	Lamp Guard	-	INC, LED, or FL Fixtures	2	37
485050	SSE-55	Fluorescent Bulb	55	ALL FL Lightheads	1	49
470858	LED-12	LED Bulb	12	ALL LED Lightheads	1	281
310598	QHL-500	Quartz Halogen Lamp	500	ALL QH Lightheads	1	16
310680	MH-100	Metal Halide Bulb	100	ALL MH Lightheads	1	92

Note: Lamp guards are included with every dock light fixture.

Modular Loading Dock Lights

Modular Lights



24" / 40" / 60" arms that can be used with one of 5 lightheads & optional fan.

Features

- 14" long, 18/3 conductor cord plugs into electrical junction box on arm
- On/Off switch & wire guard included with each lighthead
- Bulb included with all lightheads except DKL-INC

Standard Models

UPC#	MODEL	LIGHT HEAD TYPE	MAX WATTS	MAX LUMENS	AVE. BULB LIFE (HRS)	SHIP WT. (LBS)	LIST
686334							
446563	DKL-INC	Incandescent	300	3,700	2,000	5 lbs.	77
446570	DKL-QH	Quartz Halogen	500	11,000	2,000	6 lbs.	116
470865	DKL-LED	LED	12	960	50,000	7 lbs.	412
446600	DKL-MH	Metal Halide	100	9,000	15,000	10 lbs.	560
484336	DKL-FL	Fluorescent	55	3,000	10,000	7 lbs.	135

Mounting Arms



The outer arm on 40" & 60" arms will swing 300° in horizontal plane & 210° in vertical plane

Features

- 1-1/2" square, 14 gauge, steel tubing
- 3" x 5" x 3/16" mounting plate attaches with (4) 3/8" bolts
- 5' long, 18/3 SJTW conductor cord and NEMA 5-15 grounded plug

Standard Models

UPC#	MODEL NUMBER	ARM LENGTH	TOTAL # OF ARMS	SHIPPING WT. (LBS)	LIST
686334					
446532	DKL-24-ARM	24"	1	11 lbs.	97
446549	DKL-40VA-ARM	40"	2	18 lbs.	122
446556	DKL-60VA-ARM	60"	2	24 lbs.	156
446532	24-LDA	24"	1	11 lbs.	97
446617	40-LDA	40"***	3	18 lbs.	166
446624	60-LDA	60"***	3	24 lbs.	192

**Indicates heavy duty dock arms.

Loading Dock Arm, Fan, & Light Head



The outer arm on 40" & 60" arms will swing 300° in horizontal plane & 210° in vertical plane

Features

- 18" high velocity circulator, with 3 speed, 1/8 HP, 115V, 1phase permanently lubricated, totally enclosed, PSC motor
- Modular fan plugs into electrical outlet on arm
- Coated steel guards and aluminum blades.

Standard Models

UPC#	MODEL NUMBER	ARM LENGTH	LIGHT TYPE	TOTAL # OF ARMS	SHIPPING WT. (LBS)	LIST
686334						
470704	HDL-24-INC	24"	Incandescent	1	16	166
470711	HDL-40-INC	40"		3	24	234
470728	HDL-60-INC	60"		3	30	258
470735	HDL-24-QH	24"	Quartz Halogen	1	17	203
470742	HDL-40-QH	40"		3	25	272
470759	HDL-60-QH	60"		3	31	296

Fan Head Only

UPC#	MODEL NUMBER	CFM			AMPS HIGH	SHIP WT.	LIST
		HIGH	MED	LOW			
797184	LDF-18-TE	5750	4700	3200	2.2	20 lbs.	189

Heavy Duty Modular Loading Dock Lights



24" / 40" / 60" arms
that come with
incandescent or quartz
halogen light heads
and can be used with
an optional fan.



Mounting Arms Features

- 3" x 5" x 3/16" mounting plate attaches with (4) 3/8" bolts
- 5' long., 18/3 SJTW conductor cord and NEMA 5-15 grounded plug
- 1-1/2" square, 14 gauge, steel tubing

Light Head Features

- 18" long, 18/3 conductor cord plugs into electrical junction box on arm
- On/Off switch & wire guard included with each lighthead
- Bulb included with all lightheads except DKL-INC

Modular Fan Features

- 18" high velocity circulator, with 3 speed, 1/8 HP, 115V, 1 phase, permanently lubricated, totally enclosed, PSC motor
- Modular fan plugs into electrical outlet on arm
- Chrome plated metal guard. Aluminum blades

Standard Models

UPC# 686334	MODEL	ARM LENGTH	LIGHT TYPE	SHIP WT. (LBS)	LIST
470704	HDL-24-INC	24"	Incandescent	16 lbs.	153
470711	HDL-40-INC	40"		24 lbs.	215
470728	HDL-60-INC	60"		30 lbs.	238
470735	HDL-24-QH	24"	Quartz Halogen	17 lbs.	187
470742	HDL-40-QH	40"		25 lbs.	250
470759	HDL-60-QH	60"		60 lbs.	272

Modular Loading Dock Lights

DESCRIPTION		LIGHT SOURCE TYPE				
		Incandescent	Quartz Halogen	Metal Halide	Fluorescent	LED
MAX. WATTAGE		300	500	100	55	12
MAX. LUMENS		3,700	11,000	9000	3000	960
AVG. BULB LIFE (HRS.)		2,000	2,000	15,000	10,000	50,000
BULB INCLUDED		No	Yes	Yes	Yes	Yes
LIGHT SOURCE ILLUMINATION LEVELS						
Measured Footcandles & Distance from Light Source (inside trailer)	10' ft.	15	28	142	9	121
	20' ft.	5	14	55	3	29
	30' ft.	3	8	18	2	14
	40' ft.	2	5	9	---	4
	50' ft.	---	3	7	---	3