



## COMPRESSION ACCESSORIES

### STACKLUG™ ADAPTERS

#### Stacking Adapters for Aluminum and Copper Compression Lugs


Tin-plated impacted pure aluminum for good conductivity and corrosion resistance

Two sizes accommodate terminals from 1/0 through 750 MCM

Allows stacking of standard terminals

Keeps costly inventories to a minimum

**Dual-Rated**

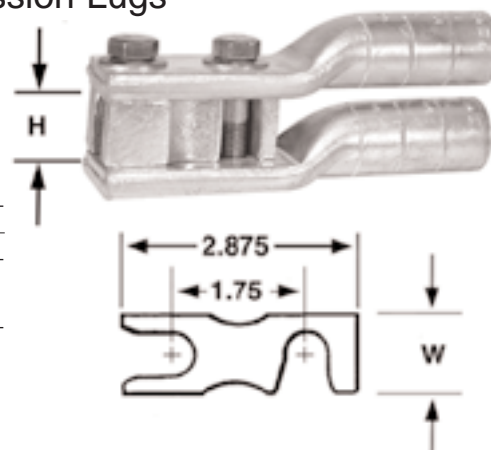

### TSA SERIES

NAED NUMBER	CATALOG NUMBER	BOLT SPACING	H	W	TERMINAL MAX - MIN	CTN QTY	EST. SHIPPING	
							WEIGHT (lbs)	UNIT
14090	<b>TSA-875</b>	1.75	.875	1.0	250 - 1/0	10	1.56	CTN
14091	<b>TSA-1125</b>		1.125	1.38	750 - 1/0	10	3.16	CTN

To stack 4 hole NEMA drilled terminals, use 2 adapters assembled in parallel.

### BELLEMORE™ BUSHINGS

#### Hole-Reducer Mounting Adapters


Material: Tin-plated high copper alloy

Reduces costly lug inventory by making existing inventory more versatile

Makes a secure trouble-free terminal mounting

Simple to use: just replace a flat washer with the appropriate bushing

Suitable for use with both copper and aluminum terminals

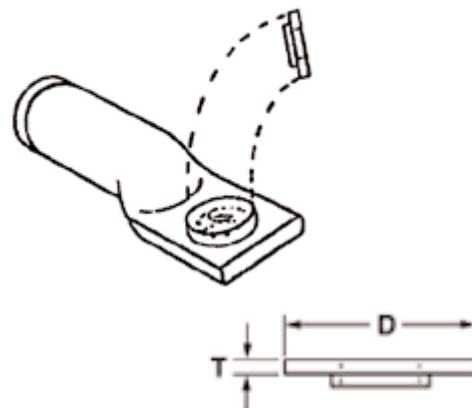

### LP-R SERIES

NAED NUMBER	CATALOG NUMBER	MOUNTING HOLE REDUCTION	DIMENSIONS		CTN QTY	EST. SHIPPING	
			D	T		WEIGHT (lbs)	UNIT
14013	<b>LP 1R3</b>	5/8 to 1/2	1	.080	10	0.19	CTN
14036	<b>LP 3R6</b>	1/2 to 3/8	7/8	.062	25	0.35	CTN
14030	<b>LP 3R0</b>	1/2 to 1/4	7/8	.062	25	0.28	CTN
14068	<b>LP 6R8</b>	3/8 to 5/16	3/4	.062	25	0.20	CTN
14060	<b>LP 6R0</b>	3/8 to 1/4	3/4	.062	25	0.23	CTN
14080	<b>LP 8R0</b>	5/16 to 1/4	11/16	.062	25	0.15	CTN

Specifically designed for use with Greaves compression connectors.

## WIRE STRIPPING TOOL

Especially convenient for use with Greaves USA, USAD, and PBS connectors

Replaces knives on the jobsite

Made in USA

For end-stripping 600V secondary cable

Convenient for stripping wire for Greaves USA, USAD, and PBS connectors

For cable jacket diameter range of 0.5 - 1.3 inch (12.7 - 33mm) OD,

THHN #1/0 - 750MCM cable

Preset blade positions 45, 60, 80, 95, and 110 mil insulation thickness

Quick release adjustment simplifies sizing on cable

Orange color for easy visibility



### WS SERIES

NAED NUMBER	CATALOG NUMBER	DESCRIPTION	WIRE RANGE	INSTALLED BLADE	DIMENSIONS	EST. SHIPPING WEIGHT (lbs)	UNIT
61300	<b>WS71</b>	Stripping Tool	#1/0-750MCM	CB7	5 x 4 x 2 1/2	0.6	EA
61310	<b>WSCB7</b>	Replacement Blade	—	—	—	—	EA



## ACCESSORIES

# BUG-LUG™

## OXIDE-INHIBITOR ELECTRICAL JOINT COMPOUND

Stable over wide temperature range  
Assures a high-conductivity joint, seals out air and moisture  
Seals out air and moisture from joint to prevent oxidation and corrosion  
Suitable for bolted connector applications and aluminum conduit threads  
Supple round polyethylene squeeze bottle for easy application, wide mouth for wire dipping  
Compact 12-bottle carton (9 inch wide x 6½ inch deep) fits on a small counter or shelf space

### BLZNG

#### Utility Grade

Universal non-petroleum based oxide-inhibitor compound  
Contains homogeneously suspended zinc particles  
Recommended for all AL/AL, AL/CU and CU/CU joints  
Recommended especially for AL/AL and AL/CU compression joints

Metal particles help to break through thin oxide film on aluminum surfaces  
Particles aid in gripping the connector and enhance electrical conductivity  
Compatible with rubber, polyethylene, and most other insulating materials  
Compatible with linesman rubber gloves  
Workable from -10°F to 300°F  
Service Temperature Range -40°F to 350°F  
Will not wash off from exposure to the elements  
Grey color

NAED NUMBER	CATALOG NO.	DESCRIPTION	CTN QTY	EST. SHIPPING	
				WEIGHT (lbs)	UNIT
13990	BLZNG-8	8 fl. oz. SQUEEZE BOTTLE	12	13	CTN



### BLOX

#### Commercial Grade

Petroleum based oxide-inhibitor compound  
Suitable for all AL/AL, AL/CU, and CU/CU joints  
Suitable for copper joints in direct burial  
Not recommended with rubber gloves or rubber insulating materials  
Compatible with polyethylene and most other insulating materials  
Workable from -20°F to 300°F  
Service Temperature Range -40°F to 300°F  
Amber color

NAED NUMBER	CATALOG NO.	DESCRIPTION	CTN QTY	EST. SHIPPING	
				WEIGHT (lbs)	UNIT
13980	BLOX-8	8 fl. oz. SQUEEZE BOTTLE	12	8	CTN
13982	BLOX-1G	1 Gallon CAN	1	9	EA





## COMPRESSION TOOLS

### 14.6 TON CORDLESS-ELECTRIC HYDRAULIC TOOL

Battery-powered hand-held tool for easy installation of compression connectors

Lightweight construction, balanced for one-hand operation

Quiet operation with very little vibration

C-shaped head with large 1.65 inch opening for easy insertion of barrels through 800MCM

Head can rotate 180 degrees for ease of positioning on work

Two-speed action with fast advance for rapid approach and slow power-speed for compression

Operating buttons mechanically interlocked to prevent accidental operation

Microprocessor cuts motor when cycle complete to save energy and extend battery life

Residual battery level displayed after every cycle

With full battery charge, performs 50 compression cycles on 500MCM size

Socket for cable to 12VDC power from vehicle – cable available separately

Accepts standard U-type dies - dies sold separately

Multiple power sources

- Ni-MH battery & spare – 14.4VDC, 3.0 Amp-hours
- External 12VDC vehicle supply via cable
- Battery charger – 120VAC

Includes tool, battery, shoulder strap, spare battery, 120VAC charger, and steel case w/ storage locations for 12 die-sets



*Outperforms  
other battery operated  
tools costing over \$6000*



Accepts Makita battery



12VDC Cable



Case

NAED NUMBER	CATALOG NUMBER		DIE RANGE AL-CU		DIMENSIONS INCHES	EST. SHIPPING	
			MAX	MIN		WEIGHT (lbs)	UNIT
61280	GRE-800	Tool	800MCM	8 STR	18 X 4 X 10	18	EA
61285	GRE-800C	12VDC Cable	–	–	–	–	EA

### 14.6 TON MANUAL HYDRAULIC TOOL

Manually operated hydraulic compression tool

Two-speed action with fast advance for rapid approach and slow power-speed for compression

C-shaped head with large 1.65 inch opening for easy insertion of barrels through 800MCM

Built-in safety valve by-passes hydraulic supply at max pressure, with easy release at any stage

Head can rotate 180 degrees for ease of positioning on work

Accepts standard U-type dies, sold separately

Includes heavy duty plastic case with storage locations for 20 die-sets



NAED NUMBER	CATALOG NUMBER	DIE RANGE AL-CU		DIMENSIONS INCHES	EST. SHIPPING	
		MAX	MIN		WEIGHT (lbs)	UNIT
61215	GRE-15	800MCM	8 STR	20.5 X 5.7	21	EA



## COMPRESSION TOOLS

### U-TYPE COMPRESSION DIES

Industry-standard U-type dies fit most 12-14 ton compression tools

NAED NUMBER	CATALOG NUMBER	U-TYPE DIE		COPPER LUGS & SPLICES	WIRE SIZE		PT SERIES ALUM PIN TERMINALS	EST. SHIPPING	
		COLOR	INDEX		ALUM. LUGS & SPLICES			WEIGHT (lbs)	UNIT
60804	<b>DIE 0</b>	RED	6	8	—	—	—	.50	EA
60805	<b>DIE-1</b>	BLUE	7/374	6	8	—	—		EA
60810	<b>DIE-2</b>	GRAY	8/346	4	6	—	—		EA
60811	<b>DIE 2A</b>	WHITE	9	3-2 SOL	—	—	—		EA
60815	<b>DIE-3</b>	BROWN	10	2	—	—	—		EA
60820	<b>DIE-4</b>	GREEN	11/375	1	4	—	—	.61	EA
60825	<b>DIE-5</b>	PINK	12/348	1/0	2, 1	—	—		EA
60830	<b>DIE-6</b>	BLACK	13	2/0	—	—	—		EA
60835	<b>DIE-7</b>	TAN	296	—	1/0	6, 4, 2, 1	—		EA
60840	<b>DIE-8</b>	ORANGE	14	3/0	—	—	—		EA
60845	<b>DIE-9</b>	OLIVE	297	—	2/0	—	—	.48	EA
60850	<b>DIE-10</b>	RUBY	467	—	3/0	—	—		EA
60855	<b>DIE-11</b>	PURPLE	15	4/0	—	—	—		EA
60860	<b>DIE-12</b>	YELLOW	16	250 MCM	—	—	—		EA
60865	<b>DIE-13</b>	WHITE	17/298	300 MCM	4/0	—	—		EA
60870	<b>DIE-14</b>	RED	18/324	350 MCM	250 MCM	1/0, 2/0, 3/0, 4/0	—	.44	EA
60875	<b>DIE-15</b>	BLUE	19/470	400 MCM	300 MCM	—	—	.42	EA
60880	<b>DIE-16</b>	BROWN	20/299	500 MCM	350 MCM	250, 300, 350 MCM	—	.40	EA
60885	<b>DIE-17</b>	GREEN	22/472	600 MCM	400 MCM	—	—	.27	EA
60890	<b>DIE-18</b>	PINK	300	—	500 MCM	400, 500 MCM	—	.36	EA
60891	<b>DIE-18A</b>	PURPLE	23	700 MCM	—	—	—	.35	EA
60895	<b>DIE-19</b>	BLACK	24/473	750 MCM	600 MCM	—	—	.34	EA
60899	<b>DIE-20</b>	YELLOW	936	—	750 MCM	600, 750 MCM	—	.33	EA
60898	<b>DIE-21</b>	RED	301	—	750 MCM	—	—	.33	EA



### DIELESS MANUALLY OPERATED

Single indent compressor

Adjustable for a wide range of copper or aluminum compression connectors

Extension handles on GRE500 provide additional leverage

NAED NUMBER	CATALOG NUMBER	WIRE RANGE				EST. SHIPPING	
		CU MAX.	CU MIN.	AL MAX.	AL MIN.	WEIGHT (lbs)	UNIT
61250	<b>GRE 250</b>	250 MCM	8 AWG	4/0 AWG	8 AWG	6.5	EA
61260	<b>GRE 500</b>	500 MCM	8 AWG	500 MCM	8 AWG	10.2	EA



GRE 250



GRE 500