

FULL-LINE CATALOG

Hallowell®

LOCKERS • CABINETS • SHELVING



Manufacturing & Distribution

In-Stock And Made-To-Order Products

www.Hallowell-List.com

TABLE OF CONTENTS

2	Company Spotlight
3	About Hallowell
4	Quick Ship Program & Distribution Center Locations
6	Premium Wardrobe KD Stock Lockers
8	Premium Box KD Stock Lockers
10	Maintenance-Free Quiet KD Lockers
12	DigiTech Electronic Day Use Lockers
14	Ready Built Ready-To-Use Lockers
16	Ready Built II Ready-To-Use Lockers
18	Galvanite Rust Resistant Lockers
20	MedSafe Healthcare Lockers
21	ValueMax Economy Lockers
22	Safety-View See-Thru Door Panels
23	Safety-View Plus-See Thru Doors
24	Heavy-Duty Ventilated (HDV) lockers
26	Locker Accessories
28	Uniform Garment Exchange lockers
30	Wood/Metal Hybrid Lockers
32	Country Club, Health SPAs, Fitness Centers Wood Lockers
34	Recruiter Wood Sport Lockers
36	DuraTech Solid Plastic Lockers
38	Food Industry lockers
39	SpaceCube-Plastic Modular Lockers
40	Maxview-Heavy Equipment Storage
41	All-Welded Single-Point Ventilated Lockers
42	TaskForceXP Emergency Response Lockers
43	Open Gear-Open-Front All-Welded Sport Lockers
44	TA50 Military Gear Storage Lockers
45	SecurityMax-All-Welded High Security Lockers
46	Bulk Storage Lockers
48	Portable Traffic Gates
49	800 Series-Heavy-Gauge KD Cabinets
50	DuraTough-Industrial Grade Steel Cabinets
52	Hi-Tech Industrial Grade Steel Shelving
62	Hi-Tech H-Post Industrial Grade Shelving
70	DuraTech Pass-Thru Industrial Grade Steel Shelving
74	Rivetwell Boltless Shelving Units
76	Rivetwell Unit Growth
77	Rivetwell Single Rivet Units
78	Rivetwell Double Rivet Units
79	Rivetwell Record Storage Units
80	Rivetwell Automotive Storage Racks and Units
81	Rivetwell Shelving Components
84	Rivetwell Particle Board & EZ-Deck Capacity Ratings
85	Rivetwell Loads & Capacities
86	Recruiter Custom Sport Lockers
87	School Cubbies
88	Open Front Gear Lockers
90	Ventilated All-Welded Lockers (Turn-handle & Gravity Latch)
91	All-Welded Lockers (Solid Gravity Latch & Ventilated Single-Point)
92	All-Welded Lockers (Solid Single-Point & Ventilated Box Lockers)
93	Equipment Storage & Premium KD Wardrobe Lockers
94	Premium KD Box lockers & Premium KD Specialty Lockers
95	Standard Quiet KD & Maintenance-Free Quiet KD (MFQ) Lockers
96	Heavy-Duty Corridor KD & Heavy-Duty Ventilated KD (HDV) Lockers
97	Benches, Pedestals and Locks
98	Locker Accessories
99	Color Selections for Metal Production Lockers and Cubbies



Since 1903, every Hallowell component has been designed and manufactured with the concept that the highest quality product is crucial for success.

OUR HISTORY

Hallowell was acquired by List Industries Inc. in 1992. List Industries was founded in 1936 with the idea that customer satisfaction and product quality would be the basis for success. This philosophy has been maintained for 74 years by the three presidents of List Industries Inc.: founder Max H. List, his son Herb List and his grandson and current president, Herb List, Jr. As an innovator and industry leader in product design and development, List Industries Inc. has and will continue to uphold Hallowell's tradition of quality and exceptional customer service.

MANUFACTURING

Hallowell Products are fabricated in three state-of-the-art manufacturing facilities located in Central and South Florida. Our Deerfield Beach corporate headquarters is a highly efficient manufacturing plant located in one of South Florida's premier office parks. Computer controlled fabrication and roll-forming equipment and the newest powder coating paint technology assure consistent quality workmanship. In addition to our primary manufacturing facility, we also have a second plant in a prestigious industrial park in Central Florida that more than doubles our manufacturing square footage. Our third Florida location, and newest addition, produces our new line of all-wood Recruiter sport lockers and wardrobe Club Lockers.

MADE-TO-ORDER PRODUCTS

In addition to Hallowell's industry leading variety of in-stock lockers, shelving and cabinets we also offer an extensive line of production items. Hallowell's complete line of production lockers (shown on pages 86 through 97) can be manufactured in short lead-times and painted in one of our 24 standard designer powder coat colors (see page 99). If a high-rise shelving system is what you require, our team of design engineers and sales professionals is eager to assist you.



WHAT MAKES HALLOWELL THE BEST CHOICE FOR LOCKERS, SHELVING AND CABINETS?

Hallowell®

www.Hallowell-List.com

WE INVEST IN YOU OUR CUSTOMER



THE INDUSTRY'S LARGEST INVENTORY

- Five fully-stocked national distribution centers.
- Over 2,500 different skews to choose from in stock.
- The largest stock product variety.



SEAMLESS RECESSED LOCKER HANDLES

- All lifter latch and single-point recessed locker handles are a one-piece drawn design.
- Made with 304 stainless steel which is tougher than any other stainless steel handle available today.



FULL-HEIGHT CONTINUOUS PIANO HINGES

- All KD and welded lockers include 16 gauge full-height continuous piano type hinge.
- Creates a more secure connection between the door and frame ensuring that Hallowell lockers out perform the competition.



ALL KD LOCKERS AND CABINETS ARE AVAILABLE FACTORY FULLY-ASSEMBLED

- Lockers and cabinets are assembled by trained and highly skilled trade professionals.
- Lockers and cabinets arrive ready to setup and anchor, saving you time and money.



POWDER COAT FINISH

- All Hallowell products are finished with a durable powder coat finish
- Most environmentally friendly method of paint finishing.



INDUSTRY-LEADING CUSTOMER SERVICE

- A dedicated team of in-house trained professionals is ready to respond to inquiries related to product features, availability, specifications, order status and shipping information.
- All personnel are trained in every aspect of our Quick Ship program.

VISIT OUR WEBSITE: WWW.HALLOWELL-LIST.COM FOR MORE INFORMATION

STOCK  PROGRAM

THE FASTEST SHIPPING IN THE INDUSTRY...

**INDUSTRY'S LARGEST
QUICK-SHIP PROGRAM****All In-Stock
Products**Ship in **5** Business Days!**ADVANTAGES OF FIVE
DISTRIBUTION CENTERS**

- ✓ ***Reduces freight cost***
- ✓ ***Reduces transit time***
- ✓ ***Minimizes carrier handling***

**QUICK-SHIP BENEFITS**

- ✓ ***No setup charges***
- ✓ ***No minimum order quantity***
- ✓ ***Industry's best discount***

HALLOWELL PROTECTS YOUR PURCHASE IN TRANSIT!

Hallowell®

www.Hallowell-List.com

INDUSTRY'S BEST PACKAGING

The fastest shipping with the most secure packaging.

In an industry where damage in transit can be difficult to prevent, Hallowell goes the extra mile to ensure your purchase is protected by providing the industry's best packaging and packaging techniques.


KNOCK-DOWN SHIPMENTS

- All components are packaged in custom designed strapped corrugated cartons.
- Pallets are sized so that no material overhangs the pallet.
- All cartons are strapped to **NEW** pallets.



FULLY-ASSEMBLED SHIPMENTS

- Locker tops and bottoms are protected by specially designed capping cartons.
- Outside corners are protected with heavy-duty carton material.
- Outside faces (locker backs) are protected with full height corrugated cardboard.
- Locker fronts always face the middle of a pallet.
- When two units share a pallet, the inward facing locker fronts are separated by full-height corrugated cardboard.
- Units are wrapped with heavy-gauge clear poly wrap.
- Units are double strapped in two directions to ensure stability on **NEW** pallets.
- Pallets are sized so that no part of a unit overhangs the pallet.

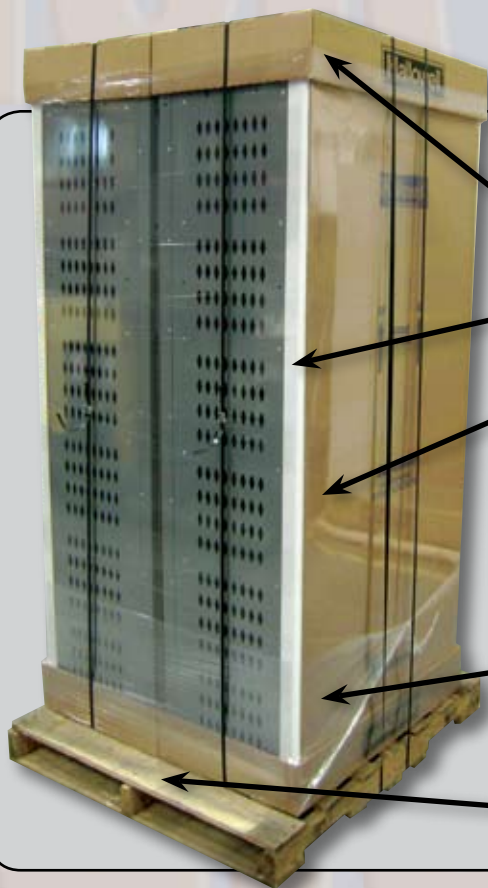

CALL **866-566-0500** FOR MORE INFORMATION ON OUR QUICK-SHIP PROGRAM

STOCK → PROGRAM

THE FASTEST SHIPPING IN THE INDUSTRY...



PREMIUM WARDROBE KD STOCK LOCKERS

Premium all-purpose wardrobe lockers are traditional louvered door lockers designed for storage of all personal belongings

FEATURES:

BODY CONSTRUCTION: Knock-down, 24 gauge

BODY STYLES: Single, double and triple tier

DOOR: 16 gauge louvered for added ventilation

HINGES: Continuous piano type

HANDLE: Stainless steel recessed handle with multi-point gravity lift-type latching for a modern look and added safety. Recessed handle protects finish from being marred by padlock.

HOOKS: One double prong ceiling hook and two single hooks per single and double tier opening. One double prong ceiling hook for triple tier.

COAT RODS: Available for single tier at a nominal cost

SHELVES: Hat shelf is included in single tier lockers.

LEGS: 6" high legs are standard. Lockers without legs are available for a nominal charge.

APPEARANCE: Parchment, Hallowell Gray and Marine Blue lockers include matching body colors. Maroon and Green Mist lockers include Parchment body and sides. Order Finished End Panels for exposed row ends if desired. Finished End Panels install over top of universal side panels adding strength and rigidity at exposed row ends and can be ordered to match locker door/frame color.

GENERAL FEATURES:

- Lockers can be ordered fully-assembled or knock-down for assembly at destination.
- Order 3-wide units for best value. Order 1-wide units to complete quantity needed for each continuous row.
- Lockers can be ordered in combination with Premium box lockers shown on pages 8 and 9.
- All items shown are available for shipment within 5 business days of receipt of order.
- Aluminum number plates (#1-up) with mounting hardware are included. Number plate face is black with silver etched numerals. If a special numbering sequence is required, please specify when ordering. Number sequence must be consecutive numbers equal to the number of openings (doors) ordered.
- Locks are not included.

**With Piano
Hinge**



Single Tier,
1 wide,
1 opening



Double Tier,
1 wide,
2 openings



Triple Tier,
1 wide,
3 openings



Single Tier,
3 wide,
3 openings



Double Tier,
3 wide,
6 openings



Deep drawn stainless steel recessed handle with gravity lift-type latching for doors 20" high and higher

PREMIUM WARDROBE KD STOCK LOCKERS

Hallowell

www.Hallowell-List.com

PREMIUM KD STOCK WARDROBE LOCKERS

Width	Depth	Opening Height	Frame Height	Tier	Grouping	Openings Per Group	Knock-Down Cat No.	Fully-Assembled Cat No.	Color Selection
SINGLE TIER									
12	12	60	66	1	1-wide	1	U1226-1	U1226-1A	PT, HG
12	12	60	66	1	3-wide	3	U3226-1	U3226-1A	PT, HG
12	15	60	66	1	1-wide	1	U1256-1	U1256-1A	PT, HG
12	15	60	66	1	3-wide	3	U3256-1	U3256-1A	PT, HG
12	18	60	66	1	1-wide	1	U1286-1	U1286-1A	PT, HG
12	18	60	66	1	3-wide	3	U3286-1	U3286-1A	PT, HG
12	12	72	78	1	1-wide	1	U1228-1	U1228-1A	PT, HG, MB, GM, MN
12	12	72	78	1	3-wide	3	U3228-1	U3228-1A	PT, HG, MB, GM, MN
12	15	72	78	1	1-wide	1	U1258-1	U1258-1A	PT, HG, MB, GM, MN
12	15	72	78	1	3-wide	3	U3258-1	U3258-1A	PT, HG, MB, GM, MN
12	18	72	78	1	1-wide	1	U1288-1	U1288-1A	PT, HG, MB, GM, MN
12	18	72	78	1	3-wide	3	U3288-1	U3288-1A	PT, HG, MB, GM, MN
15	15	72	78	1	1-wide	1	U1558-1	U1558-1A	PT, HG
15	15	72	78	1	3-wide	3	U3558-1	U3558-1A	PT, HG
15	18	72	78	1	1-wide	1	U1588-1	U1588-1A	PT, HG
15	18	72	78	1	3-wide	3	U3588-1	U3588-1A	PT, HG
15	21	72	78	1	1-wide	1	U1518-1	U1518-1A	PT
15	21	72	78	1	3-wide	3	U3518-1	U3518-1A	PT
15	24	72	78	1	1-wide	1	U1548-1	U1548-1A	PT
15	24	72	78	1	3-wide	3	U3548-1	U3548-1A	PT
18	18	72	78	1	1-wide	1	U1888-1	U1888-1A	PT, HG
18	18	72	78	1	3-wide	3	U3888-1	U3888-1A	PT, HG
18	21	72	78	1	1-wide	1	U1818-1	U1818-1A	PT, HG
18	21	72	78	1	3-wide	3	U3818-1	U3818-1A	PT, HG
18	24	72	78	1	1-wide	1	U1848-1	U1848-1A	PT
18	24	72	78	1	3-wide	3	U3848-1	U3848-1A	PT
DOUBLE TIER									
12	12	30	66	2	1-wide	2	U1226-2	U1226-2A	PT, HG
12	12	30	66	2	3-wide	6	U3226-2	U3226-2A	PT, HG
12	15	30	66	2	1-wide	2	U1256-2	U1256-2A	PT, HG
12	15	30	66	2	3-wide	6	U3256-2	U3256-2A	PT, HG
12	18	30	66	2	1-wide	2	U1286-2	U1286-2A	PT, HG
12	18	30	66	2	3-wide	6	U3286-2	U3286-2A	PT, HG
12	12	36	78	2	1-wide	2	U1228-2	U1228-2A	PT, HG, MB, GM, MN
12	12	36	78	2	3-wide	6	U3228-2	U3228-2A	PT, HG, MB, GM, MN
12	15	36	78	2	1-wide	2	U1258-2	U1258-2A	PT, HG, MB, GM, MN
12	15	36	78	2	3-wide	6	U3258-2	U3258-2A	PT, HG, MB, GM, MN
12	18	36	78	2	1-wide	2	U1288-2	U1288-2A	PT, HG, MB, GM, MN
12	18	36	78	2	3-wide	6	U3288-2	U3288-2A	PT, HG, MB, GM, MN
15	15	36	78	2	1-wide	2	U1558-2	U1558-2A	PT, HG
15	15	36	78	2	3-wide	6	U3558-2	U3558-2A	PT, HG
15	18	36	78	2	1-wide	2	U1588-2	U1588-2A	PT, HG
15	18	36	78	2	3-wide	6	U3588-2	U3588-2A	PT, HG
15	21	36	78	2	1-wide	2	U1518-2	U1518-2A	PT
15	21	36	78	2	3-wide	6	U3518-2	U3518-2A	PT
15	24	36	78	2	1-wide	2	U1548-2	U1548-2A	PT
15	24	36	78	2	3-wide	6	U3548-2	U3548-2A	PT
TRIPLE TIER									
12	12	24	78	3	1-wide	3	U1228-3	U1228-3A	PT, HG, MB, GM, MN
12	12	24	78	3	3-wide	9	U3228-3	U3228-3A	PT, HG, MB, GM, MN
12	15	24	78	3	1-wide	3	U1258-3	U1258-3A	PT, HG, MB, GM, MN
12	15	24	78	3	3-wide	9	U3258-3	U3258-3A	PT, HG, MB, GM, MN
12	18	24	78	3	1-wide	3	U1288-3	U1288-3A	PT, HG, MB, GM, MN
12	18	24	78	3	3-wide	9	U3288-3	U3288-3A	PT, HG, MB, GM, MN



Triple Tier,
3 wide,
9 openings



Triple Tier,
3 wide,
9 openings



Double Tier,
3 wide,
6 openings



Triple Tier,
3 wide,
9 openings

COLOR SELECTION

729
PARCHMENT (PT)

725
HALLOWELL GRAY (HG)

707
MARINE BLUE (MB)

705
GREEN MIST (GM)
PARCHMENT BODY

727
MAROON (MN)
PARCHMENT BODY

Note: Parchment, Hallowell Gray and Marine Blue lockers include matching body colors. Maroon and Green Mist lockers include Parchment body and sides. Some sizes and models are available in limited colors. For current color availability visit: www.Hallowell-List.com.

5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

STOCK → **PROGRAM**

THE FASTEST SHIPPING IN THE INDUSTRY...



PREMIUM BOX KD STOCK LOCKERS



Five Tier,
1 wide,
5 openings



Five Tier,
1 wide,
5 openings



Six Tier,
1 wide,
6 openings



Six Tier,
1 wide,
6 openings



Six Tier,
1 wide,
6 openings



Six Tier,
1 wide,
6 openings



Six Tier,
1 wide,
6 openings



Six Tier,
3 wide,
18 openings



Single-point thru-the-door friction catch door pull designed for use with a padlock or built-in lock. Shown with optional strike plate which protects door from being marred by padlock and standard piano hinge.

With Piano Hinge



4-Wide Wall Mount Lockers



Sixteen-Person Lockers



PREMIUM BOX KD STOCK LOCKERS

Hallowell

www.Hallowell-List.com

PREMIUM KD STOCK BOX LOCKERS

Hallowell Premium box lockers include louvered doors and are perfect for storing personal items.

FEATURES:

BODY CONSTRUCTION: Knock-down, 24 gauge

BODY STYLES: Four, five, six tier, 16 Person and wall mount

DOOR: 18 gauge, Louvered for added ventilation

HINGES: Continuous piano type

HANDLE: Single-point projecting friction catch door pull prepared for both padlock or built-in lock. No moving parts insures quiet maintenance-free operation.

HOOKS: None

COAT RODS: None, standard on the 16 person

SHELVES: None

LEGS: 6" high legs are standard. Lockers without legs are available for a nominal charge.

APPEARANCE: Parchment, Hallowell Gray and Marine Blue lockers include matching body colors. Maroon and Green Mist lockers include Parchment body and sides. Order Finished End Panels for exposed row ends if desired. Finished End Panels install over top of universal side panels adding strength and rigidity at exposed row ends and can be ordered to match locker door/frame color.

GENERAL FEATURES:

- Lockers can be ordered fully-assembled or knock-down for assembly at destination.
- Order 3-wide units for best value. Order 1-wide units to complete quantity needed for each continuous row.
- Lockers can be ordered in combination with Premium wardrobe lockers shown on pages 6 and 7.
- All items shown are available for shipment within 5 business days of receipt of order.
- Aluminum number plates (#1-up) with mounting hardware are included. Number plate face is black with silver etched numerals. If a special numbering sequence is required, please specify when ordering. Number sequence must be consecutive numbers equal to the number of openings (doors) ordered.
- Locks are not included.
- See page 6 for available accessories.



Width	Depth	Opening Height	Frame Height	Tier	Grouping	Openings Per Group	Knock-Down Cat No.	Fully-Assembled Cat No.	Color Selection
FIVE TIER									
12	12	12	66	5	1-wide	5	U1226-5	U1226-5A	PT, HG
12	12	12	66	5	3-wide	15	U3226-5	U3226-5A	PT, HG
12	15	12	66	5	1-wide	5	U1256-5	U1256-5A	PT, HG
12	15	12	66	5	3-wide	15	U3256-5	U3256-5A	PT, HG
12	18	12	66	5	1-wide	5	U1286-5	U1286-5A	PT, HG
12	18	12	66	5	3-wide	15	U3286-5	U3286-5A	PT, HG
SIX TIER									
12	12	12	78	6	1-wide	6	U1228-6	U1228-6A	PT, HG, MB, GM, MN
12	12	12	78	6	3-wide	18	U3228-6	U3228-6A	PT, HG, MB, GM, MN
12	15	12	78	6	1-wide	6	U1258-6	U1258-6A	PT, HG, MB, GM, MN
12	15	12	78	6	3-wide	18	U3258-6	U3258-6A	PT, HG, MB, GM, MN
12	18	12	78	6	1-wide	6	U1288-6	U1288-6A	PT, HG, MB, GM, MN
12	18	12	78	6	3-wide	18	U3288-6	U3288-6A	PT, HG, MB, GM, MN
4-WIDE WALL MOUNT									
48	18	12	14-3/4	4-Wide Wall Mount		4	U1482-4WM	U1482-4WM-A	PT, HG
72	18	12	78	16-Person Unit		16	U1788-16	U1788-16A	PT, HG

COLOR SELECTION

729
PARCHMENT (PT)

725
HALLOWELL GRAY (HG)

707
MARINE BLUE (MB)

705
GREEN MIST (GM)
PARCHMENT BODY

727
MAROON (MN)
PARCHMENT BODY

Note: Parchment, Hallowell Gray and Marine Blue lockers include matching body colors. Maroon and Green Mist lockers include Parchment body and sides. Some sizes and models are available in limited colors. For current color availability visit: www.Hallowell-List.com.

5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

STOCK → PROGRAM

THE FASTEST SHIPPING IN THE INDUSTRY...


QUIET KD LOCKERS


Single Tier,
1 wide,
1 opening

Double Tier,
1 wide,
2 openings

Triple Tier,
1 wide,
3 openings


**COLOR
SELECTION**

729
PARCHEMENT (PT)

725
HALLOWELL GRAY (HG)


Modern flush door design with safety-minded recessed handle and reinforced door make our Maintenance-Free™ Quiet KD stock lockers the smart choice.

FEATURES:

BODY CONSTRUCTION: Knock-down, 24 gauge

BODY STYLES: Single, double and triple tier

DOOR: 16 gauge, solid with welded in door stiffener

HINGES: Continuous piano type

HANDLE: Deep drawn stainless steel recessed handle with single-point latching. Recessed handle protects finish from being marred by padlock.

HOOKS: One double prong ceiling hook and two single hooks per single and double tier opening. One double ceiling hook for triple tier.

COAT RODS: Available for single tier at a nominal cost

SHELVES: Hat shelf is included in single tier lockers.

LEGS: 6" high legs are standard. Lockers without legs are available for a nominal charge



Single Tier,
3 wide,
3 openings

Triple Tier,
3 wide,
9 openings

OUR SILENT APPROACH TO LOCKERS

Hallowell

www.Hallowell-List.com

MAINTENANCE-FREE™ QUIET KD LOCKERS

Width	Depth	Opening Height	Frame Height	Tier	Grouping	Openings Per Group	Knock-Down Cat No.	Fully-Assembled Cat No.	Color Selection
SINGLE TIER									
12	12	72	78	1	1-wide	1	UY1228-1	UY1228-1A	PT, HG
12	12	72	78	1	3-wide	3	UY3228-1	UY3228-1A	PT, HG
12	15	72	78	1	1-wide	1	UY1258-1	UY1258-1A	PT, HG
12	15	72	78	1	3-wide	3	UY3258-1	UY3258-1A	PT, HG
12	18	72	78	1	1-wide	1	UY1288-1	UY1288-1A	PT, HG
12	18	72	78	1	3-wide	3	UY3288-1	UY3288-1A	PT, HG
15	15	72	78	1	1-wide	1	UY1558-1	UY1558-1A	PT, HG
15	15	72	78	1	3-wide	3	UY3558-1	UY3558-1A	PT, HG
15	18	72	78	1	1-wide	1	UY1588-1	UY1588-1A	PT, HG
15	18	72	78	1	3-wide	3	UY3588-1	UY3588-1A	PT, HG
15	21	72	78	1	1-wide	1	UY1518-1	UY1518-1A	PT
15	21	72	78	1	3-wide	3	UY3518-1	UY3518-1A	PT
15	24	72	78	1	1-wide	1	UY1548-1	UY1548-1A	PT
15	24	72	78	1	3-wide	3	UY3548-1	UY3548-1A	PT
18	18	72	78	1	1-wide	1	UY1888-1	UY1888-1A	PT, HG
18	18	72	78	1	3-wide	3	UY3888-1	UY3888-1A	PT, HG
18	21	72	78	1	1-wide	1	UY1818-1	UY1818-1A	PT, HG
18	21	72	78	1	3-wide	3	UY3818-1	UY3818-1A	PT, HG
18	24	72	78	1	1-wide	1	UY1848-1	UY1848-1A	PT
18	24	72	78	1	3-wide	3	UY3848-1	UY3848-1A	PT
DOUBLE TIER									
12	12	36	78	2	1-wide	2	UY1228-2	UY1228-2A	PT, HG
12	12	36	78	2	3-wide	6	UY3228-2	UY3228-2A	PT, HG
12	15	36	78	2	1-wide	2	UY1258-2	UY1258-2A	PT, HG
12	15	36	78	2	3-wide	6	UY3258-2	UY3258-2A	PT, HG
12	18	36	78	2	1-wide	2	UY1288-2	UY1288-2A	PT, HG
12	18	36	78	2	3-wide	6	UY3288-2	UY3288-2A	PT, HG
15	15	36	78	2	1-wide	2	UY1558-2	UY1558-2A	PT, HG
15	15	36	78	2	3-wide	6	UY3558-2	UY3558-2A	PT, HG
15	18	36	78	2	1-wide	2	UY1588-2	UY1588-2A	PT, HG
15	18	36	78	2	3-wide	6	UY3588-2	UY3588-2A	PT, HG
15	21	36	78	2	1-wide	2	UY1518-2	UY1518-2A	PT
15	21	36	78	2	3-wide	6	UY3518-2	UY3518-2A	PT
15	24	36	78	2	1-wide	2	UY1548-2	UY1548-2A	PT
15	24	36	78	2	3-wide	6	UY3548-2	UY3548-2A	PT
18	18	36	78	2	1-wide	2	UY1888-2	UY1888-2A	PT, HG
18	18	36	78	2	3-wide	6	UY3888-2	UY3888-2A	PT, HG
18	21	36	78	2	1-wide	2	UY1818-2	UY1818-2A	PT, HG
18	21	36	78	2	3-wide	6	UY3818-2	UY3818-2A	PT, HG
18	24	36	78	2	1-wide	2	UY1848-2	UY1848-2A	PT
18	24	36	78	2	3-wide	6	UY3848-2	UY3848-2A	PT
TRIPLE TIER									
12	12	24	78	3	1-wide	3	UY1228-3	UY1228-3A	PT, HG
12	12	24	78	3	3-wide	9	UY3228-3	UY3228-3A	PT, HG
12	15	24	78	3	1-wide	3	UY1258-3	UY1258-3A	PT, HG
12	15	24	78	3	3-wide	9	UY3258-3	UY3258-3A	PT, HG
12	18	24	78	3	1-wide	3	UY1288-3	UY1288-3A	PT, HG
12	18	24	78	3	3-wide	9	UY3288-3	UY3288-3A	PT, HG



Deep-drawn stainless steel recessed handle with single-point latching



Maintenance-Free Quiet Lockers include a 3" wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torque-free door.

COLOR SELECTION

729
PARCHMENT (PT)

725
HALLOWELL GRAY (HG)

5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

11

STOCK → PROGRAM

THE FASTEST SHIPPING IN THE INDUSTRY...



DAY USE PROGRAMMABLE DIGITAL LOCKERS



Locks arrive in Day-Use mode for shared use and can be programmed for permanent use by management.

FEATURES:

BODY CONSTRUCTION: Knock-down, 24 gauge

BODY STYLES: Single, double, triple and six tier

DOOR: 16 gauge, louvered type, 18 gauge for box doors

LATCHING: Single-point

HINGES: Continuous piano type

HANDLE: User programmable electronic lock/handle, single-point latching

HOOKS: One double prong ceiling hook and two single hooks per single and double tier opening. One double ceiling hook for triple tier. No hooks for 6 tier

COAT RODS: Available for single tier at a nominal cost

SHELVES: Hat shelf is included in single tier lockers.

LEGS: 6" high legs are standard. Lockers without legs are available for a nominal charge.




Single Tier,
1 wide,
1 opening

Double Tier,
1 wide,
2 openings

Triple Tier,
3 wide,
9 openings

Six Tier,
1 wide,
6 openings



PERFECT FOR BOTH SHARED AND PERMANENT USE

Hallowell

www.Hallowell-List.com

DIGITECH™ ELECTRONIC DAY USE LOCKERS

LOCK FEATURES


- ✓ Powered by 2 AAA batteries which provide in excess of **10,000** uses.



2 AAA batteries are included.



- ✓ LED's flash to indicate low battery level.
- ✓ Locker can be opened when batteries are low or dead by placing a standard 9-volt battery against the **RED** and **BLUE** LED's
- ✓ 8-digit master and sub-master codes for two levels of management security

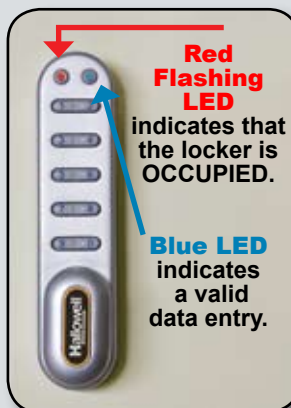

DAY-USE MODE

User can lock and unlock any available locker door with a user selected 4-digit code. Upon returning, user enters the 4-digit code to unlock the door. Code is erased and the locker is available for the next user.

PERMANENT MODE

User enters a pre-programmed 4-digit code to unlock and use locker repeatedly. Lock does not require a code to relock door.



Width	Depth	Opening Height	Frame Height	Tier	Grouping	Opening Per Group	Knock-down Cat No.	Fully-Assembled Cat No.	Color Selection
SINGLE TIER									
12	12	72	78	1	1-wide	1	UEL1228-1	UEL1228-1A	PT
12	12	72	78	1	3-wide	3	UEL3228-1	UEL3228-1A	PT
12	15	72	78	1	1-wide	1	UEL1258-1	UEL1258-1A	PT
12	15	72	78	1	3-wide	3	UEL3258-1	UEL3258-1A	PT
12	18	72	78	1	1-wide	1	UEL1288-1	UEL1288-1A	PT
12	18	72	78	1	3-wide	3	UEL3288-1	UEL3288-1A	PT
DOUBLE TIER									
12	12	36	78	2	1-wide	2	UEL1228-2	UEL1228-2A	PT
12	12	36	78	2	3-wide	6	UEL3228-2	UEL3228-2A	PT
12	15	36	78	2	1-wide	2	UEL1258-2	UEL1258-2A	PT
12	15	36	78	2	3-wide	6	UEL3258-2	UEL3258-2A	PT
12	18	36	78	2	1-wide	2	UEL1288-2	UEL1288-2A	PT
12	18	36	78	2	3-wide	6	UEL3288-2	UEL3288-2A	PT
TRIPLE TIER									
12	12	24	78	3	1-wide	3	UEL1228-3	UEL1228-3A	PT
12	12	24	78	3	3-wide	9	UEL3228-3	UEL3228-3A	PT
12	15	24	78	3	1-wide	3	UEL1258-3	UEL1258-3A	PT
12	15	24	78	3	3-wide	9	UEL3258-3	UEL3258-3A	PT
12	18	24	78	3	1-wide	3	UEL1288-3	UEL1288-3A	PT
12	18	24	78	3	3-wide	9	UEL3288-3	UEL3288-3A	PT
SIX TIER									
12	12	12	78	6	1-wide	6	UEL1228-6	UEL1228-6A	PT
12	12	12	78	6	3-wide	18	UEL3228-6	UEL3228-6A	PT
12	15	12	78	6	1-wide	6	UEL1258-6	UEL1258-6A	PT
12	15	12	78	6	3-wide	18	UEL3258-6	UEL3258-6A	PT
12	18	12	78	6	1-wide	6	UEL1288-6	UEL1288-6A	PT
12	18	12	78	6	3-wide	18	UEL3288-6	UEL3288-6A	PT

5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

STOCK → PROGRAM

THE FASTEST SHIPPING IN THE INDUSTRY...



**FULLY-ASSEMBLED
READY-TO-USE**

ReadyBuilt™

READY-TO-USE!

**Ready-Built
Lockers Include:**

- ✓ **Assembly**
- ✓ **Padlocks**
- ✓ **Padlock Strike Plates**



Locks Included
in Stainless
Steel Recessed
Handles for
Wardrobe
Lockers



**COLOR
SELECTION**

**729
PARCHMENT (PT)**

**725
HALLOWELL GRAY
(HG)**

**707
MARINE BLUE (MB)**



Single Tier,
1 wide,
1 openings



Double Tier,
1 wide,
2 openings



Triple Tier,
1 wide,
3 openings



Six Tier,
1 wide,
6 openings



Locks and
Padlock Strike
Plates Included
for Box Lockers

**With Piano
Hinge**

FULLY-ASSEMBLED READY-TO-USE

Hallowell®

www.Hallowell-List.com

READY-BUILT™ WARDROBE AND BOX LOCKERS

General Features

- Available in single, double, triple and six tier models
- All lockers arrive ready-to-use. Lockers ship fully-assembled and include one combination padlock per door for true out-of-the box use.
- Padlock Strike Plates are included for six tier doors.
- Order 3-wide units for best value. Order 1-wide units to complete quantity needed for each continuous row.

FEATURES:

BODY CONSTRUCTION: Knock-down, 24 gauge,

BODY STYLES: Single, double, triple and six tier

DOOR: 16 gauge, 18 gauge for box doors

HINGES: Continuous piano type

HANDLE (wardrobe): Stainless steel recessed handle with multi-point gravity lift-type latching. Recessed handle protects finish from being marred by padlock.

HANDLE (box): Box lockers include a projecting single-point friction catch door pull. No moving parts insures quiet maintenance-free operation.

HOOKS: One double prong ceiling hook and two single hooks per single and double tier opening. One double ceiling hook for triple tier. No hooks for box lockers.

COAT RODS: Available for single tier at a nominal cost

SHELVES: Hat shelf is included in single tier lockers.

LEGS: 6" high legs are standard. Lockers without legs are available for a nominal charge.



Width	Depth	Opening Height	Frame Height	Tier	Grouping	Openings Per Group	Fully-Assembled Cat No.	Color Selection
SINGLE TIER								
12	12	72	78	1	1-wide	1	URB1228-1A	PT, HG, MB
12	12	72	78	1	3-wide	3	URB3228-1A	PT, HG, MB
12	15	72	78	1	1-wide	1	URB1258-1A	PT, HG, MB
12	15	72	78	1	3-wide	3	URB3258-1A	PT, HG, MB
12	18	72	78	1	1-wide	1	URB1288-1A	PT, HG, MB
12	18	72	78	1	3-wide	3	URB3288-1A	PT, HG, MB
DOUBLE TIER								
12	12	36	78	2	1-wide	2	URB1228-2A	PT, HG, MB
12	12	36	78	2	3-wide	6	URB3228-2A	PT, HG, MB
12	15	36	78	2	1-wide	2	URB1258-2A	PT, HG, MB
12	15	36	78	2	3-wide	6	URB3258-2A	PT, HG, MB
12	18	36	78	2	1-wide	2	URB1288-2A	PT, HG, MB
12	18	36	78	2	3-wide	6	URB3288-2A	PT, HG, MB
TRIPLE TIER								
12	12	24	78	3	1-wide	3	URB1228-3A	PT, HG, MB
12	12	24	78	3	3-wide	9	URB3228-3A	PT, HG, MB
12	15	24	78	3	1-wide	3	URB1258-3A	PT, HG, MB
12	15	24	78	3	3-wide	9	URB3258-3A	PT, HG, MB
12	18	24	78	3	1-wide	3	URB1288-3A	PT, HG, MB
12	18	24	78	3	3-wide	9	URB3288-3A	PT, HG, MB
SIX TIERS								
12	12	12	78	6	1-wide	6	URB1228-6A	PT, HG, MB
12	12	12	78	6	3-wide	18	URB3228-6A	PT, HG, MB
12	15	12	78	6	1-wide	6	URB1258-6A	PT, HG, MB
12	15	12	78	6	3-wide	18	URB3258-6A	PT, HG, MB
12	18	12	78	6	1-wide	6	URB1288-6A	PT, HG, MB
12	18	12	78	6	3-wide	18	URB3288-6A	PT, HG, MB



5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

15

STOCK → PROGRAM

THE FASTEST SHIPPING IN THE INDUSTRY...



**FULLY-ASSEMBLED
READY-TO-USE**

Ready Built 2™

READY-TO-USE!

**Ready-Built II
Lockers Include:**

- ✓ **Assembly**
- ✓ **Padlocks**
- ✓ **Padlock Strike Plates**
- ✓ **Slope Tops**
- ✓ **6" High Metal Bases**

**With Piano
Hinge**



**COLOR
SELECTION**

**729
PARCHMENT (PT)**

**725
HALLOWELL GRAY
(HG)**

**707
MARINE BLUE (MB)**



Single Tier,
1 wide,
1 opening



Double Tier,
1 wide,
2 openings



Triple Tier,
1 wide,
3 openings



Six Tier,
1 wide,
6 openings

Slope Tops

Provide a more finished appearance and prevent items from being placed or stored on locker tops.

Padlocks

Are included for each door. 3-number combinations provide for maximum security. No need to go out and buy locks allowing immediate use of lockers upon arrival. Locks are master keyed.

Strike Plates

Aluminum plates are riveted to door to prevent padlocks from marring painted door finish on six tier lockers.

Closed Metal Base

Front and side bases close off area below lockers at 6" legs to prevent collection of debris.

FULLY-ASSEMBLED READY-TO-USE

Hallowell

www.Hallowell-List.com

READY-BUILT™ II WARDROBE AND BOX LOCKERS

General Features

- All lockers arrive ready-to-use. Lockers ship fully-assembled and include one combination padlock per door for true out-of-the box use.
- Sloping top reduces dust accumulation and prevents item storage on locker tops.
- Closed metal bases provide a more finished appearance and eliminates the need to clean beneath lockers.
- Padlock Strike Plates are included for six tier doors.
- Order 3-wide units for best value. Order 1-wide units to complete quantity needed for each continuous row.

FEATURES:

BODY CONSTRUCTION: Knock-down, 24 gauge

BODY STYLES: Single, double, triple and six tier

DOOR: 16 gauge, 18 gauge for box doors, louvered for added ventilation

HINGES: Continuous piano type

HANDLE (wardrobe): Stainless steel recessed handle with multi-point gravity lift-type latching. Recessed handle protects finish from being marred by padlock.

HANDLE (box): Box lockers include a projecting single-point friction catch door pull. No moving parts insures quiet maintenance-free operation.

HOOKS: One double prong ceiling hook and two single hooks per single and double tier opening. One double ceiling hook for triple tier. No hooks for six tier lockers

COAT RODS: Available for single tier at a nominal cost

SHELVES: Hat shelf is included in single tier lockers.

LEGS: 6" high legs are standard. Lockers without legs are available for a nominal charge



Width	Depth	Opening Height	Frame Height	Tier	Grouping	Openings Per Group	Fully-Assembled Cat No.	Color Selection
SINGLE TIER								
12	12	72	78	1	1-wide	1	URB1228-1ASB	PT, HG, MB
12	12	72	78	1	3-wide	3	URB3228-1ASB	PT, HG, MB
12	15	72	78	1	1-wide	1	URB1258-1ASB	PT, HG, MB
12	15	72	78	1	3-wide	3	URB3258-1ASB	PT, HG, MB
12	18	72	78	1	1-wide	1	URB1288-1ASB	PT, HG, MB
12	18	72	78	1	3-wide	3	URB3288-1ASB	PT, HG, MB
DOUBLE TIER								
12	12	36	78	2	1-wide	2	URB1228-2ASB	PT, HG, MB
12	12	36	78	2	3-wide	6	URB3228-2ASB	PT, HG, MB
12	15	36	78	2	1-wide	2	URB1258-2ASB	PT, HG, MB
12	15	36	78	2	3-wide	6	URB3258-2ASB	PT, HG, MB
12	18	36	78	2	1-wide	2	URB1288-2ASB	PT, HG, MB
12	18	36	78	2	3-wide	6	URB3288-2ASB	PT, HG, MB
TRIPLE TIER								
12	12	24	78	3	1-wide	3	URB1228-3ASB	PT, HG, MB
12	12	24	78	3	3-wide	9	URB3228-3ASB	PT, HG, MB
12	15	24	78	3	1-wide	3	URB1258-3ASB	PT, HG, MB
12	15	24	78	3	3-wide	9	URB3258-3ASB	PT, HG, MB
12	18	24	78	3	1-wide	3	URB1288-3ASB	PT, HG, MB
12	18	24	78	3	3-wide	9	URB3288-3ASB	PT, HG, MB
SIX TIERS								
12	12	12	78	6	1-wide	6	URB1228-6ASB	PT, HG, MB
12	12	12	78	6	3-wide	18	URB3228-6ASB	PT, HG, MB
12	15	12	78	6	1-wide	6	URB1258-6ASB	PT, HG, MB
12	15	12	78	6	3-wide	18	URB3258-6ASB	PT, HG, MB
12	18	12	78	6	1-wide	6	URB1288-6ASB	PT, HG, MB
12	18	12	78	6	3-wide	18	URB3288-6ASB	PT, HG, MB

COLOR SELECTION

729
PARCHMENT (PT)

725
HALLOWELL GRAY (HG)

707
MARINE BLUE (MB)

5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

STOCK → PROGRAM

THE FASTEST SHIPPING IN THE INDUSTRY...



WHEN YOU NEED A LONG-LASTING ALTERNATIVE

Galvanite™ Rust Resistant Lockers

Galvanite lockers are fabricated from prime galvanized (hot-dipped zinc coated, annealed) sheet steel, then finished with an electrostatically applied high grade powder coat finish providing double protection against corrosion.

FEATURES:

BODY CONSTRUCTION: 24 gauge, galvanized corrosion resistant sheet steel

BODY STYLES: Single, double, triple and six tier

DOOR: 16 gauge, galvanized corrosion resistant sheet steel louvered for added ventilation, 18 gauge for box doors

HINGES: Continuous piano type

HANDLE (wardrobe): Stainless steel recessed handle with multi-point gravity lift-type latching. Recessed handle protects finish from being marred by padlock.

HANDLE (box): Box lockers include a projecting single-point friction catch door pull prepared for both padlock or built-in lock. No moving parts insures quiet maintenance-free operation.

HOOKS: One double prong ceiling hook and two single hooks per single and double tier opening. One double ceiling hook for triple tier. No hooks for six tier lockers.

COAT RODS: Available for single tier at a nominal cost

SHELVES: Hat shelf is included in single tier lockers.

LEGS: 6" high legs are standard. Lockers without legs are available for a nominal charge.



Single Tier,
1 wide,
1 opening



Double Tier,
1 wide,
2 openings



Triple Tier,
3 wide,
9 openings



Six Tier,
3 wide,
18 openings

**With Piano
Hinge**



**COLOR
SELECTION**

729
PARCHMENT (PT)

IDEAL FOR HIGH HUMIDITY AND CORROSION PRONE AREAS

Hallowell

www.Hallowell-List.com

GALVANITE™ RUST RESISTANT LOCKERS

Galvanite™ Corrosion Resistant Sheet Steel prevents rust and corrosion

Galvanite™, is List Industries' trade marked name for lockers and cabinets

manufactured with galvanized sheet steel components and finished with an electrostatically applied high-grade powder coat finish. Galvanneal and powder coat offer exceptional double protection against corrosion, even under the most adverse conditions. Tests indicate that galvanneal increases the estimated lifecycle threefold.

WHAT IS GALVANNEAL?

Galvanneal is the result of the combined processes of galvanizing (hot-dipped zinc coating) and annealing (heat treatment). Galvanneal does not flake when formed or stamped. The very fine matte finish acts like a primer that easily adheres to paint.

These characteristics make galvannealed sheet steel ideal for steel lockers in high humidity, corrosion prone areas.



Galvanite™ cold rolled sheet steel with our powder coat finish after a 336 hour salt spray test.



Common cold rolled sheet steel after a 336 hour salt spray test.

Ideal for use in high humidity areas, outdoor locations, near shower or pool areas and food industry facilities.



Triple Tier,
1 wide,
3 openings

Width	Depth	Opening Height	Frame Height	Tier	Grouping	Openings Per Group	Knock-down Cat No.	Fully-Assembled Cat No.	Color Selection
SINGLE TIER									
12	12	72	78	1	1-wide	1	U1228-1G	U1228-1GA	PT
12	12	72	78	1	3-wide	3	U3228-1G	U3228-1GA	PT
12	15	72	78	1	1-wide	1	U1258-1G	U1258-1GA	PT
12	15	72	78	1	3-wide	3	U3258-1G	U3258-1GA	PT
12	18	72	78	1	1-wide	1	U1288-1G	U1288-1GA	PT
12	18	72	78	1	3-wide	3	U3288-1G	U3288-1GA	PT
DOUBLE TIER									
12	12	36	78	2	1-wide	2	U1228-2G	U1228-2GA	PT
12	12	36	78	2	3-wide	6	U3228-2G	U3228-2GA	PT
12	15	36	78	2	1-wide	2	U1258-2G	U1258-2GA	PT
12	15	36	78	2	3-wide	6	U3258-2G	U3258-2GA	PT
12	18	36	78	2	1-wide	2	U1288-2G	U1288-2GA	PT
12	18	36	78	2	3-wide	6	U3288-2G	U3288-2GA	PT
TRIPLE TIER									
12	12	24	78	3	1-wide	3	U1228-3G	U1228-3GA	PT
12	12	24	78	3	3-wide	9	U3228-3G	U3228-3GA	PT
12	15	24	78	3	1-wide	3	U1258-3G	U1258-3GA	PT
12	15	24	78	3	3-wide	9	U3258-3G	U3258-3GA	PT
12	18	24	78	3	1-wide	3	U1288-3G	U1288-3GA	PT
12	18	24	78	3	3-wide	9	U3288-3G	U3288-3GA	PT
SIX TIERS									
12	12	12	78	6	1-wide	6	U1228-6G	U1228-6GA	PT
12	12	12	78	6	3-wide	18	U3228-6G	U3228-6GA	PT
12	15	12	78	6	1-wide	6	U1258-6G	U1258-6GA	PT
12	15	12	78	6	3-wide	18	U3258-6G	U3258-6GA	PT
12	18	12	78	6	1-wide	6	U1288-6G	U1288-6GA	PT
12	18	12	78	6	3-wide	18	U3288-6G	U3288-6GA	PT

COLOR SELECTION

729 PARCHMENT (PT)

5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

19

STOCK → PROGRAM

THE FASTEST SHIPPING IN THE INDUSTRY...



**SPECIALLY FORMULATED
ANTIMICROBIAL FINISH**

MedSafe™

Antimicrobial Health care Lockers

Specially formulated powder coat finish protects against bacteria, mold, yeast & mildew for up to 20 years!

FEATURES:

BODY CONSTRUCTION: Knock-down, 24 gauge

BODY STYLES: Single and double tier

CUSTOM FEATURES: Antimicrobial finish

DOOR: 16 gauge, louvered for added ventilation,

HINGES: Continuous piano type

HANDLE: Stainless steel recessed handle with multi-point gravity lift-type latching. Recessed handle protects finish from being marred by padlock.

HOOKS: One double prong ceiling hook and two single hooks per single and double tier opening.

COAT RODS: Available for single tier at a nominal cost

SHELVES: Hat shelf is included in single tier lockers.

LEGS: All stock lockers are standard with 6" high legs. Lockers without legs are available for a nominal charge.



With Piano Hinge

HAT SHELF,
COAT HOOKS
AND 6" LEGS
ARE STANDARD

Double Tier,
1 wide,
2 openings

Single Tier,
1 wide,
1 opening

**COLOR
SELECTION**

PLATINUM (PL)

Width	Depth	Opg Hgt	Frm Hgt	Tier	Grouping	Openings Per Group	Knock-Down Cat No.	Fully-Assembled Cat No.	Color Selection
SINGLE TIER									
12	18	72	78	1	1-wide	1	UMS1288-1	UMS1288-1A	PL
12	18	72	78	1	3-wide	3	UMS3288-1	UMS3288-1A	PL
15	18	72	78	1	1-wide	1	UMS1588-1	UMS1588-1A	PL
15	18	72	78	1	3-wide	3	UMS3588-1	UMS3588-1A	PL
18	18	72	78	1	1-wide	1	UMS1888-1	UMS1888-1A	PL
18	18	72	78	1	3-wide	3	UMS3888-1	UMS3888-1A	PL
DOUBLE TIER									
12	18	36	78	2	1-wide	2	UMS1288-2	UMS1288-2A	PL
12	18	36	78	2	3-wide	6	UMS3288-2	UMS3288-2A	PL
15	18	36	78	2	1-wide	2	UMS1588-2	UMS1588-2A	PL
15	18	36	78	2	3-wide	6	UMS3588-2	UMS3588-2A	PL

**HALLOWELL QUALITY
TO FIT A SMALL BUDGET**



Hallowell
www.Hallowell-List.com

VALUEMAX™ ECONOMY LOCKERS

ValueMax™

economy lockers

ValueMax lockers offer exceptional value, quality and finish at an affordable price.

FEATURES:

BODY CONSTRUCTION: Knock-down, 24 gauge

BODY STYLES: Single, double and triple tier

DOOR: 16 gauge, louvered for added ventilation

HINGES: Continuous piano type

HANDLE: Single-point thru-the-door friction catch door pull designed for use with a padlock

HOOKS: One double prong ceiling hook and two single hooks per single and double tier opening. One double ceiling hook for triple tier.

COAT RODS: Available for single tier at a nominal cost

SHELVES: Hat shelf is included in single tier lockers.


LEGS: 6" high legs are standard. Lockers without legs are available for a nominal charge.



ValueMax lockers are the perfect solution for limited budget projects.

Width	Depth	Opening Height	Frame Height	Tier	Grouping	Openings Per Group	Knock-Down Cat No.	Fully-Assembled Cat No.	Color Selection
SINGLE TIER									
12	12	72	78	1	1-wide	1	UH1228-1	UH1228-1A	PT, HG
12	12	72	78	1	3-wide	3	UH3228-1	UH3228-1A	PT, HG
12	15	72	78	1	1-wide	1	UH1258-1	UH1258-1A	PT, HG
12	15	72	78	1	3-wide	3	UH3258-1	UH3258-1A	PT, HG
12	18	72	78	1	1-wide	1	UH1288-1	UH1288-1A	PT, HG
12	18	72	78	1	3-wide	3	UH3288-1	UH3288-1A	PT, HG
DOUBLE TIER									
12	12	36	78	2	1-wide	2	UH1228-2	UH1228-2A	PT, HG
12	12	36	78	2	3-wide	6	UH3228-2	UH3228-2A	PT, HG
12	15	36	78	2	1-wide	2	UH1258-2	UH1258-2A	PT, HG
12	15	36	78	2	3-wide	6	UH3258-2	UH3258-2A	PT, HG
12	18	36	78	2	1-wide	2	UH1288-2	UH1288-2A	PT, HG
12	18	36	78	2	3-wide	6	UH3288-2	UH3288-2A	PT, HG
TRIPLE TIER									
12	12	24	78	3	1-wide	3	UH1228-3	UH1228-3A	PT, HG
12	12	24	78	3	3-wide	9	UH3228-3	UH3228-3A	PT, HG
12	15	24	78	3	1-wide	3	UH1258-3	UH1258-3A	PT, HG
12	15	24	78	3	3-wide	9	UH3258-3	UH3258-3A	PT, HG
12	18	24	78	3	1-wide	3	UH1288-3	UH1288-3A	PT, HG
12	18	24	78	3	3-wide	9	UH3288-3	UH3288-3A	PT, HG

With Piano Hinge



5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

STOCK → PROGRAM


THE FASTEST SHIPPING IN THE INDUSTRY...



WHEN MONITORING OF LOCKER CONTENTS IS REQUIRED

KD Wardrobe Lockers

SAFETY VIEW®

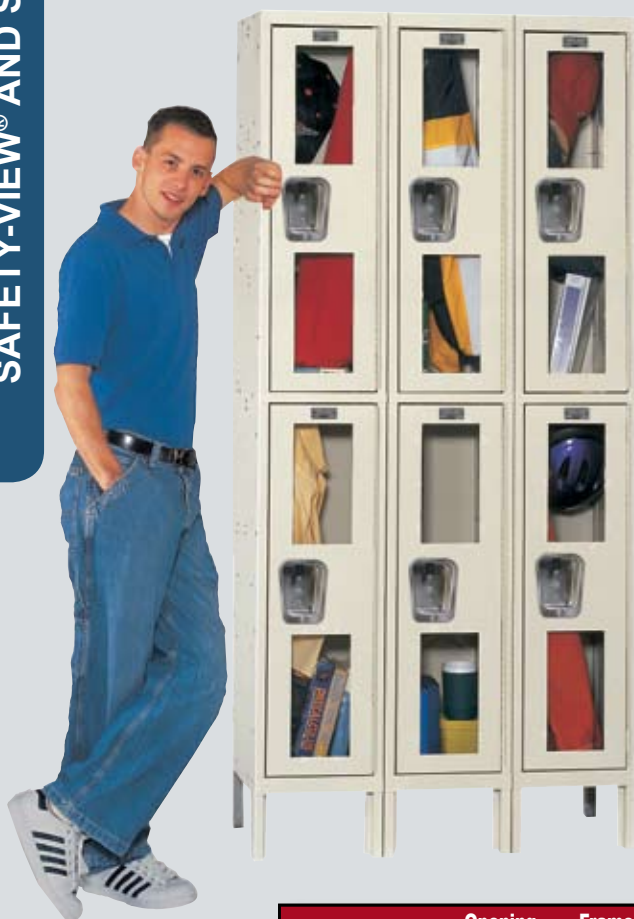Double Tier,
3 wide,
6 openings

WARDROBE LOCKER FEATURES:

BODY CONSTRUCTION: Knock-down, 24 gauge

BODY STYLES: Single, double and triple tier

DOOR: 16 gauge steel with two high strength injection molded polycarbonate panels per door for easy content viewing

HINGES: Continuous piano type

HANDLE: Stainless steel recessed handle with multi-point gravity lift-type latching. Recessed handle protects finish from being marred by padlock.

HOOKS: One double prong ceiling hook and two single hooks per single and double tier opening. One double ceiling hook for triple tier

COAT RODS: Available for single tier at a nominal cost

SHELVES: Hat shelf is included in single tier lockers

LEGS: 6" high legs are standard. Lockers without legs are available for a nominal charge.

NOTES: Meets UL flammability standards, Polycarbonate is approved by the Consumer Product Safety Commission (CPSC16CFR 1201)

**With Piano
Hinge**

Width	Depth	Opening Height	Frame Height	Tier	Grouping	Opening Per Group	Knock-Down Cat No.	Fully-Assembled Cat No.	Color Selection
SINGLE TIER									
12	12	72	78	1	1-wide	1	USV1228-1	USV1228-1A	PT
12	12	72	78	1	3-wide	3	USV3228-1	USV3228-1A	PT
12	15	72	78	1	1-wide	1	USV1258-1	USV1258-1A	PT
12	15	72	78	1	3-wide	3	USV3258-1	USV3258-1A	PT
12	18	72	78	1	1-wide	1	USV1288-1	USV1288-1A	PT
12	18	72	78	1	3-wide	3	USV3288-1	USV3288-1A	PT
DOUBLE TIER									
12	12	36	78	2	1-wide	2	USV1228-2	USV1228-2A	PT
12	12	36	78	2	3-wide	6	USV3228-2	USV3228-2A	PT
12	15	36	78	2	1-wide	2	USV1258-2	USV1258-2A	PT
12	15	36	78	2	3-wide	6	USV3258-2	USV3258-2A	PT
12	18	36	78	2	1-wide	2	USV1288-2	USV1288-2A	PT
12	18	36	78	2	3-wide	6	USV3288-2	USV3288-2A	PT
TRIPLE TIER									
12	12	24	78	3	1-wide	3	USV1228-3	USV1228-3A	PT
12	12	24	78	3	3-wide	9	USV3228-3	USV3228-3A	PT
12	15	24	78	3	1-wide	3	USV1258-3	USV1258-3A	PT
12	15	24	78	3	3-wide	9	USV3258-3	USV3258-3A	PT
12	18	24	78	3	1-wide	3	USV1288-3	USV1288-3A	PT
12	18	24	78	3	3-wide	9	USV3288-3	USV3288-3A	PT



**COLOR
SELECTION**

729
PARCHMENT (PT)

**SEE WHAT YOU
ARE MISSING**



Hallowell

www.Hallowell-List.com

**SAFETY
VIEW®
PLUS**

KD Box Lockers

BOX LOCKER FEATURES:

BODY CONSTRUCTION: Knock-down, 24 gauge

BODY STYLES: Six tier, Sixteen Person and wall mount

DOOR: High strength injection molded clear polycarbonate doors for unobstructed content viewing

HINGES: Continuous piano type

HANDLE: Single-point projecting friction catch door pull prepared for both padlock or built-in lock

HOOKS: None

COAT RODS: Standard on Sixteen person

SHELVES: None

LEGS: 6" high legs are standard. Lockers without legs are available for a nominal charge

NOTES: Meets UL flammability standards, Polycarbonate is approved by the Consumer Product Safety Commission (CPSC16CFR 1201) U.S. Patent No. D458 064S

GENERAL FEATURES:

- Aluminum number plates (#1-up) with mounting hardware are included.
- Locks are not included.
- Safety-View plus doors provide an unobstructed view of locker contents
- Can be ordered fully-assembled or knock-down for assembly at destination
- Order 3-wide units for best value. Order 1-wide units to complete quantity needed for each continuous row
- Available for immediate



Six Tier,
3 wide,
18 openings



**ADA
Compliant
Lockers**



Sixteen person shown
with optional closed
base



4 Wide wall mount



Unobstructed
view of locker
contents

Width	Depth	Opening Height	Frame Height	Tier	Grouping	Opening Per Group	Knock-Down Cat No.	Fully-Assembled Cat No.	Color Selection
SIX TIERS									
12	12	12	78	6	1-wide	6	USVP1228-6	USVP1228-6A	PT
12	12	12	78	6	3-wide	18	USVP3228-6	USVP3228-6A	PT
12	15	12	78	6	1-wide	6	USVP1258-6	USVP1258-6A	PT
12	15	12	78	6	3-wide	18	USVP3258-6	USVP3258-6A	PT
12	18	12	78	6	1-wide	6	USVP1288-6	USVP1288-6A	PT
12	18	12	78	6	3-wide	18	USVP3288-6	USVP3288-6A	PT
4-WIDE WALL MOUNT									
48	18	12	14-3/4	4-Wide Wall Mount		4	USVP1482-4WM	USVP1482-4WMA	PT
16-PERSON UNIT									
72	18	12	78	16-Person Unit		16	USVP1788-16	USVP1788-16A	PT
ADA UNIT									
12	12	12/36	78	ADA	1-wide	4	USVP1228ADA	USVP1228ADA-A	PT
12	12	12/36	78	ADA	3-wide	12	USVP3228ADA	USVP3228ADA-A	PT
12	15	12/36	78	ADA	1-wide	4	USVP1258ADA	USVP1258ADA-A	PT
12	15	12/36	78	ADA	3-wide	12	USVP3258ADA	USVP3258ADA-A	PT
12	18	12/36	78	ADA	1-wide	4	USVP1288ADA	USVP1288ADA-A	PT
12	18	12/36	78	ADA	3-wide	12	USVP3288ADA	USVP3288ADA-A	PT

**COLOR
SELECTION**

729
PARCHMENT (PT)

5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

23

SAFETY-VIEW® AND SAFETY-VIEW® PLUS

STOCK → **PROGRAM**

THE FASTEST SHIPPING IN THE INDUSTRY...




Heavy-Duty Ventilated (HDV) KD Stock Lockers



- ✓ Ventilated doors and sides
- ✓ Heavy gauge door and body
- ✓ Large capacity sizes available
- ✓ Strength and ventilation in one practical locker




Double Tier,
1 wide,
2 openings

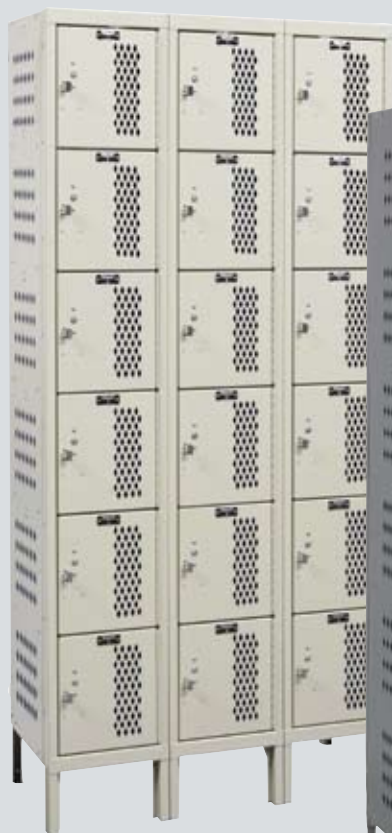

Six Tier,
3 wide,
18 openings



Double Tier,
3 wide,
6 opening



Six Tier,
1 wide,
6 openings



Six Tier,
1 wide,
6 openings



Single Tier,
1 wide,
1 opening



**COLOR
SELECTION**

729
PARCHMENT (PT)

725
HALLOWELL GRAY (HG)



WHEN STRENGTH AND VENTILATION MATTER

Hallowell

www.Hallowell-List.com

HEAVY-DUTY VENTILATED (HDV) LOCKERS

FEATURES:

BODY CONSTRUCTION: Knock-down, 16 gauge body with 18 gauge back. Sides are diamond perforated for maximum ventilation

BODY STYLES: Single, double and six tier

DOOR: 14 gauge, diamond perforated for maximum ventilation

HINGES: Continuous piano type

HANDLE (wardrobe): Stainless steel recessed handle with multi-point gravity lift-type latching. Recessed handle protects finish from being marred by padlock.

HANDLE (box): Box lockers include a projecting single-point friction catch door pull prepared for both padlock or built-in lock. No moving parts insures quiet maintenance-free operation.

HOOCS: One double prong ceiling hook and two single hooks per single and double tier opening. One double ceiling hook for triple tier.

COAT RODS: Available for single tier at a nominal cost

SHELVES: Hat shelf is included in single tier lockers.

LEGS: 6" high legs are standard. Lockers without legs are available for a nominal charge.



Single Tier,
1 wide,
1 opening



Single Tier,
1 wide,
1 opening

Width	Depth	Opening Height	Frame Height	Tier	Grouping	Openings Per Group	Knock-down Cat No.	Fully-Assembled Cat No.	Color Selection
SINGLE TIER									
12	12	72	78	1	1-wide	1	U1228-1HDV	U1228-1HV-A	PT, HG
12	12	72	78	1	3-wide	3	U3228-1HDV	U3228-1HV-A	PT, HG
12	15	72	78	1	1-wide	1	U1258-1HDV	U1258-1HV-A	PT, HG
12	15	72	78	1	3-wide	3	U3258-1HDV	U3258-1HV-A	PT, HG
12	18	72	78	1	1-wide	1	U1288-1HDV	U1288-1HV-A	PT, HG
12	18	72	78	1	3-wide	3	U3288-1HDV	U3288-1HV-A	PT, HG
15	15	72	78	1	1-wide	1	U1558-1HDV	U1558-1HV-A	PT, HG
15	15	72	78	1	3-wide	3	U3558-1HDV	U3558-1HV-A	PT, HG
15	18	72	78	1	1-wide	1	U1588-1HDV	U1588-1HV-A	PT, HG
15	18	72	78	1	3-wide	3	U3588-1HDV	U3588-1HV-A	PT, HG
15	21	72	78	1	1-wide	1	U1518-1HDV	U1518-1HV-A	PT, HG
15	21	72	78	1	3-wide	3	U3518-1HDV	U3518-1HV-A	PT, HG
18	18	72	78	1	1-wide	1	U1888-1HDV	U1888-1HV-A	PT, HG
18	18	72	78	1	3-wide	3	U3888-1HDV	U3888-1HV-A	PT, HG
18	21	72	78	1	1-wide	1	U1818-1HDV	U1818-1HV-A	PT, HG
18	21	72	78	1	3-wide	3	U3818-1HDV	U3818-1HV-A	PT, HG
DOUBLE TIER									
12	12	36	78	2	1-wide	2	U1228-2HDV	U1228-2HV-A	PT, HG
12	12	36	78	2	3-wide	6	U3228-2HDV	U3228-2HV-A	PT, HG
12	15	36	78	2	1-wide	2	U1258-2HDV	U1258-2HV-A	PT, HG
12	15	36	78	2	3-wide	6	U3258-2HDV	U3258-2HV-A	PT, HG
12	18	36	78	2	1-wide	2	U1288-2HDV	U1288-2HV-A	PT, HG
12	18	36	78	2	3-wide	6	U3288-2HDV	U3288-2HV-A	PT, HG
15	15	36	78	2	1-wide	2	U1558-2HDV	U1558-2HV-A	PT, HG
15	15	36	78	2	3-wide	6	U3558-2HDV	U3558-2HV-A	PT, HG
15	18	36	78	2	1-wide	2	U1588-2HDV	U1588-2HV-A	PT, HG
15	18	36	78	2	3-wide	6	U3588-2HDV	U3588-2HV-A	PT, HG
15	21	36	78	2	1-wide	2	U1518-2HDV	U1518-2HV-A	PT, HG
15	21	36	78	2	3-wide	6	U3518-2HDV	U3518-2HV-A	PT, HG
18	18	36	78	2	1-wide	2	U1888-2HDV	U1888-2HV-A	PT, HG
18	18	36	78	2	3-wide	6	U3888-2HDV	U3888-2HV-A	PT, HG
18	21	36	78	2	1-wide	2	U1818-2HDV	U1818-2HV-A	PT, HG
18	21	36	78	2	3-wide	6	U3818-2HDV	U3818-2HV-A	PT, HG
SIX TIERS									
12	12	12	78	6	1-wide	6	U1228-6HDV	U1228-6HV-A	PT, HG
12	12	12	78	6	3-wide	18	U3228-6HDV	U3228-6HV-A	PT, HG
12	15	12	78	6	1-wide	6	U1258-6HDV	U1258-6HV-A	PT, HG
12	15	12	78	6	3-wide	18	U3258-6HDV	U3258-6HV-A	PT, HG
12	18	12	78	6	1-wide	6	U1288-6HDV	U1288-6HV-A	PT, HG
12	18	12	78	6	3-wide	18	U3288-6HDV	U3288-6HV-A	PT, HG






5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

25



STOCK → PROGRAM

COMPLETE SELECTION OF LOCKER ACCESSORIES

THE FASTEST SHIPPING IN THE INDUSTRY...

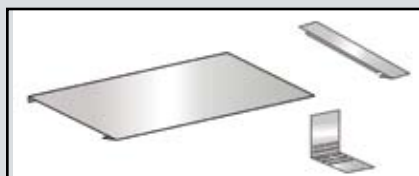INDIVIDUAL SLOPE
TOPSEND CLOSURES
FOR INDIVIDUAL
SLOPE TOPSSLOPE TOP
FILLERCLOSED FRONT AND
SIDE BASE

CONTINUOUS SLOPE TOP

END CLOSURES
FOR CONTINUOUS
SLOPE TOPSSLOPE TOP
CORNER

Width	Depth	Height	Cat. No.	Color Selection
INDIVIDUAL SLOPE TOPS				
12	12	4	KISTT1212	PT, HG, MB, GM, MN
12	15	5	KISTT1215	PT, HG, MB, GM, MN
12	18	6	KISTT1218	PT, HG, MB, GM, MN
15	15	5	KISTT1515	PT, HG
15	18	6	KISTT1518	PT, HG
15	21	7	KISTT1521	PT
18	18	6	KISTT1818	PT, HG
18	21	7	KISTT1821	PT, HG
18	24	8	KISTT1824	PT
END CLOSURES (FOR INDIVIDUAL SLOPE TOPS)				
	12	4	KISE12	PT, HG, MB, GM, MN
	15	5	KISE15	PT, HG, MB, GM, MN
	18	6	KISE18	PT, HG, MB, GM, MN
	21	7	KISE21	PT, HG
	24	8	KISE24	PT
SLOPE TOP FILLER (FOR INDIVIDUAL SLOPE TOPS)				
6	12	4	KSTF0612	PT, HG, MB, GM, MN
6	15	5	KSTF0615	PT, HG, MB, GM, MN
6	18	6	KSTF0618	PT, HG, MB, GM, MN
12	12	4	KSTF1212	PT, HG, MB, GM, MN
12	15	5	KSTF1215	PT, HG, MB, GM, MN
12	18	6	KSTF1218	PT, HG, MB, GM, MN
CONTINUOUS SLOPE TOP				
72	12	4	CST1272	PT, HG, MB, GM, MN
72	15	5	CST1572	PT, HG, MB, GM, MN
72	18	6	CST1872	PT, HG, MB, GM, MN
END CLOSURES (FOR CONTINUOUS SLOPE TOP)				
	12	4	WCSE12	PT, HG, MB, GM, MN
	15	5	WCSE15	PT, HG, MB, GM, MN
	18	6	WCSE18	PT, HG, MB, GM, MN
SLOPE TOP CORNER				
	12	12	STC12	PT, HG, MB, GM, MN
	15	15	STC15	PT, HG, MB, GM, MN
	18	18	STC18	PT, HG, MB, GM, MN
CLOSED FRONT BASE				
12		6	KCFB12	PT, HG, MB, GM, MN
15		6	KCFB15	PT, HG
18		6	KCFB18	PT, HG
CLOSED SIDE BASE				
12		6	KCSB12	PT, HG, MB, GM, MN
15		6	KCSB15	PT, HG, MB, GM, MN
18		6	KCSB18	PT, HG, MB, GM, MN
21		6	KCSB21	PT, HG
24		6	KCSB24	PT


COMPLETE SELECTION OF LOCKER ACCESSORIES

Hallowell


www.Hallowell-List.com

ACCESSORY SELECTION


Width	Depth	Height	Cat. No.	Color Selection
Z-BASE FRONTS				
72		4	KZBF-N	PT, HG, MB, GM, MN
Z-BASE ENDS				
	12	4	KZBE12-N	PT, HG, MB, GM, MN
	15	4	KZBE15-N	PT, HG, MB, GM, MN
	18	4	KZBE18-N	PT, HG, MB, GM, MN
Z-BASE SPLICE				
3			KZBS-N	PT
TOP RECESSED TRIM				
72		3	KRT-T	PT, HG, MB, GM, MN
TOP RECESSED TRIM SPLICE				
3		3	KRT-SC	PT, HG, MB, GM, MN
SIDE RECESS TRIM				
3		63	KRT60L	PT
3		63	KRT60R	PT
3		75	KRT72L	PT, HG, MB, GM, MN
3		75	KRT72R	PT, HG, MB, GM, MN
COAT RODS				
12			KCR12	Plated
15			KCR15	Plated
18			KCR18	Plated
21			KCR21	Plated
24			KCR24	Plated
7.5 (For Duplex and Two-Person only)			KCR15L	Plated
7.5 (For Duplex and Two-Person only)			KCR15R	Plated
FRONT FILLERS				
6		66	KFSF0666	PT
12		66	KFSF1266	PT
6		78	KFSF0678	PT, HG, MB, GM, MN
12		78	KFSF1278	PT, HG, MB, GM, MN
FILLER SLIP JOINTS				
		66	KG66	PT
		78	KG78	PT, HG, MB, GM, MN
UNIVERSAL ANGLE				
1	2	72	AF010272	PT
FLAT TOP FILLERS				
6	12		KFTF0612	PT, HG, MB, GM, MN
6	15		KFTF0615	PT, HG, MB, GM, MN
6	18		KFTF0618	PT, HG, MB, GM, MN
12	12		KFTF1212	PT, HG, MB, GM, MN
12	15		KFTF1215	PT, HG, MB, GM, MN
12	18		KFTF1218	PT, HG, MB, GM, MN
FLAT TOP CORNER				
12	12		FTC12	PT, HG, MB, GM, MN
15	15		FTC15	PT, HG, MB, GM, MN
18	18		FTC18	PT, HG, MB, GM, MN
UNIVERSAL END PANELS				
	12	60	KMP1260	PT, HG
	15	60	KMP1560	PT, HG
	18	60	KMP1860	PT, HG
	12	72	KMP1272	PT, HG, MB, GM, MN
	15	72	KMP1572	PT, HG, MB, GM, MN
	18	72	KMP1872	PT, HG, MB, GM, MN
	21	72	KMP2172	PT, HG
	24	72	KMP2472	PT




RECESSED
TRIM



FRONT FILLER AND
SLIP JOINT




FLAT TOP FILLER




FLAT TOP CORNER



COAT RODS



UNIVERSAL END PANEL

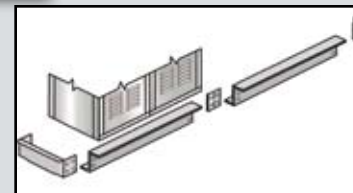

Z-BASE FRONTS,
ENDS, SPLICE

5 DAY SHIPPING ON ALL IN-STOCK ACCESSORIES

27

STOCK → PROGRAM

Quick Ship

THE FASTEST SHIPPING IN THE INDUSTRY...

**PRACTICAL, EFFICIENT
AND AN INNOVATIVE SOLUTION
TO UNIFORM HANDLING**



UNIFORM

Exchange Lockers™

**The Industry Standard in the Uniform
Distribution System.**



**9 Person Uniform
Exchange Locker
Model HUE454-9P**



**8 Person Uniform
Exchange Locker
Model HUE214-8P**



**COLOR
SELECTION**

**725
HALLOWELL GRAY
(HG)**

FIVE DISTINCT MODELS TO CHOOSE FROM



Hallowell

www.Hallowell-List.com

UNIFORM EXCHANGE LOCKERS



Half Height Hanging
Uniform Locker
Model HUE214-2



User doors re-inforced at
latches



Heavy-duty padlock handles
(locks not included)



Main door latch
hooks welded to
frame

FEATURES:

BODY CONSTRUCTION: 24 gauge, backs perforated for ventilation, galvanized bottoms

BODY STYLES: Full and half height hanging uniform lockers, 9 person folded uniform exchange lockers, 8 person hanging uniform exchange locker, soiled uniform locker

DOOR: User doors are 20 gauge (louvered at 8 and 9 Person)

HINGES: 5 knuckle

FRAME: Master door frame is 16 gauge

LATCHING: Master Door: Multi-point with industry standard key lock **User Doors:** Single-point turn latch for padlocks (locks not included)

COAT RODS: Standard for full and half height hanging uniform lockers and 8-Person exchange lockers

NOTES: All uniform exchange lockers ship fully-assembled



Full Height Hanging
Uniform Locker
Model HUE214-1



Soiled Uniform
Exchange Locker
Model HUE614-1

Width	Depth	Frame Height	Opening Dimension (W x H)	Grouping	Openings Per Group	Catalog No.	Color
32-9/16	21	84	6-1/2 x 38-3/4	1-wide	8	HUE214-8P	HG
24	15	84	18-1/8 x 8-3/4	1-wide	9	HUE454-9P	HG
26	21	84	23-7/8 x 11 (laundry door)	1-wide	1	HUE614-SC	HG
32-9/16	21	84	30-1/2 x 81-3/4	1-wide	1	HUE214-1	HG
32-9/16	21	84	30-1/2 x 81-3/4	1-wide	1	HUE214-2	HG

5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

29

STOCK → PROGRAM

THE FASTEST SHIPPING IN THE INDUSTRY...



THE PRESTIGE OF FINE WOOD, THE AFFORDABLE PRICE OF KD LOCKERS

HALLOWELL® Hybrid Lockers WOOD/METAL

GENERAL FEATURES:

- Lockers can be ordered fully-assembled or knock-down for assembly at destination.
- Order 3-wide units for best value. Order 1-wide units to complete quantity needed for each continuous row.
- Aluminum number plates (#1-up) with mounting hardware are included. Number plate face is black with silver etched numerals. If a special numbering sequence is required, please specify when ordering. Number sequence must be consecutive numbers equal to the number of openings (doors) ordered.
- Built-in key locks are included.

FEATURES:

BODY CONSTRUCTION: Knock-down, 24 gauge sheet steel

BODY STYLES: Single, double and triple tier

DOOR: Furniture grade red oak plywood, finished with 3 coats of lacquer

HINGES: Continuous piano type

HOOKS: Two single hooks per single and double tier opening. One double prong ceiling hook for triple tier.

COAT RODS: Standard for single and double tier

SHELVES: Hat shelf in single tier lockers only.

LEGS: 6" high legs are standard. Lockers without legs are available at a nominal charge

APPEARANCE: Color: black frame with red oak doors

NOTE: Other optional locking methods also available

Includes Key Lock

Single tier,
1 wideDouble tier,
1 wideTriple tier,
1 wide

COLOR
SELECTION

708 MIDNIGHT
EBONY (ME)RED OAK
DOORS

Red Oak Doors and Steel Frame & Body
All lockers shown with optional closed metal base



Width	Depth	Opening Height	Frame Height	Tier	Grouping	Openings Per Group	Knock-Down Cat No.	Fully-Assembled Cat No.	Color Selection
SINGLE TIER									
12	18	72	78	1	1-wide	1	UW1288-1MEW	UW1288-1A-MEW	ME/Wood
12	18	72	78	1	3-wide	3	UW3288-1MEW	UW3288-1A-MEW	ME/Wood
15	18	72	78	1	1-wide	1	UW1588-1MEW	UW1588-1A-MEW	ME/Wood
15	18	72	78	1	3-wide	3	UW3588-1MEW	UW3588-1A-MEW	ME/Wood
DOUBLE TIER									
12	18	36	78	2	1-wide	2	UW1288-2MEW	UW1288-2A-MEW	ME/Wood
12	18	36	78	2	3-wide	6	UW3288-2MEW	UW3288-2A-MEW	ME/Wood
15	18	36	78	2	1-wide	2	UW1588-2MEW	UW1588-2A-MEW	ME/Wood
15	18	36	78	2	3-wide	6	UW3588-2MEW	UW3588-2A-MEW	ME/Wood
TRIPLE TIER									
12	18	24	78	3	1-wide	3	UW1288-3MEW	UW1288-3A-MEW	ME/Wood
12	18	24	78	3	3-wide	9	UW3288-3MEW	UW3288-3A-MEW	ME/Wood
Accessories									
CLOSED FRONT BASES									
12		6					KCFB12ME		ME
15		6					KCFB15ME		ME
CLOSED SIDE BASES									
	18	6					KCSB18ME		ME

STOCK → PROGRAM

FURNITURE GRADE WARDROBE WOOD LOCKERS

THE FASTEST SHIPPING IN THE INDUSTRY...

Club Lockers



FEATURES:

BODY CONSTRUCTION: Wood lockers shall be fabricated from $\frac{3}{4}$ " plain sliced red oak plywood throughout including sides, backs and hat shelves.

BODY STYLES: Single, double and triple tier

FINISH: All interior/front faces to be finished with a three coat catalyzed clear cabinet lacquer or equivalent.

DOOR: Furniture grade red oak plywood, finished with 3 coats of lacquer

HINGES: Concealed european-style cabinet hinges

HOOKS: Two single hooks per single and double tier opening. One double prong ceiling hook for triple tier.

COAT RODS: Standard for single and double tier

SHELVES: Hat shelf is included in single tier lockers.

LEGS: No legs

APPEARANCE: Natural red oak

NOTE: Other optional locking methods also available



Single tier,
1 wide
Shown with
optional finished
end panels



Double tier,
1 wide
Shown with
optional finished
end panels, base
and crown molding



Triple tier,
1 wide
Shown with
optional finished
end panels



Available optional decorative crown
molding and base in red oak finish



Concealed european style cabinet
door hinges



Key locks are standard

IDEAL FOR COUNTRY CLUBS, HEALTH SPAS AND FITNESS CENTERS


Hallowell®

www.Hallowell-List.com

WOOD WARDROBE LOCKERS



Single tier, 3 wide, 3 openings
Shown with optional finished end panels,
base and decorative crown molding

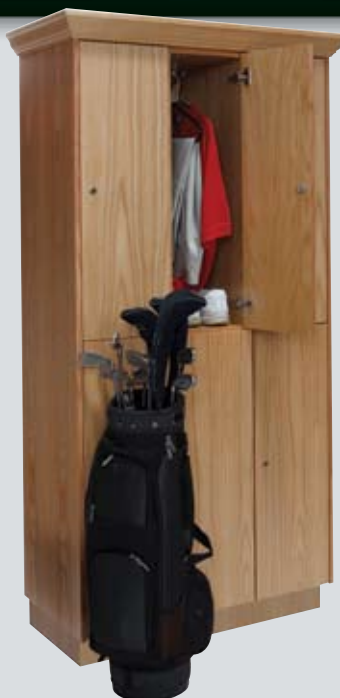


Double tier, 3 wide, 6 openings
Shown with optional finished end panels,
base and decorative crown molding



Triple tier, 3 wide, 9 openings
Shown with optional finished end panels,
base and decorative crown molding

Width	Depth	Opening Height	Frame Height	Tier	Grouping	Openings Per Group	Fully-Assembled Catalog No.	Color Selection
SINGLE TIER								
12	18	72	72	1	1-wide	1	UW1282-1A-W	Red Oak
12	18	72	72	1	3-wide	3	UW3282-1A-W	Red Oak
15	18	72	72	1	1-wide	1	UW1582-1A-W	Red Oak
15	18	72	72	1	3-wide	3	UW3582-1A-W	Red Oak
DOUBLE TIER								
12	18	36	72	2	1-wide	2	UW1282-2A-W	Red Oak
12	18	36	72	2	3-wide	6	UW3282-2A-W	Red Oak
15	18	36	72	2	1-wide	2	UW1582-2A-W	Red Oak
15	18	36	72	2	3-wide	6	UW3582-2A-W	Red Oak
TRIPLE TIER								
12	18	24	72	3	1-wide	3	UW1282-3A-W	Red Oak
12	18	24	72	3	3-wide	9	UW3282-3A-W	Red Oak
15	18	24	72	3	1-wide	3	UW1582-3A-W	Red Oak
15	18	24	72	3	3-wide	9	UW3582-3A-W	Red Oak

Accessories			Catalog No.	Color Selection
Width	Depth	Height		
BASE				
12	18	4	WCB128W	Red Oak
36	18	4	WCB328W	Red Oak
15	18	4	WCB158W	Red Oak
45	18	4	WCB358W	Red Oak
FINISHED END BASE				
18	4		WCEB18W	Red Oak
FINISHED END PANEL (required at exposed ends)				
3/4	18	72	WEP1872W	Red Oak
FRONT CROWN MOLDING				
12		4	WCM12W	Red Oak
15		4	WCM15W	Red Oak
36		4	WCM36W	Red Oak
45		4	WCM45W	Red Oak
END CROWN MOLDING				
18	4		WCME18W	Red Oak

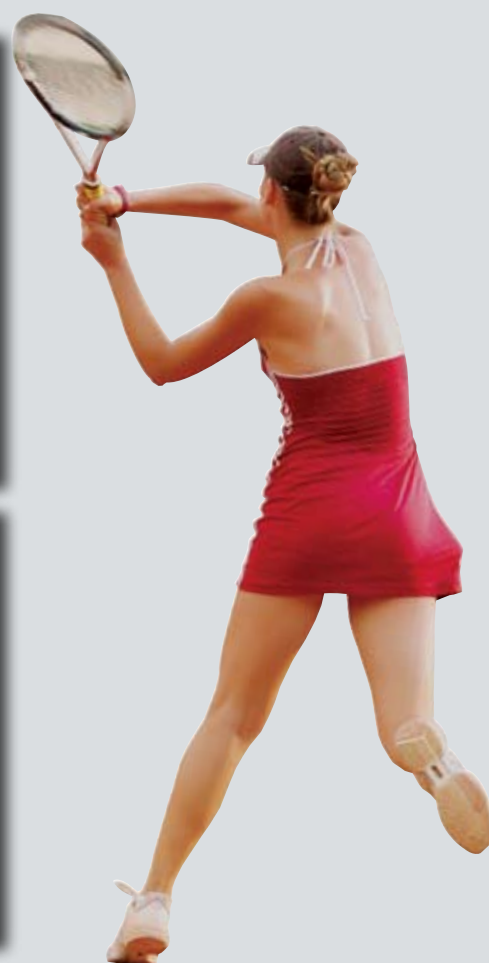

5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

33

STOCK → **PROGRAM**

THE FASTEST SHIPPING IN THE INDUSTRY...

RECRUITER CUSTOM WOOD LOCKERS WILL CREATE A UNIQUE ENVIRONMENT

RECRUITER™

In-Stock Wood Sport Lockers

Recruiter lockers are made in our North Florida manufacturing facility. This guarantees you absolute quality control and on-time delivery.

Recruiter lockers are crafted of furniture grade red oak and finished using three coats of high grade cabinet lacquer. Red oak is naturally moisture and mildew resistant so you can be sure to benefit from your investment for years to come. Recruiter lockers are virtually unaffected by normal locker room conditions and are designed to stand up to daily use by today's athletes!

In addition to our standard stock designs and sizes, our engineers are readily available to assist you in custom designing a locker to meet your specific needs. Be it a fitness center, team locker room, country club or resort health spa, we stand behind our product with a full one year warranty that covers defects in materials and workmanship.

- *All lockers ship fully-assembled*
- *Fabricated from furniture grade red oak*
- *Strong, durable and long-lasting*
- *Excellent moisture resistance*
- *Upper security box door includes built-in combination lock*
- *Optional team engraved logo on security box door*
- *Lower foot locker/seat allows for storage of bulk items*
- *Chrome plated coat rod*
- *Shoulder pad storage*
- *3-coat lacquer finish*
- *Custom designs are also available (non-stock)*
- *Custom wood species available (non-stock)*



THE BEAUTY IS IN THE DETAILS...

These lockers are high quality fine furniture. We take special pride in ensuring that each locker is a true work of art. All are made in our own manufacturing plant and shipped directly to you.



Hallowell®

www.Hallowell-List.com

WOOD SPORT LOCKERS

FEATURES:

BODY CONSTRUCTION: Wood lockers shall be fabricated from $\frac{3}{4}$ " plain sliced red oak plywood throughout including sides, backs and hat shelves.

BODY STYLES: Single tier

SIZES: 24" wide x 24" deep x 84" high

30" wide x 24" deep x 84" high

FINISH: All locker parts to be finished with a three coat catalyzed clear cabinet lacquer

TRIM: Face trim, shelf valances, seat front nosing, seat hinge support blocking and seat side support cleats are made from red oak lumber

SECURITY BOX DOOR: Made from red oak lumber

HINGES: Continuous in bright brass plating

HOOKS: Two double prong metal hooks

CLOTHES ROD: Made from KV 1-1/16" diameter chrome plated steel, 075" wall thickness

UPPER SHELF: Covered with Wilson-Art 7888-60 Golden Oak plastic laminate for durability

APPEARANCE: Color: Natural red oak

WARRANTY: 1 year



Width	Depth	Height	Catalog Number
24	24	84	RL242484-1SB
30	24	84	RL302484-1SB

5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

STOCK → PROGRAM

THE FASTEST SHIPPING IN THE INDUSTRY...



DuraTech™

Solid Plastic Lockers

RUST PROOF!

PERFECT FOR APPLICATIONS
WHERE HIGH HUMIDITY,
MOISTURE AND WATER
ARE PRESENT

**SOLID PLASTIC LOCKERS ARE PERFECT FOR USE IN
WET ENVIRONMENTS SUCH AS SHOWERS, POOLS
AND THE OUTDOORS.**

Plastic lockers are fabricated from solid high density polyethylene panels (HDPE) for maximum strength and durability while providing corrosion resistance to most common chemicals.



Six Tier,
3 wide,
18 openings



Single Tier,
3 wide,
3 openings



Six Tier,
1 wide,
6 openings

**COLOR
SELECTION**

GLACIER GRAY

OR

GLACIER
GRAY BODYBLUE
DOORS

SOLID PLASTIC LOCKERS ARE THE SOLUTION IN WET ENVIRONMENTS

Hallowell

www.Hallowell-List.com

SOLID PLASTIC (HDPE) LOCKERS

FEATURES:

BODY CONSTRUCTION: Corrosion Proof High Density Polyethylene (HDPE), 1/2" thick frame with 3/8" thick body panels

BODY STYLES: Single, double, triple and six tier

DOOR (wardrobe & box): Horizontal slots in door face provide ventilation.

HINGES: Continuous powder coated aluminum hinge

HANDLE (wardrobe): Projecting solid plastic handle with continuous full-height lift-type latching

HANDLE (box): Single-point thru-the-door projecting friction catch door pull with padlock hasp

SHELVES: Hat shelf is included in single tier lockers.

HOOKS: One double ceiling hook is included in single and double tier lockers.



Triple Tier,
3 wide,
9 openings shown
with optional 4" base

ADVANTAGES:

- Scratch Resistant
- Impact and dent resistant
- Easy to clean
- Mildew and odor resistant
- Graffiti resistant (pencil, pen, paint and most common markers)

Width	Depth	Opening Hgt	Frm Hgt	Tier	Grouping	Openings Per Group	Fully-Assembled Cat No.	Color Selection
SINGLE TIER								
12	18	60	60	1	1-wide	1	HPL1280-1A	GG, GB
12	18	60	60	1	3-wide	3	HPL3280-1A	GG, GB
15	18	60	60	1	1-wide	1	HPL1580-1A	GG, GB
15	18	60	60	1	3-wide	3	HPL3580-1A	GG, GB
12	18	72	72	1	1-wide	1	HPL1282-1A	GG, GB
12	18	72	72	1	3-wide	3	HPL3282-1A	GG, GB
15	18	72	72	1	1-wide	1	HPL1582-1A	GG, GB
15	18	72	72	1	3-wide	3	HPL3582-1A	GG, GB
18	18	72	72	1	1-wide	1	HPL1882-1A	GG, GB
18	18	72	72	1	3-wide	3	HPL3882-1A	GG, GB
DOUBLE TIER								
12	18	36	72	2	1-wide	2	HPL1282-2A	GG, GB
12	18	36	72	2	3-wide	6	HPL3282-2A	GG, GB
15	18	36	72	2	1-wide	2	HPL1582-2A	GG, GB
15	18	36	72	2	3-wide	6	HPL3582-2A	GG, GB
TRIPLE TIER								
12	18	24	72	3	1-wide	3	HPL1282-3A	GG, GB
12	18	24	72	3	3-wide	9	HPL3282-3A	GG, GB
SIX TIERS								
12	18	12	72	6	1-wide	6	HPL1282-6A	GG, GB
12	18	12	72	6	3-wide	18	HPL3282-6A	GG, GB



Optional slope tops prevent items from being placed on locker tops.

Width	Depth	Frm Hgt	Grouping	Cat No.	Color
BASES					
12	18	4	1-wide	HPLCB1218	BK
15	18	4	1-wide	HPLCB1518	BK
18	18	4	1-wide	HPLCB1818	BK
36	18	4	3-wide	HPLCB3618	BK
45	18	4	3-wide	HPLCB4518	BK
54	18	4	3-wide	HPLCB5418	BK
SLOPE TOPS					
12	18	6	1-wide	HPLST1218	GG
15	18	6	1-wide	HPLST1518	GG
18	18	6	1-wide	HPLST1818	GG
36	18	6	3-wide	HPLST3618	GG
45	18	6	3-wide	HPLST4518	GG
54	18	6	3-wide	HPLST5418	GG

5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

STOCK → PROGRAM

THE FASTEST SHIPPING IN THE INDUSTRY...

MADE FOR THE
FOOD INDUSTRY

DuraTech™

Solid Plastic Food Industry Lockers

FEATURES:**BODY CONSTRUCTION:** Corrosion Proof High Density Polyethylene (HDPE), 1/2" thick doors and frame with 3/8" thick body panels**BODY STYLES:** Single tier**DOOR:** Transparent blue polycarbonate doors for viewing contents. Includes ventilated door slots**HINGES:** Continuous, powder coated, aluminum hinge**HANDLE:** Projecting solid plastic handle with continuous full-height lift-type latching**SHELVES:** Hat shelf is included**HOOKS:** One double ceiling hook is included**LEGS:** 16" high legs/base are standard

**Lockers can be
hosed down
insuring maximum
cleanliness and
sanitation.**

**16" high legs/base
allows for easy
cleaning beneath
lockers**

Single Tier,
1 wide,
1 openingSingle Tier,
3 wide,
3 openings

**COLOR
SELECTION**
GLACIER
GRAY BODYBLUE
DOORS

Width	Depth	Opg Hgt	Frm Hgt	Tier	Grouping	Openings Per Group	Fully-Assembled Cat No.	Color Selection
12	18	60	76	1	1-wide	1	HPFL1280-1A	GGC
12	18	60	76	1	3-wide	3	HPFL3280-1A	GGC
15	18	60	76	1	1-wide	1	HPFL1580-1A	GGC
15	18	60	76	1	3-wide	3	HPFL3580-1A	GGC

**THE ABILITY TO CUSTOM
CONFIGURE YOUR
EXACT LOCKER NEEDS**



Hallowell

www.Hallowell-List.com

DuraTech™

SpaceCube™

**Solid Plastic
Modular Lockers**

FEATURES:

- Can be attached side-by-side, back-to-back or stacked
- Rust proof
- High Density Polyethylene (HDPE) construction
- Great for use outdoors and in high humidity areas
- Color: Glacier Gray throughout



**Place side-by-side or stack to form a row or column of lockers
to custom design your own locker layout.**

**Space Cube Lockers are engineered to easily attach to each other
creating a strong and lasting locker unit to meet any need.**

Width	Depth	Opg Hgt	Frm Hgt	Tier	Grouping	Openings Per group	Fully-Assembled Cat No.	Color Selection
12	18	12	12	1	1-wide	1	HSC1282-1A	GG

UNLIMITED USES!



- ✓ Dorm Rooms
- ✓ Kids Rooms
- ✓ Recreational Rooms
- ✓ Offices
- ✓ Garages
- ✓ Storage Facilities
- ✓ Day Care Centers
- ✓ Patios
- ✓ Churches
- ✓ Stores
- ✓ Schools



5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

39

MODULAR SOLID PLASTIC LOCKERS

STOCK → PROGRAM

THE FASTEST SHIPPING IN THE INDUSTRY...



ALL-WELDED HEAVY-DUTY CORROSION RESISTANT

MAXVIEW™

All-Welded Lockers

Hallowell All-Welded MaxView lockers are perfect for tool, equipment and gear storage.

FEATURES:

BODY CONSTRUCTION: All-welded 16 gauge heavy-duty tubular frame construction from galvanized sheet steel, sides and back are 1/2" 13 gauge flattened expanded metal.

Top and bottom are heavy-duty galvanized corrosion resistant sheet steel, fully-assembled

BODY STYLES: Single tier

DOOR: 14 gauge door is diamond perforated for maximum visibility and ventilation.

Includes a welded-in full height door stiffener


HINGES: Heavy-duty 13 gauge 7-knuckle (3 hinges per door)

HANDLE: Single-point projecting friction catch door pull prepared for both padlock or built-in lock.

SHELVES: Four 16 gauge sheet steel welded-in fixed shelves are fabricated from galvanized corrosion resistant sheet steel add additional rigidity to the unit.



- ✓ All-welded heavy-duty construction
- ✓ 4 sided viewing of locker contents
- ✓ 4 sided ventilation
- ✓ Corrosion resistant
- ✓ Lifetime warranty
- ✓ Full height 3-1/2" wide door stiffener



Heavy gauge tubular frame. Bottom shelf of locker sits a full 2-3/4" above finished floor protecting locker contents from water damage.



COLOR
SELECTION

736
SPORT SILVER
(SS)

Width	Depth	Opening Height	Frame Height	Tier	Grouping	Openings Per Group	Fully-Assembled Cat No.	Color Selection
ONE TIER								
18-3/4	18	72	74-3/4	1	1-wide	1	HLV882-1SS	SS

**THE INDUSTRY'S
TOUGHEST LOCKER**



Hallowell

www.Hallowell-List.com

SINGLE-POINT VENTILATED LOCKERS

SINGLE POINT **Welded Single-Point Ventilated Lockers**

FEATURES:

BODY CONSTRUCTION: All-welded, fully-assembled

BODY STYLES: Single and double tier

CUSTOM FEATURES: 16 gauge continuous top for added rigidity, 11 gauge MIG welded latch, continuous door strike at hinge and latch side

DOOR: 14 gauge door is diamond perforated for added visibility and ventilation and includes a welded-in full height door stiffener

HINGES: Continuous piano type

HANDLE Deep-drawn seamless stainless steel recessed handle with single-point thru-the-handle maintenance-free quiet latching system

SHELVES: Hat shelf for single tier



Lockers include a 3" wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torque-free door.



Single-point maintenance-free quiet latching system with recessed handle



Single Tier,
1 wide,
1 opening

Single Tier,
3 wide,
3 openings

Double Tier,
3 wide,
6 openings



Width	Depth	Opening Height	Frame Height	Tier	Grouping	Openings Per Group	Fully-Assembled Cat No.	Color Selection
SINGLE TIER								
12	12	72	72	1	1-wide	1	HWBA212-1	HG
12	12	72	72	1	3-wide	3	HWBA212-111	HG
12	18	72	72	1	1-wide	1	HWBA282-1	HG
12	18	72	72	1	3-wide	3	HWBA282-111	HG
18	18	72	72	1	1-wide	1	HWBA882-1	HG
18	18	72	72	1	3-wide	3	HWBA882-111	HG
DOUBLE TIER								
12	12	36	72	2	1-wide	2	HWBA212-2	HG
12	12	36	72	2	3-wide	6	HWBA212-222	HG
12	18	36	72	2	1-wide	2	HWBA282-2	HG
12	18	36	72	2	3-wide	6	HWBA282-222	HG
18	18	36	72	2	1-wide	2	HWBA882-2	HG
18	18	36	72	2	3-wide	6	HWBA882-222	HG

**COLOR
SELECTION**

725
HALLOWELL GRAY (HG)

5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

STOCK → PROGRAM

THE FASTEST SHIPPING IN THE INDUSTRY...



**PERFECT FOR SWAT,
POLICE, FIRE AND,
ALL EMERGENCY
RESPONSE TEAMS**

TASK FORCE XP™

Emergency Response All-welded Extreme Performance Lockers

FEATURES:

BODY CONSTRUCTION: 16 gauge, Unibody all-welded, galvanized corrosion resistant sheet steel.

Back is 18 gauge

BODY STYLES: Single tier, custom designed for specialized use

DOOR: 14 gauge louvered double doors with full-height welded in stiffener

HINGES: Continuous piano type

HANDLE: 3-point high-security turn handle latching handle

HOOKS: Two single wall hooks in wardrobe area, single hook in opening below security box, single hook on door.

COAT RODS: One at vertical wardrobe section

SHELVES: Two full-width at top, one partial shelf above security box

SIZE: Wardrobe locker

24" x 24" x 72"

Optional base/drawer unit

24" x 36" x 18"




Utility belt hook

Security box

Side pocket,
for a 1" thick
clipboardFull height
piano hingePowder coat
finishFull height door
stiffener

**Large lockable storage
drawer/base with
laminated maple wood
seat is optional**



**COLOR
SELECTION**

725 HALLOWELL
GRAY (HG)

	Width	Depth	Opening Height	Unit Height	Tier	Grouping	Openings Per Group	Fully-Assembled Cat No.	Color Selection
ONE TIER									
Without base	24	24	72	72	1	1-wide	1	HERL442-1	HG
With base	24	24/36	72	90	1	1-wide	1	HERL442-1B	HG

DURABLE HIGH PERFORMANCE GEAR LOCKERS



Hallowell

www.Hallowell-List.com

OPEN-FRONT ALL-WELDED SPORT LOCKERS

THE Open Gear™ THE PERFECT GEAR LOCKER

Open-front all-welded lockers are perfect for equipment, gear and tool storage. All lockers ship fully-assembled ready to use.

Perfect for all team sports, police, SWAT, riot, fire and other emergency response organizations.

FEATURES:

BODY CONSTRUCTION: All-welded construction, 16 gauge heavy-duty body and 18 gauge back, Open-front for maximum ventilation and quick access, Sides are diamond perforated for added ventilation and are formed to be integral with the front vertical frame, base is reinforced using two front-to-back channel stiffeners welded to the underside.

BODY STYLES: Open front

HINGES: Continuous piano type

HANDLE: Upper security box includes a finger pull padlock hasp

COAT ROD: Full-width 1" O.D. stainless steel coat rod

NOTES: All lockers ship fully-assembled ready to use, Number plates (#1-up) are included, Locks are not included. Order with or without foot locker, Foot locker is ideal for storing larger items and doubles as a heavy-duty reinforced seat. The seat lifts up for easy access to contents from the top. Foot locker includes a simple rigid padlock hasp (lock not included)



Security-Box

Stainless steel coat rod

Underside of seat is reinforced to support up to 350 lbs.



**COLOR
SELECTION**

**736
SPORT SILVER
(SS)**

Width	Depth	Opening Height	Frame Height	Tier	Grouping	Openings Per Group	Fully-Assembled Cat No.	Color Selection
WITHOUT FOOT LOCKER								
24	22	72	72	1	1-wide	1	HSBN422-1C	SS
WITH FOOT LOCKER								
24	22	72	72	1	1-wide	1	HSBF422-1C	SS

5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

STOCK → PROGRAM

Quick Ship

THE FASTEST SHIPPING IN THE INDUSTRY...



ALL-WELDED MILITARY GEAR LOCKERS



Designed to be the solution to all your military gear storage requirements, our TA-50 Equipment Storage Lockers are secure, durable and are guaranteed to last the lifetime of your facility.

TA-50 FEATURES

BODY CONSTRUCTION: All-welded construction, 16 gauge diamond perforated sides, 18 gauge back, 16 gauge top and 16 gauge reinforced bottom.

DOORS: 14 gauge diamond perforated doors with 18 gauge full-height door stiffener for both doors is standard.

HANDLE: High-security 3-point cremone turn-handle latching

SHELVES: 16 gauge upper shelf located 12" down from top, 16 gauge lower shelf located 18" up from bottom


DOOR HINGES: 16 gauge continuous piano hinge

ACCESSORIES: Stainless steel coat rod and two back hooks located under upper shelf

WARRANTY: Lifetime



High-Security 3-point
Cremone
turn-handle latching



COLOR
SELECTION

HALLOWELL GRAY
(HG)



Width	Depth	Opening Height	Frame Height	Grouping	Openings Per Group	Fully-Assembled Cat No.	Color Selection
42	24	84	84	1-wide	1	TA50-422484-1	HG

ALL-WELDED HIGH SECURITY LOCKERS

Hallowell

www.Hallowell-List.com

SECURITYMAX™ ALL-WELDED LOCKERS

SECURITY MAX™

Hallowell SecurityMax heavy-duty all-welded lockers offer the highest available security by incorporating an extra heavy-duty three point turn-handle locking mechanism and the versatility of adjustable interior shelves. Available in ventilated and solid locker versions.

SecurityMax lockers are ideal where heavy-duty and versatile storage is needed for tools, gear, sports equipment, uniforms and clothing.

FEATURES:

BODY CONSTRUCTION: All-welded construction, 16 gauge heavy-duty body and 18 gauge back, Sides formed to be integral with front vertical frame and are reinforced using two front-to-back channel stiffeners welded to the underside.

BODY STYLES: One tier, one wide. Available in solid or ventilated versions

HINGES: Continuous piano type


HANDLE Cremone 3-point high-security turn handle latching with heavy-duty 3/8" lock rods which engage the top and bottom locker frames while the cam engages the frame at the door jamb near the handle

DOOR: 14 gauge door with a full height welded in door stiffener

SHELVES: Upper welded hat shelf. Additional shelves can be ordered and are adjustable on 3" centers.

COAT ROD: 3/8" diameter rod is welded to underside of upper shelf

HOOKS: Two single back hooks



3 point high
security turn
handle latching



Width	Depth	Opening Height	Frame Height	Tier	Grouping	Openings Group	Fully-Assembled Cat No.	Color Selection
VENTILATED MODELS								
18	22	72	72	1	1-wide	1	HTA822AS1	PL
24	22	72	72	1	1-wide	1	HTA422AS1	PL
SOLID MODELS								
18	22	72	72	1	1-wide	1	HTC822AS1	PL
24	22	72	72	1	1-wide	1	HTC422AS1	PL
ADDITIONAL SHELVES								
18	22						HTAS1822	PL
24	22						HTAS2422	PL

COLOR
SELECTION

711
PLATINUM (PL)

5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

45


STOCK → PROGRAM

THE FASTEST SHIPPING IN THE INDUSTRY...



Superior® Bulk Storage Lockers
are the ideal solution for condos
and any facility that requires
additional secure storage.

BULK STORAGE LOCKERS

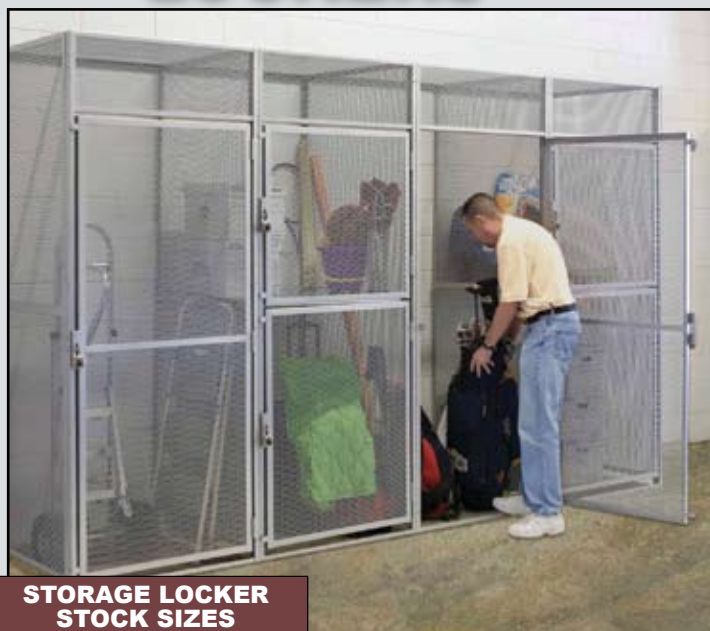

STORAGE LOCKER STOCK SIZES


Standard Sizes available in single and double tier configurations

Width	3'-0"	4'-0"
Depths	3'-0"	4'-0" 5'-0"
Height	7'-6"	

Front Extension Panels are available in 6" wide increments from 6" wide to 48" wide to create oversized width units.

- **Single & double tier models**
- **Economical • Secure • Durable**
- **Fast & Easy Installation**
- **Low life-cycle cost • Attractive**

Hallowell® all steel storage lockers have been designed to provide maximum security and durability. Cost effective and ease of installation make them the perfect choice. The use of Hallowell manufactured lockers creates an esthetically appealing installation that when properly promoted can be a tremendous asset to the building and of great value to the users.

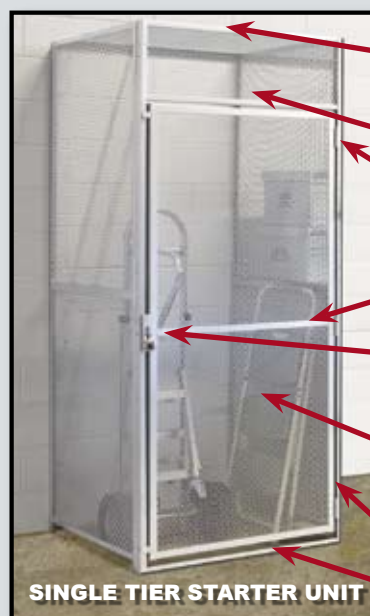

Shown with optional expanded metal top

13" transom

Heavy-duty 13 gauge 7-knuckle 3-1/2" butt hinges

Welded door brace for added rigidity

Welded padlock hasp and ergonomic welded-on door pull

1/2" 16 gauge flattened expanded metal doors and sides

Heavy-gauge vertical frame channels and horizontal frame angles

SINGLE TIER STARTER UNIT

Tops are recommended for situations where the ceiling height is 8'-6" or more when using standard 7'-6" high component modules.

Shelves are used as dividers between top and bottom openings of double tier lockers. May also be used in single tier lockers for additional floor space and may be shorter than depth of locker to provide space for long items.

Backs are required for back-to-back installations or where a single row is set away from a wall.


Bottoms are recommended for use on all single or double tier lockers if dampness prevails.




CUSTOM INSTALLATIONS

Hallowell Storage Lockers' unique construction provides for a simple, easy way of handling interference from overhead pipes and/or ducts.

Repair Angle 16 gauge 36" long repair angle is pre-punched on 2" centers to "heal" cuts in dividers or transom. Two bolts and clips are included with each angle.



Showing cut out (with repair angles) to allow for interfering duct.



View of pipe through transom (or divider) with repair angle.

COLOR SELECTION

**736
SPORT SILVER
(SS)**

Custom sizes are also available. Contact our Sales and Marketing Department at **1-866-566-0500** for availability.

NOTE: In the interest of safety, all Hallowell lockers must be securely anchored to the floor and/or wall.

Serving the storage needs of thousands of residential, commercial and institutional buildings throughout the U.S.A. for more than 70 years!

Hallowell®

www.Hallowell-List.com

BULK STORAGE LOCKERS

S P E C I F I C A T I O N S

General: Lockers shall be Hallowell® Bulk Storage Lockers with all welded components as manufactured by List Industries Inc., 2823 W. Orange Ave., Apopka, FL 32708, www.Hallowell-List.com. Quantities, sizes and arrangements shall be as shown on drawings.

Locker Fronts: All doors, whether single or double tier, shall consist of 1/2" 16 gauge flattened expanded metal framed by 1-1/4" x 1-1/4" 12 gauge formed angles. Single tier doors shall have an angle reinforcement across center. Doors shall be pre-hung in frames at the factory, with all hinges, padlock hasps and door strikes securely welded in position. Door frames shall be fabricated from 1-1/2" x 1" 14 gauge formed channels on the sides and 1-1/2" x 1" 14 gauge formed angles at top and bottom. All frames shall be pre-punched for ease of installation. All front assemblies are 1-1/2" deep and shall include a 13" high upper transom above door.

Vertical Dividers: Shall be 1/2" 16 gauge flattened expanded metal securely welded to 1-1/8" x 1-1/8" 14 gauge formed angles. Shelf support channels shall be fabricated of 14 gauge steel and be welded to vertical dividers (sides) on inside and outside of intermediate double tier dividers and on inside only of double tier row end dividers as well as on inside of all single tier dividers. All vertical dividers are 1-1/2" less than nominal locker depth to allow for 1-1/2" deep door front assembly.

Repair Angles: 16 gauge 36" long repair angle is pre-punched on 2" centers to "heal" cuts in dividers or transom. Two bolts and clips are included with each angle.

Shelves: Where required, shall be of 22 gauge galvanized sheet steel with double bends at front and back. Provided as standard for all double tier lockers to separate upper tier from lower tier. Provided in multiple 12" (nominal) deep planks to meet locker depth. Galvanized shelves ship unpainted.

Backs: Optional, shall be of 1/2" 16 gauge flattened expanded metal frameless design. Required at back-to-back conditions or where locker backs are away from walls.

Bottoms (optional): Where required, shall be of 22 gauge galvanized sheet steel with double bend at front and back. Galvanized bottoms ship unpainted. Provided in multiple 12" (nominal) deep planks to meet locker depth.

Tops (optional): Shall be of 1/2" 16 gauge flattened expanded metal with a 16 gauge angle welded at rear. Include mounting clips and bolts. Recommended where ceiling height is 12" or more above locker height.

Finish: All fronts, vertical dividers, backs and tops shall include powder coat finish in #736 Sport Silver. Shelves and/or bottoms shall be galvanized sheet steel, unpainted.

Installation: Vertical dividers and door frames shall be securely anchored to wall and/or floor with an anchoring system selected by the installer. All door frames, tops and backs shall be fastened together using 1/4" x 3/4" cadmium plated bolts and nuts, to be provided by installer.

STARTER UNITS					ADDER UNITS	
W	D	H	Sport Silver Part No.	Wt. (lbs.)	Sport Silver Part No.	Wt. (lbs.)
SINGLE TIER						
36	36	90	BSL363690-1S-SS	119	BSL363690-1A-SS	88
36	48	90	BSL364890-1S-SS	133	BSL364890-1A-SS	98
36	60	90	BSL366090-1S-SS	145	BSL366090-1A-SS	102
48	36	90	BSL483690-1S-SS	129	BSL483690-1A-SS	98
48	48	90	BSL484890-1S-SS	143	BSL484890-1A-SS	105
48	60	90	BSL486090-1S-SS	157	BSL486090-1A-SS	112
DOUBLE TIER						
36	36	45	BSL363690-2S-SS	127	BSL363690-2A-SS	105
36	48	45	BSL364890-2S-SS	155	BSL364890-2A-SS	116
36	60	45	BSL366090-2S-SS	178	BSL366090-2A-SS	127
48	36	45	BSL483690-2S-SS	137	BSL483690-2A-SS	115
48	48	45	BSL484890-2S-SS	165	BSL484890-2A-SS	126
48	60	45	BSL486090-2S-SS	188	BSL486090-2A-SS	137
ACCESSORIES FOR BULK STORAGE LOCKERS						
TOP PANELS						
36	36		4803636SS	9	• Units available right-hand or left-hand hinged • Single Tier: Overall Height 90" Opening Height: 75-1/2"	
36	48		4803648SS	10		
36	60		4803660SS	11		
48	36		4804836SS	12		
48	48		4804848SS	13		
48	60		4804860SS	14	• Double Tier: Overall Height 90" Upper Opening Height: 31-1/2" Lower Opening Height: 42"	
FRONT EXTENSION PANELS						
6	90		4600690SS	20		
12	90		4601290SS	23		
18	90		4601890SS	26		
24	90		4602490SS	29		
BACK PANELS						
36	90		4703690SS	30	Custom sizes are also available. Contact our Sales and Marketing Department for more information.	
48	90		4704890SS	38		
REPAIR ANGLES						
36			20100	3		



The Heavy-Duty 7 knuckle hinges and door stops are welded to the frame for extra strength and security of contents, imparting a more finished and attractive appearance to the unit.



Optional 16 gauge 1/2" expanded metal top makes for a very secure structure adding rigidity and ensuring a higher level of protection from theft.



Door handles are formed from one solid piece of steel and are welded to the frame for extra strength.

COLOR SELECTION

736 SPORT SILVER (SS)

5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

47

STOCK → PROGRAM

THE FASTEST SHIPPING IN THE INDUSTRY...



THE PERFECT TRAFFIC CONTAINMENT SOLUTION

Security • Traffic Control • Portability

- In Stock for shipment within 5 days of receipt of order
- Quick and easy installation. Install between two walls instantly without anchors to walls or floor
- Simplified, patented pressure lock system
- Floor anchors are not required but are available for special installations
- Compact, fold-up size and heavy duty swivel casters make moving and storage easy
- Plated finish
- Padlock hasp is standard
- Cylinder locks are available for additional security
- Two or more gates can be joined together for large expanse

Here's how the exclusive Superior® Pressure Lock System works:

1. Raise unit retainer channel to vertical position and secure
2. Extend gate until rubber bumpers touch both walls
3. Lower the male lock channel (with pin) until it rests on carriage channels within guides and locking bracket.
4. Lower female lock channel (with adjustment holes) until it rests within the male lock channel with pin.
Pin need not engage a hole in female lock channel.
5. Raise both channels until pin engages the hole immediately to the right. Applying moderate pressure, push both channels down until they rest within guides and locking bracket. Lock in position.

Superior® Portable Gates are ideal for:

Schools

Shopping Malls

Recreation Centers

Factories

Libraries

Hospitals

Office Buildings

Financial Institutions

Theaters

Museums



**Five sizes to accommodate 3'-6" wide to 18'-0" wide conditions.
Connect multiple gates together for wider applications.**

Model	For Openings	Collapsed Size	Height	Weight (lbs)
P601-06	3'-6" to 6'-0"	19" x 30"	6'-6-1/2"	193
P601-09	6'-0" to 9'-0"	19" x 30"	6'-6-1/2"	197
P601-12	7'-0" to 12'-0"	24" x 30"	6'-6-1/2"	254
P601-15	11'-0" to 15'-0"	30" x 30"	6'-6-1/2"	311
P601-18	13'-0" to 18'-0"	30" x 30"	6'-6-1/2"	374
PG-CL	Cylinder Locks			
PG-FAA	Floor Anchors			
PG-A	Additional Anchors			

**COLOR
SELECTION**
**PLATED
FINISH**

**FUNCTIONAL
DURABLE
ADAPTABLE**



Hallowell

www.Hallowell-List.com

800 SERIES HEAVY-GAUGE KD CABINETS


800 SERIES Heavy-Gauge KD Cabinets

Gives maximum protection to tools, dies, delicate instruments, supplies, and personal belongings. Neat and attractive in appearance. Designed to meet government requirements.

FEATURES:

- Cabinet is fabricated from heavy gauge steel for appearance and durability.
- All metal parts are precision engineered. No bolt heads show in front or on side panels.
- Positive three-point locking (top, center and bottom) and theft resistant hinges for security.
- Chrome-plated locking handle has built-in grooved key cylinder lock.
- Shelves easily adjust up or down in 2" increments. Triple flanged front for added strength (300 lb. capacity).
- Doors swing out quietly a full 180° and are "HAT" section reinforced.
- Corner Foot Gussets provide added rigidity and stability

All-welded door frame assembly assures even closure all the way around. Doors are factory assembled in frame to insure accurate fit.



Includes full-height door stiffener. Doors swing a full 180°.



STORAGE Model 815




WARDROBE Model 835



COMBINATION Model 855

Width	Depth	Height	Knock-Down Cat. No.	Fully-Assembled Cat. No.	Color Selection
Storage Cabinets					
36	18	78	815-S-18	815-S-18A	PT
36	24	78	815-S-24	815-S-24A	PT
Wardrobe Cabinets					
36	18	78	835-W-18	835-W-18A	PT
36	24	78	835-W-24	835-W-24A	PT
Combination Cabinets					
36	18	78	855-C-18	855-C-18A	PT
36	24	78	855-C-24	855-C-24A	PT
Storage Cabinet Conversion Kit					
36	18		S-3618	-----	PT
36	24		S-3624	-----	PT
Wardrobe Cabinet Conversion Kit					
36			W-36		
Combination Cabinet Conversion Kit					
36	18		C-3618		
36	24		C-3624		
Combination Cabinet Conversion Kit (Includes 1 center partition and 3 half width shelves, 1 half width coat rod)					



**STORAGE
CABINET KIT**



**COMBINATION
CABINET KIT**

WARDROBE CABINET KIT



**COLOR
SELECTION**

**729
PARCHMENT (PT)**

5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

49

STOCK → PROGRAM

THE FASTEST SHIPPING IN THE INDUSTRY...



FOR REALLY TOUGH INDUSTRIAL APPLICATIONS

DURATOUGH™

Classic and Galvanite™ Series All-Welded Cabinets

Hallowell DuraTough all-welded cabinets are designed to withstand the toughest industrial applications.

Our all-welded cabinets are available in **Heavy-Duty** and **Extra Heavy-Duty** models for both our Classic and Galvanite corrosion resistant series.

Classic Series cabinets are fabricated from prime grade cold rolled sheet steel.

Galvanite Series cabinets are fabricated from galvanized sheet steel which has a zinc-iron alloy coating that is applied at the mill providing protection against high-humidity and moist environments. This coating also prevents corrosion from spreading when the paint and/or coating is scratched away.

Heavy-Duty cabinets are fabricated from 16 gauge sheet steel and are fully-welded creating a rigid, durable unit.

Extra Heavy-Duty cabinets are fabricated from 14 gauge steel which is 25% thicker than 16 gauge providing MAXIMUM durability.



Standard Features for all DuraTough™ Classic and Galvanite™ Series Cabinets

- All-welded construction
- Double door design
- Solid doors are reinforced with an 18 gauge full-height door stiffener providing a rigid torque-free door.
- 3-point turn handle locking using 3/8" diameter locking rods operated by a 3/16" gauge steel handle. Handle is painted to match cabinet.
- Heavy-duty 13 gauge 7-knuckle 3-1/2" butt hinges welded to door and securely riveted to frame.
- Solid sides are formed to be integral with vertical door frame.
- Top is formed to be integral with horizontal top door frame.
- Bottom is formed to be integral with horizontal bottom door frame and includes double return bends at all four sides maximizing unit rigidity.

- Back is welded to cabinet top, bottom and sides
- Shelves are formed to provide maximum capacity and are adjustable on 3" centers. Shelves bolt to shelf support channels which are welded to sides.

- 78" high storage cabinets include 4-adjustable shelves
- 60" high storage cabinets include 3-adjustable shelves
- 42" high storage cabinets include 2-adjustable shelves
- 78" high combination cabinets include one full-width upper shelf, a center partition, 3 partial-width shelves and one partial-width coat rod

- Optional leg kits are available and can be bolted on to all DuraTough cabinets.
- Color: 725 Hallowell Gray

COLOR
SELECTION

725
HALLOWELL GRAY
(HG)

CLASSIC & GAVANITE SERIES

Hallowell

www.Hallowell-List.com

DURATOUGH™ ALL-WELDED CABINETS

DuraTough™ Classic Series

Catalog Number	Type	Width (In)	Depth (In)	Height (In)	No. of Shelves
HEAVY-DUTY-16 GAUGE					
HW6SC6142-2HG	Storage	36	21	42	2
HW6SC6160-3HG	Storage	36	21	60	3
HW6SC6178-4HG	Storage	36	21	78	4
HW6SC6478-4HG	Storage	36	24	78	4
HW6SC8460-3HG	Storage	48	24	60	3
HW6SC8478-4HG	Storage	48	24	78	4
HW6SC0478-4HG	Storage	60	24	78	4
HW6CC6478-4HG	Combination	36	24	78	4
HW6CC8478-4HG	Combination	48	24	78	4
HW6CC0478-4HG	Combination	60	24	78	4
ADDITIONAL SHELVES, HEAVY-DUTY-16 GAUGE					
HW6SCS61HG	Shelf	36	21	----	1
HW6SCS64HG	Shelf	36	24	----	1
HW6SCS84HG	Shelf	48	24	----	1
EXTRA HEAVY-DUTY-14 GAUGE					
HW4SC6142-2HG	Storage	36	21	42	2
HW4SC6160-3HG	Storage	36	21	60	3
HW4SC6178-4HG	Storage	36	21	78	4
HW4SC6478-4HG	Storage	36	24	78	4
HW4SC8460-3HG	Storage	48	24	60	3
HW4SC8478-4HG	Storage	48	24	78	4
HW4SC0478-4HG	Storage	60	24	78	4
HW4CC6478-4HG	Combination	36	24	78	4
HW4CC8478-4HG	Combination	48	24	78	4
HW4CC0478-4HG	Combination	60	24	78	4
ADDITIONAL SHELVES, EXTRA HEAVY-DUTY-14 GAUGE					
HW4SCS61HG	Shelf	36	21	----	1
HW4SCS64HG	Shelf	36	24	----	1
HW4SCS84HG	Shelf	48	24	----	1



18-gauge full-height door stiffener provides maximum rigidity to both doors



Heavy-Duty 3/16" thick steel handle with padlock hasp.



1/8" thick latch and 3/8" diameter lock rods insure maximum security



CORROSION RESISTANT



DuraTough™ Galvanite Series

Catalog Number	Type	Width (In)	Depth (In)	Height (In)	No. of Shelves
HEAVY-DUTY-16 GAUGE					
HWG6SC6142-2HG	Storage	36	21	42	2
HWG6SC6160-3HG	Storage	36	21	60	3
HWG6SC6178-4HG	Storage	36	21	78	4
HWG6SC6478-4HG	Storage	36	24	78	4
HWG6SC8460-3HG	Storage	48	24	60	3
HWG6SC8478-4HG	Storage	48	24	78	4
HWG6SC0478-4HG	Storage	60	24	78	4
HWG6CC6478-4HG	Combination	36	24	78	4
HWG6CC8478-4HG	Combination	48	24	78	4
HWG6CC0478-4HG	Combination	60	24	78	4
ADDITIONAL SHELVES, HEAVY-DUTY-16 GAUGE					
HWG6SCS61HG	Shelf	36	21	----	1
HWG6SCS64HG	Shelf	36	24	----	1
HWG6SCS84HG	Shelf	48	24	----	1
EXTRA HEAVY-DUTY-14 GAUGE					
HWG4SC6142-2HG	Storage	36	21	42	2
HWG4SC6160-3HG	Storage	36	21	60	3
HWG4SC6178-4HG	Storage	36	21	78	4
HWG4SC6478-4HG	Storage	36	24	78	4
HWG4SC8460-3HG	Storage	48	24	60	3
HWG4SC8478-4HG	Storage	48	24	78	4
HWG4SC0478-4HG	Storage	60	24	78	4
HWG4CC6478-4HG	Combination	36	24	78	4
HWG4CC8478-4HG	Combination	48	24	78	4
HWG4CC0478-4HG	Combination	60	24	78	4
ADDITIONAL SHELVES, EXTRA HEAVY-DUTY-14 GAUGE					
HWG4SCS61HG	Shelf	36	21	----	1
HWG4SCS64HG	Shelf	36	24	----	1
HWG4SCS84HG	Shelf	48	24	----	1

DuraTough™ Cabinet Leg Kits

Catalog No	Type	Width (In)	Depth (In)	Height (In)	Legs Per Kit
HW4LK-1G-HG	Leg Kit	4	21	4	2
HW4LK-4G-HG	Leg Kit	4	24	4	2

Leg kits can be added to any Hallowell DuraTough Cabinet. Legs are fabricated from galvanneal corrosion resistant steel and are easily bolted to cabinet bottom. Includes hardware for field attachment.



COLOR
SELECTION

725
HALLOWELL GRAY
(HG)

5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS


51



Hi-Tech shelving is a complete shelving line with the strength needed to handle most industrial applications and versatility for today's modern facilities. Every shelving unit is designed and engineered to meet the highest standards.

A full complement of accessories including full dividers, partial dividers, label holders, swinging doors, post splices for multilevel systems and foot plates are available to complete your system.

**Hallowell Hi-Tech®
Industrial grade
steel shelving
continues a tradition of
quality established
generations ago.**

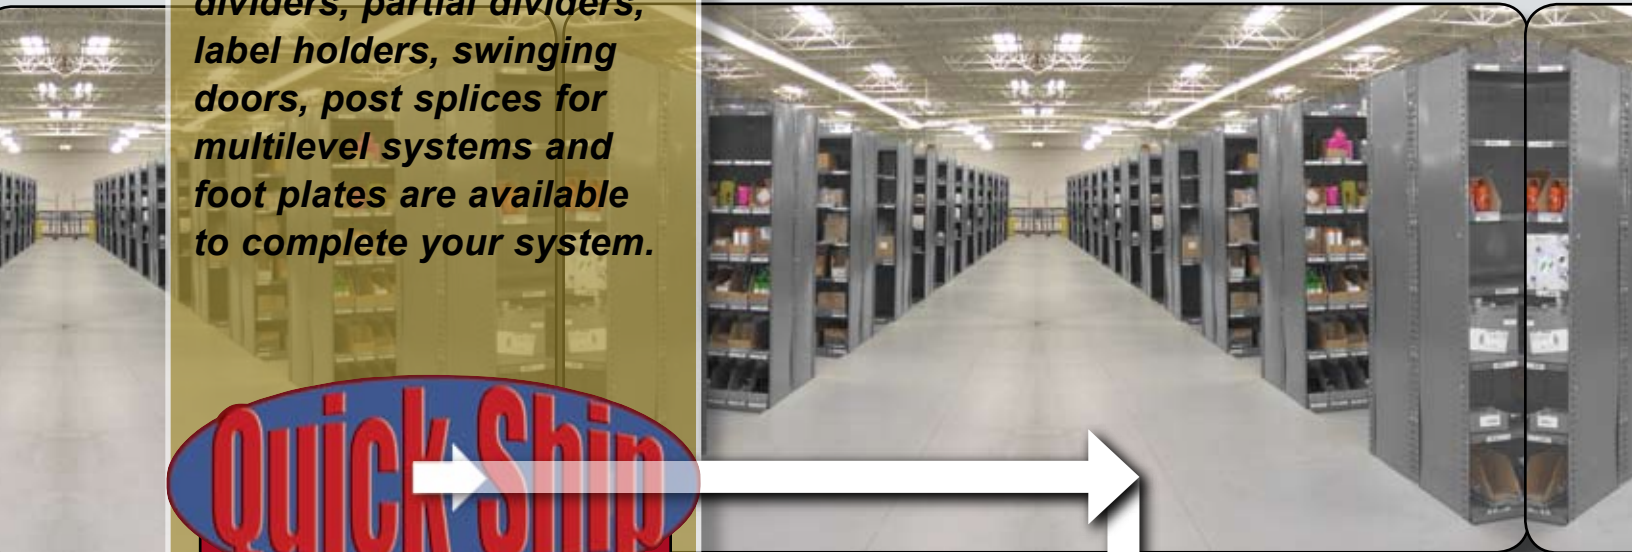

Quick Ship

**5 DAY SHIPPING
ON ALL IN-STOCK
SHELVING**





HI-TECH

Hallowell Industrial Grade Steel Shelving

OPEN SHELVING MEDIUM, HEAVY AND EXTRA HEAVY-DUTY



Box beam adjustable shelves



Open Starter Units Include:

Two beaded front posts, two angle back posts, one pair of back sway braces, two pair of side sway braces and shelves with shelf clips applicable to unit ordered.

Open Adder Units Include:

One beaded front post, two angle back posts, one pair of back sway braces, one pair of side sway braces and shelves with shelf clips applicable to unit ordered.



HEAVY DUTY SHELVES

- Tubular welded box beam front and rear for maximum strength
- Exclusive triple bend side flanges for added strength
- Lapped and welded corners
- Top of shelf is punched to accept shelf dividers
- Uses four one piece shelf clips per shelf
- Can be installed together with both Beaded Front and Angle Back Posts as well as T-Posts and H-Posts



ANGLE BACK POSTS AND T-POSTS

- Roll formed into a unique angle shape for maximum strength
- The long leg is punched on 1-1/2" centers to allow independent shelf adjustment
- Angle Posts can be used in place of Beaded Front Posts if desired

COLOR
SELECTION

725
HALLOWELL GRAY
(HG)

**Hi-Tech specially designed components
allow for fast and easy assembly.**

CLOSED SHELVING MEDIUM, HEAVY AND EXTRA HEAVY-DUTY

Hallowell®

www.Hallowell-List.com

HI-TECH STEEL SHELVING

Closed Starter Units Include:

Two beaded front posts, two angle back posts, one set of back panels, two sets of side panels and shelves with shelf clips applicable to unit ordered.

Closed Adder Units Include:

One beaded front post, two angle back posts, one set of back panels, one set of side panels and shelves with shelf clips applicable to unit ordered.



Box beam adjustable shelves



Base strip closes bottom to prevent debris accumulation



Swinging doors allow cabinet-style storage



Shelf dividers for organized storage

BEADED FRONT POSTS



- Beaded for strength
- Flush to permit straight-in/straight-out shelf installation, shelf changing and shelf loading. No tilting needed
- Get the full use of shelf area
- Punched on 1-1/2" centers to allow positioning of one shelf independent of other shelves



H-POSTS

- Designed for high-density applications
- More than twice the capacity of standard posts
- Used at front and back
- Used with standard Hi-Tech components



ONE PIECE SHELF CLIP

- Each shelf requires four of these sturdy and compact clips
- Clips key firmly into post slots to hold shelves securely in place
- Fits Beaded Front, Angle Back Posts and T-Posts
- Provides independent shelf positioning on 1-1/2" centers
- Non-Intrusive clip sits flush with inside edge of front posts



STARTER
UNIT



ADDER
UNIT



5 SHELF
UNIT



6 SHELF
UNIT



8 SHELF
UNIT

W	D	H		5-Shelf Unit Cat No.	6-Shelf Unit Cat No.	8-Shelf Unit Cat No.	Shelf Capacity*
Medium-Duty							
36	12	87	Starter	4510-12	4511-12	4513-12	500*
36	12	87	Adder	A4510-12	A4511-12	A4513-12	500*
36	18	87	Starter	4510-18	4511-18	4513-18	500*
36	18	87	Adder	A4510-18	A4511-18	A4513-18	500*
36	24	87	Starter	4510-24	4511-24	4513-24	500*
36	24	87	Adder	A4510-24	A4511-24	A4513-24	500*
48	12	87	Starter	4710-12	4711-12	4713-12	375*
48	12	87	Adder	A4710-12	A4711-12	A4713-12	375*
48	18	87	Starter	4710-18	4711-18	4713-18	375*
48	18	87	Adder	A4710-18	A4711-18	A4713-18	375*
48	24	87	Starter	4710-24	4711-24	4713-24	350*
48	24	87	Adder	A4710-24	A4711-24	A4713-24	350*
Heavy-Duty							
36	12	87	Starter	5510-12	5511-12	5513-12	800*
36	12	87	Adder	A5510-12	A5511-12	A5513-12	800*
36	18	87	Starter	5510-18	5511-18	5513-18	800*
36	18	87	Adder	A5510-18	A5511-18	A5513-18	800*
36	24	87	Starter	5510-24	5511-24	5513-24	800*
36	24	87	Adder	A5510-24	A5511-24	A5513-24	800*
48	12	87	Starter	5710-12	5711-12	5713-12	400*
48	12	87	Adder	A5710-12	A5711-12	A5713-12	400*
48	18	87	Starter	5710-18	5711-18	5713-18	450*
48	18	87	Adder	A5710-18	A5711-18	A5713-18	450*
48	24	87	Starter	5710-24	5711-24	5713-24	500*
48	24	87	Adder	A5710-24	A5711-24	A5713-24	500*
Extra Heavy-Duty							
36	12	87	Starter	7510-12	7511-12	7513-12	1100*
36	12	87	Adder	A7510-12	A7511-12	A7513-12	1100*
36	18	87	Starter	7510-18	7511-18	7513-18	1200*
36	18	87	Adder	A7510-18	A7511-18	A7513-18	1200*
36	24	87	Starter	7510-24	7511-24	7513-24	1250*
36	24	87	Adder	A7510-24	A7511-24	A7513-24	1250*
48	12	87	Starter	7710-12	7711-12	7713-12	750*
48	12	87	Adder	A7710-12	A7711-12	A7713-12	750*
48	18	87	Starter	7710-18	7711-18	7713-18	900*
48	18	87	Adder	A7710-18	A7711-18	A7713-18	900*
48	24	87	Starter	7710-24	7711-24	7713-24	900*
48	24	87	Adder	A7710-24	A7711-24	A7713-24	900*
Additional Shelves							
				Medium-Duty Cat No	Heavy-Duty Cat No.	Extra Heavy-Duty Cat No.	
36	12			5135-3612	5138-3612	5139-3612	See Above
36	18			5135-3618	5138-3618	5139-3618	See Above
36	24			5135-3624	5138-3624	5139-3624	See Above
48	12			5135-4812	5138-4812	5139-4812	See Above
48	18			5135-4818	5138-4818	5139-4818	See Above
48	24			5135-4824	5138-4824	5139-4824	See Above

* Shelf capacity based on a factor of 1.65

Color for all components 725 Hallowell Gray. Optional colors are available at a nominal charge, additional lead times apply.

OPEN UNITS: Starter units include two beaded front posts, two angle back posts, one pair back sway braces, two pair side sway braces and 5-8 shelves. Adder units include one beaded front post, two angle back posts, one pair back sway braces, one pair side sway braces and 5-8 shelves.

**COLOR
SELECTION**

725
HALLOWELL GRAY
(HG)

CLOSED SHELVING MEDIUM, HEAVY AND EXTRA HEAVY-DUTY

Hallowell®

www.Hallowell-List.com

HI-TECH™ SHELVING



STARTER UNIT



ADDER UNIT



5 SHELF UNIT



6 SHELF UNIT



8 SHELF UNIT

W	D	H		5-Shelf Unit Cat No.	6-Shelf Unit Cat No.	8-Shelf Unit Cat No.	Shelf Capacity*
Medium-Duty							
36	12	87	Starter	4520-12	4521-12	4523-12	500*
36	12	87	Adder	A4520-12	A4521-12	A4523-12	500*
36	18	87	Starter	4520-18	4521-18	4523-18	500*
36	18	87	Adder	A4520-18	A4521-18	A4523-18	500*
36	24	87	Starter	4520-24	4521-24	4523-24	500*
36	24	87	Adder	A4520-24	A4511-24	A4523-24	500*
48	12	87	Starter	4720-12	4721-12	4723-12	375*
48	12	87	Adder	A4720-12	A4721-12	A4723-12	375*
48	18	87	Starter	4720-18	4721-18	4723-18	375*
48	18	87	Adder	A4720-18	A4721-18	A4723-18	375*
48	24	87	Starter	4720-24	4721-24	4723-24	350*
48	24	87	Adder	A4720-24	A4721-24	A4723-24	350*
Heavy-Duty							
36	12	87	Starter	5520-12	5521-12	5523-12	800*
36	12	87	Adder	A5520-12	A5521-12	A5523-12	800*
36	18	87	Starter	5520-18	5521-18	5523-18	800*
36	18	87	Adder	A5520-18	A5521-18	A5523-18	800*
36	24	87	Starter	5520-24	5521-24	5523-24	800*
36	24	87	Adder	A5520-24	A5521-24	A5523-24	800*
48	12	87	Starter	5720-12	5721-12	5723-12	400*
48	12	87	Adder	A5720-12	A5721-12	A5723-12	400*
48	18	87	Starter	5720-18	5721-18	5723-18	450*
48	18	87	Adder	A5720-18	A5721-18	A5723-18	450*
48	24	87	Starter	5720-24	5721-24	5723-24	500*
48	24	87	Adder	A5720-24	A5721-24	A5723-24	500*
Extra Heavy-Duty							
36	12	87	Starter	7520-12	7521-12	7523-12	1100*
36	12	87	Adder	A7520-12	A7521-12	A7523-12	1100*
36	18	87	Starter	7520-18	7521-18	7523-18	1200*
36	18	87	Adder	A7520-18	A7521-18	A7523-18	1200*
36	24	87	Starter	7520-24	7521-24	7523-24	1250*
36	24	87	Adder	A7520-24	A7521-24	A7523-24	1250*
48	12	87	Starter	7720-12	7721-12	7723-12	750*
48	12	87	Adder	A7720-12	A7721-12	A7723-12	750*
48	18	87	Starter	7720-18	7721-18	7723-18	900*
48	18	87	Adder	A7720-18	A7721-18	A7723-18	900*
48	24	87	Starter	7720-24	7721-24	7723-24	900*
48	24	87	Adder	A7720-24 A	7721-24	A7723-24	900*
Additional Shelves							
				Medium-Duty Cat No.	Heavy-Duty Cat No.	Extra Heavy-Duty Cat No.	
36	12			5135-3612	5138-3612	5139-3612	See Above
36	18			5135-3618	5138-3618	5139-3618	See Above
36	24			5135-3624	5138-3624	5139-3624	See Above
48	12			5135-4812	5138-4812	5139-4812	See Above
48	18			5135-4818	5138-4818	5139-4818	See Above
48	24			5135-4824	5138-4824	5139-4824	See Above

* Shelf capacity based on a factor of 1.65

Color for all components 725 Hallowell Gray. Optional colors are available at a nominal charge, additional lead times apply.

CLOSED UNITS: Starter units include two beaded front posts, two angle back posts, one back panel assembly, two side panel assemblies and 5-8 shelves. Adder units include one beaded front post, two angle back posts, one back panel, one side panel and 5-8 shelves.

5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

57

BEADED FRONT POSTS



True flush construction. Slotted on 1-1/2" centers to permit easy shelf adjustment. Multiple posts can be spliced for added height.

Part No	Width	Depth	Height
5002-3W	11/16"	2-9/16"	3'3"
5002-6W	11/16"	2-9/16"	6'3"
5002-7W	11/16"	2-9/16"	7'3"
5002-8W	11/16"	2-9/16"	8'3"
5002-10W	11/16"	2-9/16"	10'3"
5002-12W	11/16"	2-9/16"	12'3"
5002-14W	11/16"	2-9/16"	14'3"
5002-16W	11/16"	2-9/16"	16'3"

ANGLE BACK POSTS



Angles for single or end units. Slotted on 1-1/2" centers to permit easy shelf adjustment. Multiple posts can be spliced for added height.

Part No	Width	Depth	Height
5004-3	1-3/16"	2-5/16"	3'3"
5004-6	1-3/16"	2-5/16"	6'3"
5004-7	1-3/16"	2-5/16"	7'3"
5004-8	1-3/16"	2-5/16"	8'3"
5004-10	1-3/16"	2-5/16"	10'3"
5004-12	1-3/16"	2-5/16"	12'3"
5004-14	1-3/16"	2-5/16"	14'3"
5004-16	1-3/16"	2-5/16"	16'3"


T- POSTS



Constructed by spot welding two back posts together. For use when adjoining models are added to form a continuous row. Multiple posts can be spliced for added height.

Part No	Width	Depth	Height
5006-3	2-3/8"	2-5/16"	3'3"
5006-6	2-3/8"	2-5/16"	6'3"
5006-7	2-3/8"	2-5/16"	7'3"
5006-8	2-3/8"	2-5/16"	8'3"
5006-10	2-3/8"	2-5/16"	10'3"
5006-12	2-3/8"	2-5/16"	12'3"
5006-14	2-3/8"	2-5/16"	14'3"
5006-16	2-3/8"	2-5/16"	16'3"

POST SPLICE CHANNELS



A channel formed internal splice. Used to splice beaded front posts for added height. Also, to splice back posts and T-posts

Part No	Width	Depth	Height
5009	-	-	-

BACK SWAY BRACES



1" x 11 ga. steel strip with safety edges. One pair of braces are bolted together at center to form an "X". Ends are rounded and pierced for mounting to rear posts.

See technical data on page 67 for bracing information

Part No	Width	Depth	Height
5342-44*	36"	-	-
5342-55*	42"	-	-
5342-55*	48"	-	-

*Also available from stock in Platinum color

SIDE SWAY BRACES



1" x 11 ga. steel strip with safety edges. One pair of braces are bolted together at the center to form an "X". Ends are rounded and pierced for attaching to front and rear posts in the side position. See technical data on page 53 for bracing information.

Part No	Width	Depth	Height
5344-12	-	12"	-
5344-15	-	15"	-
5344-18	-	18"	-
5344-24	-	24"	-
5344-30	-	30"	-
5344-32	-	32"	-
5344-36	-	36"	-

BACK PANELS



Two piece sections punched on 1" centers at vertical edges and center for mounting on back of posts and shelves in models up to 48" wide.

Part No	Width	Depth	Height
5110-3603	36"	-	3'3"
5110-3606	36"	-	6'3"
5110-3607	36"	-	7'3"
5110-4203	42"	-	3'3"
5110-4206	42"	-	6'3"
5110-4207	42"	-	7'3"
5110-4803	48"	-	3'3"
5110-4806	48"	-	6'3"
5110-4807	48"	-	7'3"

NOTE: Backs greater than 3'-3" will be shipped in multiple pieces.

Denotes Stock Component

*Also available from stock in Platinum color

NOTE: For requirements above 16'-3" high, multiple posts can be spliced using 5009 post splice channels without compromising capacity. See page 67 for unit load and sway brace information.

Color for all components: 725 Hallowell Gray

COLOR
SELECTION

725
HALLOWELL GRAY
(HG)


COMPONENTS & DIMENSIONS

Hallowell

www.Hallowell-List.com

HI-TECH™ SHELVING

BACK PANEL CLIPS



Formed to fit bottom flange of standard shelf and tabbed to pick up holes in center of back panel section. Holds back panel to shelf and prevents panel bowing.

Part No	Width	Depth	Height
5120	-	-	-

SIDE PANELS



Two piece panels are bolted to standard Beaded, Angle and Tee Posts when solid sides are required.


Part No	Width	Depth	Height
5093-1203	-	12"	3'3"
5093-1206	-	12"	6'3"
5093-1207	-	12"	7'3"
5093-1507	-	15"	7'3"
5093-1803	-	18"	3'3"
5093-1806	-	18"	6'3"
5093-1807	-	18"	7'3"
5093-2403	-	24"	3'3"
5093-2406	-	24"	6'3"
5093-2407	-	24"	7'3"
5093-3007	-	30"	7'3"
5093-3607	-	36"	7'3"

NOTE: Sides greater than 3'-3" will be shipped in multiple pieces.

SHELVES


Roll formed rectangular tubular shaped front and rear edges with return flanges welded on 3" centers to underside of shelf. Sides are triple flanged. All four corners are lapped and welded. Top pierced to accept dividers.

MEDIUM-DUTY BOX BEAM SHELVES (CLASS 0)



Part No	Width	Depth	Capacity Per Shelf
5135-3612	36"	12"	500 lbs
5135-3615	36"	15"	500 lbs
5135-3618	36"	18"	500 lbs
5135-3624	36"	24"	500 lbs
5135-4812	48"	12"	375 lbs
5135-4818	48"	18"	375 lbs
5135-4824	48"	24"	375 lbs


HEAVY-DUTY BOX BEAM SHELVES (CLASS 1)



Part No	Width	Depth	Capacity Per Shelf
5138-3612	36"	12"	800 lbs
5138-3615	36"	15"	800 lbs
5138-3618*	36"	18"	800 lbs
5138-3624*	36"	24"	800 lbs
5138-3630	36"	30"	500 lbs
5138-3636	36"	36"	500 lbs
5138-4212	42"	12"	600 lbs
5138-4215	42"	15"	600 lbs
5138-4218	42"	18"	600 lbs
5138-4224	42"	24"	600 lbs
5138-4230	42"	30"	625 lbs
5138-4232	42"	32"	575 lbs
5138-4236	42"	36"	475 lbs
5138-4812	48"	12"	400 lbs
5138-4815	48"	15"	425 lbs
5138-4818*	48"	18"	450 lbs
5138-4824*	48"	24"	500 lbs
5138-4830	48"	30"	500 lbs
5138-4836	48"	36"	500 lbs

*Also available from stock in Platinum color

EXTRA HEAVY-DUTY BOX BEAM SHELVES (CLASS 2)



Part No	Width	Depth	Capacity Per Shelf
5139-3612	36"	12"	1100 lbs
5139-3615	36"	15"	1100 lbs
5139-3618*	36"	18"	1200 lbs
5139-3624*	36"	24"	1250 lbs
5139-3630	36"	30"	900 lbs
5139-3636	36"	36"	900 lbs
5139-4212	42"	12"	1100 lbs
5139-4215	42"	15"	1100 lbs
5139-4218	42"	18"	1050 lbs
5139-4224	42"	24"	900 lbs
5139-4230	42"	30"	1000 lbs
5139-4232	42"	32"	900 lbs
5139-4236	42"	36"	900 lbs
5139-4812	48"	12"	750 lbs
5139-4815	48"	15"	750 lbs
5139-4818*	48"	18"	900 lbs
5139-4824*	48"	24"	900 lbs
5139-4830	48"	30"	750 lbs
5139-4836	48"	36"	750 lbs

*Also available from stock in Platinum color

SHELF CLIP



One-piece zinc plated compression clip fits snugly against side of posts to hold shelves in place. Four required per shelf.

Part No	Width	Depth	Capacity Per Shelf
5133	-	-	-


Denotes Stock Component

*Also available from stock in Platinum color

5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

59

BASE STRIPS



Shaped to fit directly between bottom shelf and floor. 2-15/16" high giving an overall base height including bottom shelf of 3".

Part No	Width	Depth	Height
5233-36	36"	-	2-15/16"
5233-42	42"	-	2-15/16"
5233-48	48"	-	2-15/16"

LABEL HOLDERS



Pierced for attaching to front flange of shelves with top and bottom edges folded over to accommodate labels approximately 1" high.

Part No	Width	Depth	Height
5370-3601	36"	-	1"
5370-4201	42"	-	1"
5370-4801	48"	-	1"

WELDED END PANELS



Sections consisting of beaded front post, angle back post and one-piece side panel. For individual models or starting and ending models in a continuous shelving row. Factory welded.

Part No	Width	Depth	Height
5092-1203	-	12"	3'3"
5092-1206	-	12"	6'3"
5092-1207	-	12"	7'3"
5092-1208	-	12"	8'3"
5092-1210	-	12"	10'3"
5092-1507	-	15"	7'3"
5092-1803	-	18"	3'3"
5092-1806	-	18"	6'3"
5092-1807	-	18"	7'3"
5092-1808	-	18"	8'3"
5092-1810	-	18"	10'3"
5092-2403	-	24"	3'3"
5092-2406	-	24"	6'3"
5092-2407	-	24"	7'3"
5092-2408	-	24"	8'3"
5092-2410	-	24"	10'3"
5092-3007	-	30"	7'3"
5092-3607	-	36"	7'3"

NOTE: For requirements above 10'-3" high, multiple panels can be spliced using 5009 post splice channels without compromising capacity. See page 67 for unit load and sway brace information. **Color for all components:** 725 Hallowell Gray

SWINGING DOORS (WITH LOCKS)

Reinforced door / frame attaches to beaded front posts and opens quietly to a full 150°. Chrome finished handle with built-in grooved key cylinder lock. Positive 3-point locking. Universal clips (Part No. 5315) are required to mount doors on beaded front posts.



Part No	Width	Depth	Height
5300-3636	36"	-	36"
5300-3648	36"	-	48"
5300-3684	36"	-	84"
5300-4836	48"	-	36"
5300-4848	48"	-	48"
5300-4884	48"	-	84"

UNIVERSAL CLIP (WITH HARDWARE)



Available in sets of 6. One set required to mount swinging doors to beaded front posts.

Part No	Width	Depth	Height
5315	-	-	-


FOOT PLATES



11 gauge with 14 gauge mounting bracket welded to top for bolting to post. Has 7/16" diameter hole for floor anchor bolts. Use same shim as H-Posts.

Part No	Width	Depth	Height
5050	2-1/4"	3-1/2"	-

WELDED T-PANELS



Sections consisting of beaded front post, back T-Post and one-piece side panel. For use when adjoining models are added to form a continuous shelving row. Factory welded.

Part No	Width	Depth	Height
5094-1203	-	12"	3'3"
5094-1206	-	12"	6'3"
5094-1207	-	12"	7'3"
5094-1208	-	12"	8'3"
5094-1210	-	12"	10'3"
5094-1507	-	15"	7'3"
5094-1803	-	18"	3'3"
5094-1806	-	18"	6'3"
5094-1807	-	18"	7'3"
5094-1808	-	18"	8'3"
5094-1810	-	18"	10'3"
5094-2403	-	24"	3'3"
5094-2406	-	24"	6'3"
5094-2407	-	24"	7'3"
5094-2408	-	24"	8'3"
5094-2410	-	24"	10'3"
5094-3007	-	30"	7'3"
5094-3607	-	36"	7'3"

Denotes Stock Component

COLOR
SELECTION

725
HALLOWELL GRAY
(HG)

COMPONENTS & DIMENSIONS

Hallowell

www.Hallowell-List.com

HI-TECH™ SHELVING

BIN FRONT

Offset type with bead at top and triple flange at bottom to telescope over shelf flange.



Part No	Width	Depth	Height
5220-3601	36"	-	1"
5220-3603	36"	-	3"
5220-4203	42"	-	3"
5220-4803	48"	-	3"

PARTIAL DIVIDERS

Offset type with bead at top and triple flange at bottom to telescope over shelf flange.



Part No	Width	Depth	Height
5250-1202	-	12"	2"
5250-1204	-	12"	4"


H-POST SIDE SWAY BRACES



Used with
H-Posts only.

Part No	Width	Depth	Height
5341-12	-	12"	-
5341-15	-	15"	-
5341-18	-	18"	-
5341-24	-	24"	-
5341-30	-	30"	-
5341-36	-	36"	-

FULL DIVIDERS




Front edge beaded.
Top, bottom and
rear are flanged.

Part No	Width	Depth	Height
5240-1206	-	12"	6"
5240-1209	-	12"	9"
5240-1212	-	12"	12"
5240-1806	-	18"	6"
5240-1809	-	18"	9"
5240-1812	-	18"	12"
5240-2406	-	24"	6"
5240-2409	-	24"	9"
5240-2412	-	24"	12"


H-POSTS

Used for high-density shelving requirements. Used with standard Hi-Tech shelving components side sway braces (5341). Order H-Posts front and back. **Minimum order 100 posts.**



Part No	Width	Depth	Height
5003-7	1-1/2"	2-15/16"	7'3"
5003-8	1-1/2"	2-15/16"	8'3"
5003-10	1-1/2"	2-15/16"	10'3"
5003-12	1-1/2"	2-15/16"	12'3"
5003-14	1-1/2"	2-15/16"	14'3"
5003-16	1-1/2"	2-15/16"	16'3"

H-POST SPLICES



Used to splice H-posts for added height requirements

Part No	Width	Depth	Height
5010 (Plated)	-	-	9-3/4"

H-POST FOOT PLATE (Heavy-Duty)



Mounting bracket welded to top for bolting inside H-Posts.

Part No	Width	Depth	Height
5015 (Plated)	4"	3-1/2"	3/8"

H-POST SHIM PLATE



Fits under foot plate (Part no. 5015) for leveling.

Part No	Width	Depth	Height
5016 (Plated)	4"	3-1/2"	1/16"


Denotes Stock Component

Denotes Marine Blue Stock Component

MULTI-LEVEL HIGH-RISE SHELVING SYSTEMS

Complete high-rise modular systems make it easy to create that perfect shelving solution to maximize space in any facility.

Consult your sales representative for more information or contact us at: info@Hallowell-List.com

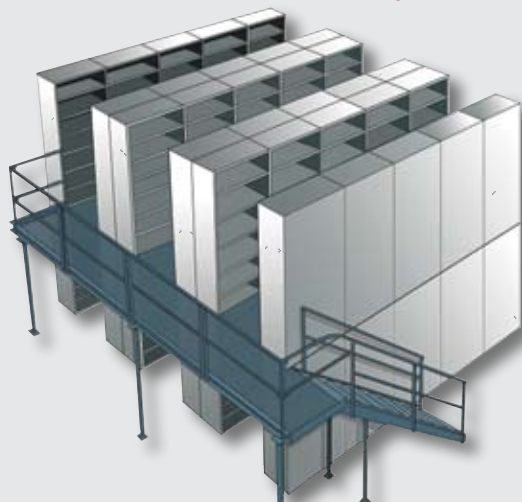

5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

61

HI-POST

HI-TECH™

HALLOWELL® High Capacity Shelving

**H-POST PROVIDES TWICE
THE CAPACITY OF
STANDARD POSTS**

H-Post High capacity Shelving is ideal when additional strength is required for any shelving installation. It is also recommended for multi-level high-rise applications.

H-Posts are fabricated from 14 gauge cold rolled steel and formed into a unique tubular design to provide more than twice the load capacity compared to standard posts.



ONE PIECE SHELF CLIP

- Each shelf requires four of these sturdy and compact clips
- Clips key firmly into post slots to hold shelves securely in place
- Also fits Beaded Front, Angle Back Posts and T-Posts
- Provides independent shelf positioning on 1-1/2" centers
- Non-Intrusive clip sits flush with inside edge of front posts

H-POSTS

- *Designed for high-density applications*
- *More than twice the capacity of standard posts*
- *Used at front and back*
- *Used with standard Hi-Tech components*

CLOSED UNITS



8 Shelf Unit



6 Shelf Unit



5 Shelf Unit

COLOR
SELECTION

711
PLATINUM (PL)

H-POST
COLOR
SELECTION

707
MARINE BLUE
(MB)

**USE WITH STANDARD
HI-TECH COMPONENTS**

Hallowell

www.Hallowell-List.com

HI-TECH™ H-POST SHELVING

OPEN UNITS



8 Shelf Unit



6 Shelf Unit



5 Shelf Unit

ADDER UNITS



Adder units are available in open and closed versions.



All models shown with the standard foot plate that provides a strong and secure anchoring point



Special triple point brace clip provides a strong and ridged anchor point for the cross braces.

AVAILABLE IN 7' AND 10' HIGH UNITS

5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

HI-TECH™ H-POST

HALLOWELL® High Capacity Shelving

H-POST OPEN SHELVING HEAVY AND EXTRA HEAVY-DUTY


STARTER
UNIT

ADDER
UNIT

5 SHELF
UNIT

6 SHELF
UNIT

8 SHELF
UNIT

W	D	H		5-Shelf Unit Cat No.	6-Shelf Unit Cat No.	8-Shelf Unit Cat No.	Shelf Capacity*
Heavy-Duty							
36	18	87	Starter	H5510-1807	H5511-1807	H5513-1807	800
36	18	87	Adder	AH5510-1807	AH5511-1807	AH5513-1807	800
36	24	87	Starter	H5510-2407	H5511-2407	H5513-2407	800
36	24	87	Adder	AH5510-2407	AH5511-2407	AH5513-2407	800
36	18	123	Starter	H5510-1810	H5511-1810	H5513-1810	800
36	18	123	Adder	AH5510-1810	AH5511-1810	AH5513-1810	800
36	24	123	Starter	H5510-2410	H5511-2410	H5513-2410	800
36	24	123	Adder	AH5510-2410	AH5511-2410	AH5513-2410	800
48	18	87	Starter	H5710-1807	H5711-1807	H5713-1807	450
48	18	87	Adder	AH5710-1807	AH5711-1807	AH5713-1807	450
48	24	87	Starter	H5710-2407	H5711-2407	H5713-2407	500
48	24	87	Adder	AH5710-2407	AH5711-2407	AH5713-2407	500
48	18	123	Starter	H5710-1810	H5711-1810	H5713-1810	450
48	18	123	Adder	AH5710-1810	AH5711-1810	AH5713-1810	450
48	24	123	Starter	H5710-2410	H5711-2410	H5713-2410	500
48	24	123	Adder	AH5710-2410	AH5711-2410	AH5713-2410	500
Extra Heavy-Duty							
36	18	87	Starter	H7510-1807	H7511-1807	H7513-1807	1200
36	18	87	Adder	AH7510-1807	AH7511-1807	AH7513-1807	1200
36	24	87	Starter	H7510-2407	H7511-2407	H7513-2407	1250
36	24	87	Adder	AH7510-2407	AH7511-2407	AH7513-2407	1250
36	18	123	Starter	H7510-1810	H7511-1810	H7513-1810	1200
36	18	123	Adder	AH7510-1810	AH7511-1810	AH7513-1810	1200
36	24	123	Starter	H7510-2410	H7511-2410	H7513-2410	1250
36	24	123	Adder	AH7510-2410	AH7511-2410	AH7513-2410	1250
48	18	87	Starter	H7710-1807	H7711-1807	H7713-1807	900
48	18	87	Adder	AH7710-1807	AH7711-1807	AH7713-1807	900
48	24	87	Starter	H7710-2407	H7711-2407	H7713-2407	900
48	24	87	Adder	AH7710-2407	AH7711-2407	AH7713-2407	900
48	18	123	Starter	H7710-1810	H7711-1810	H7713-1810	1200
48	18	123	Adder	AH7710-1810	AH7711-1810	AH7713-1810	1200
48	24	123	Starter	H7710-2410	H7711-2410	H7713-2410	1250
48	24	123	Adder	AH7710-2410	AH7711-2410	AH7713-2410	1250
Additional Shelves							
				Heavy-Duty Cat No.	Extra Heavy-Duty Cat No.		
36	18			5138-3618PL	5139-3618PL		See Above
36	24			5138-3624PL	5139-3624PL		See Above
48	18			5138-4818PL	5139-4818PL		See Above
48	24			5138-4824PL	5139-4824PL		See Above

* Shelf capacity based on a factor of 1.65

Color: All posts, side sway braces, side panels are 707 Marine Blue.
All shelves, back sway braces, back panels are 711 Platinum

OPEN UNITS: Starter units include four posts, one back sway brace assembly, two side sway brace assemblies and 5-8 shelves.
Adder units include two posts, one back sway brace assembly, one side sway brace assembly and 5-8 shelves.

H-POST CLOSED SHELVING HEAVY AND EXTRA HEAVY-DUTY

Hallowell®

www.Hallowell-List.com

HI-TECH™ H-POST SHELVING

W	D	H		5-Shelf Unit Cat No.	6-Shelf Unit Cat No.	8-Shelf Unit Cat No.	Shelf Capacity*
Heavy-Duty							
36	18	87	Starter	H5520-1807	H5521-1807	H5523-1807	800
36	18	87	Adder	AH5520-1807	AH5521-1807	AH5523-1807	800
36	24	87	Starter	H5520-2407	H5521-2407	H5523-2407	800
36	24	87	Adder	AH5520-2407	AH5521-2407	AH5523-2407	800
36	18	123	Starter	H5520-1810	H5521-1810	H5523-1810	800
36	18	123	Adder	AH5520-1810	AH5521-1810	AH5523-1810	800
36	24	123	Starter	H5520-2410	H5521-2410	H5523-2410	800
36	24	123	Adder	AH5520-2410	AH5521-2410	AH5523-2410	800
48	18	87	Starter	H5720-1807	H5721-1807	H5723-1807	450
48	18	87	Adder	AH5720-1807	AH5721-1807	AH5723-1807	450
48	24	87	Starter	H5720-2407	H5721-2407	H5723-2407	500
48	24	87	Adder	AH5720-2407	AH5721-2407	AH5723-2407	500
48	18	123	Starter	H5720-1810	H5721-1810	H5723-1810	450
48	18	123	Adder	AH5720-1810	AH5721-1810	AH5723-1810	450
48	24	123	Starter	H5720-2410	H5721-2410	H5723-2410	500
48	24	123	Adder	AH5720-2410	AH5721-2410	AH5723-2410	500
Extra Heavy-Duty Duty							
36	18	87	Starter	H7520-1807	H7521-1807	H7523-1807	1200
36	18	87	Adder	AH7520-1807	AH7521-1807	AH7523-1807	1200
36	24	87	Starter	H7520-2407	H7521-2407	H7523-2407	1250
36	24	87	Adder	AH7520-2407	AH7521-2407	AH7523-2407	1250
36	18	123	Starter	H7520-1810	H7521-1810	H7523-1810	1200
36	18	123	Adder	AH7520-1810	AH7521-1810	AH7523-1810	1200
36	24	123	Starter	H7520-2410	H7521-2410	H7523-2410	1250
36	24	123	Adder	AH7520-2410	AH7521-2410	AH7523-2410	1250
48	18	87	Starter	H7720-1807	H7721-1807	H7723-1807	900
48	18	87	Adder	AH7720-1807	AH7721-1807	AH7723-1807	900
48	24	87	Starter	H7720-2407	H7721-2407	H7723-2407	900
48	24	87	Adder	AH7720-2407	AH7721-2407	AH7723-2407	900
48	18	123	Starter	H7720-1810	H7721-1810	H7723-1810	1200
48	18	123	Adder	AH7720-1810	AH7721-1810	AH7723-1810	1200
48	24	123	Starter	H7720-2410	H7721-2410	H7723-2410	1250
48	24	123	Adder	AH7720-2410	AH7721-2410	AH7723-2410	1250
Additional Shelves				Heavy-Duty Cat No.	Extra Heavy-Duty Cat No.		
36	18			5138-3618PL	5139-3618PL	See Above	
36	24			5138-3624PL	5139-3624PL	See Above	
48	18			5138-4818PL	5139-4818PL	See Above	
48	24			5138-4824PL	5139-4824PL	See Above	

* Shelf capacity based on a factor of 1.65

Color: All posts, side sway braces, side panels are 707 Marine Blue.
All shelves, back sway braces, back panels are 711 Platinum

CLOSED UNITS: Starter units include four posts, one back panel assembly, two side panel assemblies and 5-8 shelves.
Adder units include two posts, one back panel assembly, one side panel assembly and 5-8 shelves.



STARTER UNIT



ADDER UNIT



5 SHELF UNIT



6 SHELF UNIT




8 SHELF UNIT

5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

65

SYSTEM LAYOUT INFORMATION

Standard Shelving with Hi-Tech Shelves

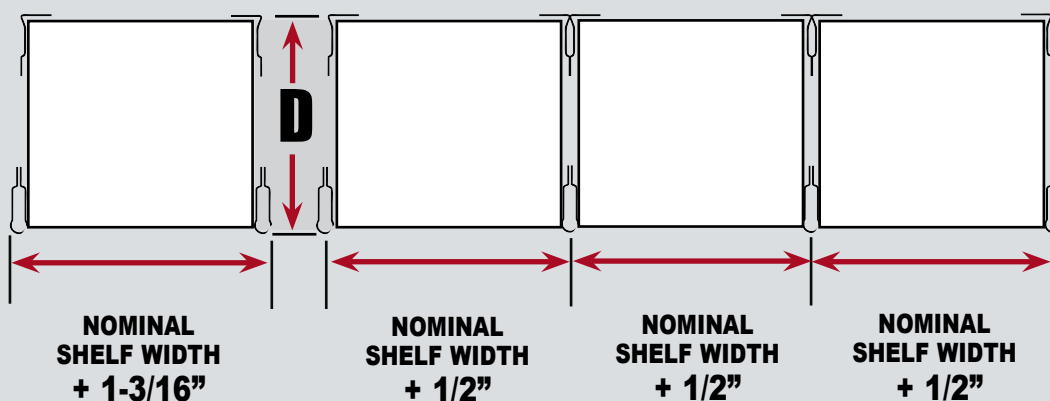


PLUS ADD $3/4"$ PER ROW

FOR "D" - *SINGLE FACE* ADD $3/16"$ TO NOMINAL SHELF DEPTH

FOR "D" - *DOUBLE FACE* ADD $3/8"$ TO NOMINAL SHELF DEPTH

H-Post Shelving with Hi-Tech Shelves

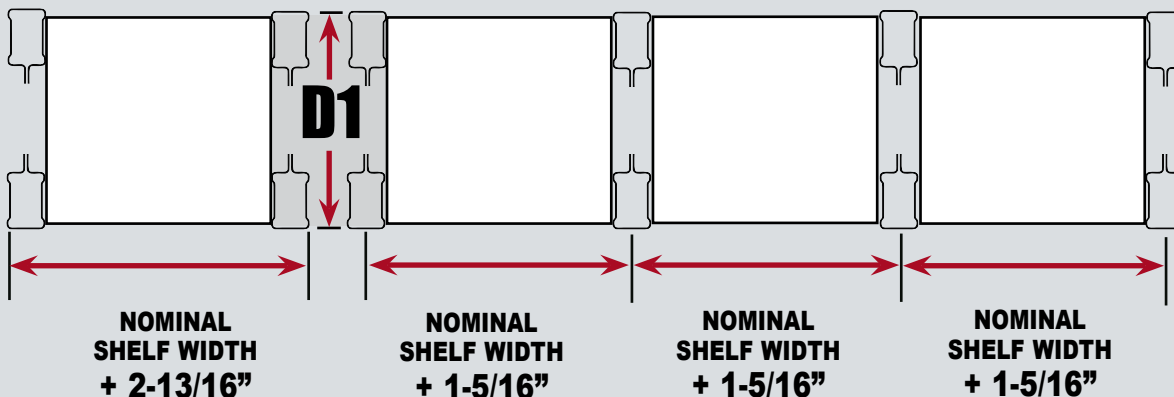

PLUS ADD $1-1/2"$ PER ROW

FOR 'D1' - *SINGLE FACE* ADD $5/16"$ TO NOMINAL SHELF DEPTH

FOR "D1" - *DOUBLE FACE* CLOSED MODELS ADD $13/16"$ TO NOMINAL SHELF DEPTH

FOR "D1" - *DOUBLE FACE* OPEN MODELS ADD $29/32"$ TO NOMINAL SELF DEPTH

NOTE: SHELF WIDTH IS $5/16"$ UNDER NOMINAL

NOTE: Width of posts should be added to the nominal shelf width in any floor plan to determine the overall shelving width.
Check "D" and "D1" dimensions for depth/creepage.

UNIT LOAD CAPACITY INFORMATION - 1.65 SAFETY FACTOR


UNIT LOAD
(000 LBS)



STANDARD POST



H-POST

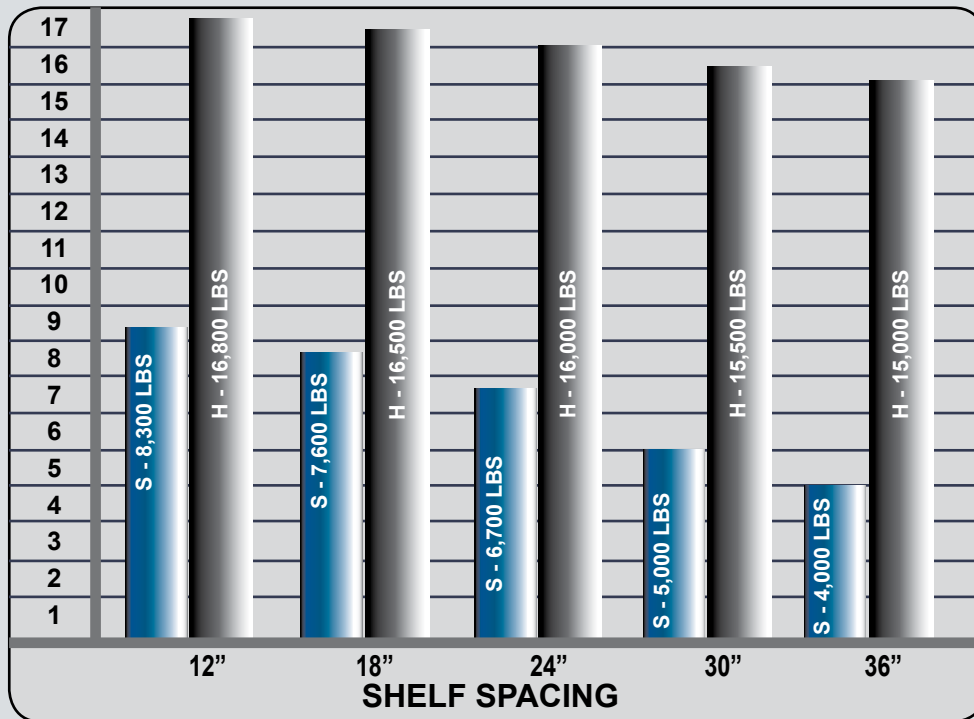

Before selecting type of post, consideration should be given to loads to be carried. Use the formula below to get unit load, then select post type from table.

$$(B-2) \times A = \text{Unit Load}$$

A=Shelf Load
(See note 2)
B=Shelves per unit
(includes top and bottom shelves)

WARNING:

Use H-Posts for:


- High-rise applications
- Pass-through applications regardless of load
- High-density, multi-level applications




TYPICAL SWAY BRACE INSTALLATIONS FOR SEISMIC ZONE NO. 0 & 1

Standard Shelving (Beaded Front Posts)

High-Density Shelving (H-Posts)



Use of Side Sway Braces
(Part No. 5344 – Standard Shelving)
(Part No. 5341–High-Density Shelving)

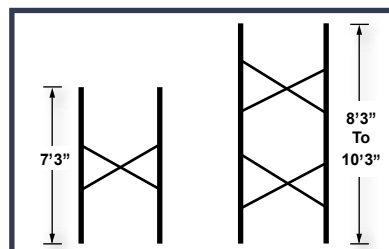

Use of Back Sway Braces (Part No. 5342)
for both standard and high density shelving



NOTES: 1-When splicing posts for increased heights or for multi-level shelving, use the proper number of braces required for the height of the posts being added.
Example: a 10'-3" model increased another 10'-3" in height would require 4 sets of side sway braces and 4 sets of back braces.
2-For additional bracing requirements in Seismic Zones No. 2, 3 and 4, consult the Hallowell Applications Engineering Department.



Beaded Front Posts:

Fabricated from 14 gauge cold rolled steel and roll formed into an 11/16" wide x 2-9/16" deep tubular section. Rear flanges are welded on 6" centers to provide maximum strength. Sides of the post are punched 1-1/2" on center with 3/8" x 7/8" rectangular slots to receive shelf clip. Rear flanges of the post have holes punched on 3" centers for the attachment of side sway braces or field attached solid side panels. Provide (1) Beaded Front Post between each adjoining section and at row ends.

Angle Back Posts:

Fabricated of 14 gauge cold rolled steel and roll formed into a modified unequal angle shape. The long leg shall have holes punched on 1-1/2" centers with 3/8" x 7/8" rectangular slots to receive shelf clip. The leading edge shall have holes punched on 3" centers for the attachment of side sway braces. The short leg shall have holes punched on 3" centers for the attachment of back sway braces or back panels. Provide (1) Angle Back Post at each row end for open-type shelving applications.

T-Posts:

Shall be fabricated of two angle back posts. The posts are welded together back-to-back to form a "T". Welds are on 6" centers for maximum strength. Posts are used for intermediate back post applications. Provide (1) T Post between each adjoining section for open-type shelving applications.

Post Splice Channels:

Fabricated from 16 gauge cold rolled steel and formed into a 11/32" x 1-1/8" x 11/32" channel. 1-1/8" flange is punched with four holes for assembling to upper and lower posts. Provide at all post splices when additional height is required.

Side Sway Braces:

1" x 11 gauge cold rolled steel strip with safety edges to eliminate sharpness. The center of two identical pieces shall be punched to be bolted together forming an "X". Ends shall be rounded and punched for attaching to front and back posts. Provide between adjoining sections and at row ends for open-type shelving applications.

Back Sway Braces:

1" x 11 gauge cold rolled steel strip with safety edges to eliminate sharpness. The center of two identical pieces shall be punched to be bolted together forming an "X". Ends shall be rounded and punched for attaching to two back posts. Provide at back of all open-type shelving applications.

Back Panels:

Fabricated from 24 gauge cold rolled sheet steel. The two outer edges and the center shall be punched with 5/16" diameter holes on 1" centers running vertically for assembling to back posts. The center row is used to attach to rear of shelf using Back Clips. Provide at back of closed-type shelving sections. For heights greater than 3'-3", multiple sections will be provided to achieve height.

Side Panels:

Fabricated from 24 gauge cold rolled sheet steel, field bolted to front and back posts. Provide at all side locations for closed shelving sections. For heights greater than 3'-3", multiple sections will be provided to achieve height.

End Panels:

Fabricated from 24 gauge cold rolled sheet steel, factory bolted to a Beaded Front Post and an Angle Back Post. Provide at row ends of closed-type shelving applications or where closed ends are desired on open-type shelving applications. For heights greater than 3'-3", multiple sections will be provided to achieve height.

T-Panels:

Fabricated from 24 gauge cold rolled sheet steel factory bolted to a Beaded Front Post and two angle back Posts. Provide between sections of closed-type shelving applications. For heights greater than 3'-3", multiple sections will be provided to achieve height.

Foot Plates:

2-1/4" x 3-1/2" x 12 gauge steel plate with angle bracket welded on top. The angle bracket is punched for fastening to front and back posts. The plate shall have a 7/16" diameter hole punched on one end for floor anchoring and be embossed on the other end for Shim Plate alignment. Provide as required for floor anchoring or when shimming is required for a level installation.

Shim Plates:

2-1/4" x 3-1/2" x 16 gauge cold rolled sheet steel. Fabricated to fit under the Foot Plate. One end is embossed to fit into the embossment in the Foot Plate to keep them properly aligned. The other end shall have a 7/16" diameter hole to allow floor anchoring. Provide as required when shimming is required for a level installation.

Contact factory for H-post shelving specifications.

A TRADITION OF QUALITY

Shelves - Medium Duty:

Formed with two ribs along the horizontal front and rear edge and are stamped on the top left corner for identification. Class 0 shelves are fabricated from cold rolled steel and have roll formed rectangular tubular shaped front and rear edges with return bends resistance welded to the under side of shelf. Welds are spaced 3" on center to provide maximum strength. Sides are triple flanged to form a channel. All four corners are lapped and resistance welded to provide a rigid corner and add extra strength to the shelf. Top surface shall be punched for attaching Shelf Dividers From left to right on 1-1/2" centers, front and back, for 36" wide x 12", 15", 18" and 24" deep shelves. All other sizes are punched on 3" centers. Front and rear surfaces are punched for attaching accessories. Tubular front edge is designed to protect against impact loads. Used for uniformly distributed loads up to 500 pounds.

Shelves - Heavy Duty:

Formed with two ribs along the horizontal front and rear edge and are stamped on the top left corner for identification. Class 1 shelves are fabricated from heavy gauge cold rolled steel and have roll formed rectangular tubular shaped front and rear edges with return bends resistance welded to the under side of shelf. Welds are spaced 3" on center to provide maximum strength. Sides are triple flanged to form a channel. All four corners are lapped and resistance welded to provide a rigid corner and add extra strength to the shelf. Top surface shall be punched for attaching Shelf Dividers from left to right on 1-1/2" centers, front and back, for 36" wide x 12", 15", 18" and 24" deep shelves. All other sizes are punched on 3" centers. Front and rear surfaces are punched for attaching accessories. Tubular front edge is designed to protect against impact loads. Used for uniformly distributed loads up to 800 pounds.

Shelves - Extra Heavy Duty:

Formed with two ribs along the horizontal front and rear edge and are stamped on the top left corner for identification. Class 2 shelves are fabricated from extra heavy gauge cold rolled steel and have roll formed rectangular tubular shaped front and rear edges with return bends resistance welded to the under side of shelf. Welds are spaced 3" on center to provide maximum strength. Sides are triple flanged to form a channel. All four corners are lapped and resistance welded to provide a rigid corner and add extra strength to the shelf. Top surface shall be punched for attaching Shelf Dividers from left to right on 1-1/2" centers, front and back, for 36" wide x 12", 15", 18" and 24" deep shelves. All other sizes are punched on 3" centers. Front and rear surfaces are punched for attaching accessories. Tubular front edge is designed to protect against impact loads. Used for uniformly distributed loads up to 1,200 pounds.

Shelf Clips:

Shall be a one piece compression clip drawn from 13 gauge cold rolled steel and zinc plated. Fits snugly against side of post to hold shelves in place. Provide four per shelf.

Base Strip:

Made from 22 gauge cold rolled steel offset at top to fit behind the front flange of shelf. Punched for bolting to holes in the front flange of shelf. Bottom is flanged to resist bending.

Label Holders:

Made from 22 gauge cold rolled steel. Punched on ends and center for attaching to the front edge of shelves with top and bottom edges folded over to accommodate labels approximately 1" high.

Bin Fronts:

Fabricated from 18 gauge cold rolled steel. The top edge is formed into a bead. The bottom shall be triple flanged to telescope over shelf flange and punched to provide a means of attaching to shelf.

Full Dividers:

Fabricated from 24 gauge cold rolled steel. The front edge is beaded. Top and bottom shall be flanged and punched to provide a means of attaching to shelves. The back edge is flanged to provide rigidity. Dividers are installed using snap-in nylon fasteners.

Partial Dividers:

Fabricated from 22 gauge cold rolled steel. The top corners are rounded for increased safety. The bottom flange is punched to provide a means of attaching to shelf. Dividers are installed using snap-in nylon fasteners.

Swinging Doors:

Fabricated from 20 gauge cold rolled steel with box flanges on all four edges. Swinging doors shall be reinforced with a steel pan type panel inside the door. Doors are bolted to a welded door frame consisting of top and bottom channels and angles at the sides. The door frame side angles are punched on 1" centers for attachment. Universal Clips shall be supplied to attach door & frame assembly to the Beaded Front Posts. One chrome finished turn handle with built-in cylinder key lock shall be included providing three point positive locking.

Universal Clip:

Fabricated from 16 gauge cold rolled steel formed into an angle with three slotted holes on one flange and one long slot in the other flange, which is also offset to fit in Beaded Front Post. Provide when Swinging Doors are required.

QUALITY SINCE 1903

STOCK → PROGRAM

THE FASTEST SHIPPING IN THE INDUSTRY...

HEAVY-DUTY INDUSTRIAL GRADE STEEL SHELVING

NO CROSS BRACES **DURATECH**™ PASS-THRU STEEL SHELVING

DuraTech is Hallowell's newest line of pass-thru steel shelving requiring no cross braces allowing access from all sides while providing the maximum strength, durability and stability needed to handle most industrial applications. DuraTech offers versatility and durability for today's modern facilities.

Our complete line of shelving is designed and engineered to the highest standards.

FEATURES:

- Access from all 4 sides
- Top and bottom firmly attached with steel-grip nuts for superior strength
- Available in 5, 7 and 8 shelf models
- Four Angle Posts are used per section allowing units to be individually located, bolted side-by-side or bolted back-to-back.
- Each intermediate shelf uses four sturdy and compact clips
- Clips key firmly into post slots to hold shelves securely in place
- Provides independent positioning of intermediate shelves on 1-1/2" centers
- Bottom shelf is positioned to prevent debris from collecting beneath unit

See sizes, technical information and available models on pages 60 and 61.

OUR UNIQUE GRIP NUT DESIGN CREATES A VERY STRONG AND RIGID STRUCTURE



**360° ACCESS
CREATES
A MORE
EFFICIENT
STORAGE
SYSTEM!**



**FULLY ADJUSTABLE
INTERMEDIATE SHELVES WITH
FIXED TOP AND BOTTOM FOR
A STRONG UNIT THAT DOES
NOT REQUIRE CROSS BRACES**

Hallowell

www.Hallowell-List.com

DURATECH™ PASS-THRU STEEL SHELVING



5-SHELF UNIT
3-adjustable shelves



7-SHELF UNIT
5-adjustable shelves



8-SHELF UNIT
6-adjustable shelves

DURATECH PASS-THRU STEEL SHELVING SPECIFICATIONS

Angle Posts: Fabricated of 14 gauge cold rolled steel and roll formed into a modified unequal angle shape. The long leg shall have holes punched on 1-1/2" centers with 3/8" x 7/8" rectangular slots to receive shelf clip. Provide (4) Angle Posts at each unit.

Top and bottom shelves: Fabricated from 18 gauge cold rolled steel and are triple flanged at all four sides. All four corners are punched to allow top and bottom shelves to be securely bolted to angle posts using specially designed shoulder bolts and steel-grip nuts. Minimum four nuts and bolts per corner. Used for uniformly distributed loads up to 800 pounds.

Heavy-Duty Intermediate Shelves: Formed with two ribs along the horizontal front and rear edge and are stamped on the top left corner for identification. Class 1 shelves are fabricated from heavy gauge cold rolled steel and have roll formed rectangular tubular shaped front and rear edges with return bends resistance welded to the under side of shelf. Welds are spaced 3" on center to provide maximum strength. Sides are triple flanged to form a channel. All four corners are lapped and resistance welded to provide a rigid corner and add extra strength to the shelf. Top surface shall be punched for attaching Shelf Dividers from left to right on 1-1/2" centers, front and back, for 36" wide x 12", 15", 18" and 24" deep shelves. All other sizes are

punched on 3" centers. Front and rear surfaces are punched for attaching accessories. Tubular front edge is designed to protect against impact loads. Used for uniformly distributed loads up to 800 pounds. Medium-Duty intermediate shelves with capacities up to 500 pounds and Extra Heavy-Duty intermediate shelves with capacities up to 1,200 pounds are also available.

Shelf Clips: Shall be a one piece compression clip drawn from 13 gauge cold rolled steel and zinc plated. Fits snugly against side of post to hold shelves in place. Provide four per intermediate shelf.

Foot Plates: 2-1/4" x 3-1/2" x 12 gauge steel plate with angle bracket welded on top. The angle bracket is punched for fastening to front and back posts. The plate shall have a 7/16" diameter hole punched on one end for floor anchoring and be embossed on the other end for Shim Plate alignment. Provide as required for floor anchoring or when shims are required for a level installation.

Shim Plates: 2-1/4" x 3-1/2" x 16 gauge cold rolled sheet steel. Fabricated to fit under the Foot Plate. One end is embossed to fit into the embossment in the Foot Plate to keep them properly aligned. The other end shall have a 7/16" diameter hole to allow floor anchoring. Provide as required when shimming is required for a level installation.

5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

71

STOCK  PROGRAM

THE FASTEST SHIPPING IN THE INDUSTRY...

HEAVY-DUTY INDUSTRIAL GRADE STEEL SHELVING

Pass-thru Steel Shelving requires **NO CROSS BRACES**

**Unique design creates
a very strong unit!**




**Fixed Top Shelf
for maximum
strength using
a bolt and grip
nut**

**Fully adjustable
intermediate
shelves
adds versatility**

**Fixed bottom
shelf adds more
rigidity,
provides closed
base**

4 bolts at each corner top and bottom provide a very strong frame for maximum strength

All Units Include: Four angle posts, two DuraTech bolt-in shelves to be used at unit top and bottom and intermediate adjustable shelves with shelf clips applicable to unit ordered. All DuraTech shelving units are free standing and can be joined end-to-end or back-to-back.




5 SHELF - 36" WIDE X 7'-3" HIGH UNITS 3-ADJUSTABLE SHELVES

Model #	W	D	H	Capacity Per Shelf
DT5510-12	36"	12"	7'3"	800
DT5510-18	36"	18"	7'3"	800
DT5510-24	36"	24"	7'3"	800



7 SHELF - 36" WIDE X 7'-3" HIGH UNITS 5-ADJUSTABLE SHELVES

Model #	W	D	H	Capacity Per Shelf
DT5512-12	36"	12"	7'3"	800
DT5512-18	36"	18"	7'3"	800
DT5512-24	36"	24"	7'3"	800



8 SHELF - 36" WIDE X 7'-3" HIGH UNITS 6-ADJUSTABLE SHELVES

Model #	W	D	H	Capacity Per Shelf
DT5513-12	36"	12"	7'3"	800
DT5513-18	36"	18"	7'3"	800
DT5513-24	36"	24"	7'3"	800




ONE-TIME INVESTMENT, LIFETIME OF USE!

Hallowell

www.Hallowell-List.com

DURATECH™ PASS-THRU STEEL SHELVING



Top and bottom shelves attach with bolts at each corner providing a strong and rigid structure



Bottom shelf is positioned to prevent debris from collecting beneath unit



Top and bottom firmly attached with steel-grip nuts for superior strength




Compression Shelf Clip for intermediate shelves



5-SHELF
MODEL DT5710

5 SHELF - 48" WIDE X 7'-3" HIGH UNITS 3-ADJUSTABLE SHELVES

Model #	W	D	H	Capacity Per Shelf
DT5710-12	48"	12"	7'3"	400
DT5710-18	48"	18"	7'3"	450
DT5710-24	48"	24"	7'3"	500



7-SHELF
MODEL DT5712

7 SHELF - 48" WIDE X 7'-3" HIGH UNITS 5-ADJUSTABLE SHELVES

Model #	W	D	H	Capacity Per Shelf
DT5712-12	48"	12"	7'3"	400
DT5712-18	48"	18"	7'3"	450
DT5712-24	48"	24"	7'3"	500



8-SHELF
MODEL DT5713

8 SHELF - 48" WIDE X 7'-3" HIGH UNITS 6-ADJUSTABLE SHELVES

Model #	W	D	H	Capacity Per Shelf
DT5713-12	48"	12"	7'3"	400
DT5713-18	48"	18"	7'3"	450
DT5713-24	48"	24"	7'3"	500

DURATECH ANGLE POSTS

- Roll formed into a unique angle shape for maximum strength
- The long leg is punched on 1-1/2" centers to allow independent shelf adjustment
- Four Angle Posts are used per section allowing units to be individually located, bolted side-by-side or bolted back-to-back.



DURATECH ONE PIECE SHELF CLIP

- Each intermediate shelf requires four sturdy and compact clips
- Clips key snugly into post slots to hold shelves securely in place
- Provides independent positioning of intermediate shelves on 1-1/2" centers



DURATECH HEAVY DUTY INTERMEDIATE SHELVES

- Tubular flange front and rear for greater strength
- Exclusive triple bend side flanges for added strength
- Lapped and welded corners
- Available in three load capacity classes up to 48" wide spans and 36" depths
- Top of shelf is punched to accept shelf dividers
- Uses four one piece shelf clips per shelf



DURATECH TOP/BOTTOM SHELVES

- Triple flanged at all four sides for maximum rigidity, durability and stability
- Bottom shelf is positioned to close space to floor preventing debris from collecting beneath
- Bolted to angle posts at all four corners using special bolts and steel-grip nuts preventing unit sway without the use of intrusive sway bracing for complete 4-sided access



All units shown include Hallowell heavy-duty intermediate shelves. Medium-Duty and Extra Heavy-Duty units are also available.

5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

73

STOCK → PROGRAM

Quick Ship

THE FASTEST SHIPPING IN THE INDUSTRY...

**BOLTLESS
SHELVING UNITS****RIVETWELL™****Boltless shelving is designed to maximize storage space and minimize installation set-up time.**

All components are engineered to attach snugly to one another without the use of loose fasteners. This unique design has rivets which are factory attached to all left-to-right and front-to-back beams. The rivets align with keyhole slots in the vertical posts. Once tapped into place using a standard rubber mallet, the units are tightly assembled providing maximum strength.

Standard units consist of vertical angle posts at the corners, double rivet angle beams at the top and bottom perimeter and single rivet angle beams running left-to-right only at the intermediate levels. Shelves are of standard 5/8" particle board, EZ-Deck steel or wire decking and simply drop into place. Shelf strength can be increased by upgrading to heavy duty beams, adding single rivet beams running front-to-back at the intermediate levels, upgrading to double rivet beams at the full perimeter of the intermediate levels or upgrading all levels to our strongest double rivet channel beams. Optional center supports can be added using supplied hardware to increase decking capacity.



Double Rivet unit with 5 levels



Single Rivet unit with 4 levels

Double Rivet unit with 4 levels

The versatility of our Rivetwell boltless shelving system allows you to mix and match components to meet your unique application. From standard storage applications, record storage to automotive tire racks, Rivetwell boltless shelving is your storage solution.

**COLOR
SELECTION**729
PARCHMENT (PT)

BOLTLESS SHELVING COMPONENTS

Hallowell


www.Hallowell-List.com

RIVETWELL™ SHELVING

1 Angle Post



2 T-Post

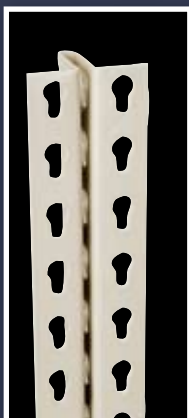


3 Single Rivet Shelf Beam




4 Double Rivet Angle Beam




5 Double Rivet Channel Beam



6 Center Support



7 Double Rivet Z-Beam (Standard Duty)



8 Double Rivet Z-Beam (Heavy Duty)



9 Z-Beam Center Support



1 Angle Post (Standard Duty): 1-1/2" x 1-1/2" x 14 gauge cold rolled steel corner post uprights. Perfect for standard load situations.

Angle Post (Heavy Duty): Shall be 1-7/8" x 1-7/8" x 14 gauge cold rolled steel uprights. The choice when heavy duty shelving is required. Perfect for multilevel installations.

2 T-Post (Standard Duty): 3" x 1-7/8" x 14 gauge cold rolled steel intermediate uprights.

T-Post (Heavy Duty): 3-3/4" x 1-7/8" x 14 gauge cold rolled steel intermediate uprights.

3 Single Rivet Shelf Beam (Standard Duty): This 14 gauge low profile standard intermediate level shelf beam is perfect when maximum clear opening is required between shelf levels.

Single Rivet Shelf Beam (Heavy Duty): An 11 gauge heavy duty version of our low profile intermediate shelf beam allowing maximum clear opening between shelf levels.

4 Double Rivet Angle Beam (Standard Duty): This 16 gauge shelf beam is essential for stability of standard units; therefore, is used on all four sides at the top and bottom levels. Can also be used front and back or on all four sides of intermediate levels to increase unit stability and load capacity.

Double Rivet Angle Beam (Heavy Duty): An upgrade to our standard duty double rivet angle beams, our heavy duty double rivet angle beams provide additional unit rigidity and even higher shelf capacity.

5 Double Rivet Channel Beam: Maximized left-to-right shelf capacity is achieved using our 14 gauge double rivet channel beams in lieu of double rivet angle beams. These beams cannot be used at the bottom level.

6 Center Support: Used to provide additional shelf support front-to-back by bolting between double rivet beams at prepunched locations. Ideal for wider spans.

7 Double Rivet Z-Beam (Standard Duty): For 12" thru 60" beams. Used in place of double rivet angle beams to add 1" additional clearance between shelf levels. Allows particle board decking to sit flush with beam. Protects decking edges. When used at bottom level of single rivet units, shelf clearance is increased by 1" at lower level. Standard Z beams are 14 gauge.

8 Double Rivet Z-Beam (Heavy Duty): For 69" and 72" beams. Used in place of double rivet angle beams to add 1" additional clearance between shelf levels. Allows particle board decking to sit flush with beam. Protects decking edges. Heavy-Duty Z beams are 14 gauge.


9 Center Support for Z-Beam: Used with Z-Beams for front to back decking support. Fabricated of 11 gauge cold rolled steel.

5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

75

THE FASTEST SHIPPING IN THE INDUSTRY...


When designing a shelving layout, unit growth must be considered. To determine the overall dimension of a continuous row of shelving employing T-Posts or Angle Posts with tie plates, refer to the table below.

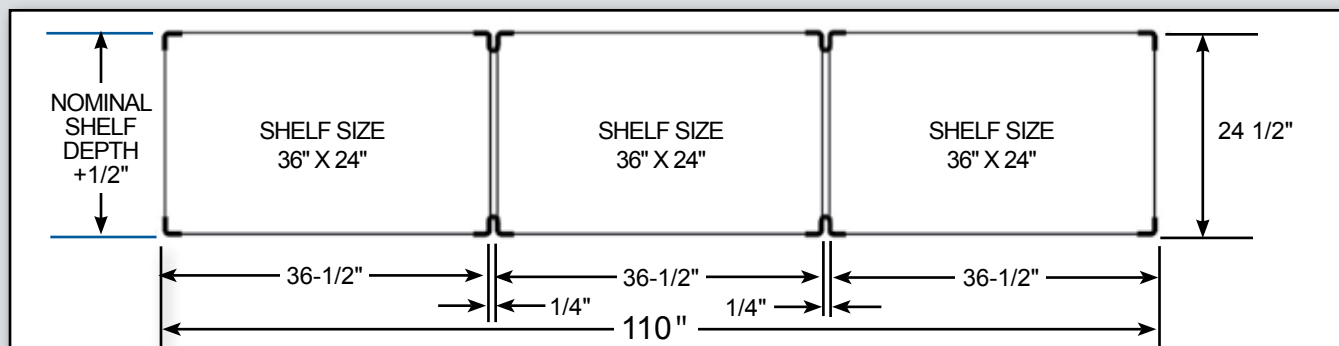

The diagram illustrates four different shelf configurations, each with its own dimensions and clear width calculation. The configurations are as follows:

- Configuration 1:**
 - Shelf Width: 1-1/2"
 - Post Type: USING STD. ANGLE POSTS
 - Clear Opening Width: 33-1/2"
 - Shelf Width + 1/2" MINUS 3" = CLEAR WIDTH
- Configuration 2:**
 - Shelf Width: 1-7/8"
 - Post Type: USING HVY. ANGLE POSTS
 - Clear Opening Width: 32-3/4"
 - Shelf Width + 1/2" MINUS 3-3/4" = CLEAR WIDTH
- Configuration 3:**
 - Shelf Width: 1-7/8"
 - Post Type: USING HVY. ANGLE & HVY. T - POSTS
 - Clear Opening Width: 32-7/8"
 - Shelf Width + 5/8" MINUS 3-3/4" = CLEAR WIDTH
- Configuration 4:**
 - Shelf Width: 1-7/8"
 - Post Type: USING HVY. T - POSTS
 - Clear Opening Width: 33"
 - Shelf Width + 3/4" MINUS 3-3/4" = CLEAR WIDTH

This chart depicts shelf clearances for typical rivetwell shelving units with 1-1/2" vertical shelf adjustment

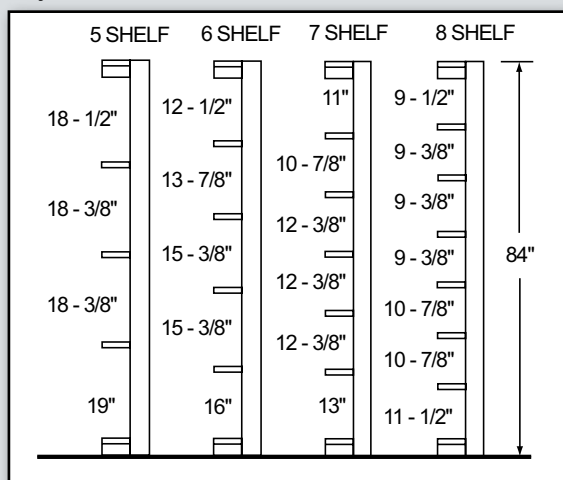

Units with Standard and Heavy Duty Beams

5 SHELF

23-5/8"

26-5/8"

120"

4 SHELF

23-5/8"

84"

26-5/8"

23-5/8"

26-5/8"

23-5/8"

26-5/8"

Units with Channel Beams

5 SHELF

23-5/8"

26-5/8"

120"

4 SHELF

23-5/8"

84"

26-5/8"

23-5/8"

26-5/8"

23-5/8"

26-5/8"

SINGLE RIVET SHELVING UNITS 84" HIGH

Hallowell

www.Hallowell-List.com

RIVETWELL™ SHELVING

SINGLE RIVET UNITS - 84" HIGH							
36" Wide Units				48" Wide Units			
(Decking not included)				(Decking not included)			
Levels	Depth	Shelf Capacity	Starter Model No.	Adder Model No.	Shelf Capacity	Starter Model No.	Adder Model No.
	12	350	SRS361284-5S	SRS361284-5A	250	SRS481284-5S	SRS481284-5A
	18	350	SRS361884-5S	SRS361884-5A	250	SRS481884-5S	SRS481884-5A
	24	350	SRS362484-5S	SRS362484-5A	250	SRS482484-5S	SRS482484-5A
	30	350	SRS363084-5S	SRS363084-5A	250	SRS483084-5S	SRS483084-5A
	36	350	SRS363684-5S	SRS363684-5A	250	SRS483684-5S	SRS483684-5A
6 Shelf	12	350	SRS361284-6S	SRS361284-6A	250	SRS481284-6S	SRS481284-6A
Units	18	350	SRS361884-6S	SRS361884-6A	250	SRS481884-6S	SRS481884-6A
	24	350	SRS362484-6S	SRS362484-6A	250	SRS482484-6S	SRS482484-6A
	30	350	SRS363084-6S	SRS363084-6A	250	SRS483084-6S	SRS483084-6A
	36	350	SRS363684-6S	SRS363684-6A	250	SRS483684-6S	SRS483684-6A
7 Shelf	12	350	SRS361284-7S	SRS361284-7A	250	SRS481284-7S	SRS481284-7A
Unit	18	350	SRS361884-7S	SRS361884-7A	250	SRS481884-7S	SRS481884-7A
	24	350	SRS362484-7S	SRS362484-7A	250	SRS482484-7S	SRS482484-7A
	30	350	SRS363084-7S	SRS363084-7A	250	SRS483084-7S	SRS483084-7A
	36	350	SRS363684-7S	SRS363684-7A	250	SRS483684-7S	SRS483684-7A
8 Shelf	12	350	SRS361284-8S	SRS361284-8A	250	SRS481284-8S	SRS481284-8A
Unit	18	350	SRS361884-8S	SRS361884-8A	250	SRS481884-8S	SRS481884-8A
	24	350	SRS362484-8S	SRS362484-8A	250	SRS482484-8S	SRS482484-8A
	30	350	SRS363084-8S	SRS363084-8A	250	SRS483084-8S	SRS483084-8A
	36	350	SRS363684-8S	SRS363684-8A	250	SRS483684-8S	SRS483684-8A

Starter units consist of four standard angle posts, four left-to-right standard double rivet angle beams, four front-to-back standard double rivet angle beams, two left-to-right standard single rivet beams per intermediate level and two front-to-back standard single rivet beam at one intermediate level only (30" and 36" deep units include two front-to-back standard single rivet beams at each intermediate level).

Adder units consist of two standard T-Posts, four left-to-right standard double rivet angle beams, two front-to-back standard double rivet angle beam, two left-to-right standard single rivet beam per intermediate level and one front-to-back standard single rivet beam at one intermediate level only (30" and 36" deep units include one front-to-back standard single rivet beam at each intermediate level).

PARTICLE BOARD DECKING

SIZE PART NO.

36" X 12" HPB3612

36" X 18" HPB3618

36" X 24" HPB3624

36" X 30" HPB3630

36" X 36" HPB3636

48" X 12" HPB4812

48" X 18" HPB4818

48" X 24" HPB4824

48" X 30" HPB4830

Be sure to order one each of particle board decking per level.

EZ-Deck steel decking can NOT be used on single rivet units.



Standard 5-shelf
single rivet unit
(order decking
separately)

Standard 4-shelf
double rivet unit,
see page 78.
(order decking
separately)

COLOR
SELECTION

729 Parchment

5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

77

STOCK  **PROGRAM**

DOUBLE RIVET SHELVING UNITS

THE FASTEST SHIPPING IN THE INDUSTRY...

RIVETWELL™ SHELVING

DOUBLE RIVET UNITS - 84" HIGH WITH 4 LEVELS

Without Center Support (Decking Not Included)							With Center Support (Decking Not Included)		Decking	
Width	Beam Type	Depth	Shelf Cap	Starter Model No.	Adder Model No.	Shelf Cap	Starter Model No.	Adder Model No.	Particle Board Decking	EZ-Deck Steel Decking
48"	Standard	18	550	DRS481884-4S	DRS481884-4A	875	DRSC481884-4S	DRSC481884-4A	HPB4818	HEZD4818
	Angle Beam	24	550	DRS482484-4S	DRS482484-4A	875	DRSC482484-4S	DRSC482484-4A	HPB4824	HEZD4824
		30	550	DRS483084-4S	DRS483084-4A	825	DRSC483084-4S	DRSC483084-4A	HPB4830	HEZD4830
		36	550	DRS483684-4S	DRS483684-4A	775	DRSC483684-4S	DRSC483684-4A	HPB4836	HEZD4836
		48	550	DRS484884-4S	DRS484884-4A	700	DRSC484884-4S	DRSC484884-4A	HPB4848	HEZD4848
48"	Heavy-Duty Angle	18	750	DRH481884-4S	DRH481884-4A	1400	DRHC481884-4S	DRHC481884-4A	HPB4818	HEZD4818
		24	750	DRH482484-4S	DRH482484-4A	1400	DRHC482484-4S	DRHC482484-4A	HPB4824	HEZD4824
		30	750	DRH483084-4S	DRH483084-4A	1310	DRHC483084-4S	DRHC483084-4A	HPB4830	HEZD4830
		36	750	DRH483684-4S	DRH483684-4A	1220	DRHC483684-4S	DRHC483684-4A	HPB4836	HEZD4836
		48	750	DRH484884-4S	DRH484884-4A	1125	DRHC484884-4S	DRHC484884-4A	HPB4848	HEZD4848
60"	Heavy-Duty Angle Beam	18	600	DRH601884-4S	DRH601884-4A	1200	DRHC601884-4S	DRHC601884-4A	HPB6018	HEZD6018
		24	600	DRH602484-4S	DRH602484-4A	1200	DRHC602484-4S	DRHC602484-4A	HPB6024	HEZD6024
		30	600	DRH603084-4S	DRH603084-4A	1200	DRHC603084-4S	DRHC603084-4A	HPB6030	HEZD6030
		36	600	DRH603684-4S	DRH603684-4A	1200	DRHC603684-4S	DRHC603684-4A	HPB6036	HEZD6036
		48	600	DRH604884-4S	DRH604884-4A	1200	DRHC604884-4S	DRHC604884-4A	HPB6048	HEZD6048
60"	Channel Beam	18	-	-	-	2000	DRCC601884-4S	DRCC601884-4A	HPB6018	HEZD6018
		24	-	-	-	2000	DRCC602484-4S	DRCC602484-4A	HPB6024	HEZD6024
		30	-	-	-	2000	DRCC603084-4S	DRCC603084-4A	HPB6030	HEZD6030
		36	-	-	-	2000	DRCC603684-4S	DRCC603684-4A	HPB6036	HEZD6036
		48	-	-	-	2000	DRCC604884-4S	DRCC604884-4A	HPB6048	HEZD6048
72"	Heavy-Duty Angle Beam	18	500	DRH721884-4S	DRH721884-4A	1000	DRHC721884-4S	DRHC721884-4A	HPB7218	HEZD7218
		24	500	DRH722484-4S	DRH722484-4A	1000	DRHC722484-4S	DRHC722484-4A	HPB7224	HEZD7224
		30	500	DRH723084-4S	DRH723084-4A	1000	DRHC723084-4S	DRHC723084-4A	HPB7230	HEZD7230
		36	500	DRH723684-4S	DRH723684-4A	1000	DRHC723684-4S	DRHC723684-4A	HPB7236	HEZD7236
		48	500	DRH724884-4S	DRH724884-4A	1000	DRHC724884-4S	DRHC724884-4A	HPB7248	HEZD7248
72"	Channel Beam	18	-	-	-	1850	DRCC721884-4S	DRCC721884-4A	HPB7218	HEZD7218
		24	-	-	-	1850	DRCC722484-4S	DRCC722484-4A	HPB7224	HEZD7224
		30	-	-	-	1850	DRCC723084-4S	DRCC723084-4A	HPB7230	HEZD7230
		36	-	-	-	1850	DRCC723684-4S	DRCC723684-4A	HPB7236	HEZD7236
		48	-	-	-	1850	DRCC724884-4S	DRCC724884-4A	HPB7248	HEZD7248
96"	Heavy-Duty Angle Beam	18	-	-	-	620	DRHC961884-4S	DRHC961884-4A	HPB9618	HEZD9618
		24	-	-	-	620	DRHC962484-4S	DRHC962484-4A	HPB9624	HEZD9624
		30	-	-	-	620	DRHC963084-4S	DRHC963084-4A	HPB9630	HEZD9630
		36	-	-	-	620	DRHC963684-4S	DRHC963684-4A	HPB9636	HEZD9636
		48	-	-	-	620	DRHC964884-4S	DRHC964884-4A	HPB9648	HEZD9648
96"	Channel Beam	18	-	-	-	1400	DRCC961884-4S	DRCC961884-4A	HPB9618	HEZD9618
		24	-	-	-	1400	DRCC962484-4S	DRCC962484-4A	HPB9624	HEZD9624
		30	-	-	-	1400	DRCC963084-4S	DRCC963084-4A	HPB9630	HEZD9630
		36	-	-	-	1400	DRCC963684-4S	DRCC963684-4A	HPB9636	HEZD9636
		48	-	-	-	1400	DRCC964884-4S	DRCC964884-4A	HPB9648	HEZD9648

DOUBLE RIVET UNITS - 120" HIGH WITH 5 LEVELS

72"	Heavy-Duty	30	500	DRH7230120-5S	DRH7230120-5A	1000	DRHC7230120-5S	DRHC7230120-5A	HPB7230	HEZD7230
		36	500	DRH7236120-5S	DRH7236120-5A	1000	DRHC7236120-5S	DRHC7236120-5A	HPB7236	HEZD7236
		48	500	DRH7248120-5S	DRH7248120-5A	1000	DRHC7248120-5S	DRHC7248120-5A	HPB7248	HEZD7248
72"	Channel Beam	30	-	-	-	1490	DRCC7230120-5S	DRCC7230120-5A	HPB7230	HEZD7230
		36	-	-	-	1490	DRCC7236120-5S	DRCC7236120-5A	HPB7236	HEZD7236
		48	-	-	-	1490	DRCC7248120-5S	DRCC7248120-5A	HPB7248	HEZD7248
96"	Heavy-Duty	30	-	-	-	620	DRHC9630120-5S	DRHC9630120-5A	HPB9630	HEZD9630
		36	-	-	-	620	DRHC9636120-5S	DRHC9636120-5A	HPB9636	HEZD9636
		48	-	-	-	620	DRHC9648120-5S	DRHC9648120-5A	HPB9648	HEZD9648
96"	Channel Beam	30	-	-	-	1400	DRCC9630120-5S	DRCC9630120-5A	HPB9630	HEZD9630
		36	-	-	-	1400	DRCC9636120-5S	DRCC9636120-5A	HPB9636	HEZD9636
		48	-	-	-	1400	DRCC9648120-5S	DRCC9648120-5A	HPB9648	HEZD9648

Starter units consist of four standard angle posts, *two left-to-right standard double rivet angle/channel beams per level and two front-to-back standard double rivet angle beams per level.

Adder units consist of two standard T-Posts, *two left-to-right standard double rivet angle/channel beams per level and two front-to-back standard double rivet angle beams per level. *Channel beam units are provided with left-to-right double rivet angle beams at bottom level.

RECORD STORAGE UNITS

Hallowell

www.Hallowell-List.com

RIVETWELL™ SHELVING

RECORD STORAGE UNITS								
Width	Depth	Height	Levels	No. of boxes	Starter Model No.	Adder Model No.	Particle Board Decking	EX-Deck Steel Decking
42"	15"	60"	3	18	RS421560-3S	RS421560-3A	HPB4215	HEZD4215
	30"	60"	3	36	RS423060-3S	RS423060-3A	HPB4230	HEZD4230
69"	15"	60"	3	30	RS691560-3S	RS691560-3A	HPB6915	HEZD6915
	30"	60"	3	60	RS693060-3S	RS693060-3A	HPB6930	HEZD6930
42"	15"	84"	4	24	RS421584-4S	RS421584-4A	HPB4215	HEZD4215
	30"	84"	4	48	RS423084-4S	RS423084-4A	HPB4230	HEZD4230
69"	15"	84"	4	40	RS691584-4S	RS691584-4A	HPB6915	HEZD6915
	30"	84"	4	80	RS693084-4S	RS693084-4A	HPB6930	HEZD6930
42"	15"	108"	5	30	RS4215108-5S	RS4215108-5A	HPB4215	HEZD4215
	30"	108"	5	60	RS4230108-5S	RS4230108-5A	HPB4230	HEZD4230
69"	15"	108"	5	50	RS6915108-5S	RS6915108-5A	HPB6915	HEZD6915
	30"	108"	5	100	RS6930108-5S	RS6930108-5A	HPB6930	HEZD6930

Be sure to order one each of particle board or EZ-Deck steel decking per level.

*The above units do not include record storage boxes.

Hallowell Record Storage Boxes are 12"w x 15"d x 10"h and are constructed of 200# test white corrugated. Includes double thickness bottoms and reinforced carry handles. Must be ordered in lots of 20.



RECORD STORAGE BOXES

Catalog No. Qty. Per Carton
HRSB 20

**ACCESS UNIT FROM
FRONT OR BACK!**



Record Storage Unit with 4 levels (80 Box unit)

COLOR SELECTION

729 Parchment

5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

79

STOCK → PROGRAM


Quick Ship

THE FASTEST SHIPPING IN THE INDUSTRY...

**AUTOMOTIVE STORAGE
RACKS AND UNITS****TIRE STORAGE RACKS**

Width	Depth	Height	Levels	*Tire Capacity	Starter Model No.	Adder Model No.
SINGLE ROW						
60"	21"	84"	3	24	TSS602184-3S	TSS602184-3A
	21"	120"	4	32	TSS6021120-4S	TSS6021120-4A
	21"	144"	5	40	TSS6021144-5S	TSS6021144-5A
	21"	192"	6	48	TSS6021192-6S**	TSS6021192-6A**
DOUBLE ROW						
60"	42"	84"	3	48	TSD602184-3S	TSD602184-3A
	42"	120"	4	64	TSD6021120-4S	TSD6021120-4A
	42"	144"	5	80	TSD6021144-5S	TSD6021144-5A
	42"	192"	6	96	TSD6021192-6S**	TSD6021192-6A**

(*)Based on average passenger tire (**) Supplied with heavy-duty posts

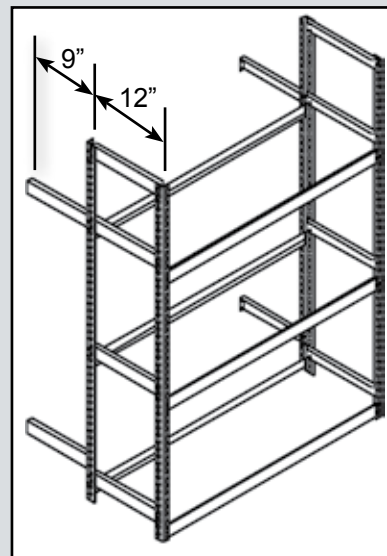

Tire Storage Rack


MUFFLER STORAGE UNITS

Width	Depth	Height	Levels	Starter Model No.	Adder Model No.	Particle Board Decking	
						Size	Part No.
48"	36"	84"	5	MS483684-5S	MS483684-5A	48" X 36"	HPB4836
96"	36"	84"	5	MS963684-5S	MS963684-5A	96" X 36"	HPB9636

Be sure to order one each of particle board decking per level.

HANGING TAILPIPE RACK

Width	Depth	Height	Starter Model No.
48"	18"	120"	HTP4818120
96"	18"	120"	HTP9618120

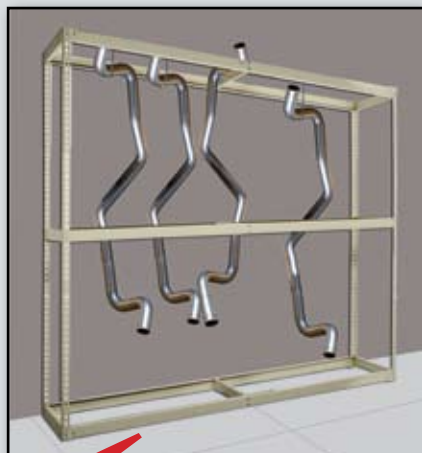

Hanging Tailpipe Rack



Tire Rack



Muffler Storage Rack

COLOR
SELECTION

729 Parchment


RIVETWELL SHELVING COMPONENTS

Hallowell

www.Hallowell-List.com


RIVETWELL™ SHELVING COMPONENTS

PART DESCRIPTION	HEIGHT	STANDARD PART NO.	HEAVY-DUTY PART NO.
ANGLE POST		1-1/2" x 1-1/2" (14 ga)	1-7/8" x 1-7/8" (14 ga)
Punched for self adjustment on 1-1/2" centers	3'	APS03	-
	4'	APS04	-
	5'	APS05	-
	6'	APS06	APH06
	7'	APS07	APH07
	8'	APS08	APH08
	9'	APS09	APH09
	10'	APS10	APH10
	12'	APS12	APH12
	14'	APS14	APH14
	16'	APS16	APH16




Note: For requirements above 16'-0" high, multiple posts can be spliced using PS05 post splice without compromising capacity.

PART DESCRIPTION	HEIGHT	STANDARD PART NO.	HEAVY-DUTY PART NO.
T-POST		3" x 1-7/8" (14 ga)	3-3/4" x 1-7/8" (14 ga)
Punched for self adjustment on 1-1/2" centers	3'	TPS03	TPH03
	4'	TPS04	TPH04
	5'	TPS05	TPH05
	6'	TPS06	TPH06
	7'	TPS07	TPH07
	8'	TPS08	TPH08
	9'	TPS09	TPH09
	10'	TPS10	TPH10
	12'	TPS12	TPH12
	14'	TPS14	TPH14
	16'	TPS16	TPH16



Note: For requirements above 16'-0" high, multiple posts can be spliced using PS05 post splice without compromising capacity.


PART DESCRIPTION	LENGTH	STANDARD PART NO.	HEAVY-DUTY PART NO.
DOUBLE RIVET ANGLE BEAM		2-3/4" x 1" (16 ga)	2-3/4" x 1" (14 ga)
Punched for self adjustment on 1-1/2" centers	2"	ABS12	-
	15"	ABS15	-
	18"	ABS18	-
	24"	ABS24	-
	30"	ABS30	-
	32"	ABS32	-
	36"	ABS36	-
	42"	ABS42	-
	48"	-	ABH48
	60"	-	ABH60
	69"	-	ABH69
	72"	-	ABH72
	84"	-	ABH84
	96"	-	ABH96



For left to right shelf and front to back shelf support. "R" is for beams punched to accept record storage box support


Denotes Stock Component

PART DESCRIPTION	LENGTH	STANDARD PART NO.	HEAVY-DUTY PART NO.
DOUBLE RIVET CHANNEL BEAM			1" x 2-3/4" (14 ga)
For left to right shelf support. Provides for a higher capacity than heavy-duty rivet angle beams.	48"	-	CBH48
	60"	-	CBH60
	69"	-	CBH69
	72"	-	CBH72
	84"	-	CBH84
	96"	-	CBH96




Note: When a bottom shelf is required to be at the bottom level, use a Heavy-Duty Double Rivet Angle Beam.


PART DESCRIPTION	LENGTH	STANDARD PART NO.	HEAVY-DUTY PART NO.
SINGLE RIVET BEAM		1" x 21/32" (14 ga)	1" x 21/32" (11 ga)
For use as left to right and front to back support. See Beam Load Table for capacity on page 73.	12"	SRBS12	-
	15"	SRBS15	-
	18"	SRBS18	-
	24"	SRBS24	-
	30"	SRBS30	-
	36"	SRBS36	SRBH36
	42"	SRBS42	SRBH42
	48"	SRBS48	SRBH48



PART DESCRIPTION	LENGTH	STANDARD PART NO.	HEAVY-DUTY PART NO.
CENTER SUPPORT		2-3/4" x 1" x 1" (16 ga)	
Bolts to double rivet angle or channel beams to add support to decking and stabilize beams. Supplied with nuts and bolts for fast assembly. Use 1 per pair of beams up to 84", 2 per pair of 96" beams.	12"	CS12	-
	15"	CS15	-
	18"	CS18	-
	24"	CS24	-
	30"	CS30	-
	32"	CS32	-
	36"	CS36	-
	42"	CS42	-
	48"	CS48	-



PART DESCRIPTION	LENGTH	STANDARD PART NO.	HEAVY-DUTY PART NO.
DOUBLE ROW AND TOP TIE		2-1/2" x 1/4" (14 ga)	
Use to space back-to-back units and to top-tie rows across aisle for added stability.	9-1/4"	-	DRTT09
	12-1/4"	-	DRTT12
	15-1/4"	-	DRTT15
	18-1/4"	-	DRTT18
	24-1/4"	-	DRTT24
	36-1/4"	-	DRTT36
	42-1/4"	-	DRTT42
	48-1/4"	-	DRTT48



COLOR SELECTION

729 Parchment






5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS


81

STOCK → PROGRAM

THE FASTEST SHIPPING IN THE INDUSTRY...

RIVETWELL SHELVING
COMPONENTS

PART DESCRIPTION	LENGTH	STANDARD PART NO.	HEAVY-DUTY PART NO.
WALL TIE 2-1/2" x 1-1/4" (14 ga)			
Used to secure units to wall and provide space between wall and unit (Hardware to attach to wall not included).	9-1/4"	WT09 	-
FOOT PLATE 1-1/2" x 1-1/2" x 3" (14 ga)			
For use in anchoring angle and tee posts to floor. (Hardware included for attaching posts-Hardware to anchor to the floor not included.) anchor holes are 3/8" diameter.	3"	FPR100 	-
POST SPLICE 1-3/8" x 1-3/8" x 5" (11 ga)			
Used to extend post, attaches to outside of post. Order one per Angle Post, two per T-Post.	5"	PS05 	-
TIE PLATE 3" x 3" (14 ga)			
Used for structural integrity of T-Post and to join Angle Post units side by side to insure proper row alignment.	NA	TP1 	-
TIRE RACK BEAM 2-3/4" x 1" (14 ga)			
For left to right shelf support of tires. 9 degrees angle on supporting edge.	48" 60"	TRB48 TRB60 	-

PART DESCRIPTION	LENGTH	STANDARD PART NO.	HEAVY-DUTY PART NO.
HANGER BAR 1-1/4" x 1-1/4" x 1-1/4" (14 ga)			
For hanging items between double rivet beams. One or more may be used per level.	36" 42" 48" 60"	HB 36 HB 42 HB 48 HB 60	- - - -
DECK OVER GRATING SUPPORT 3-12" x 1-13/16" x 2-3/16" (11 ga)			
Provides secure support for grating when decking over entire installation.	36" 48" 60" 69" 72"	- - - - -	DOGS36 DOGS48 DOGS60 DOGS69 DOGS72
DOWN ISLE GRATING SUPPORT 3-12" x 1-13/16" x 1-15/16" (11 ga)			
Attaches to unit front between rows to provide support for grating on 2-level rivetwell installations. For maximum aisle width of 48". Use a minimum of 3 screws per support. 9 degree angle on top edge.	36" 48" 60" 69" 72"	- - - - -	DOGS36 DOGS48 DOGS60 DOGS69 DOGS72
BEAM CLEAT 1-1/2" x 1"-1/2" x 3" (14 ga) 1-1/2" x 1"-1/2" x 3" (14 ga)			
An economical way to add units. Not recommended for heavy loads.	3"	BC-L 	BC-R 
SLOTTED ANGLE CLEAT 1-1/2" x 1"-1/2" x 3" (14 ga) 1-1/2" x 1"-1/2" x 3" (14 ga)			
For use where slotted angle pieces must be joined, such as special grating supports and top ties.	3"	SAC-L 	SAC-R 

Denotes Stock Component

RIVETWELL SHELVING COMPONENTS

Hallowell


www.Hallowell-List.com

RIVETWELL™ SHELVING COMPONENTS

PART DESCRIPTION	LENGTH	STANDARD PART NO.	HEAVY-DUTY PART NO.
DOUBLE RIVET Z-BEAM (STANDARD) 2-1/8" x 7/8" (14 ga)			
For front to back and left to right. allows particle board decking to sit flush with top of beam. 	12"	ZBS12	-
	15"	ZBS15	-
	18"	ZBS18	-
	24"	ZBS24	-
	30"	ZBS30	-
	36"	ZBS36	-
	42"	ZBS42	-
	48"	ZBS48	-
	60"	ZBS60	-

DOUBLE RIVET Z-BEAM (HEAVY-DUTY) 2-1/8" x 7/8" (14 ga)			
For front to back and left to right. Allows particle board decking to sit flush with top of beam. 	69"	-	ZBH69
	72"	-	ZBH72

CENTER SUPPORT FOR Z BEAMS 1-3/16" x 1-1/8" x 7/8" (11 ga)			
Use with Z-beams for additional decking support front to back. 	24"	ZCS24	-
	30"	ZCS30	-
	36"	ZCS36	-
	42"	ZCS42	-
	48"	ZCS48	-

WIRE DECKING	
For use where additional ventilation is required. Contact factory for additional information.	

RIVETWELL DECKING

Nominal Size	Particle Board Decking	EZ-Deck Steel
36" X 12"	HPB3612	HEZD3612
36" X 15"	HPB3615	HEZD3615
36" X 18"	HPB3618	HEZD3618
36" X 24"	HPB3624	HEZD3624
36" X 30"	HPB3630	HEZD3630
36" X 36"	HPB3636	HEZD3636
42" X 12"	HPB4212	HEZD4212
42" X 15"	HPB4215	HEZD4215
42" X 18"	HPB4218	HEZD4218
42" X 24"	HPB4224	HEZD4224
42" X 30"	HPB4230	HEZD4230
42" X 36"	HPB4236	HEZD4236
48" X 12"	HPB4812	HEZD4812
48" X 15"	HPB4815	HEZD4815
48" X 18"	HPB4818	HEZD4818
48" X 24"	HPB4824	HEZD4824
48" X 30"	HPB4830	HEZD4830
48" X 36"	HPB4836	HEZD4836
60" X 12"	HPB6012	HEZD6012
60" X 15"	HPB6015	HEZD6015
60" X 18"	HPB6018	HEZD6018
60" X 24"	HPB6024	HEZD6024
60" X 30"	HPB6030	HEZD6030
60" X 36"	HPB6036	HEZD6036
69" X 15"	HPB6915	HEZD6915
69" X 30"	HPB6930	HEZD6930
72" X 18"	HPB7218	HEZD7218
72" X 24"	HPB7224	HEZD7224
72" X 30"	HPB7230	HEZD7230
72" X 36"	HPB7236	HEZD7236
72" X 48"	HPB7248	HEZD7248
84" X 24"	HPB8424	HEZD8424
84" X 30"	HPB8430	HEZD8430
84" X 36"	HPB8436	HEZD8436
84" X 48"	HPB8448	HEZD8448
96" X 18"	HPB9618	HEZD9618
96" X 24"	HPB9624	HEZD9624
96" X 30"	HPB9630	HEZD9630
96" X 36"	HPB9636	HEZD9636
96" X 48"	HPB9648	HEZD9648

Particle Board Decking is type 1-M-2, 5/8" industrial grade and is in stock for immediate shipment. Order using the product number(s) listed. Be sure to order one each of particle board decking or EZ-Deck steel decking per level. All above decking is in stock. Additional sizes available on special order.

NOTE: EZ-Deck must be center supported on units 48" wide and wider.

COLOR SELECTION

729 Parchment

5 DAY SHIPPING ON ALL IN-STOCK PRODUCTS

83

STOCK → PROGRAM

PARTICLE BOARD & E-Z DECK CAPACITY RATINGS


THE FASTEST SHIPPING IN THE INDUSTRY...

Recommended safe use load table for 5/8" particle board and EZ-Deck steel decking allowable uniformly distributed static live loads for deck material


Size (inches) W x D	Particle Board Decking	EZ-Deck Steel Decking	2 Sides Supported		4 Sides Supported		4 Sides + Center Supported		4 Sides + 2 Center Supported	
			LOAD (lbs.)	DEFL (ins)	LOAD (lbs.)	DEFL (ins)	LOAD (lbs.)	DEFL (ins)	LOAD (lbs.)	DEFL (ins)
36x12	HPB3612	HEZD3612	425	0.06	675	0.08				
36x18	HPB3618	HEZD3618	400	0.17	550	0.18				
36x24	HPB3624	HEZD3624	305	0.30	435	0.23				
36x30	HPB3630	HEZD3630	250	0.47	385	0.32				
36x36	HPB3636	HEZD3636	150	0.50	180	0.39				
42x12	HPB4212	HEZD4212	490	0.06	755	0.08				
42x18	HPB4218	HEZD4218	460	0.17	600	0.18				
42x24	HPB4224	HEZD4224	355	0.30	500	0.29				
42x30	HPB4230	HEZD4230	300	0.47	410	0.36				
42x36	HPB4236	HEZD4236	175	0.50	385	0.45				
48x12	HPB4812	HEZD4812	560	0.06	850	0.08	1160	0.08		
48x18	HPB4818	HEZD4818	525	0.17	635	0.18	770	0.10		
48x24	HPB4824	HEZD4824	405	0.30	530	0.30	700	0.11		
48x30	HPB4830	HEZD4830	325	0.47	440	0.40	705	0.12		
48x36	HPB4836	HEZD4836	200	0.50	400	0.50	755	0.12		
48x48	HPB4848	HEZD4848	85	0.50	275	0.50	920	0.13		
60x18	HPB6018	HEZD6018	660	0.17	735	0.18	835	0.12	1140	0.08
60x24	HPB6024	HEZD6024	505	0.30	615	0.32	700	0.15	1180	0.10
60x30	HPB6030	HEZD6030	410	0.47	520	0.46	650	0.16	1324	0.11
60x36	HPB6036	HEZD6036	250	0.50	380	0.50	665	0.17	1520	0.12
60x48	HPB6048	HEZD6048	105	0.50	230	0.50	750	0.18	2000	0.14
69x15	HPB6915	HEZD6915	900	0.11	950	0.12	1150	0.12	1250	0.11
69x30	HPB6930	HEZD6930	470	0.50	600	0.50	670	0.20	1220	0.13
72x18	HPB7218	HEZD7218	800	0.17	850	0.17	1000	0.15	1200	0.10
72x24	HPB7224	HEZD7224	605	0.30	680	0.31	770	0.19	1135	0.12
72x30	HPB7230	HEZD7230	500	0.47	610	0.50	680	0.21	1200	0.14
72x36	HPB7236	HEZD7236	300	0.50	390	0.50	655	0.23	1325	0.16
72x48	HPB7248	HEZD7248	130	0.50	215	0.50	685	0.25	1670	0.18
84x24	HPB8424	HEZD8424	705	0.30	765	0.31	870	0.23	1150	0.15
84x30	HPB8430	HEZD8430	570	0.47	650	0.49	735	0.27	1150	0.18
84x36	HPB8436	HEZD8436	355	0.50	415	0.50	670	0.29	1210	0.20
84x48	HPB8448	HEZD8448	150	0.50	215	0.50	660	0.33	1460	0.23
96x18	HPB9618	HEZD9618	1050	0.17	1115	0.17	1300	0.18	1500	0.15
96x24	HPB9624	HEZD9624	810	0.30	850	0.31	1000	0.26	1200	0.18
96x30	HPB9630	HEZD9630	655	0.47	710	0.49	800	0.32	1180	0.20
96x36	HPB9636	HEZD9636	405	0.50	450	0.50	710	0.36	1150	0.24

NOTE: The above load chart refers to the deck materials only. Particle board decking is 5/8" industrial grade type 1-M-2. EZ-Deck steel decking is 22 gauge galvanized sheet steel fabricated in 6" deep channel planks (models listed above include multiple planks to meet unit depth). 15" deep Ez-Deck will be shipped in two (2) 7 1/2" deep planks. The allowable shelf load capacity may be reduced due to allowable post and / or beam capacities. Specific deflection limits may also reduce the shelf load capacity. **NOTE: EZ-Deck must be center supported on units 48" wide and wider.**

Particle Board Decking

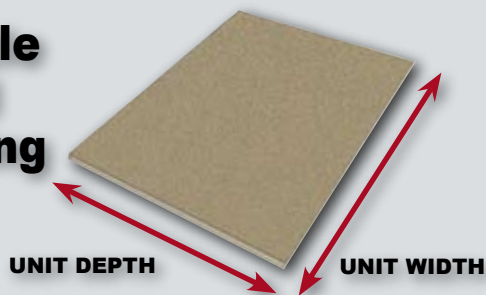

EZ-Deck Steel Decking

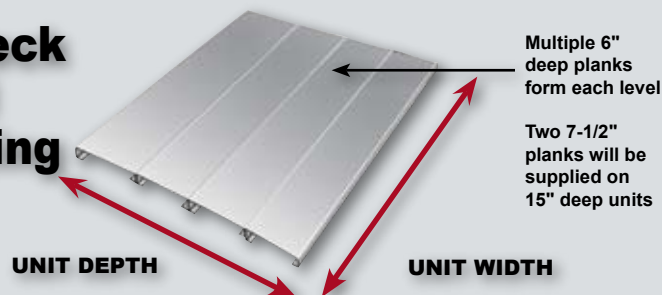

NOTE: EZ-Deck steel decking is for use with double rivet units **ONLY**.



POST CAPACITY CHART

Recommended safe loads (per post) for use only where seismic forces are not a factor

BEAM SPACING	STD. ANGLE POST CAPACITY	HEAVY ANGLE POST CAPACITY
12"	1530	1735
18"	1520	1720
24"	1510	1695
30"	1490	1680
36"	1350	1660
42"	990	1560
48"	755	1195

BEAM SPACING	STANDARD/HEAVY-DUTY T-POST CAPACITY
12"	5045
18"	4965
24"	4850
30"	4705
36"	4525
42"	4315
48"	4075

Post capacities are based on the maximum vertical distance between left-to-right beams or front-to-back beams, whichever is greater. In single rivet beam units, the vertical distance between front-to-back beams will usually govern. Tie plates must be spaced no more than 48 inches apart to insure structural stability when joining angle post together. All units require tie plates at top and bottom.

The above capacities are not intended for use when designing multi-level systems or for specific requirements where seismic forces are a factor. For specific multi-level or seismic requirements contact your Hallowell Sales Manager.

BEAM LOAD TABLE (CAPACITY PER PAIR)

Recommended safe use allowable uniformly distributed hand loaded static beam loads

	WITHOUT CENTER. SUPTS.(***)			WITH CENTER. SUPTS.(*)	
	LENGTH (IN.)	CAPACITY (LBS.)	DEFLECTION (IN.)	CAPACITY (LBS.)	DEFLECTION (IN.)
SINGLE RIVET SHELF BEAMS					
STANDARD BEAM	36	350	0.25	-	-
	42	300	0.30	-	-
	48	250	0.34	-	-
HEAVY DUTY BEAM	36	600	0.25	-	-
	42	550	0.30	-	-
	48	500	0.34	-	-
DOUBLE RIVET ANGLE BEAMS					
STANDARD BEAM	36	1000	***	-	-
	42	780	***	-	-
	48	500	***	875*	0.12
HEAVY DUTY BEAM	48	750	***	1400**	0.16
	60	600	***	1200	0.25
	69	525	***	1050	0.33
	72	500	***	1000	0.36
	84	-	-	840	0.49
	96	-	-	620	0.53
DOUBLE RIVET CHANNEL BEAMS					
	60	-	-	2240	0.23
	72	-	-	1850	0.33
	84	-	-	1600	0.45
	96	-	-	1400	0.59
DOUBLE RIVET Z-BEAM					
	48	1250	-	1750	-
	60	750	-	1000	-
	69	600	-	1000	-
	72	600	-	1000	-

DESIGN CRITERIA:

All units must have a full perimeter of double rivet beams at the top and bottom to insure a stable and rigid unit. All units using single rivet beams 10'0" to 18'0" in height, require an additional double rivet perimeter beam level located approximately in the middle of the unit.

All single rivet beam units must have one (1) intermediate pair of front to back beams for 7'0" and 8'0" high units and (2) intermediate pair of front to back beams for 9'0" high units. For 10'0" to 18'0" high units refer to the above paragraph.

DO NOT exceed 48" between front to back beams. Single Rivet and Double Rivet Front-to-Back Beams may be common when using T-Posts on units up to 8' high.

All intermediate single rivet levels over 24 inches deep must also have single rivet beams supporting the particle board front to back.

All double rivet beam units must have front to back beams at each shelf level.

(*) One (1) support per pair of beams except 96" which have two (2) supports

(**) Refer to shelf load capacities for beam capacities when depth is 30", 36" and 48".

(***) Beam rotation is less than 5 degrees.

COLOR SELECTION

729 Parchment

Hallowell


www.Hallowell-List.com

Recruiter Lockers can be custom designed to meet specific sport requirements. In addition, they are made taking in consideration today's athletes and their expectations.

RECRUITER™ Custom Wood Sport Lockers

Every Recruiter™ locker is a work of art combining beauty, practicability and functionality. These designs represent applications for specific sports. We can, however design and build one to meet your exact requirements. Our design department and engineers are ready to assist you in creating your own special locker.

PRODUCTION ITEM
Please Visit
www.Hallowell-List.com
For Lead Times

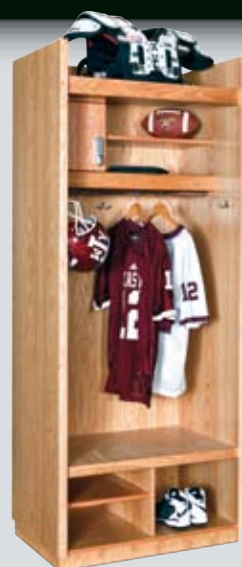

Adjustable shelves provide exceptional flexibility to user.

FOOTBALL LOCKER



BASKETBALL LOCKER



SOCCER LOCKER



HOCKEY LOCKER



BASEBALL AND LACROSSE LOCKER



Digital Lock



Combination lock



Upper security box with piano hinge



Adjustable upper shelves



Lower Seat with foot locker




Adjustable side shelves



Unique lockable storage for lacrosse and baseball



Lower Seat with cubbie storage

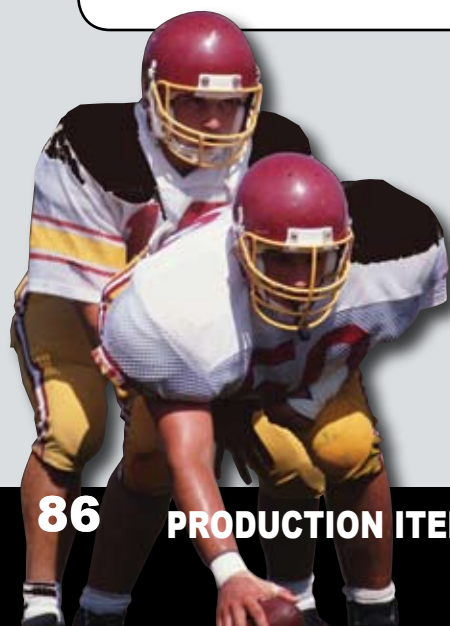

**SAFETY
DURABILITY
VALUE...**



Hallowell®

www.Hallowell-List.com

HALLOWELL® ALL-WELDED SCHOOL CUBBIES

CUBBIE

Children Safe!



Hallowell Cubbie Locker line is designed to meet the needs of early childhood and elementary school classrooms. Combining our unibody all-welded locker construction and the added safety features required for this specialized market, we offer four distinct models designed to meet any child's personal storage needs. Hallowell Cubbies are backed by our written lifetime Warranty.

4 MODELS AND 24 COLORS



*Primary
Cubbie*



*Primary II
Cubbie*




*Primary Jr.
Cubbie*



*Backpack
Cubbie*



Hemmed and beaded edges eliminate sharp edges



Number plate in bottom of cubbie so children can easily identify their cubbie space.

FEATURES

BODY CONSTRUCTION: Unibody all-welded 16 gauge steel construction, backs are 18 gauge, bottom is galvaneal sheet steel for maximum corrosion resistance, hemmed and beaded edges are safe to the touch

BODY STYLES: Open design, 4 body styles

SHELVES: 16 gauge welded to body for added rigidity with a beaded leading edge for added safety

MODEL SIZES	WIDTH	DEPTH	HEIGHT
Primary Cubbie	12", 15"	12", 16"	48"
Primary II Cubbie	12", 15"	12", 16"	48"
Primary Jr. Cubbie	12", 15"	12", 16"	24"
Backpack Cubbie	15", 18"	12", 16"	48"

NOTES: Easily secures to wall and floor for added safety, Low installation costs, reduced installation time, low maintenance, low life-cycle cost, lifetime warranty, insect and termite proof. All welded cubbies will ship in multiple column units up to 60" wide to meet individual jobsite conditions.



Hallowell®

www.Hallowell-List.com

**THESE ARE THE FINEST
SPORT LOCKERS
MADE TODAY**



HSL-00 Open Front Gear Lockers

Our complete line-up of open-front gear lockers are specifically engineered for High School, Collegiate and Professional team organizations who demand high performance equipment storage solutions.



Base model offers upper hat shelf and coat hooks




Shown with optional 12" wide security box, stainless steel coat rod and foot locker/seat

These lockers feature our unique Unibody Design which provides unsurpassed strength and durability.



Underside of Foot Locker Seat is reinforced to support today's athlete.

Security-Plus™ ventilated front panel



Our all-welded Open Front Gear lockers are designed to accommodate a wide variety of equipment and apparel while allowing maximum ventilation.

Our base model includes one upper hat shelf with a compliment of coat hooks. You can add a choice from three upper security compartments for personal storage: a small wallet security box, a 12" wide side hinged security box or the full width top hinged security compartment.

In the lower area, you can add a shelf/seat or opt for the foot locker/seat for a lockable equipment storage area. You can finish off your sport locker with our optional stainless steel coat rod.

Open Front Gear lockers feature our all-welded Unibody design which provides two front frame channels between sides of multiple column units and integral sides which are diamond perforated for ventilation.



Shown with optional wallet security box and stainless steel coat rod

Shown with optional full-width security compartment, and stainless steel coat rod, and lower seat/shelf. Door includes Security-Plus™ ventilation.



Open Front lockers are engineered to last the lifetime of your facility, we guarantee it.

LOCKER SIZES:

Widths 12", 15", 18", 24", 30", 33" and 36"


Depths 12", 16", 18", 22"

Column Heights 60", 72", 84"


Note: Lockers will ship in multiple column units up to 60" wide to meet individual job site conditions.



Optional stainless steel coat rod

Hallowellwww.Hallowell-List.com**PRODUCTION
ITEM**Please Visit
www.Hallowell-List.com
For Lead Times

HTHV-01 Turn-handle Ventilated Lockers

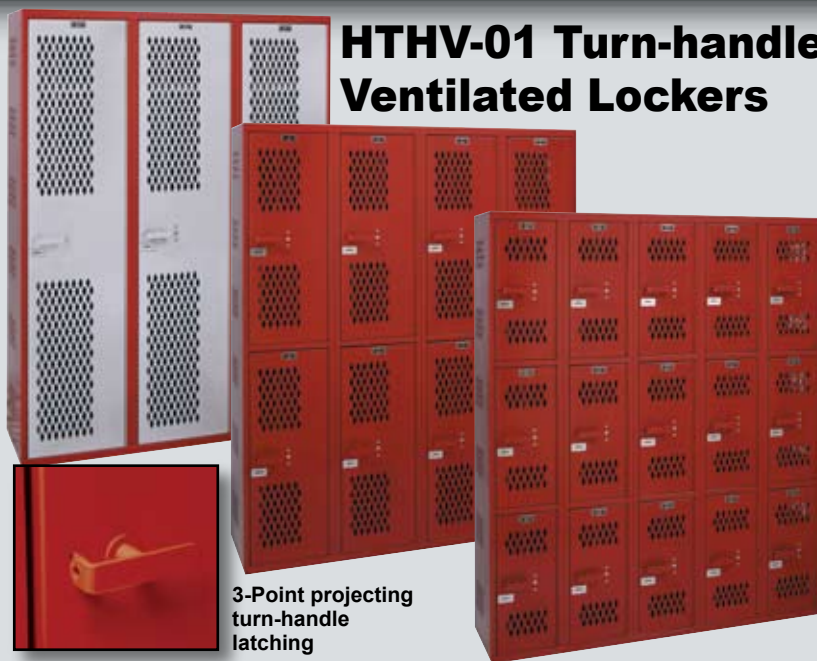

3-Point projecting
turn-handle
latching

STANDARD SIZES FOR ALL-WELDED WARDROBE LOCKERS

	SINGLE TIER	DOUBLE TIER	TRIPLE TIER
Widths	9", 12", 15", 18", 24"	9", 12", 15", 18", 24"	9", 12", 15", 18", 24"
Depths	12", 16", 18", 22"	12", 16", 18", 22"	12", 16", 18", 22"
Opening Heights	48", 60", 72"	24", 30", 36"	20", 24"
Nominal Column Heights	48", 60", 72"	48", 60", 72"	60", 72"

NOTE: All welded lockers will ship in multiple column units up to 60" wide to meet individual job site conditions

FEATURES:

BODY CONSTRUCTION: Unibody all-welded construction, 16 gauge 1-1/2" high continuous bottom with reinforcing channels welded to the underside at each side panel providing a rigid unit base, 16 gauge continuous top, 16 gauge diamond perforated sides are integral with front vertical frame, 18 gauge solid back

DOORS: 14 gauge diamond perforated doors are standard. Plain, Secure-Air-Flow, and louvered door styles are available

HANDLE: 3-point turn-handle latching

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

LATCHING: 3-point turn-handle latching engaging at frame top, bottom and center side of door, 3/8" diameter lock rods are the heaviest in the industry, 3/16" turn-handle welded to 11 gauge cam, 11 gauge lock plate keeper is welded to center side of frame

HINGES: 16 gauge continuous piano hinge

SHELVES: 16 gauge hat shelf for single tier openings 60" and 72" high, 16 gauge intermediate shelves

HOOKS: 2-single hooks and 1-double hook is standard. 1-double hook only for triple tier and 1-double and 1-single hook for 9" wide openings 30" and higher

WARRANTY: Lifetime

SIZES: See chart for standard wardrobe locker sizes

HGLV-02 Gravity Latch Ventilated Lockers



SEE ABOVE CHART FOR
STANDARD SIZES

Seamless deep
drawn stainless steel
recessed handle
with gravity
lift-type latching

FEATURES:

BODY CONSTRUCTION: Unibody all-welded construction, 16 gauge 1-1/2" high continuous bottom with reinforcing channels welded to the underside at each side panel providing a rigid unit base, 16 gauge continuous top, 16 gauge diamond perforated sides are integral with front vertical frame, 18 gauge solid back

DOORS: 14 gauge diamond perforated doors are standard. Plain, Secure-Air-Flow, Safety-View and louvered door styles are available

HANDLE: Deep-drawn seamless stainless steel recessed handle

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

LATCHING: 12 gauge latch hooks MIG welded to frame, gravity lift-type multi-point spring loaded latching:

- 3-point latching for openings 48" high and higher
- 2-point latching for openings 20" high thru 36" high


HINGES: 16 gauge continuous piano hinge

SHELVES: 16 gauge hat shelf for single tier openings 60" and 72" high, 16 gauge intermediate shelves

HOOKS: 2-single hooks and 1-double hook is standard. 1-double hook only for triple tier and 1-double and 1-single hook for 9" wide openings 30" and higher

WARRANTY: Lifetime

SIZES: See chart above for standard wardrobe locker sizes



HGLS-03 Gravity Latch Solid Sides



Seamless deep drawn stainless steel recessed handle with gravity lift-type latching

FEATURES:

BODY CONSTRUCTION: Unibody all-welded construction, 16 gauge 1-1/2" high continuous bottom with reinforcing channels welded to the underside at each side panel providing a rigid unit base, 16 gauge continuous top, 16 gauge solid sides are integral with front vertical frame, 18 gauge solid back

DOORS: 14 gauge louvered doors are standard. Plain, Secure-Air-Flow, Safety-View and diamond perforated door styles are available

HANDLE: Deep-drawn seamless stainless steel recessed handle

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

LATCHING: 12 gauge latch hooks MIG welded to frame, gravity lift-type multi-point spring loaded latching:

- 3-point latching for openings 48" high and higher
- 2-point latching for openings 20" high thru 36" high

HINGES: 16 gauge continuous piano hinge

SHELVES: 16 gauge hat shelf for single tier openings 60" and 72" high, 16 gauge intermediate shelves


HOOKS: 2-single hooks and 1-double hook is standard.

1-double hook only for triple tier and 1-double and 1-single hook for 9" wide openings 30" and higher

WARRANTY: Lifetime

SIZES: See page 78 for standard wardrobe locker sizes

HSPV-04 Single-Point Ventilated Lockers

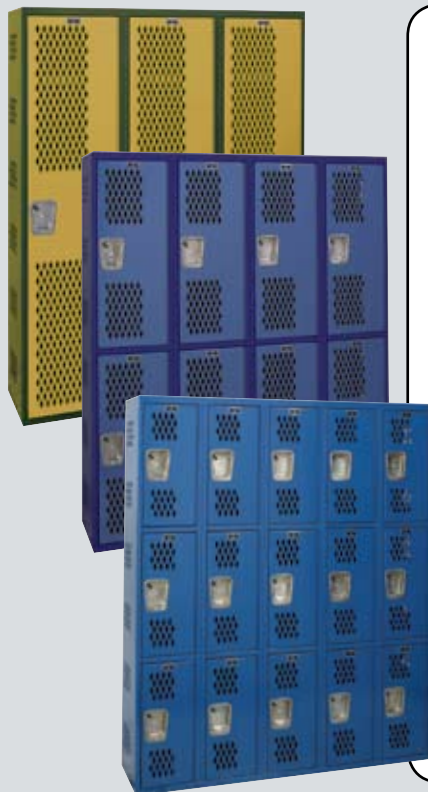

FEATURES:

BODY CONSTRUCTION: Unibody all-welded construction, 16 gauge 1-1/2" high continuous bottom with reinforcing channels welded to the underside at each side panel providing a rigid unit base, 16 gauge continuous top, 16 gauge diamond perforated sides are integral with front vertical frame, 18 gauge solid back

DOORS: 14 gauge diamond perforated doors and full-height door stiffener are standard. Plain, Secure-Air-Flow and louvered door styles are available

HANDLE: Deep-drawn seamless stainless steel recessed handle is standard.

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

LATCHING: Single-point maintenance-free quiet latching system, 11 gauge MIG welded latch

HINGES: 16 gauge continuous piano hinge

SHELVES: 16 gauge hat shelf for single tier openings 60" and 72" high, 16 gauge intermediate shelves

HOOKS: 2-single hooks and 1-double hook is standard.

1-double hook only for triple tier and 1-double and 1-single hook for 9" wide openings 30" and higher

WARRANTY: Lifetime

SIZES: See page 78 for standard wardrobe locker sizes



Deep drawn stainless steel recessed handle with single-point latching is standard



Hallowell HSPV-04 lockers include a 3" wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torque-free door. A 1-1/2" wide stiffener will be furnished for 9" wide HSPV-04 doors.

Hallowellwww.Hallowell-List.com**PRODUCTION
ITEM**Please Visit
www.Hallowell-List.com
For Lead Times

HSPS-05 Single-Point Solid Lockers



Deep drawn stainless steel recessed handle with single-point latching

FEATURES:

BODY CONSTRUCTION: Unibody all-welded construction, 16 gauge 1-1/2" high continuous bottom with reinforcing channels welded to the underside at each side panel providing a rigid unit base, 16 gauge continuous top, 16 gauge solid sides are integral with front vertical frame, 18 gauge solid back

DOORS: 14 gauge plain doors and a full-height door stiffener are standard. Secure-Air-Flow, diamond perforated and louvered door styles are available

HANDLE: Deep-drawn seamless stainless steel recessed handle

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

LATCHING: Single-point maintenance-free quiet latching system, 11 gauge MIG welded latch

HINGES: 16 gauge continuous piano hinge

SHELVES: 16 gauge hat shelf for single tier openings 60" and 72" high, 16 gauge intermediate shelves

HOOKS: 2-single hooks and 1-double hook is standard.

1-double hook only for triple tier

1-double and 1-single hook for 9" wide openings 30" and higher

WARRANTY: Lifetime

SIZES: See page 78 for standard wardrobe locker sizes



Hallowell HSPS-05 lockers include a 3" wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torque-free door. A 1-1/2" wide stiffener will be furnished for 9" wide HSPS-05 doors.

HBLV-06 Ventilated Box Lockers



FEATURES:

BODY CONSTRUCTION: Unibody all-welded construction, 16 gauge 1-1/2" high continuous bottom with reinforcing channels welded to the underside at each side panel providing a rigid unit base. 16 gauge continuous top, 16 gauge diamond perforated sides are integral with front vertical frame, 18 gauge solid back

DOORS: 14 gauge diamond perforated doors are standard. Louvered, Secure-Air-Flow and plain door styles are available.

HANDLE/LATCHING: Single-point thru-the-door projecting finger pull handle with padlock hasp. Optional deep-drawn seamless stainless steel recessed handle is available

HINGES: 16 gauge continuous piano hinge

HOOKS: None

SHELVES: 16 gauge intermediate shelves

WARRANTY: Lifetime

SIZES: See chart below for standard box locker sizes


NOTE: 8" and 9" high box doors will be top hinged with a concealed 3/8" diameter continuous hinge rod

Single-point thru-the-door finger pull padlock hasp
Optional padlock strike plates for box doors protect finish from being marred by padlock



Widths for all box locker openings 12", 15", 18" Depths for all box locker openings 12", 16", 18", 22"		
TIER	OPENING HEIGHT	NOMINAL COLUMN HEIGHTS
Four Tier	12", 15", 18"	48", 60", 72"
Five Tier	12", 14.4"	60", 72"
Six Tier	8", 10", 12"	48", 60", 72"
Seven Tier	(6) 10" & (1) 12"	72"
Eight Tier	8", 9"	64", 72"
Nine Tier	8"	72"

Please note that the actual units supplied will be fabricated to meet layout and job conditions in standard width units up to 60" wide



HESL-07 Equipment Storage Lockers (TA-50)

FEATURES:

BODY CONSTRUCTION: Unibody all-welded construction, 16 gauge 1-1/2" high continuous bottom with reinforcing channels welded to the underside at each side panel providing a rigid unit base, 16 gauge continuous top, 16 gauge diamond perforated sides are integral with front vertical frame, 18 gauge solid back. Optional solid sides are available

DOORS: 14 gauge diamond perforated doors with a full height door stiffener are standard. Secure-Air-Flow, diamond perforated and louvered door styles are available

HANDLE: 3-point turn-handle

DOOR STRIKE: Continuous vertical door strike at both hinge sides

LATCHING: 3/16" turn-handle welded to 11 gauge cam engaging frame at top, bottom and center side of door. 3/8" diameter lock rods

HINGES: 16 gauge continuous piano hinge

SHELVES: 16 gauge hat shelf located 12" down from top, 16 gauge lower shelf located 18" up from bottom

COAT ROD: Stainless steel full-width coat rod located under hat shelf

WARRANTY: Lifetime



Equipment Storage Locker Sizes

Widths	24", 30", 36", 48"
Depths	12", 16", 18", 22"
Heights	60", 72", 84"

Equipment Storage lockers will ship in multiple column units up to 60" wide to meet individual job site conditions.



3-point projecting turn-handle latching is standard.

Shown with optional Padlock Strike Plate

Shown with optional padlock strike plate



Premium KD Wardrobe Lockers



Single Tier,
1 wide,
1 opening

Double Tier,
1 wide,
2 openings

Triple Tier,
1 wide,
3 openings

FEATURES: (Doors 20" high and higher)

BODY CONSTRUCTION: Knock down (KD) with 24 gauge solid body components

DOORS: 16 gauge louvered doors, 18 gauge for 9" wide, are standard. Plain, Secure-Air-Flow, Safety-View and diamond perforated door styles are available

FRAME: 16 gauge frame with 16 gauge horizontal cross member between doors on double and triple tier wardrobe lockers

HANDLE: Deep-drawn seamless stainless steel recessed handle

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

LATCHING: 12 gauge latch hooks MIG welded to frame. Gravity lift-type multi-point spring loaded latching:

- 3-point latching for openings 48" high and higher
- 2-point latching for openings 20" high thru 36" high

HINGES: 16 gauge continuous piano hinge

HOOKS: 2-single hooks and 1-double hook is standard. 1- double hook only for triple tier and 1-double and 1 - single hook for 9" wide openings 30" and higher

SHELVES: Hat shelf for single tier openings 60" and 72" high

NOTES: All production KD lockers are supplied without legs unless otherwise specified

WARRANTY: 2 years

SIZES: See page 82 for sizes



Deep Drawn stainless steel recessed handle with gravity lift-type latching



Latch hook is welded to frame

Hallowell

www.Hallowell-List.com



PRODUCTION ITEM
Please Visit
www.Hallowell-List.com
For Lead Times

ECONOMY AND VERSATILITY

Premium KD Box Lockers

FEATURES: (Doors 18" high and under)

BODY CONSTRUCTION: Knock down (KD) with 24 gauge solid body components

DOORS: 18 gauge louvered doors are standard. Plain, Secure-Air-Flow, Safety-View Plus and diamond perforated door styles are available

FRAME: 16 gauge frame

HANDLE: Projecting finger pull

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

LATCHING: Single-point thru-the-door finger pull padlock hasp

HINGES: 16 gauge continuous piano hinge

HOOKS: None

NOTES: All production KD lockers are supplied without legs unless otherwise specified. Safety-View Plus polycarbonate doors are available for 12" wide x 12" high five and six tier box doors only

WARRANTY: 2 years

SIZES: See chart below for sizes

Box door single-point thru-the-door finger pull padlock hasp



Optional padlock strike plates for box doors protect finish from being marred by padlock



Four Tier,
1 wide,
4 openings

Five Tier,
1 wide,
5 openings

Six Tier,
1 wide,
6 openings



Premium K.D. Locker Sizes		Width	Depth	Opening Height	Frame Height
Wardrobe	Single Tier	9" 12" 15" 18" 24"	12" 15" 18" 21" 24"	36" 48" 60" 72"	36" 48" 60" 72"
	Double Tier	9" 12" 15" 18"	12" 15" 18" 21"	30" 36"	60" 72"
	Triple Tier	9" 12" 15" 18"	12" 15" 18" 21"	20" 24"	60" 72"
Box	Four Tier	12", 15"	12" 15" 18"	15" 18"	60" 72"
	Five Tier	12", 15"	12" 15" 18"	12", 14.4"	60" 72"
	Six Tier	12", 15"	12" 15" 18"	12"	72"
Specialty	Two Person	15" 18"	12" 15" 18"	N/A	60", 72"
	Duplex	15"	12" 15" 18"	60", 72"	60", 72"
	Sixteen Person	72"	18"	12"	78" (Includes 6" legs)
	4 wide wall mount	48"	18"	12"	14-3/4"

Premium KD Specialty Lockers



Duplex
Double Tier,
2 wide,
2 openings



Two-Person
Four Tier,
2 wide,
4 openings

Duplex

Duplex Lockers are the most economical full length lockers available. Duplex lockers provide two completely private lockers in each frame. One hat shelf and two single wall hooks are standard in each wardrobe opening. Coat rod is optional.

Two-Person

Two-Person Lockers provide ample storage space for two users in a 15" wide space. Upper box doors are controlled by command latches located in the corresponding lower compartment. Two single hooks per wardrobe opening is standard. Coat rod is optional.



Stainless steel recessed handle is standard for Duplex and Two-Person lockers

4-wide Wall Mount Unit



Sixteen Person

lockers are the economical solution for personal security along with hanging space for full length garments. 48" wide coat rod is included

6" high legs are standard for 16-Persons lockers only



THE STANDARD FOR QUIET LOCKERS



Hallowell
www.Hallowell-List.com

STANDARD QUIET & MFQ QUIET LOCKERS

Standard And Whisper Quiet KD Lockers

Silent
Quiet

Standard
Quiet



Double Tier, 1 wide, 2 openings Double Tier, 1 wide, 2 openings

FEATURES:

BODY CONSTRUCTION: Knock down (KD) with 24 gauge solid body components

DOORS: 16 gauge plain doors (18 gauge for 9" wide), Sound deadening panel and vinyl coated latching for Whisper quiet lockers only

FRAME: 16 gauge frame with 16 gauge horizontal cross member between doors on double and triple tier wardrobe lockers

HANDLE: Deep drawn stainless steel recessed handle

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

LATCHING: 12 gauge latch hooks MIG welded to frame. Gravity lift-type multi-point spring loaded latching:

- 3-point latching for openings 48" high and higher
- 2-point latching for openings 20" high thru 36" high

HINGES: 16 gauge continuous piano hinge

HOOKS: 2-single hooks and 1-double hook is standard. 1- double hook only for triple tier and 1-double and 1 - single hook for 9" wide openings 30" and higher

SHELVES: Hat shelf for single tier openings 60" and 72" high

NOTES: All production KD lockers are supplied without legs unless otherwise specified. Standard Quiet and Artisan Quiet lockers are available with plain doors only. Additional perforations/louvers in the door will increase decibel levels thus reducing the efficiency of our quiet design.

WARRANTY: 2 years

SIZES: See wardrobe locker chart on page 82 for sizes



Sound deadening panel welded to inner door face is standard on Silent Quiet



Ventilated top and bottom door flanges



Deep drawn stainless steel recessed handle with gravity lift-type latching



12 gauge Latch hook is welded to frame

Maintenance-Free™ Quiet KD Lockers (MFQ)



Single Tier, 1 wide, 1 openings Double Tier, 1 wide, 2 openings Triple Tier, 1 wide, 3 openings

FEATURES:

BODY CONSTRUCTION: Knock-down, 24 gauge

BODY STYLES: Single, double and triple tier

DOOR: 16 gauge, solid

HINGES: Continuous piano type

HANDLE: Deep drawn stainless steel recessed handle with single-point latching. Recessed handle protects finish from being marred by padlock.

HOOKS: One double prong ceiling hook and two single wall hooks per single and double tier opening. One double ceiling hook for triple tier.


COAT RODS: Available for single tier at a nominal cost

SHELVES: Hat shelf for single tier openings 60" and 72"

WARRANTY: 2 years

SIZES: See wardrobe locker chart on page 82 for sizes

NOTES: All production lockers are supplied without legs unless otherwise specified.



11 gauge single-point latch



Deep drawn stainless steel recessed handle with single-point latching



MFQ lockers include a 3" wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded

to the hinge side as well as to the top and bottom door flanges providing a rigid torque-free door. A 1-1/2" wide stiffener will be furnished for 9" wide MFQ doors.

STOCK  PROGRAM

THE FASTEST SHIPPING IN THE INDUSTRY...



HEAVY-DUTY LOCKERS

MAX OPTION

upgrades all body components to 16 gauge with 18 gauge back

Single Tier,
1 wide,
1 openingDouble Tier,
1 wide,
2 openingsTriple Tier,
1 wide,
3 openings

Heavy-Duty Corridor KD Lockers (HDC)

Heavy-Duty Corridor lockers, commonly known as HDC lockers, are designed to include all the great features of our Standard KD wardrobe lockers with the doors upgraded to 14 gauge.

FEATURES

BODY CONSTRUCTION: Knock down with 24 gauge solid body components

DOORS: 14 gauge louvered doors are standard. Plain, Secure-Air-Flow, Safety-View and diamond perforated door styles are available

FRAME: 16 gauge frame with 16 gauge horizontal cross member between doors on double and triple tier wardrobe lockers

HANDLE: Deep-drawn seamless stainless steel recessed handle

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

LATCHING: 12 gauge latch hooks MIG welded to frame. Gravity lift-type multi-point spring loaded latching:

- 3-point latching for openings 48" high and higher
- 2-point latching for openings 20" high thru 36" high

HINGES: 16 gauge continuous piano hinge

HOOKS: 2-single hooks and 1-double hook is standard. 1- double hook only for triple tier and 1-double and 1- single hook for 9" wide openings 30" and higher

SHELVES: Hat shelf for single tier openings 60" and 72" high

NOTES: All production KD lockers are supplied without legs unless otherwise specified


WARRANTY: 2 years

SIZES: See wardrobe locker chart on page 82 for sizes

PRODUCTION ITEMPlease Visit
www.Hallowell-List.com
For Lead Times

Deep drawn stainless steel recessed handle with gravity lift-type latching.

Heavy-Duty Ventilated KD Lockers (HDV)

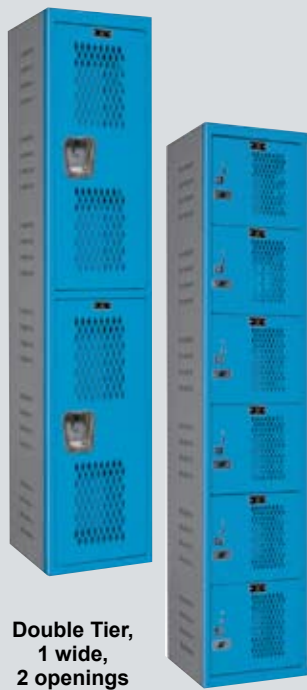Double Tier,
1 wide,
2 openingsSix Tier,
1 wide,
6 openings

BODY CONSTRUCTION (WARDROBE & BOX LOCKERS): Knock down with 16 gauge solid top, bottom and intermediate shelves, 16 gauge diamond perforated sides, 18 gauge solid back

DOORS: 14 gauge diamond perforated doors are standard. Louvered, Security-Plus and Safety-View door styles are available

FRAME: 16 gauge frame with 16 gauge horizontal cross member between doors on double and triple tier wardrobe lockers

HINGES: 16 gauge continuous piano hinge

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

WARDROBE LOCKERS (DOORS 20" AND HIGHER):

HANDLE: Deep-drawn seamless stainless steel recessed handle

LATCHING: Gravity lift-type multi-point spring loaded latching:

- 3-point latching for openings 48" high and higher,
- 2 point latching for openings 20" high thru 36" high

HOOKS: 2-single hooks and 1-double hook is standard.

- 1- double hook only for triple tier and 1-double
- 1- single hook for 9" wide openings 30" and higher

SHELVES: 16 gauge hat for single tier openings 60" and 72" high

BOX LOCKERS (DOORS 18" HIGH AND UNDER):

HANDLE: Single-point thru-the-door finger pull padlock hasp

HOOKS: None

NOTES: All production KD lockers are supplied without legs unless otherwise specified

WARRANTY: 2 years

SIZES: See charts on page 82 for wardrobe and box locker for sizes

PRODUCTION ITEMPlease Visit
www.Hallowell-List.com
For Lead Times

Deep drawn stainless steel recessed handle with gravity lift-type latching for doors 20" high and higher

BENCHES, PEDESTALS AND LOCKS

Hallowell

www.Hallowell-List.com

BENCHES, PEDESTALS AND LOCKS



4850 Hi-Tech Steel Pedestal

Fabricated from 14 gauge galvanized sheet steel. 2-piece design allows for concealed fastening. Color: Parchment



4850-S Hi-Tech Stainless Steel Pedestal

Fabricated from 14 gauge stainless steel. 2-piece design allows for concealed fastening. Color: Unpainted



8032 Adjustable Steel Pedestal

With cast aluminum base and concealed anchoring to floor. Color: Parchment




4810 Heavy-Duty Cast Iron Pedestal

With 6" diameter top and bottom. Provided with three anchoring holes at top and bottom. Color: Parchment




4820 Aluminum Moveable Pedestal


Includes holes for optional permanent anchoring to floor. Color: Parchment

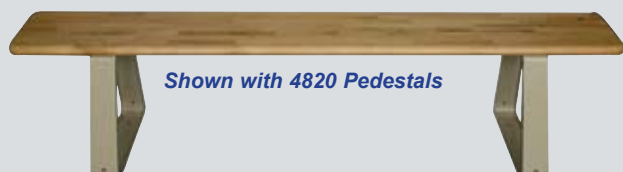

Shown with 4820 Pedestals

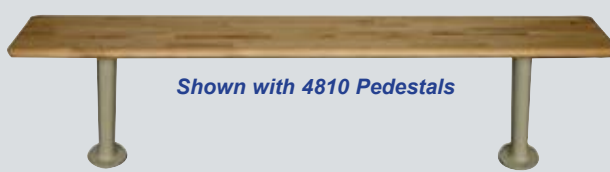

Shown with 4810 Pedestals

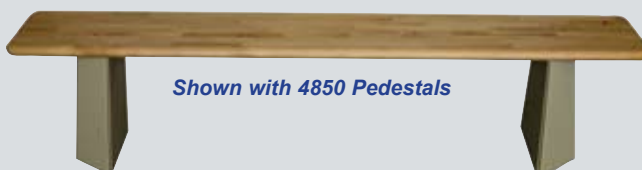

Shown with 4850 Pedestals

Benchtop Length	3' - 8'	9' - 14'	15'
Pedestals Required	2	3	4

Note: Benchtop lengths over 15' will be supplied in sections

Locker Benches are 9-1/2" wide x 1-1/4" thick and made from laminated all white northern hard maple. They are finished with one coat deep penetrating hot sealer and two coats of heavy body high impact hot hydraulically applied lacquer. Bench tops are standard in one foot increments from 3' thru 15'. Non-standard lengths are available on special order (pedestal requirement will be for next standard size up).

Padlocks, Built-in Locks and Specialty Locks

Hallowell recommends ZEPHYR® locks for use on all of our Lockers.



Zephyr® Built-In Combination Locks

Available in spring-bolt and dead-bolt styles, are key controlled and include multiple combination settings



Zephyr® Combination Padlocks

Available standard and master-keyed, padlocks can be used on all locker types



Zephyr® Built-In Key Locks

Available in spring-bolt and dead-bolt styles and available standard or master-keyed



Zephyr® 1730
ADA compliant for use on gravity lift-type latches

Non-Stock Quick Ship Items - Call for Availability and Lead times.



SAFE-O-MAT® Built-In Coin, Token and Card Locks

Available in coin return and coin collect as well as token collect and card access styles



Digilock® KT and KP Series

Digital locks allow access using a programmable four-digit code



Digilock® T-Series





Digitally controlled locks allow access by touching a key fob to the lock which automatically unlocks the door.



Hallowell Digital Locks




Digital locks allow access using a programmable four-digit code

NOTE: An ADA compliant lock must be used on any locker that is required to meet ADA guidelines

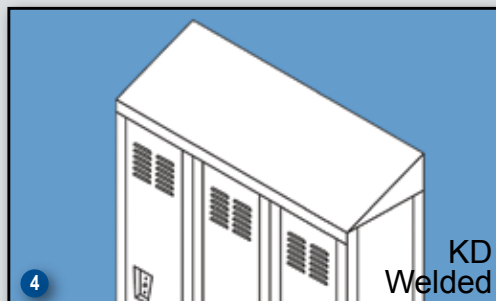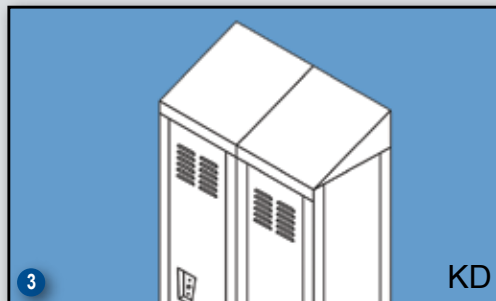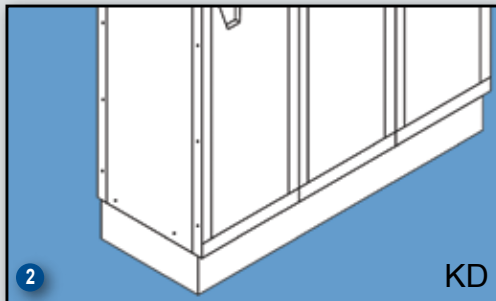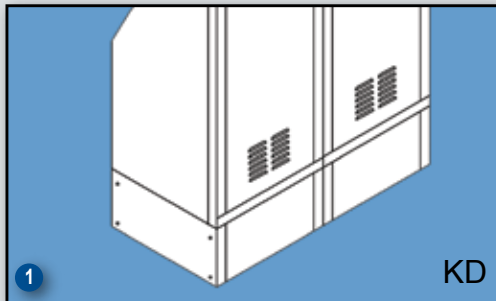**SPECIFICATIONS**

- 1 6" Closed Front Base (KD lockers only):** Shall be fabricated of 16 gauge cold rolled sheet steel flanged on all four sides for rigidity. Front bases include projecting tabs on side flanges designed to align with holes in front legs allowing front bases to be snapped into place requiring no additional fasteners. Side bases are to be included at all exposed ends and are bolted to front and rear legs. Finish to match lockers. **Available Quick-Ship from stock in 5 standard colors.**
- 2 4" Continuous Z-Base (KD lockers only):** Shall be fabricated from 16 gauge cold rolled sheet steel fabricated in 72" lengths, flanged at the top to form a 1-3/8" toe space and at the bottom allowing concealed fastening to the finished floor. Continuous Front Bases include holes for use with splice plates where bases are joined end-to-end. End Bases are to be included at all exposed ends. Where additional support is desired, End Bases may be substituted for splices at Continuous Front Base joints. Finish to match lockers. **Available Quick-Ship from stock in 5 standard colors.**
- 3 20 gauge Individual Slope Top (KD lockers only):** Not less than 20 gauge cold rolled sheet steel, 18 degree pitch, fabricated to be installed individually over each locker. Slope top is formed to include a full back. Individual Slope Tops are to be installed in addition to the locker flat top. End closures are to be provided at exposed ends. Finish to match lockers. **Available Quick-Ship from stock in 5 standard colors.**
- 4 18 gauge Continuous Slope Top:** Not less than 18 gauge cold rolled sheet steel, 18 degree pitch, in 72" lengths. A splice cover with concealed spring clip is to be used to cover joints where Continuous Slope Tops are joined end-to-end. To be installed in addition to the locker flat top with end closures for support. Finish to match lockers. **Available Quick-Ship from stock in 5 standard colors.**
- 4 16 Gauge Continuous Slope Top:** Not less than 16 gauge cold rolled sheet steel, 18 degree pitch, in 72" lengths. A splice cover with concealed spring clip is to be used to cover joints where Continuous Slope Tops are joined end-to-end. To be installed in addition to the locker flat top with end closures for support. Finish to match lockers.
- 5 Recessed Trim:** Fabricated of 16 gauge cold rolled sheet steel. 3" wide side trim shall be notched at the top and include a retainer to allow the 3" wide top trim to fit snugly into the side trim. Recess trim is designed to be used when the lockers are installed with the locker fronts flush with the top and side walls. The top and side trim will project 3/8" beyond the side and top walls and include return bends back to the walls. Finish to match lockers. **Available Quick-Ship from stock in 5 standard colors.**
- 6 Minimum Punched End Panel (KD lockers only):** Shall be from 18 gauge cold rolled steel and formed to fit tightly over the universal side panel at exposed row ends. Holes are provided at perimeter for fastening to locker. Minimum Punched End Panels are designed to cover all fasteners other than those at the perimeter of the panel. Finish to match lockers. Provide at all exposed ends. **Available Quick-Ship from stock in 5 standard colors.**
- 7 Boxed End Panel:** Shall be "Boxed" type formed from 16 gauge cold rolled steel with 1" O.D. double bends on sides and a single bend at top and bottom with no exposed holes or bolts. If lockers have slope tops, end panels must be formed with slope at top to cover the ends of the slope tops. Finish to match lockers. Provide at all exposed ends.
- 8 Fillers:** Provide where indicated, of not less than 16 gauge cold rolled sheet steel, factory fabricated to and finished to match lockers. **Available Quick-Ship from stock in 5 standard colors.**

Note: visit our website at www.Hallowell-List.com for complete installation details and instructions.

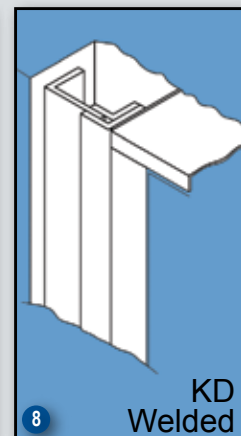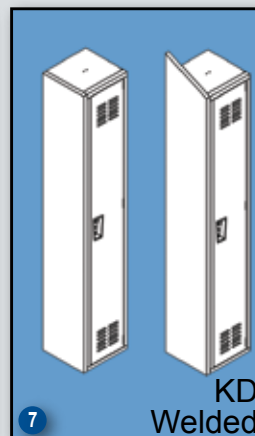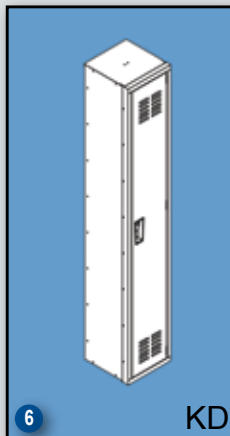

COLOR SELECTION

Hallowell

www.Hallowell-List.com

COLOR CHART

24 Designer Powder Coat Colors

For Metal Production Lockers

Enhance your decor with two-tone
color combinations, doors one
color and frame a second color,
AT NO ADDITIONAL COST.

		
714 Snow White	710 Sandstone	708 Midnight Ebony
		
736 Sport Silver	729 Parchment	713 Sand Beige
		
711 Platinum	706 Heather	725 Hallowell Gray
		
738 Charcoal	723 Trophy	728 Hoop
		
737 Forest Gold	721 Relay Red	727 Maroon
		
722 Tidal Wave	731 Denim	720 Pep Rally
		
707 Marine Blue	717 Grand Slam	719 Jersey
		
705 Green Mist	735 Basil	704 Evergreen

All surfaces shall be thoroughly cleaned with a seven stage hot-spray washing process and coated with an insoluble iron phosphate film. A high grade of custom blended powder is applied by a computer controlled, highly efficient electrostatic paint system. The product is cured for 20 minutes at 350 degrees through a continuous baking oven to provide maximum paint adhesion, tough durability and a smooth paint finish.

Note: All body components of production KD lockers will be painted our standard neutral color, currently Parchment (choice of Parchment or Hallowell Gray for HDV body components only).



MHEDA

**MATERIAL HANDLING
INDUSTRY
OF AMERICA®**

2823 W. Orange Ave. Apopka, FL 32703

866-566-0500

Tel: 407-464-3611 Fax: 407-464-3610

Colors shown are an approximate representation of the actual color. Hallowell reserves the right to modify it's designs and/or make changes in specifications or colors without prior notice. In the interest of safety, all Hallowell lockers must be securely anchored to the floor and/or wall.

CUSTOM COLORS ARE ALSO AVAILABLE UPON REQUEST

99



2823 W. Orange Ave. Apopka, FL 32703

866-566-0500

Tel: 407-464-3611

Fax: 407-464-3610

www.Hallowell-List.com

