



Condensate Separators
HGS SERIES AND HPE SERIES

SELECTIVELY TARGET LUBRICANTS TO ENSURE SUCCESSFUL SEPARATION

CONDENSATE... THE BYPRODUCT OF AIR COMPRESSION

Condensate generated by lubricated type air compressors is comprised of atmospheric borne water vapor and lubricant from the compression process. Post compression, condensate is dropped from the air stream in the cooling, refrigerated drying and filtration phases of the air treatment process. Regardless of site conditions, it is virtually impossible to remain legally compliant with local discharge regulations without proper separation equipment.

CONDENSATE VOLUME... IT CHANGES WITH THE WEATHER

Changes in ambient temperature, relative humidity and plant air demands leaves the ratio of lubricant-to-water, commonly referred to as parts per million (ppm), in flux. Condensable water vapor varies from practically nothing during frosty winter conditions, to large volumes produced during the heat and humidity of summer.

With average ambient conditions of 70°F/70% R.H., a 500 scfm (100 HP) air system can fill two (2) 24-foot swimming pools every year. Rather than store the condensate and pay to have it hauled away, both economy and ecology dictate the installation of the proper Hankison Condensate Separator to target the undesirable lubricant.

ASTM #D-1401 TEST RESULTS...THE KEY TO SEPARATOR SELECTION

Equal parts of fresh lubricant and distilled water are blended in this laboratory test performed by the lubricant manufacturers. Due to each unique formulation, test results will vary from manufacturer-to-manufacturer for what appears to be the same type of lubricant. Results range from complete separation in <1 minute, to a homogenized emulsion that never separates. Comprehensive lubricant identification is critical to ensure the proper Condensate Separator is selected.

SELECTION GUIDELINES*

Series	Lubricant ml	Distilled H ₂ O ml	Emulsion ml	Time min.
HGS	40	40	0	1
HPE	<40	>40	2 or 3	varies

* Computerized sizing program ensures proper selection.
Consult your distributor.

ACTIVE MEDIA



HGS Series
Pelletized activated carbon
adsorbs trace lubricants





HPE Series
Magnetized zeolite absorbs
polar formulations

HANKISON HGS SERIES... TARGETS DEMULSIBLE LUBRICANTS

"Gravity Separation" Condensate Separators are ideal for applications that use a single lubricant and rapidly separate in <5 minutes into 2 distinct layers. Excellent candidates tend to be proprietary PAO (polyalphaolefin) based lubricants marketed by compressor manufacturers.

HGS Series Separators use a large tank of water that allows separable lubricant to float to the surface. Incoming condensate displaces cleaner water from the bottom to flow through a bed of activated carbon to remove trace lubricant to 15 ppm.

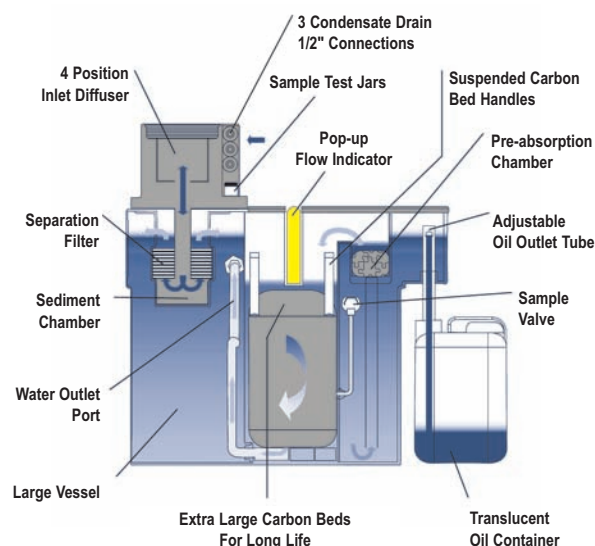



HANKISON HPE SERIES.... TARGETS EMULSIFIED LUBRICANTS

"Polar Extraction" Condensate Separators are ideal for applications that use multiple lubricants that don't separate well. Originally designed for homogenous Polyglycol (PAG) based polar formulations like SSR Ultra Coolant® and Sullube 32®, HPE Series separators have excelled in tough applications with mixed lubricants (consult Distributor for Sullair 24KT®*) from a variety of compressor stations.

HPE Series Condensate Separators use specially coated zeolite to establish a polar magnetic field that selectively targets positive and negatively charged lubricant molecules. Attracted to the charged surface, polar lubricant molecules bond to the opposite magnetic pole and are removed from the condensate. As water is neutral, it slips through the Absorption Module unimpeded to deliver <15 ppm to sanitary sewer.


SSR Ultra Coolant® registered trademark of Ingersoll-Rand. Sullube 32® and 24KT® are registered trademarks of Sullair Corporation.

FEATURES 3 APPLICATION FRIENDLY VERSIONS

Pressure Fed

Separation system for larger air systems to 1,125 scfm

- Depressurization chamber with 3 inlet connections
- Patented automatic level control system
#U.S. Patent 6,132,620
- Pneumatic pump adapts to all size Absorption Modules, prevents overflow and transports condensate to sanitary sewer
- Self-contained Absorption Module lasts about 1 year
- Optional Condensate Control Manifold for system expansion

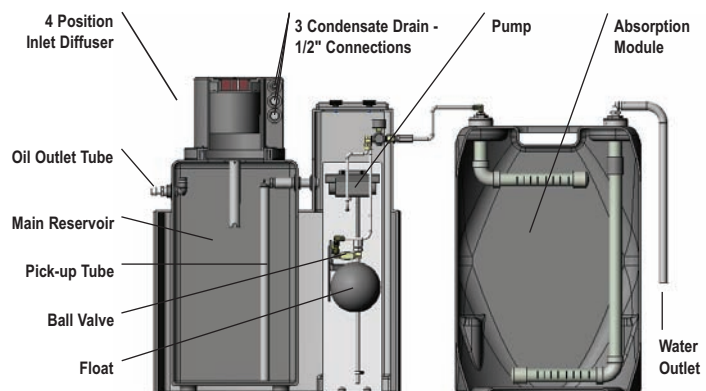

Gravity Fed

Separation system for air systems to 125 scfm

- Wall-mounted Depressurization Chamber with 3 inlet connections
- 6' Large I.D. hose gravity feeds Absorption Module
- Design ensures up to 7.2 psi
- Interconnecting fittings included



Adapter Package

Converts ANY gravity type separator to an HPE Series separator.

- Eliminates overflow problems caused by choked carbon filters
- Upgrades your old separator and eliminates the carbon filter
- Remote pumping chamber collects outlet water from gravity separator
- Automatic operation with level controlled pump system
- Pressure fed long life Absorption Module
- Extends filter life to approximately 1 year



HGS SERIES AND HGE SERIES SPECIFICATIONS

HPE Series Product Specifications

Technology Group Packages (includes Filter Module)	Model Number	Max CFM	Nominal HP	H	Dimensions W inches	D	Condensate Inlets inches	Water Outlet inches	Extracted Lubricant Cpcty. gallons	System Weight lbs.
Gravity-fed (Wall-mounted diffuser for economy through 125 scfm)	HPE-G-60	60	15	96.75	11	11	(3) ½" NPT	¾" NPT	1.5	42
	HPE-G-125	125	30	101.75	15	15	(3) ½" NPT	¾" NPT	5	100
Pressure-fed ¹ (Combines: Diffuser, gravity separation, integral pump for flows through 1125 scfm)	HPE-P-250	250	50	37.8	44.5	19.5	(3) ½" NPT	¾" NPT	5	140
	HPE-P-560	560	100	37.8	48.1	19.5	(3) ½" NPT	¾" NPT	12	250
	HPE-P-1125	1125	200	37.8	60.8	23	(3) ½" NPT	¾" NPT	24	450
Adapter Package ¹ (Upgrade any brand of gravity type separator to a HPE Series.)	HPE-A-60	60	15	27	26	15	(3) ½" NPT	¾" NPT	1.5	47
	HPE-A-250	250	50	27	30	15	(3) ½" NPT	¾" NPT	5	105
	HPE-A-560	560	100	28.5	33.6	18.6	(3) ½" NPT	¾" NPT	12	215
	HPE-A-1125	1125	200	32.5	38	23	(3) ½" NPT	¾" NPT	24	415

¹ Air Inlet Connection (½" NPT) requires clean, dry compressed air (<.35 scfm @ 20 psig) for pump operation

Volume Modulation & Balance Diverter

Volume Modulation & Balance Diverter	Model Number	Max GPH per Outlet	Condensate Inlets inches	Condensate Outlets inches	Instantaneous Liquid Capacity gallons	System Weight lbs.
Condensate Control Manifold	CCM-3	115	(3) ½" NPT	(3) ½" NPT	2.	15
	CCM-4	115	(3) ½" NPT	(4) ½" NPT	2.4	15

Replacement Parts

Replacement Parts	Model Number	Maximum CFM	Nominal HP	Extracted Lubricant Capacity gallons	H	Dimensions W inches	D	Weight lbs.
Absorption Modules	AM5	60	15	1.5	15	11	11	35
	AM15	250	50	5	20	15	15	90
	AM30	560	100	12	28.5	18.6	18.6	200
	AM55	1125	200	24	32.5	23	23	400
Pump Rebuild Kit	PRK-1							
Pump	PDP-1							

HGS SERIES PRODUCT SPECIFICATIONS

Model Number	Max CFM @ 90°F / 90%RH	Max CFM @ 70°F / 70%RH	H	Dimensions W inches	D	Condensate Inlets inches	Water Outlet inches	Oil Container Volume gallons	System Weight lbs.
HGS-150	150	357	30	26.5	19	(3) ½" NPT	¾" NPT	1.5	53
HGS-300	300	714	39	34	21	(3) ½" NPT	¾" NPT	5	77
HGS-600	600	1428	39	35	31	(3) ½" NPT	1" NPT	5	120
HGS-1200	1200	2856	39	72	31	(3) ½" NPT	(2) 1" NPT	5 ¹	240
HGS-1800	1800	4284	39	109	31	(3) ½" NPT	(3) 1" NPT	5 ²	360
HGS-2400	2400	5712	39	146	31	(3) ½" NPT	(4) 1" NPT	5 ³	480

¹ 2 Oil Containers ² 3 Oil Containers ³ 4 Oil Containers



SPX Dehydration & Process Filtration

1000 Philadelphia Street
 Canonsburg, PA 15317-1700 U.S.A.
 Phone: 724-745-1555 • Fax: 724-745-6040
 Email: hankison.inquiry@dehydration.spx.com
www.hankisonintl.com

©2006 SPX Dehydration & Process Filtration. All rights reserved. Inv# HCS-NA-2

Improvements and research are continuous at SPX Hankison
 Specifications may change without notice.