

PUT YOUR BEST FOOD
FORWARD WITH



*Innovative Solutions in
Foodservice Equipment*



CONVEYOR TOASTERS

- ColorGuard sensing system assures toast uniformity (Toast-Qwik®)
- Power saving thermostat for energy savings during non-peak times
- Instant and precise adjustment of toast color
- Permanently lubricated ball bearing motor
- Heated toast storage area prevents condensation
- Three-basket access for fast loading (TK series)
- Top venting keeps heat away from the operator (TK series)



TQ-10

Toasts bread & buns, five slices/min.
368 W x 451 D x 349 H mm
(14¹/₂" x 17³/₄" x 13³/₄"),
15 kg (34 lbs.)



TQ-400H

Toasts bread & buns, six slices/min.
368 W x 451 D x 403 H mm
(14¹/₂" x 17³/₄" x 15⁷/₈"),
24 kg (48 lbs.)



TQ-800H

Toasts bread & buns, fourteen slices/min.
368 W x 578 D x 422 H mm
(14¹/₂" x 22³/₄" x 16⁵/₈"),
24 kg (52 lbs.)



TRH-60

Toasts bread & buns, ten slices/min.
445 W x 702 D x 413 H mm
(17¹/₂" x 27⁵/₈" x 16¹/₄"),
27 kg (60 lbs.)



TK-100

Toasts bread & buns, sixteen slices/min.
559 W x 448 D x 838 H mm
(22" x 17⁵/₈" x 33"),
40 kg (88 lbs.)

TQ-400
Toasts all types of bread, six slices/min.
368 W x 451 D x 378 H mm
(14¹/₂" x 17³/₄" x 14⁷/₈"), 21 kg (46 lbs.)



HOT PRODUCTS

- Toast-Max™ Conveyor Toaster features an easy-to-use four-position toast selector switch with off / toast / buns / stand-by (available in 220 50/60hz only)



TM-5H

Conveyor Toaster, toasts bread or buns, three slices/min.
289 W x 416 D x 387 H mm
(11³/₈" x 16³/₈" x 15¹/₄"),
16 kg (36 lbs.)



TM-10H

Conveyor Toaster, toasts bread or buns, six slices/min.
368 W x 416 D x 387 H mm
(14¹/₂" x 16³/₈" x 15¹/₄"),
19 kg (41 lbs.)



THERMO-FINISHERS™

- Standby mode saves energy, and the exclusive Instant-On feature assures that the unit is ready to use, with no warm-up time needed
- Quick and easy for any staff member to operate, with the touch of one preprogrammed button, assuring consistent product



TF-4619

Hatco Thermo-Finisher with accessory food pans
514 W x 699 D x 432 H mm
(20¹/₄" x 27¹/₂" x 17"),
41 kg (90 lbs.)



TFW-461R

Hatco Thermo-Finisher
648 W x 530 D x 371 H mm
(25¹/₂" x 20⁷/₈" x 14⁵/₈"),
42 kg (95 lbs.)

WATER HEATER



C-12

Hatco Compact Electric Water Heater
330 W x 527 D x 502 H mm
(13" x 20³/₄" x 19³/₄"), 54 kg (120 lbs.)

HDW-2B

Hatco two-drawer built-in Drawer Warmer, with standard food pan

714 W x 568 D x 508 H mm
(28¹/₈" x 22³/₈" x 20"), 72 kg (159 lbs.)



DRAWER WARMERS

- Rugged construction and heavy-duty materials for added durability
- Each drawer has a separate thermostatic control and temperature monitor so different foods can be held at different temperatures
- Positive-closing drawers pull out fully, so that a full-sized pan can be lifted straight out without tilting or spilling



HDW-3

Hatco three-drawer freestanding Drawer Warmer, with optional 51 mm (2") swivel casters

749 W x 575 D x 794 H mm
(29¹/₂" x 22⁵/₈" x 31¹/₄"), 105 kg (232 lbs.)



HDW-1

Hatco one-drawer freestanding Drawer Warmer, with standard 102 mm (4") legs

749 W x 575 D x 279 H mm
(29¹/₂" x 22⁵/₈" x 11"), 44 kg (97 lbs.)

BUILT-IN HEATED WELLS



- Many models including individual, modular, round, rectangular, with or without drains, insulated or non-insulated, and low, standard and high wattage
- Reliable – larger drains with flat screens, EZ lock hardware, and heavier stainless steel construction
- Easy access design allows for quick element or thermostat change



HWB-7QT/HWB-11QT

Hatco Built-In Round Heated Wells, comes with remote thermostat

HWB-7QT: 264 Dia. x 213 H mm
(10³/₈" x 8³/₈"), 5 kg (10 lbs.)

HWB-11QT: 311 Dia. x 213 H mm
(12¹/₄" x 8³/₈"), 5 kg (11 lbs.)



HWB-43D/HWB-FULD

Hatco Built-In Rectangular Heated Wells with drains and accessory food pans

HWB-43D: 346 W x 727 D x 219 H mm
(13⁵/₈" x 28⁵/₈" x 8⁵/₈"), 14 kg (33 lbs.)

HWB-FULD: 349 W x 552 D x 219 H mm
(13³/₄" x 21³/₄" x 8⁵/₈"), 11 kg (24 lbs.)

HEATED MERCHANDISERS

- Create impulse sales while holding food at peak serving temperature with Hatco Merchandisers
- Full view display with tempered glass sides and incandescent lights to illuminate holding area
- Many options and accessories available like racks, number of doors, decals, and colors

GRHW-.5P

Mini-Merchandiser with translucent sign panel (graphic not included)

333 W x 241 D x 311 H mm (13¹/₈" x 9¹/₂" x 12¹/₄"), 5 kg (12 lbs.)



GR2SDS-24D

Glo-Ray® *Designer* Merchandising Warmer with *Designer* inset panels 765 W x 676 D x 848 H mm (30¹/₈" x 26⁵/₈" x 33³/₈"), 74 kg (162 lbs.)



GRSDS-24D

Glo-Ray Merchandising Warmer with accessory backlit merchandising sign and display sign holder (signs not included)

610 W x 610 D x 822 H mm (24" x 24" x 32³/₈"), 58 kg (128 lbs.)



GR2BW-30

Glo-Ray *Designer* Buffet Warmer in optional *Designer* color, with accessory food pans

918 W x 686 D x 483 H mm (36¹/₈" x 27" x 19"), 39 kg (85 lbs.)



GRHD-3PD

Three-pan dual-shelf Heated Display Case with pan rail, optional mirrored glass doors, and accessory food pans

1156 W x 660 D x 762 H mm (45¹/₂" x 26" x 30"), 91 kg (200 lbs.)



GRCDH-3PD

Three-pan *Designer* dual shelf Heated Display Case, humidified, with optional *Designer* color, pan skirt, and accessory food pans

1156 W x 660 D x 806 H mm (45¹/₂" x 26" x 31³/₄"), 101 kg (222 lbs.)




GRCD-2PD

Three-pan *Designer* dual shelf Heated Display Case, humidified, with optional flip up doors, *Designer* color, pan skirt, and accessory food pans

826 W x 660 D x 806 H mm (32¹/₂" x 26" x 31³/₄"), 77 kg (170 lbs.)

HOLDING/DISPLAY CABINETS

- Full view display with tempered glass sides and incandescent lights (countertop models) to illuminate holding area
- Thermostatically-controlled heat and humidity holds hot food at optimum serving temperatures longer
- Many options available like types of racks, number of doors, decals, and colors
- Models to fit any application, from front-of-the-house display to back-of-the-house preparation and holding
- Flav-R-Savor® Tall Humidified Holding Cabinets have fully insulated doors, sidewalls, and control panel assist in heat retention

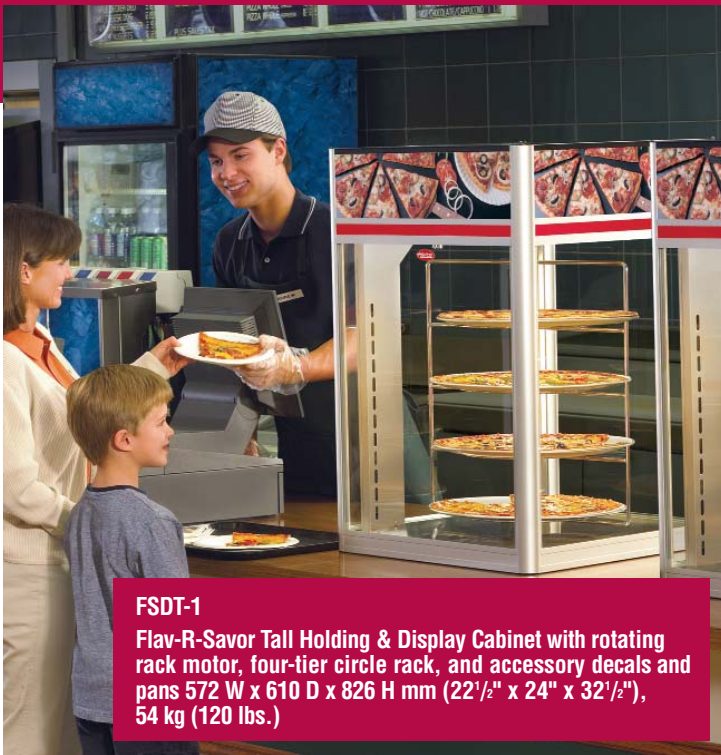

FSDT-1

Flav-R-Savor Tall Holding & Display Cabinet with rotating rack motor, four-tier circle rack, and accessory decals and pans 572 W x 610 D x 826 H mm (22¹/₂" x 24" x 32¹/₂"), 54 kg (120 lbs.)



FDW-1X

Flav-R-Fresh® Impulse Holding and Display Cabinet with one door and stationary multi-purpose rack

457 W x 495 D x 699 H mm (18" x 19¹/₂" x 27¹/₂"), 37 kg (82 lbs.)



WFST-2X

Flav-R-Savor Large Capacity Merchandising Cabinet, humidified, with four doors and stationary rack

816 W x 689 D x 832 H mm (32¹/₈" x 27¹/₈" x 32³/₄"), 85 kg (188 lbs.)



MDW-1X

Hatco Mini Display Warmer, one-door model with optional hood with backlit sign cutout on one side (sign included). (120V only)

387 W x 413 D x 635 H mm (15¹/₄" x 16¹/₄" x 25"), 470 watts, 36 kg (80 lbs.)



FSHC-17W1

Flav-R-Savor tall humidified Holding Cabinet with single Lexan® door and accessory food pans

645 W x 889 D x 1864 H mm (25³/₈" x 35" x 73³/₈"), 134 kg (295 lbs.)



FSHC-7-1

Flav-R-Savor portable Holding Cabinet, humidified one-door model with standard casters and accessory food pans

578 W x 749 D x 892 H mm (22³/₄" x 29¹/₂" x 35¹/₈"), 76 kg (168 lbs.)



FDW-1MN

Macho Nacho™ Chip Warmer

457 W x 575 D x 699 H mm (18" x 22⁵/₈" x 27¹/₂"), 36 kg (80 lbs.)

FOODWARMERS

- Put the heat where you need it to safely hold foods at peak flavor until ready to serve
- Provides even heat distribution with no “cold spots”
- Many foodwarmers and options to choose from, to fit any food service application

DL-725SU

Decorative Heat Lamps with optional *Designer* color or Polished Finish

Shade 241 Dia. x 216 H mm (9½" x 8½"), 3 to 6 kg (6 to 10 lbs.)



DL-500SU

Decorative Heat Lamps with optional polished finish

Shade 156 Dia. x 216 H mm (6⅞" x 8½"), 3 to 6 kg (6 to 10 lbs.)

DL-775RRL

Decorative Heat Lamps with optional polished finish

Shade 267 Dia. x 216 H mm (10½" x 8½"), 3 to 6 kg (6 to 10 lbs.)



GRFHS-21

Glo-Ray Portable Fry Station with accessory seven-pleat hardcoated fry bag ribbon

543 W x 702 D x 552 H mm (21⅜" x 27⅞" x 21¾"), 30 kg (67 lbs.)



GRCSLH-24

Glo-Ray Carving Station with accessory left breath protector, drip pan and cutting board

660 W x 711 D x 572-724 H mm (26" x 28" x 22½-28½"), 25 kg (56 lbs.)

UGFFL

Ultra-Glo™ Portable Foodwarmer with ceramic elements, in optional translucent gloss finish and accessory fry ribbon

314 W x 565 D x 479 H mm (12⅜" x 22¼" x 18⅞"), 9 kg (19 lbs.)



GRAHL-96D

Glo-Ray® High Watt Infrared Foodwarmer with 76 mm (3") spacer, lights, and tandem elements
2438 W x 229 D x 64 H mm (96" x 9" x 2½"), 25 kg (56 lbs.)



GR2AH-24D

Designer Glo-Ray High Watt Infrared Foodwarmer with standard 76 mm (3") spacer and optional breath protectors

711 W x 457 D x 89 H mm (28" x 9" x 3½"), 22 kg (32 lbs.)



GRFFBL

Glo-Ray Portable Foodwarmer with optional infinite switch and accessory food pans and trivets

305 W x 610 D x 406-508 H mm (12" x 24" x 16-20"), 14 kg (31 lbs.)

FOODWARMERS



GRSS-3618
 Glo-Ray® Heated Stone
 Shelves in Bermuda Sand
 914 W x 457 D x 64 H mm
 (36" x 18" x 2½"),
 930 watts, 15 kg (32 lbs.)

- Prefocused heat pattern bathes the entire holding surface
- Standard and high watt models available
- Models with lights for illuminating food holding area (aluminum only)



GRAH-48
 Glo-Ray High Watt Infrared
 Foodwarmer and *Designer* color
 1210 W x 152 D x 64 H mm
 (48" x 6" x 2½"), 5 kg (11 lbs.)

GRN-24

Glo-Ray Narrow Infrared Foodwarmer, with standard angle brackets and *Designer* color
 610 H x 102 D x 51 H mm
 (24" x 4" x 2"), 3 kg (7 lbs.)



GRAIH-36
 Glo-Ray Infra-Black®
 Foodwarmer with
 thermostatic control box
 and optional wire guard
 914 W x 152 D x 64 H mm
 (36" x 6" x 2½"), 7 kg (24 lbs.)



LW-2
 Portable Lamp Warmer with
 accessory food pans features two
 vented lamp shades with heavy-
 duty socket
 314 W x 559 D x 610-762 H mm
 (12¾" x 22" x 24-30"), 6 kg (13 lbs.)




GRFFL
 Portable Foodwarmer with optional
 229 mm (9") display sign holder,
Designer color, and accessory food
 pan (sign not included)
 314 W x 610 D x 430 H mm
 (12¾" x 24" x 15¾"), 8 kg (18 lbs.)




GRA-36 over GRS-30
 Glo-Ray Infrared Foodwarmer with optional *Designer*
 color and infinite switch and accessory C-leg stand,
 over Glo-Ray Portable Heated Shelf with accessory
 food pans
 GRA-36: 914 W x 152 D x 64 H mm
 (36" x 6" x 2½"), 4 kg (9 lbs.)
 GRS-30: 762 W x 495 D x 57 H mm,
 (30" x 19½" x 2¼"), 11 kg (25 lbs.)

FOODWARMER MOUNTING INFORMATION




DESIGNER NON-ADJUSTABLE STANDS (GR2A Series Only)

Sturdy stands conceal all hook-up wiring. Available in Designer colors.




NON-ADJUSTABLE TUBULAR STANDS

Sturdy stands conceal all hook-up wiring. Available in Designer colors. Duals require two pair.




ADJUSTABLE TUBULAR STANDS

Sturdy tubular stands conceal all hook-up wiring. Duals require two pair.



C-LEG STANDS

Attractive chrome plated legs allow easy relocation of the warmer. For models 1829 mm (72"), or less in width.




T-LEG STANDS

Provide rigid stability and allow for more pass-through area below unit.



CHAIN SUSPENSION

Chains attach to tabs provided with warmers and are available in various lengths to suit the location. Duals require two pair.



ANGLE BRACKETS


Special adjustable angle brackets fit 152 mm (6") or 229 mm (9") housings for mounting Glo-Ray® under a shelf. Duals require two pair. Provides 25 mm (1") to 51 mm (2") space between Glo Ray and overshelving.

RECOMMENDED GLO-RAY® / ULTRA-GLO™ FOODWARMER BASED ON DISTANCE TO TARGET NON-FLAMMABLE SURFACE*

[BASED ON 610 mm (24") FOODWARMER]


INFRA-BLACK® HEATING ELEMENT

RECOMMENDED RANGE ABOVE TARGET




STANDARD HEATING ELEMENT

RECOMMENDED RANGE ABOVE TARGET

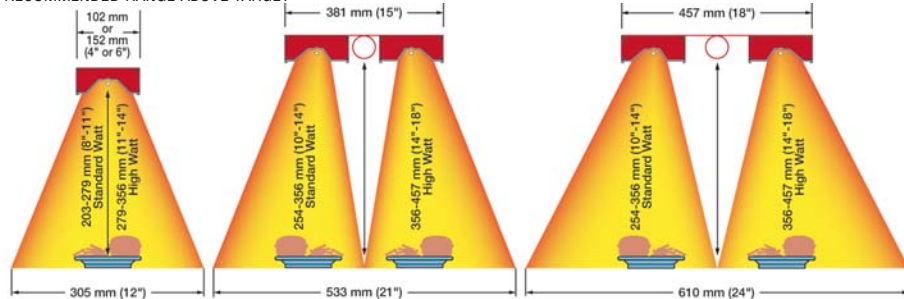

CERAMIC HEATING ELEMENT

RECOMMENDED RANGE ABOVE TARGET

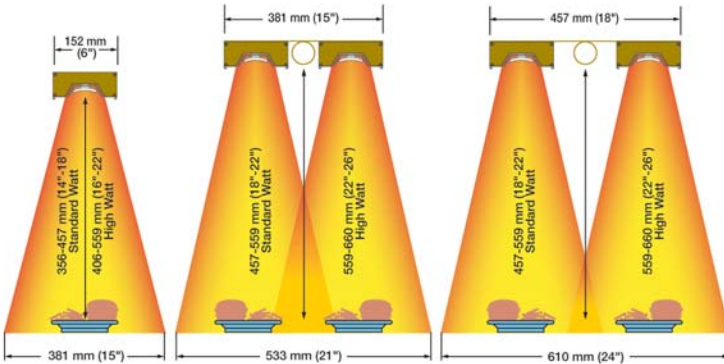

DEPTH OF HEAT PATTERN AT RECOMMENDED ELEMENT HEIGHT

* Recommended single unit application without base heat, based on ideal conditions. Individual applications may vary, consult factory.

FOODWARMER SPACING REQUIREMENTS DESCRIPTION

SINGLES (GRA, GRAL, GRAH, GRAHL) – Combustibles: 343 mm (13 1/2") high watt or 254 mm (10") standard watt below, 25 mm (1") above, and 76 mm (3") to back wall. Non-combustibles: 25 mm (1") above, 254 mm (10") high watt with infinite or indicator lamp, and 203 mm (8") high watt toggle or standard watt below. Must be installed in a pass-through area. Units with remote switches may be installed against a non-combustible back wall, flush to an overshef, and 203 mm (8") to a surface below. Maximum 254 mm (10") setback from the front of an overshef. Models with cords must be installed 76 mm (3") below an overshef and 279 mm (11") high watt or 254 mm (10") standard watt over a surface below.

DUALS (GRA-D, GRAH-D, GRAL-D, GRAHL-D) – May not be installed in combustible surroundings. Non-combustibles: 25 mm (1") above, 254 mm (10") below. Must be installed in pass-through area. Units with remote switches may be installed 76 mm (3") from a non-combustible back wall, 203 mm (8") to surface below, and flush to an overshef. Maximum 254 mm (10") setback from the front of an overshef.

INFRABLACKS (GRAIH, GRAIHL, GRAIHL-D, GRAIH-D) – May not be installed in combustible surroundings. Non-combustibles: 25 mm (1") above and 102 mm (4") below. Must be installed in pass-through area. Units with remote switches may be installed 76 mm (3") from a non-combustible back wall and flush to an overshef. Maximum 254 mm (10") setback from the front of an overshef.

Ultra-Glo (UGA, UGAH, UGAL, UGAHL, singles and duals) – May not be installed in combustible surroundings. Non-combustibles: 25 mm (1") above, 432 mm (17") high watt or 356 mm (14") standard watt from a surface below, and 76 mm (3") from a back wall.

Installation above steam tables: Spacing of at least 406 mm (16") is required for all models above a steam table.

DUAL MOUNTING: Do not mount warmers side by side (dual mounting) with less than a 76 mm (3") space between units.

Remote Control Enclosures: When used, no more than one RMB per strip heater, and no more than one strip heater per RMB.



HATCO CORPORATION

P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.