

HeliCoil

Insert Systems



Heli-Coil Plus® Stud-Lock® Gall-Resistant® Primer-Free® Twinert® Tangloss®

Emhart®
Teknologies
HELI-COIL®

HeliCoil® Wire Inserts

Heli-Coil® precision formed wire inserts are readily recognized and highly regarded products in the industry. Since its inception in 1938, Heli-Coil has been identified as an industry leader offering products with superior performance, reliability and integrity.

Our strict quality programs ensure that we meet the latest industry standards of AS9100 Rev. B, ISO 9001: 2000 and ISO/TS 16949: 2002. A comprehensive Business Management System elevates our quality levels well above our competitors.

Heli-Coil wire inserts are manufactured with over 70 years of experience. We are dedicated to exceeding our customers' expectations by providing innovative value-added design and engineering services, on-time deliveries and excellent customer service support. Heli-Coil is committed to developing superior products manufactured to only the highest quality standards. We are more than just a supplier, we are a business partner.

Heli-Coil® is a registered trademark of Emhart® Technologies.



Table of Contents

	Page
• Insert Information & Specifications	
General Description of Heli-Coil Inserts.....	5
Types of Inserts.....	5
Features & Benefits	6
Screw Locking Inserts.....	7
Hi-Torque Inserts.....	7
Stud Lock Inserts.....	7
Industry Standards and Specifications	7-8
Coatings & Plating.....	8
Insert Material	9
Torque Data	10
Design Data.....	11
▪ Assembly Strength	
▪ Corrosion Protection	
Tanged Insert Specifications, Inch & Metric	12-13
Tangless Insert Specifications.....	14
Thread Repair Kits and Master Sets.....	15
• Insert Installation	
Assembly Design.....	16
Engineering Data.....	17
▪ Drilling, Countersinking, Tapping, Gaging	
Drilling Data, Inch & Metric.....	18-19
Tapping Data, Inch & Metric	20-21
STI Tap Part Numbers, Inch	22
STI Tap Dimensions, Inch	23
STI Tap Part Numbers, Metric.....	24
STI Tap Dimensions, Metric.....	25
Gages, Inch.....	26
Gages, Metric	27
• Installation Tooling	
Types of Tools, Tool Service.....	28
Hand Inserting Tools	29
Power Inserting Tools, Inch & Metric	30-32
Tang Removal Tools	33
Tangless Tools.....	34

HeliCoil® Tangless® inserts are licensed from Kato.

The descriptions, specifications and other claims made with respect to the products featured in this catalog are made as of the date of printing. Emhart retains the right to discontinue production or make improvements or other changes to any of its products without notice.

Types of Inserts

There are two styles of Heli-Coil inserts. The **STANDARD** or Free Running Insert – available in both Tanged and Tangless – which provides a smooth free-running thread; and **SCREW-LOCK** – available in both Tanged and Tangless – which provides self-locking torque on the male member by a series of “chords” on one or more of the insert coils. They are available in inch series, coarse and fine and metric series, coarse and fine. Inch series Screw-Lock inserts are dyed red for identification.

Heli-Coil inserts are precision formed coils of extremely hard, diamond shaped 304 stainless steel. When installed into an STI tapped hole, they provide permanent conventional 60° internal screw threads. This assembled insert accommodates any standard bolt or screw as per MIL-S-7742 and AS8879 (UNJ controlled root radius). See page 9 for material availability.



Illustration of the Retention Principle

Tanged Size Range:

- UNC #1 through 1-1/2
- UNF #2 through 1-1/2
- Metric Coarse M2 through M39
- Metric Fine M8 through M39

Inserts are also available in UNEF, UNS, 8UN, 12UN, 16UN, Spark Plug and Pipe Thread.

FEATURES & BENEFITS...

Heli-Coil inserts provide a positive means for protecting and strengthening tapped threads in any material. The unique design features of the insert offer many benefits.

- **Stronger Assemblies.**

Tapped threads are strengthened because the inherent flexibility of the insert provides a more balanced distribution of dynamic and static loads throughout the length of thread engagement. This flexibility also compensates for variation in lead and angle error allowing each coil to carry its share of the load.

- **No Thread Wear.**

Thread life is dramatically increased even after repeated assembly and disassembly because the insert hardness and surface finish practically eliminate erosion of the thread form due to friction.

- **Corrosion Resistance.**

Under normal environmental conditions, Heli-Coil inserts minimize galvanic action within the threaded assembly because of their superior corrosion resistance.

- **Design Flexibility.**

Bolt tensile strength can be balanced against parent material shear strength, assuring bolt failure rather than parent material damage. Five insert lengths are available in each thread size.

- **Eliminate Stress.**

Virtually no stress is introduced into the parent material because there is no staking, locking, swaging or keying in

place – the outward spring-like action of the insert holds it in place.

- **Minimize Space & Weight.**

Heli-Coil inserts allow use of smaller bosses, flanges and fasteners than any other insert. Heli-Coil inserts can generally be incorporated in existing designs, where no provision has been made for an insert, without increasing boss size.

- **Minimize Total Cost.**

Cost savings abound. Lower insert cost, lower installation cost and Heli-Coil inserts provide design flexibility by allowing a wide choice of parent materials while maintaining maximum threaded assembly strength.

- **True Clamping Torque.**

Maximum clamping action and bolt tension are assured with minimum wrench torque because of the mirror-smooth surface finish of Heli-Coil inserts.

- **Wide Temperature Range.**

Heli-Coil stainless steel inserts can be used in temperatures ranging from -320°F to +800°F.

- **Quality & Reliability.**

Stringent Quality Assurance and Engineering Standards are rigidly enforced in all phases of the manufacturing process. This assures integrity of your product design.

High Production

Heli-Coil inserts are available mounted on plastic strips and wound onto reels (500 or 1000 inserts per reel). With power installation tooling, use of strip feed inserts will substantially increase installation rates by minimizing handling.

Universal Acceptance

Heli-Coil Standard and Screw-lock Inserts are the original – and have an extensive background of tension, torque, shear, vibration and fatigue tests conducted by American industry's leading companies as well as the U.S. Military. Successful applications in the fields of aviation, electronics, industrial, automotive and military equipment provide a wealth of experience and confidence in the performance and reliability of Heli-Coil inserts.

Total Design Service

In addition to the benefits listed above, Heli-Coil provides a wide range of support to solve fastening problems. This manual is one of them – the following pages are presented in a manner to make it easy to “design-in” Heli-Coil inserts to take advantage of the extraordinary benefits they provide.

Additionally, our Sales Engineers, Applications Engineers and Design Engineers are available for consultation for specific designs. When the product gets to the manufacturing phase, our extensive experience in production tooling and installation techniques ensures that you can indeed make your product better with Heli-Coil inserts.

Heli-Coil® screw locking thread inserts

Heli-Coil offers three types of Locking Inserts for multiple applications...

Screw-Lock Inserts:

- Positive self-locking torque, complying with NASM8846 and MA1565.
- A resilient locking mechanism (applies to Heli-Coil screw-lock inserts) that grips the bolt and prevents it from loosening under vibration or impact.
- Repeated assembly and disassembly without appreciable loss of self-locking torque.
- Savings in space, weight and money, through the elimination of lock wiring, lock nuts, lock washers, chemical compounds, plastic pellets/patches and other locking mechanisms.


Hi-Torque Inserts:

- Similar to Screw-Lock except higher prevailing torque compensates for reduced friction in highly lubricated applications.
- Ideal for higher vibration applications.
- Approximate 40% increase in prevailing torque levels.
- Available in #10 through 3/8" UNF only.
- Meets **AS1394, AS3094, 3095, 3096, 3097.**

Stud-Lock Inserts:

- Highest prevailing torque insert available.
- Enables use of threaded rod for space-saving stud applications.
- Allows for any class fit of threaded rod.
- Eliminates inconsistencies caused by interference-fit studs.
- Available for both straight and step studs, #10 through 1/2" UNC and UNF.
- Meets **AS1229, AS3080, 3081, 3082, 3083**

LOCKING FEATURES & BENEFITS...




Locks Adjustment Screws. This simple design allows permanent, positive adjustment of screws in any position, secure against vibration or impact.



Inaccessible or Miniaturized Assemblies. Heli-Coil Screw-Lock inserts permit the installation of the lock from the front or top. No blind fumbling for assembly of lock washers or lock nuts behind or underneath.



Lock Set Screws. Positively locks assembly against loosening at desired adjustment – protects threads against stripping under high torque – permits use of light housing materials.



The locking action is achieved by one or more of the insert coils having a series of straight segments or "**chords**". When the bolt enters the "**grip**" coil, these chordal segments flex outward, creating pressure on the bolt. The pressure is exerted between the flanks of the bolt thread to establish an extensive positive and consistent self-locking torque over more cycles than any other prevailing torque mechanism.

Heli-Coil® industry standards

Industry Standards

Heli-Coil inserts and tooling comply with the following Standards and Specifications:

- **NASM122076 thru NASM122275.** Insert, corrosion resistant Helical Coil Coarse Thread (Inch Series)
- **NASM124651 thru NASM124850.** Insert, corrosion resistant Helical Coil Fine Thread (Inch Series)
- **NASM21209.** Insert, Screw Thread – Self Locking (Inch Series)
- **NASM33537.** Insert, – Standard Dimensions, Assembly
- **NASM8846.** Insert, Screw Thread, Helical Coil
- **MA1565.** Insert, Screw Thread, Helical Coil (Metric Series)
- **MA1567.** Insert, Screw Thread, Helical Coil (Metric Series), Standard Dimensions, Assembly
- **MA3279, 3280, 3281.** Insert, Screw Thread, Helical Coil, Free Running (Metric Series)
- **MA3329, 3330, 3331.** Insert, Screw thread, Helical Coil, Screw Locking (Metric Series)
- **AS59158.** Tools for inserting and extracting Helical Coil Inserts
- **NAS1130.** Inserts, Screw Thread, Helical Coil, Free Running and Screw Locking (Inch Series)

Heli-Coil® industry standards

- **FED-STD-H28.** Screw Thread Standards for Federal/Services
- **AS1394 thru 3097**
- **AS1229 thru 3083** Special Locking Torque Inserts
- **ASME B18.29.1** Insert, Screw Thread, Helical Coil (Inch Series)
- **ASME B18.29.2M-2005** Helical Coil Screw Thread Inserts, Free Running and Screw Locking (Metric Series)
- **AGS3600-3699** Insert, Screw Thread, Screw Locking, Helical Coil, Cadmium Plated (Inch Series)
- **AGS4677 Series** Insert, Screw Thread, Screw Locking, Helical Coil, Cadmium Plated (Metric Series)
- **AS6733** Inserts, Wire Thread, (UNF) - Unplated
- **AS6734** Inserts, Wire Thread, (UNC) - Unplated
- **AS8455** Inserts, Wire Thread, (UNF) - Cadmium Plated
- **AS8456** Inserts, Wire Thread, (UNC) - Cadmium Plated

Heli-Coil® insert coatings & plating

Coatings/ Plating	Benefits
Dry Film Lubricant	Provides additional lubrication in high friction applications High temperature resistance (400°F) Highly recommended with Heli-Coil Screw-Lock inserts Mildly corrosion resistant
	Material Spec: AS5272 Color: Grey
Cadmium Plating	Provides high corrosion resistance Provides lubrication to prevent galling (Not recommended for new design due to its toxic nature)
	Material Spec: QQ-P-416 Type II Color: Iridescent yellow - Free-Running Color: Olive drab - Screw-Lock
Primer-Free® II	Contains no chromates Eliminates need for zinc primers and epoxies Prevents galvanic corrosion between insert and parent material Eliminates locking torque issues associated with primers Improves installation productivity Provides additional lubrication facilitating insert installation
	Material Spec: None Color: Matte black
Silver Plating	Recommended to reduce galling of threads at high temperatures For use up to 1200°F
	Material Spec: QQ-S-365 Color: Silver white
Color Coding	Facilitates verification of insert installation Allows for quick identification of similar size inserts Available in blue, green, red, and black*

* All Heli-Coil Inch Screw-Lock inserts are supplied with a red coloring in accordance with NASM21209.

Heli-Coil inserts are available in a wide choice of materials to suit specific application needs.
Contact Heli-Coil Applications Engineering to determine the correct material for your specific application.



304 Stainless Steel

- Standard, general purpose material
- Stocked in most sizes
- Ideal for original equipment applications, repair, and overhaul

Material Spec: AS7245

Temperature range: up to 800°F
Tensile: 200,000 – 250,000 PSI
Hardness: RHc 43-50
Corrosion resistance: Moderate
Magnetic Permeability: 2-10 G/o (depending on wire size)



Inconel X750

- Used in areas exposed to high temperatures
- Typical uses: gas turbine engines, nuclear applications, well drilling
- Non-magnetic

Material Spec: AS7246

Temperature range: up to 1,000°F
Tensile: 200,000 PSI
Hardness: RHc 43-50
Corrosion resistance: High
Magnetic Permeability: <1 G/o



Phosphor Bronze

- Ideal for salt water applications
- Non-magnetic
- Excellent electrical conductivity

Temperature range: up to 250°F
Tensile: 140,000 PSI
Hardness: HRB 95
Corrosion resistance: High
Magnetic Permeability: <1 G/o



Nitronic 60™

- Superb gall resistance
- Compatible with stainless steel screws
- Ideal for use in vacuum environments
- Requires no additional coatings or plating
- Particle free
- Non-magnetic

Material Spec: UNS S21800

Temperature range: up to 500°F
Tensile: 200,000 PSI
Hardness: RHc 43-50
Corrosion resistance: Moderate
Magnetic Permeability: <1 G/o



Titanium

- Superior strength-to-weight ratio
- Corrosion resistant
- Excellent low temperature stability

Material Spec: AMS 4957 & AMS 4958A

Temperature range: up to 600°F
Tensile: 150,000 to 220,000 PSI
Hardness: RHc 35-43
Corrosion resistance: High
Magnetic Permeability: non-magnetic

Note: Nitronic 60™ is a trademark of AK Steel

Heli-Coil® screw lock torque data

Heli-Coil Screw-Lock inserts meet the locking torque value of Tables I and II shown below. The values shown conform to NASM8846 (inch series) or MA1565 (metric series) requirement.

IMPORTANT NOTE: When using heat-treated steel screws or stainless steel screws with a Screw-Lock insert, an anti-seize compound **MUST** be applied to the screw or insert to minimize galling and maximize cycle life. To improve the wear life of the screws in Screw-Lock insert applications, specify Nitronic 60 material, Primer Free II coating, Dry Film Lubricant (Molybdenum Disulfide) or Cadmium plating be applied to the insert.

TABLE I. Heli-Coil Insert Locking Torque – Inch

Thread Size	Max. Locking Torque	Min. Locking Torque 15 th Cycle
INCH COARSE THREAD (UNC)		
1 (.073)-64	15 oz-in	2 oz-in
2 (.086)-56	20 oz-in	3 oz-in
3 (.099)-48	32 oz-in	7 oz-in
4 (.112)-40	48 oz-in	10 oz-in
5 (.125)-40	75 oz-in	13 oz-in
6 (.138)-32	6 lb-in	1.0 lb-in
8 (.164)-32	9 lb-in	1.5 lb-in
10 (.190)-24	13 lb-in	2.0 lb-in
12 (.216)-24*	24 lb-in	3.0 lb-in
1/4 (.2500)-20	30 lb-in	4.5 lb-in
5/16 (.3125)-18	60 lb-in	7.5 lb-in
3/8 (.3750)-16	80 lb-in	12.0 lb-in
7/16 (.4375)-14	100 lb-in	16.5 lb-in
1/2 (.5000)-13	150 lb-in	24.0 lb-in
9/16 (.5625)-12	200 lb-in	30.0 lb-in
5/8 (.6250)-11	300 lb-in	40.0 lb-in
3/4 (.7500)-10	400 lb-in	60.0 lb-in
7/8 (.8750)-9	600 lb-in	82.0 lb-in
1 (1.000)-8	800 lb-in	110.0 lb-in
1-1/8 (1.1250)-7	900 lb-in	137.0 lb-in
1-1/4 (1.2500)-7	1000 lb-in	165.0 lb-in
1-3/8 (1.3750)-6	1150 lb-in	185.0 lb-in
1-1/2 (1.5000)-6	1350 lb-in	210.0 lb-in
INCH FINE THREAD (UNF)		
2 (.086)-64	20 oz-in	3 oz-in
3 (.099)-56	32 oz-in	7 oz-in
4 (.112)-48	48 oz-in	10 oz-in
6 (.138)-40	6 lb-in	1.0 lb-in
8 (.164)-36	9 lb-in	1.5 lb-in
10 (.190)-32	13 lb-in	2.0 lb-in
1/4 (.2500)-28	30 lb-in	3.5 lb-in
5/16 (.3125)-24	60 lb-in	6.5 lb-in
3/8 (.3750)-24	80 lb-in	9.5 lb-in
7/16 (.4375)-20	100 lb-in	14.0 lb-in
1/2 (.5000)-20	150 lb-in	18.0 lb-in
9/16 (.5625)-18	200 lb-in	24.0 lb-in
5/8 (.6250)-18	300 lb-in	32.0 lb-in
3/4 (.7500)-16	400 lb-in	50.0 lb-in
7/8 (.8750)-14	600 lb-in	70.0 lb-in
1 (1.000)-14*	800 lb-in	92.0 lb-in
1 (1.000)-12	800 lb-in	90.0 lb-in
1-1/8 (1.1250)-12	900 lb-in	117.0 lb-in
1-1/4 (1.2500)-12	1000 lb-in	143.0 lb-in
1-3/8 (1.3750)-12	1150 lb-in	165.0 lb-in
1-1/2 (1.5000)-12	1350 lb-in	190.0 lb-in

TABLE II. Heli-Coil Insert Locking Torque – Metric

Thread Size	Max. Locking Torque N.m	Min. Locking Torque 15 th Cycle N.m
METRIC COARSE		
M2x0.4	0.12	0.003
M2.2x0.45	0.14	0.02
M2.5x0.45	0.22	0.06
M3x0.5	0.44	0.1
M3.5x0.6	0.68	0.12
M4x0.7	0.9	0.16
M5x0.8	1.6	0.3
M6x1	3	0.4
M7x1	4.4	0.6
M8x1.25	6	0.8
M10x1.5	10	1.4
M12x1.75	15	2.2
M14x2	23	3
M16x2	32	4.2
M18x2.5	42	5.5
M20x2.5	54	7
M22x2.5	70	9
M24x3	80	11.0
M27x3	95	12
M30x3.5	110	14
M33x3.5	125	16.0
M36x4	140	18.0
M39x4	150	20.0
METRIC FINE		
M8x1	6	0.8
M10x1	10	1.4
M10x1.25	10	1.4
M12x1.25	15	2.2
M12x1.5	15	2.2
M14x1.5	23	3
M16x1.5	32	4.2
M18x1.5	42	5.5
M20x1.5	54	7
M22x1.5	70	9
M18x2	42	5.5
M20x2	54	7
M22x2	70	9
M24x2	80	11.0
M27x2	95	12
M30x2	110	14
M33x2	125	16.0
M36x2	140	18.0
M39x2	150	20.0
M36x3	140	18.0
M39x3	150	20.0

* These sizes are not included in NASM8846. Torque values shown are interpolated from sizes that are included. All torque data derived for stainless inserts only.

Assembly Strength

Heli-Coil offers maximum design flexibility while adhering to conservative engineering practice allowing use of Heli-Coil inserts in virtually any application or material. Five lengths of inserts are available. In this design manual, the lengths are listed as multiples of the nominal thread diameter of the screw; 1, 1-1/2, 2, 2-1/2, and 3.

This choice of insert length balances the bolt tensile strength against the shear strength of the parent material. This allows for the design of assemblies where the bolt will fail before the parent material. Tables III and IV below show the length of insert to be used with different combinations of bolts and parent materials.

Shear strength of parent material (PSI) (Alum., Mag., Steel)	Table III – Inch Bolt & Heli-Coil Insert Selection Guide								
	Bolt Material Minimum Ultimate Tensile Strength (PSI)								
	54,000	75,000	96,000	108,000	125,000	132,000	160,000	180,000	220,000
10,000	2	2-1/2	3	3	—	—	—	—	—
15,000	1-1/2	1-1/2	2	2-1/2	2-1/2	3	3	—	—
20,000	1	1-1/2	1-1/2	2	2	2	2-1/2	3	3
25,000	1	1	1-1/2	1-1/2	1-1/2	2	2	2-1/2	2-1/2
30,000	1	1	1	1-1/2	1-1/2	1-1/2	2	2	2-1/2
40,000	1	1	1	1	1	1-1/2	1-1/2	1-1/2	2
50,000	1	1	1	1	1	1	1	1-1/2	1-1/2

Shear strength of parent material MPa (megapascals) (Alum., Mag., Steel)	Table IV – Metric Bolt & Heli-Coil Insert Selection Guide							
	Bolt Material Minimum Ultimate Tensile Strength MPa (megapascals)							
	300	400	500	600	800	1000	1200	1400
70	1.5	2	2.5	2.5	—	—	—	—
100	1	1.5	1.5	2	2.5	3	—	—
150	1	1	1.5	1.5	2	2	2.5	3
200	1	1	1	1	1.5	1.5	1.5	2.5
250	1	1	1	1	1	1.5	1.5	2
300	1	1	1	1	1	1.5	1.5	1.5
350	1	1	1	1	1	1	1.5	1.5

Guidelines for use of table:

1. When the parent material shear strength falls between two listed values, use the lower of the two values.
2. Parent material shear strengths are for room temperature. For applications at elevated temperatures, the shear strength of the material at that temperature must be determined for proper selection of bolt and insert length.
3. Be sure that the engaged thread length of the bolt is at least as long as the full tapped thread depth for the size selected (Dimension "H", Tables VII & VIII, pages 20 & 21).

Assembly strength is a function of shear area and the shear strength of both the bolt and parent material. For detailed charts on specific load values, Heli-Coil Technical Bulletin 68-2 (inch) or Engineering Standard PP15 (metric) covers the complete range of sizes, parent materials and bolt strengths.

Type of Conditions & Protective Methods

Parent Material	Parent Material Treatment			Insert Treatment		
	Normal	Severe	Extremely Severe	Normal	Severe	Extremely Severe
Aluminum	None	1	1	None	2 or 3	2 or 3
Magnesium	1	1	1	None	2 or 3	2 or 3

Corrosion Protection Methods

Method 1 – Parent Material Protection

ALUMINUM: For oxide coating use Alodine, Anodize, Iridite, Hard Coat or equivalent. Iridite 14 or 14-2 (MIL-C-5541) is recommended for critical parts rather than anodizing (MIL-S-5002).

MAGNESIUM: For oxide coating use Iridite 15 or dichromate surface treatments. For HAE finishes, always plug tapped holes first.

Method 2 – Coat the insert with one of the following:

Cadmium per QQ-P-416, Type II, .0001" thick; or Dry Film Lubricant per AS 5272 (MIL-L 46010) (no graphite).

Method 3 – Utilize Heli-Coil Primer-Free II coated inserts or separate the parent material from the insert by using liquid zinc chromate primer, Federal Specification TT-P-1757. Apply the primer to the hole sparingly and install the insert while the primer is still wet.

In addition to the above methods, further corrosion protection can be achieved by:

1. Using blind holes wherever possible.
2. Using a sealing, insulating or step-down (5052 Alum.) washer under the head of the bolt.
3. Using bolts that extend completely through the length of the insert.
4. In critical applications, using a non-hardening sealer or compound on the threaded assembly.

Corrosion Protection

The effect of corrosion on threaded assemblies is dependent on many factors — environment, types of metals used, sealing mechanisms and length of service. The following recommendations apply for minimizing the effects of corrosion on Heli-Coil stainless steel insert assemblies at operating temperatures less than 800°F, using carbon steel or alloy steel bolts.

The following definitions apply...

Normal Service – Natural atmosphere environment with the screw always assembled in the insert.

Severe Service – Mildly contaminated atmospheric conditions involving moisture, occasional exposure to salty air or sea spray and the screw may be left out of the insert for extended periods of time.

Extremely Severe Service – Assembly is exposed to salt water, corrosive atmosphere and/or the screw is out of the assembly frequently allowing a blind hole to trap water.

Heli-Coil® insert specifications – inch

Nominal Thread Size	Type		Size Designation	“Q” Nominal Length					Outside Diameter		Number of Coils Nominal Length				
	Standard Insert No.	Screw-Lock Insert No.		1 Dia.	1-1/2 Dia.	2 Dia.	2-1/2 Dia.	3 Dia.	Min.	Max.	1 Dia.	1-1/2 Dia.	2 Dia.	2-1/2 Dia.	3 Dia.
UNIFIED COARSE THREAD (UNC)															
1 (.073)-64	1185	3585	01CN	0.073	0.110	0.146	0.182	0.219	.095	.103	2-3/4	4-7/8	6-7/8	8-7/8	10-7/8
2 (.086)-56	1185	3585	02CN	0.086	0.129	0.172	0.215	0.258	.110	.119	3	5-1/4	7-3/8	9-5/8	11-7/8
3 (.099)-48	1185	3585	03CN	0.099	0.148	0.198	0.248	0.297	.128	.139	2-7/8	5	7-1/4	9-3/8	11-1/2
4 (.112)-40	1185	3585	04CN	0.112	0.168	0.224	0.280	0.336	.144	.159	2-3/4	4-3/4	6-3/4	8-7/8	10-7/8
5 (.125)-40	1185	3585	05CN	0.125	0.188	0.250	0.312	0.375	.158	.173	3-1/4	5-1/2	7-3/4	10	12-1/4
6 (.138)-32	1185	3585	06CN	0.138	0.207	0.276	0.345	0.414	.178	.193	2-3/4	4-3/4	6-7/8	8-7/8	10-7/8
8 (.164)-32	1185	3585	2CN	0.164	0.246	0.328	0.410	0.492	.205	.220	3-1/2	6	8-3/8	10-3/4	13-1/4
10 (.190)-24	1185	3585	3CN	0.190	0.285	0.380	0.475	0.570	.244	.259	2-7/8	5	7-1/8	9-1/4	11-3/8
12 (.216)-24	1185	3585	1CN	0.216	0.324	0.432	0.540	0.648	.270	.285	3-1/2	6	8-3/8	10-5/8	13-1/8
1/4 (.2500)-20	1185	3585	4CN	0.250	0.375	0.500	0.625	0.750	.310	.330	3-3/8	5-3/4	8	10-3/8	12-3/4
5/16 (.3125)-18	1185	3585	5CN	0.312	0.469	0.625	0.781	0.938	.380	.400	4	6-5/8	9-1/4	11-7/8	14-5/8
3/8 (.3750)-16	1185	3585	6CN	0.375	0.562	0.750	0.938	1.125	.452	.472	4-3/8	7-1/4	10	12-7/8	15-3/4
7/16 (.4375)-14	1185	3585	7CN	0.438	0.656	0.875	1.094	1.312	.526	.551	4-1/2	7-3/8	10-1/4	13-1/8	16-1/8
1/2 (.5000)-13	1185	3585	8CN	0.500	0.750	1.000	1.250	1.500	.597	.622	4-7/8	7-7/8	11	14-1/8	17-1/8
9/16 (.5625)-12	1185	3585	9CN	0.562	0.844	1.125	1.406	1.688	.669	.694	5-1/8	8-1/4	11-1/2	14-3/4	17-7/8
5/8 (.6250)-11	1185	3585	10CN	0.625	0.938	1.250	1.562	1.875	.742	.767	5-1/4	8-1/2	11-3/4	15	18-3/8
3/4 (.7500)-10	1185	3585	12CN	0.750	1.125	1.500	1.875	2.250	.881	.906	5-7/8	9-3/8	13	16-1/2	20-1/8
7/8 (.8750)-9	1185	3585	14CN	0.875	1.312	1.750	2.188	2.625	1.022	1.052	6-1/4	10	13-3/4	17-1/2	21-1/4
1 (1.000)-8	1185	3585	16CN	1.000	1.500	2.000	2.500	3.000	1.166	1.196	6-3/8	10-1/8	14	17-3/4	21-5/8
1-1/8 (1.1250)-7	1185	3585	18CN	1.125	1.688	2.250	2.812	3.375	1.315	1.355	6-1/8	9-7/8	13-5/8	17-1/2	21-1/4
1-1/4 (1.2500)-7	1185	3585	20CN	1.250	1.875	2.500	3.125	3.750	1.443	1.483	7	11-1/4	15-3/8	19-1/2	23-3/4
1-3/8 (1.3750)-6	1185	3585	22CN	1.375	2.062	2.750	3.438	4.125	1.598	1.643	6-1/2	10-1/2	14-3/8	18-3/8	22-1/4
1-1/2 (1.5000)-6	1185	3585	24CN	1.500	2.250	3.000	3.750	4.500	1.727	1.772	7-1/4	11-1/2	15-7/8	20-1/8	24-1/2
UNIFIED FINE THREAD (UNF)															
2 (.086)-64	1191	3591	02CN	0.086	0.129	0.172	0.215	0.258	.110	.119	3-1/2	5-7/8	8-3/8	10-3/4	13-1/8
3 (.099)-56	1191	3591	03CN	0.099	0.148	0.198	0.248	0.297	.131	.146	3-3/8	5-5/8	8	10-3/8	12-5/8
4 (.112)-48	1191	3591	04CN	0.112	0.168	0.224	0.280	0.336	.147	.162	3-3/8	5-5/8	7-7/8	10-1/4	12-1/2
6 (.138)-40	1191	3591	06CN	0.138	0.207	0.276	0.345	0.414	.173	.193	3-1/2	6	8-3/8	10-3/4	13-1/4
8 (.164)-36	1191	3591	2CN	0.164	0.246	0.328	0.410	0.492	.204	.224	3-7/8	6-1/2	9-1/8	11-5/8	14-1/4
10 (.190)-32	1191	3591	3CN	0.190	0.285	0.380	0.475	0.570	.236	.256	4-1/8	6-7/8	9-1/2	12-1/4	14-7/8
1/4 (.2500)-28	1191	3591	4CN	0.250	0.375	0.500	0.625	0.750	.306	.326	5	8-1/4	11-3/8	14-1/2	17-5/8
5/16 (.3125)-24	1191	3591	5CN	0.312	0.469	0.625	0.781	0.938	.380	.400	5-1/2	8-7/8	12-1/4	15-5/8	19
3/8 (.3750)-24	1191	3591	6CN	0.375	0.562	0.750	0.938	1.125	.448	.468	6-7/8	11	15	19-1/8	23-1/8
7/16 (.4375)-20	1191	3591	7CN	0.438	0.656	0.875	1.094	1.312	.524	.549	6-5/8	10-5/8	14-5/8	18-1/2	22-1/2
1/2 (.5000)-20	1191	3591	8CN	0.500	0.750	1.000	1.250	1.500	.592	.617	7-7/8	12-3/8	16-7/8	21-3/8	25-7/8
9/16 (.5625)-18	1191	3591	9CN	0.562	0.844	1.125	1.406	1.688	.666	.691	8	12-1/2	17-1/8	21-3/4	26-1/4
5/8 (.6250)-18	1191	3591	10CN	0.625	0.938	1.250	1.562	1.875	.733	.758	9	14-1/8	19-1/4	24-1/4	29-3/8
3/4 (.7500)-16	1191	3591	12CN	0.750	1.125	1.500	1.875	2.250	.876	.901	9-3/4	15-1/8	20-5/8	26	31-1/2
7/8 (.8750)-14	1191	3591	14CN	0.875	1.312	1.750	2.188	2.625	1.021	1.051	9-7/8	15-1/2	21-1/8	26-5/8	32-1/4
1 (1.000)-14*	1191	3591	16CN	1.000	1.500	2.000	2.500	3.000	1.156	1.186	11-1/2	17-7/8	24-1/4	30-5/8	37
1 (1.000)-12	1191	3591	161CN	1.000	1.500	2.000	2.500	3.000	1.169	1.199	9-5/8	15	20-1/2	26	31-1/2
1-1/8 (1.1250)-12	1191	3591	18CN	1.125	1.688	2.250	2.812	3.375	1.304	1.334	11-1/8	17-1/4	23-3/8	29-1/2	35-3/4
1-1/4 (1.2500)-12	1191	3591	20CN	1.250	1.875	2.500	3.125	3.750	1.439	1.469	12-1/2	19-3/8	26-1/4	33	39-7/8
1-3/8 (1.3750)-12	1191	3591	22CN	1.375	2.062	2.750	3.438	4.125	1.575	1.610	13-3/4	21-3/8	28-7/8	36-1/2	44
1-1/2 (1.5000)-12	1191	3591	24CN	1.500	2.250	3.000	3.750	4.500	1.710	1.745	15-1/4	23-1/2	31-5/8	39-7/8	48-1/8

*Inactive for new design per NASM.

1185-4CNY375S					
Complete Part No. Example: Free Running Insert; 1/4-20; Stainless Steel; Cadmium; 1-1/2 dia.; On Strip					
Type	Size	Material	Finish	Length	Packaging
1185 Free Running, Coarse	See Chart	CN – Stainless Steel	Blank – None	See Chart	Blank – Bulk
1191 Free Running, Fine		BN – Phosphor Bronze	Y – Cadmium		S – Strip Feed
3585 Screw-Lock, Coarse		TN – Inconel X	V – Silver		
3591 Screw-Lock, Fine		EN – Nitronic 60	W – Dry Film Lubricant		
		GN – Titanium	PF – Primer Free II		

Notes on Insert Specifications:

- Nominal Length is a computed value and cannot be measured. It is the actual assembled length + 1/2 pitch.
- The number of coils are counted 90° from the tang.
- Grip Coil(s) Location for 1, 1-1/2 and 2 diameter long inserts, Grip Coil Location = 1/2 the number of free coils. For 2-1/2 and 3 diameter long inserts, Grip Coil Location (distance from the tang) is the same as 2 diameter long inserts.

Heli-Coil® insert specifications – metric

Nominal Thread Size	Type		Size Designation	“Q” Nominal Length					Outside Diameter		Number of Coils Nominal Length				
	Standard Insert No.	Screw-Lock Insert No.		1 Dia.	1-1/2 Dia.	2 Dia.	2-1/2 Dia.	3 Dia.	Min.	Max.	1 Dia.	1-1/2 Dia.	2 Dia.	2-1/2 Dia.	3 Dia.
METRIC COARSE															
M2x0.4	1084	4184*	2CN	2.0	3.0	4.0	5.0	6.0	2.50	2.70	3-1/2	5-1/2	7-3/4	10-1/8	12-3/8
M2.2x0.45	1084	4184	2.2CN	2.2	3.3	4.4	5.5	6.6	2.80	3.00	3-1/8	5-3/8	7-5/8	9-7/8	12-1/8
M2.5x0.45	1084	4184	2.5CN	2.5	3.8	5.0	6.3	7.5	3.20	3.70	3-3/8	5-3/4	8-1/8	10-1/2	12-3/4
M3x0.5	1084	4184	3CN	3.0	4.5	6.0	7.5	9.0	3.80	4.35	3-3/4	6-3/8	8-7/8	11-3/8	13-7/8
M3.5x0.6	1084	4184	3.5CN	3.5	5.3	7.0	8.8	10.5	4.40	4.95	3-3/4	6-3/8	8-3/4	11-3/8	13-3/4
M4x0.7	1084	4184	4CN	4.0	6.0	8.0	10.0	12.0	5.05	5.60	3-5/8	6-1/8	8-5/8	11-1/8	13-5/8
M5x0.8	1084	4184	5CN	5.0	7.5	10.0	12.5	15.0	6.25	6.80	4-1/8	6-7/8	9-5/8	12-3/8	15-1/8
M6x1	1084	4184	6CN	6.0	9.0	12.0	15.0	18.0	7.40	7.95	4	6-3/4	9-1/2	12-1/8	14-7/8
M7x1	1084	4184	7CN	7.0	10.5	14.0	17.5	21.0	8.65	9.20	4-7/8	8	11-1/8	14-1/8	17-1/4
M8x1.25	1084	4184	8CN	8.0	12.0	16.0	20.0	24.0	9.80	10.35	4-1/2	7-3/8	10-1/4	13-1/4	16-1/8
M10x1.5	1084	4184	10CN	10.0	15.0	20.0	25.0	30.0	11.95	12.50	4-7/8	8	11-1/8	14-1/4	17-3/8
M12x1.75	1084	4184	12CN	12.0	18.0	24.0	30.0	36.0	14.30	15.00	5	8-1/4	11-1/2	14-5/8	17-7/8
M14x2	1084	4184	14CN	14.0	21.0	28.0	35.0	42.0	16.65	17.35	5-1/8	8-1/2	11-3/4	15	18-3/8
M16x2	1084	4184	16CN	16.0	24.0	32.0	40.0	48.0	18.90	19.60	6-1/8	9-3/4	13-1/2	17-1/4	21
M18x2.5	1084	4184	18CN	18.0	27.0	36.0	45.0	54.0	21.30	22.0	5-3/8	8-7/8	12-1/4	15-5/8	19
M20x2.5	1084	4184	20CN	20.0	30.0	40.0	50.0	60.0	23.55	24.40	6-1/8	9-7/8	13-5/8	17-3/8	21-1/8
M22x2.5	1084	4184	22CN	22.0	33.0	44.0	55.0	66.0	25.90	26.90	6-3/4	10-7/8	14-7/8	19	23-1/8
M24x3	1084	4184	24CN	24.0	36.0	48.0	60.0	72.0	28.00	29.00	6-1/8	10	13-3/4	17-1/2	21-3/8
M27x3	1084	4184	27CN	27.0	40.5	54.0	67.5	81.0	31.40	32.40	7	11-1/4	15-1/2	19-3/4	24
M30x3.5	1084	4184	30CN	30.0	45.0	60.0	75.0	90.0	34.80	36.00	6-3/4	10-3/4	14-7/8	18-7/8	23
M33x3.5	1084	4184	33CN	33.0	49.5	66.0	82.5	99.0	37.80	39.20	7-1/2	12	16-1/2	21	25-3/8
M36x4	1084	4184	36CN	36.0	54.0	72.0	90.0	108.0	41.50	42.90	7-1/8	11-3/8	15-5/8	19-7/8	24-1/4
M39x4	1084	4184	39CN	39.0	58.5	78.0	97.5	117.0	44.60	46.00	7-7/8	12-1/2	17-1/8	21-3/4	26-3/8
METRIC FINE															
M8x1	4255	5255	8CN	8.0	12.0	16.0	20.0	24.0	9.70	10.25	5-7/8	9-3/8	13	16-1/2	20-1/8
M10x1	4255	5255	10CN	10.0	15.0	20.0	25.0	30.0	11.95	12.50	7-5/8	12	16-1/2	21	25-1/2
M10x1.25	4649	5649	10CN	10.0	15.0	20.0	25.0	30.0	12.10	12.65	5-7/8	9-1/2	13-1/8	16-3/4	20-3/8
M12x1.25	4649	5649	12CN	12.0	18.0	24.0	30.0	36.0	14.30	15.00	7-1/4	11-5/8	15-7/8	20-1/4	24-1/2
M12x1.5	3745	5145	12CN	12.0	18.0	24.0	30.0	36.0	14.25	14.95	6	9-5/8	13-3/8	17	20-3/4
M14x1.5	3745	5145	14CN	14.0	21.0	28.0	35.0	42.0	16.55	17.25	7-1/8	11-3/8	15-5/8	20	24-1/4
M16x1.5	3745	5145	16CN	16.0	24.0	32.0	40.0	48.0	18.90	19.60	8-1/4	13-1/8	18	22-3/4	27-5/8
M18x1.5	3745	5145	18CN	18.0	27.0	36.0	45.0	54.0	21.05	21.75	9-1/2	15	20-3/8	25-7/8	31-3/8
M20x1.5	3745	5145	20CN	20.0	30.0	40.0	50.0	60.0	23.15	24.00	10-3/4	16-7/8	22-7/8	28-7/8	35
M22x1.5	3745	5145	22CN	22.0	33.0	44.0	55.0	66.0	25.55	26.45	11-7/8	18-1/2	25-1/8	31-5/8	38-1/4
M18x2	4266	5266	18CN	18.0	27.0	36.0	45.0	54.0	21.15	21.85	7	11-1/8	15-3/8	19-1/2	23-5/8
M20x2	4266	5266	20CN	20.0	30.0	40.0	50.0	60.0	23.20	24.05	7-7/8	12-1/2	17-1/4	21-7/8	26-1/2
M22x2	4266	5266	22CN	22.0	33.0	44.0	55.0	66.0	25.60	26.50	8-3/4	13-3/4	18-7/8	23-7/8	29
M24x2	4266	5266	24CN	24.0	36.0	48.0	60.0	72.0	28.10	29.10	9-1/2	15	20-3/8	25-7/8	31-1/4
M27x2	4266	5266	27CN	27.0	40.5	54.0	67.5	81.0	31.30	32.30	10-7/8	17	23-1/4	29-3/8	35-1/2
M30x2	4266	5266	30CN	30.0	45.0	60.0	75.0	90.0	34.50	35.70	12-1/4	19-1/8	25-7/8	32-3/4	39-1/2
M33x2	4266	5266	33CN	33.0	49.5	66.0	82.5	99.0	37.80	39.20	13-5/8	21-1/8	28-5/8	36	43-1/2
M36x2	4266	5266	36CN	36.0	54.0	72.0	90.0	108.0	41.00	42.40	15	23-1/4	31-3/8	39-1/2	47-3/4
M39x2	4266	5266	39CN	39.0	58.5	78.0	97.5	117.0	44.30	45.70	16-3/8	25-1/4	34-1/8	43	51-7/8
M36x3	4277	5277	36CN	36.0	54.0	72.0	90.0	108.0	41.30	42.70	9-3/4	15-1/4	20-7/8	26-1/2	32
M39x3	4277	5277	39CN	39.0	58.5	78.0	97.5	117.0	44.40	45.80	10-3/4	16-3/4	22-3/4	28-7/8	34-7/8

*M2 not available in Screen-Lock 1 diameter length

1084-4CNY060S						Complete Part No. Example: Free Running Insert; M4 x 0.7 Stainless Steel; Cadmium; 1 dia.; On Strip					
Type	Size	Material	Finish	Length	Packaging						
1084 Free Running, Coarse	See Chart	CN – Stainless Steel	Blank – None	See Chart	Blank – Bulk						
4255, 4649, 3745, 4266 &		BN – Phosphor Bronze	Y – Cadmium		S – Strip Feed						
4277 Free Running, Fine		TN – Inconel X	V – Silver								
4184 Screw-Lock, Coarse		EN – Nitronic 60	W – Dry Film Lubricant								
5255, 5649, 5145, 5266 &		GN – Titanium	PF – Primer Free II								
5277 Screw-Lock, Fine											

Notes on Insert Specifications:

- Nominal length is a computed value and cannot be measured. It is the actual assembled length + 1/2 pitch.
- The number of coils are counted from the notch.
- Phosphor Bronze Inserts – **Not available** in sizes M2, M2.2, M2.5, M3, M3.5 and M4.
- Inconel X Inserts – 1 diameter long Screw-Lock inserts **not available** in sizes M2, M2.2, M2.5 and M3.

Heli-Coil® Tangless® Inserts

Heli-Coil Tangless® Inserts eliminate tang break-off and retrieval and are easily adjusted or removed after installation.

• STRONGER ASSEMBLIES

Tapped threads are strengthened because the inherent flexibility of the insert provides a more balanced distribution of static and dynamic loads throughout the engagement length.

• BI-DIRECTIONAL DESIGN

Installs quickly and easily from either end.

- **ELIMINATE STRESS.** Virtually no stress is induced into the parent material as no staking, swaging or keying in place is required.

• POSITIVE SELF-LOCKING TORQUE.

Heli-Coil Tangless® screw-lock inserts provide a positive, self-locking torque complying with the requirements of NASM8846.

• MINIMIZE SPACE AND WEIGHT.

Requires smaller boss than solid inserts; minimize total in-place cost.

• CONFORM TO NAS1130

Selecting a Heli-Coil Tangless® Insert

Heli-Coil Tangless® inserts are made from 304 Stainless Steel per AS7245 (see chart below for thread size designation), and are available in three lengths:

1, 1-1/2 and 2 diameters.

Tangless® inserts can be ordered with a Cadmium Plate finish (Y), Dry Film Lube finish (W), Primer Free II finish (PF) or no finish (Blank).



Below is an example of how to order Heli-Coil Tangless inserts.



T3585-04CW112S

Complete Part No. Example: Screw-locking Insert; #4-40; Stainless Steel; Dry Film Lube, 1 dia., On Strip

Type	Size	Material	Finish	Length	Packaging
T1185 Free Running, UNC T1191 Free Running, UNF T3585 Screw-Lock, UNC T3591 Screw-Lock, UNF	See Chart	C - Stainless Steel	Y - Cadmium W - Dry Film Lube PF - Primer Free Blank - No Finish	See Chart	Blank - Bulk S - Strip Feed



Nominal Thread Size	Type		Size Designation	“A”			“B”		Number of Coils		
	Free Running	Screw- Lock		Normal Length			Free Outer Dia.		Nominal Length		
				1 Dia.	1 1/2 Dia.	2 Dia.	Min.	Max.	1 Dia.	1 1/2 Dia.	2 Dia.
Unified Coarse Thread (UNC)											
2 (.086)-56	T1185	T3585	02C	.086	.129	.172	.110	.119	3	5-1/4	7-3/8
4 (.112)-40	T1185	T3585	04C	.112	.168	.224	.144	.159	2-3/4	4-3/4	6-3/4
6 (.138)-32	T1185	T3585	06C	.138	.207	.276	.178	.193	2-3/4	4-3/4	6-7/8
8 (.164)-32	T1185	T3585	2C	.164	.246	.328	.205	.220	3-1/2	6	8-3/8
10 (.190)-24	T1185	T3585	3C	.190	.285	.380	.244	.259	2-7/8	5	7-1/8
1/4(.250)-20	T1185	T3585	4C	.250	.375	.500	.310	.330	3-3/8	5-3/4	8
Unified Fine Thread (UNF)											
10(.190)-32	T1191	T3591	3C	.190	.285	.380	.236	.256	4-1/8	6-7/8	9-1/2
1/4(.250)-28	T1191	T3591	4C	.250	.375	.500	.326	.306	5	8-1/4	11-3/8

Note: Contact your local distributor for specific product availability.

Thread repair kits & master sets

Heli-Coil inserts are available in thread repair kits and sets for repairing tapped holes which have been stripped or damaged due to wear, corrosion and over-torque. They are available in inch, metric, spark plug and pipe thread series.

All kits have a quantity of inserts, the proper size drill, high speed steel Heli-Coil tap and an installation tool. The Professional Kits* (shown in **bold** type) also includes a tang removal tool and quantities of three lengths of inserts.



Thread Size	Kit P/N	Inserts per Kit
Inch Coarse Thread (UNC)		
4-40	5401-04	36*
5-40	5401-05	36*
6-32	5401-06	36*
8-32	5401-2	36*
10-24	5401-3	36*
12-24	5401-1	36*
1/4-20	5401-4	36*
5/16-18	5401-5	36*
3/8-16	5401-6	18*
7/16-14	5401-7	18*
1/2-13	5401-8	18*
9/16-12	5401-9	6
5/8-11	5401-10	6
3/4-10	5401-12	4
7/8-9	5521-14	6
1-8	5521-16	6
1-1/8-7	5521-18	5
1-1/4-7	5521-20	4
1-3/8-6	5521-22	4
1-1/2-6	5521-24	4
Inch Fine Thread (UNF)		
6-40	5402-06	36*
8-36	5402-2	36*
10-32	5402-3	36*
1/4-28	5402-4	36*
5/16-24	5402-5	36*
3/8-24	5402-6	18*
7/16-20	5402-7	18*
1/2-20	5402-8	18*
9/16-18	5402-9	6
5/8-18	5402-10	6
3/4-16	5402-12	4
7/8-14	5528-14	6
1-14	5528-16	6
1-12	5528-161	6
1-1/8-12	5528-18	5
1-1/4-12	5528-20	4
1-3/8-12	5528-22	4
1-1/2-12	5528-24	4

* The total quantity of inserts in the Professional Kits represents 3 lengths.

Thread Size	Kit P/N	Inserts per Kit
Metric Coarse		
M3x0.5	5403-3	36*
M3.5x0.6	5403-3.5	36*
M4x0.7	5403-4	18*
M5x0.8	5403-5	18*
M6x1	5403-6	18*
M7x1	5403-7	18*
M8x1.25	5403-8	18*
M9x1.25	5403-9	12
M10x1.5	5403-10	18*
M11x1.5	5403-11	6
M12x1.75	5403-12	18*
M14x2	5403-14	12
M16x2	5403-16	6
M18x2.5	5403-18	6
M20x2.5	5403-20	4
Metric Fine		
M8x1	5404-8	18*
M10x1	5404-10	18*
M10x1.25	5405-10	18*
M12x1.25	5405-12	18*
M12x1.5	5406-12	18*
M14x1.5	5406-14	6
M16x1.5	5406-16	6
M18x1.5	5406-18	6

* The total quantity of inserts in the Professional Kits represents 3 lengths.

MASTER THREAD REPAIR SETS

Type	Part No.	Insert sizes included in set
Inch Coarse	4934	1/4-20, 5/16-18, 3/8-16, 7/16-14, 1/2-13, 5/8-11
Inch Fine	4936	10-32, 1/4-28, 5/16-24, 3/8-24, 7/16-20, 1/2-20
Metric	4937-125	M5x0.8, M6x1, M8x1.25, M10x1.25
Metric	4937-150	M5x0.8, M6x1, M8x1.25, M10x1.5

All sets contain a drill, tap, tool and inserts for each size listed above.

SPARK PLUG SERIES

Thread Size	Part No.	Reach	Inserts Per Kit
10-1.0mm	5523-10	1/2	24
12-1.25mm	5523-12	1/2	12
		3/4	12
		3/8	6
		7/16	6
14-1.25mm	5523-14	1/2	6
		3/4	6
		.472	6
18-1.50mm	5523-18	1/2	24
7/8-18	550	1/2-5/8	10
		Short	6
M14x1.25*	5408-14	Normal	6
		Long	6

(*Sav-A-Thread®)

PIPE THREAD SERIES

Thread Size	Part No.	Inserts Per Kit
1/8-27	5407-2	12
1/4-18	5407-4	12
3/8-18	5407-6	10
1/2-14	5407-8	10
3/4-14	5407-12	10
1-11-1/2	5407-16	6

Boss Dimensions

Standard boss configurations may be used with Heli-Coil inserts.

A boss diameter of twice the nominal bolt size is adequate for most load conditions. For critical applications, the boss diameter should be twice the Heli-Coil tap major diameter (Tables VII & VIII, Pages 20 & 21). Boss thickness is a function of the size and length of the insert chosen and the particular requirements of the component being designed. The use of Heli-Coil inserts generally minimizes the size of the boss because their high strength characteristics allow for smaller or fewer fasteners.


Class of Fit

Since Heli-Coil inserts are flexible, the class of fit of the final assembly is a function of the tapped hole. Heli-Coil STI (Screw Thread Insert) taps are available in inch series for both Class 2B and 3B. Metric Classes include 5H and 4H5H. Class 2B or 5H tapped holes provide widest production tolerances while Class 3B or 4H5H holes provide slightly tighter tolerances.

Class 3B or 4H5H holes are recommended for Screw-Lock applications.


Bolt Projection

The bolt must engage the entire insert to insure maximum strength of a Heli-Coil insert assembly. It is strongly recommended that the tang always be removed and bolt projection be equal to the full tapped thread depth (Dimension H, Tables VII & VIII, Pages 20 & 21). If design limitations prohibit this, contact us to obtain minimum bolt projection data.

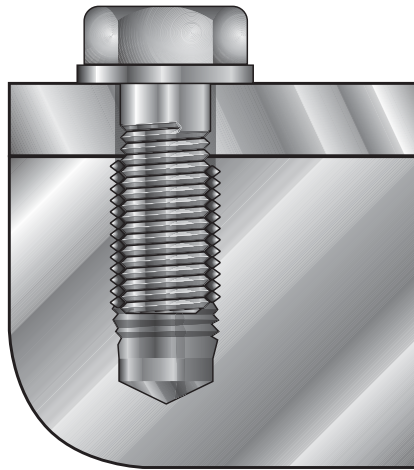


Material Thickness

The **minimum** material thickness for through hole assemblies is equal to the Insert Nominal Length (Dimension Q, Pages 12 & 13), without a countersink and the insert installed 1/4-1/2 pitch below the surface. For production, the hole should be counter-sunk, and the insert installed 3/4-1-1/2 pitch below the surface. In this case the minimum material thickness is "Q" + 1 pitch.

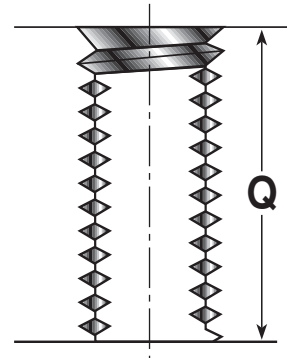

Drawing Call Out

Below is a sectional view of an installed insert for a Heli-Coil Insert Assembly. The example used is a 3/8-24 x .562 long Screw-Lock insert in a blind hole, Class 3B fit, tapped with a plug tap.

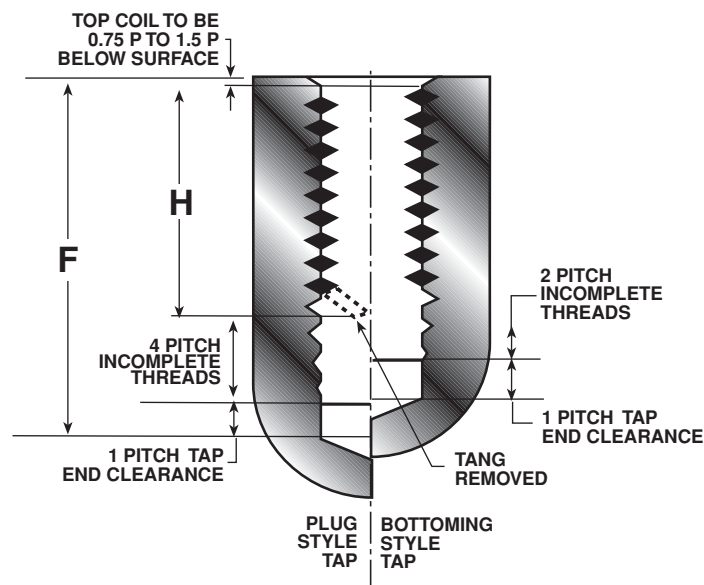

HOLE PREPARATION

Engineering Data

Conventional machining methods are used for Heli-Coil assemblies. The process is simple...

1. Drill
2. Countersink
3. Tap
4. Gage

1. Drilling

The suggested drill sizes listed for aluminum in Tables V & VI, pages 18 & 19, are within the minor diameter limits specified in NASM33537 or MA1567. Drill sizes listed for steel, magnesium and plastic are larger (in most cases) allowing for parent material "close-in" in soft materials and increased tap wear life in hard materials.

The drill depths listed in this table allow for tap end clearance, maximum insert "set-down", countersink, and the chamfer on the tap. These drill depths are minimum and should be increased where possible, especially when using Spiral Pointed Taps, to allow for chip clearance. The formula for the drill depth is given on Pages 18 & 19.

2. Countersinking

Countersinking the drilled hole is recommended to prevent a feather edge at the top of the tapped hole and to help guide the insert into the tapped threads. A 120° included angle countersink is necessary to insure that the angle of the tapped thread and the countersink are the same ($120^\circ \div 2 = 60^\circ$ tapped thread).

3. Tapping

The dimensions for the depth of the full tapped thread (Dimension H, Tables VII & VIII, Pages 20 & 21) are MINIMUM for blind holes with countersinks. For through holes without a countersink the minimum full tapped thread depth must be equal to the insert nominal length (Dimension Q, Pages 12 & 13).

Heli-Coil taps for free machining materials are listed in Tables IX & XII, Pages 20 & 23 Class 2B (inch), 5H metric and 3B (inch) or 4H5H (metric) tapped holes. (Class of fit recommendations are given on Page 14). There are four types of taps listed:

- **Straight, Flute, Plug & Bottoming** style which are used for hand and short run production

- **Spiral Point Plug** taps (chips are pushed forward) are used for through holes and blind hole with ample chip clearance at the bottom.
- **High Spiral Flute Bottoming** taps (chips are pulled out of the hole) are used for deep or blind holes in soft stringy materials and holes with minimal chip clearance
- **Roughing** taps (7/16-1") are available for materials difficult to tap to reduce the load and wear on the finishing tap.

If it is necessary to decrease the **Minimum Depth** of the drilled and tapped hole, one or more of the following steps may be helpful:

Action	Amount of Reduction
Remove the male center on plug taps 5/16, M8 & under	one half of the bolt diameter
Use a bottoming tap	2 pitches
Eliminate the countersink	1/2 pitch
Reduce insert "set-down" to 1/4-1/2 pitch	up to 1/2 pitch

4. Gaging

Heli-Coil thread plug gages should be used to check, according to sampling plan, the tapped holes before insert installation. See Pages 24 & 25 for gage part numbers and further gaging data.

Preparing Process Sheets

A sample process sheet for preparing a tapped hole for Heli-Coil inserts is shown below. Highlighted are references to the various dimensional data and part number specifications listed in the tables on pages listed. Insert installation and tang break off are covered in subsequent pages.

Hole preparation for 3/8-24, Screw-Lock Heli-Coil Insert, .562 long, Part No. 3591-6CN562 Blind Hole, Class 3B, tapped with a plug tap in aluminum		
Oper. No.	Operation Description	Tool or Gage
10	Drill hole .3840/.3910 diameter to minimum depth (Dimension F, Tables V & VI, Pages 18 & 19)	25/64 drill (.3906), Tables V & VI, Pages 18 & 19
20	Countersink $120^\circ \pm 5^\circ$ to .42/.45 diameter (Dimension M, Tables VII & VIII, Pages 20 & 21)	120° countersink
30	Tap 3/8 (.3750)-24 UNF-3B STI Thread Depth .600 (Dimension H, Tables VII & VIII, Pages 20 & 21)	Heli-Coil tap 6FPB, Tables IX & XI, Pages 22 & 24
40	Remove chips	Air Nozzle
50	Gage according to your sampling plan	Heli-Coil gage 3694-6, Pages 26 & 27
60	Install 3591-6CN562 Heli-Coil insert 3/4 to 1-1/2 pitch below surface	Installation Tool 7552-6, Page 29
70	Break off tang	Heli-Coil tang break-off tool 3692-6, Page 33

Heli-Coil® drilling data – inch

The **minimum** drilling depths shown below allow for the following recommended practices:

1. Countersinking the drilled hole to prevent a feather edge at the start of the tapped hole.

2. 3/4 – 1-1/2 pitch of insert “set-down” to allow for maximum production tolerance. Dimensions are shown for both plug and bottoming taps.

Note: Plug taps 5/16" or M8 and smaller have a male center and the drilled hole depth dimensions allow for this length (one half of the diameter of the bolt). Calculation of dimension “F” is as follows:

TABLE V – INCH DRILLED HOLE DIMENSIONS

Nominal Thread Size	Suggested Drill Size		“F” MINIMUM DRILLING DEPTH FOR EACH INSERT LENGTH									
			Plug Taps					Bottoming Taps				
	Aluminum	Steel, Magnesium, Plastic	1 Dia.	1-1/2 Dia.	2 Dia.	2-1/2 Dia.	3 Dia.	1 Dia.	1-1/2 Dia.	2 Dia.	2-1/2 Dia.	3 Dia.
UNIFIED COARSE THREAD (UNC)												
1 (.073)-64	#47 (.0785)	#46 (.0810)	.203	.240	.276	.313	.349	.136	.172	.209	.245	.282
2 (.086)-56	3/32 (.0938)	#41 (.0960)	.236	.279	.322	.365	.408	.157	.200	.243	.286	.329
3 (.099)-48	#36 (.1065)	7/64 (.1094)	.273	.323	.372	.422	.471	.182	.232	.281	.331	.380
4 (.112)-40	#31 (.1200)	#31 (.1200)	.318	.374	.430	.486	.542	.212	.268	.324	.380	.436
5 (.125)-40	3.4mm (.1339)	#29 (.1360)	.338	.400	.462	.525	.588	.225	.288	.350	.412	.475
6 (.138)-32	#26 (.1470)	#25 (.1495)	.394	.464	.532	.602	.670	.263	.332	.401	.470	.539
8 (.164)-32	#17 (.1730)	#16 (.1770)	.434	.516	.598	.680	.762	.289	.371	.453	.535	.617
10 (.190)-24	13/64 (.2031)	#5 (.2055)	.535	.630	.725	.820	.915	.357	.452	.547	.642	.737
12 (.216)-24*	#1 (.2280)	#1 (.2280)	.574	.682	.790	.898	1.006	.383	.491	.599	.707	.815
1/4 (.2500)-20	H (.2660)	H (.2660)	.675	.800	.925	1.050	1.175	.450	.575	.700	.825	.950
5/16 (.3125)-18	Q (.3320)	Q (.3320)	.801	.957	1.113	1.269	1.425	.534	.690	.846	1.002	1.158
3/8 (.3750)-16	X (.3970)	X (.3970)	.750	.938	1.125	1.312	1.500	.625	.812	1.000	1.188	1.375
7/16 (.4375)-14	29/64 (.4531)	29/64 (.4531)	.867	1.086	1.305	1.524	1.743	.724	.943	1.162	1.381	1.600
1/2 (.5000)-13*	33/64 (.5156)	17/32 (.5312)	.962	1.212	1.462	1.712	1.962	.808	1.058	1.308	1.558	1.808
9/16 (.5625)-12*	37/64 (.5781)	19/32 (.5938)	1.062	1.343	1.624	1.905	2.186	.895	1.176	1.457	1.738	2.019
5/8 (.6250)-11	21/32 (.6562)	21/32 (.6562)	1.170	1.483	1.795	2.108	2.420	.989	1.301	1.614	1.926	2.239
3/4 (.7500)-10	25/32 (.7812)	25/32 (.7812)	1.350	1.725	2.100	2.475	2.850	1.150	1.525	1.900	2.275	2.650
7/8 (.8750)-9	29/32 (.9062)	29/32 (.9062)	1.542	1.979	2.417	2.854	3.292	1.319	1.757	2.194	2.632	3.069
1 (1.000)-8	1-1/32 (1.0312)	1-1/32 (1.0312)	1.750	2.250	2.750	3.250	3.750	1.500	2.000	2.500	3.000	3.500
1-1/8 (1.1250)-7	1-11/64 (1.1719)	1-11/64 (1.1719)	1.982	2.545	3.107	3.670	4.232	1.696	2.259	2.821	3.384	3.946
1-1/4 (1.2500)-7	1-19/64 (1.2969)	1-19/64 (1.2969)	2.107	2.732	3.357	3.982	4.607	1.821	2.446	3.071	3.696	4.321
1-3/8 (1.3750)-6	1-27/64 (1.4219)	1-27/64 (1.4219)	2.375	3.062	3.750	4.437	5.125	2.042	2.729	3.417	4.104	4.792
1-1/2 (1.5000)-6	1-35/64 (1.5469)	1-35/64 (1.5469)	2.500	3.250	4.000	4.750	5.500	2.167	2.917	3.667	4.417	5.167
UNIFIED FINE THREAD (UNF)												
2 (.086)-64	2.35mm (.0925)	2.35mm (.0925)	.223	.266	.309	.352	.395	.149	.192	.235	.278	.321
3 (.099)-56	#37 (.1040)	#36 (.1065)	.256	.305	.355	.404	.454	.170	.220	.269	.319	.368
4 (.112)-48	3mm (.1181)	#31 (.1200)	.293	.349	.405	.461	.517	.195	.251	.307	.363	.419
6 (.138)-40	#26 (.1470)	#25 (.1495)	.357	.426	.495	.564	.633	.238	.307	.376	.445	.514
8 (.164)-36	#17 (.1730)	#16 (.1770)	.413	.495	.577	.659	.741	.275	.357	.439	.521	.603
10 (.190)-32	#7 (.2010)	13/64 (.2031)	.472	.568	.662	.758	.852	.315	.410	.505	.600	.695
1/4 (.2500)-28	G (.2610)	6.7mm (.2638)	.589	.714	.839	.964	1.089	.393	.518	.643	.768	.893
5/16 (.3125)-24	21/64 (.3281)	21/64 (.3281)	.718	.874	1.030	1.186	1.342	.479	.635	.791	.947	1.103
3/8 (.3750)-24	25/64 (.3906)	25/64 (.3906)	.625	.812	1.000	1.187	1.375	.542	.729	.917	1.104	1.292
7/16 (.4375)-20	29/64 (.4531)	29/64 (.4531)	.738	.957	1.176	1.395	1.614	.638	.857	1.076	1.295	1.514
1/2 (.5000)-20	33/64 (.5156)	33/64 (.5156)	.800	1.050	1.300	1.550	1.800	.700	.950	1.200	1.450	1.700
9/16 (.5625)-18	37/64 (.5781)	37/64 (.5781)	.895	1.176	1.457	1.738	2.019	.784	1.065	1.346	1.627	1.908
5/8 (.6250)-18	41/64 (.6406)	41/64 (.6406)	.958	1.271	1.583	1.896	2.208	.847	1.160	1.472	1.785	2.097
3/4 (.7500)-16	49/64 (.7656)	49/64 (.7656)	1.125	1.500	1.875	2.250	2.625	1.000	1.375	1.750	2.125	2.500
7/8 (.8750)-14	57/64 (.8906)	57/64 (.8906)	1.304	1.741	2.179	2.616	3.054	1.161	1.598	2.036	2.473	2.911
1 (1.000)-14	1-1/64 (1.0156)	1-1/32 (1.0312)	1.429	1.929	2.429	2.929	3.429	1.286	1.786	2.286	2.786	3.286
1 (1.000)-12*	1-1/64 (1.0156)	1-1/32 (1.0312)	1.500	2.000	2.500	3.000	3.500	1.333	1.833	2.333	2.833	3.333
1-1/8 (1.1250)-12*	1-9/64 (1.1406)	1-5/32 (1.1562)	1.625	2.187	2.750	3.312	3.875	1.458	2.021	2.583	3.146	3.708
1-1/4 (1.2500)-12*	1-17/64 (1.2656)	1-9/32 (1.2812)	1.750	2.375	3.000	3.625	4.250	1.583	2.208	2.833	3.458	4.083
1-3/8 (1.3750)-12*	1-25/64 (1.3906)	1-13/32 (1.4062)	1.875	2.562	3.250	3.937	4.625	1.708	2.396	3.083	3.771	4.458
1-1/2 (1.5000)-12*	1-33/64 (1.5156)	1-17/32 (1.5312)	2.000	2.750	3.500	4.250	5.000	1.833	2.583	3.333	4.083	4.833

*Standard size drills are suggested even though in these sizes they vary slightly from minor diameter specifications in NASM33537.

For Plug Taps 5/16" or M8 and smaller. F is equal to the insert nominal length (Q) + ½ the nominal bolt diameter + 5 Pitch (allowing for tap chamfer, countersink and maximum "set-down").

For Plug Taps 3/8" or M10 and larger. F is equal to the insert nominal length (Q) + 5 Pitch (allowing for tap

chamfer, counter sink and maximum "set-down").

For Bottoming Taps. F is equal to the insert nominal length (Q) + 3 Pitch (allowing for tap chamfer, countersink and maximum "set-down").

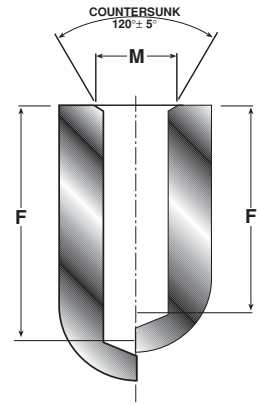


TABLE VI – METRIC DRILLED HOLE DIMENSIONS

Nominal Thread Size	Minor Diameter		Suggested Drill Size		"F" MINIMUM DRILLING DEPTH FOR EACH INSERT LENGTH									
	Min.	Max.	Aluminum	Steel, Magnesium, Plastic	Plug Taps					Bottoming Taps				
					1 Dia.	1-1/2 Dia.	2 Dia.	2-1/2 Dia.	3 Dia.	1 Dia.	1-1/2 Dia.	2 Dia.	2-1/2 Dia.	3 Dia.
METRIC COARSE														
M2X0.4	2.087	2.199	2.1	2.1	5.40	6.40	7.40	8.40	9.40	3.60	4.60	5.60	6.60	7.60
M2.2x0.45	2.297	2.422	2.3	2.35	6.00	7.10	8.20	9.30	10.40	4.00	5.10	6.20	7.30	8.40
M2.5x0.45	2.597	2.722	2.55	2.65	6.45	7.70	8.95	10.20	11.45	4.30	5.55	6.80	8.05	9.30
M3x0.5	3.108	2.248	3.15	3.2	7.50	9.00	10.50	12.00	13.50	5.00	6.50	8.00	9.50	11.00
M3.5x0.6	3.630	3.790	3.7	3.7	8.85	10.60	12.35	14.10	15.85	5.90	7.65	9.40	11.15	12.90
M4x0.7	4.152	4.332	4.2	4.25	10.20	12.20	14.20	16.20	18.20	6.80	8.80	10.80	12.80	14.80
M5x0.8	5.174	5.374	5.2	5.3	12.30	14.80	17.30	19.80	22.30	8.20	10.70	13.20	15.70	18.20
M6x1	6.217	6.407	6.25	6.3	15.00	18.00	21.00	24.00	27.00	10.00	13.00	16.00	19.00	22.00
M7x1	7.217	7.407	7.25	7.3	16.50	20.00	23.50	27.00	30.50	11.00	14.50	18.00	21.50	25.00
M8x1.25	8.271	8.483	8.3	8.4	19.50	23.50	27.50	31.50	35.50	13.00	17.00	21.00	25.00	29.00
M10x1.5	10.324	10.560	10.5	10.5	19.00	24.00	29.00	34.00	39.00	16.00	21.00	26.00	31.00	36.00
M12x1.75	12.379	12.644	12.5	12.5	22.50	28.50	34.50	40.50	46.50	19.00	25.00	31.00	37.00	43.00
M14x2	14.433	14.733	14.5	14.5	26.00	33.00	40.00	47.00	54.00	22.00	29.00	36.00	43.00	50.00
M16x2	16.433	16.733	16.5	16.5	28.00	36.00	44.00	52.00	60.00	24.00	32.00	40.00	48.00	56.00
M18x2.5	18.541	18.896	18.75	18.75	33.00	42.00	51.00	60.00	69.00	28.00	37.00	46.00	55.00	64.00
M20x2.5	20.541	20.896	20.75	20.75	35.00	45.00	55.00	65.00	75.00	30.00	40.00	50.00	60.00	70.00
M22x2.5	22.541	22.896	22.75	22.75	37.00	48.00	59.00	70.00	81.00	32.00	43.00	54.00	65.00	76.00
M24x3	24.649	25.049	24.75	24.75	42.00	54.00	66.00	78.00	90.00	36.00	48.00	60.00	72.00	84.00
M27x3	27.649	28.049	27.75	27.75	45.00	58.50	72.00	85.50	99.00	39.00	52.50	66.00	79.50	93.00
M30x3.5	30.757	31.207	31	31	51.00	66.00	81.00	96.00	111.00	44.00	59.00	74.00	89.00	104.00
M33x3.5	33.757	34.207	34	34	54.00	70.50	87.00	103.50	120.00	47.00	63.50	80.00	96.50	113.00
M36x4	36.866	37.341	37	37	60.00	78.00	96.00	114.00	132.00	52.00	70.00	88.00	106.00	124.00
M39x4	39.866	40.341	40	40	63.00	82.50	102.00	121.50	141.00	55.00	74.50	94.00	113.50	133.00
METRIC FINE														
M8x1	8.217	8.407	8.25	8.3	18.00	22.00	26.00	30.00	34.00	12.00	16.00	20.00	24.00	28.00
M10x1	10.217	10.407	10.25	10.25	16.00	21.00	26.00	31.00	36.00	14.00	19.00	24.00	29.00	34.00
M10x1.25*	10.271	10.483	10.25	10.25	17.50	22.50	27.50	32.50	37.50	15.00	20.00	25.00	30.00	35.00
M12x1.25*	12.271	12.483	12.25	12.25	19.50	25.50	31.50	37.50	43.50	17.00	23.00	29.00	35.00	41.00
M12x1.5*	12.324	12.560	12.25	12.5	21.00	27.00	33.00	39.00	45.00	18.00	24.00	30.00	36.00	42.00
M14x1.5*	14.324	14.560	14.25	14.5	23.00	30.00	37.00	44.00	51.00	20.00	27.00	34.00	41.00	48.00
M16x1.5*	16.324	16.560	16.25	16.5	25.00	33.00	41.00	49.00	57.00	22.00	30.00	38.00	46.00	54.00
M18x1.5*	18.324	18.560	18.25	18.5	27.00	36.00	45.00	54.00	63.00	24.00	33.00	42.00	51.00	60.00
M20x1.5*	20.324	20.560	20.25	20.5	29.00	39.00	49.00	59.00	69.00	26.00	36.00	46.00	56.00	66.00
M22x1.5*	22.324	22.560	22.25	22.5	31.00	42.00	53.00	64.00	75.00	28.00	39.00	50.00	61.00	72.00
M18x2	18.433	18.733	18.5	18.5	30.00	39.00	48.00	57.00	66.00	26.00	35.00	44.00	53.00	62.00
M20x2	20.433	20.733	20.5	20.5	32.00	42.00	52.00	62.00	72.00	28.00	38.00	48.00	58.00	68.00
M22x2	22.433	22.733	22.5	22.5	34.00	45.00	56.00	67.00	78.00	30.00	41.00	52.00	63.00	74.00
M24x2	24.433	24.733	24.5	24.5	36.00	48.00	60.00	72.00	84.00	32.00	44.00	56.00	68.00	80.00
M27x2	27.433	27.733	27.5	27.5	39.00	52.50	66.00	79.50	93.00	35.00	48.50	62.00	75.50	89.00
M30x2	30.433	30.733	30.5	30.5	42.00	57.00	72.00	87.00	102.00	38.00	53.00	68.00	83.00	98.00
M33x2	33.433	33.733	33.5	33.5	45.00	61.50	78.00	94.50	111.00	41.00	57.50	74.00	90.50	107.00
M36x2	36.433	36.733	36.5	36.5	48.00	66.00	84.00	102.00	120.00	44.00	62.00	80.00	98.00	116.00
M39x2	39.433	39.733	39.5	39.5	51.00	70.50	90.00	109.00	129.00	47.00	66.50	86.00	105.50	125.00
M36x3	36.649	37.049	37	37	54.00	72.00	90.00	108.00	126.00	48.00	66.00	84.00	102.00	120.00
M39x3	39.649	40.049	40	40	57.00	76.50	96.00	115.50	135.00	51.00	70.50	90.00	109.50	129.00

* Standard size drills are suggested even though in these sizes they vary slightly from minor diameter limits.

Heli-Coil® tapping data – inch

The *minimum* tapping depths shown below (Dimension H) are the **MINIMUM** for countersunk holes and an insert set-down of 1 – 1/2 pitch maximum. The calculation for Dimension “H” is:

H is equal to insert nominal length + 1 Pitch.

The tapped hole must be held within the stated pitch diameter limits for the required class of fit for the installed Heli-Coil insert.

When anodize, Iridite or other finishes are used, all tapped hole dimensions must be met after the finishes are applied.

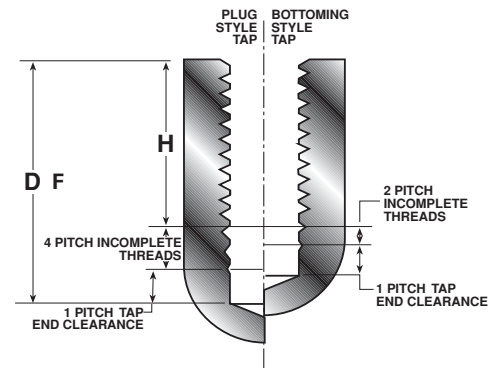


TABLE VII – INCH TAPPED HOLE DIMENSIONS

Nominal Thread Size	Countersink "M" Diameter (120° ±5° included angle)		Pitch Diameter			"H" MINIMUM TAPPING DEPTH					Minor Diameter (after tapping)		Tap Major Dia. Max.	Thread Pitch "P"
	Min.	Max.	Min.	3B Max.	2B Max.	INSERT LENGTH					Min.	Max.		
						1D	1-1/2D	2 D	1-1/2D	3D				
UNIFIED COARSE THREAD (UNC)														
1 (.073)-64	.085	.10	.0832	.0843	.0850	.090	.125	.160	.200	.235	.0764	.0823	.0958	.01563
2 (.086)-56	.09	.11	.0976	.0989	.0996	.100	.150	.190	.230	.280	.0899	.0961	.1117	.01786
3 (.099)-48	.11	.14	.1126	.1140	.1148	.120	.170	.220	.270	.320	.1036	.1104	.1289	.02083
4 (.112)-40	.14	.17	.1283	.1299	.1308	.140	.190	.250	.310	.360	.1175	.1252	.1473	.02500
5 (.125)-40	.16	.19	.1413	.1430	.1438	.150	.210	.280	.340	.400	.1305	.1373	.1603	.02500
6 (.138)-32	.18	.21	.1583	.1601	.1611	.170	.240	.310	.380	.450	.1448	.1527	.1817	.03125
8 (.164)-32	.20	.23	.1843	.1862	.1872	.200	.280	.360	.440	.520	.1708	.1781	.2077	.03125
10 (.190)-24	.24	.27	.2170	.2192	.2203	.230	.330	.420	.520	.610	.1990	.2080	.2475	.04167
12 (.216)-24	.26	.29	.2430	.2453	.2464	.260	.370	.470	.580	.690	.2250	.2340	.2735	.04167
1/4 (.2500)-20	.31	.34	.2825	.2851	.2864	.300	.430	.550	.680	.800	.2608	.2704	.3187	.05000
5/16 (.3125)-18	.38	.41	.3486	.3515	.3529	.370	.530	.680	.840	.990	.3245	.3342	.3884	.05556
3/8 (.3750)-16	.45	.48	.4156	.4189	.4203	.440	.630	.810	1.000	1.190	.3885	.3987	.4602	.06250
7/16 (.4375)-14	.52	.55	.4839	.4875	.4890	.510	.730	.950	1.170	1.380	.4530	.4639	.5343	.07143
1/2 (.5000)-13	.59	.62	.5499	.5537	.5554	.580	.830	1.080	1.330	1.580	.5166	.5273	.6042	.07692
9/16 (.5625)-12	.66	.69	.6167	.6208	.6225	.650	.930	1.210	1.490	1.770	.5806	.5918	.6751	.08333
5/8 (.65250)-11	.73	.76	.6841	.6885	.6903	.720	1.030	1.340	1.650	1.970	.6447	.6564	.7477	.09091
3/4 (.7500)-10	.87	.90	.8149	.8196	.8216	.850	1.230	1.600	1.980	2.350	.7716	.7838	.8850	.10000
7/8 (.8750)-9	1.00	1.03	.9471	.9522	.9543	.990	1.420	1.860	2.300	2.740	.8990	.9119	1.0247	.11111
1 (1.000)-8	1.14	1.17	1.0812	1.0868	1.0890	1.130	1.630	2.130	2.630	3.130	1.0271	1.0421	1.1681	.12500
1-1/8 (1.1250)-7	1.29	1.32	1.2178	1.2239	1.2262	1.270	1.830	2.390	2.960	3.520	1.1559	1.1730	1.3171	.14286
1-1/4 (1.2500)-7	1.41	1.44	1.3428	1.3490	1.3514	1.390	2.020	2.640	3.270	3.890	1.2809	1.2980	1.4421	.14286
1-3/8 (1.3750)-6	1.56	1.59	1.4832	1.4900	1.4926	1.540	2.230	2.920	3.600	4.290	1.4110	1.4310	1.5982	.16667
1-1/2 (1.5000)-6	1.69	1.72	1.6082	1.6151	1.6177	1.670	2.420	3.170	3.920	4.670	1.5360	1.5560	1.7232	.16667
UNIFIED FINE THREAD (UNF)														
2 (.086)-64	.09	.11	.0962	.0974	.0981	.100	.145	.190	.230	.275	.0894	.0947	.1088	.01563
3 (.099)-56	.11	.14	.1106	.1119	.1126	.120	.170	.220	.270	.310	.1029	.1086	.1247	.01786
4 (.112)-48	.14	.17	.1256	.1271	.1279	.130	.190	.240	.300	.360	.1166	.1229	.1419	.02083
6 (.138)-40	.17	.20	.1543	.1560	.1569	.160	.230	.300	.370	.440	.1435	.1503	.1733	.02500
8 (.164)-36	.20	.23	.1821	.1840	.1849	.190	.270	.360	.440	.520	.1701	.1771	.2032	.02778
10 (.190)-32	.23	.26	.2103	.2123	.2133	.220	.320	.410	.510	.600	.1968	.2041	.2337	.03125
1/4 (.2500)-28	.29	.32	.2732	.2754	.2765	.290	.410	.540	.660	.790	.2577	.2646	.2995	.03571
5/16 (.3125)-24	.36	.39	.3395	.3421	.3433	.350	.510	.670	.820	.980	.3215	.3288	.3700	.04167
3/8 (.3750)-24	.42	.45	.4020	.4047	.4059	.420	.600	.790	.980	1.170	.3840	.3910	.4325	.04167
7/16 (.4375)-20	.50	.53	.4700	.4731	.4744	.490	.710	.930	1.140	1.360	.4483	.4561	.5062	.05000
1/2 (.5000)-20	.56	.59	.5325	.5357	.5371	.550	.800	1.050	1.300	1.550	.5108	.5186	.5687	.05000
9/16 (.5625)-18	.63	.66	.5986	.6020	.6035	.620	.900	1.180	1.460	1.740	.5745	.5826	.6384	.05556
5/8 (.6250)-18	.69	.72	.6611	.6646	.6661	.680	.990	1.310	1.620	1.930	.6370	.6451	.7009	.05556
3/4 (.7500)-16	.82	.85	.7906	.7945	.7961	.810	1.190	1.560	1.940	2.310	.7635	.7720	.8352	.06250
7/8 (.8750)-14	.96	.99	.9214	.9257	.9274	.950	1.380	1.820	2.260	2.700	.8905	.8994	.9718	.07143
1 (1.000)-14	1.08	1.11	1.0464	1.0508	1.0527	1.070	1.570	2.070	2.570	3.070	1.0155	1.0243	1.0968	.07143
1 (1.000)-12	1.10	1.13	1.0542	1.0589	1.0608	1.080	1.580	2.080	2.580	3.080	1.0181	1.0281	1.1126	.08333
1-1/8 (1.1250)-12	1.22	1.25	1.1792	1.1841	1.1860	1.210	1.770	2.330	2.900	3.460	1.1431	1.1531	1.2376	.08333
1-1/4 (1.2500)-12	1.35	1.38	1.3042	1.3092	1.3112	1.330	1.960	2.580	3.210	3.830	1.2681	1.2781	1.3626	.08333
1-3/8 (1.3750)-12	1.47	1.50	1.4292	1.4343	1.4364	1.460	2.150	2.830	3.520	4.210	1.3931	1.4031	1.4876	.08333
1-1/2 (1.5000)-12	1.60	1.63	1.5542	1.5595	1.5615	1.580	2.330	3.080	3.830	4.580	1.5181	1.5281	1.6126	.08333

Heli-Coil taps in various types and styles produce holes for Tolerance Classes 4H5H or 3B and 5H or 2B for use in the general range of aluminums, magnesiums, mild steels, free machining stainless steels and other free machining materials. Conventional shop practice and

production procedures, speeds, feeds and lubricants should be used in combination with proper fixturing and good tapping machines or tapping heads. The tapped hole must be held within the stated pitch diameter limits for the required Tolerance Class of fit for the installed

Heli-Coil insert. For Standard (free running inserts), a tolerance class 5H or 2B is recommended. For Screw-Lock inserts, a tolerance class 4H5H or 3B is recommended in order to develop higher locking torques.

TABLE VIII – METRIC TAPPED HOLE DIMENSIONS

Nominal Thread Size	“M” Countersink Diameter		Pitch Diameter			“H” MINIMUM TAPPING DEPTH					Tap Major Dia. Max.
	Max.	Min.	Min.	4 H Max.	5H Max.	1 Dia.	1-1/2 Dia.	2 Dia.	2-1/2 Dia.	3 Dia.	
METRIC COARSE											
M2X0.4	2.30	2.70	2.260	2.295	2.310	2.4	3.4	4.4	5.4	6.4	2.581
M2.2x0.45	2.90	2.40	2.492	2.532	2.547	2.7	3.8	4.9	6.0	7.1	2.845
M2.5x0.45	3.40	2.90	2.792	2.832	2.847	3.0	4.2	5.5	6.7	8.0	3.145
M3x0.5	4.00	3.40	3.325	3.367	3.384	3.5	5.0	6.5	8.0	9.5	3.716
M3.5x0.6	4.70	4.10	3.890	3.940	3.959	4.1	5.9	7.6	9.4	11.1	4.354
M4x0.7	5.30	4.70	4.455	4.509	4.529	4.7	6.7	8.7	10.7	12.7	5.007
M5x0.8	6.40	5.80	5.520	5.577	5.597	5.8	8.3	10.8	13.3	15.8	6.145
M6x1	7.70	7.10	6.650	6.719	6.742	7.0	10.0	13.0	16.0	19.0	7.422
M7x1	8.70	8.10	7.650	7.719	7.742	8.0	11.5	15.0	18.5	22.0	8.422
M8x1.25	10.10	9.50	8.812	8.886	8.911	9.3	13.3	17.3	21.3	25.3	9.787
M10x1.5	12.40	11.80	10.974	11.061	11.089	11.5	16.5	21.5	26.5	31.5	12.131
M12x1.75	14.80	14.20	13.137	13.236	13.271	13.8	19.8	25.8	31.8	37.8	14.478
M14x2	17.10	16.50	15.299	15.406	15.444	16.0	23.0	30.0	37.0	44.0	16.822
M16x2	19.10	18.50	17.299	17.406	17.444	18.0	26.0	34.0	42.0	50.0	18.822
M18x2.5	21.80	21.20	19.624	19.738	19.778	20.5	29.5	38.5	47.5	56.5	21.513
M20x2.5	23.80	23.20	21.624	21.738	21.778	22.5	32.5	42.5	52.5	62.5	23.513
M22x2.5	25.50	25.20	23.624	23.738	23.778	24.5	35.5	46.5	57.5	68.5	25.513
M24x3	28.50	27.90	25.948	26.093	26.135	27.0	39.0	51.0	63.0	75.0	28.238
M27x3	31.50	30.90	28.948	29.093	29.135	30.0	43.5	57.0	70.5	84.0	31.238
M30x3.5	35.20	34.60	32.273	32.428	32.472	33.5	48.5	63.5	78.5	93.5	34.925
M33x3.5	38.20	37.60	35.273	35.428	35.472	36.5	53.0	69.5	86.0	102.5	37.925
M36x4	41.90	41.30	38.598	38.763	38.809	40.0	58.0	76.0	94.0	112.0	41.615
M39x4	44.90	44.30	41.598	41.763	41.809	43.0	62.5	82.0	101.5	121.0	44.615
METRIC FINE											
M8x1	9.70	9.10	8.650	8.719	8.742	9.0	13.0	17.0	21.0	25.0	9.422
M10x1	11.70	11.10	10.650	10.719	10.742	11.0	16.0	21.0	26.0	31.0	11.422
M10x1.25	12.10	11.50	10.812	10.886	10.911	11.3	16.3	21.3	26.3	31.3	11.787
M12x1.25	14.10	13.50	12.812	12.898	12.926	13.3	19.3	25.3	31.3	37.3	13.787
M12x1.5	14.40	13.80	12.974	13.067	13.099	13.5	19.5	25.5	31.5	37.5	14.131
M14x1.5	16.40	15.80	14.974	15.067	15.099	15.5	22.5	29.5	36.5	43.5	16.131
M16x1.5	18.40	17.80	16.974	17.067	17.099	17.5	25.5	33.5	41.5	49.5	18.131
M18x1.5	20.40	19.80	18.974	19.067	19.099	19.5	28.5	37.5	46.5	55.5	20.131
M20x1.5	22.40	21.80	20.974	21.067	21.099	21.5	31.5	41.5	51.5	61.5	22.131
M22x1.5	24.40	23.80	22.974	23.067	23.099	23.5	34.5	45.5	56.5	67.5	24.131
M18x2	21.10	20.50	19.299	19.406	19.444	20.0	29.0	38.0	47.0	56.0	20.822
M20x2	23.10	22.50	21.299	21.406	21.444	22.0	32.0	42.0	52.0	62.0	22.822
M22x2	25.10	24.50	23.299	23.406	23.444	24.0	35.0	46.0	57.0	68.0	24.822
M24x2	27.10	26.50	25.299	25.414	25.454	26.0	38.0	50.0	62.0	74.0	26.822
M27x2	30.10	29.50	28.299	28.414	28.454	29.0	42.5	56.0	69.5	83.0	29.822
M30x2	33.10	32.50	31.299	31.414	31.454	32.0	47.0	62.0	77.0	92.0	32.822
M33x2	36.10	35.50	34.299	34.414	34.454	35.0	51.5	68.0	84.5	101.0	35.822
M36x2	39.10	38.50	37.299	37.414	37.454	38.0	56.0	74.0	92.0	110.0	38.822
M39x2	42.10	41.50	40.299	40.414	40.454	41.0	60.5	80.0	99.5	119.0	41.822
M36x3	40.50	39.90	37.948	38.093	38.135	39.0	57.0	75.0	93.0	111.0	40.238
M39x3	43.50	42.90	40.948	41.093	41.135	42.0	61.5	81.0	100.5	120.0	43.238

Heli-Coil® STI tap part numbers – inch

STRAIGHT FLUTE TAPS. Widely used for general hand and machine tapping operations. Available in sizes up to 1-1/2".

• **Plug Style – (4 Thread Chamfer).**

Used in thru holes and blind holes that allow for ample chip clearance. Easier to start and require less tapping torque than bottoming taps.

• **Bottoming Style – (2 Thread Chamfer).** Used in blind holes drilled to a minimum depth that requires threads be close to the bottom of the hole.

SPIRAL POINTED – PLUG & SPIRAL FLUTE. Used for efficient chip disposal in production tapping operations. Available in sizes up to 1/2".

• **Spiral Pointed - Plug (4 Thread Chamfer).** Incorporates an angular grind at the point end of the tap which shears chips and drives them forward of the tap. Used widely in long thru holes and blind holes with ample chip clearance. They are free cutting and provide increased tap strength. Not recommended for abrasive materials.

TABLE IX – HELI-COIL STI TAP PART NUMBERS

Nominal Thread Size	Straight Flute				Spiral Point		High Spiral Flute		Roughing Tap
	Plug		Bottoming		Plug		Bottoming		
	3B	2B	3B	2B	3B	2B	3B	2B	
UNIFIED COARSE THREAD (UNC)									
1 (.073)-64	01CPB	01CPA	01CBB	01CBA	01CSB	01CSA	5905-01	6905-01	
2 (.086)-56	02CPB	02CPA	02CBB	02CBA	02CSB	02CSA	5905-02	6905-02	
3 (.099)-48	03CPB	03CPA	03CBB	03CBA	03CSB	03CSA	5905-03	6905-03	
4 (.112)-40	04CPB	04CPA	04CBB	04CBA	04CSB	04CSA	5905-04	6905-04	
5 (.125)-40	05CPB	05CPA	05CBB	05CBA	05CSB	05CSA	5905-05	6905-05	
6 (.138)-32	06CPB	06CPA	06CBB	06CBA	06CSB	06CSA	5905-06	6905-06	
8 (.164)-32	2CPB	2CPA	2CBB	2CBA	2CSB	2CSA	5905-2	6905-2	
10 (.190)-24	3CPB	3CPA	3CBB	3CBA	3CSB	3CSA	5905-3	6905-3	
12 (.216)-24	1CPB	1CPA	1CBB	1CBA	1CSB	1CSA	5905-1	6905-1	
1/4 (.2500)-20	4CPB	4CPA	4CBB	4CBA	4CSB	4CSA	5905-4	6905-4	
5/16 (.3125)-18	5CPB	5CPA	5CBB	5CBA	5CSB	5CSA	5905-5	6905-5	
3/8 (.3750)-16	6CPB	6CPA	6CBB	6CBA	6CSB	6CSA	5905-6	6905-6	
7/16 (.4375)-14	7CPB	7CPA	7CBB	7CBA	7CSB	7CSA	5905-7	6905-7	7CRU
1/2 (.5000)-13	8CPB	8CPA	8CBB	8CBA	8CSB	8CSA	5905-8	6905-8	8CRU
9/16 (.5625)-12	187-9	38187-9	4187-9	43187-9					9CRU
5/8 (.6250)-11	8187-10	18187-10	10187-10	20187-10					10CRU
3/4 (.7500)-10	8187-12	18187-12	10187-12	20187-12					12CRU
7/8 (.8750)-9	8187-14	18187-14	10187-14	20187-14					14CRU
1 (1.0000)-8	8187-16	18187-16	10187-16	20187-16					16CRU
1-1/8 (1.1250)-7	8187-18	18187-18	10187-18	20187-18					
1-1/4 (1.2500)-7	8187-20	18187-20	10187-20	20187-20					
1-3/8 (1.3750)-6	8187-22	18187-22	10187-22	20187-22					
1-1/2 (1.5000)-6	8187-24	18187-24	10187-24	20187-24					
UNIFIED FINE THREAD (UNF)									
2 (.086)-64	02FPB	02FPA	02FBB	02FBA	02FSB	02FSA	5906-02	6906-02	
3 (.099)-56	03FPB	03FPA	03FBB	03FBA	03FSB	03FSA	5906-03	6906-03	
4 (.112)-48	04FPB	04FPA	04FBB	04FBA	04FSB	04FSA	5906-04	6906-04	
6 (.138)-40	06FPB	06FPA	06FBB	06FBA	06FSB	06FSA	5906-06	6906-06	
8 (.164)-36	2FPB	2FPA	2FBB	2FBA	2FSB	2FSA	5906-2	6906-2	
10 (.190)-32	3FPB	3FPA	3FBB	3FBA	3FSB	3FSA	5906-3	6906-3	
1/4 (.2500)-28	4FPB	4FPA	4FBB	4FBA	4FSB	4FSA	5906-4	6906-4	
5/16 (.3125)-24	5FPB	5FPA	5FBB	5FBA	5FSB	5FSA	5906-5	6906-5	
3/8 (.3750)-24	6FPB	6FPA	6FBB	6FBA	6FSB	6FSA	5906-6	6906-6	
7/16 (.4375)-20	7FPB	7FPA	7FBB	7FBA	7FSB	7FSA	5906-7	6906-7	
1/2 (.5000)-20	8FPB	8FPA	8FBB	8FBA	8FSB	8FSA	5906-8	6906-8	
9/16 (.5625)-18	38193-9	18193-9	43193-9	20193-9					
5/8 (.6250)-18	8193-10	18193-10	10193-10	20193-10					9FRU
3/4 (.7500)-16	8193-12	18193-12	10193-12	20193-12					10FRU
7/8 (.8750)-14	8193-14	18193-14	10193-14	20193-14					12FRU
1 (1.0000)-14	8193-16	18193-16	10193-16	20193-16					14FRU
1 (1.0000)-12	8193-161	18193-161	10193-161	20193-161					16FRU
1-1/8 (1.1250)-12	8193-18	18193-18	10193-18	20193-18					161FRU
1-1/4 (1.2500)-12	8193-20	18193-20	10193-20	20193-20					
1-3/8 (1.3750)-12	8193-22	18193-22	10193-22	20193-22					
1-1/2 (1.5000)-12	8193-24	18193-24	10193-24	20193-24					

Heli-Coil® STI tap dimensions – inch

- **High Spiral Flute – Bottoming (2 Thread Chamfer).** Have spiral flute for efficiently pulling stringy chips out of deep or blind holes in soft materials.

ROUGHING TAPS. Are available for difficult tapping operations where it is desirable to reduce the load on the finishing tap. Available in sizes 7/16 – 1".

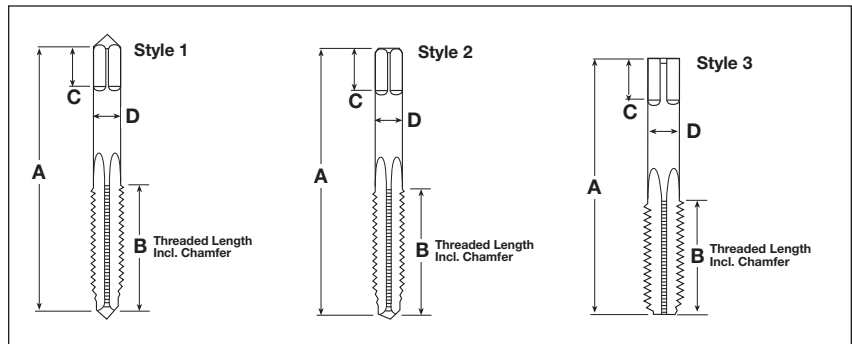


TABLE X – HELI-COIL STI TAP DIMENSIONS

Nominal Thread Size	Tap Dimensions					Number of Flutes			Tap Style*	H Limits	
	Length Overall A	Length Of Thread B	Length Of Square C	Max Dia Of Shank D	Max Size Of Square	Straight Flute	Spiral Point Plug	Spiral Flute Bott.		3B	2B
UNIFIED COARSE THREAD (UNC)											
1 (.073)-64	1-13/16	1/2	3/16	.141	.110	3	2	2	1	H1	H2
2 (.086)-56	1-7/8	9/16	3/16	.141	.110	3	2	2	1	H1	H2
3 (.099)-48	1-15/16	5/8	3/16	.141	.110	3	2	2	1	H1	H2
4 (.112)-40	2	11/16	3/16	.141	.110	3	2	2	1	H1	H2
5 (.125)-40	2-1/8	3/4	1/4	.168	.131	3	2	3	1	H1	H2
6 (.138)-32	2-3/8	7/8	1/4	.194	.152	3	2	3	1	H2	H3
8 (.164)-32	2-3/8	15/16	9/32	.220	.165	3	2	3	1	H2	H3
10 (.190)-24	2-1/2	1	5/16	.255	.191	3	2	3	2	H2	H3
12 (.216)-24	2-23/32	1-1/8	3/8	.318	.238	3	2	3	2	H2	H3
1/4 (.2500)-20	2-23/32	1-1/8	3/8	.318	.238	3	2	3	2	H2	H3
5/16 (.3125)-18	2-15/16	1-1/4	7/16	.381	.286	4	3	3	2	H3	H4
3/8 (.3750)-16	3-3/8	1-21/32	7/16	.367	.275	4	3	3	3	H3	H4
7/16 (.4375)-14	3-19/32	1-21/32	1/2	.429	.322	4	3	4	3	H3	H4
1/2 (.5000)-13	3-13/16	1-13/16	9/16	.480	.360	4	3	4	3	H3	H4
9/16 (.5625)-12	4-1/32	1-13/16	5/8	.542	.406	4	—	—	3	H3	H4
5/8 (.6250)-11	4-1/4	2	11/16	.590	.442	4	—	—	3	H3	H4
3/4 (.7500)-10	4-11/16	2-7/32	3/4	.697	.523	4	—	—	3	H3	H5
7/8 (.8750)-9	5-1/18	2-1/2	13/16	.800	.600	4	—	—	3	H3	H5
1 (1.000)-8	5-3/4	2-9/16	1	1.021	.766	4	—	—	3	H4	H6
1-1/8 (1.1250)-7	6-1/16	3	1-1/16	1.108	.831	4	—	—	3	H4	H6
1-1/4 (1.2500)-7	6-3/8	3	1-1/8	1.233	.925	4	—	—	3	H4	H6
1-3/8 (1.3750)-6	6-11/16	3-3/16	1-1/8	1.305	.979	6	—	—	3	H6	H8
1-1/2 (1.5000)-6	7	3-3/16	1-1/4	1.430	1.072	6	—	—	3	H6	H8
UNIFIED FINE THREAD (UNF)											
2 (.086)-64	1-7/8	9/16	3/16	.141	.110	3	2	2	1	H1	H2
3 (.099)-56	1-15/16	5/8	3/16	.141	.110	3	2	2	1	H1	H2
4 (.112)-48	2	11/16	3/16	.141	.110	3	2	2	1	H1	H2
6 (.138)-40	2-1/8	3/4	1/4	.168	.131	3	2	3	1	H1	H2
8 (.164)-36	2-3/8	15/16	9/32	.220	.165	3	2	3	1	H1	H2
10 (.190)-32	2-1/2	1	5/16	.255	.191	3	2	3	2	H2	H3
1/4 (.2500)-28	2-23/32	1-1/8	3/8	.318	.238	3	2	3	2	H2	H3
5/16 (.3125)-24	2-15/16	1-1/4	7/16	.381	.286	4	3	3	2	H2	H3
3/8 (.3750)-24	3-5/32	1-7/16	13/32	.323	.242	4	3	3	3	H2	H3
7/16 (.4375)-20	3-3/8	1-21/32	7/16	.367	.275	4	3	3	3	H3	H4
1/2 (.5000)-20	3-19/32	1-21/32	1/2	.429	.322	4	3	4	3	H3	H4
9/16 (.5625)-18	3-13/16	1-13/16	9/16	.480	.360	4	—	—	3	H3	H4
5/8 (.6250)-18	4-1/32	1-13/16	5/8	.542	.406	4	—	—	3	H3	H4
3/4 (.7500)-16	4-15/32	2	11/16	.652	.489	4	—	—	3	H3	H4
7/8 (.8750)-14	5-1/8	2-1/2	13/16	.800	.600	4	—	—	3	H3	H4
1 (1.0000)-14	5-7/16	2-9/16	7/8	.896	.672	4	—	—	3	H4	H6
1 (1.0000)-12	5-7/16	2-9/16	7/8	.896	.672	4	—	—	3	H4	H6
1-1/8 (1.1250)-12	5-3/4	2-9/16	1	1.021	.766	6	—	—	3	H4	H6
1-1/4 (1.2500)-12	6-1/16	3	1-1/16	1.108	.831	6	—	—	3	H4	H6
1-3/8 (1.3750)-12	6-3/8	3	1-1/8	1.233	.925	6	—	—	3	H4	H6
1-1/2 (1.5000)-12	6-11/16	3-3/16	1-1/8	1.305	.979	6	—	—	3	H4	H6

* NOTE: All bottoming taps have male center on thread end removed.

Heli-Coil® STI tap part numbers – metric

STRAIGHT FLUTE TAPS. Widely used for general hand and machine tapping operations. Available in sizes up to 39mm.

- **Plug Style – (4 Thread Chamfer).**

Used in thru holes and in blind holes that allow for ample chip clearance. Easier to start and require less tapping torque than bottoming taps.

- **Bottoming Style – (2 Thread Chamfer).** Used in blind holes drilled to a minimum depth that requires threads be close to the bottom of the hole.

- **SPIRAL POINTED – PLUG & SPIRAL FLUTE.**

Used for efficient chip disposal in production tapping operations. Available in sizes up to 12mm.

- **Spiral Pointed – Plug (4 Thread Chamfer).** Incorporates an angular grind at the point end of the tap which shears chips and drives them forward of the tap. Used widely in long thru holes and blind holes with ample chip clearance. They are free cutting and provide increased tap strength. Not recommended for abrasive materials.

TABLE XI – HELI-COIL STI TAP PART NUMBERS

Nominal Thread Size	Straight Flute				Spiral Point		High Spiral Flute		Roughing Tap
	Plug		Bottoming		Plug		Bottoming		
	4H5H	5H	4H5H	5H	4H5H	5H	4H5H	5H	
METRIC COARSE									
M2X0.4	4687-2	2087-2	4693-2	2093-2	4863-2	4763-2	5081-2	4681-2	
M2.2x0.45	4687-2.2	2087-2.2	4693-2.2	2093-2.2	4863-2.2	4763-2.2	5081-2.2	4681-2.2	
M2.5x0.45	4687-2.5	2087-2.5	4693-2.5	2093-2.5	4863-2.5	4763-2.5	5081-2.5	4681-2.5	
M3x0.5	4687-3	2087-3	4693-3	2093-3	4863-3	4763-3	5081-3	4681-3	
M3.5x0.6	4687-3.5	2087-3.5	4693-3.5	2093-3.5	4863-3.5	4763-3.5	5081-3.5	4681-3.5	
M4x0.7	4687-4	2087-4	4693-4	2093-4	4863-4	4763-4	5081-4	4681-4	
M5x0.8	4687-5	2087-5	4693-5	2093-5	4863-5	4763-5	5081-5	4681-5	
M6x1	4687-6	2087-6	4693-6	2093-6	4863-6	4763-6	5081-6	4681-6	
M7x1	4687-7	2087-7	4693-7	2093-7	4863-7	4763-7	5081-7	4681-7	
M8x1.25	4687-8	2087-8	4693-8	2093-8	4863-8	4763-8	5081-8	4681-8	
M10x1.5	4687-10	2087-10	4693-10	2093-10	4863-10	4763-10	5081-10	4681-10	
M12x1.75	4687-12	2087-12	4693-12	2093-12	4863-12	4763-12	5081-12	4681-12	
M14x2	4687-14	2087-14	4693-14	2093-14					3765-12
M16x2	4687-16	2087-16	4693-16	2093-16					3765-14
M18x2.5	4687-18	2087-18	4693-18	2093-18					3765-16
M20x2.5	4687-20	2087-20	4693-20	2093-20					3765-18
M22x2.5	4687-22	2087-22	4693-22	2093-22					3765-20
M24x3	4687-24	2087-24	4693-24	2093-24					3765-22
M27x3	4687-27	2087-27	4693-27	2093-27					3765-24
M30x3.5	4687-30	2087-30	4693-30	2093-30					
M33x3.5	4687-33	2087-33	4693-33	2093-33					
M36x4	4687-36	2087-36	4693-36	2093-36					
M39x4	4687-39	2087-39	4693-39	2093-39					
METRIC FINE									
M8x1	5484-8	4984-8	5486-8	4986-8	4864-8	4764-8	5066-8	4666-8	
M10x1	5484-10	4984-10	5486-10	4986-10	4864-10	4764-10	5066-10	4666-10	
M10x1.25	5444-10	4944-10	5445-10	4945-10	4865-10	4765-10	5067-10	4667-10	
M12x1.25	5444-12	4944-12	5445-12	4945-12	4865-12	4765-12	5067-12	4667-12	3767-12
M12x1.5	5476-12	4976-12	5477-12	4977-12	4866-12	4766-12	5068-12	4668-12	3768-12
M14x1.5	5476-14	4976-14	5477-14	4977-14					3768-14
M16x1.5	5476-16	4976-16	5477-16	4977-16					3768-16
M18x1.5	5476-18	4976-18	5477-18	4977-18					3768-18
M20x1.5	5476-20	4976-20	5477-20	4977-20					3768-20
M22x1.5	5476-22	4976-22	5477-22	4977-22					3768-22
M18x2	5490-18	4990-18	5492-18	4992-18					3769-18
M20x2	5490-20	4990-20	5492-20	4992-20					3769-20
M22x2	5490-22	4990-22	5492-22	4992-22					3769-22
M24x2	5490-24	4990-24	5492-24	4992-24					3769-24
M27x2	5490-27	4990-27	5492-27	4992-27					
M30x2	5490-30	4990-30	5492-30	4992-30					
M33x2	5490-33	4990-33	5492-33	4992-33					
M36x2	5490-36	4990-36	5492-36	4992-36					
M39x2	5490-39	4990-39	5492-39	4992-39					
M36x3	5496-36	4996-36	5497-36	4997-36					
M39x3	5496-39	4996-39	5497-39	4997-39					

- **High Spiral Flute – Bottoming (2 Thread Chamfer).** Have spiral flute for efficiently pulling stringy chips out of deep or blind holes in soft materials.

ROUGHING TAPS. Are available for difficult tapping operations where it is desirable to reduce the load on the finishing tap. Available in sizes 12mm thru 24mm.

CUSTOM STI TAPS (Inch and Metric Series)

Taps made to alternate limits, configurations, or to cut difficult materials, or for very high production are available upon request. The following data should be provided at the time of ordering:

- Thread size
- Finished hole class of fit. **Example: 4H5H, 3B, custom pre-plate requirements.**
- Material to be cut, and its hardness.

- Hole configuration. **Example: Thru or Blind including length of drilled and tapped hole.**
- Type tap. **Example: Plug or Bottoming Straight Flute, Spiral Point, Spiral Flute.**
- Special features. **Example: Length, Shank Diameter, Chamfer Length, Tap Material.**
- Special coating of tap.

TABLE XII– HELI-COIL STI TAP DIMENSIONS

* Tap dimensions in millimeters.

Nominal Thread Size	OVERALL LENGTH		THREAD LENGTH		SHANK DIAMETER		SIZE OF SQUARE		SQUARE LENGTH	
	mm	Tolerance ±	mm	Tolerance ±	Max.	Tolerance - only	mm	Tolerance - only	mm	Tolerance ±
METRIC COARSE										
M2x0.4	46.04	0.79	12.70	1.19	3.58	0.04	2.80	0.10	4.77	0.79
M2.2X0.45	47.62	0.79	14.29	1.19	3.58	0.04	2.79	0.10	4.76	0.79
M2.5x0.45	49.21	0.79	15.88	1.19	3.58	0.04	2.79	0.10	4.76	0.79
M3x0.5	50.80	0.79	17.46	1.19	3.58	0.04	2.79	0.10	4.76	0.79
M3.5x0.6	53.98	0.79	19.05	1.19	4.27	0.04	3.33	0.10	6.35	0.79
M4x0.7	60.32	0.79	22.22	1.19	4.93	0.04	3.86	0.10	6.35	0.79
M5x0.8	63.50	0.79	25.40	1.59	6.48	0.04	4.85	0.10	7.94	0.79
M6x1	69.06	0.79	28.58	1.59	8.08	0.04	6.04	0.10	9.52	0.79
M7x1	74.61	0.79	31.75	1.59	9.68	0.04	7.26	0.10	11.11	0.79
M8x1.25	74.61	0.79	31.75	1.59	9.68	0.04	7.26	0.10	11.11	0.79
M10x1.5	85.72	0.79	42.07	1.59	9.32	0.04	6.98	0.10	11.11	0.79
M12x1.75	91.28	0.79	42.07	2.38	10.90	0.04	8.18	0.15	12.70	0.79
M14x2	102.39	0.79	46.04	2.38	13.77	0.05	10.31	0.15	15.88	0.79
M16x2	107.95	0.79	50.80	2.38	14.99	0.05	11.23	0.15	17.46	0.79
M18x2.5	119.06	0.79	56.36	2.38	17.70	0.05	13.28	0.15	19.05	0.79
M20x2.5	124.62	0.79	56.36	2.38	19.30	0.05	14.48	0.15	19.05	0.79
M22X2.5	130.18	0.79	63.50	2.38	20.32	0.05	15.24	0.15	20.64	0.79
M24X3	138.11	1.59	65.09	2.38	22.76	0.05	17.07	0.20	22.22	1.59
M27X3	146.05	1.59	65.09	2.38	25.98	0.05	19.46	0.20	25.40	1.59
M30X3.5	153.99	1.59	76.20	2.38	28.14	0.05	21.11	0.20	26.99	1.59
M33X3.5	161.92	1.59	76.20	2.38	31.32	0.05	23.50	0.20	28.58	1.59
M36X4	177.80	1.59	80.96	3.18	36.32	0.08	27.23	0.20	31.75	1.59
M39X4	177.80	1.59	80.96	3.18	36.32	0.08	27.23	0.20	31.75	1.59
METRIC FINE										
M8X1	74.61	0.79	31.75	1.59	9.68	0.04	7.26	0.10	11.11	0.79
M10X1	80.71	0.79	36.51	1.59	8.20	0.04	6.15	0.10	10.32	0.79
M10X1.25	85.72	0.79	42.07	1.59	9.32	0.04	6.98	0.10	11.11	0.79
M12X1.25	91.28	0.79	42.07	2.38	10.90	0.04	8.18	0.15	12.70	0.79
M12X1.5	91.28	0.79	42.07	2.38	10.90	0.04	8.18	0.15	12.70	0.79
M14X1.5	96.84	0.79	46.04	2.38	12.19	0.04	9.14	0.15	14.29	0.79
M16X1.5	107.95	0.79	50.80	2.38	14.99	0.05	11.23	0.15	17.46	0.79
M18X1.5	113.51	0.79	50.80	2.38	16.56	0.05	12.42	0.15	17.46	0.79
M20X1.5	119.06	0.79	56.36	2.38	17.70	0.05	13.28	0.15	19.05	0.79
M22X1.5	130.18	0.79	63.50	2.38	20.32	0.05	15.24	0.15	20.64	0.79
M18X2	113.51	0.79	50.80	2.38	16.56	0.05	12.42	0.15	17.46	0.79
M20X2	124.62	0.79	56.36	2.38	19.30	0.05	14.48	0.15	19.05	0.79
M22X2	130.18	0.79	63.50	2.38	20.32	0.05	15.24	0.15	20.64	0.79
M24X2	130.18	1.59	63.50	2.38	22.76	0.05	17.07	0.20	22.22	1.59
M27X2	138.11	1.59	65.09	2.38	25.93	0.05	19.46	0.20	25.40	1.59
M30X2	146.05	1.59	65.09	2.38	28.14	0.05	21.11	0.20	26.99	1.59
M33X2	153.99	1.59	76.20	2.38	31.32	0.05	23.50	0.20	28.58	1.59
M36X2	169.86	1.59	80.96	3.18	33.15	0.08	24.87	0.20	28.58	1.59
M39X2	177.80	1.59	80.96	3.18	36.32	0.08	27.23	0.20	31.75	1.59
M36X3	169.86	1.59	80.96	3.18	33.15	0.08	24.87	0.20	28.58	1.59
M39X3	177.80	1.59	80.96	3.18	36.32	0.08	27.23	0.20	31.75	1.59

Heli-Coil® gages – inch

Accuracy of the finished thread when the insert is installed is dependent upon the accuracy of the tapped hole. If the finished tapped hole gages satisfactorily, the installed insert will be within the thread tolerance. **It is not necessary to gage the installed insert.** After the insert is installed, the **GO** thread plug gage may not enter freely; however, the insert will always seat itself when the bolt or screw is installed and tightened. (Reference NASM33537).

Gage handles and all gage nibs are marked with the extreme product limits for the particular size and class of fit. (See Pages 20 & 21, Tables VII & VIII, Pitch Diameter Limits).

When gaging tapped holes which have been thoroughly cleaned or which have a protective finish applied, the gage should always be lubricated with light oil.

HI nib may enter provided a definite drag results on or before 3rd turn from entry – Ref. FED-STD-H28, Screw thread Standards for Federal Services.

Heli-Coil STI Thread Plug Gages for checking the tapped hole are listed in the table at right.

Working gages provide a guaranteed minimum wear allowance on the pitch diameter of the **GO** members of two ten thousandths of an inch (.0002). These gages are recommended for production in sizes 1/2 inch and smaller.

Reference gages have pitch diameters on or close to minimum (basic size). They are essentially laboratory or master gages and should be used in case of conflict between two working gages. Conflict can occur when one of the gages has experienced more use and wear.

Nominal Thread Size	WORKING GAGES		REFERENCE GAGES	
	Suggested for Longer Wear Life		Suggested as Master Gages	
	3B	2B	3B	2B
UNIFIED COARSE THREAD (UNC)				
1 (.073)-64	3688-01	1442-01	1688-01	1440-01
2 (.086)-56	3688-02	1442-02	1688-02	1440-02
3 (.099)-48	3688-03	1442-03	1688-03	1440-03
4 (.112)-40	3688-04	1442-04	1688-04	1440-04
5 (.125)-40	3688-05	1442-05	1688-05	1440-05
6 (.138)-32	3688-06	1442-06	1688-06	1440-06
8 (.164)-32	3688-2	1442-2	1688-2	1440-2
10 (.190)-24	3688-3	1442-3	1688-3	1440-3
12 (.216)-24	3688-1	1442-1	1688-1	1440-1
1/4 (.2500)-20	3688-4	1442-4	1688-4	1440-4
5/16 (.3125)-18	3688-5	1442-5	1688-5	1440-5
3/8 (.3750)-16	3688-6	1442-6	1688-6	1440-6
7/16 (.4375)-14	3688-7	1442-7	1688-7	1440-7
1/2 (.5000)-13	3688-8	1442-8	1688-8	1440-8
9/16 (.5625)-12			1688-9	1440-9
5/8 (.6250)-11			1688-10	1440-10
3/4 (.7500)-10			1688-12	1440-12
7/8 (.8750)-9			1688-14	1440-14
1 (1.000)-8			1688-16	1440-16
1-1/8 (1.1250)-7			1688-18	1440-18
1-1/4 (1.2500)-7			1688-20	1440-20
1-3/8 (1.3750)-6			1688-22	1440-22
1-1/2 (1.5000)-6			1688-24	1440-24
UNIFIED FINE THREAD (UNF)				
2 (.086)-64	3694-02	1443-02	1694-02	1441-02
3 (.099)-56	3694-03	1443-03	1694-03	1441-03
4 (.112)-48	3694-04	1443-04	1694-04	1441-04
6 (.138)-40	3694-06	1443-06	1694-06	1441-06
8 (.164)-36	3694-2	1443-2	1694-2	1441-2
10 (.190)-32	3694-3	1443-3	1694-3	1441-3
1/4 (.2500)-28	3694-4	1443-4	1694-4	1441-4
5/16 (.3125)-24	3694-5	1443-5	1694-5	1441-5
3/8 (.3750)-24	3694-6	1443-6	1694-6	1441-6
7/16 (.4375)-20	3694-7	1443-7	1694-7	1441-7
1/2 (.5000)-20	3694-8	1443-8	1694-8	1441-8
9/16 (.5625)-18			1694-9	1441-9
5/8 (.6250)-18			1694-10	1441-10
3/4 (.7500)-16			1694-12	1441-12
7/8 (.8750)-14			1694-14	1441-14
1 (1.0000)-14			1694-16	1441-16
1 (1.0000)-12			1694-161	1441-161
1-1/8 (1.1250)-12			1694-18	1441-18
1-1/4 (1.2500)-12			1694-20	1441-20
1-3/8 (1.3750)-12			1694-22	1441-22
1-1/2 (1.5000)-12			1694-24	1441-24

HELI-COIL STI GAGE WITH GO & HI MEMBERS



Heli-Coil STI Thread Plug Gages (metric) for checking the tapped hole are listed below.

The complete gage consists of the **GO** thread plug gage, the **HI** thread plug gage and the appropriately marked gage handle.

Accuracy of the finished thread, when the insert is installed, is dependent upon the accuracy of the tapped hole. If the finished tapped hole gages satisfactorily, the installed insert will be within the thread tolerance. It is, therefore, **not necessary to gage the installed insert.**

After the insert is installed, the **GO** thread plug gage may not enter freely; however, the insert will always seat itself when the bolt or screw is installed and tightened. *(Reference MA1567)*

When gaging tapped holes which have been thoroughly cleaned or which have a protective finish applied, the gage should always be lubricated with light oil.

The **HI** thread plug gage may enter provided that a definite drag results on or before the second turn of entry. *(Reference ANSI B1.16)*

Nominal Thread Size	Complete Gage	
	4H5H	5H
METRIC COARSE		
M2x0.4	4624-2	1324-2
M2.2X0.45	4624-2.2	1324-2.2
M2.5x0.45	4624-2.5	1324-2.5
M3x0.5	4624-3	1324-3
M3.5x0.6	4624-3.5	1324-3.5
M4x0.7	4624-4	1324-4
M5x0.8	4624-5	1324-5
M6x1	4624-6	1324-6
M7x1	4624-7	1324-7
M8x1.25	4624-8	1324-8
M10x1.5	4624-10	1324-10
M12x1.75	4624-12	1324-12
M14x2	4624-14	1324-14
M16x2	4624-16	1324-16
M18x2.5	4624-18	1324-18
M20x2.5	4624-20	1324-20
M22X2.5	4624-22	1324-22
M24X3	4624-24	1324-24
M27X3	4624-27	1324-27
M30X3.5	4624-30	1324-30
M33X3.5	4624-33	1324-33
M36X4	4624-36	1324-36
M39X4	4624-39	1324-39
METRIC FINE		
M8X1	5416-8	4916-8
M10X1	5416-10	4916-10
M10X1.25	5424-10	4924-10
M12X1.25	5424-12	4924-12
M12X1.5	5480-12	4980-12
M14X1.5	5480-14	4980-14
M16X1.5	5480-16	4980-16
M18X1.5	5480-18	4980-18
M20X1.5	5480-20	4980-20
M22X1.5	5480-22	4980-22
M18X2	5418-18	4918-18
M20X2	5418-20	4918-20
M22X2	5418-22	4918-22
M24X2	5418-24	4918-24
M27X2	5418-27	4918-27
M30X2	5418-30	4918-30
M33X2	5418-33	4918-33
M36X2	5421-36	4921-36
M39X3	5421-39	4921-39

Types of Tools

The various tools to install Heli-Coil inserts are presented on the following pages.

For production runs, prototype work, salvage, and repair, hand inserting tools are available. For high volume production, power inserting tools are also available. Both types of tools are dimensioned (pages 29 and 31) to aid determination of accessibility to the tapped hole.

Both hand and power inserting tools feature a threaded mandrel which engages the insert and provides a positive lead to guide the insert into the tapped hole easily and quickly.

Power inserting tools consist of an air motor, adapter and front end assembly. The front end assembly consists of a prewinder, mandrel and 3 spacers (1 for each length of insert to be installed). The versatility and adaptability of Heli-Coil power inserting tools is shown on page 32. The tool can be hand held, vertically or horizontally mounted, and adapted to both semi-automatic and fully automatic installation stations. Heli-Coil power inserting tools can be adapted to assembly stations, rotary tables and transfer lines.

Tool Service

All Heli-Coil tooling is backed by our extensive expertise and experience in virtually any application. Of course, all tools are fully warranted. In addition, our Application Engineering Department is always available to assist in installation techniques, special tooling (longer or shorter length tools, etc.) and tool service. For very high production, Heli-Coil will provide for the successful development of automated installation systems.

Hand Inserting Tools



TYPE I Threaded Mandrel



TYPE II Prewinder



TYPE III Threaded Mandrel




TYPE IV Non-Captive Prewinder


Pictured above are the various designs of Heli-Coil hand inserting tools. Generally, finer pitch inserts are proportionately larger in the free state than coarse pitch inserts and thus have to be “pre-wound” to a smaller diameter for installation. Large coarse pitch inserts (and #2-56, #3-48 and M2.2 inserts) need only a threaded mandrel tool for installation.

Heli-Coil® hand inserting tools


Nominal Thread Size	Hand Inserting Tools 3 Dia. Lengths thru 7/8 2 Dia. Lengths 1" & Up	Tool Type
UNIFIED COARSE (UNC)		
1 (.073)-64	7551-01	IV
2 (.086)-56	551-02	I
3 (.099)-48	551-03	I
4 (.112)-40*	7551-04	II
5 (.125)-40	7551-05	II
6 (.138)-32	7551-06	II
8 (.164)-32*	7551-2	II
10 (.190)-24*	7551-3 (M)	II
12 (.216)-24	7551-1 (M)	II
1/4 (.2500)-20	7551-4 (M)	II
5/16 (.3125)-18	7551-5 (M)	II
3/8 (.3750)-16	7551-6 (M)	II
7/16 (.4375)-14	7551-7 (M)	II
1/2 (.5000)-13	7551-8 (M)	II
9/16 (.5625)-12	3724-9	III
5/8 (.6250)-11	3724-10	III
3/4 (.7500)-10	3724-12	III
7/8 (.8750)-9	3724-14	III
1 (1.0000)-8	3724-16	III
1-1/8 (1.1250)-7	3724-18	III
1-1/4 (1.2500)-7	3724-20	III
1-3/8 (1.3750)-6	3724-22	III
1-1/2 (1.5000)-6	3724-24	III
UNIFIED FINE (UNF)		
2 (.086)-64	7552-02	IV
3 (.099)-56	7552-03	II
4 (.112)-48	7552-04	II
6 (.138)-40	7552-06	II
8 (.164)-36	7552-2	II
10 (.190)-32	7552-3 (M)	II
1/4 (.2500)-28	7552-4 (M)	II
5/16 (.3125)-24	7552-5 (M)	II
3/8 (.3750)-24	7552-6 (M)	II
7/16 (.4375)-20	7552-7 (M)	II
1/2 (.5000)-20	7552-8 (M)	II
9/16 (.5625)-18	535-9	IV
5/8 (.6250)-18	535-10	IV
3/4 (.7500)-16	535-12	IV
7/8 (.8750)-14	535-14	IV
1 (1.0000)-14	535-16	IV
1 (1.0000)-12	535-161	IV
1-1/8 (1.1250)-12	535-18	IV
1-1/4 (1.2500)-12	535-20	IV
1-3/8 (1.3750)-12	535-22	IV
1-1/2 (1.5000)-12	535-24	IV

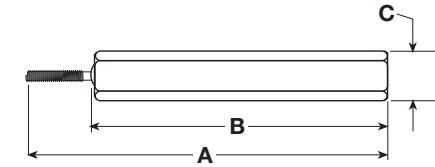


TYPE I Threaded Mandrel

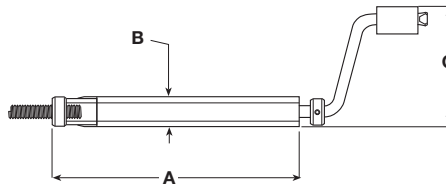

TYPE II Prewinder*

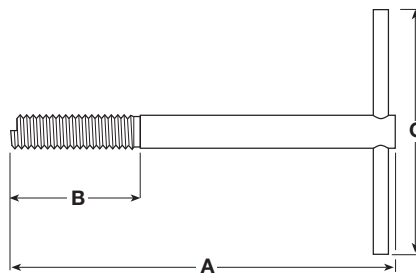

TYPE III Threaded Mandrel

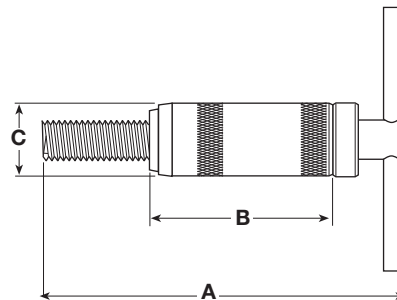

TYPE IV Non-Captive Prewinder

Nominal Thread Size	Hand Inserting Tools 3 Dia. Lengths thru M22 2 Dia. Lengths M24 & Up	Tool Type
METRIC COARSE		
M2X0.4	7751-2	IV
M2.2x0.45	7751-2.2	I
M2.5x0.45*	7751-2.5	II
M3x0.5*	7751-3	II
M3.5x0.6	7751-3.5	II
M4x0.7	7751-4	II
M5x0.8*	7751-5 (M)	II
M6x1	7751-6 (M)	II
M7x1	7751-7 (M)	II
M8x1.25	7751-8 (M)	II
M10x1.5	7751-10 (M)	II
M12x1.75	7751-12 (M)	II
M14x2	7751-14	IV
M16x2	7751-16	IV
M18x2.5	7751-18	III
M20x2.5	7751-20	IV
M22X2.5	7751-22	III
M24X3	7751-24	IV
M27X3	7751-27	III
M30X3.5	7751-30	III
M33X3.5	7751-33	III
M36X4	7751-36	III
M39X4	7751-39	III
METRIC FINE		
M8X1	7755-8	II
M10X1	7755-10	II
M10X1.25	7756-10	II
M12X1.25	7756-12	II
M12X1.5	7753-12	II
M14X1.5	7753-14	IV
M16X1.5	7753-16	IV
M18X1.5	7753-18	IV
M20X1.5	7753-20	IV
M22X1.5	7753-22	IV
M18X2	7754-18	IV
M20X2	7754-20	IV
M22X2	7754-22	IV
M24X2	7754-24	IV
M27X2	7754-27	IV
M30X2	7754-30	IV
M33X2	7754-33	IV
M36X2	7754-36	IV
M39X2	7754-39	IV
M36x3	7752-36	IV
M39x3	7752-39	IV

* Special tools required to install Phosphor Bronze and Inconel X-750 inserts in these sizes. To order add "-9" to the part number shown.
Note: Inserts marked with an "(M)" are available with a steel prewinder.
For this option, specify when ordering (e.g., 7551-3M).

Hand Inserting Tool Dimensions

INCH	METRIC	A	B	C	INCH	METRIC	A	B	C	INCH	METRIC	A	B	C
TYPE I - Coarse & Fine					TYPE II - Coarse & Fine (continued)					TYPE IV - Coarse & Fine*				
2-56	M2.2	2-7/16	2	5/16	7/16"	M10 & 11	5-1/4	25/32	3-23/32	9/16"	M14*	5-3/8	2-7/8	1-1/8
3-56	—	6	3	5/8	1/2"	M12	5-1/2	7/8	3-23/32	5/8"	M16*	5-3/8	2-7/8	1-1/8
TYPE II - Coarse & Fine					TYPE III - Coarse					3/4"	M18	6	2-7/8	1-1/2
4	M2.5	4-5/8	3/8	2-9/32	9/16"	—	4-7/8	1-13/16	4	7/8"	M20	6-3/8	2-7/8	1-1/2
5	M3	4-5/8	3/8	2-9/32	5/8"	—	4-7/8	2	4	1-14"	M22	5-7/8	2-7/8	1-5/8
6	M3.5	4-5/8	3/8	2-9/32	3/4"	M18	4-7/8	2-3/8	4	1-12"	M24	5-7/8	2-7/8	1-5/8
8	M4	4-5/8	3/8	2-9/32	7/8"	M20	4-7/8	2-3/4	4-1/2	1-1/8"	M30	6-5/16	3-1/16	2
10	M5	4-5/8	15/32	2-9/32	1"	M24	4-7/8	2-1/8	4-1/2	1-1/4"	M33	6-13/16	3-5/16	2
12	—	4-5/8	33/64	2-17/32	1-1/8"	M30	6-3/4	2-1/2	6	1-3/8"	M36	7-5/16	3-9/16	2-1/4
1/4"	M6	4-5/8	33/64	2-17/32	1-1/4"	M33	6-3/4	2-3/4	6	1-1/2"	M39	7-13/16	3-13/16	2-1/4
5/16"	—	4-5/8	5/8	3-23/32	1-3/8"	M36	6-3/4	3	6	1-64	M2	2-5/8	3/4	7/16
3/8"	M7 & 8	5	45/64	3-23/32	1-1/2"	M39	6-3/4	3-1/4	6	* M14 & M16 Coarse are Type IV Tools. For metric sizes not shown, see next largest size.				

Heli-Coil® inch power inserting tools

Heli-Coil power tools are available in UNC and UNF sizes #2 thru 1/2"* for rapid installation of Heli-Coil inserts. Power tools consist of a Front End Assembly, an Adapter

and a reversible Air Motor. All three components are ordered separately. A Front End Assembly consists of a prewinder, mandrel and spacers. Select the adapter that corresponds

with the insert size being used. Power tools for strip feed inserts are available in sizes #2 through 5/16".

		FRONT END ASSEMBLY		PREWINDERS			S P A C E R S		
		P/N for Bulk Inserts (2 dia. max.)	P/N for Strip Feed Inserts	P/N for Bulk Inserts	P/N for Strip Feed Inserts		MANDRELS	1 Dia.	1-1/2 Dia.
INCH COARSE THREAD (UNC)									
Small Adapter	2 (.086)-56	—	8551-02-15	—	8557-02-15	8553-02	8559-02	8560-02	8561-02
	4 (.112)-40	8551-04	8551-04-15	8557-04	8557-04-15	8553-04	8559-04	8560-04	8561
	5 (.125)-40	8551-05	—	8557-05	—	8553-05	8559-05	8560-05	8561
	6 (.138)-32	8551-06	8551-06-15	8557-06	8557-06-15	8553-06	8559-06	8560-06	8561
	8 (.164)-32	8551-2	8551-2-15	8557-2	8557-2-15	8553-2	8559-2	8560-2	8561
	10 (.190)-24	8551-3	8551-3-15	8557-3	8557-3-15	8553-3	8559-3	8560-3	8561
	1/4 (.2500)-20	8551-4	8551-4-15	8557-4	8557-4-15	8553-4	8559-4	8560-4	8561
Large Adapter	5/16 (.3125)-18	8251-5	8251-5-15	8257-5	8257-5-15	8253-5	8259-5-10	8259-5-15	NONE REQ'D
	3/8 (.3750)-16	8251-6	—	8257-6	—	8253-6	8259-6-10	8259-6-15	
	7/16 (.4375)-14	8251-7	—	8257-7	—	8253-7	8259-7-10	8259-7-15	
	1/2(.5000)-13	8251-8	—	8257-8	—	8253-8	8259-8-10	8259-8-15	
INCH FINE THREAD (UNF)									
Small Adapter	6 (.138)-40	8552-06	—	8558-06	—	8554-06	8559-06	8560-06	8561
	10 (.190)-32	8552-3	8552-3-15	8558-3	8558-3-15	8554-3	8559-3	8560-3	8561
	1/4 (.2500)-28	8552-4	8552-4-15	8558-4	8558-4-15	8554-4	8559-4	8560-4	8561
Large Adapter	5/16 (.3125)-24	8252-5	8252-5-15	8258-5	8258-5-15	8254-5	8259-5-10	8259-5-15	NONE REQ'D
	3/8 (.3750)-24	8252-6	—	8358-6	—	8254-6	8259-6-10	8259-6-15	
	7/16 (.4375)-20	8252-7	—	8258-7	—	8254-7	8259-7-10	8259-7-15	
	1/2 (.5000)-20	8252-8	—	8258-8	—	8254-8	8259-8-10	8259-8-15	

*Tools for larger sizes or special applications are available upon request.

Complete Power Tool Assembly



Power Tool Holder, **Part No. 23537**, can be used with or without Strip Feed inserts.

Note: Recommended for use with **2-56, M2.2x0.45 & M2.5x0.45** power tool.

Heli-Coil® metric power inserting tools

Heli-Coil metric power inserting tools are available in coarse and fine sizes up to 12mm* for rapid installation of standard and screw-lock inserts, reducing assembly costs substantially. Strip feed power tools are available in sizes up to 7mm.

They speed up assembly, eliminate waste and permit an accurate count.


Power tools consist of a **Front End Assembly**, an **Adapter** and a reversible **Air Motor**. All three components are ordered individually. A front end assembly consists of a

prewinder, mandrel and spacers. Select an Adapter that is compatible with the Air Motor to be used, and for the size range up thru 6mm or the size range 7mm thru 12mm.

		Nominal Thread Size	FRONT END ASSEMBLY		PREWINDERS		MANDRELS	S P A C E R S		
			P/N for Bulk Inserts (2 dia. max.)	P/N for Strip Feed Inserts	P/N for Bulk Inserts	P/N for Strip Feed Inserts		1 Dia.	1-1/2 Dia.	2 Dia.
METRIC COARSE										
Small Adapter	M2.2x0.45	—	8751-2.2-15	—	8769-2.2-15	8757-2.2	8775-2.2	8776-2.2	8777-2.2	
	M2.5x0.45	8751-2.5	8751-2.5-15	8769-2.5	8769-2.5-15	8757-2.5	8775-2.5	8776-2.5	8777	
	M3x0.5	8751-3	8751-3-15	8769-3	8769-3-15	8757-3	8775-3	8776-3	8777	
	M3.5x0.6	8751-3.5	8751-3.5-15	8769-3.5	8769-3.5-15	8757-3.5	8775-3.5	8776-3.5	8777	
	M4x0.7	8751-4	8751-4-15	8769-4	8769-4-15	8757-4	8775-4	8776-4	8777	
	M5x0.8	8751-5	8751-5-15	8769-5	8769-5-15	8757-5	8775-5	8776-5	8777	
Large Adapter	M6x1	8751-6	8751-6-15	8769-6	8769-6-15	8757-6	8775-6	8776-6	8777	
	M7x1	8751-7	8751-7-15	8769-7	8769-7-15	8757-7	8777-7-10	8777-7-15	NONE REQ'D	
	M8x1.25	8751-8	—	8769-8	—	8757-8	8777-8-10	8777-8-15		
	M10x1.5	8751-10	—	8769-10	—	8757-10	8777-10-10	8777-10-15		
	M12x1.75	8751-12	—	8769-12	—	8757-12	8777-12-10	8777-12-15		
METRIC FINE										
Large Adapter	M8x1	8755-8	—	8770-8	—	8764-8	8777-8-10	8777-8-15	NONE REQ'D	
	M10x1	8755-10	—	8770-10	—	8764-10	8777-10-10	8777-10-15		
	M10x1.25	8756-10	—	8758-10	—	8759-10	8777-10-10	8777-10-15		
	M12x1.25	8756-12	—	8758-12	—	8759-12	8777-12-10	8777-12-15		
	M12x1.5	8753-12	—	8773-12	—	8774-12	8777-12-10	8777-12-15		

*Tools for larger sizes or special applications are available upon request.

For evaluating space required for installing Heli-Coil inserts with standard manual, pneumatic and electronic inserting tools and tang break-off tools, the diagrams on pages 29 & 31 give dimensions of standard Heli-Coil tooling. For special variations or adaptations, contact the Applications Engineering Department at (203) 830-3274.

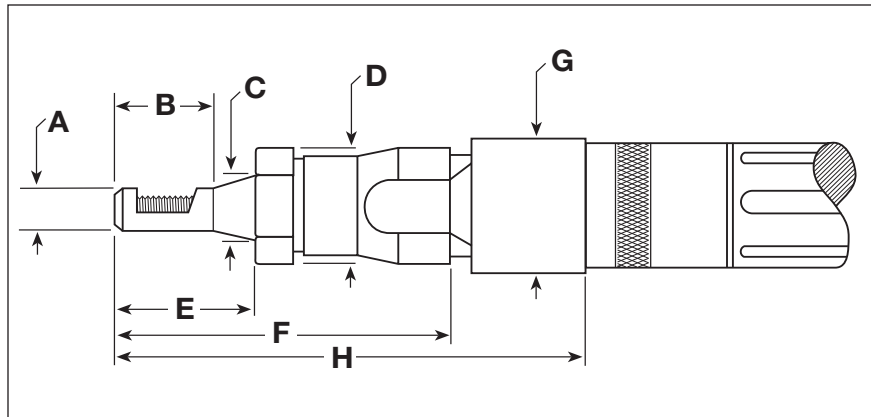

Power Inserting Tool Dimensions

SIZE		A	B	A	B	C	D	E	F	G	H
INCH	METRIC	FOR BULK INSERTS		FOR STRIP FEED INSERTS							
2	M2.2	—	—	5/16	7/16	23/32	1-1/8	1-3/8	3-3/16	1-1/4	4-7/16
4	M2.5	1/4	9/16	3/8	15/16	23/32	1-1/8	1-3/8	3-3/16	1-1/4	4-7/16
5	M3	9/32	9/16	3/8	15/16	23/32	1-1/8	1-3/8	3-3/16	1-1/4	4-7/16
6	M3.5	5/16	9/16	1/2	15/16	23/32	1-1/8	1-3/8	3-3/16	1-1/4	4-7/16
8	M4	11/32	9/16	1/2	15/16	23/32	1-1/8	1-3/8	3-3/16	1-1/4	4-7/16
10	M5	3/8	29/32	1/2	15/16	23/32	1-1/8	1-3/8	3-3/16	1-1/4	4-7/16
1/4"	M6	27/64	29/32	5/8	1-3/8	23/32	1-1/8	1-3/8	3-3/16	1-1/4	4-7/16
5/16"	M7 & M8	9/16	1-1/8	11/16	1-1/8	1"	1-9/16	1-3/8	4-7/16	1-1/4	5-3/4
3/8"	—	11/16	1-11/32	—	—	1"	1-9/16	1-7/8	4-3/4	1-1/4	6-1/32
7/16"	M10	3/4	1-17/32	—	—	1"	1-9/16	2-1/4	5-1/8	1-1/4	6-13/32
1/2"	M12	13/16	1-25/32	—	—	1"	1-9/16	1-1/2	5-13/32	1-1/4	6-11/16

Heli-Coil® power inserting tools

Electronic Power Inserting Tool

Heli-Coil offers an electronic power tool where electric power is preferred over air. The slender configuration of the mandrels allows them to reach into constricted areas. Electric power meets the requirements of clean room operations. Operators prefer electric power because it is quieter. The electronic tool is lighter to minimize operator fatigue. Mandrel assemblies are available to install the sizes of Heli-Coil bulk loaded inserts listed below.

Application Note: Variations in Mandrel Assembly dimensions and threads are available on special order to meet individual applications. For Mandrel Assemblies to meet your special conditions, please contact Heli-Coil Applications Engineering Department at (203) 830-3274.

Power Supply
P/N 8050-50



Electronic Tool Mandrel Assembly

Insert Thread Size (UNC)	Mandrel Assembly (for bulk inserts)
2(.086)-56	8051-02
4(.112)-40	8051-04
6(.138)-32	8051-06
8(.164)-32	8051-2
10(.190)-24	8051-3
10(.190)-32	10089-3



Pneumatic Power Tool Installation Kit

This Heli-Coil power tool installation kit (8522) contains an Air Motor (8510-1), adapter, tools, a filter-regulator-lubricator, oil, two quick disconnect fittings, and wrenches. All are packed in a portable molded box with easy-to-follow operating instructions. Front End Assemblies may be ordered separately to fit the sizes of Heli-Coil inserts to be installed.

Power Tools Kit Types	Kit Part#	Small Adapter	Large Adapter
Small Adapter Set	8522	✓	
Large Adapter Set	8521		✓
CombinationSet	8520	✓	✓

Cordless Electric Tool

The Heli-Coil Cordless Tool is a complete kit (7200) that includes a driver, 2 batteries (7200-20), 15 minute charger and mandrel chuck all in a durable metal box. The cordless tool is portable, lightweight, has adjustable torque and uses standard Heli-Coil electronic tool installation mandrels for quick setup.



Power Tool Holder

The Power Tool Holder 23537 is mounted on a bench and the appropriate air motor is attached to a spring loaded air tube at the end of a movable arm. A mounting arm is also provided for attaching reels of strip-feed inserts.

This power tool holder configuration ensures accurate vertical (square to work surface) installations of Heli-Coil inserts in relatively large parts. The tool holder is capable of installing inserts within a radius of 23.5 inches as well as on planes differing by 3.5 inches. Example: Box shape configurations.



NOTE: This tool holder is recommended for use with the **2-56, M2.2x0.45** and **M2.5x0.45** air tools. The tool holder also may be used with the Heli-Coil Electronic Inserting Tool.

Heli-Coil Tang Break-Off Tools

The driving tangs of Heli-Coil inserts must be removed to eliminate their interference with the end of the assembled bolt. Heli-Coil tang break-off tools are available for use with inserts through 1/2 inch and 12mm metric nominal diameter. Their operation is automatic, having a spring loaded, easily triggered punch that strikes a sharp, uniform blow against the tang of the installed insert. The tool can be operated with one hand.



Nominal Thread Size	Tool Part No.	Replacement Punch Part No.
UNIFIED COARSE THREAD (UNC)		
1 (.073)-64	3695-01	3697-01
2 (.086)-56	3695-02	3697-02
3 (.099)-48	3695-02	3697-02
4 (.112)-40	3695-04	3697-04
5 (.125)-40	3695-04	3697-04
6 (.138)-32	3695-06	3697-06
8 (.164)-32	3695-2	3697-2
10 (.190)-24	3695-3	3697-3
12 (.216)-24	3695-3	3697-3
1/4 (.2500)-20	3695-4	3697-4
5/16 (.3125)-18	3695-5	3643-5
3/8 (.3750)-16	3695-6	3643-6
7/16 (.4375)-14	3695-7	3643-7
1/2 (.5000)-13	3695-8	3643-8
UNIFIED FINE THREAD (UNF)		
2 (.086)-64	3695-02	3697-02
3 (.099)-56	3695-02	3697-02
4 (.112)-48	3695-04	3697-04
6 (.138)-40	3695-06	3697-06
8 (.164)-36	3695-2	3697-2
10 (.190)-32	3695-3	3697-3
1/4 (.2500)-28	3695-4	3697-4
5/16 (.3125)-24	3692-5	3645-5
3/8 (.3750)-24	3692-6	3645-6
7/16 (.4375)-20	3692-7	3645-7
1/2 (.5000)-20	3692-8	3645-8

Nominal Thread Size	Tool Part No.	Replacement Punch Part No.
METRIC COARSE		
M2x0.4	4238-2	3697-01
M2.2x0.45	4238-2.2	3697-02
M2.5x0.45	4238-2.2	3697-02
M3x0.5	4238-3	3697-04
M3.5x0.6	4238-3	3697-04
M4x0.7	4238-4	3697-2
M5x0.8	4238-5	3697-3
M6x1	4238-6	3697-4
M7x1	4238-7	4436-7
M8x1.25	4238-8	3643-5
M10x1.25	4238-10	4436-10
M12x1.75	4238-12	4436-12
METRIC FINE		
M8x1	4238-8	3643-5
M10x1	4238-10	4436-10
M10x1.25	4238-10	4436-10
M12x1.25	4238-12	4436-12
M12x1.5	4238-12	4436-12

Note: Tang break-off tools will break-off tangs thru 2 diameter lengths.

For 2 1/2 - 3 diameter lengths, add "-30" to the standard part number (eg, 3695-01-30).

For sizes larger than 1/2" or 12mm, use long nose pliers. Bend tang up and down to snap off at notch.


Heli-Coil Extracting Tools

Occasionally Heli-Coil inserts must be removed. Inserts may be removed manually with little effort. This is done by inserting the blade of the extracting tool into the Heli-Coil insert so that the V section of the blade is toward the top end of the insert. Strike the head of the tool with a light blow. Maintaining a steady pressure of blade against insert, turn the extracting tool counterclockwise until the insert is removed.



Nominal Thread Size		Extracting Tool Part No.
Inch	Metric	
1	M2	1227-01
2	M2.2	1227-02
3 thru 8	M2.5 thru M4	1227-06
10 thru 3/8"	M5 thru M10	1227-6
7/16" thru 1"	M11 thru M24	1227-16
1-1/8" thru 1-1/2"	M27 thru M39	1227-24

Top View Shown

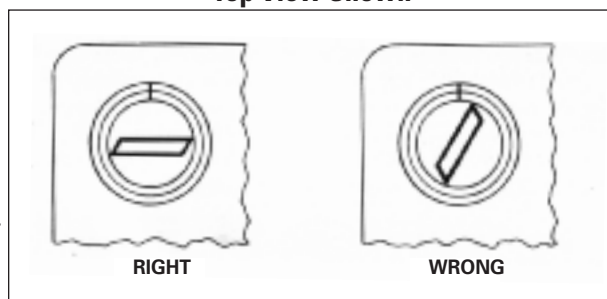

Right & wrong blade positions of insert extracting tool.

Installation and Removal Tools

Tangless® inserts may be installed by hand or electronic power tooling with the same mandrel assembly.

Front end assemblies are also available for pneumatic power tooling.

- Tooling utilizes a “blade” that applies torque to a notch in the end of the coil for installation.
- Installation depth can be adjusted easily for virtually any application.
- Driving blades are replaceable and increase the overall life of the tool.



Heli-Coil Tangless® Hand Installation Tooling

Nominal Thread	Hand Installation Tool		Replacement Installation Blade Kit**		Removal Tool (with handles)	Electronic Driver*
Size	Crank Style	Gauge Style	Crank Style	Gauge Style		
2-56	17551-02	7571-02	17551-02-5	7571-02-5	7570-02	8050-400C
4-40	17551-04	7571-04	17551-04-5	7571-04-5	7570-04	8050-400C
6-32	17551-06	7571-06	17551-06-5	7571-06-5	7570-06	8050-400C
8-32	17551-2	7571-2	17551-2-5	7571-2-5	7570-2	8050-400C
10-24	17551-3	7571-3	17551-3-5	7571-3-5	7570-3	8050-650C
1/4-20	17551-4	7571-4	17551-4-5	7571-4-5	7570-4	8050-650C
10-32	17552-3	7572-3	17552-3-5	7572-3-5	7570-3	8050-650C
1/4-28	17552-4	N/A	17552-4-5	7572-4-5	7570-4	8050-650C


* An electronic driver requires a power supply, part number 8050-50.

** Includes blade, spring and pin.


Heli-Coil Tangless® Power Tooling***

Nominal Thread	Front End Assembly	Replacement Mandrel Assembly	Replacement Blade
Size			
2-56	18551-02-15	18551-02-30	18551-02-2
4-40	18551-04-15	18551-04-30	18551-04-2
6-32	18551-06-15	18551-06-30	18551-06-2
8-32	18551-2-15	18551-2-30	18551-2-2
10-24	18551-3-15	18551-3-30	18551-3-2
1/4-20	18551-4-15	18551-4-30	18551-4-2
10-32	18552-3-15	18552-3-30	18552-3-2
1/4-28	18552-4-15	18552-4-30	18552-4-2

*** For use with Heli-Coil® Pneumatic Installation Tools & Adapters.

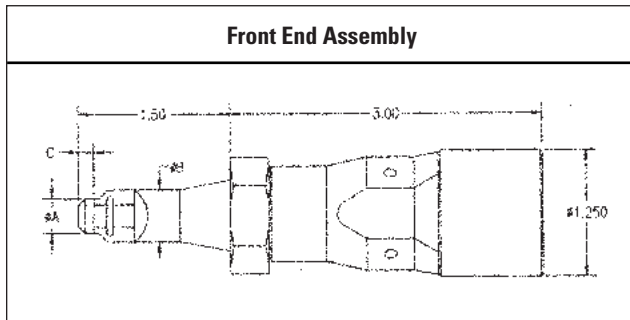

Front End Assembly Dimensions			
Nominal	A Nose Diameter	B Body Diameter	C Prewinder Tip Length
2-56	.32	.32	.09
4-40	.25	.40	.13
6-32	.32	.50	.14
8-32	.35	.51	.15
10-24	.38	.51	.19
10-32	.38	.51	.15
1/4-20	.42	.63	.22
1/4-28	.42	.63	.22

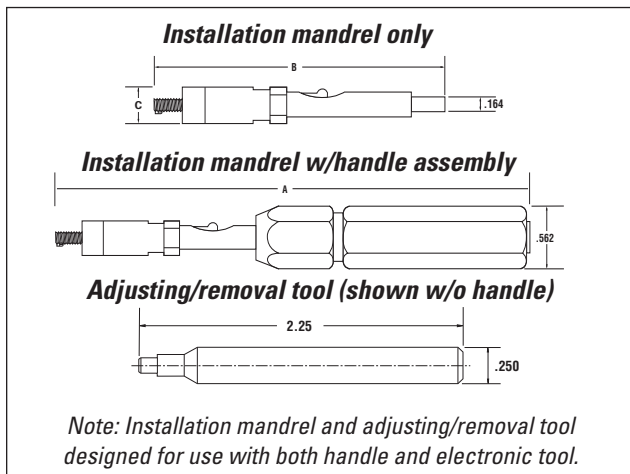

Installation Tool Dimensions

Nominal Thread Size	"A" Overall Length (reference)	"B" Mandrel Length	"C" Spinner Diameter
2-56	5.33	2.80	.240
4-40	5.43	2.90	.240
6-32	5.53	3.00	.360
8-32	5.68	3.15	.360
10-24	5.53	3.00	.370
10-32	5.53	3.00	.370
1/4-20	5.53	3.00	.370
1/4-28	5.53	3.00	.370

HeliCoil Your global resource for precision
formed stainless steel wire inserts.



**HELI- COIL SALES & TECHNICAL SUPPORT
ASIA – INDIA**

Noble Aerospace Private Limited
307 Raja House , 30-31 Nehru Place,
New Delhi – 110019 INDIA

Phone : +91-11- 41617246 , +91-11- 41617274
FAX : +91-11- 41617271
E-Mail : business@noblefix.com
Website : www.noblefix.com

**Emhart
Teknologies**

A  **BLACK & DECKER COMPANY**

Emhart Teknologies
Industrial Division
50 Shelton Technology Center
P.O. Box 859
Shelton , CT 06484 USA

Heli-Coil is a Registered Trade Mark Of Emhart Teknologies Inc., Worldwide