

Setting Standards

Cable Glands Cable Protection



2012



Setting Standards

www.hummel.com

HUMMEL AG





Online Catalog

- Product Pictures and Product Information
- Product and Assembly Videos
- Assembly and Operations Manual
- Technical drawings
- 3D data
- Certificates



Download-Center

- Catalog and Flyer
- Assembly instructions and installation instructions
- Press releases
- Certificates and approvals
- ...



Searching Products

- Part Number search
- Searching Details



Enclosure-Configurator

- Individual Enclosures
- Enclosure Solutions
- Online configuration, requesting and ordering



Technology Center

- Technical Information (Protection, thread, material, ...)
- Diagrams and evaluation
- Product description
- Assembly Video and Operations Manual



News of the HUMMEL AG

- Trade fairs and exhibitions
- Press releases
- New Products
- Job vacancies
- Studies, training and vocational practical training



HUMMEL divisions



Touch



Electronic



Electro technology



Heating Valves and Accessories



Metal and plastic engineering

Table of Contents

Industrial cable glands

HSK-standard cable glands

► 13



Metr. PG NPT Metr. PG NPT Metr. PG NPT

HSK-EMC cable glands

► 29



Metr. PG NPT Metr. PG NPT Metr. PG NPT

HSK cable glands for special applications

► 37



Metr. PG NPT Metr. PG NPT Metr. PG NPT

METRICA cable glands

► 55



Metr. Metr. Metr. Metr. Metr. Metr. Metr.

Miscellaneous cable glands

► 61



WADI DIN 46320 WADI DIN 46320 WADI

Accessories

► 71



Limited Liability

Products, design, colors and dimensions are subject to change without prior notice. We reserve the right to make technical improvements on all our products, currently ordered or for future orders. It is the user's responsibility to verify all dimensions and technical data. HUMMEL AG will assume no liability regarding information provided to the user by published literature or inside technical staff, its distributors and outside sales personnel. Errors in the catalog can occur and shall not create any liability whatsoever for HUMMEL. All information provided by HUMMEL is without guarantee and must be verified by the user.

Special Products

► 6

New Products

► 7

Index

► 8

Technical Information

► 174

Assembly Instructions

► 177

Created & Printed by

Graphic & Layout: intermedia marketing gmbh, Mozartstraße 2, 79183 Waldkirch, Germany, Tel. +49 (0) 7681 / 477899-0, Fax +49 (0) 7681 / 477899-27, kontakt@intermedia-marketing.de
Printer: Druckerei Furtwängler GmbH, 79211 Denzlingen, Germany, Telefon +49 (0) 7666 / 1331. Printed on recycled paper in March 2012. English 2012

Cable glands for hazardous areas

EXIOS Standard, Barrier

► 102

EXIOS
+ STANDARD
EXIOS
+ BARRIER



ATEX IECEx ATEX IECEx ATEX IECEx ATEX

EXIOS A2F

► 106

EXIOS
+ A2F



ATEX ATEX ATEX ATEX ATEX ATEX ATEX

Industrial cable glands for hazardous areas

HSK-Ex-e Standard cable glands

► 109



ATEX IECEx ATEX IECEx ATEX IECEx ATEX

HSK-EMC-Ex-e cable glands

► 121



IECEx ATEX IECEx ATEX IECEx ATEX

HSK-Ex-e cable glands for special applications

► 129



ATEX IECEx ATEX IECEx ATEX IECEx ATEX

HSK-Ex-d standard cable glands

► 137



ATEX IECEx ATEX IECEx ATEX IECEx ATEX

Ex accessories

► 141



ATEX IECEx ATEX IECEx ATEX IECEx ATEX

Table of Contents

Corrugated conduit systems


Snapflex Industry standard metric

► 153




Snapflex-Ex metric

► 165

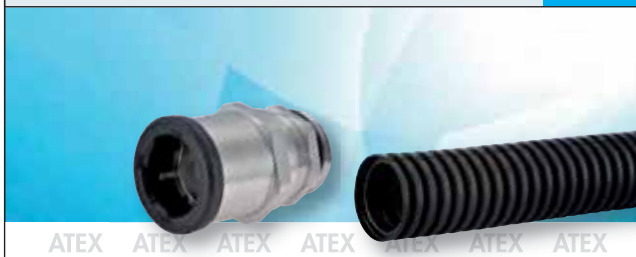

DN conduits

► 169

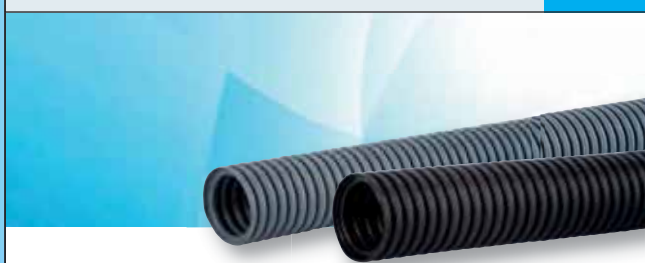

Special Products

HUMMEL is your partner for special projects in strain relief, conduit systems, circular connectors, thermoplastic, aluminium, metal and stainless steel enclosures.

Challenge us – we find a solution.

Please contact our sales department or engineering department (see back side of catalog).



New Products

- + **EXIOS Barrier** high end cable gland for armoured cables in hazardous areas
M16 x 1,5 to M75 x 1,5
NPT 3/8" to NPT 3"

► Product on page 104

EXIOS
+ BARRIER



- + **EXIOS A2F** Ex-e and Ex-d cable gland for non-armoured cables for hazardous areas
in the sizes M16 x 1,5 to M75 x 1,5

► Product on page 106

EXIOS
+ A2F



- + **Snapturn-elbow** for Snapflex conduits with 90° and 135° elbow with brass or plastic thread sizes M16 x 1,5 to M50 x 1,5

► Product on page 158



Product Number	Description	Page	Product Number	Description	Page	Product Number	Description	Page
1.022.	Earthtag	108	1.282.	WN	75	1.624.	HSK-MFlex-EMV	34, 35
1.033.	E-Ms.....	94	1.291.	HSK-K-Ex	110–114	1.628.	HSK-MZ-Ex-d	139
1.039.	RE-Ms.....	93	1.293.	HSK-K-Flex	40, 41	1.631.	HSK-M-EMV-D.....	30, 31
1.052.	V-N-Ms.....	89	1.294.	HSK-K-Flex	40	1.632.	HSK-INOX-Ex-d	140
1.052.	V-N-Ms-SD.....	89	1.295.	HSK-K-Ex	110, 111	1.633.	HSK-INOX-PVDF-Ex-d	140
1.071.	R-H.....	91	1.296.	HSK-V-Ex	144	1.634.	HSK-M-PVDF-Ex-d	138
1.076.	R-H.....	91	1.296.	HSK-V-Ex MZ version.....	144	1.636.	HSK-M-EMV-D-Ex	122, 123
1.077.	RSD-Ms.....	92	1.297.	V-Ex	142, 143	1.637.	HSK-M-EMV-D-Ex	122, 123
1.078.	RSD-Ms-Ex.....	146	1.299.	HSK-K-PVDF	20, 21	1.640.	HSK-M-Ex	115–118
1.079.	RSD-Ms-Ex.....	146				1.641.	HSK-MZ-Ex.....	135, 136
1.089.	HSK-ME.....	84	1.306.	FW-T	83	1.642.	HSK-INOX-Ex	119, 120
1.091.	HSK-FLAKA	85	1.306.	FW-ZN	96	1.646.	HSK-M-EMV-Ex	124, 125
1.094.	RS-INOX	99, 100	1.309.	HSK-M-W	54	1.647.	HSK-MZ-EMV-Ex	126–128
1.097.	RSD-INOX.....	99, 100	1.312.	KF-G	82, 173	1.660.	HSK-M-PVDF-Ex	115–118
1.098.	RSD-INOX-Ex.....	150	1.313.	HSK-W	42, 43	1.661.	HSK-MZ-PVDF-Ex	135, 136
1.099.	RSD-INOX-Ex.....	150	1.314.	HSK-W-Flex.....	44	1.662.	HSK-INOX-PVDF-Ex	119, 120
			1.315.	90° Snap Elbow	80	1.666.	HSK-M-EMV-PVDF-Ex	125
1.101.	DIN 46320-C4-Ms.....	67	1.316.	90° Snap Elbow	80	1.667.	HSK-MZ-EMV-PVDF-Ex	127, 128
1.105.	Z	68, 69	1.317.	HSK-W rotating version	43	1.669.	HSK-MZ-PVDF.....	52, 53
1.106.	HSK-MINI	49	1.318.	Snapform	164	1.675.	HSK-INOX	27, 28
1.106.	HSK-XL	50, 51	1.321.	O-Ring	86	1.676.	HSK-INOX-PVDF	27, 28
1.106.	WADI-A	62, 63	1.325.	Thread Seal Ring	87	1.680.	SE	70
1.106.	WADI-A-FPM	64, 65	1.326.	Thread Seal Ring	107	1.681.	ZSE	70
1.112.	HSK-MINI	49	1.329.	Serrated Washer	108	1.683.	METRICA-M-EMV	60
1.119.	HSK-MINI-EMV	49				1.687.	HSK-M-Multi-Ex	133
1.129.	HSK-MINI-INOX.....	49	1.510.	SM-WS-PA	170	1.688.	HSK-M-FLAKA.....	46
1.143.	KLE	95	1.510.	Snapflex	154	1.689.	HSK-M-FLAKA-Ex.....	134
1.152.	VINOX-NBR.....	98	1.510.	SM-WS-PA	168	1.690.	HSK-MZ	52, 53
1.153.	VINOX-FPM	98	1.511.	SM-N	171	1.691.	HSK-M-EMV	32, 33
1.154.	VINOX-VMQ	98	1.513.	SM-W	172	1.692.	HSK-MZ-EMV	36
1.155.	VNE-Ms	90	1.514.	SM-N	156	1.695.	HSK-INOX	27, 28
1.156.	VNE-Ms-SD.....	90	1.515.	Snapturn	157	1.696.	HSK-INOX-PVDF	27, 28
1.157.	VNE-Ms-SD-FPM	90	1.518.	Snapsplit	155	1.697.	HSK-M-Multi	45
1.161.	GM-Ms.....	88	1.519.	Snapsplit	155	1.699.	HSK-M-PVDF	22–26
1.161.	GM-INOX	97	1.525.	Snapturn 90°	158			
1.167.	GM-EMV	88	1.526.	Snapturn 135°	159	1.730.	Snapclip	164
1.171.	RE-Ms.....	93	1.542.	Snapclip-DUO-PA	160	1.731.	Snapclip-Ex.....	166
1.192.	VINOX-Ex.....	149	1.543.	Snapclip-DUO-PA	160			
1.193.	VINOX-Ex.....	149	1.547.	Snapclip-DUO-Ms.....	161	1.802.	PVC Shroud	107
1.194.	VINOX-Ex.....	149	1.548.	Snapclip-DUO-Ms.....	161	1.875.	V-Ms-Ex-d	147
1.197.	V-Ms-Ex.....	145	1.552.	Snapclip-PA-W	162	1.876.	V-Ms-Ex-d	147
1.198.	V-Ms-FPM-Ex.....	145	1.553.	Snapclip-DUO-PA-W	163	1.877.	V-Ms-Ex-d	147
1.199.	V-Ms-VMQ-Ex.....	145	1.554.	Snapclip-DUO-PA-W	163	1.878.	RSD-Ms-Ex-d	148
			1.560.	Snapflex-Ex	166	1.879.	RSD-Ms-Ex-d	148
1.201.	DIN 46320-A-FS.....	66	1.566.	Snapclip-DUO-Ms-Ex.....	167	1.895.	VINOX-Ex-d	151
1.202.	DIN 46320-A-FS.....	66	1.567.	Snapclip-DUO-Ms-Ex.....	168	1.896.	VINOX-Ex-d	151
1.209.	HSK-K	14, 15, 16, 17, 19	1.587.	HSK-K-FLAKA	39	1.897.	VINOX-Ex-d	151
1.213.	KS.....	81	1.589.	HSK-K-FLAKA-Ex	131	1.898.	RSD-INOX-Ex-d	152
1.215.	HSK-K-MZ-Ex.....	132	1.590.	HSK-KE	18	1.899.	RSD-INOX-Ex-d	152
1.218.	METRICA-P.....	56, 57	1.591.	HSK-KR.....	18			
1.219.	HSK-K.....	14, 15	1.597.	HSK-K-Multi.....	38			
1.233.	K-FS	79	1.599.	HSK-K-Multi-Ex.....	130			
1.235.	R-FS	77						
1.236.	R-FS	77	1.605.	EXIOS Standard	102, 103			
1.238.	METRICA-P-Flex	56, 57	1.606.	EXIOS Barrier.....	104, 105			
1.239.	E-M-PA.....	79	1.607.	METRICA-M-EMV-E.....	59			
1.250.	DS	75	1.608.	EXIOS A2F.....	106			
1.251.	V-N-FS	73	1.609.	HSK-M	22–26			
1.255.	VNE	74	1.610.	HSK-M-Ex	115–118			
1.256.	VNE-SD.....	74	1.611.	HSK-MZ-Ex.....	135, 136			
1.262.	GM-FS.....	72	1.612.	HSK-INOX-Ex	119, 120			
1.263.	GM-KS	81	1.616.	HSK-M-EMV-Ex	124, 125			
1.271.	R-FS	77	1.617.	HSK-MZ-EMV-Ex	126–128			
1.272.	R-FS	77	1.618.	METRICA-M	58			
1.273.	R-M-PA.....	78	1.622.	HSK-M-Ex-d	138			
1.280.	HSK-V	76	1.623.	HSK-M-Flex	47, 48			

Product Number	Description	Page	Product Number	Description	Page	Product Number	Description	Page
1.315.	90° Snap Elbow	80	1.660.	HSK-M-PVDF-Ex	115 – 118	1.514.	SM-N	156
1.316.	90° Snap Elbow	80	1.634.	HSK-M-PVDF-Ex-d	138	1.513.	SM-W	172
1.201.	DIN 46320-A-FS	66	1.309.	HSK-M-W	54	1.510.	SM-WS-PA	170
1.202.	DIN 46320-A-FS	66	1.089.	HSK-ME	84	1.547.	Snapcllic-DUO-MS	161
1.101.	DIN 46320-C4-MS	67	1.106.	HSK-MINI	49	1.548.	Snapcllic-DUO-MS	161
1.250.	DS	75	1.112.	HSK-MINI	49	1.566.	Snapcllic-DUO-MS-Ex	167
			1.119.	HSK-MINI-EMV	49	1.567.	Snapcllic-DUO-MS-Ex	168
1.022.	Earthtag	108	1.129.	HSK-MINI-INOX	49	1.542.	Snapcllic-DUO-PA	160
1.239.	E-M-PA	79	1.690.	HSK-MZ	52, 53	1.543.	Snapcllic-DUO-PA	160
1.033.	E-MS	94	1.692.	HSK-MZ-EMV	36	1.553.	Snapcllic-DUO-PA-W	163
1.608.	EXIOS A2F	106	1.617.	HSK-MZ-EMV-Ex	126 – 127	1.554.	Snapcllic-DUO-PA-W	163
1.606.	EXIOS Barrier	104, 105	1.647.	HSK-MZ-EMV-Ex	126 – 128	1.731.	Snapclip-Ex	166
1.605.	EXIOS Standard	102, 103	1.667.	HSK-MZ-EMV-PVDF-Ex	127, 128	1.552.	Snapcllic-PA-W	162
			1.611.	HSK-MZ-Ex	135, 136	1.730.	Snapclip	164
1.306.	FW-T	83	1.641.	HSK-MZ-Ex	135, 136	1.510.	Snapflex	154
1.306.	FW-ZN	96	1.628.	HSK-MZ-Ex-d	139	1.560.	Snapflex-Ex	166
			1.669.	HSK-MZ-PVDF	52, 53	1.318.	Snapform	164
1.167.	GM-EMV	88	1.661.	HSK-MZ-PVDF-Ex	135, 136	1.518.	Snapsplit	155
1.262.	GM-FS	72	1.280.	HSK-V	76	1.519.	Snapsplit	155
1.161.	GM-INOX	97	1.296.	HSK-V-Ex	144	1.515.	Snapturn	157
1.263.	GM-KS	81	1.296.	HSK-V-Ex MZ version	144	1.525.	Snapturn 90°	158
1.161.	GM-MS	88	1.313.	HSK-W	42, 43	1.526.	Snapturn 135°	159
			1.314.	HSK-W-Flex	44			
1.091.	HSK-FLAKA	85	1.317.	HSK-W rotating version	43	1.325.	Thread Seal Ring	87
1.695.	HSK-INOX	27, 28	1.106.	HSK-XL	50, 51			
1.675.	HSK-INOX	27, 28				1.297.	V-Ex	142, 143
1.612.	HSK-INOX-Ex	119, 120	1.233.	K-FS	79	1.192.	V-INOX-Ex	149
1.642.	HSK-INOX-Ex	119, 120	1.312.	K-F-G	82, 173	1.193.	V-INOX-Ex	149
1.632.	HSK-INOX-Ex-d	140	1.143.	KLE	95	1.194.	V-INOX-Ex	149
1.696.	HSK-INOX-PVDF	27, 28	1.213.	KS	81	1.895.	V-INOX-Ex-d	151
1.676.	HSK-INOX-PVDF	27, 28				1.896.	V-INOX-Ex-d	151
1.662.	HSK-INOX-PVDF-Ex	119, 120	1.218.	METRICA-P	56, 57	1.897.	V-INOX-Ex-d	151
1.633.	HSK-INOX-PVDF-Ex-d	140	1.238.	METRICA-P-Flex	56, 57	1.153.	V-INOX-FPM	98
1.209.	HSK-K	14, 15, 16, 17, 19	1.618.	METRICA-M	58	1.152.	V-INOX-NBR	98
1.219.	HSK-K	14, 15	1.683.	METRICA-M-EMV	60	1.154.	V-INOX-VMQ	98
1.291.	HSK-K-Ex	110 – 114	1.607.	METRICA-M-EMVE	59	1.197.	V-MS-Ex	145
1.295.	HSK-K-Ex	110, 111				1.875.	V-MS-Ex-d	147
1.587.	HSK-K-FLAKA	39	1.321.	O-Ring	86	1.876.	V-MS-Ex-d	147
1.589.	HSK-K-FLAKA-Ex	131				1.877.	V-MS-Ex-d	147
1.293.	HSK-K-Flex	40, 41	1.802.	PVC Shroud	107	1.198.	V-MS-FPM-Ex	145
1.294.	HSK-K-Flex	40				1.199.	V-MS-VMQ-Ex	145
1.597.	HSK-K-Multi	38	1.326.	Red Fibre Washer	107	1.251.	V-N-FS	73
1.599.	HSK-K-Multi-Ex	130	1.235.	R-FS	77	1.052.	V-N-MS	89
1.215.	HSK-K-MZ-Ex	132	1.236.	R-FS	77	1.052.	V-N-MS-SD	89
1.299.	HSK-K-PVDF	20, 21	1.271.	R-FS	77	1.255.	V-NE	74
1.590.	HSK-KE	18	1.272.	R-FS	77	1.155.	V-NE-MS	90
1.591.	HSK-KR	18	1.071.	R-H	91	1.156.	V-NE-MS-SD	90
1.609.	HSK-M	22 – 26	1.076.	R-H	91	1.157.	V-NE-MS-SD-FPM	90
1.691.	HSK-M-EMV	32, 33	1.273.	R-M-PA	78	1.256.	V-NE-SD	74
1.631.	HSK-M-EMVD	30, 31	1.039.	RE-MS	93			
1.636.	HSK-M-EMVD-Ex	122, 123	1.171.	RE-MS	93	1.106.	WADIA	62, 63
1.637.	HSK-M-EMVD-Ex	122, 123	1.094.	RS-INOX	99, 100	1.106.	WADIA-FPM	64, 65
1.616.	HSK-M-EMV-Ex	124, 125	1.097.	RSD-INOX	99, 100	1.282.	WN	75
1.646.	HSK-M-EMV-Ex	124, 125	1.098.	RSD-INOX-Ex	150			
1.666.	HSK-M-EMV-PVDF-Ex	125	1.099.	RSD-INOX-Ex	150	1.105.	Z	68, 69
1.610.	HSK-M-Ex	115 – 118	1.898.	RSD-INOX-Ex-d	152	1.681.	ZSE	70
1.640.	HSK-M-Ex	115 – 118	1.899.	RSD-INOX-Ex-d	152			
1.622.	HSK-M-Ex-d	138	1.077.	RSD-MS	92			
1.688.	HSK-M-FLAKA	46	1.078.	RSD-MS-Ex	146			
1.689.	HSK-M-FLAKA-Ex	134	1.079.	RSD-MS-Ex	146			
1.623.	HSK-M-Flex	47, 48	1.878.	RSD-MS-Ex-d	148			
1.624.	HSK-M-Flex-EMV	34, 35	1.879.	RSD-MS-Ex-d	148			
1.697.	HSK-M-Multi	45						
1.687.	HSK-M-Multi-Ex	133	1.680.	SE	70			
1.699.	HSK-M-PVDF	22 – 26	1.329.	Serrated Washer	108			
			1.511.	SM-N	171			

HSK-Industry Standard



also in



IP 69 K

- + Halogen- and phosphorous-free
- + Fire protection class V0 according to UL 94
- + ULf1 UV-stable HSK Black Nylon
- + Liquid tight per NEMA 4x & 6 to 150 PSIG (IP 68 to 10 bar) according to DIN EN 60529
- + Patented ratchet and spline secures the dome nut on the body


HSK-K

Flexible overlapping clamping splines prevent the form seal from being pulled out of the fitting

The form seal allows for an IP 68 (10 bar) rating

The rugged lead screw results in a dependable transmission of force between nut and body

The concentric seal ridge and molded groove for an optional O-Ring results in a liquid tight seal between body and housing

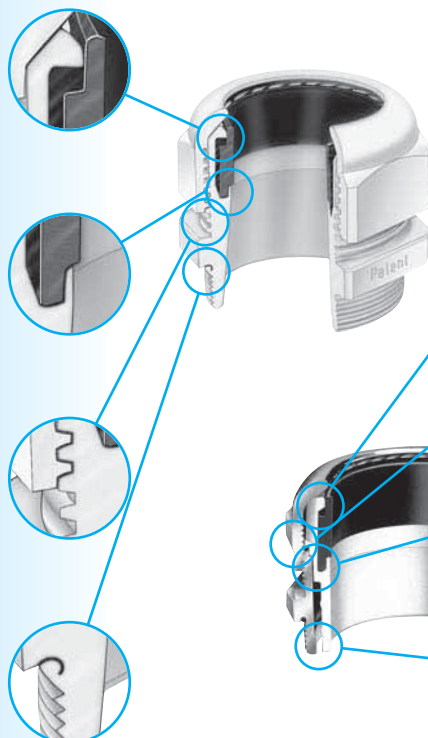

HSK-M

Flexible overlapping clamping splines prevent the form seal from being pulled out of the fitting

The internal sealing edge results in a superior seal between the splined Nylon clamping insert and the nickel plated brass body

The form seal allows for an IP 68 (10 bar) rating

Rotation of the cable during installation is prevented due to the internal splines



HSK-EMC-Industry Standard



also in



IP 69 K


- + Halogen- and phosphorous-free
- + Fire protection class V0 according to UL 94
- + Liquid tight per NEMA 4x & 6 to 150 PSIG (IP 68 to 10 bar) according to DIN EN 60529
- + Quick assembly and reliable grounding of shielded cables

HSK-M-EMV

Flexible overlapping clamping splines prevent the form seal from being pulled out of the fitting

The internal sealing edge results in a superior seal between the splined Nylon clamping insert and the nickel plated brass body

Patented 360° grounding due to the internal O-Ring, which results in a perfect contact between braided shield of cable and fitting

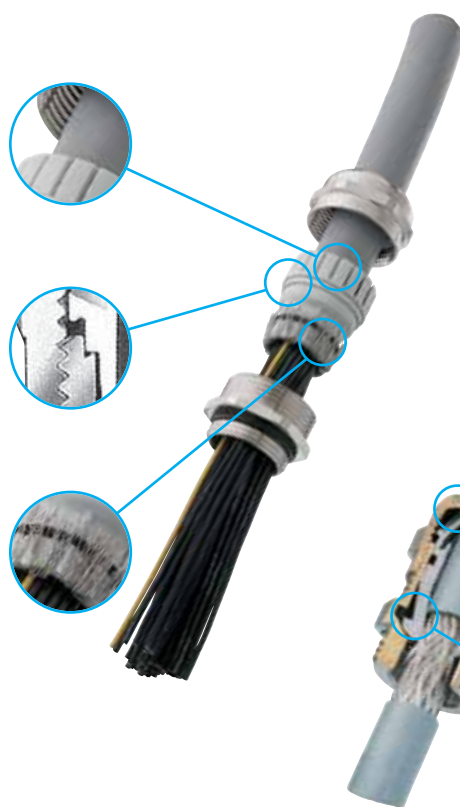

HSK-M-EMV-D

Flexible overlapping clamping splines prevent the form seal from being pulled out of the fitting

Metalised spline insert provides electrical conductivity

Flexible contact points allow contact with variable braid diameters

Snapclic-DUO



- + Conduit fitting and cable gland in one article
- + Halogen- and phosphorous-free
- + Quick assembly
- + IP 68 degree of protection on cable gland according to DIN EN 60529
- + EMC version available



screw in



tighten
nut



push
into hole



finished



Snapclic-DUO

Corrugated conduit
mounting with
integrated cable gland

Industrial cable glands

HSK-standard cable glands

Cable glands of the HSK-series fulfil the highest demands of quality and security.
Outstanding high-grade materials are used together with innovative technology to offer premium products.



You can find in this chapter:

HSK standard cable glands, made of

- polyamide
- PVDF
- nickel plated brass
- various grades of stainless steel

We provide variable clamping ranges, thread lengths, thread types plus different sealing materials and temperature ranges. Our range is completed by global certifications.

If there are still open requests from your side, please contact us. We are looking forward to developing solutions together. You profit from our vast knowledge in development, engineering and production technology.

Contact us:

E-Mail: info.et@hummel.com

Tel.: +49(0) 76 66/9 11 10-0

Advice:

- ➔ HSK EMC cable glands can be found in the next chapter from page 29
- ➔ Cable glands with smaller threads than M12 and larger threads than M63, multi hole fittings and much more can be found in the chapter "HSK cable glands for special applications" from page 37

HSK-standard cable glands

HSK-K

Metr.



Material Polyamide V0 according to UL 94

Seal Buna-N


Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
within the specified clamping range, only with optional O-Ring

Operating Temperature -40 °C – 100 °C (-40 °F – 212 °F)

Colors grey (RAL 7035), black (RAL 9005),
blue (RAL 5012) for the intrinsic safety "i"

Advice:

- With additional pre-assembled O-Ring upon request
- Please find suitable O-Ring on page 86
- Other sealing material e.g. Silicone upon request
- Other colors on request



AG	$\varnothing$ mm	GL mm	H mm	$\varnothing$ mm	Number grey	Number black	Number blue
M 12 x 1,5	3–6,5	8	21	15	1.209.1200.50	1.209.1201.50	1.209.1202.50
M 12 x 1,5	2–5	8	21	15	1.209.1200.51	1.209.1201.51	1.209.1202.51
M 16 x 1,5	4–8	8	22	19	1.209.1600.50	1.209.1601.50	1.209.1602.50
M 16 x 1,5	2–6	8	22	19	1.209.1600.51	1.209.1601.51	1.209.1602.51
M 16 x 1,5	5–10	8	25	22	1.219.1600.50	1.219.1601.50	1.219.1602.50
M 20 x 1,5	6–12	9	27	24	1.209.2000.50	1.209.2001.50	1.209.2002.50
M 20 x 1,5	5–9	9	27	24	1.209.2000.51	1.209.2001.51	1.209.2002.51
M 20 x 1,5	10–14	9	28	27	1.219.2000.50	1.219.2001.50	1.219.2002.50
M 25 x 1,5	13–18	11	31	30	1.219.2500.50	1.219.2501.50	1.219.2502.50
M 25 x 1,5	13–18	11	31	33	1.209.2500.50	1.209.2501.50	1.209.2502.50
M 25 x 1,5	9–16	11	31	33	1.209.2500.51	1.209.2501.51	1.209.2502.51
M 32 x 1,5	15–21	11	39	36	1.219.3200.50	1.219.3201.50	1.219.3202.50
M 32 x 1,5	18–25	11	39	42	1.209.3200.50	1.209.3201.50	1.209.3202.50
M 32 x 1,5	13–20	11	39	42	1.209.3200.51	1.209.3201.51	1.209.3202.51
M 40 x 1,5	19–27	13	47	46	1.219.4000.50	1.219.4001.50	1.219.4002.50
M 40 x 1,5	22–32	13	48	53	1.209.4000.50	1.209.4001.50	1.209.4002.50
M 40 x 1,5	20–26	13	48	53	1.209.4000.51	1.209.4001.51	1.209.4002.51
M 50 x 1,5	32–38	13	49	60	1.209.5000.50	1.209.5001.50	1.209.5002.50
M 50 x 1,5	25–31	13	49	60	1.209.5000.51	1.209.5001.51	1.209.5002.51
M 63 x 1,5	37–44	14	49	65/68	1.209.6300.50	1.209.6301.50	1.209.6302.50
M 63 x 1,5	29–35	14	49	65/68	1.209.6300.51	1.209.6301.51	1.209.6302.51

Accessories see page 71

HSK-standard cable glands

HSK-K

Metr.-elongated



Material Polyamide V0 according to UL 94

Seal Buna-N


Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
within the specified clamping range, only with optional O-Ring

Operating Temperature -40 °C – 100 °C (-40 °F – 212 °F)

Colors grey (RAL 7035), black (RAL 9005),
blue (RAL 5012) for the intrinsic safety "i"

Advice:

- With additional pre-assembled O-Ring upon request
- Please find suitable O-Ring on page 86
- Other sealing material e.g. Silicone upon request
- Other colors on request



AG	$\varnothing$ mm	GL mm	H mm	$\varnothing$ mm	Number grey	Number black	Number blue
M 12 x 1,5	3–6,5	15	21	15	1.209.1200.30	1.209.1201.30	1.209.1202.30
M 12 x 1,5	2–5	15	21	15	1.209.1200.31	1.209.1201.31	1.209.1202.31
M 16 x 1,5	4–8	15	22	19	1.209.1600.30	1.209.1601.30	1.209.1602.30
M 16 x 1,5	2–6	15	22	19	1.209.1600.31	1.209.1601.31	1.209.1602.31
M 16 x 1,5	5–10	15	25	22	1.219.1600.30	1.219.1601.30	1.219.1602.30
M 20 x 1,5	6–12	15	27	24	1.209.2000.30	1.209.2001.30	1.209.2002.30
M 20 x 1,5	5–9	15	27	24	1.209.2000.31	1.209.2001.31	1.209.2002.31
M 20 x 1,5	10–14	15	28	27	1.219.2000.30	1.219.2001.30	1.219.2002.30
M 25 x 1,5	13–18	15	31	33	1.209.2500.30	1.209.2501.30	1.209.2502.30
M 25 x 1,5	9–16	15	31	33	1.209.2500.31	1.209.2501.31	1.209.2502.31
M 32 x 1,5	18–25	15	39	42	1.209.3200.30	1.209.3201.30	1.209.3202.30
M 32 x 1,5	13–20	15	39	42	1.209.3200.31	1.209.3201.31	1.209.3202.31
M 40 x 1,5	22–32	18	48	53	1.209.4000.30	1.209.4001.30	1.209.4002.30
M 40 x 1,5	20–26	18	48	53	1.209.4000.31	1.209.4001.31	1.209.4002.31
M 50 x 1,5	32–38	18	49	60	1.209.5000.30	1.209.5001.30	1.209.5002.30
M 50 x 1,5	25–31	18	49	60	1.209.5000.31	1.209.5001.31	1.209.5002.31
M 63 x 1,5	37–44	18	49	65/68	1.209.6300.30	1.209.6301.30	1.209.6302.30
M 63 x 1,5	29–35	18	49	65/68	1.209.6300.31	1.209.6301.31	1.209.6302.31

➔ Accessories see page 71

HSK-standard cable glands

HSK-K

PG



Material Polyamide V0 according to UL 94



Seal Buna-N



Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
within the specified clamping range, only with optional O-Ring


Operating Temperature -40 °C – 100 °C (-40 °F – 212 °F)

Colors grey (RAL 7035), black (RAL 9005),
blue (RAL 5012) for the intrinsic safety "i"



Advice:

- With additional pre-assembled O-Ring upon request
- Please find suitable O-Ring on page 86
- Other sealing material e.g. Silicone upon request
- Other colors on request



AG	$\varnothing$ mm	GL mm	H mm	$\varnothing$ mm	Number grey	Number black	Number blue
PG 7	3–6,5	8	21	15	1.209.0700.14	1.209.0701.14	1.209.0702.14
PG 7	2–5	8	21	15	1.209.0700.15	1.209.0701.15	1.209.0702.15
PG 9	4–8	8	22	19	1.209.0900.14	1.209.0901.14	1.209.0902.14
PG 9	2–6	8	22	19	1.209.0900.15	1.209.0901.15	1.209.0902.15
PG 11	5–10	8	25	22	1.209.1100.14	1.209.1101.14	1.209.1102.14
PG 11	3–7	8	25	22	1.209.1100.15	1.209.1101.15	1.209.1102.15
PG 13,5	6–12	9	27	24	1.209.1300.14	1.209.1301.14	1.209.1302.14
PG 13,5	5–9	9	27	24	1.209.1300.15	1.209.1301.15	1.209.1302.15
PG 16	10–14	10	28	27	1.209.1600.14	1.209.1601.14	1.209.1602.14
PG 16	7–12	10	28	27	1.209.1600.15	1.209.1601.15	1.209.1602.15
PG 21	13–18	11	31	33	1.209.2100.14	1.209.2101.14	1.209.2102.14
PG 21	9–16	11	31	33	1.209.2100.15	1.209.2101.15	1.209.2102.15
PG 29	18–25	11	39	42	1.209.2900.14	1.209.2901.14	1.209.2902.14
PG 29	13–20	11	39	42	1.209.2900.15	1.209.2901.15	1.209.2902.15
PG 36	22–32	13	48	53	1.209.3600.14	1.209.3601.14	1.209.3602.14
PG 36	20–26	13	48	53	1.209.3600.15	1.209.3601.15	1.209.3602.15
PG 42	32–38	13	49	60	1.209.4200.14	1.209.4201.14	1.209.4202.14
PG 42	25–31	13	49	60	1.209.4200.15	1.209.4201.15	1.209.4202.15
PG 48	37–44	14	49	65	1.209.4800.14	1.209.4801.14	1.209.4802.14
PG 48	29–35	14	49	65	1.209.4800.15	1.209.4801.15	1.209.4802.15

Advice: see page 18 for further polyamide cable glands with special clamping ranges in PG threads



Accessories see page 71

HSK-standard cable glands

HSK-K

PG-elongated

RoHS



Material Polyamide V0 according to UL 94

Seal Buna-N


Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
within the specified clamping range, only with optional O-Ring

Operating Temperature -40 °C – 100 °C (-40 °F – 212 °F)

Colors grey (RAL 7035), black (RAL 9005),
blue (RAL 5012) for the intrinsic safety "i"

Advice:

- With additional pre-assembled O-Ring upon request
- Please find suitable O-Ring on page 86
- Other sealing material e.g. Silicone upon request
- Other colors on request



AG	Øk mm	GL mm	H mm	Ø mm	Number grey	Number black	Number blue
PG 7	3 – 6,5	15	21	15	1.209.0700.60	1.209.0701.60	1.209.0702.60
PG 7	2 – 5	15	21	15	1.209.0700.61	1.209.0701.61	1.209.0702.61
PG 9	4 – 8	15	22	19	1.209.0900.60	1.209.0901.60	1.209.0902.60
PG 9	2 – 6	15	22	19	1.209.0900.61	1.209.0901.61	1.209.0902.61
PG 11	5 – 10	15	25	22	1.209.1100.60	1.209.1101.60	1.209.1102.60
PG 11	3 – 7	15	25	22	1.209.1100.61	1.209.1101.61	1.209.1102.61
PG 13,5	6 – 12	15	27	24	1.209.1300.60	1.209.1301.60	1.209.1302.60
PG 13,5	5 – 9	15	27	24	1.209.1300.61	1.209.1301.61	1.209.1302.61
PG 16	10 – 14	15	28	27	1.209.1600.60	1.209.1601.60	1.209.1602.60
PG 16	7 – 12	15	28	27	1.209.1600.61	1.209.1601.61	1.209.1602.61
PG 21	13 – 18	15	31	33	1.209.2100.60	1.209.2101.60	1.209.2102.60
PG 21	9 – 16	15	31	33	1.209.2100.61	1.209.2101.61	1.209.2102.61
PG 29	18 – 25	15	39	42	1.209.2900.60	1.209.2901.60	1.209.2902.60
PG 29	13 – 20	15	39	42	1.209.2900.61	1.209.2901.61	1.209.2902.61
PG 36	22 – 32	18	48	53	1.209.3600.60	1.209.3601.60	1.209.3602.60
PG 36	20 – 26	18	48	53	1.209.3600.61	1.209.3601.61	1.209.3602.61
PG 42	32 – 38	18	49	60	1.209.4200.60	1.209.4201.60	1.209.4202.60
PG 42	25 – 31	18	49	60	1.209.4200.61	1.209.4201.61	1.209.4202.61
PG 48	37 – 44	18	49	65	1.209.4800.60	1.209.4801.60	1.209.4802.60
PG 48	29 – 35	18	49	65	1.209.4800.61	1.209.4801.61	1.209.4802.61

➔ Accessories see page 71

HSK-standard cable glands

HSK-KE

PG



Advice:

- With additional pre-assembled O-Ring upon request
- Please find suitable O-Ring on page 86
- Other sealing material and colors upon request


Material Polyamide V0 according to UL 94

Seal Buna-N

Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
within the specified clamping range, only with optional O-Ring

Operating Temperature -40 °C – 100 °C (-40 °F – 212 °F)

Colors grey (RAL 7035), black (RAL 9005)



AG	$\varnothing$ mm	d mm	GL mm	H mm	 mm	Number grey	Number black
PG 7	4 – 8	7	8	22	19	1.590.0700.14	1.590.0701.14
PG 7	2 – 6	7	8	22	19	1.590.0700.15	1.590.0701.15
PG 9	5 – 10	9	8	25	22	1.590.0900.14	1.590.0901.14
PG 9	3 – 7	9	8	25	22	1.590.0900.15	1.590.0901.15
PG 11	6 – 12	10,5	8	24	24	1.590.1100.14	1.590.1101.14
PG 11	5 – 9	10,5	8	24	24	1.590.1100.15	1.590.1101.15
PG 13,5	10 – 14	12,5	9	28	27	1.590.1300.14	1.590.1301.14
PG 13,5	7 – 12	12,5	9	28	27	1.590.1300.15	1.590.1301.15
PG 16	13 – 18	15	10	31	33	1.590.1600.14	1.590.1601.14
PG 16	9 – 16	15	10	31	33	1.590.1600.15	1.590.1601.15

➔ Accessories see page 71

HSK-KR

PG



Advice:

- With additional pre-assembled O-Ring upon request
- Please find suitable O-Ring on page 86
- Other sealing material and colors upon request


Material Polyamide V0 according to UL 94

Seal Buna-N

Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
within the specified clamping range, only with optional O-Ring

Operating Temperature -40 °C – 100 °C (-40 °F – 212 °F)

Colors grey (RAL 7035), black (RAL 9005)



AG	$\varnothing$ mm	GL mm	H mm	 mm	Number grey	Number black
PG 9	3 – 6,5	8	21	19	1.591.0900.14	1.591.0901.14
PG 9	2 – 5	8	21	19	1.591.0900.15	1.591.0901.15
PG 11	4 – 8	8	22	22	1.591.1100.14	1.591.1101.14
PG 11	2 – 6	8	22	22	1.591.1100.15	1.591.1101.15
PG 13,5	5 – 10	9	25	24	1.591.1300.14	1.591.1301.14
PG 13,5	3 – 7	9	25	24	1.591.1300.15	1.591.1301.15
PG 16	6 – 12	10	27	27	1.591.1600.14	1.591.1601.14
PG 16	5 – 9	10	27	27	1.591.1600.15	1.591.1601.15
PG 21	10 – 14	11	28	33	1.591.2100.14	1.591.2101.14
PG 21	7 – 12	11	28	33	1.591.2100.15	1.591.2101.15

➔ Accessories see page 71

HSK-standard cable glands

HSK-K

NPT

RoHS



Material Polyamide V0 according to UL 94

Seal Buna-N


Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
within the specified clamping range, only with optional O-Ring

Operating Temperature -40 °C – 100 °C (-40 °F – 212 °F)

Colors grey (RAL 7035), black (RAL 9005),
blue (RAL 5012) for the intrinsic safety "i"

Advice:

- With additional pre-assembled O-Ring upon request
- Please find suitable O-Ring on page 86
- Other sealing material e.g. Silicone upon request
- Other colors on request



AG	$\varnothing$ mm	GL mm	H mm	$\varnothing$ mm	Number grey	Number black	Number blue
3/8" NPT	4 – 8	15	22	19/22	1.209.3800.70	1.209.3801.70	1.209.3802.70
3/8" NPT	2 – 6	15	22	19/22	1.209.3800.71	1.209.3801.71	1.209.3802.71
1/2" NPT	6 – 12	13	27	24	1.209.1200.70	1.209.1201.70	1.209.1202.70
1/2" NPT	5 – 9	13	27	24	1.209.1200.71	1.209.1201.71	1.209.1202.71
1/2" NPT/16	10 – 14	13	28	27	1.209.1216.70	1.209.1217.70	1.209.1218.70
1/2" NPT/16	7 – 12	13	28	27	1.209.1216.71	1.209.1217.71	1.209.1218.71
3/4" NPT	13 – 18	14	31	33	1.209.3400.70	1.209.3401.70	1.209.3402.70
3/4" NPT	9 – 16	14	31	33	1.209.3400.71	1.209.3401.71	1.209.3402.71
1" NPT	18 – 25	19	39	42	1.209.1000.70	1.209.1001.70	1.209.1002.70
1" NPT	13 – 20	19	39	42	1.209.1000.71	1.209.1001.71	1.209.1002.71
1 1/4" NPT	18 – 25	16	39	42/46	1.209.5400.70	1.209.5401.70	1.209.5402.70
1 1/4" NPT	13 – 20	16	39	42/46	1.209.5400.71	1.209.5401.71	1.209.5402.71
1 1/2" NPT	22 – 32	20	48	53	1.209.6400.70	1.209.6401.70	1.209.6402.70
1 1/2" NPT	20 – 26	20	48	53	1.209.6400.71	1.209.6401.71	1.209.6402.71

➔ Accessories see page 71

HSK-standard cable glands

HSK-K-PVDF

Metr.



Advice:

- With additional pre-assembled O-Ring upon request
- Please find suitable O-Ring on page 86
- Other sealing material and colors upon request


Material PVDF V0 according to UL 94

Seal FPM

Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
within the specified clamping range, only with optional O-Ring

Operating Temperature -35 °C – 150 °C (-31 °F – 302 °F)

Colors nature



AG	$\varnothing$ mm	GL mm	H mm	$\varnothing$ mm	Number
M 12 x 1,5	3 – 6,5	8	21	15	1.299.1200.50
M 12 x 1,5	2 – 5	8	21	15	1.299.1200.51
M 16 x 1,5	4 – 8	8	22	19	1.299.1600.50
M 16 x 1,5	2 – 6	8	22	19	1.299.1600.51
M 20 x 1,5	6 – 12	9	27	24	1.299.2000.50
M 20 x 1,5	5 – 9	9	27	24	1.299.2000.51
M 25 x 1,5	13 – 18	11	31	33	1.299.2500.50
M 25 x 1,5	9 – 16	11	31	33	1.299.2500.51
M 32 x 1,5	18 – 25	11	39	42	1.299.3200.50
M 32 x 1,5	13 – 20	11	39	42	1.299.3200.51

➔ Accessories see page 71

HSK-K-PVDF

NPT



Advice:

- With additional pre-assembled O-Ring upon request
- Please find suitable O-Ring on page 86
- Other sealing material and colors upon request


Material PVDF V0 according to UL 94

Seal FPM

Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
within the specified clamping range, only with optional O-Ring

Operating Temperature -35 °C – 150 °C (-31 °F – 302 °F)

Colors nature



AG	$\varnothing$ mm	GL mm	H mm	$\varnothing$ mm	Number
3/8" NPT	4 – 8	15	22	19/22	1.299.3800.70
3/8" NPT	2 – 6	15	22	19/22	1.299.3800.71
1/2" NPT	6 – 12	13	27	24	1.299.1200.70
1/2" NPT	5 – 9	13	27	24	1.299.1200.71
1/2" NPT/16	10 – 14	13	28	27	1.299.1216.70
1/2" NPT/16	7 – 12	13	28	27	1.299.1216.71
3/4" NPT	13 – 18	14	31	33	1.299.3400.70
3/4" NPT	9 – 16	14	31	33	1.299.3400.71

➔ Accessories see page 71

HSK-standard cable glands

HSK-K-PVDF

PG

RoHS



Material PVDF V0 according to UL 94

Seal FPM


Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
within the specified clamping range, only with optional O-Ring

Operating Temperature -35 °C – 150 °C (-31 °F – 302 °F)

Colors nature

Advice:

- With additional pre-assembled O-Ring upon request
- Please find suitable O-Ring on page 86
- Other sealing material e.g. Silicone upon request
- Other colors on request



AG	$\varnothing$ mm	GL mm	H mm	$\varnothing$ mm	Number
PG 7	3 – 6,5	8	21	15	1.299.0700.14
PG 7	2 – 5	8	21	15	1.299.0700.15
PG 9	4 – 8	8	22	19	1.299.0900.14
PG 9	2 – 6	8	22	19	1.299.0900.15
PG 11	5 – 10	8	25	22	1.299.1100.14
PG 11	3 – 7	8	25	22	1.299.1100.15
PG 13,5	6 – 12	9	27	24	1.299.1300.14
PG 13,5	5 – 9	9	27	24	1.299.1300.15
PG 16	10 – 14	10	28	27	1.299.1600.14
PG 16	7 – 12	10	28	27	1.299.1600.15
PG 21	13 – 18	11	31	33	1.299.2100.14
PG 21	9 – 16	11	31	33	1.299.2100.15
PG 29	18 – 25	11	39	42	1.299.2900.14
PG 29	13 – 20	11	39	42	1.299.2900.15
PG 36	22 – 32	13	48	53	1.299.3600.14
PG 36	20 – 26	13	48	53	1.299.3600.15
PG 42	32 – 38	13	49	60	1.299.4200.14
PG 42	25 – 31	13	49	60	1.299.4200.15
PG 48	37 – 44	14	49	65	1.299.4800.14
PG 48	29 – 35	14	49	65	1.299.4800.15

➔ Accessories see page 71

HSK-standard cable glands

HSK-M / HSK-M-PVDF

Metr.



Material Nickel plated brass

Clamping insert Polyamide / PVDF

Seal Buna-N / FPM


O-Ring Buna-N / FPM

Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
within the specified clamping range

Operating Temperature -40 °C – 100 °C (-40 °F – 212 °F) (PA)
-35 °C – 150 °C (-31 °F – 302 °F) (PVDF)

Advice:

- Other sealing material e.g. Silicone upon request
- Please see page 49 for size < M12 and > M63



AG	$\varnothing$ mm	GL mm	H mm	$\varnothing$ mm	Number HSK-M -40 °C – 100 °C -40 °F – 212 °F	Number HSK-M-PVDF -35 °C – 150 °C -31 °F – 302 °F
M 12 x 1,5	3 – 6,5	6,5	19	14	1.609.1200.50	1.699.1200.50
M 12 x 1,5	2 – 5	6,5	19	14	1.609.1200.51	1.699.1200.51
M 16 x 1,5	4 – 8	6	21	17 / 19	1.609.1600.50	1.699.1600.50
M 16 x 1,5	2 – 6	6	21	17 / 19	1.609.1600.51	1.699.1600.51
M 16 x 1,5	5 – 10	6	22	20	1.609.1611.50	1.699.1611.50
M 20 x 1,5	6 – 12	6	23	22	1.609.2000.50	1.699.2000.50
M 20 x 1,5	5 – 9	6	23	22	1.609.2000.51	1.699.2000.51
M 20 x 1,5	10 – 14	6	24	24	1.609.2016.50	1.699.2016.50
M 25 x 1,5	13 – 18	7	26	30	1.609.2500.50	1.699.2500.50
M 25 x 1,5	9 – 16	7	26	30	1.609.2500.51	1.699.2500.51
M 32 x 1,5	18 – 25	8	31	40	1.609.3200.50	1.699.3200.50
M 32 x 1,5	13 – 20	8	31	40	1.609.3200.51	1.699.3200.51
M 32 x 1,5	15 – 21	8	33	36	1.609.3200.52	
M 40 x 1,5	22 – 32	8	37	50	1.609.4000.50	1.699.4000.50
M 40 x 1,5	20 – 26	8	37	50	1.609.4000.51	1.699.4000.51
M 40 x 1,5	19 – 27	8	33	46	1.609.4000.52	
M 50 x 1,5	32 – 38	9	37	57	1.609.5000.50	
M 50 x 1,5	25 – 31	9	37	57	1.609.5000.51	
M 63 x 1,5	37 – 44	10	38	64 / 68	1.609.6300.50	
M 63 x 1,5	29 – 35	10	38	64 / 68	1.609.6300.51	

➔ Accessories see page 71

HSK-standard cable glands

HSK-M / HSK-M-PVDF


Metr.-elongated



Material	Nickel plated brass
Clamping insert	Polyamide / PVDF
Seal	Buna-N / FPM
O-Ring	Buna-N / FPM
Protection	IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG) within the specified clamping range
Operating Temperature	-40 °C – 100 °C (-40 °F – 212 °F) (PA) -35 °C – 150 °C (-31 °F – 302 °F) (PVDF)

Advice:

- Other sealing material e.g. Silicone upon request
- Please see page 49 for size < M12 and > M63



AG mm	Ø mm	GL mm	H mm	Ø mm	Number HSK-M -40 °C – 100 °C -40 °F – 212 °F	Number HSK-M-PVDF -35 °C – 150 °C -31 °F – 302 °F
M 12 x 1,5	3 – 6,5	10	19	14	1.609.1200.30	1.699.1200.30
M 12 x 1,5	2 – 5	10	19	14	1.609.1200.31	1.699.1200.31
M 16 x 1,5	4 – 8	10	21	17 / 19	1.609.1600.30	1.699.1600.30
M 16 x 1,5	2 – 6	10	21	17 / 19	1.609.1600.31	1.699.1600.31
M 16 x 1,5	5 – 10	10	22	20	1.609.1611.30	1.699.1611.30
M 20 x 1,5	6 – 12	10	23	22	1.609.2000.30	1.699.2000.30
M 20 x 1,5	5 – 9	10	23	22	1.609.2000.31	1.699.2000.31
M 20 x 1,5	10 – 14	10	24	24	1.609.2016.30	1.699.2016.30
M 25 x 1,5	13 – 18	12	26	30	1.609.2500.30	1.699.2500.30
M 25 x 1,5	9 – 16	12	26	30	1.609.2500.31	1.699.2500.31
M 32 x 1,5	18 – 25	12	31	40	1.609.3200.30	1.699.3200.30
M 32 x 1,5	13 – 20	12	31	40	1.609.3200.31	1.699.3200.31
M 32 x 1,5	15 – 21	12	37	36	1.609.3200.32	
M 40 x 1,5	22 – 32	15	37	50	1.609.4000.30	1.699.4000.30
M 40 x 1,5	20 – 26	15	37	50	1.609.4000.31	1.699.4000.31
M 40 x 1,5	19 – 27	15	37	46	1.609.4000.32	
M 50 x 1,5	32 – 38	15	37	57	1.609.5000.30	
M 50 x 1,5	25 – 31	15	37	57	1.609.5000.31	
M 63 x 1,5	37 – 44	15	38	64 / 68	1.609.6300.30	
M 63 x 1,5	29 – 35	15	38	64 / 68	1.609.6300.31	

➔ Accessories see page 71

HSK-standard cable glands

HSK-M / HSK-M-PVDF

PG


Material Nickel plated brass


RoHS

Clamping insert Polyamide / PVDF



Seal Buna-N / FPM


O-Ring Buna-N / FPM

Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
within the specified clamping range

Operating Temperature -40 °C – 100 °C (-40 °F – 212 °F) (PA)
-35 °C – 150 °C (-31 °F – 302 °F) (PVDF)

Advice:

- Other sealing material e.g. Silicone upon request



AG	$\varnothing$ mm	GL mm	H mm	 mm	Number HSK-M -40 °C – 100 °C -40 °F – 212 °F	Number HSK-M-PVDF -35 °C – 150 °C -31 °F – 302 °F
PG 7	3 – 6,5	5	19	14	1.609.0700.01	1.699.0700.01
PG 7	2 – 5	5	19	14	1.609.0700.15	1.699.0700.15
PG 9	4 – 8	6	21	17	1.609.0900.01	1.699.0900.01
PG 9	2 – 6	6	21	17	1.609.0900.15	1.699.0900.15
PG 11	5 – 10	6	22	20	1.609.1100.01	1.699.1100.01
PG 11	3 – 7	6	22	20	1.609.1100.15	1.699.1100.15
PG 13,5	6 – 12	6,5	24	22	1.609.1300.01	1.699.1300.01
PG 13,5	5 – 9	6,5	24	22	1.609.1300.15	1.699.1300.15
PG 16	10 – 14	6,5	23	24	1.609.1600.01	1.699.1600.01
PG 16	7 – 12	6,5	23	24	1.609.1600.15	1.699.1600.15
PG 21	13 – 18	7	24	30	1.609.2100.01	1.699.2100.01
PG 21	9 – 16	7	24	30	1.609.2100.15	1.699.2100.15
PG 29	18 – 25	8	29	40	1.609.2900.01	1.699.2900.01
PG 29	13 – 20	8	29	40	1.609.2900.15	1.699.2900.15
PG 36	22 – 32	8	35	50	1.609.3600.01	1.699.3600.01
PG 36	20 – 26	8	35	50	1.609.3600.15	1.699.3600.15
PG 42	32 – 38	9	37	57	1.609.4200.01	1.699.4200.01
PG 42	25 – 31	9	37	57	1.609.4200.15	1.699.4200.15
PG 48	37 – 44	10	38	64	1.609.4800.01	1.699.4800.01
PG 48	29 – 35	10	38	64	1.609.4800.15	1.699.4800.15

 Accessories see page 71

HSK-standard cable glands

HSK-M / HSK-M-PVDF

PG-elongated

RoHS



Material Nickel plated brass

Clamping insert Polyamide / PVDF

Seal Buna-N / FPM


O-Ring Buna-N / FPM

Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
within the specified clamping range

Operating Temperature -40 °C – 100 °C (-40 °F – 212 °F) (PA)
-35 °C – 150 °C (-31 °F – 302 °F) (PVDF)

Advice:

- Other sealing material e.g. Silicone upon request



AG	mm	GL mm	H mm	mm	Number HSK-M -40 °C – 100 °C -40 °F – 212 °F	Number HSK-M-PVDF -35 °C – 150 °C -31 °F – 302 °F
PG 7	3 – 6,5	10	19	14	1.609.0700.60	1.699.0700.60
PG 7	2 – 5	10	19	14	1.609.0700.61	1.699.0700.61
PG 9	4 – 8	10	21	17	1.609.0900.60	1.699.0900.60
PG 9	2 – 6	10	21	17	1.609.0900.61	1.699.0900.61
PG 11	5 – 10	10	22	20	1.609.1100.60	1.699.1100.60
PG 11	3 – 7	10	22	20	1.609.1100.61	1.699.1100.61
PG 13,5	6 – 12	10	24	22	1.609.1300.60	1.699.1300.60
PG 13,5	5 – 9	10	24	22	1.609.1300.61	1.699.1300.61
PG 16	10 – 14	10	23	24	1.609.1600.60	1.699.1600.60
PG 16	7 – 12	10	23	24	1.609.1600.61	1.699.1600.61
PG 21	13 – 18	12	24	30	1.609.2100.60	1.699.2100.60
PG 21	9 – 16	12	24	30	1.609.2100.61	1.699.2100.61
PG 29	18 – 25	12	29	40	1.609.2900.60	1.699.2900.60
PG 29	13 – 20	12	29	40	1.609.2900.61	1.699.2900.61
PG 36	22 – 32	15	35	50	1.609.3600.60	1.699.3600.60
PG 36	20 – 26	15	35	50	1.609.3600.61	1.699.3600.61
PG 42	32 – 38	15	37	57	1.609.4200.60	1.699.4200.60
PG 42	25 – 31	15	37	57	1.609.4200.61	1.699.4200.61
PG 48	37 – 44	15	38	64	1.609.4800.60	1.699.4800.60
PG 48	29 – 35	15	38	64	1.609.4800.61	1.699.4800.61

➔ Accessories see page 71

HSK-standard cable glands

HSK-M / HSK-M-PVDF

NPT



Material Nickel plated brass

Clamping insert Polyamide / PVDF

Seal Buna-N / FPM

O-Ring Buna-N / FPM

Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
within the specified clamping range


Operating Temperature -40 °C – 100 °C (-40 °F – 212 °F) (PA)
-35 °C – 150 °C (-31 °F – 302 °F) (PVDF)

Advice:

- Other sealing material e.g. Silicone upon request



RoHS



AG	$\varnothing$ mm	GL mm	H mm	 mm	Number HSK-M -40 °C – 100 °C -40 °F – 212 °F	Number HSK-M-PVDF -35 °C – 150 °C -31 °F – 302 °F
3/8" NPT	4 – 8	15	21	17 / 19	1.609.3800.70	1.699.3800.70
3/8" NPT	2 – 6	15	21	17 / 19	1.609.3800.71	1.699.3800.71
1/2" NPT	6 – 12	13	24	22 / 24	1.609.1200.70	1.699.1200.70
1/2" NPT	5 – 9	13	24	22 / 24	1.609.1200.71	1.699.1200.71
3/4" NPT	13 – 18	13	25	30	1.609.3400.70	1.699.3400.70
3/4" NPT	9 – 16	13	25	30	1.609.3400.71	1.699.3400.71
1" NPT	18 – 25	19	29	40	1.609.1000.70	
1" NPT	13 – 20	19	29	40	1.609.1000.71	

➔ Accessories see page 71

HSK-standard cable glands

HSK-INOX / HSK-INOX-PVDF


Metr.



Material	1.4305 / 1.4404
Clamping insert	Polyamide / PVDF
Seal	Buna-N / FPM
O-Ring	Buna-N / FPM
Protection	IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG) within the specified clamping range
Operating Temperature	-40 °C – 100 °C (-40 °F – 212 °F) (PA) -35 °C – 150 °C (-31 °F – 302 °F) (PVDF)

Advice:

- Other sealing material e.g. Silicone upon request
- Other sizes upon request



AG	$\varnothing$ mm	GL mm	H mm	$\varnothing$ mm	Number HSK-INOX 1.4305 -40 °C – 100 °C	Number HSK-INOX-PVDF 1.4305 -35 °C – 150 °C	Number HSK-INOX 1.4404 -40 °C – 100 °C	Number HSK-INOX-PVDF 1.4404 -35 °C – 150 °C
M 12 x 1,5	3 – 6,5	6,5	19	14	1.695.1200.50	1.696.1200.50	1.675.1200.50	1.676.1200.50
M 12 x 1,5	2 – 5	6,5	19	14	1.695.1200.51	1.696.1200.51	1.675.1200.51	1.676.1200.51
M 16 x 1,5	5 – 10	6	22	22	1.695.1600.50	1.696.1600.50	1.675.1600.50	1.676.1600.50
M 16 x 1,5	3 – 7	6	22	22	1.695.1600.51	1.696.1600.51	1.675.1600.51	1.676.1600.51
M 20 x 1,5	10 – 14	6	23	24	1.695.2000.50	1.696.2000.50	1.675.2000.50	1.676.2000.50
M 20 x 1,5	7 – 12	6	23	24	1.695.2000.51	1.696.2000.51	1.675.2000.51	1.676.2000.51
M 25 x 1,5	13 – 18	7	24	30	1.695.2500.50	1.696.2500.50	1.675.2500.50	1.676.2500.50
M 25 x 1,5	9 – 16	7	24	30	1.695.2500.51	1.696.2500.51	1.675.2500.51	1.676.2500.51
M 32 x 1,5	18 – 25	8	31	41	1.695.3200.50	1.696.3200.50	1.675.3200.50	1.676.3200.50
M 32 x 1,5	13 – 20	8	31	41	1.695.3200.51	1.696.3200.51	1.675.3200.51	1.676.3200.51
M 40 x 1,5	22 – 32	8	37	50	1.695.4000.50	1.696.4000.50	1.675.4000.50	1.676.4000.50
M 40 x 1,5	20 – 26	8	37	50	1.695.4000.51	1.696.4000.51	1.675.4000.51	1.676.4000.51
M 50 x 1,5	32 – 38	9	37	60	1.695.5000.50		1.675.5000.50	
M 50 x 1,5	25 – 31	9	37	60	1.695.5000.51		1.675.5000.51	
M 63 x 1,5	37 – 44	10	38	64/68	1.695.6300.50		1.675.6300.50	
M 63 x 1,5	29 – 35	10	38	64/68	1.695.6300.51		1.675.6300.51	

➔ Accessories see page 71

HSK-standard cable glands

HSK-INOX / HSK-INOX-PVDF

PG, NPT



Material 1.4305 / 1.4404



RoHS

Clamping insert Polyamide / PVDF



Seal Buna-N / FPM


O-Ring Buna-N / FPM

Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
within the specified clamping range

Operating Temperature -40 °C – 100 °C (-40 °F – 212 °F) (PA)
-35 °C – 150 °C (-31 °F – 302 °F) (PVDF)

Advice:

- Other sealing material e.g. Silicone upon request




AG	$\varnothing$ mm	GL mm	H mm	 mm	Number HSK-INOX 1.4305 -40 °C – 100 °C	Number HSK-INOX-PVDF 1.4305 -35 °C – 150 °C	Number HSK-INOX 1.4404 -40 °C – 100 °C	Number HSK-INOX-PVDF 1.4404 -35 °C – 150 °C
PG 7	3 – 6,5	5	19	14	1.695.0700.01	1.696.0700.01	1.675.0700.01	1.676.0700.01
PG 7	2 – 5	5	19	14	1.695.0700.15	1.696.0700.15	1.675.0700.15	1.676.0700.15
PG 9	4 – 8	6	21	17	1.695.0900.01	1.696.0900.01	1.675.0900.01	1.676.0900.01
PG 9	2 – 6	6	21	17	1.695.0900.15	1.696.0900.15	1.675.0900.15	1.676.0900.15
PG 11	5 – 10	6	22	22	1.695.1100.01	1.696.1100.01	1.675.1100.01	1.676.1100.01
PG 11	3 – 7	6	22	22	1.695.1100.15	1.696.1100.15	1.675.1100.15	1.676.1100.15
PG 13,5	6 – 12	6,5	24	22	1.695.1300.01	1.696.1300.01	1.675.1300.01	1.676.1300.01
PG 13,5	5 – 9	6,5	24	22	1.695.1300.15	1.696.1300.15	1.675.1300.15	1.676.1300.15
PG 16	10 – 14	6,5	23	24	1.695.1600.01	1.696.1600.01	1.675.1600.01	1.676.1600.01
PG 16	7 – 12	6,5	23	24	1.695.1600.15	1.696.1600.15	1.675.1600.15	1.676.1600.15
PG 21	13 – 18	7	24	30	1.695.2100.01	1.696.2100.01	1.675.2100.01	1.676.2100.01
PG 21	9 – 16	7	24	30	1.695.2100.15	1.696.2100.15	1.675.2100.15	1.676.2100.15
PG 29	18 – 25	8	29	41	1.695.2900.01	1.696.2900.01	1.675.2900.01	1.676.2900.01
PG 29	13 – 20	8	29	41	1.695.2900.15	1.696.2900.15	1.675.2900.15	1.676.2900.15
PG 36	22 – 32	8	35	50	1.695.3600.01	1.696.3600.01	1.675.3600.01	1.676.3600.01
PG 36	20 – 26	8	35	50	1.695.3600.15	1.696.3600.15	1.675.3600.15	1.676.3600.15
PG 42	32 – 38	9	37	57	1.695.4200.01	1.696.4200.01	1.675.4200.01	1.676.4200.01
PG 42	25 – 31	9	37	57	1.695.4200.15	1.696.4200.15	1.675.4200.15	1.676.4200.15
PG 48	37 – 44	10	38	64	1.695.4800.01	1.696.4800.01	1.675.4800.01	1.676.4800.01
PG 48	29 – 35	10	38	64	1.695.4800.15	1.696.4800.15	1.675.4800.15	1.676.4800.15
3/8" NPT	4 – 8	15	21	17 / 19	1.695.3800.70		1.675.3800.70	
3/8" NPT	2 – 6	15	21	17 / 19	1.695.3800.71		1.675.3800.71	
1/2" NPT	6 – 12	13	24	22 / 24	1.695.1200.70		1.675.1200.70	
1/2" NPT	5 – 9	13	24	22 / 24	1.695.1200.71		1.675.1200.71	
3/4" NPT	13 – 18	13	25	30	1.695.3400.70		1.675.3400.70	
3/4" NPT	9 – 16	13	25	30	1.695.3400.71		1.675.3400.71	
1" NPT	18 – 25	19	29	41	1.695.1000.70		1.675.1000.70	
1" NPT	13 – 20	19	29	41	1.695.1000.71		1.675.1000.71	

➔ Accessories see page 71

Industrial cable glands

HSK-EMC cable glands

Cable glands of the HSK-series fulfil the highest demands of quality and security. Outstanding high-grade materials are used together with innovative technology to offer premium products.

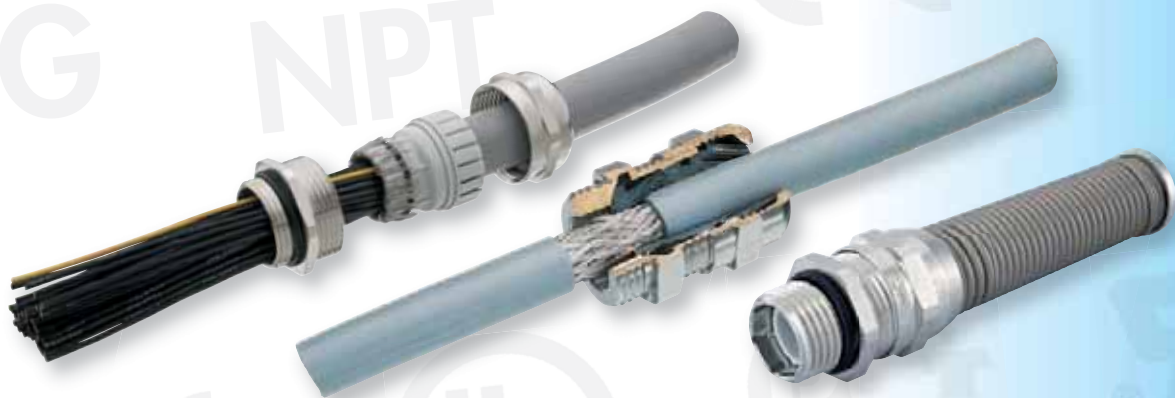

You can find in this chapter:

HSK EMC cable glands

- EMC-D version with Best EMI attenuation and easy installation
- EMC standard version
- with additional bending protection
- with additional strain relief

We provide variable clamping ranges, thread lengths, thread types plus different sealing materials and temperature ranges. Our range is completed by global certifications.

For any further question please do not hesitate to contact us. We look forward to develop solutions together with you. You profit from our vast knowledge in development, engineering and production technology.

Contact us:

E-Mail: info.et@hummel.com

Tel.: +49(0) 76 66/9 11 10-0

Advice:

- ➔ Do you need EMC boxes or EMC connectors? You can find suitable solutions in our catalogs „Enclosure Solutions“ and „Circular Connectors“

HSK-M-EMV-D

Metr., Metr.-elongated



Material Nickel plated brass

Clamping insert Metalised polyamide

Seal Buna-N


O-Ring Buna-N

Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
within the specified clamping range


Operating Temperature -40 °C – 100 °C (-40 °F – 212 °F)

Advice:

- Other sealing material e.g. Silicone upon request



AG	$\varnothing$ mm	GL mm	H mm	$\varnothing$ mm	Number	GL mm	Number long
M 12 x 1,5	3 – 6,5	6,5	25	14	1.631.1200.50	10	1.631.1200.30
M 16 x 1,5	4 – 8	6	29	17 / 19	1.631.1609.50	10	1.631.1609.30
M 16 x 1,5	5 – 10	6	32	20	1.631.1600.50	10	1.631.1600.30
M 20 x 1,5	6 – 12	6	32,5	22	1.631.2013.50	10	1.631.2013.30
M 20 x 1,5	10 – 14	6	33	24	1.631.2000.50	10	1.631.2000.30
M 25 x 1,5	13 – 18	7	39	30	1.631.2500.50	12	1.631.2500.30
M 32 x 1,5	18 – 25	8	45	40	1.631.3200.50	12	1.631.3200.30
M 40 x 1,5	24 – 32	8	51	50	1.631.4000.50	15	1.631.4000.30
M 50 x 1,5	32 – 38	9	57,5	57	1.631.5000.50	15	1.631.5000.30
M 63 x 1,5	37 – 44	10	52	64 / 68	1.631.6300.50	15	1.631.6300.30

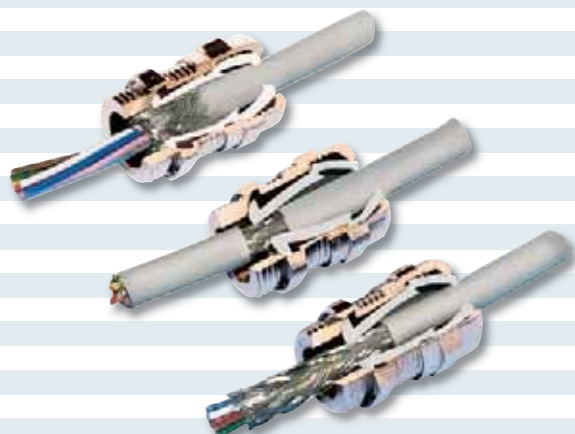

➔ Accessories see page 71

HSK-EMC cable glands

HSK-M-EMV-D

PG

RoHS

CE PG

UL

Material	Nickel plated brass
Clamping insert	Metalised polyamide
Seal	Buna-N
O-Ring	Buna-N
Protection	IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG) within the specified clamping range
Operating Temperature	-40 °C – 100 °C (-40 °F – 212 °F)

Advice:

- Other sealing material e.g. Silicone upon request
- Elongated threads on request

AG	mm	GL	mm	H	mm	Number
PG 7	3 – 6,5	5	24	14		1.631.0700.01
PG 9	4 – 8	6	28	17		1.631.0900.01
PG 11	5 – 10	6	29	20		1.631.1100.01
PG 13,5	6 – 12	6,5	31	22		1.631.1300.01
PG 16	10 – 14	6,5	32	24		1.631.1600.01
PG 21	13 – 18	7	38	30		1.631.2100.01
PG 29	18 – 25	8	43	40		1.631.2900.01
PG 36	24 – 32	8	48	50		1.631.3600.01
PG 42	32 – 38	9	45	57		1.631.4200.01
PG 48	37 – 44	10	46	64		1.631.4800.01

➔ Accessories see page 71

HSK-M-EMV-D

NPT

RoHS

CE PG

UL

Material	Nickel plated brass
Clamping insert	Metalised polyamide
Seal	Buna-N
O-Ring	Buna-N
Protection	IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG) within the specified clamping range
Operating Temperature	-40 °C – 100 °C (-40 °F – 212 °F)

Advice:

- Other sealing material e.g. Silicone upon request

AG	mm	GL	mm	H	mm	Number
3/8" NPT	4 – 8	15	29	17 / 19		1.631.3800.70
1/2" NPT	6 – 12	13	32,5	22 / 24		1.631.1200.70
3/4" NPT	13 – 18	13	39	30		1.631.3400.70

➔ Accessories see page 71

HSK-M-EMV

Metr., Metr.-elongated



Material Nickel plated brass

Clamping insert Polyamide

Seal Buna-N

O-Ring Buna-N

Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
within the specified clamping range


Operating Temperature -40 °C – 100 °C (-40 °F – 212 °F)

Advice:

- Other sealing material e.g. Silicone upon request
- Stainless steel on request



See our homepage www.hummel.com
for assembling advices for maximum
cable diameters



AG	Øk mm	GL mm	H mm	Ø mm	Number	GL mm	Number elongated
M 12 x 1,5	3 – 6,5	6,5	19	14	1.691.1200.50	10	1.691.1200.30
M 12 x 1,5	2 – 5	6,5	19	14	1.691.1200.51	10	1.691.1200.31
M 16 x 1,5	5 – 10	6	22	20	1.691.1600.50	10	1.691.1600.30
M 16 x 1,5	3 – 7	6	22	20	1.691.1600.51	10	1.691.1600.31
M 20 x 1,5	10 – 14	6	24	24	1.691.2000.50	10	1.691.2000.30
M 20 x 1,5	7 – 12	6	24	24	1.691.2000.51	10	1.691.2000.31
M 25 x 1,5	13 – 18	7	26	30	1.691.2500.50	12	1.691.2500.30
M 25 x 1,5	9 – 16	7	26	30	1.691.2500.51	12	1.691.2500.31
M 32 x 1,5	18 – 25	8	31	40	1.691.3200.50	12	1.691.3200.30
M 32 x 1,5	13 – 20	8	31	40	1.691.3200.51	12	1.691.3200.31
M 32 x 1,5	15 – 21	8	33	36	1.691.3200.52	12	1.691.3200.32
M 40 x 1,5	22 – 32	8	37	50	1.691.4000.50	15	1.691.4000.30
M 40 x 1,5	20 – 26	8	37	50	1.691.4000.51	15	1.691.4000.31
M 40 x 1,5	19 – 27	8	33	46	1.691.4000.52	15	1.691.4000.32
M 50 x 1,5	32 – 38	9	37	57	1.691.5000.50	15	1.691.5000.30
M 50 x 1,5	25 – 31	9	37	57	1.691.5000.51	15	1.691.5000.31
M 63 x 1,5	37 – 44	10	38	64 / 68	1.691.6300.50	15	1.691.6300.30
M 63 x 1,5	29 – 35	10	38	64 / 68	1.691.6300.51	15	1.691.6300.31



Accessories see page 71

HSK-EMC cable glands

HSK-M-EMV

PG, PG-elongated, NPT

RoHS



Material Nickel plated brass

Clamping insert Polyamide

Seal Buna-N


O-Ring Buna-N

Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
within the specified clamping range

Operating Temperature -40 °C – 100 °C (-40 °F – 212 °F)

Advice:

- Also available in PVDF
- Other sealing material e.g. Silicone upon request
- Stainless steel on request



AG	$\varnothing$ mm	GL mm	H mm	 mm	Number	GL mm	Number elongated
PG 7	3 – 6,5	5	19	14	1.691.0700.01	10	1.691.0700.60
PG 7	2 – 5	5	19	14	1.691.0700.15	10	1.691.0700.61
PG 9	4 – 8	6	21	17	1.691.0900.01	10	1.691.0900.60
PG 9	2 – 6	6	21	17	1.691.0900.15	10	1.691.0900.61
PG 11	5 – 10	6	22	20	1.691.1100.01	10	1.691.1100.60
PG 11	3 – 7	6	22	20	1.691.1100.15	10	1.691.1100.61
PG 13,5	6 – 12	6,5	24	22	1.691.1300.01	10	1.691.1300.60
PG 13,5	5 – 9	6,5	24	22	1.691.1300.15	10	1.691.1300.61
PG 16	10 – 14	6,5	23	24	1.691.1600.01	10	1.691.1600.60
PG 16	7 – 12	6,5	23	24	1.691.1600.15	10	1.691.1600.61
PG 21	13 – 18	7	24	30	1.691.2100.01	12	1.691.2100.60
PG 21	9 – 16	7	24	30	1.691.2100.15	12	1.691.2100.61
PG 29	18 – 25	8	29	40	1.691.2900.01	12	1.691.2900.60
PG 29	13 – 20	8	29	40	1.691.2900.15	12	1.691.2900.61
PG 36	22 – 32	8	35	50	1.691.3600.01	15	1.691.3600.60
PG 36	20 – 26	8	35	50	1.691.3600.15	15	1.691.3600.61
PG 42	32 – 38	9	37	57	1.691.4200.01	15	1.691.4200.60
PG 42	25 – 31	9	37	57	1.691.4200.15	15	1.691.4200.61
PG 48	37 – 44	10	38	64	1.691.4800.01	15	1.691.4800.60
PG 48	29 – 35	10	38	64	1.691.4800.15	15	1.691.4800.61
3/8" NPT	4 – 8	15	21	17 / 19	1.691.3800.70		
3/8" NPT	2 – 6	15	21	17 / 19	1.691.3800.71		
1/2" NPT	6 – 12	13	24	22 / 24	1.691.1200.70		
1/2" NPT	5 – 9	13	24	22 / 24	1.691.1200.71		
3/4" NPT	13 – 18	13	25	30	1.691.3400.70		
3/4" NPT	9 – 16	13	25	30	1.691.3400.71		

➔ Accessories see page 71

HSK-M-Flex-EMV

Metr., Metr.-elongated




Material	Nickel plated brass
Steel spring	1.4310
Clamping insert	Polyamide
Seal	Buna-N
O-Ring	Buna-N
Protection	IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG) within the specified clamping range
Operating Temperature	-40 °C – 100 °C (-40 °F – 212 °F)




Advice:
- Other sealing material e.g. Silicone upon request

See our homepage www.hummel.com
for assembling advices for maximum
cable diameters



AG	$\varnothing$ mm	GL mm	H mm	d mm	 mm	Number	GL mm	Number elongated
M 12 x 1,5	3 – 6,5	6,5	55	6,8	14	1.624.1200.50	10	1.624.1200.30
M 12 x 1,5	2 – 5	6,5	55	6,8	14	1.624.1200.51	10	1.624.1200.31
M 16 x 1,5	5 – 10	6	77	10,3	20	1.624.1600.50	10	1.624.1600.30
M 16 x 1,5	3 – 7	6	77	10,3	20	1.624.1600.51	10	1.624.1600.31
M 20 x 1,5	10 – 14	6	98	14,3	24	1.624.2000.50	10	1.624.2000.30
M 20 x 1,5	7 – 12	6	98	14,3	24	1.624.2000.51	10	1.624.2000.31
M 25 x 1,5	13 – 18	7	111	18,4	30	1.624.2500.50	12	1.624.2500.30
M 25 x 1,5	9 – 16	7	111	18,4	30	1.624.2500.51	12	1.624.2500.31

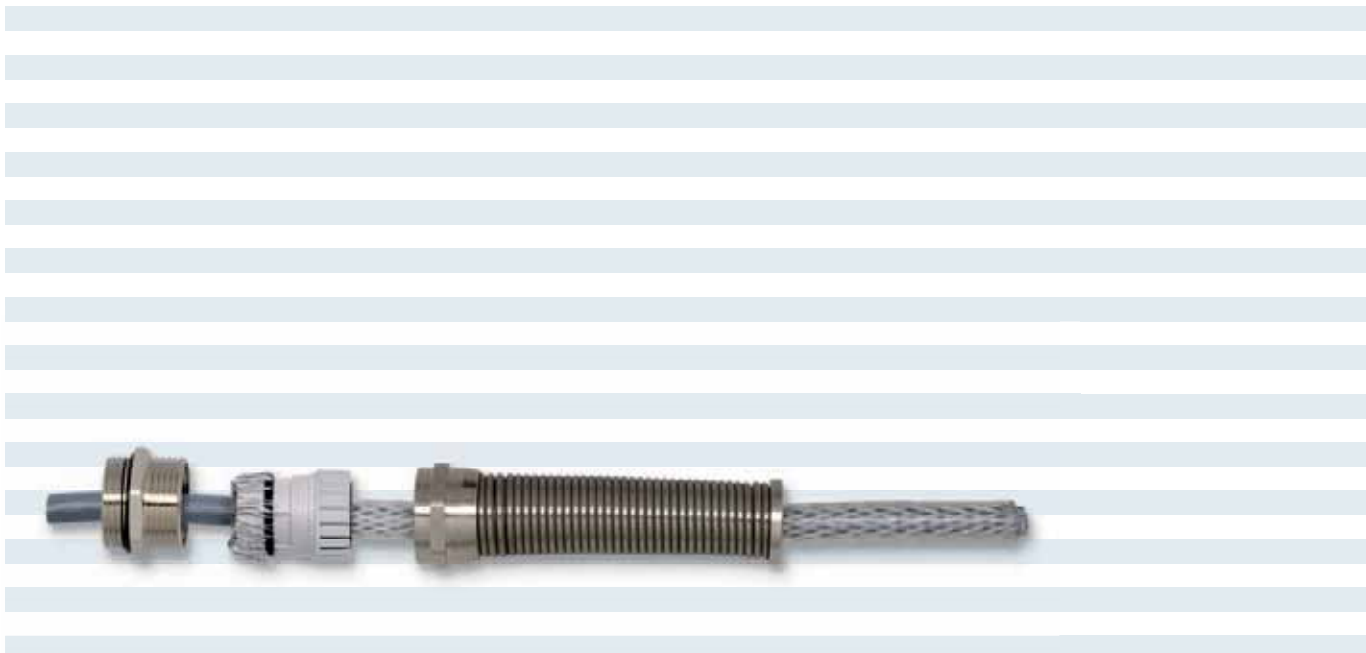

➔ Accessories see page 71

HSK-EMC cable glands

HSK-M-Flex-EMV

PG, PG-elongated, NPT

RoHS



Material Nickel plated brass

Steel spring 1.4310

Clamping insert Polyamide

Seal Buna-N


O-Ring Buna-N

Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
within the specified clamping range

Operating Temperature -40 °C – 100 °C (-40 °F – 212 °F)

Advice:

- Also available in PVDF
- Other sealing material e.g. Silicone upon request



AG	$\varnothing$ mm	GL mm	H mm	d mm	 mm	Number	GL mm	Number elongated
PG 7	3 – 6,5	5	55	6,8	14	1.624.0700.01	10	1.624.0700.60
PG 7	2 – 5	5	55	6,8	14	1.624.0700.15	10	1.624.0700.61
PG 9	4 – 8	6	66	8,2	17	1.624.0900.01	10	1.624.0900.60
PG 9	2 – 6	6	66	8,2	17	1.624.0900.15	10	1.624.0900.61
PG 11	5 – 10	6	77	10,3	20	1.624.1100.01	10	1.624.1100.60
PG 11	3 – 7	6	77	10,3	20	1.624.1100.15	10	1.624.1100.61
PG 13,5	6 – 12	6,5	88	12,3	22	1.624.1300.01	10	1.624.1300.60
PG 13,5	5 – 9	6,5	88	12,3	22	1.624.1300.15	10	1.624.1300.61
PG 16	10 – 14	6,5	98	14,3	24	1.624.1600.01	10	1.624.1600.60
PG 16	7 – 12	6,5	98	14,3	24	1.624.1600.15	10	1.624.1600.61
PG 21	13 – 18	7	111	18,4	30	1.624.2100.01	12	1.624.2100.60
PG 21	9 – 16	7	111	18,4	30	1.624.2100.15	12	1.624.2100.61
3/8" NPT	4 – 8	15	66	8,2	17 / 19	1.624.3800.70		
3/8" NPT	2 – 6	15	66	8,2	17 / 19	1.624.3800.71		
1/2" NPT	6 – 12	13	88	12,3	22 / 24	1.624.1200.70		
1/2" NPT	5 – 9	13	88	12,3	22 / 24	1.624.1200.71		
3/4" NPT	13 – 18	13	111	18,4	30	1.624.3400.70		
3/4" NPT	9 – 16	13	111	18,4	30	1.624.3400.71		

➔ Accessories see page 71

HSK-MZ-EMV

Metr., Metr.-elongated, PG, PG-elongated, NPT




Material	Nickel plated brass
Clamping insert	Polyamide
Seal	Buna-N
O-Ring	Buna-N
Protection	IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG) within the specified clamping range
Operating Temperature	-40 °C – 100 °C (-40 °F – 212 °F)



Advice:
 - Also available in PVDF*
 - Other sealing material e.g. Silicone upon request

See our homepage www.hummel.com
 for assembling advices for maximum
 cable diameters



AG	$\varnothing$ mm	GL mm	H mm	 mm	Number	GL mm	Number elongated
M 12 x 1,5	3 – 6,5	6,5	26	14	1.692.1200.50	10	1.692.1200.30
M 16 x 1,5	6 – 10	6	29	20	1.692.1600.50	10	1.692.1600.30
M 20 x 1,5	10 – 14	6	32	24	1.692.2000.50	10	1.692.2000.30
M 25 x 1,5	13 – 18	7	35	30	1.692.2500.50	12	1.692.2500.30
M 32 x 1,5	18 – 25	8	41	40	1.692.3200.50	12	1.692.3200.30
M 40 x 1,5	22 – 32	8	48	50	1.692.4000.50	15	1.692.4000.30
M 50 x 1,5	32 – 38	9	51	57	1.692.5000.50	15	1.692.5000.30
M 50 x 1,5	25 – 31	9	51	57	1.692.5000.51	15	1.692.5000.31
M 63 x 1,5	37 – 44	10	52	64 / 68	1.692.6300.50	15	1.692.6300.30
M 63 x 1,5	29 – 35	10	52	64 / 68	1.692.6300.51	15	1.692.6300.31
PG 7*	3 – 6,5	5	26	14	1.692.0700.01	10	1.692.0700.60
PG 9*	4 – 8	6	28	17	1.692.0900.01	10	1.692.0900.60
PG 11*	6 – 10	6	29	20	1.692.1100.01	10	1.692.1100.60
PG 13,5*	6 – 12	6,5	33	22	1.692.1300.01	10	1.692.1300.60
PG 16*	10 – 14	6,5	32	24	1.692.1600.01	10	1.692.1600.60
PG 21*	13 – 18	7	35	30	1.692.2100.01	12	1.692.2100.60
PG 29*	18 – 25	8	41	40	1.692.2900.01	12	1.692.2900.60
PG 36*	22 – 32	8	48	50	1.692.3600.01	15	1.692.3600.60
PG 42*	32 – 38	9	51	57	1.692.4200.01	15	1.692.4200.60
PG 42*	25 – 31	9	51	57	1.692.4200.15	15	1.692.4200.61
PG 48*	37 – 44	10	51	64	1.692.4800.01	15	1.692.4800.60
PG 48*	29 – 35	10	51	64	1.692.4800.15	15	1.692.4800.61
3/8" NPT	4 – 8	15	28	17 / 19	1.692.3800.70		
1/2" NPT	6 – 12	13	29	22 / 24	1.692.1200.70		
3/4" NPT	13 – 18	13	35	30	1.692.3400.70		



➔ Accessories see page 71

Industrial cable glands

HSK cable glands for special applications

Cable glands of the HSK-series fulfil highest demands of quality and security. Outstanding high-grade materials are used together with innovative technology to offer premium products.



You can find in this chapter:

HSK cable glands

- made of polyamide and nickel plated brass with multi hole and flat cable sealing inserts
- made of polyamide and nickel plated brass with bending protection
- snap elbows made of polyamide and nickel plated brass
- Minis in the sizes M6 to M10 and PG7
- XL in the sizes M63 with extended clamping range to M110 and XL cable glands with pipe threads from G2 1/2" to G4"
- with additional strain relief

We provide variable clamping ranges, thread lengths, thread types plus different sealing materials and temperature ranges. Our range is completed by global certifications.

For any further question please do not hesitate to contact us. We look forward to develop solutions together with you. You profit from our vast knowledge in development, engineering and production technology.

Contact us:

E-Mail: info.et@hummel.com

Tel.: +49 (0) 76 66/9 11 10-0

HSK cable glands for special applications

HSK-K-Multi

Metr., PG, NPT


Material Polyamide V0 according to UL 94

Seal Elastomer


Protection IP 65
IP 68 possible with ideal fit, only with optional O-Ring

Operating Temperature -40 °C – 100 °C (-40 °F – 212 °F)

Colors grey (RAL 7035), black (RAL 9005)

Advice:

- With additional pre-assembled O-Ring upon request
- Please find suitable O-Ring on page 86
- Other sealing material e.g. Silicone upon request
- Elongated threads on request
- Installation instruction see page 174



AG	GL mm	H mm	mm	Number of Holes x d	Number grey	Number black	Number of Holes x d	Number grey	Number black
M 16 x 1,5	8	22	19	4 x 1,4	1.597.1600.50	1.597.1600.51	2 x 3	1.597.1601.50	1.597.1601.51
M 20 x 1,5	9	27	24	6 x 3	1.597.2001.50	1.597.2001.51	2 x 5	1.597.2003.50	1.597.2003.51
M 25 x 1,5	11	31	33	4 x 6	1.597.2500.50	1.597.2500.51	3 x 7	1.597.2501.50	1.597.2501.51
M 32 x 1,5	11	39	42	6 x 6,5	1.597.3200.50	1.597.3200.51	4 x 9	1.597.3201.50	1.597.3201.51
M 40 x 1,5	13	48	53	7 x 9	1.597.4001.50	1.597.4001.51	2 x 15	1.597.4003.50	1.597.4003.51
M 50 x 1,5	13	49	60		1.597.5099.50	1.597.5099.51			
M 63 x 1,5	14	49	65 / 68	6 x 12	1.597.6301.50	1.597.6301.51	3 x 18	1.597.6302.50	1.597.6302.51
PG 7	8	21	15		1.597.0799.00				
PG 9	8	22	19	4 x 1,4	1.597.0900.00	1.597.0900.01	2 x 3	1.597.0901.00	1.597.0901.01
PG 11	8	25	22	2 x 4	1.597.1102.00	1.597.1102.01	3 x 3	1.597.1101.00	1.597.1101.01
PG 13,5	9	27	24	3 x 4	1.597.1302.00	1.597.1302.01	2 x 5	1.597.1303.00	1.597.1303.01
PG 16	10	28	27	4 x 4	1.597.1602.00	1.597.1602.01	6 x 4	1.597.1604.00	1.597.1604.01
PG 16	10	28	27	3 x 5,6	1.597.1606.00	1.597.1606.01	2 x 6	1.597.1605.00	1.597.1605.01
PG 21	11	31	33	4 x 6	1.597.2100.00	1.597.2100.01	3 x 7	1.597.2101.00	1.597.2101.01
PG 29	11	39	42	6 x 6,5	1.597.2900.00	1.597.2900.01	4 x 9	1.597.2901.00	1.597.2901.01
PG 36	13	48	53	7 x 9	1.597.3601.00	1.597.3601.01	2 x 15	1.597.3603.00	1.597.3603.01
PG 42	13	49	60		1.597.4299.00				
PG 48	14	49	65	6 x 12	1.597.4801.00	1.597.4801.01	3 x 18	1.597.4802.00	1.597.4802.01
3/8" NPT	15	22	19 / 22	4 x 1,4	1.597.3800.70	1.597.3800.71	2 x 3	1.597.3801.70	1.597.3801.71
1/2" NPT	13	27	24	3 x 4	1.597.1202.70	1.597.1202.71	2 x 5	1.597.1203.70	1.597.1203.71
1/2" NPT/16	13	28	27	6 x 4	1.597.1220.70	1.597.1220.71	2 x 6	1.597.1221.70	1.597.1221.71
3/4" NPT	14	31	33	4 x 6	1.597.3400.70	1.597.3400.71	3 x 7	1.597.3401.70	1.597.3401.71
1" NPT	19	39	42	6 x 6,5	1.597.1000.70	1.597.1000.71	4 x 9	1.597.1001.70	1.597.1001.71
1 1/4" NPT	16	39	42 / 46		1.597.5499.70	1.597.5499.71			
1 1/2" NPT	20	48	53	5 x 9	1.597.6400.70	1.597.6400.71	7 x 9	1.597.6401.70	1.597.6401.71

The shown inserts are samples, more inserts upon request

Accessories see page 71

HSK cable glands for special applications

HSK-K-FLAKA

Metr., PG, NPT



Material VO according to UL 94

Seal Elastomer


Protection IP 65
IP 68 possible with ideal fit, only with optional O-Ring

Operating Temperature -40 °C – 100 °C (-40 °F – 212 °F)

Colors grey (RAL 7035), black (RAL 9005)

Advice:

- With additional pre-assembled O-Ring upon request
- Please find suitable O-Ring on page 86
- Other sealing material e.g. Silicone upon request
- Elongated threads on request
- Installation instruction see page 174



AG	GL mm	H mm	mm	Dimensions B x H mm	Number grey	Number black	Dimensions B x H mm	Number grey	Number black
M 20 x 1,5	9	28	27	11,5 x 5	1.587.2016.50	1.587.2016.51	12 x 7	1.587.2017.50	1.587.2017.51
M 20 x 1,5	9	28	27	14 x 6	1.587.2018.50	1.587.2018.51			
M 25 x 1,5	11	31	33	14 x 6	1.587.2500.50	1.587.2500.51	14 x 7	1.587.2501.50	1.587.2501.51
M 32 x 1,5	11	39	42	22 x 8	1.587.3200.50	1.587.3200.51			
M 40 x 1,5	13	48	53	28,5 x 10	1.587.4000.50	1.587.4000.51	29 x 5,5	1.587.4001.50	1.587.4001.51
M 40 x 1,5	13	48	53	30,5 x 12	1.587.4002.50	1.587.4002.51	31 x 7,5	1.587.4003.50	1.587.4003.51
M 50 x 1,5	13	49	60	33,5 x 11,5	1.587.5000.50	1.587.5000.51			
M 63 x 1,5	14	49	65/68	38 x 12	1.587.6300.50	1.587.6301.51			
PG 16	10	28	27	11,5 x 5	1.587.1600.00	1.587.1600.01	12 x 7	1.587.1601.00	1.587.1601.01
PG 16	10	28	27	14 x 6	1.587.1602.00	1.587.1602.01			
PG 21	11	31	33	14 x 6	1.587.2100.00	1.587.2100.01	14 x 7	1.587.2101.00	1.587.2101.01
PG 29	11	39	42	22 x 8	1.587.2900.00	1.587.2900.01			
PG 36	13	48	53	28,5 x 10	1.587.3600.00	1.587.3600.01	29 x 5,5	1.587.3601.00	1.587.3601.01
PG 36	13	48	53	30,5 x 12	1.587.3602.00	1.587.3602.01	31 x 7,5	1.587.3603.00	1.587.3603.01
PG 42	13	49	60	33,5 x 11,5	1.587.4200.00	1.587.4200.01			
PG 48	14	49	65	38 x 12	1.587.4800.00	1.587.4800.01			
1/2" NPT/16	13	28	27	11,5 x 5,5	1.587.1216.70	1.587.1216.71	12 x 7	1.587.1217.70	1.587.1217.71
1/2" NPT/16	13	28	27	14 x 6	1.587.1218.70	1.587.1218.71			
3/4" NPT	14	31	33	14 x 6	1.587.3400.70	1.587.3400.71			
1" NPT	19	39	42	22 x 8	1.587.1000.70	1.587.1000.71			
1 1/4" NPT	16	39	42/46	22 x 8	1.587.5400.70	1.587.5400.71			
1 1/2" NPT	20	48	53	28,5 x 10	1.587.6400.70	1.587.6400.71	29 x 5,5	1.587.6401.70	1.587.6401.71
1 1/2" NPT	20	48	53	30,5 x 12	1.587.6402.70	1.587.6402.71	31 x 7,5	1.587.6403.70	1.587.6403.71

The shown inserts are samples, more inserts upon request

HSK cable glands for special applications

HSK-K-Flex

Metr., Metr.-elongated



Material Polyamide

Seal Buna-N


 Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
within the specified clamping range, only with optional O-Ring

Operating Temperature -40 °C – 100 °C (-40 °F – 212 °F)

Colors grey (RAL 7035), black (RAL 9005)

Advice:

- With additional pre-assembled O-Ring upon request
- Please find suitable O-Ring on page 86
- Other sealing material e.g. Silicone upon request
- Other colors on request



AG	mm	GL	H	d	mm	Number grey	Number black	GL	Number grey elongated	Number black elongated
M 12 x 1,5	3-6,5	8	54	7	15	1.293.1200.50	1.293.1201.50	15	1.293.1200.30	1.293.1201.30
M 12 x 1,5	2-5	8	54	7	15	1.293.1200.51	1.293.1201.51	15	1.293.1200.31	1.293.1201.31
M 16 x 1,5	4-8	8	63	8,5	19	1.293.1600.50	1.293.1601.50	15	1.293.1600.30	1.293.1601.30
M 16 x 1,5	2-6	8	63	8,5	19	1.293.1600.51	1.293.1601.51	15	1.293.1600.31	1.293.1601.31
M 16 x 1,5	5-10	8	78	10,5	22	1.294.1600.50	1.294.1601.50	15	1.294.1600.30	1.294.1601.30
M 16 x 1,5	3-7	8	78	10,5	22	1.294.1600.51	1.294.1601.51	15	1.294.1600.31	1.294.1601.31
M 20 x 1,5	6-12	9	90	13	24	1.293.2000.50	1.293.2001.50	15	1.293.2000.30	1.293.2001.30
M 20 x 1,5	5-9	9	90	13	24	1.293.2000.51	1.293.2001.51	15	1.293.2000.31	1.293.2001.31
M 20 x 1,5	10-14	9	100	15,5	27	1.294.2000.50	1.294.2001.50	15	1.294.2000.30	1.294.2001.30
M 20 x 1,5	7-12	9	100	15,5	27	1.294.2000.51	1.294.2001.51	15	1.294.2000.31	1.294.2001.31
M 25 x 1,5	13-18	11	114	20	33	1.293.2500.50	1.293.2501.50	15	1.293.2500.30	1.293.2501.30
M 25 x 1,5	9-16	11	114	20	33	1.293.2500.51	1.293.2501.51	15	1.293.2500.31	1.293.2501.31

HSK cable glands for special applications

HSK-K-Flex

PG, PG-elongated, NPT

RoHS



Material Polyamide

Seal Buna-N


Protection IP 68 – 10 bar/ IP 69K (NEMA 6 – 150 PSIG)
within the specified clamping range, only with optional O-Ring

Operating Temperature -40 °C – 100 °C (-40 °F – 212 °F)

Colors grey (RAL 7035), black (RAL 9005)

Advice:

- With additional pre-assembled O-Ring upon request
- Please find suitable O-Ring on page 86
- Other sealing material e.g. Silicone upon request
- Other colors on request




AG	mm	GL mm	H mm	d mm	mm	Number grey	Number black	GL mm	Number grey elongated	Number black elongated
PG 7*	3–6,5	8	54	7	15	1.293.0700.14	1.293.0701.14	15	1.293.0700.60	1.293.0701.60
PG 7*	2–5	8	54	7	15	1.293.0700.15	1.293.0701.15	15	1.293.0700.61	1.293.0701.61
PG 9*	4–8	8	63	8,5	19	1.293.0900.14	1.293.0901.14	15	1.293.0900.60	1.293.0901.60
PG 9*	2–6	8	63	8,5	19	1.293.0900.15	1.293.0901.15	15	1.293.0900.61	1.293.0901.61
PG 11*	5–10	8	78	10,5	22	1.293.1100.14	1.293.1101.14	15	1.293.1100.60	1.293.1101.60
PG 11*	3–7	8	78	10,5	22	1.293.1100.15	1.293.1101.15	15	1.293.1100.61	1.293.1101.61
PG 13,5*	6–12	9	90	13	24	1.293.1300.14	1.293.1301.14	15	1.293.1300.60	1.293.1301.60
PG 13,5*	5–9	9	90	13	24	1.293.1300.15	1.293.1301.15	15	1.293.1300.61	1.293.1301.61
PG 16*	10–14	10	100	15,5	27	1.293.1600.14	1.293.1601.14	15	1.293.1600.60	1.293.1601.60
PG 16*	7–12	10	100	15,5	27	1.293.1600.15	1.293.1601.15	15	1.293.1600.61	1.293.1601.61
PG 21*	13–18	11	114	20	33	1.293.2100.14	1.293.2101.14	15	1.293.2100.60	1.293.2101.60
PG 21*	9–16	11	114	20	33	1.293.2100.15	1.293.2101.15	15	1.293.2100.61	1.293.2101.61
3/8" NPT	4–8	15	63	8,5	22/19	1.293.3800.70	1.293.3801.70			
3/8" NPT	2–6	15	63	8,5	22/19	1.293.3800.71	1.293.3801.71			
1/2" NPT	6–12	13	90	13	24	1.293.1200.70	1.293.1201.70			
1/2" NPT	5–9	13	90	13	24	1.293.1200.71	1.293.1201.71			
1/2" NPT/16	10–14	13	100	15,5	27	1.293.1216.70	1.293.1217.70			
1/2" NPT/16	7–12	13	100	15,5	27	1.293.1216.71	1.293.1217.71			
3/4" NPT	13–18	14	114	20	33	1.293.3400.70	1.293.3401.70			
3/4" NPT	9–16	14	114	20	33	1.293.3400.71	1.293.3401.71			

* Also available as KE-Flex with enlarged clamping range and as KR-Flex with reduced clamping range, see clamping range page 18

HSK cable glands for special applications

HSK-W

Metr.

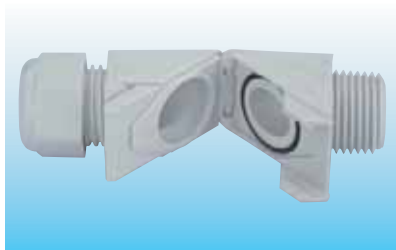

Advice:

- Other sealing material e.g. Silicone upon request
- Other colors on request


Material Polyamide

Seal Buna-N

 Protection IP 68
O-Ring Buna-N

Operating Temperature -40 °C – 100 °C (-40 °F – 212 °F)

Colors grey (RAL 7035), black (RAL 9005)



AG	$\varnothing$ mm	GL mm	H mm	L mm	R mm		Number grey	Number black
M 16 x 1,5	4-8	8	23	45	5	19	1.313.1600.50	1.313.1601.50
M 16 x 1,5	2-6	8	23	45	5	19	1.313.1600.51	1.313.1601.51
M 20 x 1,5	6-12	9	30,5	57	7	24	1.313.2000.50	1.313.2001.50
M 20 x 1,5	5-9	9	30,5	57	7	24	1.313.2000.51	1.313.2001.51
M 25 x 1,5	13-18	11	40	73	10	33	1.313.2500.50	1.313.2501.50
M 25 x 1,5	9-16	11	40	73	10	33	1.313.2500.51	1.313.2501.51
M 32 x 1,5	18-25	11	51,5	91	14	42	1.313.3200.50	1.313.3201.50
M 32 x 1,5	13-20	11	51,5	91	14	42	1.313.3200.51	1.313.3201.51

➔ Accessories see page 71

HSK-W

NPT



Advice:

- Glands not fitted with O-Rings.
- We recommend the use of thread washer seal ring (page 87)

Material Polyamide


Seal Buna-N

 Protection IP 68
O-Ring Buna-N

Operating Temperature -40 °C – 100 °C (-40 °F – 212 °F)

Colors grey (RAL 7035), black (RAL 9005)

- Other sealing material e.g. Silicone upon request
- Other colors on request



AG	$\varnothing$ mm	GL mm	H mm	L mm	R mm		Number grey	Number black
3/8" NPT	4-8	15	23	45	5	19	1.313.3800.70	1.313.3801.70
3/8" NPT	2-6	15	23	45	5	19	1.313.3800.71	1.313.3801.71
1/2" NPT	6-12	13	32,5	57	7	24	1.313.1200.70	1.313.1201.70
1/2" NPT	5-9	13	32,5	57	7	24	1.313.1200.71	1.313.1201.71
1/2" NPT/16	10-14	13	31,5	59	8	27	1.313.1216.70	1.313.1217.70
1/2" NPT/16	7-12	13	31,5	59	8	27	1.313.1216.71	1.313.1217.71
3/4" NPT	13-18	13	40	73	10	33	1.313.3400.70	1.313.3401.70
3/4" NPT	9-16	13	40	73	10	33	1.313.3400.71	1.313.3401.71
1" NPT	18-25	19	51,5	91	14	42	1.313.1000.70	1.313.1001.70
1" NPT	13-20	19	51,5	91	14	42	1.313.1000.71	1.313.1001.71

➔ Accessories see page 71

HSK cable glands for special applications

HSK-W

PG

A collection of certification logos including RoHS (a green box with 'RoHS' in white), CE (the European Conformity mark), PG (a circular logo with 'PG'), UL (the Underwriters Laboratories logo), and SF (a circular logo with 'SF').

A technical line drawing of the HSK-W cable gland. It shows a side view with dimensions L (length), H (height), and GL (thread length). A cross-section view is also shown, indicating the internal structure and the dimension AG (thread diameter).

Material	Polyamide
Seal	Buna-N
Protection O-Ring	IP 68 Buna-N
Operating Temperature	-40 °C – 100 °C (-40 °F – 212 °F)
Colors	grey (RAL 7035), black (RAL 9005)

A 3D perspective rendering of the HSK-W cable gland, showing its L-shaped design, the cable entry point, and the mounting flange with a threaded hole.

Advice:

- Other sealing material e.g. Silicone upon request
- Other colors on request

AG	 mm	GL mm	H mm	L mm	 mm	 mm	Number grey	Number black
PG 9	4–8	8	23	45	5	19	1.313.0900.14	1.313.0901.14
PG 9	2–6	8	23	45	5	19	1.313.0900.15	1.313.0901.15
PG 11	5–10	8	27	50	6	22	1.313.1100.14	1.313.1101.14
PG 11	3–7	8	27	50	6	22	1.313.1100.15	1.313.1101.15
PG 13,5	6–12	9	30,5	57	7	24	1.313.1300.14	1.313.1301.14
PG 13,5	5–9	9	30,5	57	7	24	1.313.1300.15	1.313.1301.15
PG 16	10–14	10	32,5	59	8	27	1.313.1600.14	1.313.1601.14
PG 16	7–12	10	32,5	59	8	27	1.313.1600.15	1.313.1601.15
PG 21	13–18	11	40	73	10	33	1.313.2100.14	1.313.2101.14
PG 21	9–16	11	40	73	10	33	1.313.2100.15	1.313.2101.15
PG 29	18–25	11	51,5	91	14	42	1.313.2900.14	1.313.2901.14
PG 29	13–20	11	51,5	91	14	42	1.313.2900.15	1.313.2901.15

 Accessories see page 71

Advice:
 - Other sealing material e.g. Silicone upon request
 - Other colors on request

HSK-W rotating version

PG

Material	Polyamide
Seal	Buna-N
Protection O-Ring	IP 68 Buna-N
Operating Temperature	-40 °C – 100 °C (-40 °F – 212 °F)
Colors	grey (RAL 7035), black (RAL 9005)

Advice:
- Other sealing material e.g. Silicone upon request
- Other colors on request

AG	Ø mm	GL mm	H mm	L mm	R mm	mm	Number grey	Number black
PG 9	4–8	8	28	45	5	19	1.317.0900.14	1.317.0901.14
PG 9	2–6	8	28	45	5	19	1.317.0900.15	1.317.0901.15
PG 11	5–10	8	32	50	6	22	1.317.1100.14	1.317.1101.14
PG 11	3–7	8	32	50	6	22	1.317.1100.15	1.317.1101.15
PG 13,5	6–12	9	35,5	57	7	24	1.317.1300.14	1.317.1301.14
PG 13,5	5–9	9	35,5	57	7	24	1.317.1300.15	1.317.1301.15
PG 16	10–14	10	38,5	59	8	27	1.317.1600.14	1.317.1601.14
PG 16	7–12	11	46	73	10	33	1.317.1600.15	1.317.1601.15
PG 21	13–18	11	46	73	10	33	1.317.2100.14	1.317.2101.14
PG 21	9–16	11	46	73	10	33	1.317.2100.15	1.317.2101.15

Accessories see page 71

Advice:
 - Other sealing material e.g. Silicone upon request
 - Other colors on request

HSK cable glands for special applications

HSK-W-Flex

Metr., PG, NPT



Material Polyamide

Seal Buna-N


Protection IP 68

Operating Temperature -40 °C – 100 °C (-40 °F – 212 °F)

Colors grey (RAL 7035), black (RAL 9005)

Advice:

- Other sealing material e.g. Silicone upon request
- Other colors on request



AG	mm	d mm	GL mm	H mm	L mm	R mm	mm	Number grey	Number black
M 16 x 1,5	4-8	8,5	8	23	85	5	19	1.314.1600.50	1.314.1601.50
M 16 x 1,5	2-6	8,5	8	23	85	5	19	1.314.1600.51	1.314.1601.51
M 20 x 1,5	6-12	13	9	30,5	119	7	24	1.314.2000.50	1.314.2001.50
M 20 x 1,5	5-9	13	9	30,5	119	7	24	1.314.2000.51	1.314.2001.51
M 25 x 1,5	13-18	20	11	40	156	10	33	1.314.2500.50	1.314.2501.50
M 25 x 1,5	9-16	20	11	40	156	10	33	1.314.2500.51	1.314.2501.51
PG 9	4-8	8,5	8	23	85	5	19	1.314.0900.14	1.314.0901.14
PG 9	2-6	8,5	8	23	85	5	19	1.314.0900.15	1.314.0901.15
PG 11	5-10	10,5	8	27	103	6	22	1.314.1100.14	1.314.1101.14
PG 11	3-7	10,5	8	27	103	6	22	1.314.1100.15	1.314.1101.15
PG 13,5	6-12	13	9	30,5	119	7	24	1.314.1300.14	1.314.1301.14
PG 13,5	5-9	13	9	30,5	119	7	24	1.314.1300.15	1.314.1301.15
PG 16	10-14	15,5	10	32,5	130	8	27	1.314.1600.14	1.314.1601.14
PG 16	7-12	15,5	10	32,5	130	8	27	1.314.1600.15	1.314.1601.15
PG 21	13-18	20	11	40	156	10	33	1.314.2100.14	1.314.2101.14
PG 21	9-16	20	11	40	156	10	33	1.314.2100.15	1.314.2101.15
3/8" NPT*	4-8	8,5	15	23	85	5	19	1.314.3800.70	1.314.3801.70
3/8" NPT*	2-6	8,5	15	23	85	5	19	1.314.3800.71	1.314.3801.71
1/2" NPT*	6-12	13	13	30,5	119	7	24	1.314.1200.70	1.314.1201.70
1/2" NPT*	5-9	13	13	30,5	119	7	24	1.314.1200.71	1.314.1201.71
1/2" NPT / 16*	10-14	15,5	13	31,5	130	8	27	1.314.1216.70	1.314.1217.70
1/2" NPT / 16*	7-12	15,5	13	31,5	130	8	27	1.314.1216.71	1.314.1217.71
3/4" NPT*	13-18	20	13	40	156	10	33	1.314.3400.70	1.314.3401.70
3/4" NPT*	9-16	20	13	40	156	10	33	1.314.3400.71	1.314.3401.71

* Glands not fitted with O-Rings. We recommend the use of thread washer seal ring.
Please see page 87 for suitable thread seal ring.

➔ Accessories see page 71

HSK cable glands for special applications

HSK-M-Multi

Metr., PG, NPT



Material Nickel plated brass

Clamping insert Polyamide

Seal Elastomer


O-Ring NBR

Protection IP 65
IP 68 possible with ideal fit

Operating Temperature -40 °C – 100 °C (-40 °F – 212 °F)

Advice:

- Other sealing material e.g. Silicone upon request
- Stainless steel on request
- Elongated threads on request
- Installation instructions see page 174



AG	GL mm	H mm	mm	Number of Holes x d	Number	Number of Holes x d	Number
M 12 x 1,5	6,5	19	14		1.697.1299.50		1.697.1299.50
M 16 x 1,5	6	21	17 / 19	4 x 1,4	1.697.1600.50	2 x 3	1.697.1601.50
M 20 x 1,5	6	23	22	6 x 3	1.697.2001.50	2 x 5	1.697.2003.50
M 25 x 1,5	7	26	30	4 x 6	1.697.2500.50	3 x 7	1.697.2501.50
M 32 x 1,5	8	31	40	6 x 6,5	1.697.3200.50	4 x 9	1.697.3201.50
M 40 x 1,5	8	37	50	7 x 9	1.697.4001.50	2 x 15	1.697.4003.50
M 50 x 1,5	9	37	57		1.697.5099.50		
M 63 x 1,5	10	38	64 / 68	6 x 12	1.697.6301.50	3 x 18	1.697.6302.50
PG 7	5	19	14		1.697.0799.01		1.697.0799.01
PG 9	6	21	17	4 x 1,4	1.697.0900.01	2 x 3	1.697.0901.01
PG 11	6	22	20	2 x 4	1.697.1102.01	3 x 3	1.697.1101.01
PG 13,5	6,5	24	22	3 x 4	1.697.1302.01	2 x 5	1.697.1303.01
PG 16	6,5	23	24	4 x 4	1.697.1602.01	6 x 4	1.697.1604.01
PG 16	6,5	23	24	3 x 5,6	1.697.1606.01	2 x 6	1.697.1605.01
PG 21	7	24	30	4 x 6	1.697.2100.01	3 x 7	1.697.2101.01
PG 29	8	29	40	6 x 6,5	1.697.2900.01	4 x 9	1.697.2901.01
PG 36	8	35	50	7 x 9	1.697.3601.01	2 x 15	1.697.3603.01
PG 42	9	37	57		1.697.4299.01		1.697.4299.01
PG 48	10	38	64	6 x 12	1.697.4801.01	3 x 18	1.697.4802.01
3/8" NPT	15	21	17 / 19	4 x 1,4	1.697.3800.70	2 x 3	1.697.3801.70
1/2" NPT	13	24	24	3 x 4	1.697.1202.70	2 x 5	1.697.1203.70
3/4" NPT	13	25	30	4 x 6	1.697.3400.70	3 x 7	1.697.3401.70
1" NPT	19	29	40	6 x 6,5	1.697.1000.70	4 x 9	1.697.1001.70

The shown inserts are samples, more inserts upon request

HSK cable glands for special applications

HSK-M-FLAKA

Metr., PG, NPT



Material Nickel plated brass

Clamping insert Polyamide


Seal Elastomer

O-Ring Buna-N

Operating Temperature -40 °C – 100 °C (-40 °F – 212 °F)

Advice:

- Other sealing material e.g. Silicone upon request
- Stainless steel on request
- Elongated threads on request
- Installation instructions see page 174



AG	GL mm	H mm	mm	B x H mm	Number	B x H mm	Number
M 20 x 1,5	6	24	24	11,5 x 5	1.688.2016.50	12 x 7	1.688.2017.50
M 20 x 1,5	6	24	24	14 x 6	1.688.2018.50		
M 25 x 1,5	7	26	30	14 x 6	1.688.2500.50	14 x 7	1.688.2501.50
M 32 x 1,5	8	31	40	22 x 8	1.688.3200.50		
M 40 x 1,5	8	37	50	28,5 x 10	1.688.4000.50	29 x 5,5	1.688.4001.50
M 40 x 1,5	8	37	50	30,5 x 12	1.688.4002.50	31 x 7,5	1.688.4003.50
M 50 x 1,5	9	37	57	33,5 x 11,5	1.688.5000.50		
M 63 x 1,5	10	38	64/68	38 x 12	1.688.6300.50		
PG 16	6,5	23	24	11,5 x 5	1.688.1600.01	12 x 7	1.688.1601.01
PG 16	6,5	23	24	14 x 6	1.688.1602.01		
PG 21	7	24	30	14 x 6	1.688.2100.01	14 x 7	1.688.2101.01
PG 29	8	29	40	22 x 8	1.688.2900.01		
PG 36	8	35	50	28,5 x 10	1.688.3600.01	29 x 5,5	1.688.3601.01
PG 36	8	35	50	30,5 x 12	1.688.3602.01	31 x 7,5	1.688.3603.01
PG 42	9	37	57	33,5 x 11,5	1.688.4200.01		
PG 48	10	38	64	38 x 12	1.688.4802.01		
3/4" NPT	13	25	30	14 x 6	1.688.3400.70	14 x 7	1.688.3401.70
1" NPT	19	29	40	22 x 8	1.688.1000.70		

The shown inserts are samples, more inserts upon request

➔ Accessories see page 71

HSK cable glands for special applications

HSK-M-Flex

Metr. / Metr.-elongated



Material Nickel plated brass

Steel spring 1.4310

Clamping insert Polyamide

Seal Buna-N


O-Ring Buna-N

Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
within the specified clamping range

Operating Temperature -40 °C – 100 °C (-40 °F – 212 °F)

Advice:

- Other sealing material e.g. Silicone upon request



AG	Ø mm	GL mm	H mm	d mm	mm	Number	GL mm	Number long
M 12 x 1,5	3 – 6,5	6,5	55	6,8	14	1.623.1200.50	10	1.623.1200.30
M 12 x 1,5	2 – 5	6,5	55	6,8	14	1.623.1200.51	10	1.623.1200.31
M 16 x 1,5	4 – 8	6	66	8,2	19	1.623.1600.50	10	1.623.1600.30
M 16 x 1,5	2 – 6	6	66	8,2	19	1.623.1600.51	10	1.623.1600.31
M 16 x 1,5	5 – 10	6	77	10,3	20	1.623.1611.50	10	1.623.1611.30
M 16 x 1,5	3 – 7	6	77	10,3	20	1.623.1611.51	10	1.623.1611.31
M 20 x 1,5	6 – 12	6	88	12,3	22	1.623.2000.50	10	1.623.2000.30
M 20 x 1,5	5 – 9	6	88	12,3	22	1.623.2000.51	10	1.623.2000.31
M 20 x 1,5	10 – 14	6	98	14,3	24	1.623.2016.50	10	1.623.2016.30
M 20 x 1,5	7 – 12	6	98	14,3	24	1.623.2016.51	10	1.623.2016.31
M 25 x 1,5	13 – 18	7	111	18,4	30	1.623.2500.50	12	1.623.2500.30
M 25 x 1,5	9 – 16	7	111	18,4	30	1.623.2500.51	12	1.623.2500.31


HSK cable glands for special applications

HSK-M-Flex

PG, PG-elongated



Material	Nickel plated brass
Steel spring	1.4310
Clamping insert	Polyamide
Seal	Buna-N
O-Ring	Buna-N
Protection	IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG) within the specified clamping range
Operating Temperature	-40 °C – 100 °C (-40 °F – 212 °F)



Advice:
- Other sealing material e.g. Silicone upon request

AG	$\varnothing$ mm	GL mm	H mm	d mm	$\varnothing$ mm	Number	GL mm	Number long
PG 7	3 – 6,5	5	55	6,8	14	1.623.0700.01	10	1.623.0700.60
PG 7	2 – 5	5	55	6,8	14	1.623.0700.15	10	1.623.0700.61
PG 9	4 – 8	6	66	8,2	17	1.623.0900.01	10	1.623.0900.60
PG 9	2 – 6	6	66	8,2	17	1.623.0900.15	10	1.623.0900.61
PG 11	5 – 10	6	77	10,3	20	1.623.1100.01	10	1.623.1100.60
PG 11	3 – 7	6	77	10,3	20	1.623.1100.15	10	1.623.1100.61
PG 13,5	6 – 12	6,5	88	12,3	22	1.623.1300.01	10	1.623.1300.60
PG 13,5	5 – 9	6,5	88	12,3	22	1.623.1300.15	10	1.623.1300.61
PG 16	10 – 14	6,5	98	14,3	24	1.623.1600.01	10	1.623.1600.60
PG 16	7 – 12	6,5	98	14,3	24	1.623.1600.15	10	1.623.1600.61
PG 21	13 – 18	7	111	18,4	30	1.623.2100.01	12	1.623.2100.60
PG 21	9 – 16	7	111	18,4	30	1.623.2100.15	12	1.623.2100.61


➔ Accessories see page 71

HSK-M-Flex

NPT



Material	Nickel plated brass
Steel spring	1.4310
Clamping insert	Polyamide
Seal	Buna-N
O-Ring	Buna-N
Protection	IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG) within the specified clamping range
Operating Temperature	-40 °C – 100 °C (-40 °F – 212 °F)



Advice:
- Other sealing material e.g. Silicone upon request

AG	$\varnothing$ mm	GL mm	H mm	d mm	$\varnothing$ mm	Number
NPT 3/8"	4 – 8	15	66	8,2	17/19	1.623.3800.70
NPT 3/8"	2 – 6	15	66	8,2	17/19	1.623.3800.71
NPT 1/2"	6 – 12	13	88	12,3	22/24	1.623.1200.70
NPT 1/2"	5 – 9	13	88	12,3	22/24	1.623.1200.71
NPT 3/4"	13 – 18	13	111	18,4	33	1.623.3400.70
NPT 3/4"	9 – 16	13	111	18,4	33	1.623.3400.71

➔ Accessories see page 71

HSK cable glands for special applications

HSK-MINI

Metr., PG



RoHS

Material Nickel plated brass / 1.4305

Seal ring TPE / FPM

O-Ring Buna-N / FPM

Protection IP 68


Operating Temperature -20 °C – 100 °C (-4 °F – 212 °F) (Buna-N / TPE)
-25 °C – 200 °C (-13 °F – 392 °F) (FPM)

Advice:


- Other sealing material e.g. Silicone upon request
- Other thread pitches on request
- Stainless steel 1.4404 on request



HSK-Mini



HSK-Mini EMV




AG	mm	GL mm	H mm	mm	Number Buna-N / TPE	Number FPM
M 6 x 1	2-3,2	6	10	8	1.106.0601.50	1.106.0600.55
M 8 x 0,75	2-4,5	3,5	14,3	11	1.112.0801.01	
M 8 x 1,25	3-5	6	13	11	1.106.0801.50	1.106.0800.55
M 10 x 1,5	4-6	6	14	12	1.106.1001.50	
PG 7	2-4,5	3,5	14,3	11/15	1.112.0708.01	
HSK-Mini elongated						
M 8 x 1,25	3-5	10	13	11	1.106.0801.30	1.106.0800.35
M 10 x 1,5	4-6	10	14	12	1.106.1001.30	1.106.1000.35
HSK-Mini EMV						
M 8 x 1,25	3-5	6	13	11	1.119.0800.50	
M 10 x 1,5	4-6	6	14	12	1.119.1000.50	
HSK-Mini INOX						
M 8 x 1,25	3-5	6	13	11	1.129.0800.50	
M 10 x 1,5	3-5	6	14	12	1.129.1000.50	

HSK cable glands for special applications

HSK-XL

Metr.

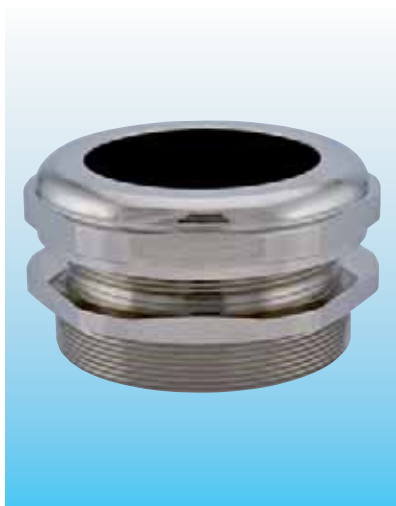

Material Nickel plated brass

Seal Buna-N


O-Ring Buna-N

Protection IP 68

Operating Temperature -40 °C – 100 °C (-40 °F – 212 °F)

Advice:

- Other sealing material e.g. Silicone upon request
- Stainless steel on request



AG	mm	GL	H	mm	Number
M 63 x 1,5	48-55	10	42	75	1.106.6375.50
M 75 x 1,5	48-55	15	42	80	1.106.7500.50
M 75 x 1,5	53-60	15	42	85	1.106.7500.51
M 80 x 2	58-65	15	42	90	1.106.8000.50
M 90 x 2	63-70	15	42	100	1.106.9000.50
M 90 x 2	68-75	15	52	100	1.106.9000.51
M 100 x 2	78-85	20	52	110	1.106.1000.50
M 100 x 2	73-80	20	52	110	1.106.1000.51
M 110 x 2	83-90	20	52	120	1.106.1100.51

HSK cable glands for special applications

HSK-XL

G

RoHS



Material Nickel plated brass

Seal Buna-N



O-Ring Buna-N

Protection IP 68

Operating Temperature -20 °C – 100 °C (-4 °F – 212 °F)

Advice:

- Other sealing material e.g. Silicone upon request
- Stainless steel on request

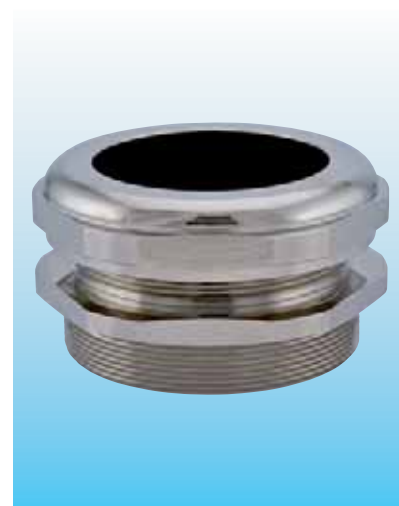

AG	Ø mm	GL mm	H mm	U mm	Number
G 2 1/2"	48–55	18	42	80	1.106.5200.01
G 2 1/2"	53–60	18	42	85	1.106.5201.01
G 3"	58–65	18	42	90 / 95	1.106.3000.01
G 3"	63–70	18	42	100	1.106.3001.01
G 4"	68–75	22	52	100 / 120	1.106.4000.01
G 4"	73–80	22	52	110 / 120	1.106.4001.01
G 4"	78–85	22	52	110 / 120	1.106.4002.01
G 4"	83–90	22	52	120	1.106.4003.01

➔ Accessories see page 71

HSK cable glands for special applications

HSK-MZ / HSK-MZ-PVDF

Metr., Metr.-elongated




Material	Nickel plated brass
Clamping insert	Polyamide / PVDF
Seal	Buna-N / FPM
O-Ring	Buna-N / FPM
Protection	IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG) within the specified clamping range
Operating Temperature	-40 °C – 100 °C (-40 °F – 212 °F) (PA) -35 °C – 150 °C (-31 °F – 302 °F) (PVDF)

Advice:

- Other sealing material e.g. Silicone upon request



See our homepage www.hummel.com
for assembling advices for maximum
cable diameters



AG	$\varnothing$ mm	GL mm	H mm	$\varnothing$ mm	Number HSK-MZ -40 °C – 100 °C -40 °F – 212 °F	Number HSK-MZ-PVDF -35 °C – 150 °C -31 °F – 302 °F	GL mm	Number HSK-MZ elongated -40 °C – 100 °C -40 °F – 212 °F
M 12 x 1,5	3 – 6,5	6,5	26	14	1.690.1200.50	1.669.1200.50	10	1.690.1200.30
M 16 x 1,5	4 – 8	6	28	17 / 19	1.690.1600.50	1.669.1600.50	10	1.690.1600.30
M 16 x 1,5	6 – 10	6	30	20	1.690.1611.50	1.669.1611.50	10	1.690.1611.30
M 20 x 1,5	6 – 12	6	33	22	1.690.2000.50	1.669.2000.50	10	1.690.2000.30
M 20 x 1,5	10 – 14	6	33	24	1.690.2016.50	1.669.2016.50	10	1.690.2016.30
M 25 x 1,5	13 – 18	7	37	30	1.690.2500.50	1.669.2500.50	12	1.690.2500.30
M 32 x 1,5	18 – 25	8	43	40	1.690.3200.50	1.669.3200.50	12	1.690.3200.30
M 40 x 1,5	22 – 32	8	50	50	1.690.4000.50	1.669.4000.50	15	1.690.4000.30
M 50 x 1,5	32 – 38	9	51	57	1.690.5000.50		15	1.690.5000.30
M 50 x 1,5	25 – 31	9	51	57	1.690.5000.51		15	1.690.5000.31
M 63 x 1,5	37 – 44	10	52	64/68	1.690.6300.50		15	1.690.6300.30
M 63 x 1,5	29 – 35	10	52	64/68	1.690.6300.51		15	1.690.6300.31

HSK cable glands for special applications

HSK-MZ / HSK-MZ-PVDF

PG, PG-elongated

RoHS



Material Nickel plated brass

Clamping insert Polyamide / PVDF

Seal Buna-N / FPM


O-Ring Buna-N / FPM

Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
within the specified clamping range

Operating Temperature -40 °C – 100 °C (-40 °F – 212 °F) (PA)
-35 °C – 150 °C (-31 °F – 302 °F) (PVDF)



Advice:
- Other sealing material e.g. Silicone upon request



AG	$\varnothing$ mm	GL mm	H mm	 mm	Number HSK-MZ -40 °C – 100 °C -40 °F – 212 °F	Number HSK-MZ-PVDF -35 °C – 150 °C -31 °F – 302 °F	GL mm	Number elongated
PG 7	3 – 6,5	5	26	14	1.690.0700.01	1.669.0700.01	10	1.690.0700.60
PG 9	4 – 8	6	28	17	1.690.0900.01	1.669.0900.01	10	1.690.0900.60
PG 11	6 – 10	6	30	20	1.690.1100.01	1.669.1100.01	10	1.690.1100.60
PG 13,5	6 – 12	6,5	33	22	1.690.1300.01	1.669.1300.01	10	1.690.1300.60
PG 16	10 – 14	6,5	33	24	1.690.1600.01	1.669.1600.01	10	1.690.1600.60
PG 21	13 – 18	7	37	30	1.690.2100.01	1.669.2100.01	12	1.690.2100.60
PG 29	18 – 25	8	43	40	1.690.2900.01	1.669.2900.01	12	1.690.2900.60
PG 36	22 – 36	8	50	50	1.690.3600.01	1.669.3600.01	15	1.690.3600.60
PG 42	32 – 38	9	51	57	1.690.4200.01	1.669.4200.01	15	1.690.4200.60
PG 42	25 – 31	9	51	57	1.690.4200.15	1.669.4200.15	15	1.690.4200.61
PG 48	37 – 44	10	52	64	1.690.4800.01	1.669.4800.01	15	1.690.4800.60
PG 48	29 – 35	10	51	64	1.690.4800.15	1.669.4800.15	15	1.690.4800.61

➔ Accessories see page 71

HSK-MZ / HSK-MZ-PVDF

NPT

RoHS



Material Nickel plated brass

Clamping insert Polyamide / PVDF

Seal Buna-N / FPM


O-Ring Buna-N / FPM

Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
within the specified clamping range

Operating Temperature -40 °C – 100 °C (-40 °F – 212 °F) (PA)
-35 °C – 150 °C (-31 °F – 302 °F) (PVDF)



Advice:
- Other sealing material e.g. Silicone upon request



AG	$\varnothing$ mm	GL mm	H mm	 mm	Number HSK-MZ -40 °C – 100 °C -40 °F – 212 °F	Number HSK-MZ-PVDF -35 °C – 150 °C -31 °F – 302 °F
3/8" NPT	4 – 8	15	28	17/19	1.690.3800.70	1.669.3800.70
1/2" NPT	7 – 12	13	33	22/24	1.690.1200.70	1.669.1200.70
3/4" NPT	13 – 18	13	37	30	1.690.3400.70	1.669.3400.70
1" NPT	18 – 25	19	43	40	1.690.1000.70	

➔ Accessories see page 71

HSK-M-W

Metr., PG



Material	Zinc die casting / Nickel plated brass
Clamping insert	Polyamide
Seal ring	Buna-N
O-Ring	Buna-N
Protection	IP 68
Operating Temperature	-40 °C – 100 °C (-40 °F – 212 °F)


Advice:

Advice:


- Other sealing material e.g. Silicone upon request



With mounting flange



With threaded connection

[illegible]

Accessories see page 71

Industrial cable glands

METRICA cable glands

Cable glands of the METRICA series are based on metric dimensions. So these glands offer space saving with optimised clamping ranges.

Both plastic and nickel plated brass versions feature recessed grooves for O-rings on the connecting thread.

In combination with the sealing O-Ring these glands keep the protection rating IP 68 also with the high pressure of 10 bars.



You can find in this chapter:

METRICA cable glands

- made of polyamide
- made of polyamide with bending protection
- made of nickel plated brass
- made of nickel plated brass in EMC and EMC-E version.

We provide variable clamping ranges and thread lengths.

For any further question please do not hesitate to contact us. We look forward to develop solutions together with you. You profit from our vast knowledge in development, engineering and production technology.

Contact us:

E-Mail: info.et@hummel.com

Tel.: +49(0) 76 66/9 11 10-0

METRICA-P, METRICA-P-Flex

Metr.



Material Polyamide

Seal Buna-N



Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
within the specified clamping range, only with optional O-Ring

Operating Temperature -40 °C – 100 °C (-40 °F – 212 °F)

Colors grey (RAL 7035), black (RAL 9005),
blue (RAL 5012) for the intrinsic safety "i"

Advice:

- With additional pre-assembled O-Ring upon request
- Please find suitable O-Ring on page 86
- Other sealing material e.g. Silicone upon request
- Other colors on request



AG	Ø mm	GL mm	H mm	mm	d mm	Number grey	Number black	Number blue
M 12 x 1,5	4 – 7	8	22	15		1.218.1200.50	1.218.1201.50	1.218.1202.50
M 12 x 1,5	2 – 5	8	22	15		1.218.1200.51	1.218.1201.51	1.218.1202.51
M 16 x 1,5	6 – 10	8	26	19		1.218.1600.50	1.218.1601.50	1.218.1602.50
M 16 x 1,5	3 – 7	8	26	19		1.218.1600.51	1.218.1601.51	1.218.1602.51
M 20 x 1,5	8 – 13	9	29	24		1.218.2000.50	1.218.2001.50	1.218.2002.50
M 20 x 1,5	7 – 10	9	29	24		1.218.2000.51	1.218.2001.51	1.218.2002.51
M 25 x 1,5	11 – 17	10	33	30		1.218.2500.50	1.218.2501.50	1.218.2502.50
M 25 x 1,5	8 – 13	10	33	30		1.218.2500.51	1.218.2501.51	1.218.2502.51
M 32 x 1,5	11 – 21	10	41	36		1.218.3200.50	1.218.3201.50	1.218.3202.50
M 32 x 1,5	10 – 15	10	41	36		1.218.3200.51	1.218.3201.51	1.218.3202.51
M 40 x 1,5	19 – 28	12	46	46		1.218.4000.50	1.218.4001.50	1.218.4002.50
M 40 x 1,5	15 – 23	12	46	46		1.218.4000.51	1.218.4001.51	1.218.4002.51
M 50 x 1,5	27 – 35	12	52	55		1.218.5000.50	1.218.5001.50	1.218.5002.50
M 50 x 1,5	22 – 29	12	52	55		1.218.5000.51	1.218.5001.51	1.218.5002.51
M 63 x 1,5	36 – 48	12	57	68		1.218.6300.50	1.218.6301.50	1.218.6302.50
M 63 x 1,5	28 – 39	12	57	68		1.218.6300.51	1.218.6301.51	1.218.6302.51

METRICA-P-Flex

M 12 x 1,5	4 – 7	8	55,5	15	7,5	1.238.1200.50	1.238.1201.50	
M 12 x 1,5	2 – 5	8	55,5	15	7,5	1.238.1200.51	1.238.1201.51	
M 16 x 1,5	6 – 10	8	67	19	10,5	1.238.1600.50	1.238.1601.50	
M 16 x 1,5	3 – 7	8	67	19	10,5	1.238.1600.51	1.238.1601.51	
M 20 x 1,5	8 – 13	9	92,5	24	14	1.238.2000.50	1.238.2001.50	
M 20 x 1,5	7 – 10	9	92,5	24	14	1.238.2000.51	1.238.2001.51	
M 25 x 1,5	11 – 17	10	113	30	19	1.238.2500.50	1.238.2501.50	
M 25 x 1,5	8 – 13	10	113	30	19	1.238.2500.51	1.238.2501.51	

➔ Accessories see page 71

METRICA-P, METRICA-P-Flex

Metr.-elongated



Material Polyamide

Seal Buna-N



Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
within the specified clamping range, only with optional O-Ring

Operating Temperature -40 °C – 100 °C (-40 °F – 212 °F)

Colors grey (RAL 7035), black (RAL 9005),
blue (RAL 5012) for the intrinsic safety "i"

Advice:

- With additional pre-assembled O-Ring upon request
- Please find suitable O-Ring on page 86
- Other sealing material e.g. Silicone upon request
- Other colors on request



AG	Ø mm	GL mm	H mm	mm	d mm	Number grey	Number black	Number blue
M 12 x 1,5	4 – 7	15	22	15		1.218.1200.30	1.218.1201.30	1.218.1202.30
M 12 x 1,5	2 – 5	15	22	15		1.218.1200.31	1.218.1201.31	1.218.1202.31
M 16 x 1,5	6 – 10	15	26	19		1.218.1600.30	1.218.1601.30	1.218.1602.30
M 16 x 1,5	3 – 7	15	26	19		1.218.1600.31	1.218.1601.31	1.218.1602.31
M 20 x 1,5	8 – 13	15	29	24		1.218.2000.30	1.218.2001.30	1.218.2002.30
M 20 x 1,5	7 – 10	15	29	24		1.218.2000.31	1.218.2001.31	1.218.2002.31
M 25 x 1,5	11 – 17	15	33	30		1.218.2500.30	1.218.2501.30	1.218.2502.30
M 25 x 1,5	8 – 13	15	33	30		1.218.2500.31	1.218.2501.31	1.218.2502.31
M 32 x 1,5	11 – 21	15	41	36		1.218.3200.30	1.218.3201.30	1.218.3202.30
M 32 x 1,5	10 – 15	15	41	36		1.218.3200.31	1.218.3201.31	1.218.3202.31
M 40 x 1,5	19 – 28	18	46	46		1.218.4000.30	1.218.4001.30	1.218.4002.30
M 40 x 1,5	15 – 23	18	46	46		1.218.4000.31	1.218.4001.31	1.218.4002.31
M 50 x 1,5	27 – 35	18	52	55		1.218.5000.30	1.218.5001.30	1.218.5002.30
M 50 x 1,5	22 – 29	18	52	55		1.218.5000.31	1.218.5001.31	1.218.5002.31
M 63 x 1,5	36 – 48	18	57	68		1.218.6300.30	1.218.6301.30	1.218.6302.30
M 63 x 1,5	28 – 39	18	57	68		1.218.6300.31	1.218.6301.31	1.218.6302.31

METRICA-P-Flex

M 12 x 1,5	4 – 7	15	55,5	15	7,5	1.238.1200.30	1.238.1201.30	
M 12 x 1,5	2 – 5	15	55,5	15	7,5	1.238.1200.31	1.238.1201.31	
M 16 x 1,5	6 – 10	15	67	19	10,5	1.238.1600.30	1.238.1601.30	
M 16 x 1,5	3 – 7	15	67	19	10,5	1.238.1600.31	1.238.1601.31	
M 20 x 1,5	8 – 13	15	92,5	24	14	1.238.2000.30	1.238.2001.30	
M 20 x 1,5	7 – 10	15	92,5	24	14	1.238.2000.31	1.238.2001.31	
M 25 x 1,5	11 – 17	15	113	30	19	1.238.2500.30	1.238.2501.30	
M 25 x 1,5	8 – 13	15	113	30	19	1.238.2500.31	1.238.2501.31	

METRICA-M

Metr., Metr.-elongated



Material Nickel plated brass

Clamping insert Polyamide

Seal Buna-N

O-Ring Buna-N

Protection IP 68 – 10 bar (NEMA 6 – 150 PSIG)
within the specified clamping range


Operating Temperature -40 °C – 100 °C (-40 °F – 212 °F)

Advice:


- Other sealing material e.g. Silicone upon request



Metr.



Metr.-elongated




AG	$\varnothing$ mm	GL mm	H mm	 mm	Number	GL mm	Number elongated
M 12 x 1,5	4 – 7	6	20	14	1.618.1200.50	10	1.618.1200.30
M 12 x 1,5	2 – 5	6	20	14	1.618.1200.51	10	1.618.1200.31
M 16 x 1,5	6 – 10	6	25	19	1.618.1600.50	10	1.618.1600.30
M 16 x 1,5	3 – 7	6	25	19	1.618.1600.51	10	1.618.1600.31
M 20 x 1,5	8 – 13	6,5	26	24	1.618.2000.50	10	1.618.2000.30
M 20 x 1,5	7 – 10	6,5	26	24	1.618.2000.51	10	1.618.2000.31
M 25 x 1,5	11 – 17	7	29	29	1.618.2500.50	12	1.618.2500.30
M 25 x 1,5	8 – 13	7	29	29	1.618.2500.51	12	1.618.2500.31
M 32 x 1,5	11 – 21	8	37	34	1.618.3200.50	12	1.618.3200.30
M 32 x 1,5	10 – 15	8	37	34	1.618.3200.51	12	1.618.3200.31
M 40 x 1,5	19 – 28	8	40,5	44	1.618.4000.50	15	1.618.4000.30
M 40 x 1,5	15 – 23	8	40,5	44	1.618.4000.51	15	1.618.4000.31
M 50 x 1,5	27 – 35	9	49,5	55	1.618.5000.50	15	1.618.5000.30
M 50 x 1,5	22 – 29	9	49,5	55	1.618.5000.51	15	1.618.5000.31
M 63 x 1,5	34 – 48	10	49	68	1.618.6300.50	15	1.618.6300.30
M 63 x 1,5	28 – 39	10	49	68	1.618.6300.51	15	1.618.6300.31

METRICA-M-EMV-E

Metr.



Material	Nickel plated brass
Clamping insert	Polyamide
Seal	Buna-N
O-Ring	Buna-N
Protection	IP 68 – 10 bar (NEMA 6 – 150 PSIG) within the specified clamping range
Operating Temperature	-40 °C – 100 °C (-40 °F – 212 °F)



AG	$\varnothing$ mm	GL mm	H mm	$\varnothing$ mm	Number
M 12 x 1,5	3 – 6,5	6	19,4	14	1.607.1200.50
M 16 x 1,5	4,5 – 10	6	24,4	19	1.607.1600.50
M 20 x 1,5	6 – 12	6	25,4	22	1.607.2013.50
M 20 x 1,5	7,5 – 14	6	28,3	24	1.607.2000.50
M 25 x 1,5	9 – 17	7	29,3	29	1.607.2500.50
M 32 x 1,5	11 – 21	8	37,7	34	1.607.3200.50
M 40 x 1,5	19 – 28	8	40,7	44	1.607.4000.50
M 50 x 1,5	27 – 35	9	50,7	55	1.607.5000.50
M 63 x 1,5	34 – 48	10	55,7	68	1.607.6300.50



METRICA-M-EMV

Metr., Metr.-elongated



Material Nickel plated brass

Clamping insert Polyamide

Seal Buna-N


O-Ring Buna-N

Protection IP 68 – 10 bar (NEMA 6 – 150 PSIG)
within the specified clamping range

Operating Temperature -40 °C – 100 °C (-40 °F – 212 °F)

Advice:

- Other sealing material e.g. Silicone upon request



AG	$\varnothing$ mm	GL mm	H mm	$\varnothing$ mm	Number	GL mm	Number elongated
M 12 x 1,5	4 – 7	6	20	14	1.683.1200.50	10	1.683.1200.30
M 12 x 1,5	2 – 5	6	20	14	1.683.1200.51	10	1.683.1200.31
M 16 x 1,5	6 – 10	6	25	19	1.683.1600.50	10	1.683.1600.30
M 16 x 1,5	3 – 7	6	25	19	1.683.1600.51	10	1.683.1600.31
M 20 x 1,5	8 – 13	6,5	26	24	1.683.2000.50	10	1.683.2000.30
M 20 x 1,5	7 – 10	6,5	26	24	1.683.2000.51	10	1.683.2000.31
M 25 x 1,5	11 – 17	7	29	29	1.683.2500.50	12	1.683.2500.30
M 25 x 1,5	8 – 13	7	29	29	1.683.2500.51	12	1.683.2500.31
M 32 x 1,5	11 – 21	8	37	34	1.683.3200.50	12	1.683.3200.30
M 32 x 1,5	10 – 15	8	37	34	1.683.3200.51	12	1.683.3200.31
M 40 x 1,5	19 – 28	8	40,5	44	1.683.4000.50	15	1.683.4000.30
M 40 x 1,5	15 – 23	8	40,5	44	1.683.4000.51	15	1.683.4000.31
M 50 x 1,5	27 – 35	9	49,5	55	1.683.5000.50	15	1.683.5000.30
M 50 x 1,5	22 – 29	9	49,5	55	1.683.5000.51	15	1.683.5000.31
M 63 x 1,5	34 – 48	10	49	68	1.683.6300.50	15	1.683.6300.30
M 63 x 1,5	28 – 39	10	49	68	1.683.6300.51	15	1.683.6300.31



Industrial cable glands

Miscellaneous cable glands

Cable glands in this chapter have different designs to the modern clamping finger cable glands. Some types are perfect for high temperature applications or provide special options for clamping ranges.



You can find in this chapter:

Miscellaneous cable glands

- WADI cable glands with various clamping and temperature ranges
- DIN 46320 cable glands made of plastic or nickel plated brass
- Z cable glands made of nickel plated brass. These glands meet the DIN 46320 standard made from nickel plated brass but with additional strain relief
- SE cable glands made of nickel plated brass. These glands meet the DIN 46320 standard and are made of nickel plated brass with additional EMC attenuation
- ZSE cable glands made of nickel plated brass. These glands meet the "Z standard" but with additional EMC attenuation

We provide variable clamping ranges and thread lengths.

For any further question please do not hesitate to contact us. We look forward to develop solutions together with you. You profit from our vast knowledge in development, engineering and production technology.

Contact us:

E-Mail: info.et@hummel.com

Tel.: +49 (0) 76 66/9 11 10-0

Miscellaneous cable glands

WADI-A

Metr.




Material Nickel plated brass

Seal ring Buna-N

O-Ring Buna-N

Protection IP 68 (NEMA 6)

Operating Temperature -20 °C – 100 °C (-4 °F – 212 °F)
short time exposure 130 °C (266 °F)



AG	$\varnothing$ mm	GL mm	H mm	mm	Number
M 12 x 1,5	4–6	5	16	14	1.106.1201.50
M 16 x 1,5	4–9	5	18	18	1.106.1601.50
M 20 x 1,5	7–13	6	22	22	1.106.2001.50
M 25 x 1,5	10–18	7	23	28	1.106.2501.50
M 32 x 1,5	20–24	8	26	35	1.106.3201.50
M 40 x 1,5	27–32	8	27	45	1.106.4001.50
M 50 x 1,5	35–40	10	28	55	1.106.5001.50
M 63 x 1,5	45–52	10	36	68	1.106.6301.50

Miscellaneous cable glands

WADI-A

PG

Material	Nickel plated brass
Seal ring	Buna-N
O-Ring	Buna-N
Protection	IP 68 (NEMA 6)
Operating Temperature	-20 °C – 100 °C (-4 °F – 212 °F) short time exposure 130 °C (266 °F)

AG	$\varnothing$ mm	GL mm	H mm	$\varnothing$ mm	Number	$\varnothing$ mm	Number	$\varnothing$ mm	Number
PG 7	2 – 3	6	16	14	1.106.0701.01	4 – 6,5	1.106.0700.01	6,5 – 8	1.106.0702.01
PG 9	4 – 5	6	17	18	1.106.0904.01	5 – 7	1.106.0900.01	7 – 10	1.106.0902.01
PG 11	5 – 7	6	20	18	1.106.1101.01	7 – 10	1.106.1103.01	8 – 12	1.106.1100.01
PG 13,5	7 – 10	6	21	24	1.106.1303.01	9 – 12	1.106.1300.01	11 – 15	1.106.1304.01
PG 16	7 – 10	6	21	24	1.106.1603.01	9 – 12	1.106.1600.01	11 – 15	1.106.1604.01
PG 21	14 – 17	7,5	22,5	32	1.106.2102.01	16 – 20,5	1.106.2103.01	19 – 22	1.106.2101.01
PG 29	19 – 22,5	8	24	40	1.106.2901.01	20 – 26	1.106.2902.01		
PG 29	22 – 28	8	24	40	1.106.2903.01	26 – 32	1.106.2904.01		

➡ Accessories see page 71

→ Accessories see page 71

WADI-A two piece sealing insert

PG

RoHS

Material Nickel plated brass

Seal ring Buna-N (multi-perforated)

O-Ring Buna-N

Protection IP 68 (NEMA 6)

Operating Temperature
 -20 °C – 100 °C (-4 °F – 212 °F)
 short time exposure 130 °C (266 °F)

AG	$\varnothing$ mm	GL mm	H mm	 mm	Number
PG 11	5–12	6	18	20	1.106.1104.01
PG 13,5	8–15	6	21	24	1.106.1301.01
PG 16	8–15	6	21	24	1.106.1601.01
PG 21	11–20,5	7,5	22,5	32	1.106.2100.01
PG 29	18–26	8	24	40	1.106.2900.01
PG 36	25–35	8	29	50	1.106.3600.01
PG 42	35–45	10	31	60	1.106.4200.01
PG 48	38–49	11	33	64	1.106.4800.01

Accessories see page 71

→ Accessories see page 71


Miscellaneous cable glands

WADI-A-FPM

Metr.



Material	Nickel plated brass
Seal ring	FPM
O-Ring	FPM
Protection	IP 68 (NEMA 6)
Operating Temperature	-25 °C – 200 °C (-13 °F – 392 °F)



AG	mm	GL	H	mm	Number
M 12 x 1,5	4-6	5	18	14	1.106.1200.58
M 16 x 1,5	7-9	5	19	18	1.106.1600.58
M 20 x 1,5	10-13	6	21	22	1.106.2000.58
M 25 x 1,5	15-18	7	23	28	1.106.2500.58
M 32 x 1,5	20-24	8	26	35	1.106.3200.58
M 40 x 1,5	27-32	8	27	45	1.106.4000.58
M 50 x 1,5	35-40	10	28	55	1.106.5000.58
M 63 x 1,5	45-52	10	36	68	1.106.6300.58


Accessories see page 71

WADI-A-FPM two piece sealing insert

Metr.



Material	Nickel plated brass
Seal ring	FPM (multi-perforated)
O-Ring	FPM
Protection	IP 68 (NEMA 6)
Operating Temperature	-25 °C – 200 °C (-13 °F – 392 °F)



AG	mm	GL	H	mm	Number
M 16 x 1,5	4-9	5	19	18	1.106.1601.58
M 20 x 1,5	7-13	6	21	22	1.106.2001.58
M 25 x 1,5	10-18	7	23	28	1.106.2501.58
M 32 x 1,5	16-24	8	26	35	1.106.3201.58
M 40 x 1,5	22-32	8	27	45	1.106.4001.58
M 50 x 1,5	30-40	10	28	55	1.106.5001.58
M 63 x 1,5	38-52	10	36	68	1.106.6301.58

Accessories see page 71


Miscellaneous cable glands

WADI-A-FPM

PG

RoHS





Material	Nickel plated brass
Seal ring	FPM
O-Ring	FPM
Protection	IP 68 (NEMA 6)
Operating Temperature	-25 °C – 200 °C (-13 °F – 392 °F)



AG	 mm	GL mm	H mm	 mm	Number
PG 7	5–7	6	16	14	1.106.0700.80
PG 9	6–8	6	17	18	1.106.0900.80
PG 9	7–10	6	17	18	1.106.0901.80
PG 11	6–8	6	20	18	1.106.1100.80
PG 11	7–10	6	20	18	1.106.1101.80
PG 11	8–12	6	20	18	1.106.1102.80
PG 13,5	11–15	6	21	24	1.106.1300.80
PG 16	11–15	6	21	24	1.106.1600.80
PG 21	15–20,5	7,5	22,5	32	1.106.2100.80
PG 29	20–26	8	24	40	1.106.2900.80
PG 36	30–35	8	29	50	1.106.3600.80
PG 42	40–45	10	31	60	1.106.4200.80
PG 48	42–49	11	33	64	1.106.4800.80

WADI-A-FPM two piece sealing insert

PG

RoHS

Material Nickel plated brass

Seal ring FPM (multi-perforated)

O-Ring FPM

Protection IP 68 (NEMA 6)

Operating Temperature -25 °C – 200 °C (-13 °F – 392 °F)

AG

mm

GL
mm

H
mm

mm

Number

PG 11	5–12	6	20	18	1.106.1103.80
PG 13,5	8–15	6	21	24	1.106.1301.80
PG 16	8–15	6	21	24	1.106.1601.80
PG 21	11–20,5	7,5	22,5	32	1.106.2101.80
PG 29	18–26	8	24	40	1.106.2901.80
PG 36	25–35	8	29	50	1.106.3601.80
PG 42	35–45	10	30	60	1.106.4201.80
PG 48	34–49	11	33	64	1.106.4801.80

Accessories see page 71

➔ Accessories see page 71

Miscellaneous cable glands

DIN 46320-A-FS with Seal ring No. 6

PG

Material Styrene Butadiene / Polyamide

Seal ring Soft rubber / Buna-N


Protection IP 54,
with thread seal ring IP 65

Operating Temperature -20 °C – 60 °C (-4 °F – 140 °F) (Soft rubber)
-20 °C – 80 °C (-4 °F – 176 °F) (Buna-N)

Colors grey (RAL 7035)

Advice:

- Metric thread on request
- Please see page 87 for suitable thread seal ring



AG	$\varnothing$ mm	GL mm	H mm	$\varnothing$ mm	Number SB / Soft rubber -20 °C – 60 °C -4 °F – 140 °F	Number PA / Buna-N -20 °C – 80 °C -4 °F – 176 °F
PG 7	3,5–6	8	20	15 / 13	1.201.0700.10	1.202.0700.11
PG 9	4,5–7	8	21	19 / 16	1.201.0900.10	1.202.0900.11
PG 11	6–9	8	22	22 / 19	1.201.1100.10	1.202.1100.11
PG 13,5	9–12	9	26	24 / 21	1.201.1300.10	1.202.1300.11
PG 16	11–14	10	28	27 / 23	1.201.1600.10	1.202.1600.11
PG 21	14–18	11	32	33 / 30	1.201.2100.10	1.202.2100.11
PG 29	18–25	11	35	42 / 40	1.201.2900.10	1.202.2900.11
PG 36	25–32	13	39	53 / 50	1.201.3600.10	1.202.3600.11
PG 42	30–38	13	44	60 / 55	1.201.4200.10	1.202.4200.11
PG 48	34–42	14	44	65 / 60	1.201.4800.10	1.202.4800.11

➔ Accessories see page 71

DIN 46320-A-FS with multiperforated seal ring No. 7

PG

Material Styrene Butadiene / Polyamide

Seal ring Soft rubber / Buna-N (multiperforated)


Protection IP 54,
with thread seal ring IP 65

Operating Temperature -20 °C – 60 °C (-4 °F – 140 °F) (Soft rubber)
-20 °C – 80 °C (-4 °F – 176 °F) (Buna-N)

Colors grey (RAL 7035)

Advice:

- Metric thread on request
- Please see page 87 for suitable thread seal ring



AG	$\varnothing$ mm	GL mm	H mm	$\varnothing$ mm	Number SB / Soft rubber -20 °C – 60 °C -4 °F – 140 °F	Number PA / Buna-N -20 °C – 80 °C -4 °F – 176 °F
PG 9	4–10	8	21	19 / 16	1.201.0902.10	1.202.0901.11
PG 11	6,5–12	8	22	22 / 19	1.201.1102.10	1.202.1101.11
PG 13,5	6,5–13,5	9	26	24 / 21	1.201.1302.10	1.202.1301.11
PG 16	6,5–16	10	28	27 / 23	1.201.1602.10	1.202.1601.11
PG 21	9–20	11	32	33 / 30	1.201.2102.10	1.202.2101.11
PG 29	17–28	11	35	42 / 40	1.201.2902.10	1.202.2901.11
PG 36	23–34	13	39	53 / 50	1.201.3602.10	1.202.3601.11
PG 42	29–40	13	44	60 / 55	1.201.4202.10	1.202.4201.11
PG 48	35–46	14	44	65 / 60	1.201.4802.10	1.202.4801.11

➔ Accessories see page 71

Miscellaneous cable glands

DIN 46320-C4-Ms with Seal ring No. 6

PG

RoHS



Material Nickel plated brass

Seal ring Soft rubber / Buna-N

Protection IP 54,
with thread seal ring IP 65


Operating Temperature -20 °C – 60 °C (-4 °F – 140 °F) (Soft rubber)
-20 °C – 80 °C (-4 °F – 176 °F) (Buna-N)

Advice:

- Metric thread on request
- Please see page 87 for suitable thread seal ring



- This cable gland is available with additional strain relief (see page 69) and EMC attenuation (see page 70)



AG	mm	GL mm	H mm	mm	Number Soft rubber -20 °C – 60 °C -4 °F – 140 °F	Number Buna-N -20 °C – 80 °C -4 °F – 176 °F
PG 7	6–8	5	15	14/13	1.101.0700.01	1.101.0703.01
PG 9	8–10	6	15	17/15	1.101.0900.01	1.101.0903.01
PG 11	10–12	6	17	20/18	1.101.1100.01	1.101.1103.01
PG 13,5	12–14	6,5	20	22/20	1.101.1300.01	1.101.1303.01
PG 16	14–16	6,5	22	24/22	1.101.1600.01	1.101.1603.01
PG 21	17–19	7	24	30/28	1.101.2100.01	1.101.2103.01
PG 29	26–28	8	26	40/37	1.101.2900.01	1.101.2903.01
PG 36	33–35	9	30	50/47	1.101.3600.01	1.101.3603.01
PG 42	39–41	10	34	57/54	1.101.4200.01	1.101.4203.01
PG 48	45–47	10	37	64/60	1.101.4800.01	1.101.4803.01

➔ Accessories see page 71

DIN 46320-C4-Ms with multiperforated seal ring No. 7

PG

RoHS



Material Nickel plated brass

Seal ring Buna-N (multiperforated)

Protection IP 54,
with thread seal ring IP 65


Operating Temperature -20 °C – 80 °C (-4 °F – 176 °F)

Advice:

- Metric thread on request
- Please see page 87 for suitable thread seal ring



- This cable gland is available with additional strain relief (see page 69) and EMC attenuation (see page 70)



AG	mm	GL mm	H mm	mm	Number
PG 9	4–10	6	15	17/15	1.101.0901.01
PG 11	6,5–12	6	17	20/18	1.101.1101.01
PG 13,5	6,5–13,5	6,5	20	22/20	1.101.1301.01
PG 16	6,5–16	6,5	22	24/22	1.101.1601.01
PG 21	9–20	7	24	30/28	1.101.2101.01
PG 29	17–28	8	26	40/37	1.101.2901.01
PG 36	23–34	9	30	50/47	1.101.3601.01
PG 42	29–40	10	34	57/54	1.101.4201.01
PG 48	35–46	10	37	64/60	1.101.4801.01

➔ Accessories see page 71

Miscellaneous cable glands

Z (DIN 46320-C4-Ms with Seal ring No. 6 with additional strain relief)


Metr.



Material Nickel plated brass

Seal ring Soft rubber / Buna-N

Protection IP 54,
with thread seal ring IP 65

Operating Temperature -20 °C – 60 °C (-4 °F – 140 °F) (Soft rubber)
-20 °C – 80 °C (-4 °F – 176 °F) (Buna-N)


Advice:

- Please see page 87 for suitable thread seal ring

AG	$\varnothing$ mm	GL mm	H mm	 mm	Number Soft rubber -20 °C – 60 °C -4 °F – 160 °F	Number Buna-N -20 °C – 80 °C -4 °F – 176 °F
M 12 x 1,5	6–8	5	22	14 / 16	1.105.1200.50	1.105.1200.51
M 16 x 1,5	8–10	5	25	18 / 19	1.105.1600.50	1.105.1600.51
M 20 x 1,5	10–12	6	26	22 / 22	1.105.2000.50	1.105.2000.51
M 20 x 1,5	12–14	6	27,5	22 / 24	1.105.2013.50	1.105.2013.51
M 20 x 1,5	13–15	6	28,5	24 / 26	1.105.2016.50	1.105.2016.51
M 25 x 1,5	17–19	6	33	30 / 33	1.105.2500.50	1.105.2500.51
M 32 x 1,5	26–27	6	36	39 / 42	1.105.3200.50	1.105.3200.51
M 40 x 1,5	33–35	7	41	50 / 52	1.105.4000.50	1.105.4000.51
M 50 x 1,5	39–41	8	45	57 / 59	1.105.5000.50	1.105.5000.51
M 63 x 1,5	43–45	9	48	66 / 64	1.105.6300.50	1.105.6300.51

➔ Accessories see page 71

Z (DIN 46320-C4-Ms with multiperforated seal ring No. 7 with additional strain relief)

Metr.




Material Nickel plated brass

Seal ring Buna-N (multiperforated)

Protection IP 54,
with thread seal ring IP 65

Operating Temperature -20 °C – 80 °C (-4 °F – 176 °F)



Advice:

- Please see page 87 for suitable thread seal ring

AG	$\varnothing$ mm	GL mm	H mm	 mm	Number
M 16 x 1,5	6,5–10	5	25	18 / 19	1.105.1600.52
M 20 x 1,5	7,5–12	6	26	22 / 22	1.105.2000.52
M 20 x 1,5	8,5–13,5	6	27,5	22 / 24	1.105.2013.52
M 20 x 1,5	10,5–15	6	28,5	24 / 26	1.105.2016.52
M 25 x 1,5	13–20	6	33	30 / 33	1.105.2500.52
M 32 x 1,5	19–28	6	36	39 / 42	1.105.3200.52
M 40 x 1,5	24–34	7	41	50 / 52	1.105.4000.52
M 50 x 1,5	34–40	8	45	57 / 59	1.105.5000.52
M 63 x 1,5	39–46	9	48	66 / 64	1.105.6300.52

➔ Accessories see page 71

Miscellaneous cable glands

Z (DIN 46320-C4-Ms with Seal ring No. 6 with additional strain relief)

PG

RoHS



Material Nickel plated brass

Seal ring Soft rubber / Buna-N


Protection IP 54,
with thread seal ring IP 65

Operating Temperature -20 °C – 60 °C (-4 °F – 140 °F) (Soft rubber)
-20 °C – 80 °C (-4 °F – 176 °F) (Buna-N)



Advice:

- Please see page 87 for suitable thread seal ring
- Please see page 70 for the EMC version of this gland



AG	$\varnothing$ mm	GL mm	H mm	$\varnothing$ mm	Number Soft rubber -20 °C – 60 °C -4 °F – 140 °F	Number Buna-N -20 °C – 80 °C -4 °F – 176 °F
PG 7	6–8	5	22	14 / 16	1.105.0700.01	1.105.0703.01
PG 9	8–10	6	25	17 / 19	1.105.0900.01	1.105.0903.01
PG 11	10–12	6	26	20 / 22	1.105.1100.01	1.105.1103.01
PG 13,5	12–14	6,5	27,5	22 / 24	1.105.1300.01	1.105.1303.01
PG 16	14–16	6,5	28,5	24 / 26	1.105.1600.01	1.105.1603.01
PG 21	17–19	7	33	30 / 33	1.105.2100.01	1.105.2103.01
PG 29	26–28	8	36	40 / 42	1.105.2900.01	1.105.2903.01
PG 36	33–35	9	41	50 / 52	1.105.3600.01	1.105.3603.01
PG 42	39–41	10	45	57 / 59	1.105.4200.01	1.105.4203.01
PG 48	43–45	10	48	64 / 64	1.105.4800.01	1.105.4803.01

➔ Accessories see page 71

Z (DIN 46320-C4-Ms with multiperforated seal ring No. 7 with additional strain relief)

PG

RoHS



Material Nickel plated brass

Seal ring Buna-N (multiperforated)


Protection IP 54,
with thread seal ring IP 65

Operating Temperature -20 °C – 80 °C (-4 °F – 176 °F)



Advice:

- Please see page 87 for suitable thread seal ring
- Please see page 70 for the EMC version of this gland



AG	$\varnothing$ mm	GL mm	H mm	$\varnothing$ mm	Number
PG 9	6,5–10	6	25	17 / 19	1.105.0901.01
PG 11	7,5–12	6	26	20 / 22	1.105.1101.01
PG 13,5	8,5–13,5	6,5	27,5	22 / 24	1.105.1301.01
PG 16	10,5–16	6,5	28,5	24 / 26	1.105.1601.01
PG 21	13–20	7	33	30 / 33	1.105.2101.01
PG 29	19–28	8	36	40 / 42	1.105.2901.01
PG 36	24–34	9	41	50 / 52	1.105.3601.01
PG 42	34–40	10	45	57 / 59	1.105.4201.01
PG 48	39–46	10	48	64 / 64	1.105.4801.01

➔ Accessories see page 71

Miscellaneous cable glands

SE (DIN 46320-C4-Ms with EMC attenuation)

PG

Material Nickel plated brass


Seal ring Buna-N

Protection IP 54,
with thread seal ring IP 65

Operating Temperature -20 °C – 80 °C (-4 °F – 176 °F)

RoHS
Advice:

- Please see page 87 for suitable thread seal ring



AG	$\varnothing$ mm	GL mm	H mm	$\varnothing$ mm	E mm	Number
PG 9	4–10	7	17	17/15	6	1.680.0906.01
PG 11	6,5–12	7	20	20/18	8	1.680.1108.01
PG 13,5	6,5–13,5	8	21	22/20	10	1.680.1310.01
PG 13,5	6,5–13,5	8	21	22/20	12	1.680.1312.01
PG 16	6,5–16	8	24	24/22	12	1.680.1612.01
PG 16	6,5–16	8	24	24/22	14	1.680.1614.01
PG 21	9–20	10	27	30/28	15	1.680.2115.01
PG 21	9–20	10	27	30/28	18	1.680.2118.01
PG 29	17–28	10	30	40/37	20	1.680.2920.01
PG 29	17–28	10	30	40/37	24	1.680.2924.01

Accessories see page 71

ZSE (DIN 46320-C4-Ms with EMC attenuation with additional strain relief)

PG

Material Nickel plated brass


Seal ring Buna-N

Protection IP 54,
with thread seal ring IP 65

Operating Temperature -20 °C – 80 °C (-4 °F – 176 °F)

RoHS
Advice:

- Please see page 87 for suitable thread seal ring




AG	$\varnothing$ mm	GL mm	H mm	$\varnothing$ mm	E mm	Number
PG 9	6,5–10	7	27	17 / 19	6	1.681.0906.01
PG 11	7,5–12	7	29	20 / 22	7	1.681.1107.01
PG 11	7,5–12	7	29	20 / 22	8	1.681.1108.01
PG 13,5	8,5–13,5	8	30	22 / 24	10	1.681.1310.01
PG 13,5	8,5–13,5	8	30	22 / 24	12	1.681.1312.01
PG 16	10,5–16	8	31	24 / 26	12	1.681.1612.01
PG 16	10,5–16	8	31	24 / 26	14	1.681.1614.01
PG 21	13–20	10	36	30 / 33	15	1.681.2115.01
PG 21	13–20	10	36	30 / 33	18	1.681.2118.01
PG 29	19–28	10	40	40 / 42	20	1.681.2920.01
PG 29	19–28	10	40	40 / 42	24	1.681.2924.01

Accessories see page 71

Industrial cable glands

Accessories

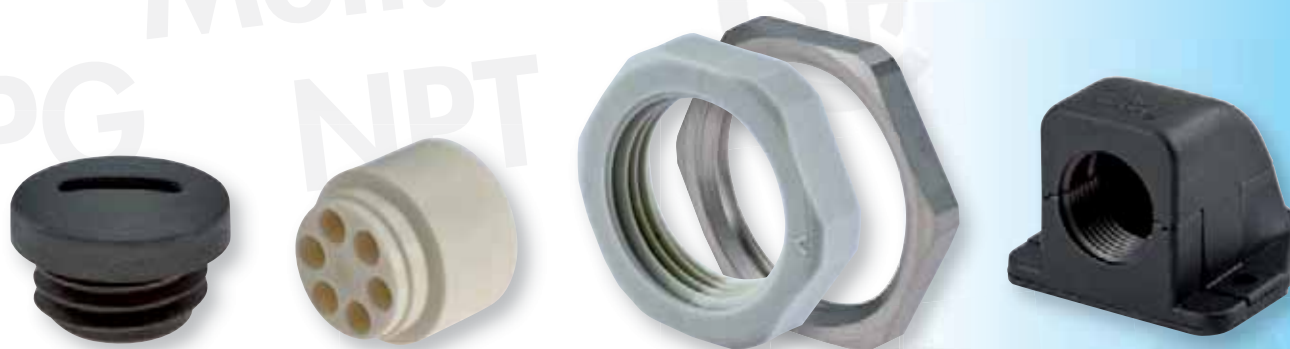

You can find in this chapter accessories for all series of our industrial cable glands:

- Accessories made of plastic from page 72
- Accessories made of nickel plated brass from page 88
- Accessories made of stainless steel from page 97


For any further question please do not hesitate to contact us. We look forward to develop solutions together with you. You profit from our vast knowledge in development, engineering and production technology.

Contact us:

E-Mail: info.et@hummel.com


Tel.: +49 (0) 76 66 / 9 11 10-0

Metr., PG, NPT



V-N-FS

Metr.



Material Polyamide

Protection IP 54

Operating Temperature -40 °C – 100 °C (-40 °F – 212 °F)

Colors grey (RAL 7035), black (RAL 9005)




Advice:
- Other colors upon request

AG	GL mm	H mm	D mm	Number PA grey	Number PA black
M 12 x 1,5	6	10	15	1.251.1200.50	1.251.1201.50
M 16 x 1,5	7	11,5	20	1.251.1600.50	1.251.1601.50
M 20 x 1,5	6	9,5	25	1.251.2000.50	1.251.2001.50
M 25 x 1,5	11	15,5	30	1.251.2500.50	1.251.2501.50
M 32 x 1,5	11	16	38	1.251.3200.50	1.251.3201.50
M 40 x 1,5	13	18	46	1.251.4000.50	1.251.4001.50
M 50 x 1,5	13	18,5	56	1.251.5000.50	1.251.5001.50
M 63 x 1,5	15	19	69	1.251.6300.50	1.251.6301.50

V-N-FS

PG



Material Polyamide

Protection IP 54

Operating Temperature -40 °C – 100 °C (-40 °F – 212 °F)

Colors grey (RAL 7035), black (RAL 9005)



Advice:
- Other colors upon request

AG	GL mm	H mm	D mm	Number PA grey	Number PA black
PG 7	6	8	15	1.251.0700.11	1.251.0701.11
PG 9	6	9	19	1.251.0900.11	1.251.0901.11
PG 11	6	9	22	1.251.1100.11	1.251.1101.11
PG 13,5	6	9,5	25	1.251.1300.11	1.251.1301.11
PG 16	6	9,5	27	1.251.1600.11	1.251.1601.11
PG 21	8	11	33	1.251.2100.11	1.251.2101.11
PG 29	8	12	44	1.251.2900.11	1.251.2901.11
PG 36	10	15	55	1.251.3600.11	1.251.3601.11
PG 42	10	16	62	1.251.4200.11	1.251.4201.11
PG 48	12	16	69	1.251.4800.11	1.251.4801.11

V-NE / V-NE-SD

Metr.




Material Polyamide, fiber reinforced

Operating Temperature -20 °C – 80 °C (-4 °F – 176 °F)

O-Ring Buna-N

Colors black (RAL 9005)

Protection IP 54 (V-NE)
IP 68 – 10 bar / IP 69K (V-NE-SD)



Advice:
- Other colors upon request
- Please find more O-Rings on page 86

AG	GL mm	H mm	D mm	mm	mm	Number V-NE without O-Ring	Number V-NE-SD
M 12 x 1,5	8,5	13	16,5	15	6	1.255.1201.50	1.256.1201.50
M 16 x 1,5	8,5	13	20,5	19	8	1.255.1601.50	1.256.1601.50
M 20 x 1,5	9	14,5	25,5	24	8	1.255.2001.50	1.256.2001.50
M 25 x 1,5	10,5	16	30,5	28	8	1.255.2501.50	1.256.2501.50
M 32 x 1,5	11,5	17,5	38	36	8	1.255.3201.50	1.256.3201.50
M 40 x 1,5	11,5	18	48	46	8	1.255.4001.50	1.256.4001.50
M 50 x 1,5	13,5	20	60	55	8	1.255.5001.50	1.256.5001.50
M 63 x 1,5	14,5	21	75	70	8	1.255.6301.50	1.256.6301.50

V-NE / V-NE-SD

PG




Material Polyamide, fiber reinforced

Operating Temperature -20 °C – 80 °C (-4 °F – 176 °F)

O-Ring Buna-N

Colors black (RAL 9005)

Protection IP 54 (V-NE)
IP 68 – 10 bar / IP 69K (V-NE-SD)



Advice:
- Other colors upon request
- Please find more O-Rings on page 86

AG	GL mm	H mm	D mm	mm	mm	Number V-NE without O-Ring	Number V-NE-SD
PG 7	8,5	13	16,5	15	6	1.255.0701.11	1.256.0701.11
PG 9	8,5	13	20,5	19	8	1.255.0901.11	1.256.0901.11
PG 11	9	14,5	25,5	24	8	1.255.1101.11	1.256.1101.11
PG 13,5	9	14,5	25,5	24	8	1.255.1301.11	1.256.1301.11
PG 16	10,5	16	30,5	28	8	1.255.1601.11	1.256.1601.11
PG 21	11,5	17,5	38	36	8	1.255.2101.11	1.256.2101.11
PG 29	11,5	18	48	46	8	1.255.2901.11	1.256.2901.11
PG 36	13,5	20	60	55	8	1.255.3601.11	1.256.3601.11
PG 42	13,5	20	65	60	8	1.255.4201.11	1.256.4201.11
PG 48	14,5	21	75	70	8	1.255.4801.11	1.256.4801.11

DS

Metr.

Material	Elastomer
Protection	IP 54
Operating Temperature	-20 °C – 80 °C (-4 °F – 176 °F)

Ø mm	D mm	H mm	Number
12	17	5	1.250.1201.50
16	20	5	1.250.1601.50
20	25	5	1.250.2001.50
25	30	5	1.250.2501.50
32	37	5	1.250.3201.50
40	45	5	1.250.4001.50
50	56	5	1.250.5001.50
63	70	5	1.250.6301.50

WN

Metr.

Material	Polyethylene
Protection	IP 54
Operating Temperature	-20 °C – 80 °C (-4 °F – 176 °F)

AG	GL mm	Ø mm	 mm	Number
M 16 x 1,5	9	19,8	15	1.282.1600.50
M 20 x 1,5	12	24	19	1.282.2000.50
M 25 x 1,5	12	29,5	24	1.282.2500.50
M 32 x 1,5	14	37,5	30	1.282.3200.50
M 40 x 1,5	14	45,8	37	1.282.4000.50
M 50 x 1,5	18	55,8	46	1.282.5000.50
M 63 x 1,5	20	68,8	56	1.282.6300.50

HSK-V

Metr., PG, NPT




Material Polyamide

Operating Temperature -40 °C – 100 °C (-40 °F – 212 °F)

Colors black (RAL 9005)



RoHS



Fits the following sizes			D mm	d mm	L mm	Number
PG 7	M 12 x 1,5		6	4,5	15	1.280.0007.00
PG 9	M 16 x 1,5	3/8" NPT	7,5	5,5	17	1.280.0009.00
PG 11	M 16 x 1,5 / 11		9,5	6,5	19	1.280.0011.00
PG 13,5	M 20 x 1,5	1/2" NPT	11,5	8,5	19	1.280.0013.00
PG 16	M 20 x 1,5 / 16	1/2" NPT/16	13,5	11,5	19,5	1.280.0016.00
PG 21	M 25 x 1,5	3/4" NPT	17,5	15,5	23,5	1.280.0021.00
PG 29	M 32 x 1,5	1" NPT 1 1/4" NPT	24	19	26	1.280.0029.00
PG 36	M 40 x 1,5	1 1/2" NPT	31	25	28	1.280.0036.00
PG 42	M 50 x 1,5		37	30	28	1.280.0042.00
PG 48	M 63 x 1,5		43	34	28	1.280.0048.00

R-FS




Metr., PG



Material Styrene Butadiene / Polyamide

Operating Temperature -20 °C – 70 °C (-4 °F – 156 °F) (Styrene Butadiene)
-40 °C – 80 °C (-40 °F – 176 °F) (Polyamide)

Colors grey (RAL 7035)

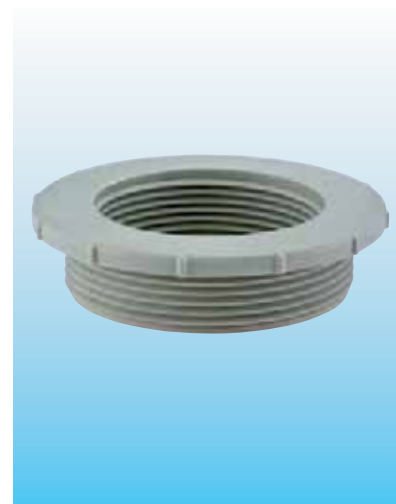

AG	IG	GL mm	H mm	D mm	mm	Type	Number SB	Number PA
M 16 x 1,5	M 12 x 1,5	9	16	24	22	A		1.272.1612.50
M 20 x 1,5	M 16 x 1,5	9	16	27	24	A		1.272.2016.50
M 25 x 1,5	M 20 x 1,5	10	17	32	29	A		1.272.2520.50
M 32 x 1,5	M 25 x 1,5	12	19	40	36	A		1.272.3225.50
M 40 x 1,5	M 32 x 1,5	12	19	51	46	A		1.272.4032.50
M 50 x 1,5	M 40 x 1,5	14	21	61	55	A		1.272.5040.50
M 63 x 1,5	M 50 x 1,5	15	22	75	65	A		1.272.6350.50
PG 13,5	PG 9	8	12	27		A	1.271.1309.10	1.272.1309.11
PG 16	PG 9	10	13	29		A	1.271.1609.10	1.272.1609.11
PG 16	PG 11	10	13	29		A	1.271.1611.10	1.272.1611.11
PG 21	PG 13,5	11	13,5	36		A	1.271.2113.10	1.272.2113.11
PG 21	PG 16	11	13,5	36		A	1.271.2116.10	1.272.2116.11
PG 29	PG 21	11	13,5	46		A	1.271.2921.10	1.272.2921.11
PG 36	PG 29	11	15	58		A	1.271.3629.10	1.272.3629.11
Reducing intermediate connector								
PG 9	PG 7	8	14	19	15	B	1.235.0907.10	1.236.0907.11
PG 11	PG 9	8	18	22,5	19	B	1.235.1109.10	1.236.1109.11
PG 13,5	PG 11	9	21	25,5	22	B	1.235.1311.10	1.236.1311.11
PG 16	PG 13,5	10	25	28,5	24	B	1.235.1613.10	1.236.1613.11

R-M-PA


Metr., PG




Material	Polyamide (Type A / Type B), Polypropylene (Type C)
Operating Temperature	-20 °C – 80 °C (-4 °F – 176 °F)
Colors	black (RAL 9005)




Type A



Type B



Type C







AG	IG	Type	GL mm	H mm	D mm	mm	Number
M 16 x 1,5	M 12 x 1,5	B	8	6	10	20	1.273.1612.50
M 20 x 1,5	M 16 x 1,5	B	8	6	13,5	25	1.273.2016.50
M 25 x 1,5	M 20 x 1,5	B	8	6	18	29	1.273.2520.50
M 32 x 1,5	M 25 x 1,5	B	10	6	23	36	1.273.3225.50
M 40 x 1,5	M 32 x 1,5	C	15	5	30		1.273.4032.50
M 50 x 1,5	M 40 x 1,5	C	15	5	38		1.273.5040.50
M 63 x 1,5	M 50 x 1,5	C	15	5	48		1.273.6350.50
M 25 x 1,5	PG 13,5	B	8	6	18	29	1.273.2513.50
M 25 x 1,5	PG 16	A	8	14	18	29	1.273.2516.50
M 32 x 1,5	PG 21	A	10	15	25	36	1.273.3221.50
M 40 x 1,5	PG 29	A	10	15	33	45	1.273.4029.50
M 50 x 1,5	PG 36	A	12	17	43	55	1.273.5036.50
M 63 x 1,5	PG 42	C	15	5	52		1.273.6342.50
PG 9	M 12 x 1,5	C	15	19	8,5		1.273.0912.11
PG 11	M 16 x 1,5	C	15	19	11,5		1.273.1116.11
PG 13,5	M 16 x 1,5	B	8	6	14	25	1.273.1316.11
PG 16	M 20 x 1,5	A	8	13	16	27	1.273.1620.11
PG 21	M 25 x 1,5	C	15	19	20,5		1.273.2125.11
PG 29	M 32 x 1,5	C	15	19	28		1.273.2932.11
PG 36	M 40 x 1,5	C	15	5	38		1.273.3640.11
PG 42	M 40 x 1,5	C	15	5	38		1.273.4240.11
PG 48	M 50 x 1,5	C	15	5	38		1.273.4850.11

E-M-PA, K-FS

Metr., PG



Material	Polyamide (Type A/Type B), Polypropylene (Type C)
Operating Temperature	-20 °C – 80 °C (-4 °F – 176 °F)
Colors	K-FS grey (RAL 7035), E-M-PA black (RAL 9005)

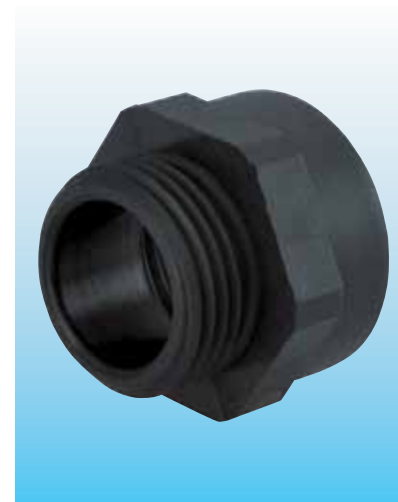


AG	IG	Type	GL mm	H mm	D mm	mm	Number
M 12 x 1,5	M 16 x 1,5	A	8	12	6,5	21	1.239.1216.50
M 16 x 1,5	M 20 x 1,5	A	8	13	9	25	1.239.1620.50
M 20 x 1,5	M 25 x 1,5	A	8	15	14	30	1.239.2025.50
M 25 x 1,5	M 32 x 1,5	C	15	15	16,5		1.239.2532.50
M 32 x 1,5	M 40 x 1,5	C	15	19,5	23		1.239.3240.50
M 40 x 1,5	M 50 x 1,5	C	15	19,5	30		1.239.4050.50
M 50 x 1,5	M 63 x 1,5	C	15	20	39		1.239.5063.50
M 12 x 1,5	PG 7	A	8	12	6,5	17	1.239.1207.50
M 16 x 1,5	PG 9	C	1	19	8,5		1.239.1609.50
M 20 x 1,5	PG 13,5	A	8	13	14	25	1.239.2013.50
M 63 x 1,5	PG 48	C	15	20	51		1.239.6348.50
PG 7	M 12 x 1,5	C	15	19	6		1.239.0712.11
PG 9	M 16 x 1,5	A	8	12	9	21	1.239.0916.11
PG 11	M 20 x 1,5	C	15	19	11,5		1.239.1120.11
PG 13,5	M 20 x 1,5	A	8	13	14	25	1.239.1320.11
PG 16	M 25 x 1,5	A	8	15	16	30	1.239.1625.11
PG 21	M 32 x 1,5	A	8	15	21	37	1.239.2132.11
PG 29	M 40 x 1,5	A	10	17	30	45	1.239.2940.11
PG 36	M 50 x 1,5	C	15	19,5	37		1.239.3650.11
PG 42	M 50 x 1,5	C	15	19,5	43		1.239.4250.11
PG 48	M 63 x 1,5	C	15	20	48		1.239.4863.11
PG 11	PG 13,5	B	8	15	24		1.233.1113.11
PG 13,5	PG 16	B	9	16	27		1.233.1316.11
PG 16	PG 21	B	10	19	33		1.233.1621.11
PG 21	PG 29	B	11	21	42		1.233.2129.11

90° Snap Elbow


Metr., PG, NPT



Material	Polyamide
O-Ring	Buna-N
Protection	IP 68 (NEMA 6)
Operating Temperature	-20 °C – 80 °C (-4 °F – 176 °F)
Colors	grey (RAL 7035), black (RAL 9005)



AG	IG	GL mm	H mm	L mm	R mm		Number grey	Number black
M 16x1,5	M 16x1,5	8	23	28,5	5	19	1.316.1600.50	1.316.1601.50
M 20x1,5	M 20x1,5	9	30,5	35	7	24	1.316.2000.50	1.316.2001.50
M 25x1,5	M 25x1,5	11	40	49	10	33	1.316.2500.50	1.316.2501.50
PG 9	M 16x1,5	8	23	28,5	5	19	1.316.0900.11	1.316.0901.11
PG 13,5	M 20x1,5	9	30,5	35	7	24	1.316.1300.11	1.316.1301.11
PG 21	M 25x1,5	11	40	49	10	33	1.316.2100.11	1.316.2101.11
M 16x1,5	PG 9	8	23	28,5	5	19	1.315.1600.50	1.315.1601.50
M 20x1,5	PG 13,5	9	30,5	35	7	24	1.315.2000.50	1.315.2001.50
M 25x1,5	PG 21	11	40	49	10	33	1.315.2500.50	1.315.2501.50
M 32x1,5	PG 29	11	51,5	60	14	42	1.315.3200.50	1.315.3201.50
PG 9	PG 9	8	23	28,5	5	19	1.315.0900.11	1.315.0901.11
PG 11	PG 11	8	27	31,5	6	22	1.315.1100.11	1.315.1101.11
PG 13,5	PG 13,5	9	30,5	35	7	24	1.315.1300.11	1.315.1301.11
PG 16	PG 16	10	32,5	37,5	8	27	1.315.1600.11	1.315.1601.11
PG 21	PG 21	11	40	49	10	33	1.315.2100.11	1.315.2101.11
PG 29	PG 29	11	51,5	60	14	42	1.315.2900.11	1.315.2901.11
3/8" NPT	PG 9	15	23	28,5	5	19	1.315.3800.70	1.315.3801.70
1/2" NPT	PG 13,5	13	30,5	35	7	24	1.315.1200.70	1.315.1201.70
3/4" NPT	PG 21	13	40	49	10	33	1.315.3400.70	1.315.3401.70
1" NPT	PG 29	19	51,5	60	14	42	1.315.1000.70	1.315.1001.70

KS				Metr.			
	Material		Polyamide				
	Protection		IP 54				
	Operating Temperature		-40 °C – 100 °C (-40 °F – 212 °F)				
	Colors		grey (RAL 7035), black (RAL 9005)				
							
AG	GL mm	H mm	 mm	Number grey	Number black		
M 25x1,5	15	21,5	30	1.213.2500.50	1.213.2501.50		


GM-KS			Metr.		
	Material		Polyamide		
	Operating Temperature		-40 °C – 100 °C (-40 °F – 212 °F)		
	Colors		grey (RAL 7035), black (RAL 9005)		
					
AG	H mm	 mm	Number grey		Number black
M 25x1,5	9	30	1.263.2500.50		1.263.2501.50

KF-G

Metr., PG




Material	Polyamide
Dichtung	Buna-N
Protection	IP 54
Operating Temperature	-40 °C – 110 °C (-40 °F – 230 °F)
Colors	grey (RAL 7011), black (RAL 9005)

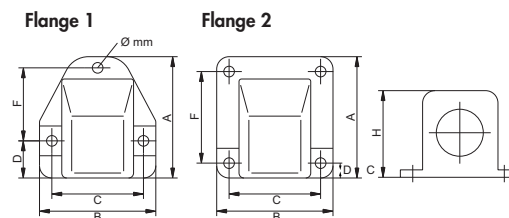

Size	Flange	Ø mm	A mm	B mm	C mm	D mm	F mm	H mm	Number grey	Number black
M 16x1,5	1	4,3	49	47	37	15,5	29	35	1.312.1600.50	1.312.1601.50
M 20x1,5	1	4,5	49	47	37	15,5	29	35	1.312.2000.50	1.312.2001.50
M 25x1,5	1	6,0	69	65	51,5	21,5	41,5	44	1.312.2500.50	1.312.2501.50
M 32x1,5	2	6,5	90	78	64,5	9,5	64,5	55	1.312.3200.50	1.312.3201.50
M 40x1,5	2	6,5	99	94	79,5	10,5	79,5	66	1.312.4000.50	1.312.4001.50
M 50x1,5	2	6,5	116	101	87,5	12,5	87,5	76	1.312.5000.50	1.312.5001.50
PG 11	1	4,3	49	47	37	15,5	29	35	1.312.1100.11	1.312.1101.11
PG 16	1	4,3	49	47	37	15,5	29	35	1.312.1600.11	1.312.1601.11
PG 21	1	6,0	69	65	51,5	21,5	41,5	44	1.312.2100.11	1.312.2101.11
PG 29	2	6,5	90	78	64,5	9,5	64,5	55	1.312.2900.11	1.312.2901.11
PG 36	2	6,5	99	94	79,5	10,5	79,5	66	1.312.3600.11	1.312.3601.11
PG 48	2	6,5	116	101	87,5	12,5	87,5	76	1.312.4800.11	1.312.4801.11

PG



HSK-ME

Metr., PG, NPT



Material

Elastomer




Operating Temperature

-40 °C – 100 °C (-40 °F – 212 °F)

Advice:

- Installation instruction see page 174
- Other materials available upon request

! - The inserts are exclusively capable for the glands of the HSK series



Fits the following sizes			Number of Holes x d	Number	Number of Holes x d	Number	Number without holes
PG 7 / KR PG 9				1.089.0799.19			
PG 9 / KE PG 7 / KR PG 11	M 16 x 1,5	3/8" NPT	4 x 1,4	1.089.0900.19	2 x 3	1.089.0901.19	1.089.0999.19
PG 9 / KE PG 7 / KR PG 11	M 16 x 1,5	3/8" NPT	5 x 1,6	1.089.0902.19	10 x 1,4	1.089.0904.19	
PG 11 / KE PG 9 / KR PG 13,5			2 x 3	1.089.1100.19	3 x 3	1.089.1101.19	1.089.1199.19
PG 11 / KE PG 9 / KR PG 13,5			2 x 4	1.089.1102.19	3 x 1,5	1.089.1103.19	
PG 13,5 / KE PG 11 / KR PG 16	M 20 x 1,5	1/2" NPT	3 x 2	1.089.1300.19	6 x 3	1.089.1301.19	1.089.1399.19
PG 13,5 / KE PG 11 / KR PG 16	M 20 x 1,5	1/2" NPT	3 x 4	1.089.1302.19	2 x 5	1.089.1303.19	
PG 16 / KE PG 13,5 / KR PG 21		1/2" NPT / 16	4 x 4	1.089.1602.19	5 x 4	1.089.1603.19	
PG 16 / KE PG 13,5 / KR PG 21		1/2" NPT / 16	6 x 4	1.089.1604.19	2 x 6	1.089.1605.19	
PG 21 / KE PG 16	M 25 x 1,5	3/4" NPT	4 x 6	1.089.2100.19	3 x 7	1.089.2101.19	1.089.2199.19
PG 21 / KE PG 16	M 25 x 1,5	3/4" NPT	2 x 8	1.089.2102.19	4 x 5	1.089.2103.19	
PG 29	M 32 x 1,5	1" NPT / 1 1/4" NPT	6 x 6,5	1.089.2900.19	4 x 9	1.089.2901.19	1.089.2999.19
PG 36	M 40 x 1,5	1 1/2" NPT	5 x 9	1.089.3600.19	7 x 9	1.089.3601.19	1.089.3699.19
PG 36	M 40 x 1,5	1 1/2" NPT	6 x 8	1.089.3602.19	2 x 15	1.089.3603.19	
PG 42	M 50 x 1,5			1.089.4299.19			
PG 48	M 63 x 1,5		8 x 10	1.089.4800.19	6 x 12	1.089.4801.19	1.089.4899.19

The shown inserts are samples, more inserts upon request

HSK-FLAKA

Metr., PG, NPT

RoHS

Material

Elastomer


Operating Temperature

-40°C – 100°C (-40°F – 212°F)

Advice:

- Installation instruction see page 174
- Other materials available upon request

! - The inserts are exclusively capable for the glands of the HSK series



ASI-BUS



Fits the following sizes			B x H mm	Number	B x H mm	Number
PG 13 (ASI-BUS)	M 20 x 1,5	1/2" NPT	10,4 x 4,2	1.091.1300.19		
PG 16/KE PG 13,5 / KR PG 21		1/2" NPT/16	14 x 6	1.091.1600.19	11,5 x 5	1.091.1601.19
PG 16/KE PG 13,5 / KR PG 21		1/2" NPT/16	12 x 7	1.091.1602.19		
PG 21/KE PG 16	M 25 x 1,5	3/4" NPT	14 x 6	1.091.2100.19	14 x 7	1.091.2101.19
PG 29	M 32 x 1,5	1" NPT/1 1/4" NPT	22 x 8	1.091.2900.19		
PG 36	M 40 x 1,5	1 1/2" NPT	28,5 x 10	1.091.3600.19	29 x 5,5	1.091.3601.19
PG 42	M 50 x 1,5		33,5 x 11,5	1.091.4200.19		
PG 48	M 63 x 1,5		38 x 12	1.091.4800.19		

The shown inserts are samples, more inserts upon request

O-Ring

Metr., PG, NPT



O-Ring Buna-N

Material Buna-N

Operating Temperature -30 °C – 120 °C (-22 °F – 248 °F)

O-Ring FPM

Material FPM

Operating Temperature -40 °C – 200 °C (-40 °F – 392 °F)

O-Ring VMQ


Material VMQ (Silicone)

Operating Temperature -60 °C – 250 °C (-76 °F – 482 °F)

RoHS



O-Ring for HSK-K



Fits the following sizes	d mm	s mm	Number Buna-N	Number FPM	Number VMQ
M 12 x 1,5	10	1,5	1.321.1200.57	1.321.1200.58	1.321.1200.59
M 16 x 1,5	12	1,5	1.321.1600.57	1.321.1600.58	1.321.1600.59
M 20 x 1,5	17	1,8	1.321.2000.57	1.321.2000.58	1.321.2000.59
M 25 x 1,5	22	2	1.321.2500.57	1.321.2500.58	1.321.2500.59
M 32 x 1,5	29	2	1.321.3200.57	1.321.3200.58	1.321.3200.59
M 40 x 1,5	35	2	1.321.4000.57	1.321.4000.58	1.321.4000.59
M 50 x 1,5	43	2	1.321.5000.57	1.321.5000.58	1.321.5000.59
M 63 x 1,5	55	2	1.321.6300.57	1.321.6300.58	1.321.6300.59
PG 7	10	1,5	1.321.0700.17	1.321.0700.21	1.321.0700.22
PG 9	12	1,5	1.321.0900.17	1.321.0900.21	1.321.0900.22
PG 11	16	1,5	1.321.1100.17	1.321.1100.21	1.321.1100.22
PG 13,5	17	1,8	1.321.1300.17	1.321.1300.21	1.321.1300.22
PG 16	18	1,5	1.321.1600.17	1.321.1600.21	1.321.1600.22
PG 21	26	2	1.321.2100.17	1.321.2100.21	1.321.2100.22
PG 29	33	2	1.321.2900.17	1.321.2900.21	1.321.2900.22
PG 36	43	2	1.321.3600.17	1.321.3600.21	1.321.3600.22
PG 42	50	2	1.321.4200.17	1.321.4200.21	1.321.4200.22
PG 48	55	2	1.321.4800.17	1.321.4800.21	1.321.4800.22
3/8" NPT	13	2	1.321.3800.77	1.321.3800.78	1.321.3800.79
1/2" NPT	19	1,8	1.321.1200.77	1.321.1200.78	1.321.1200.79
3/4" NPT	22	2	1.321.3400.77	1.321.3400.78	1.321.3400.79
1" NPT	29	2	1.321.1000.77	1.321.1000.78	1.321.1000.79
1 1/4" NPT	38	2,5	1.321.5400.77	1.321.5400.78	1.321.5400.79
1 1/2" NPT	45	2,5	1.321.6400.77	1.321.6400.78	1.321.6400.79

Thread Seal Ring

Metr.

RoHS

Thread Seal Ring PE

Material

Polyethylene

Operating Temperature

-30 °C – 70 °C (-22 °F – 158 °F)

Thread Seal Ring HD

Material

Fiber-reinforced plastic

Operating Temperature



-40 °C – 300 °C (-40 °F – 572 °F)

d

D


S

Size	d mm	D mm	S mm	Number Polyethylene	Number Fiber-reinforced plastic
M 12 x 1,5	12	16	2	1.325.1200.59	1.325.1200.50
M 16 x 1,5	16	20	2	1.325.1600.59	1.325.1600.50
M 20 x 1,5	20	25	2	1.325.2000.59	1.325.2000.50
M 25 x 1,5	25	31	2	1.325.2500.59	1.325.2500.50
M 32 x 1,5	32	38	2	1.325.3200.59	1.325.3200.50
M 40 x 1,5	40	48	2	1.325.4000.59	1.325.4000.50
M 50 x 1,5	50	58	2	1.325.5000.59	1.325.5000.50
M 63 x 1,5	63	72	2	1.325.6300.59	1.325.6300.50

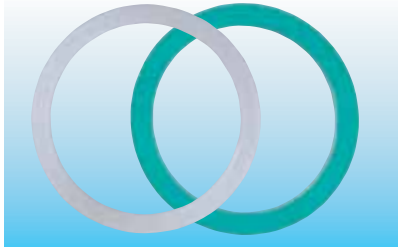Thread Seal Ring					PG	
RoHS 						
Thread Seal Ring PE						
Material						
Polyethylene						
Operating Temperature					-30 °C – 70 °C (-22 °F – 158 °F)	
Thread Seal Ring HD						
Material						
Fiber-reinforced plastic						
Operating Temperature					-40 °C – 300 °C (-40 °F – 572 °F)	
Size	d mm	D mm	S mm		Number Polyethylene	Number Fiber-reinforced plastic
PG 7	12,5	16,5	1,5		1.325.0700.19	1.325.0700.20
PG 9	15,2	19	1,5		1.325.0900.19	1.325.0900.20
PG 11	18,6	22,5	1,5		1.325.1100.19	1.325.1100.20
PG 13,5	20,4	25	1,5		1.325.1300.19	1.325.1300.20
PG 16	22,5	27	1,5		1.325.1600.19	1.325.1600.20
PG 21	28,3	33,5	1,5		1.325.2100.19	1.325.2100.20
PG 29	37	43,5	2		1.325.2900.19	1.325.2900.20
PG 36	47	55	2		1.325.3600.19	1.325.3600.20
PG 42	54	63	2		1.325.4200.19	1.325.4200.20
PG 48	59,3	69	2		1.325.4800.19	1.325.4800.20


GM-Ms

Metr., PG, G

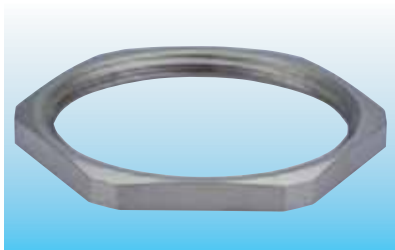

Material

Nickel plated brass



IG	H mm	mm	Number
M 12 x 1,5	2,8	15	1.161.1200.50
M 16 x 1,5	2,8	19	1.161.1600.50
M 20 x 1,5	3,0	23	1.161.2000.50
M 25 x 1,5	3,5	29	1.161.2500.50
M 32 x 1,5	4,0	36	1.161.3200.50
M 40 x 1,5	4,5	45	1.161.4000.50
M 50 x 1,5	5,5	55	1.161.5000.50
M 63 x 1,5	6,0	70	1.161.6300.50
M 75 x 1,5	8,0	85	1.161.7500.50
M 80 x 2	8,0	90	1.161.8000.50
M 90 x 2	8,0	100	1.161.9000.50
M 100 x 2	11	115	1.161.1000.50
M 110 x 2	11	125	1.161.1100.50

IG	H mm	mm	Number
PG 7	2,8	15	1.161.0700.01
PG 9	2,8	18	1.161.0900.01
PG 11	3,0	21	1.161.1100.01
PG 13,5	3,0	23	1.161.1300.01
PG 16	3,0	26	1.161.1600.01
PG 21	3,5	32	1.161.2100.01
PG 29	4,0	41	1.161.2900.01
PG 36	5,0	51	1.161.3600.01
PG 42	5,0	60	1.161.4200.01
PG 48	5,5	64	1.161.4800.01
G 2 1/2"	7	80	1.106.5200.99
G 3"	8	95	1.106.3000.99
G 4"	11	125	1.106.4000.99


GM-EMV

Metr., PG



Material

Nickel plated brass



IG	H mm	mm	S mm	Number
M 12 x 1,5	2,8	15	0,7	1.167.1200.50
M 16 x 1,5	2,8	19	0,7	1.167.1600.50
M 20 x 1,5	3,0	24	0,7	1.167.2000.50
M 25 x 1,5	3,5	30	0,7	1.167.2500.50
M 32 x 1,5	4,5	36	0,7	1.167.3200.50
M 40 x 1,5	5,0	46	0,7	1.167.4000.50
M 50 x 1,5	5,0	60	0,7	1.167.5000.50
M 63 x 1,5	6,0	70	0,7	1.167.6300.50

IG	H mm	mm	S mm	Number
PG 7	2,8	15	0,7	1.167.0700.01
PG 9	2,8	18	0,7	1.167.0900.01
PG 11	3,0	21	0,7	1.167.1100.01
PG 13,5	3,0	23	0,7	1.167.1300.01
PG 16	3,0	26	0,7	1.167.1600.01
PG 21	3,5	32	0,7	1.167.2100.01
PG 29	4,0	41	0,7	1.167.2900.01
PG 36	5,0	51	0,7	1.167.3600.01
PG 42	5,0	60	0,7	1.167.4200.01
PG 48	5,5	64	0,7	1.167.4800.01

V-N-Ms Metr., PG

Material Nickel plated brass

Protection IP 54

IG	GL mm	H mm	D mm	Number
M 12 x 1,5	5	7,5	14	1.052.1200.50
M 16 x 1,5	5	9,0	18	1.052.1600.50
M 20 x 1,5	6,5	9,5	22	1.052.2000.50
M 25 x 1,5	7	11,0	28	1.052.2500.50
M 32 x 1,5	8	12,0	35	1.052.3200.50
M 40 x 1,5	8,5	13,0	44	1.052.4000.50
M 50 x 1,5	9	15,0	54	1.052.5000.50
M 63 x 1,5	10	16,0	67	1.052.6300.50

IG	GL mm	H mm	D mm	Number
PG 7	5	8	14	1.052.0700.01
PG 9	6	9	17	1.052.0900.01
PG 11	6	9	20	1.052.1100.01
PG 13,5	6,5	9,5	22	1.052.1300.01
PG 16	6,5	9,5	24	1.052.1600.01
PG 21	7	11	30	1.052.2100.01
PG 29	8	12	39	1.052.2900.01
PG 36	9	15	50	1.052.3600.01
PG 42	10	16	57	1.052.4200.01
PG 48	10	16	64	1.052.4800.01

V-N-Ms-SD Metr., PG

Material Nickel plated brass

O-Ring Buna-N

Protection IP 68 (NEMA 6)

Operating Temperature -40 °C – 80 °C (-40 °F – 176 °F)

Advice:


- NPT thread on request
- Elongated thread on request
- Other O-Ring materials upon request

IG	GL mm	H mm	D mm	Number
M 12 x 1,5	6,5	9,5	14	1.052.1201.50
M 16 x 1,5	6	9	20	1.052.1601.50
M 20 x 1,5	6,5	9,5	24	1.052.2001.50
M 25 x 1,5	7	11	28	1.052.2501.50
M 32 x 1,5	8	12,5	35	1.052.3201.50
M 40 x 1,5	8	12	45	1.052.4001.50
M 50 x 1,5	9	15	55	1.052.5001.50
M 63 x 1,5	10	16	68	1.052.6301.50

IG	GL mm	H mm	D mm	Number
PG 7	4,8	8	14	1.052.0701.01
PG 9	5,5	9	17	1.052.0901.01
PG 11	5,5	9	20	1.052.1101.01
PG 13,5	6	9,5	22	1.052.1301.01
PG 16	6	9,5	24	1.052.1601.01
PG 21	6,5	11	30	1.052.2101.01
PG 29	7,5	12	39	1.052.2901.01
PG 36	9	15	50	1.052.3601.01
PG 42	10	16	57	1.052.4201.01
PG 48	10	16	64	1.052.4801.01

V-NE-Ms

Metr.

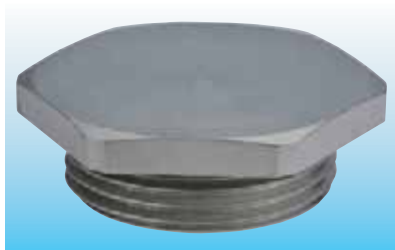


Material Nickel plated brass



V-NE-Ms

Protection IP 54


V-NE-Ms



V-NE-Ms-SD/ V-NE-Ms-SD-FPM

Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)

V-NE-Ms-SD



O-Ring -20 °C – 95 °C (-4 °F – 203 °F) Buna-N
-20 °C – 180 °C (-4 °F – 356 °F) FPM


Advice:

- NPT thread on request
- Elongated thread on request
- Other O-Ring materials upon request

AG	GL mm	H mm	 mm	Number V-NE-Ms without O-Ring	Number V-NE-Ms-SD -20 °C – 95 °C -4 °F – 203 °F	Number V-NE-Ms-SD-FPM -20 °C – 180 °C -4 °F – 356 °F
M 12 x 1,5	6,5	9,5	14	1.155.1200.50	1.156.1200.50	1.157.1200.50
M 16 x 1,5	6	9	19	1.155.1600.50	1.156.1600.50	1.157.1600.50
M 20 x 1,5	6	9,5	22	1.155.2000.50	1.156.2000.50	1.157.2000.50
M 25 x 1,5	7	10,5	30	1.155.2500.50	1.156.2500.50	1.157.2500.50
M 32 x 1,5	8	12,5	41	1.155.3200.50	1.156.3200.50	1.157.3200.50
M 40 x 1,5	8	13	46	1.155.4000.50	1.156.4000.50	1.157.4000.50
M 50 x 1,5	9	15	55	1.155.5000.50	1.156.5000.50	1.157.5000.50
M 63 x 1,5	10	16,5	70	1.155.6300.50	1.156.6300.50	1.157.6300.50

V-NE-Ms

PG

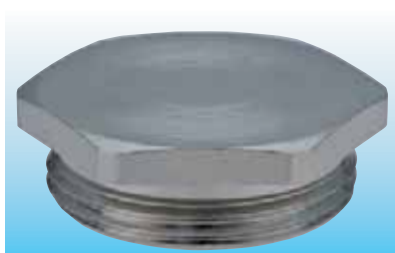


Material Nickel plated brass



V-NE-Ms

Protection IP 54


V-NE-Ms



V-NE-Ms-SD/ V-NE-Ms-SD-FPM

Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)

V-NE-Ms-SD



O-Ring -20 °C – 95 °C (-4 °F – 203 °F) Buna-N
-20 °C – 180 °C (-4 °F – 356 °F) FPM

Advice:

- Other O-Ring materials upon request

AG	GL mm	H mm	 mm	Number V-NE-Ms without O-Ring	Number V-NE-Ms-SD -20 °C – 95 °C -4 °F – 203 °F	Number V-NE-Ms-SD-FPM -20 °C – 180 °C -4 °F – 356 °F
PG 7	5	8	14	1.155.0700.01	1.156.0700.01	1.157.0700.01
PG 9	6	9	17	1.155.0900.01	1.156.0900.01	1.157.0900.01
PG 11	6	9,5	20	1.155.1100.01	1.156.1100.01	1.157.1100.01
PG 13,5	6,5	10	22	1.155.1300.01	1.156.1300.01	1.157.1300.01
PG 16	6,5	10	24	1.155.1600.01	1.156.1600.01	1.157.1600.01
PG 21	7	10,5	30	1.155.2100.01	1.156.2100.01	1.157.2100.01
PG 29	8	12,5	41	1.155.2900.01	1.156.2900.01	1.157.2900.01
PG 36	8	13	50	1.155.3600.01	1.156.3600.01	1.157.3600.01
PG 42	9	15	58	1.155.4200.01	1.156.4200.01	1.157.4200.01
PG 48	10	16,5	65	1.155.4800.01	1.156.4800.01	1.157.4800.01

R-H

Metr., PG




Material

Nickel plated brass

Advice:


- Metric threads with O-Ring thread seal available



AG	IG	GL mm	H mm	D mm	Number
M 16 x 1,5	M 12 x 1,5	6,0	8,5	18	1.076.1612.50
M 20 x 1,5	M 12 x 1,5	6,5	9,0	24	1.076.2012.50
M 20 x 1,5	M 16 x 1,5	6,5	9,0	24	1.076.2016.50
M 25 x 1,5	M 16 x 1,5	7,0	10,0	30	1.076.2516.50
M 25 x 1,5	M 20 x 1,5	7,0	10,0	30	1.076.2520.50
M 32 x 1,5	M 20 x 1,5	8,0	11,5	39	1.076.3220.50
M 32 x 1,5	M 25 x 1,5	8,0	11,5	39	1.076.3225.50
M 40 x 1,5	M 25 x 1,5	8,0	11,5	43	1.076.4025.50
M 40 x 1,5	M 32 x 1,5	9,0	12,5	43	1.076.4032.50
M 50 x 1,5	M 32 x 1,5	10,0	14,0	57	1.076.5032.50
M 50 x 1,5	M 40 x 1,5	10,0	14,0	57	1.076.5040.50
M 63 x 1,5	M 40 x 1,5	10,0	14,0	64	1.076.6340.50
M 63 x 1,5	M 50 x 1,5	10,0	14,0	64	1.076.6350.50
PG 9	PG 7	6	8,5	17	1.071.0907.01
PG 11	PG 7	6	8,5	20	1.071.1107.01
PG 11	PG 9	6	8,5	20	1.071.1109.01
PG 13,5	PG 9	6,5	9	22	1.071.1309.01
PG 13,5	PG 11	6,5	9	22	1.071.1311.01
PG 16	PG 9	6,5	9,5	24	1.071.1609.01
PG 16	PG 11	6,5	9,5	24	1.071.1611.01
PG 16	PG 13,5	6,5	9,5	24	1.071.1613.01
PG 21	PG 11	7	10	30	1.071.2111.01
PG 21	PG 13,5	7	10	30	1.071.2113.01
PG 21	PG 16	7	10	30	1.071.2116.01
PG 29	PG 16	8	11,5	39	1.071.2916.01
PG 29	PG 21	8	11,5	39	1.071.2921.01
PG 36	PG 21	9	12,5	50	1.071.3621.01
PG 36	PG 29	9	12,5	50	1.071.3629.01
PG 42	PG 29	10	14	57	1.071.4229.01
PG 42	PG 36	10	14	57	1.071.4236.01
PG 48	PG 36	10	14	64	1.071.4836.01
PG 48	PG 42	10	14	64	1.071.4842.01

RSD-MS

Metr.

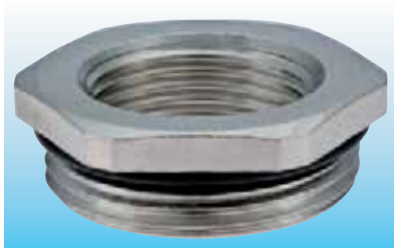


Material Nickel plated brass

O-Ring Buna-N



Advice:

- Other O-Ring materials upon request




AG	IG mm	GL mm	H mm	 mm	Number
M 16 x 1,5	M 12 x 1,5	5	8	17	1.077.1612.50
M 20 x 1,5	M 12 x 1,5	6	9	22	1.077.2012.50
M 20 x 1,5	M 16 x 1,5	6	9	22	1.077.2016.50
M 25 x 1,5	M 16 x 1,5	7	10	27	1.077.2516.50
M 25 x 1,5	M 20 x 1,5	7	10	27	1.077.2520.50
M 32 x 1,5	M 16 x 1,5	8	11	34	1.077.3216.50
M 32 x 1,5	M 20 x 1,5	8	11	34	1.077.3220.50
M 32 x 1,5	M 25 x 1,5	8	11	34	1.077.3225.50
M 40 x 1,5	M 20 x 1,5	8	12	43	1.077.4020.50
M 40 x 1,5	M 25 x 1,5	8	12	43	1.077.4025.50
M 40 x 1,5	M 32 x 1,5	8	12	43	1.077.4032.50

AG	IG mm	GL mm	H mm	 mm	Number
M 50 x 1,5	M 25 x 1,5	9	13	55	1.077.5025.50
M 50 x 1,5	M 32 x 1,5	9	13	55	1.077.5032.50
M 50 x 1,5	M 40 x 1,5	9	13	55	1.077.5040.50
M 63 x 1,5	M 32 x 1,5	10	14	65	1.077.6332.50
M 63 x 1,5	M 40 x 1,5	10	14	65	1.077.6340.50
M 63 x 1,5	M 50 x 1,5	10	14	65	1.077.6350.50

RSD-MS

PG

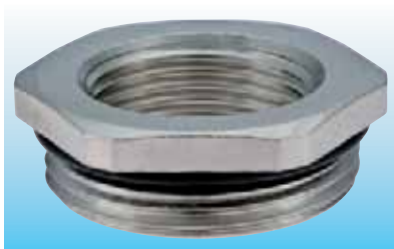


Material Nickel plated brass

O-Ring Buna-N



Advice:

- Other O-Ring materials upon request



AG	IG mm	GL mm	H mm	 mm	Number
PG 9	PG 7	6	8,8	17	1.077.0907.01
PG 11	PG 7	6	9	20	1.077.1107.01
PG 11	PG 9	6	9	20	1.077.1109.01
PG 13,5	PG 9	6,5	9,5	22	1.077.1309.01
PG 13,5	PG 11	6,5	9,5	22	1.077.1311.01
PG 16	PG 9	6,5	9,5	24	1.077.1609.01
PG 16	PG 11	6,5	9,5	24	1.077.1611.01
PG 16	PG 13,5	6,5	9,5	24	1.077.1613.01
PG 21	PG 11	7	10,3	30	1.077.2111.01
PG 21	PG 13,5	7	10,3	30	1.077.2113.01
PG 21	PG 16	7	10,3	30	1.077.2116.01


AG	IG mm	GL mm	H mm	 mm	Number
PG 29	PG 16	8	11,5	40	1.077.2916.01
PG 29	PG 21	8	11,5	40	1.077.2921.01
PG 36	PG 21	9	12,5	50	1.077.3621.01
PG 36	PG 29	9	12,5	50	1.077.3629.01
PG 42	PG 29	10	13,5	57	1.077.4229.01
PG 42	PG 36	10	13,5	57	1.077.4236.01
PG 48	PG 36	10	13,5	64	1.077.4836.01
PG 48	PG 42	10	13,5	64	1.077.4842.01

RE-MS						Metr.
 			Material			Nickel plated brass
AG	IG	GL mm	H mm	D mm	mm	Number
M 16 x 1,5	PG 9	6	10,5	20		1.039.1609.01
M 20 x 1,5	PG 11	6,5	12,5	22		1.039.2011.01
M 20 x 1,5	PG 13,5	6,5	12,5	22		1.039.2013.01
M 20 x 1,5	PG 16	6,5	12,5	24		1.039.2016.01
M 25 x 1,5	PG 16	6,5	12,5	28		1.039.2516.01
M 25 x 1,5	PG 21	6,5	14,5	30		1.039.2521.01
M 32 x 1,5	PG 29	7	16	39		1.039.3229.01
M 16 x 1,5	1/2" NPT	6	17		24	1.171.1612.50
M 20 x 1,5	1/2" NPT	6	17		24	1.171.2012.50
M 25 x 1,5	1/2" NPT	7	8		30	1.171.2512.50
M 25 x 1,5	3/4" NPT	7	19		30	1.171.2534.50
M 32 x 1,5	1" NPT	8	25		40	1.171.3210.50
M 32 x 1,5	1 1/4" NPT	8	25		46	1.171.3254.50

RE-MS						PG
			Material			Nickel plated brass
AG	IG	GL mm	H mm	D mm	mm	Number
PG 9	M 16 x 1,5	6	10,5	20		1.039.0916.01
PG 11	M 20 x 1,5	6,5	12,5	22		1.039.1120.01
PG 13,5	M 20 x 1,5	6,5	12,5	22		1.039.1320.01
PG 16	M 25 x 1,5	6,5	14,5	27		1.039.1625.01
PG 11	1/2" NPT	6	16,7		24	1.171.1112.01
PG 13,5	1/2" NPT	6,5	17		24	1.171.1312.01
PG 16	1/2" NPT	6,5	16,5		24	1.171.1612.01
PG 21	1/2" NPT	7	8		30	1.171.2112.01
PG 21	3/4" NPT	7	17		30	1.171.2134.01
PG 29	1" NPT	8	12		40	1.171.2910.01

E-Ms

Metr.

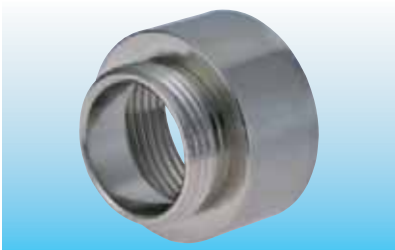


Material

Nickel plated brass







AG	IG	GL mm	H mm	D mm	Number
M 12 x 1,5	M 16 x 1,5	5	15	18	1.033.1216.50
M 16 x 1,5	M 20 x 1,5	6	17,5	22	1.033.1620.50
M 20 x 1,5	M 25 x 1,5	6,5	19	27	1.033.2025.50
M 25 x 1,5	M 32 x 1,5	6,5	21	34	1.033.2532.50
M 32 x 1,5	M 40 x 1,5	7	23	42	1.033.3240.50
M 40 x 1,5	M 50 x 1,5	9	31	53	1.033.4050.50
M 50 x 1,5	M 63 x 1,5	9	31	66	1.033.5063.50

E-**Ms**

PG

Material

Nickel plated brass

AG	IG	GL mm	H mm	D mm	Number
PG 7	PG 9	5	15	17	1.033.0709.01
PG 9	PG 11	6	16,5	20	1.033.0911.01
PG 9	PG 13,5	6	17,5	22	1.033.0913.01
PG 11	PG 13,5	6	17,5	22	1.033.1113.01
PG 11	PG 16	6	18,5	24	1.033.1116.01
PG 11	PG 21	6	20,5	30	1.033.1121.01
PG 13,5	PG 16	6,5	19	24	1.033.1316.01
PG 13,5	PG 21	6,5	21	30	1.033.1321.01
PG 16	PG 21	6,5	21	30	1.033.1621.01
PG 16	PG 29	6,5	22,5	39	1.033.1629.01
PG 21	PG 29	7	23	39	1.033.2129.01

AG	IG	GL mm	H mm	D mm	Number
PG 29	PG 36	8	27,5	50	1.033.2936.01
PG 36	PG 42	9	31	57	1.033.3642.01
PG 42	PG 48	10	33	64	1.033.4248.01

KLE					Metr.
	Material		Nickel plated brass		
AG	GL	H mm	mm	mm	Number
M 12 x 1,5	5,5	15,0	16	5-7,5	1.143.1200.50
M 16 x 1,5	6,0	16,0	19	7-10	1.143.1600.50
M 20 x 1,5	6,5	18,0	24	10-14	1.143.2000.50
M 25 x 1,5	8,0	21,0	34	12-21,5	1.143.2500.50
M 32 x 1,5	8,0	22,0	42	16-27	1.143.3200.50
M 40 x 1,5	9,5	25,5	52	22-33	1.143.4000.50
M 50 x 1,5	9,5	25,5	52	25-38,5	1.143.5000.50

KLE

PG


Material

Nickel plated brass

AG	GL	H mm	mm	mm	Number
PG 7	5,5	14,8	16	5,5–8	1.143.0700.01
PG 9	6	16,6	19	6,5–10	1.143.0900.01
PG 11	6	17,3	22	7,5–12	1.143.1100.01
PG 13,5	6,5	17,8	24	8,5–14	1.143.1300.01
PG 16	6,5	18,3	26	9,5–16	1.143.1600.01
PG 21	7,5	20,8	33	12–21	1.143.2100.01
PG 29	8	21,8	42	19–30	1.143.2900.01
PG 36	9,5	25,3	52	25–37	1.143.3600.01
PG 42	10	26,3	59	31–43	1.143.4200.01
PG 48	11	27,3	64	35–48	1.143.4800.01

FW-ZN

Metr.

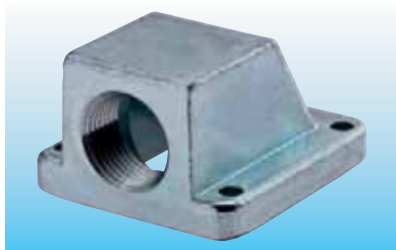


Material Zinc die casting

Protection IP 65

O-Ring Buna-N


Operating Temperature -20 °C – 95 °C (-4 °F – 203 °F)



A	C mm	D mm	E mm	G mm	H mm	Number
M 20 x 1,5	56	53	44	5,5	35	1.306.2000.50
M 25 x 1,5	65	63	54	5,5	42	1.306.2500.50
M 32 x 1,5	75	71	60	5,5	52	1.306.3200.50
M 50 x 1,5	93	89	72	6,5	69	1.306.5000.50
M 63 x 1,5	114	96	84	6,5	74	1.306.6300.50

FW-ZN

PG

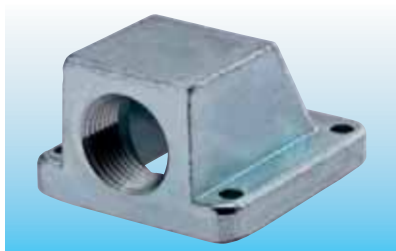


Material Zinc die casting

Protection IP 65

O-Ring Buna-N

Operating Temperature -20 °C – 95 °C (-4 °F – 203 °F)



A	C mm	D mm	E mm	G mm	H mm	Number
PG 9	50	45	37	4,3	30	1.306.0900.05
PG 11	50	45	37	4,3	30	1.306.1100.05
PG 13,5	56	53	44	5,5	35	1.306.1300.05
PG 16	56	53	44	5,5	35	1.306.1600.05
PG 21	65	63	54	5,5	42	1.306.2100.05
PG 29	74	70	60	5,5	52	1.306.2900.05
PG 36	94	89	72	6,5	69	1.306.3600.05
PG 42	114	96	84	6,5	74	1.306.4200.05
PG 48	114	96	84	6,5	74	1.306.4800.05

GM-INOX Metr.

Material 1.4305

Advice:

- Other sizes upon request
- Other steel upon request

IG mm	H mm	mm	Number
M 12 x 1,5	2,8	15	1.161.1200.58
M 16 x 1,5	2,8	19	1.161.1600.58
M 20 x 1,5	3	24	1.161.2000.58
M 25 x 1,5	3,5	30	1.161.2500.58
M 32 x 1,5	3,5	36	1.161.3200.58
M 40 x 1,5	5	46	1.161.4000.58
M 50 x 1,5	5	57	1.161.5000.58
M 63 x 1,5	6	70	1.161.6300.58

GM-INOX PG

Material 1.4305


Advice:

- Other sizes upon request
- Other steel upon request

IG mm	H mm	mm	Number
PG 7	2,8	17	1.161.0700.08
PG 9	2,8	22	1.161.0900.08
PG 11	3	22	1.161.1100.08
PG 13,5	3	24	1.161.1300.08
PG 16	3	27	1.161.1600.08
PG 21	3,5	32	1.161.2100.08
PG 29	4	41	1.161.2900.08
PG 36	5	50	1.161.3600.08

V-INOX

Metr.

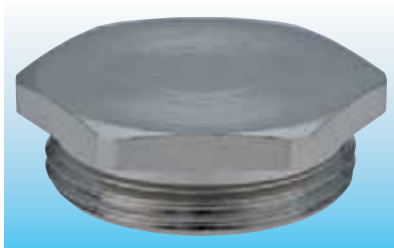

Material 1.4305




Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)



O-Ring Buna-N / FPM / VMQ

Advice:


- Elongated thread on request
- Other sizes upon request
- AISI 316L on request



AG	GL mm	H mm	 mm	Number V-INOX-Buna-N -20 °C – 95 °C -4 °F – 203 °F	Number V-INOX-FPM -20 °C – 180 °C -4 °F – 356 °F	Number V-INOX-VMQ -60 °C – 180 °C -76 °F – 356 °F
M 12 x 1,5	6,5	9,5	14	1.152.1200.50	1.153.1200.50	1.154.1200.50
M 16 x 1,5	6	9	19	1.152.1600.50	1.153.1600.50	1.154.1600.50
M 20 x 1,5	6	9,5	22	1.152.2000.50	1.153.2000.50	1.154.2000.50
M 25 x 1,5	7	10,5	30	1.152.2500.50	1.153.2500.50	1.154.2500.50
M 32 x 1,5	8	12,5	41	1.152.3200.50	1.153.3200.50	1.154.3200.50
M 40 x 1,5	8	13	46	1.152.4000.50	1.153.4000.50	1.154.4000.50

V-INOX

PG

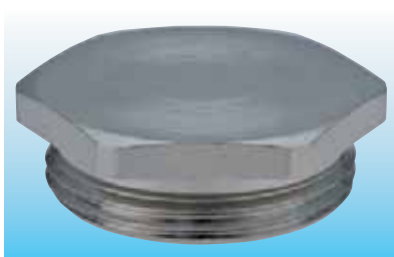

Material 1.4305




Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)

O-Ring Buna-N / FPM / VMQ

Advice:

- Elongated thread on request
- Other sizes upon request
- AISI 316L on request



AG	GL mm	H mm	 mm	Number V-INOX-Buna-N -20 °C – 95 °C -4 °F – 203 °F	Number V-INOX-FPM -20 °C – 180 °C -4 °F – 356 °F	Number V-INOX-VMQ -60 °C – 180 °C -76 °F – 356 °F
PG 7	5	8	14	1.152.0700.01	1.153.0700.01	1.154.0700.01
PG 9	6	9	17	1.152.0900.01	1.153.0900.01	1.154.0900.01
PG 11	6	9,5	20	1.152.1100.01	1.153.1100.01	1.154.1100.01
PG 13,5	6,5	10	22	1.152.1300.01	1.153.1300.01	1.154.1300.01
PG 16	6,5	10	24	1.152.1600.01	1.153.1600.01	1.154.1600.01
PG 21	7	10,5	30	1.152.2100.01	1.153.2100.01	1.154.2100.01
PG 29	8	12,5	41	1.152.2900.01	1.153.2900.01	1.154.2900.01
PG 36	8	13	50	1.152.3600.01	1.153.3600.01	1.154.3600.01

RS-INOX / RSD-INOX

Metr.



Material




1.4305

O-Ring

Buna-N

Advice:


- Other O-Ring materials upon request
- AISI 316L on request

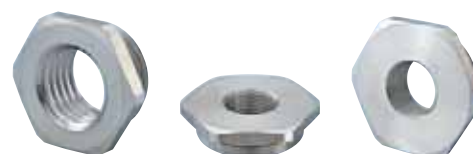

AG	IG	GL mm	H mm	D mm	Number RS-INOX without O-Ring	Number RSD-INOX -20 °C – 95 °C -4 °F – 203 °F
M 16 x 1,5	M 12 x 1,5	5	9	17	1.094.1612.50	1.097.1612.50
M 20 x 1,5	M 12 x 1,5	6	9,5	22	1.094.2012.50	1.097.2012.50
M 20 x 1,5	M 16 x 1,5	6	9,5	22	1.094.2016.50	1.097.2016.50
M 25 x 1,5	M 16 x 1,5	7	10,5	27	1.094.2516.50	1.097.2516.50
M 25 x 1,5	M 20 x 1,5	7	10,5	27	1.094.2520.50	1.097.2520.50
M 32 x 1,5	M 16 x 1,5	8	12,5	34	1.094.3216.50	1.097.3216.50
M 32 x 1,5	M 20 x 1,5	8	12,5	34	1.094.3220.50	1.097.3220.50
M 32 x 1,5	M 25 x 1,5	8	12,5	34	1.094.3225.50	1.097.3225.50
M 40 x 1,5	M 20 x 1,5	8	13	43	1.094.4020.50	1.097.4020.50
M 40 x 1,5	M 25 x 1,5	8	13	43	1.094.4025.50	1.097.4025.50
M 40 x 1,5	M 32 x 1,5	8	13	43	1.094.4032.50	1.097.4032.50
M 50 x 1,5	M 25 x 1,5	9	15	55	1.094.5025.50	1.097.5025.50
M 50 x 1,5	M 32 x 1,5	9	15	55	1.094.5032.50	1.097.5032.50
M 50 x 1,5	M 40 x 1,5	9	15	55	1.094.5040.50	1.097.5040.50
M 63 x 1,5	M 32 x 1,5	10	16,5	65	1.094.6332.50	1.097.6332.50
M 63 x 1,5	M 40 x 1,5	10	16,5	65	1.094.6340.50	1.097.6340.50
M 63 x 1,5	M 50 x 1,5	10	16,5	65	1.094.6350.50	1.097.6350.50

RS-INOX / RSD-INOX

PG

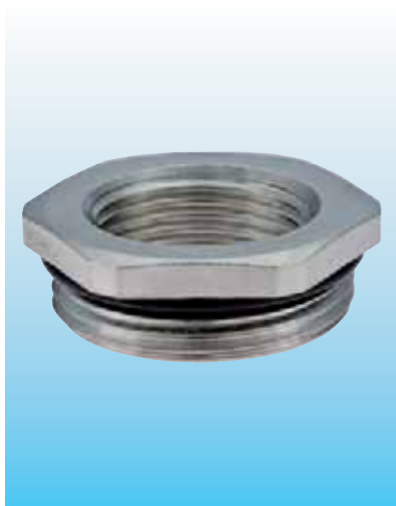

Material

1.4305



RoHS

O-Ring


Buna-N

Advice:


- Other O-Ring materials upon request
- AISI 316L on request



RS-INOX



RSD-INOX



AG	IG	GL mm	H mm	D mm	Number RS-INOX without O-Ring	Number RSD-INOX -20 °C – 95 °C -4 °F – 203 °F
PG 9	PG 7	6	8,8	17	1.094.0907.01	1.097.0907.01
PG 11	PG 7	6	9	22	1.094.1107.01	1.097.1107.01
PG 11	PG 9	6	9	22	1.094.1109.01	1.097.1109.01
PG 13,5	PG 9	6,5	9,5	22	1.094.1309.01	1.097.1309.01
PG 13,5	PG 11	6,5	9,5	22	1.094.1311.01	1.097.1311.01
PG 16	PG 9	6,5	9,5	24	1.094.1609.01	1.097.1609.01
PG 16	PG 11	6,5	9,5	24	1.094.1611.01	1.097.1611.01
PG 16	PG 13,5	6,5	9,5	24	1.094.1613.01	1.097.1613.01
PG 21	PG 11	7	10,3	30	1.094.2111.01	1.097.2111.01
PG 21	PG 13,5	7	10,3	30	1.094.2113.01	1.097.2113.01
PG 21	PG 16	7	10,3	30	1.094.2116.01	1.097.2116.01
PG 29	PG 16	8	11,5	40	1.094.2916.01	1.097.2916.01
PG 29	PG 21	8	11,5	40	1.094.2921.01	1.097.2921.01
PG 36	PG 21	9	12,5	50	1.094.3621.01	1.097.3621.01
PG 36	PG 29	9	12,5	50	1.094.3629.01	1.097.3629.01
PG 42	PG 29	10	13,5	57	1.094.4229.01	1.097.4229.01
PG 42	PG 36	10	13,5	57	1.094.4236.01	1.097.4236.01
PG 48	PG 36	10	13,5	64	1.094.4836.01	1.097.4836.01
PG 48	PG 42	10	13,5	64	1.094.4842.01	1.097.4842.01

Cable glands for hazardous areas



Cable glands for all popular threads, used in electrical equipment and hazardous areas in Group I, II and III applications. The Ex-d, Ex-e and/or Ex-ta certified cable glands have been designed for all explosion proof areas which are in need of high standards, reliability, strain relief and water proof requirements, e.g. marine, offshore, gas conveying machinery, refineries and chemical industry.



You can find in this chapter

- **EXIOS⁺ STANDARD** the innovative HUMMEL high-end cable gland for armoured cables in hazardous areas including the latest IECEx and ATEX certifications, for the use in Ex-e, Ex-d and Ex-ta areas.
- **EXIOS⁺ BARRIER** High-end cable gland for armoured cables in hazardous areas uses a barrier compound sealing. Including the latest IECEx and ATEX certifications, for the use in Ex-e, Ex-d and Ex-ta areas.
- **EXIOS⁺ A2F** for non-armoured cables for the use in Ex-e and Ex-d areas
- Accessories:
 - Thread Seal Ring
 - Plugs
 - Earthtags
 - Serrated Washer

For any further question please do not hesitate to contact us. We look forward to develop solutions together with you. You profit from our vast knowledge in development, engineering and production technology.

Contact us:

E-Mail: info.et@hummel.com

Tel.: +49 (0) 76 66/9 11 10-0


Cable glands for hazardous areas

EXIOS⁺ STANDARD
Metr.


Material	Brass
Seal	Silicone, VMQ
Clamping insert	PA 6
Armouring	Metallic Armour or Screen
Protection	IP 66, 67 and 68 (5 bar)
Operating Temperature	-60° C – 105° C (-76° F – 221° F)



Advice:
 - INOX on request
 - Nickel Plating on request



AG	Size	Ø1 mm	Ø2 mm	GL mm	H max. mm	mm	D mm	Armouring Ø mm			Number
								Clamping ring 1	Clamping ring 2	Clamping ring optional	
M 16 x1,5	20-1	6 – 12	3 – 8,1	16	69,5	22	27	0 – 0,7	0,7 – 1,25		1.605.1600.50
M 20 x1,5	20-1	6 – 12	3 – 8,1	16	69,5	22	27	0 – 0,7	0,7 – 1,25		1.605.2000.50
M 20 x1,5	20-2	9 – 16	6 – 12	16	74,3	24	29	0 – 0,7	0,7 – 1,25		1.605.2000.51
M 20 x1,5	20-3	12,5 – 20,5	9 – 14	16	80,5	30	35	0 – 0,7	0,7 – 1,4		1.605.2000.52
M 25 x1,5	20-3	12,5 – 20,5	9 – 14	16	80,5	30	35	0 – 0,7	0,7 – 1,4		1.605.2500.51
M 25 x1,5	25	16,9 – 26	12,5 – 20,5	16	91	36	42	0 – 0,7	0,9 – 1,6	0,7 – 1,4	1.605.2500.50
M 32 x1,5	32	22 – 33	16,9 – 26	16	96	46	52	0 – 0,7	1,3 – 2,0	0,7 – 1,4	1.605.3200.50
M 40 x1,5	40	28 – 41	22 – 33	16	107	55	64	0 – 0,7	1,3 – 2,0	0,7 – 1,4	1.605.4000.50
M 50 x1,5	50	36 – 52,6	28,9 – 44,4	16	131,5	65	73	0 – 1,0	1,5 – 2,5	1,0 – 2,0	1.605.5000.50
M 63 x1,5	63	46 – 65,3	39,9 – 56,3	16	144,5	80	90	0 – 1,0	1,5 – 2,5	1,0 – 2,0	1.605.6300.50
M 75 x1,5	75	57 – 78	50,5 – 68,2	16	154	95	107	0 – 1,0	1,5 – 2,5	1,0 – 2,0	1.605.7500.50

Cable glands for hazardous areas

EXIOS⁺ STANDARD

NPT



II 2G Ex de IIC Gb
II 1D Ex ta IIIC Da

ATEX BVS-10-ATEX-E-062-X



BVS 10.0078X



POCC-RU-0001-11TB05



AEX-13499-X



Material Brass

Seal Silicone, VMQ

Clamping insert PA 6


Armouring Metallic Armour or Screen

Protection IP 66, 67 and 68 (5 bar)

Operating Temperature -60° C – 105° C (-76° F – 221° F)

Advice:

- INOX on request
- Nickel Plating on request



AG	Size	Ø		GL mm	H max. mm	Ø mm	D mm	Armouring Ø mm			Number
		A ₁ mm	A ₂ mm					Clamping ring 1	Clamping ring 2	Clamping ring optional	
3/8" NPT	20 - 1	6 - 12	3 - 8,1	16	69,5	22	27	0 - 0,7	0,7 - 1,25		1.605.3800.70
1/2" NPT	20 - 2	9 - 16	6 - 12	20	74,3	24	29	0 - 0,7	0,7 - 1,25		1.605.1200.70
1/2" NPT	20 - 3	12,5 - 20,5	9 - 14	20	80,5	30	35	0 - 0,7	0,7 - 1,4		1.605.1200.71
3/4" NPT	25	16,9 - 26	12,5 - 20,5	20,5	91	36	42	0 - 0,7	0,9 - 1,6	0,7 - 1,4	1.605.3400.70
1" NPT	32	22 - 33	16,9 - 26	25	96	46	52	0 - 0,7	1,3 - 2,0	0,7 - 1,4	1.605.1000.70
1 1/4" NPT	40	28 - 41	22 - 33	26	107	55	64	0 - 0,7	1,3 - 2,0	0,7 - 1,4	1.605.5400.70
1 1/2" NPT	40	28 - 41	22 - 33	26,5	107	55	64	0 - 0,7	1,3 - 2,0	0,7 - 1,4	1.605.6400.70
2" NPT	50	36 - 52,6	28,9 - 44,4	27	131,5	65	73	0 - 1,0	1,5 - 2,5	1,0 - 2,0	1.605.2000.70
2 1/2" NPT	63	46 - 65,3	39,9 - 56,3	40	144,5	80	90	0 - 1,0	1,5 - 2,5	1,0 - 2,0	1.605.5200.70
3" NPT	75	57 - 78	50,5 - 68,2	41,5	154	95	107	0 - 1,0	1,5 - 2,5	1,0 - 2,0	1.605.3000.70

Cable glands for hazardous areas

EXIOS⁺ BARRIER
Metr.


Material	Brass
Seal	Silicone, VMQ
Clamping insert	PA 6
Armouring	Metallic Armour or Screen
Compound	Two-component epoxy compound
Protection	IP 66, 67 and 68 (5 bar)
Operating Temperature	-60° C – 85 C (-76° F – 185° F)



I M2 Ex de I Mb IIC Gb
I M2 Ex ta I IIIC Da




Sira-11-ATEX-1110-X



Sir 11.0044X



Advice:
- INOX on request
- Nickel Plating on request



AG	Size	Ø			GL mm	H max. mm	Ø mm	D mm	Armouring Ø mm		Clamping ring 2	Number
		A ₁ mm	A ₂ mm	A ₃ mm					Max. Clamping ring No. cores	1		
M 16 x1,5	20-1	6 – 12	8,2	7,9	16	68,5	22	27	8	0 – 0,7	0,7 – 1,25	1.606.1600.50
M 20 x1,5	20-1	6 – 12	8,2	7,9	16	68,5	22	27	8	0 – 0,7	0,7 – 1,25	1.606.2000.50
M 20 x1,5	20-2	9 – 16	12	8,8	16	74,3	24	29	10	0 – 0,7	0,7 – 1,25	1.606.2000.51
M 20 x1,5	20-3	12,5 – 20,5	14	11,5	16	80,5	30	35	15	0 – 0,7	0,7 – 1,4	1.606.2000.52
M 25 x1,5	20-3	12,5 – 20,5	14	11,5	16	80,5	30	35	15	0 – 0,7	0,7 – 1,4	1.606.2500.51
M 25 x1,5	25	16,9 – 26	20	16,4	16	91	36	42	25	0 – 0,7	0,9 – 1,6	1.606.2500.50
M 32 x1,5	32	22 – 33	26	21,4	16	96	46	52	45	0 – 0,7	1,3 – 2,0	1.606.3200.50
M 40 x1,5	40	28 – 41	33,2	27,6	16	107	55	64	70	0 – 0,7	1,3 – 2,0	1.606.4000.50
M 50 x1,5	50	36 – 52,6	44,2	37,5	16	131,5	65	73	85	0 – 1,0	1,5 – 2,5	1.606.5000.50
M 63 x1,5	63	46 – 65,3	56,2	47,3	16	144,5	80	90	120	0 – 1,0	1,5 – 2,5	1.606.6300.50
M 75 x1,5	75	57 – 78	68,2	58,0	16	154	95	107	150	0 – 1,0	1,5 – 2,5	1.606.7500.50

Cable glands for hazardous areas

EXIOS⁺ BARRIER

NPT



I M2 Ex de I Mb IIC Gb
I M2 Ex ta I IIIC Da

ATEX Ex Sira-11-ATEX-1110-X



Sir 11.0044X



Material Brass

Seal Silicone, VMQ

Clamping insert PA 6

Armouring Metallic Armour or Screen



Compound Two-component epoxy compound

Protection IP 66, 67 and 68 (5 bar)

Operating Temperature -60° C – 85 C (-76° F – 185° F)

Advice:

- INOX on request
- Nickel Plating on request

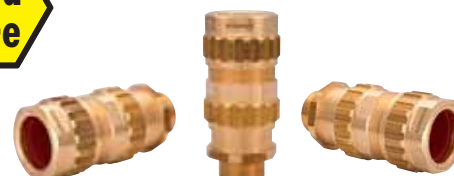

AG	Size	Ø A1 mm	Ø A2 mm	Ø A3 mm	GL mm	H max. mm	Ø mm	D mm	Armouring Ø mm			Number
									Max. No. cores	Clamping ring 1	Clamping ring 2	
NPT 3/8"	20-1	6 – 12	8,2	7,9	16	64	22	27	8	0 – 0,7	0,7 – 1,25	1.606.3800.70
NPT 1/2"	20-2	9 – 12	12	8,8	16	68	24	29	10	0 – 0,7	0,7 – 1,25	1.606.1200.70
NPT 1/2"	20-3	12,5 – 20,5	14	11,5	16	73	30	35	15	0 – 0,7	0,7 – 1,4	1.606.1200.71
NPT 3/4"	25	16,9 – 26	20	16,4	16	81,3	36	42	25	0 – 0,7	0,9 – 1,6	1.606.3400.70
NPT 1"	32	22 – 33	26	21,4	16	85,5	46	52	45	0 – 0,7	1,3 – 2,0	1.606.1000.70
NPT 1 1/4"	40	28 – 41	33,2	27,6	16	94,4	55	64	70	0 – 0,7	1,3 – 2,0	1.606.5400.70
NPT 1 1/2"	40	28 – 41	33,2	27,6	16	94,4	55	64	70	0 – 0,7	1,3 – 2,0	1.606.6400.70
NPT 2"	50	36 – 52,6	44,2	37,5	16	116,3	65	73	85	0 – 1,0	1,5 – 2,5	1.606.2000.70
NPT 2 1/2"	63	46 – 65,3	56,2	47,3	16	127,6	80	90	120	0 – 1,0	1,5 – 2,5	1.606.5200.70
NPT 3"	75	57 – 78	68,2	58,0	16	136,5	95	107	150	0 – 1,0	1,5 – 2,5	1.606.3000.70

Cable glands for hazardous areas


EXIOS⁺ A2F
Metr.


Material	Brass
Seal	Silicone, VMQ
Clamping insert	PA 6
Protection	IP 66, 67 and 68 (5 bar)
Operating Temperature	-60° C – 105° C (-76° F – 221° F)



Advice:

- Aluminum and Stainless Steel on request
- Nickel Plating on request
- NPT thread on request





AG	Size	Ø A1 mm	GL mm	H max. mm	Ø mm	D mm	Number
M 16 x 1,5	20 – 1	6 – 12	16	36,5	22	27	1.608.1600.50
M 20 x 1,5	20 – 1	6 – 12	16	36,5	22	27	1.608.2000.50
M 20 x 1,5	20 – 2	9 – 16	16	41	24	29	1.608.2000.51
M 25 x 1,5	20 – 3	12,5 – 20,5	16	48	30	35	1.608.2500.50
M 32 x 1,5	25	16,9 – 26	16	48,5	36	42	1.608.3200.50
M 40 x 1,5	32	22 – 33	16	54	46	52	1.608.4000.50
M 50 x 1,5	40	28 – 41	16	60	55	64	1.608.5000.50
M 63 x 1,5	50	40 – 52,6	16	67	65	73	1.608.6300.50
M 75 x 1,5	63	51 – 65,3	16	72	80	90	1.608.7500.50


Cable glands for hazardous areas

Red Fibre Washer		Metr., NPT	
 	Material		GFK
			
Size	Number	Size	Number
M 16	1.326.1600.50	1/2"	1.326.1200.70
M 20	1.326.2000.50	3/4"	1.326.3400.70
M 25	1.326.2500.50	1"	1.326.1000.70
M 32	1.326.3200.50	1 1/4"	1.326.5400.70
M 40	1.326.4000.50	1 1/2"	1.326.6400.70
M 50	1.326.5000.50	2"	1.326.2000.70
M 63	1.326.6300.50	2 1/2"	1.326.5200.70
M 75	1.326.7500.50	3"	1.326.3000.70

PVC Shroud	
	Material
	PVC
	
Size	Number
20-1	1.802.2000.50
20-2	1.802.2000.51
20-3	1.802.2000.52
25	1.802.2500.50
32	1.802.3200.50
40	1.802.4000.50
50	1.802.5000.50
63	1.802.6300.50
75	1.802.7500.50

Cable glands for hazardous areas

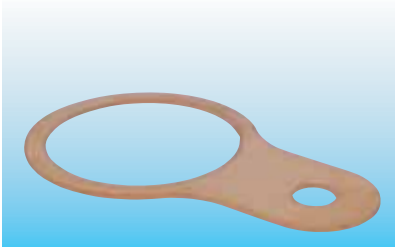Earthtag		Metr., NPT	
	Material	Brass	
			
Advice - INOX on request			
Size	Number	Size	Number
M 16	1.022.1600.50	1/2"	1.022.1200.70
M 20	1.022.2000.50	3/4"	1.022.3400.70
M 25	1.022.2500.50	1"	1.022.1000.70
M 32	1.022.3200.50	1 1/4"	1.022.5400.70
M 40	1.022.4000.50	1 1/2"	1.022.6400.70
M 50	1.022.5000.50	2"	1.022.2000.70
M 63	1.022.6300.50	2 1/2"	1.022.5200.70
M 75	1.022.7500.50	3"	1.022.3000.70

Serrated Washer		Metr., NPT	
	Material	INOX	
			
			
Size	Number	Size	Number
M 16	1.329.1600.50	1/2"	1.329.1600.70
M 20	1.329.2000.50	3/4"	1.329.3400.70
M 25	1.329.2500.50	1"	1.329.1000.70
M 32	1.329.3200.50	1 1/4"	1.329.5400.70
M 40	1.329.4000.50	1 1/2"	1.329.6400.70
M 50	1.329.5000.50	2"	1.329.2000.70
M 63	1.329.6300.50	2 1/2"	1.329.5200.70
M 75	1.329.7500.50	3"	1.329.3000.70

Industrial cable glands

HSK Ex-e Standard cable glands

Cable glands of the HSK-Ex-e-series have been designed for standard applications in hazardous locations type "e" according to EN 60079-0 and EN 60079-7.



You can find in this chapter:

HSK-Ex-e standard cable glands

- made of polyamide
- nickel plated brass with different temperature ranges
- various grades of stainless steel with different temperature ranges

We provide variable clamping ranges, thread lengths, thread types plus different sealing materials and temperature ranges. Our range is completed by global certifications.

For any further question please do not hesitate to contact us. We look forward to develop solutions together with you. You profit of our vast knowledge in development, engineering and production technology

Contact us:

E-Mail: info.et@hummel.com

Tel.: +49(0) 76 66/9 11 10-0

Advice:

- ➔ you can find HSK-EMV-Ex-e cable glands in the next chapter from page 121
- ➔ you can find HSK-Ex-e Multi hole glands and much more in the chapter "HSK-Ex-e cable glands for special applications" from page 129
- ➔ you can find HSK-Ex-d standard cable glands from page 137

HSK Ex-e Standard cable glands

HSK-K-Ex

Metr.



Material Polyamide V0 according to UL 94

Seal Buna-N

O-Ring Buna-N

Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
within the specified clamping range

Operating Temperature -20 °C – 95 °C (-4 °F – 203 °F)


Colors grey (RAL 7035)
black (RAL 9005), blue (RAL 5012)



II 2G 1D



For the international certificates
please see page 174 or our homepage
www.hummel.com



AG	mm	GL	H	mm	Number grey	Number black	Number blue
M 12 x 1,5	3 – 6,5	8	21	15	1.291.1200.50	1.291.1201.50	1.291.1202.50
M 12 x 1,5	2 – 5	8	21	15	1.291.1200.51	1.291.1201.51	1.291.1202.51
M 16 x 1,5	4 – 8	8	22	19	1.291.1600.50	1.291.1601.50	1.291.1602.50
M 16 x 1,5	3 – 6	8	22	19	1.291.1600.51	1.291.1601.51	1.291.1602.51
M 16 x 1,5	5 – 10	8	25	22	1.295.1600.50	1.295.1601.50	1.295.1602.50
M 16 x 1,5	3 – 7	8	25	22	1.295.1600.51	1.295.1601.51	1.295.1602.51
M 20 x 1,5	6,5 – 12	9	27	24	1.291.2000.50	1.291.2001.50	1.291.2002.50
M 20 x 1,5	5 – 9	9	27	24	1.291.2000.51	1.291.2001.51	1.291.2002.51
M 20 x 1,5	10 – 14	9	28	27	1.295.2000.50	1.295.2001.50	1.295.2002.50
M 20 x 1,5	7 – 12	9	28	27	1.295.2000.51	1.295.2001.51	1.295.2002.51
M 25 x 1,5	13 – 18	11	31	33	1.291.2500.50	1.291.2501.50	1.291.2502.50
M 25 x 1,5	9 – 16	11	31	33	1.291.2500.51	1.291.2501.51	1.291.2502.51
M 32 x 1,5	18 – 25	11	39	42	1.291.3200.50	1.291.3201.50	1.291.3202.50
M 32 x 1,5	13 – 20	11	39	42	1.291.3200.51	1.291.3201.51	1.291.3202.51
M 40 x 1,5	22 – 32	13	48	53	1.291.4000.50	1.291.4001.50	1.291.4002.50
M 40 x 1,5	20 – 26	13	48	53	1.291.4000.51	1.291.4001.51	1.291.4002.51
M 50 x 1,5	32 – 38	13	49	60	1.291.5000.50	1.291.5001.50	1.291.5002.50
M 50 x 1,5	25 – 31	13	49	60	1.291.5000.51	1.291.5001.51	1.291.5002.51
M 63 x 1,5	37 – 44	14	49	65/68	1.291.6300.50	1.291.6301.50	1.291.6302.50
M 63 x 1,5	29 – 35	14	49	65/68	1.291.6300.51	1.291.6301.51	1.291.6302.51

Accessories see page 71 and 141

HSK Ex-e Standard cable glands

HSK-K-Ex

Metr.-elongated



II 2G 1D



For the international certificates
please see page 174 or our homepage
www.hummel.com

Material Polyamide V0 according to UL 94


Seal Buna-N

O-Ring Buna-N

Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
within the specified clamping range

Operating Temperature -20 °C – 95 °C (-4 °F – 203 °F)

Colors grey (RAL 7035)
black (RAL 9005), blue (RAL 5012)



AG	mm	GL	H	mm	Number grey	Number black	Number blue
M 12 x 1,5	3 – 6,5	15	21	15	1.291.1200.30	1.291.1201.30	1.291.1202.30
M 12 x 1,5	2 – 5	15	21	15	1.291.1200.31	1.291.1201.31	1.291.1202.31
M 16 x 1,5	4 – 8	15	22	19	1.291.1600.30	1.291.1601.30	1.291.1602.30
M 16 x 1,5	3 – 6	15	22	19	1.291.1600.31	1.291.1601.31	1.291.1602.31
M 16 x 1,5	5 – 10	15	25	22	1.295.1600.30	1.295.1601.30	1.295.1602.30
M 16 x 1,5	3 – 7	15	25	22	1.295.1600.31	1.295.1601.31	1.295.1602.31
M 20 x 1,5	6,5 – 12	15	27	24	1.291.2000.30	1.291.2001.30	1.291.2002.30
M 20 x 1,5	5 – 9	15	27	24	1.291.2000.31	1.291.2001.31	1.291.2002.31
M 20 x 1,5	10 – 14	15	28	27	1.295.2000.30	1.295.2001.30	1.295.2002.30
M 20 x 1,5	7 – 12	15	28	27	1.295.2000.31	1.295.2001.31	1.295.2002.31
M 25 x 1,5	13 – 18	15	31	33	1.291.2500.30	1.291.2501.30	1.291.2502.30
M 25 x 1,5	9 – 16	15	31	33	1.291.2500.31	1.291.2501.31	1.291.2502.31
M 32 x 1,5	18 – 25	15	39	42	1.291.3200.30	1.291.3201.30	1.291.3202.30
M 32 x 1,5	13 – 20	15	39	42	1.291.3200.31	1.291.3201.31	1.291.3202.31
M 40 x 1,5	22 – 32	18	48	53	1.291.4000.30	1.291.4001.30	1.291.4002.30
M 40 x 1,5	20 – 26	18	48	53	1.291.4000.31	1.291.4001.31	1.291.4002.31
M 50 x 1,5	32 – 38	18	49	60	1.291.5000.30	1.291.5001.30	1.291.5002.30
M 50 x 1,5	25 – 31	18	49	60	1.291.5000.31	1.291.5001.31	1.291.5002.31
M 63 x 1,5	37 – 44	18	49	65/68	1.291.6300.30	1.291.6301.30	1.291.6302.30
M 63 x 1,5	29 – 35	18	49	65/68	1.291.6300.31	1.291.6301.31	1.291.6302.31



Accessories see page 71 and 141

HSK Ex-e Standard cable glands

HSK-K-Ex

PG



Material Polyamide V0 according to UL 94

Seal Buna-N

O-Ring Buna-N

Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
within the specified clamping range


Operating Temperature -20 °C – 95 °C (-4 °F – 203 °F)

Colors grey (RAL 7035)
black (RAL 9005), blue (RAL 5012)



II 2G 1D

For the international certificates
please see page 174 or our homepage
www.hummel.com



AG	$\varnothing$ mm	GL mm	H mm	 mm	Number grey	Number black	Number blue
PG 7	3 – 6,5	8	21	15	1.291.0700.14	1.291.0701.14	1.291.0702.14
PG 7	2 – 5	8	21	15	1.291.0700.15	1.291.0701.15	1.291.0702.15
PG 9	4 – 8	8	22	19	1.291.0900.14	1.291.0901.14	1.291.0902.14
PG 9	3 – 6	8	22	19	1.291.0900.15	1.291.0901.15	1.291.0902.15
PG 11	5 – 10	8	25	22	1.291.1100.14	1.291.1101.14	1.291.1102.14
PG 11	3 – 7	8	25	22	1.291.1100.15	1.291.1101.15	1.291.1102.15
PG 13,5	6,5 – 12	9	27	24	1.291.1300.14	1.291.1301.14	1.291.1302.14
PG 13,5	5 – 9	9	27	24	1.291.1300.15	1.291.1301.15	1.291.1302.15
PG 16	10 – 14	10	28	27	1.291.1600.14	1.291.1601.14	1.291.1602.14
PG 16	7 – 12	10	28	27	1.291.1600.15	1.291.1601.15	1.291.1602.15
PG 21	13 – 18	11	31	33	1.291.2100.14	1.291.2101.14	1.291.2102.14
PG 21	9 – 16	11	31	33	1.291.2100.15	1.291.2101.15	1.291.2102.15
PG 29	18 – 25	11	39	42	1.291.2900.14	1.291.2901.14	1.291.2902.14
PG 29	13 – 20	11	39	42	1.291.2900.15	1.291.2901.15	1.291.2902.15
PG 36	22 – 32	13	48	53	1.291.3600.14	1.291.3601.14	1.291.3602.14
PG 36	20 – 26	13	48	53	1.291.3600.15	1.291.3601.15	1.291.3602.15
PG 42	32 – 38	13	49	60	1.291.4200.14	1.291.4201.14	1.291.4202.14
PG 42	25 – 31	13	49	60	1.291.4200.15	1.291.4201.15	1.291.4202.15
PG 48	37 – 44	14	49	65	1.291.4800.14	1.291.4801.14	1.291.4802.14
PG 48	29 – 35	14	49	65	1.291.4800.15	1.291.4801.15	1.291.4802.15

➔ Accessories see page 71 and 141

HSK Ex-e Standard cable glands

HSK-K-Ex

PG-elongated

RoHS



II 2G 1D



For the international certificates
please see page 174 or our homepage
www.hummel.com

Material Polyamide V0 according to UL 94


Seal Buna-N

O-Ring Buna-N

Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
within the specified clamping range

Operating Temperature -20 °C – 95 °C (-4 °F – 203 °F)

Colors grey (RAL 7035)
black (RAL 9005), blue (RAL 5012)



AG	$\varnothing$ mm	GL mm	H mm	$\varnothing$ mm	Number grey	Number black	Number blue
PG 7	3–6,5	15	21	15	1.291.0700.60	1.291.0701.60	1.291.0702.60
PG 7	2–5	15	21	15	1.291.0700.61	1.291.0701.61	1.291.0702.61
PG 9	4–8	15	22	19	1.291.0900.60	1.291.0901.60	1.291.0902.60
PG 9	3–6	15	22	19	1.291.0900.61	1.291.0901.61	1.291.0902.61
PG 11	5–10	15	25	22	1.291.1100.60	1.291.1101.60	1.291.1102.60
PG 11	3–7	15	25	22	1.291.1100.61	1.291.1101.61	1.291.1102.61
PG 13,5	6,5–12	15	27	24	1.291.1300.60	1.291.1301.60	1.291.1302.60
PG 13,5	5–9	15	27	24	1.291.1300.61	1.291.1301.61	1.291.1302.61
PG 16	10–14	15	28	27	1.291.1600.60	1.291.1601.60	1.291.1602.60
PG 16	7–12	15	28	27	1.291.1600.61	1.291.1601.61	1.291.1602.61
PG 21	13–18	15	31	33	1.291.2100.60	1.291.2101.60	1.291.2102.60
PG 21	9–16	15	31	33	1.291.2100.61	1.291.2101.61	1.291.2102.61
PG 29	18–25	15	39	42	1.291.2900.60	1.291.2901.60	1.291.2902.60
PG 29	13–20	15	39	42	1.291.2900.61	1.291.2901.61	1.291.2902.61
PG 36	22–32	18	48	53	1.291.3600.60	1.291.3601.60	1.291.3602.60
PG 36	20–26	18	48	53	1.291.3600.61	1.291.3601.61	1.291.3602.61
PG 42	32–38	18	49	60	1.291.4200.60	1.291.4201.60	1.291.4202.60
PG 42	25–31	18	49	60	1.291.4200.61	1.291.4201.61	1.291.4202.61
PG 48	37–44	18	49	65	1.291.4800.60	1.291.4801.60	1.291.4802.60
PG 48	29–35	18	49	65	1.291.4800.61	1.291.4801.61	1.291.4802.61

➔ Accessories see page 71 and 141

HSK Ex-e Standard cable glands

HSK-K-Ex

NPT



Material Polyamide V0 according to UL 94

Seal Buna-N

O-Ring Buna-N

Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
within the specified clamping range


Operating Temperature -20 °C – 95 °C (-4 °F – 203 °F)

Colors grey (RAL 7035)
black (RAL 9005), blue (RAL 5012)



II 2G 1D

For the international certificates
please see page 174 or our homepage
www.hummel.com



AG	$\varnothing$ mm	GL mm	H mm	$\varnothing$ mm	Number grey	Number black	Number blue
3/8" NPT	4 – 8	15	22	19/22	1.291.3800.70	1.291.3801.70	1.291.3802.70
3/8" NPT	2 – 6	15	22	19/22	1.291.3800.71	1.291.3801.71	1.291.3802.71
1/2" NPT	6,5 – 12	13	27	24	1.291.1200.70	1.291.1201.70	1.291.1202.70
1/2" NPT	5 – 9	13	27	24	1.291.1200.71	1.291.1201.71	1.291.1202.71
1/2" NPT / 16	10 – 14	13	28	27	1.291.1216.70	1.291.1217.70	1.291.1218.70
1/2" NPT / 16	7 – 12	13	28	27	1.291.1216.71	1.291.1217.71	1.291.1218.71
3/4" NPT	13 – 18	14	31	33	1.291.3400.70	1.291.3401.70	1.291.3402.70
3/4" NPT	9 – 16	14	31	33	1.291.3400.71	1.291.3401.71	1.291.3402.71
1" NPT	18 – 25	19	39	42	1.291.1000.70	1.291.1001.70	1.291.1002.70
1" NPT	13 – 20	19	39	42	1.291.1000.71	1.291.1001.71	1.291.1002.71
1 1/4" NPT	18 – 25	16	39	42/46	1.291.5400.70	1.291.5401.70	1.291.5402.70
1 1/4" NPT	13 – 20	16	39	42/46	1.291.5400.71	1.291.5401.71	1.291.5402.71
1 1/2" NPT	22 – 32	20	48	53	1.291.6400.70	1.291.6401.70	1.291.6402.70
1 1/2" NPT	20 – 26	20	48	53	1.291.6400.71	1.291.6401.71	1.291.6402.71

➔ Accessories see page 71 and 141

HSK Ex-e Standard cable glands

HSK-M-Ex / HSK-M-PVDF-Ex

Metr.



II 2G 1D



For the international certificates
please see page 174 or our homepage
www.hummel.com

Material Nickel plated brass


Clamping insert Polyamide / PVDF

Seal Buna-N / FPM

O-Ring Buna-N / FPM

Protection IP 68 – 10 bar / IP 69K
within the specified clamping range

Operating Temperature -20 °C – 95 °C (-4 °F – 203 °F) / -60 °C – 95 °C
(-76 °F – 203 °F) / -20 °C – 130 °C (-4 °F – 266 °F) (PVDF)



AG	$\varnothing$ mm	GL mm	H mm	$\varnothing$ mm	Number HSK-M-Ex -20 °C – 95 °C (-4 °F – 203 °F)	Number HSK-M-Ex -60 °C – 95 °C (-76 °F – 203 °F)	Number HSK-M-PVDF-Ex -20 °C – 130 °C (-4 °F – 266 °F)
M 12 x 1,5	3 – 6,5	6,5	19	14	1.610.1200.50	1.640.1200.50	1.660.1200.50
M 12 x 1,5	2 – 5	6,5	19	14	1.610.1200.51	1.640.1200.51	1.660.1200.51
M 16 x 1,5	4 – 8	6	21	17 / 19	1.610.1600.50	1.640.1600.50	1.660.1600.50
M 16 x 1,5	2 – 6	6	21	17 / 19	1.610.1600.51	1.640.1600.51	1.660.1600.51
M 16 x 1,5	6 – 10	6	22	20	1.610.1611.50	1.640.1611.50	1.660.1611.50
M 16 x 1,5	3 – 7	6	22	20	1.610.1611.51	1.640.1611.51	1.660.1611.51
M 20 x 1,5	6 – 12	6	23	22	1.610.2000.50	1.640.2000.50	1.660.2000.50
M 20 x 1,5	5 – 9	6	23	22	1.610.2000.51	1.640.2000.51	1.660.2000.51
M 20 x 1,5	10 – 14	6	24	24	1.610.2016.50	1.640.2016.50	1.660.2016.50
M 20 x 1,5	7 – 12	6	24	24	1.610.2016.51	1.640.2016.51	1.660.2016.51
M 25 x 1,5	14 – 18	7	26	30	1.610.2500.50	1.640.2500.50	1.660.2500.50
M 25 x 1,5	10 – 16	7	26	30	1.610.2500.51	1.640.2500.51	1.660.2500.51
M 32 x 1,5	20 – 25	8	31	40	1.610.3200.50	1.640.3200.50	1.660.3200.50
M 32 x 1,5	13 – 20	8	31	40	1.610.3200.51	1.640.3200.51	1.660.3200.51
M 40 x 1,5	22 – 32	8	37	50	1.610.4000.50	1.640.4000.50	1.660.4000.50
M 40 x 1,5	20 – 26	8	37	50	1.610.4000.51	1.640.4000.51	1.660.4000.51
M 50 x 1,5	32 – 38	9	37	57	1.610.5000.50	1.640.5000.50	
M 50 x 1,5	25 – 31	9	37	57	1.610.5000.51	1.640.5000.51	
M 63 x 1,5	37 – 44	10	38	64 / 68	1.610.6300.50	1.640.6300.50	
M 63 x 1,5	29 – 35	10	38	64 / 68	1.610.6300.51	1.640.6300.51	



Accessories see page 71 and 141

HSK Ex-e Standard cable glands

HSK-M-Ex / HSK-M-PVDF-Ex


Metr.-elongated



Material	Nickel plated brass
Clamping insert	Polyamide / PVDF
Seal	Buna-N / FPM
O-Ring	Buna-N / FPM
Protection	IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG) within the specified clamping range
Operating Temperature	-20 °C – 95 °C (-4 °F – 203 °F) / -60 °C – 95 °C (-76 °F – 203 °F) / -20 °C – 130 °C (-4 °F – 266 °F) (PVDF)



For the international certificates
please see page 174 or our homepage
www.hummel.com



AG	$\varnothing$ mm	GL mm	H mm	 mm	Number HSK-M-Ex -20 °C – 95 °C (-4 °F – 203 °F)	Number HSK-M-Ex -60 °C – 95 °C (-76 °F – 203 °F)	Number HSK-M-PVDF-Ex -20 °C – 130 °C (-4 °F – 266 °F)
M 12 x 1,5	3 – 6,5	10	19	14	1.610.1200.30	1.640.1200.30	1.660.1200.30
M 12 x 1,5	2 – 5	10	19	14	1.610.1200.31	1.640.1200.31	1.660.1200.31
M 16 x 1,5	4 – 8	10	21	17 / 19	1.610.1600.30	1.640.1600.30	1.660.1600.30
M 16 x 1,5	2 – 6	10	21	17 / 19	1.610.1600.31	1.640.1600.31	1.660.1600.31
M 16 x 1,5	6 – 10	10	22	20	1.610.1611.30	1.640.1611.30	1.660.1611.30
M 16 x 1,5	3 – 7	10	22	20	1.610.1611.31	1.640.1611.31	1.660.1611.31
M 20 x 1,5	6 – 12	10	23	22	1.610.2000.30	1.640.2000.30	1.660.2000.30
M 20 x 1,5	5 – 9	10	23	22	1.610.2000.31	1.640.2000.31	1.660.2000.31
M 20 x 1,5	10 – 14	10	24	24	1.610.2016.30	1.640.2016.30	1.660.2016.30
M 20 x 1,5	7 – 12	10	24	24	1.610.2016.31	1.640.2016.31	1.660.2016.31
M 25 x 1,5	14 – 18	12	26	30	1.610.2500.30	1.640.2500.30	1.660.2500.30
M 25 x 1,5	10 – 16	12	26	30	1.610.2500.31	1.640.2500.31	1.660.2500.31
M 32 x 1,5	20 – 25	12	31	40	1.610.3200.30	1.640.3200.30	1.660.3200.30
M 32 x 1,5	13 – 20	12	31	40	1.610.3200.31	1.640.3200.31	1.660.3200.31
M 40 x 1,5	22 – 32	15	37	50	1.610.4000.30	1.640.4000.30	1.660.4000.30
M 40 x 1,5	20 – 26	15	37	50	1.610.4000.31	1.640.4000.31	1.660.4000.31
M 50 x 1,5	32 – 38	15	37	57	1.610.5000.30	1.640.5000.30	
M 50 x 1,5	25 – 31	15	37	57	1.610.5000.31	1.640.5000.31	
M 63 x 1,5	37 – 44	15	38	64 / 68	1.610.6300.30	1.640.6300.30	
M 63 x 1,5	29 – 35	15	38	64 / 68	1.610.6300.31	1.640.6300.31	



Accessories see page 71 and 141

HSK Ex-e Standard cable glands

HSK-M-Ex / HSK-M-PVDF-Ex

PG, NPT

RoHS



II 2G 1D



For the international certificates
please see page 174 or our homepage
www.hummel.com

Material Nickel plated brass


Clamping insert Polyamide / PVDF

Seal Buna-N / FPM

O-Ring Buna-N / FPM

Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
within the specified clamping range

Operating Temperature -20 °C – 95 °C (-4 °F – 203 °F) / -60 °C – 95 °C
(-76 °F – 203 °F) / -20 °C – 130 °C (-4 °F – 266 °F) (PVDF)



AG	$\varnothing$ mm	GL mm	H mm	$\varnothing$ mm	Number HSK-M-Ex -20 °C – 95 °C (-4 °F – 203 °F)	Number HSK-M-Ex -60 °C – 95 °C (-76 °F – 203 °F)	Number HSK-M-PVDF-Ex -20 °C – 130 °C (-4 °F – 266 °F)
PG 7	3 – 6,5	5	19	14	1.610.0700.01	1.640.0700.01	1.660.0700.01
PG 7	2 – 5	5	19	14	1.610.0700.15	1.640.0700.15	1.660.0700.15
PG 9	4 – 8	6	21	17	1.610.0900.01	1.640.0900.01	1.660.0900.01
PG 9	2 – 6	6	21	17	1.610.0900.15	1.640.0900.15	1.660.0900.15
PG 11	6 – 10	6	22	20	1.610.1100.01	1.640.1100.01	1.660.1100.01
PG 11	3 – 7	6	22	20	1.610.1100.15	1.640.1100.15	1.660.1100.15
PG 13,5	6 – 12	6,5	24	22	1.610.1300.01	1.640.1300.01	1.660.1300.01
PG 13,5	5 – 9	6,5	24	22	1.610.1300.15	1.640.1300.15	1.660.1300.15
PG 16	10 – 14	6,5	23	24	1.610.1600.01	1.640.1600.01	1.660.1600.01
PG 16	7 – 12	6,5	23	24	1.610.1600.15	1.640.1600.15	1.660.1600.15
PG 21	14 – 18	7	24	30	1.610.2100.01	1.640.2100.01	1.660.2100.01
PG 21	10 – 16	7	24	30	1.610.2100.15	1.640.2100.15	1.660.2100.15
PG 29	20 – 25	8	29	40	1.610.2900.01	1.640.2900.01	1.660.2900.01
PG 29	13 – 20	8	29	40	1.610.2900.15	1.640.2900.15	1.660.2900.15
PG 36	22 – 32	8	35	50	1.610.3600.01	1.640.3600.01	1.660.3600.01
PG 36	20 – 26	8	35	50	1.610.3600.15	1.640.3600.15	1.660.3600.15
PG 42	32 – 38	9	37	57	1.610.4200.01	1.640.4200.01	1.660.4200.01
PG 42	25 – 31	9	37	57	1.610.4200.15	1.640.4200.15	1.660.4200.15
PG 48	37 – 44	10	38	64	1.610.4800.01	1.640.4800.01	1.660.4800.01
PG 48	29 – 35	10	38	64	1.610.4800.15	1.640.4800.15	1.660.4800.15
3/8" NPT	4 – 8	15	21	17/19	1.610.3800.70	1.640.3800.70	1.660.3800.70
3/8" NPT	2 – 6	15	21	17/19	1.610.3800.71	1.640.3800.71	1.660.3800.71
1/2" NPT	6 – 12	13	24	22/24	1.610.1200.70	1.640.1200.70	1.660.1200.70
1/2" NPT	5 – 9	13	24	22/24	1.610.1200.71	1.640.1200.71	1.660.1200.71
3/4" NPT	14 – 18	13	25	30	1.610.3400.70	1.640.3400.70	1.660.3400.70
3/4" NPT	10 – 16	13	25	30	1.610.3400.71	1.640.3400.71	1.660.3400.71
1" NPT	20 – 25	19	29	40	1.610.1000.70	1.640.1000.70	
1" NPT	13 – 20	19	29	40	1.610.1000.71	1.640.1000.71	



Accessories see page 71 and 141

HSK Ex-e Standard cable glands

HSK-M-Ex / HSK-M-PVDF-Ex

PG-elongated



Material Nickel plated brass

Clamping insert Polyamide / PVDF

Seal Buna-N / FPM

O-Ring Buna-N / FPM


Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
within the specified clamping range

Operating Temperature -20 °C – 95 °C (-4 °F – 203 °F) / -60 °C – 95 °C
(-76 °F – 203 °F) / -20 °C – 130 °C (-4 °F – 266 °F) (PVDF)



II 2G 1D

For the international certificates
please see page 174 or our homepage
www.hummel.com



AG	$\varnothing$ mm	GL mm	H mm	 mm	Number HSK-M-Ex -20 °C – 95 °C (-4 °F – 203 °F)	Number HSK-M-Ex -60 °C – 95 °C (-76 °F – 203 °F)	Number HSK-M-PVDF-Ex -20 °C – 130 °C (-4 °F – 266 °F)
PG 7	3 – 6,5	10	19	14	1.610.0700.60	1.640.0700.60	1.660.0700.60
PG 7	2 – 5	10	19	14	1.610.0700.61	1.640.0700.61	1.660.0700.61
PG 9	4 – 8	10	21	17	1.610.0900.60	1.640.0900.60	1.660.0900.60
PG 9	2 – 6	10	21	17	1.610.0900.61	1.640.0900.61	1.660.0900.61
PG 11	6 – 10	10	22	20	1.610.1100.60	1.640.1100.60	1.660.1100.60
PG 11	3 – 7	10	22	20	1.610.1100.61	1.640.1100.61	1.660.1100.61
PG 13,5	6 – 12	10	24	22	1.610.1300.60	1.640.1300.60	1.660.1300.60
PG 13,5	5 – 9	10	24	22	1.610.1300.61	1.640.1300.61	1.660.1300.61
PG 16	10 – 14	10	23	24	1.610.1600.60	1.640.1600.60	1.660.1600.60
PG 16	7 – 12	10	23	24	1.610.1600.61	1.640.1600.61	1.660.1600.61
PG 21	14 – 18	12	24	30	1.610.2100.60	1.640.2100.60	1.660.2100.60
PG 21	10 – 16	12	24	30	1.610.2100.61	1.640.2100.61	1.660.2100.61
PG 29	20 – 25	12	29	40	1.610.2900.60	1.640.2900.60	1.660.2900.60
PG 29	13 – 20	12	29	40	1.610.2900.61	1.640.2900.61	1.660.2900.61
PG 36	22 – 32	15	35	50	1.610.3600.60	1.640.3600.60	1.660.3600.60
PG 36	20 – 26	15	35	50	1.610.3600.61	1.640.3600.61	1.660.3600.61
PG 42	32 – 38	15	37	57	1.610.4200.60	1.640.4200.60	1.660.4200.60
PG 42	25 – 31	15	37	57	1.610.4200.61	1.640.4200.61	1.660.4200.61
PG 48	37 – 44	15	38	64	1.610.4800.60	1.640.4800.60	1.660.4800.60
PG 48	29 – 35	15	38	64	1.610.4800.61	1.640.4800.61	1.660.4800.61

➔ Accessories see page 71 and 141

HSK Ex-e Standard cable glands

HSK-INOX-Ex / HSK-INOX-PVDF-Ex

Metr.



II 2G 1D



For the international certificates
please see page 174 or our homepage
www.hummel.com

Material INOX (1.4305)

Clamping insert Polyamide / PVDF


Seal Buna-N / FPM

O-Ring Buna-N / FPM

Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
within the specified clamping range

Operating Temperature -20 °C – 95 °C (-4 °F – 203 °F) / -60 °C – 95 °C
(-76 °F – 203 °F) / -20 °C – 130 °C (-4 °F – 266 °F) (PVDF)

Advice:
- AISI 316L on request



AG	$\varnothing$ mm	GL mm	H mm	$\varnothing$ mm	Number HSK-INOX-Ex -20 °C – 95 °C (-4 °F – 203 °F)	Number HSK-INOX-Ex -60 °C – 95 °C (-76 °F – 203 °F)	Number HSK-INOX-PVDF-Ex -20 °C – 130 °C (-4 °F – 266 °F)
M 12 x 1,5	3 – 6,5	6,5	19	14	1.612.1200.50	1.642.1200.50	1.662.1200.50
M 12 x 1,5	2 – 5	6,5	19	14	1.612.1200.51	1.642.1200.51	1.662.1200.51
M 16 x 1,5	5 – 10	6	22	22	1.612.1600.50	1.642.1600.50	1.662.1600.50
M 16 x 1,5	3 – 7	6	22	22	1.612.1600.51	1.642.1600.51	1.662.1600.51
M 20 x 1,5	10 – 14	6	23	24	1.612.2000.50	1.642.2000.50	1.662.2000.50
M 20 x 1,5	7 – 12	6	23	24	1.612.2000.51	1.642.2000.51	1.662.2000.51
M 25 x 1,5	13 – 18	7	24	30	1.612.2500.50	1.642.2500.50	1.662.2500.50
M 25 x 1,5	9 – 16	7	24	30	1.612.2500.51	1.642.2500.51	1.662.2500.51
M 32 x 1,5	20 – 25	8	29	41	1.612.3200.50	1.642.3200.50	1.662.3200.50
M 32 x 1,5	13 – 20	8	29	41	1.612.3200.51	1.642.3200.51	1.662.3200.51
M 40 x 1,5	22 – 32	8	35	50	1.612.4000.50	1.642.4000.50	1.662.4000.50
M 40 x 1,5	20 – 26	8	35	50	1.612.4000.51	1.642.4000.51	1.662.4000.51

➔ Accessories see page 71 and 141

HSK Ex-e Standard cable glands

HSK-INOX-Ex / HSK-INOX-PVDF-Ex

PG



Material INOX (1.4305)

Clamping insert Polyamide / PVDF

Seal Buna-N / FPM

O-Ring Buna-N / FPM

Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
within the specified clamping range

Operating Temperature -20°C – 95 °C (-4°F – 203°F) / -60°C – 95 °C
(-76°F – 203°F) / -20°C – 130°C (-4°F – 266°F) (PVDF)

Advice:
- AISI 316L on request




RoHS



II 2G 1D

For the international certificates
please see page 174 or our homepage
www.hummel.com




AG	$\varnothing$ mm	GL mm	H mm	 mm	Number HSK-INOX-Ex -20 °C – 95 °C (-4 °F – 203 °F)	Number HSK-INOX-Ex -60 °C – 95 °C (-76 °F – 203 °F)	Number HSK-INOX-PVDF-Ex -20 °C – 130 °C (-4 °F – 266 °F)
PG 7	3 – 6,5	5	19	14	1.612.0700.01	1.642.0700.01	1.662.0700.01
PG 7	2 – 5	5	19	14	1.612.0700.15	1.642.0700.15	1.662.0700.15
PG 9	4 – 8	6	21	17	1.612.0900.01	1.642.0900.01	1.662.0900.01
PG 9	2 – 6	6	21	17	1.612.0900.15	1.642.0900.15	1.662.0900.15
PG 11	5 – 10	6	22	22	1.612.1100.01	1.642.1100.01	1.662.1100.01
PG 11	3 – 7	6	22	22	1.612.1100.15	1.642.1100.15	1.662.1100.15
PG 13,5	6 – 12	6	24	22	1.612.1300.01	1.642.1300.01	1.662.1300.01
PG 13,5	5 – 9	6	24	22	1.612.1300.15	1.642.1300.15	1.662.1300.15
PG 16	10 – 14	6	23	24	1.612.1600.01	1.642.1600.01	1.662.1600.01
PG 16	7 – 12	6	23	24	1.612.1600.15	1.642.1600.15	1.662.1600.15
PG 21	13 – 18	7	24	30	1.612.2100.01	1.642.2100.01	1.662.2100.01
PG 21	9 – 16	7	24	30	1.612.2100.15	1.642.2100.15	1.662.2100.15
PG 29	20 – 25	8	29	41	1.612.2900.01	1.642.2900.01	1.662.2900.01
PG 29	13 – 20	8	29	41	1.612.2900.15	1.642.2900.15	1.662.2900.15
PG 36	22 – 32	8	35	50	1.612.3600.01	1.642.3600.01	1.662.3600.01
PG 36	20 – 26	8	35	50	1.612.3600.15	1.642.3600.15	1.662.3600.15

➔ Accessories see page 71 and 141

Industrial cable glands

HSK-EMC-Ex-e cable glands

Cable glands of the HSK-EMC-Ex-series have been designed for standard applications in hazardous locations type "e" according to EN 60079-0 and EN 60079-7.

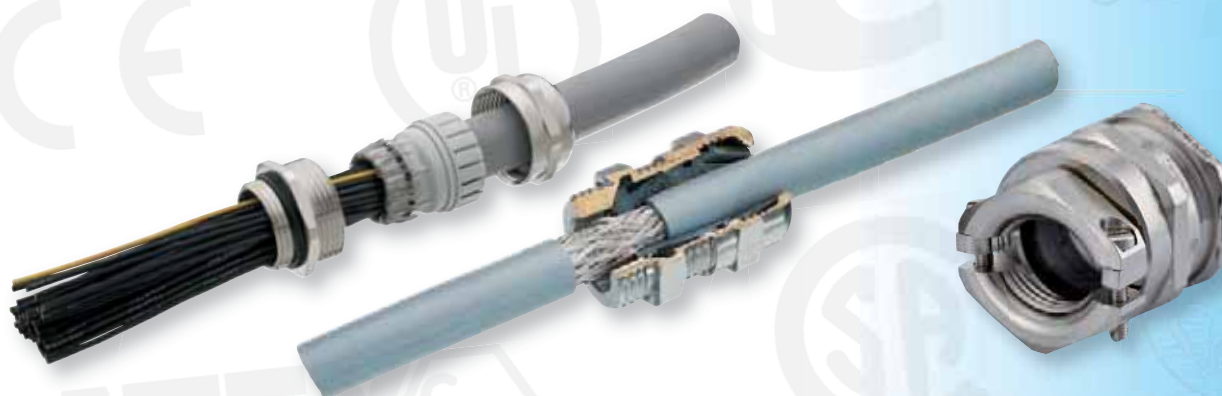

You can find in this chapter:

HSK-EMC-Ex-e cable glands

- made of nickel plated brass with different temperature ranges
- various grades of stainless steel with different temperature ranges

We provide variable clamping ranges, thread lengths, thread types plus different sealing materials and temperature ranges. Our range is completed by global certifications.

For any further question please do not hesitate to contact us. We look forward to develop solutions together with you. You profit of our vast knowledge in development, engineering and production technology.

Contact us:

E-Mail: info.et@hummel.com

Tel.: +49 (0) 76 66/9 11 10-0

Advice:

- ➔ you can find HSK-Ex-e Multi hole glands and much more in the chapter "HSK-Ex-e cable glands for special applications" from page
- ➔ you can find HSK-Ex-d standard cable glands from page 137

HSK-EMC-Ex-e cable glands


HSK-M-EMV-D-Ex

Metr.



For the international certificates
please see page 174 or our homepage
www.hummel.com

Material	Nickel plated brass
Clamping insert	Metalised Polyamide
Seal	Buna-N
O-Ring	Buna-N
Protection	IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG) within the specified clamping range
Operating Temperature	-20 °C – 95 °C (-4 °F – 203 °F) / -60 °C – 95 °C (-76 °F – 203 °F)



AG	$\varnothing$ mm	GL mm	H mm	mm	Number HSK-M-EMV-D-Ex -20 °C – 95 °C (-4 °F – 203 °F)	Number HSK-M-EMV-D-Ex -60 °C – 95 °C (-76 °F – 203 °F)
M 16 x 1,5	5–10	6	29	20	1.636.1600.50	1.637.1600.50
M 20 x 1,5	10–14	6	31	24	1.636.2000.50	1.637.2000.50
M 25 x 1,5	13–18	7	38	30	1.636.2500.50	1.637.2500.50
M 32 x 1,5	18–25	8	43	40	1.636.3200.50	1.637.3200.50
M 40 x 1,5	24–32	8	51	50	1.636.4000.50	1.637.4000.50

➔ Accessories see page 71 and 141


HSK-M-EMV-D-Ex

Metr.-elongated



For the international certificates
please see page 174 or our homepage
www.hummel.com

Material	Nickel plated brass
Clamping insert	Metalised Polyamide
Seal	Buna-N
O-Ring	Buna-N
Protection	IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG) within the specified clamping range
Operating Temperature	-20 °C – 95 °C (-4 °F – 203 °F) / -60 °C – 95 °C (-76 °F – 203 °F)



AG	$\varnothing$ mm	GL mm	H mm	mm	Number HSK-M-EMV-D-Ex -20 °C – 95 °C (-4 °F – 203 °F)	Number HSK-M-EMV-D-Ex -60 °C – 95 °C (-76 °F – 203 °F)
M 16 x 1,5	5–10	10	29	20	1.636.1600.30	1.637.1600.30
M 20 x 1,5	10–14	10	31	24	1.636.2000.30	1.637.2000.30
M 25 x 1,5	13–18	12	38	30	1.636.2500.30	1.637.2500.30
M 32 x 1,5	18–25	12	43	40	1.636.3200.30	1.637.3200.30
M 40 x 1,5	24–32	15	51	50	1.636.4000.30	1.637.4000.30

➔ Accessories see page 71 and 141

HSK-EMC-Ex-e cable glands

HSK-M-EMV-D-Ex

PG

RoHS



II 2G 1D



For the international certificates
please see page 174 or our homepage
www.hummel.com

Material Nickel plated brass

Clamping insert Metalised Polyamide


Seal Buna-N

O-Ring Buna-N


Protection IP 68 – 10 bar / IP 69K
within the specified clamping range

Operating Temperature -20 °C – 95 °C (-4 °F – 203 °F) /
-60 °C – 95 °C (-76 °F – 203 °F)

Advice:
- Elongated threads on request



AG	$\varnothing$ mm	GL mm	H mm	$\varnothing$ mm	Number HSK-M-EMV-D-Ex -20 °C – 95 °C (-4 °F – 203 °F)	Number HSK-M-EMV-D-Ex -60 °C – 95 °C (-76 °F – 203 °F)
PG 11	5–10	6	29	20	1.636.1100.01	1.637.1100.01
PG 13,5	6–12	6,5	31	22	1.636.1300.01	1.637.1300.01
PG 16	10–14	6,5	32	24	1.636.1600.01	1.637.1600.01
PG 21	13–18	7	38	30	1.636.2100.01	1.637.2100.01
PG 29	18–25	8	43	40	1.636.2900.01	1.637.2900.01
PG 36	22–32	8	48	50	1.636.3600.01	1.637.3600.01

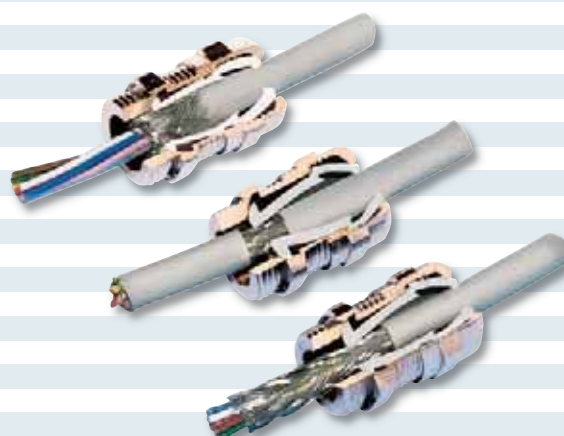

➔ Accessories see page 71 and 141

HSK-EMC-Ex-e cable glands

HSK-M-EMV-Ex

Metr.



Material Nickel plated brass

Clamping insert Polyamide

Seal Buna-N

O-Ring Buna-N


 Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
within the specified clamping range

 Operating Temperature -20 °C – 95 °C (-4 °F – 203 °F) /
-60 °C – 95 °C (-76 °F – 203 °F)

Advice:
- Elongated threads on request
- Stainless steel on request


II 2G 1D


 For the international certificates
please see page 174 or our homepage
www.hummel.com

 See our homepage www.hummel.com
for assembling advices for maximum
cable diameters


AG	$\varnothing$ mm	GL mm	H mm	 mm	Number HSK-M-EMV-Ex -20 °C – 95 °C (-4 °F – 203 °F)	Number HSK-M-EMV-Ex -60 °C – 95 °C (-76 °F – 203 °F)
M 12 x 1,5	3 – 6,5	6,5	19	14	1.616.1200.50	1.646.1200.50
M 12 x 1,5	2 – 5	6,5	19	14	1.616.1200.51	1.646.1200.51
M 16 x 1,5	6 – 10	6	22	20	1.616.1600.50	1.646.1600.50
M 16 x 1,5	3 – 7	6	22	20	1.616.1600.51	1.646.1600.51
M 20 x 1,5	10 – 14	6	23	24	1.616.2000.50	1.646.2000.50
M 20 x 1,5	7 – 12	6	23	24	1.616.2000.51	1.646.2000.51
M 25 x 1,5	14 – 18	7	24	30	1.616.2500.50	1.646.2500.50
M 25 x 1,5	10 – 16	7	24	30	1.616.2500.51	1.646.2500.51
M 32 x 1,5	20 – 25	8	31	40	1.616.3200.50	1.646.3200.50
M 32 x 1,5	13 – 20	8	31	40	1.616.3200.51	1.646.3200.51
M 40 x 1,5	22 – 32	8	37	50	1.616.4000.50	1.646.4000.50
M 40 x 1,5	20 – 26	8	37	50	1.616.4000.51	1.646.4000.51
M 50 x 1,5	32 – 38	9	37	57	1.616.5000.50	1.646.5000.50
M 50 x 1,5	25 – 31	9	37	57	1.616.5000.51	1.646.5000.51
M 63 x 1,5	37 – 44	10	38	64/68	1.616.6300.50	1.646.6300.50
M 63 x 1,5	29 – 35	10	38	64/68	1.616.6300.51	1.646.6300.51

Accessories see page 71 and 141

HSK-EMC-Ex-e cable glands

HSK-M-EMV-Ex / HSK-M-EMV-PVDF-Ex

PG, NPT

RoHS



II 2G 1D



For the international certificates
please see page 174 or our homepage
www.hummel.com

Material Nickel plated brass

Clamping insert Polyamide / PVDF

Seal Buna-N / FPM


O-Ring Buna-N / FPM

Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
within the specified clamping range

Operating Temperature -20 °C – 95 °C (-4 °F – 203 °F) / -60 °C – 95 °C
(-76 °F – 203 °F) / -20 °C – 130 °C (-4 °F – 266 °F) (PVDF)

Advice:

- Elongated threads on request



AG	mm	GL mm	H mm	mm	Number HSK-M-EMV-Ex -20 °C – 95 °C (-4 °F – 203 °F)	Number HSK-M-EMV-Ex -60 °C – 95 °C (-76 °F – 203 °F)	Number HSK-M-EMV-PVDF-Ex -20 °C – 130 °C (-4 °F – 266 °F)
PG 7	3 – 6,5	5	19	14	1.616.0700.01	1.646.0700.01	1.666.0700.01
PG 7	2 – 5	5	19	14	1.616.0700.15	1.646.0700.15	1.666.0700.15
PG 9	4 – 8	6	21	17	1.616.0900.01	1.646.0900.01	1.666.0900.01
PG 9	2 – 6	6	21	17	1.616.0900.15	1.646.0900.15	1.666.0900.15
PG 11	6 – 10	6	22	20	1.616.1100.01	1.646.1100.01	1.666.1100.01
PG 11	3 – 7	6	22	20	1.616.1100.15	1.646.1100.15	1.666.1100.15
PG 13,5	6 – 12	6,5	24	22	1.616.1300.01	1.646.1300.01	1.666.1300.01
PG 13,5	5 – 9	6,5	24	22	1.616.1300.15	1.646.1300.15	1.666.1300.15
PG 16	10 – 14	6,5	23	24	1.616.1600.01	1.646.1600.01	1.666.1600.01
PG 16	7 – 12	6,5	23	24	1.616.1600.15	1.646.1600.15	1.666.1600.15
PG 21	14 – 18	7	24	30	1.616.2100.01	1.646.2100.01	1.666.2100.01
PG 21	10 – 16	7	24	30	1.616.2100.15	1.646.2100.15	1.666.2100.15
PG 29	20 – 25	8	29	40	1.616.2900.01	1.646.2900.01	1.666.2900.01
PG 29	13 – 20	8	29	40	1.616.2900.15	1.646.2900.15	1.666.2900.15
PG 36	22 – 32	8	35	50	1.616.3600.01	1.646.3600.01	1.666.3600.01
PG 36	20 – 26	8	35	50	1.616.3600.15	1.646.3600.15	1.666.3600.15
PG 42	32 – 38	9	37	57	1.616.4200.01	1.646.4200.01	1.666.4200.01
PG 42	25 – 31	9	37	57	1.616.4200.15	1.646.4200.15	1.666.4200.15
PG 48	37 – 44	10	38	64	1.616.4800.01	1.646.4800.01	1.666.4800.01
PG 48	29 – 35	10	38	64	1.616.4800.15	1.646.4800.15	1.666.4800.15
3/8" NPT	4 – 8	15	21	17/19	1.616.3800.70	1.646.3800.70	1.666.3800.70
3/8" NPT	2 – 6	15	21	17/19	1.616.3800.71	1.646.3800.71	1.666.3800.71
1/2" NPT	6 – 12	13	24	22/24	1.616.1200.70	1.646.1200.70	1.666.1200.70
1/2" NPT	5 – 9	13	24	22/24	1.616.1200.71	1.646.1200.71	1.666.1200.71
3/4" NPT	14 – 18	13	25	30	1.616.3400.70	1.646.3400.70	1.666.3400.70
3/4" NPT	10 – 16	13	25	30	1.616.3400.71	1.646.3400.71	1.666.3400.71

➔ Accessories see page 71 and 141

HSK-EMC-Ex-e cable glands

HSK-MZ-EMV-Ex

Metr.



Material Nickel plated brass

Clamping insert Polyamide

Seal Buna-N

O-Ring Buna-N


 Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
within the specified clamping range

 Operating Temperature -20 °C – 95 °C (-4 °F – 203 °F) /
-60 °C – 95 °C (-76 °F – 203 °F)

 Advice:
- Elongated threads on request


II 2G 1D


 For the international certificates
please see page 174 or our homepage
www.hummel.com

 See our homepage www.hummel.com
for assembling advices for maximum
cable diameters


AG	$\varnothing$ mm	GL mm	H mm	$\varnothing$ mm	Number HSK-M-EMV-Ex -20 °C – 95 °C (-4 °F – 203 °F)	Number HSK-M-EMV-Ex -60 °C – 95 °C (-76 °F – 203 °F)
M 12 x 1,5	3 – 6,5	6,5	26	14	1.617.1200.50	1.647.1200.50
M 16 x 1,5	6 – 10	6	29	20	1.617.1600.50	1.647.1600.50
M 20 x 1,5	10 – 14	6	32	24	1.617.2000.50	1.647.2000.50
M 25 x 1,5	14 – 18	7	35	30	1.617.2500.50	1.647.2500.50
M 32 x 1,5	20 – 25	8	41	40	1.617.3200.50	1.647.3200.50
M 40 x 1,5	24 – 32	8	48	50	1.617.4000.50	1.647.4000.50
M 50 x 1,5	32 – 38	9	51	57	1.617.5000.50	1.647.5000.50
M 50 x 1,5	28 – 31	9	51	57	1.617.5000.51	1.647.5000.51
M 63 x 1,5	37 – 44	10	52	68	1.617.6300.50	1.647.6300.50
M 63 x 1,5	32 – 35	10	52	68	1.617.6300.51	1.647.6300.51

HSK-EMC-Ex-e cable glands

HSK-MZ-EMV-Ex / HSK-MZ-EMV-PVDF-Ex

PG

RoHS



II 2G 1D



For the international certificates
please see page 174 or our homepage
www.hummel.com

Material Nickel plated brass

Clamping insert Polyamide / PVDF


Seal Buna-N / FPM

O-Ring Buna-N / FPM

Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
within the specified clamping range

Operating Temperature -20 °C – 95 °C (-4 °F – 203 °F) / -60 °C – 95 °C
(-76 °F – 203 °F) / -20 °C – 130 °C (-4 °F – 266 °F) (PVDF)

Advice:
- Elongated threads on request



AG	$\varnothing$ mm	GL mm	H mm	$\varnothing$ mm	Number HSK-MZ-EMV-Ex -20 °C – 95 °C (-4 °F – 203 °F)	Number HSK-MZ-EMV-Ex -60 °C – 95 °C (-76 °F – 203 °F)	Number HSK-MZ-EMV-PVDF-Ex -20 °C – 130 °C (-4 °F – 266 °F)
PG 7	3–6,5	5	26	14	1.617.0700.01	1.647.0700.01	1.667.0700.01
PG 9	4–8	6	28	17	1.617.0900.01	1.647.0900.01	1.667.0900.01
PG 11	6–10	6	29	20	1.617.1100.01	1.647.1100.01	1.667.1100.01
PG 13,5	7–12	6,5	33	22	1.617.1300.01	1.647.1300.01	1.667.1300.01
PG 16	10–14	6,5	32	24	1.617.1600.01	1.647.1600.01	1.667.1600.01
PG 21	13–18	7	35	30	1.617.2100.01	1.647.2100.01	1.667.2100.01
PG 29	20–25	8	41	40	1.617.2900.01	1.647.2900.01	1.667.2900.01
PG 36	24–32	8	48	50	1.617.3600.01	1.647.3600.01	1.667.3600.01
PG 42	32–38	9	51	57	1.617.4200.01	1.647.4200.01	1.667.4200.01
PG 42	28–31	9	51	57	1.617.4200.15	1.647.4200.15	1.667.4200.15
PG 48	37–44	10	51	64	1.617.4800.01	1.647.4800.01	1.667.4800.01
PG 48	32–35	10	51	64	1.617.4800.15	1.647.4800.15	1.667.4800.15

➔ Accessories see page 71 and 141

HSK-MZ-EMV-Ex / HSK-MZ-EMV-PVDF-Ex

NPT




Material	Nickel plated brass
Clamping insert	Polyamide / PVDF
Seal	Buna-N / FPM
O-Ring	Buna-N / FPM
Protection	IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG) within the specified clamping range
Operating Temperature	-20 °C – 95 °C (-4 °F – 203 °F) / -60 °C – 95 °C (-76 °F – 203 °F) / -20 °C – 130 °C (-4 °F – 266 °F) (PVDF)



RoHS

II 2G 1D

For the international certificates
please see page 174 or our homepage
www.hummel.com



AG	 mm	GL mm	H mm	 mm	Number	Number	Number
					HSK-MZ-EMV-Ex -20 °C – 95 °C (-4 °F – 203 °F)	HSK-MZ-EMV-Ex -60 °C – 95 °C (-76 °F – 203 °F)	HSK-MZ-EMV-PVDF-Ex -20 °C – 130 °C (-4 °F – 266 °F)
3/8" NPT	4–8	15	27	17/19	1.617.3800.70	1.647.3800.70	1.667.3800.70
1/2" NPT	7–12	13	31	22/24	1.617.1200.70	1.647.1200.70	1.667.1200.70
3/4" NPT	13–18	13	36	30	1.617.3400.70	1.647.3400.70	1.667.3400.70

Industrial cable glands

HSK Ex-e cable glands for special applications

Cable glands of the HSK-Ex-e-series have been designed for standard applications in hazardous locations type "e" according to EN 60079-0 and EN 60079-7.



You can find in this chapter:

HSK-Ex-e cable glands

- made of polyamide and nickel plated brass with multi hole and flat cable sealing inserts
- made of polyamide and nickel plated brass with additional stain relief

We provide variable clamping ranges, thread lengths, thread types plus different sealing materials and temperature ranges. Our range is completed by global certifications.

For any further question please do not hesitate to contact us. We look forward to develop solutions together with you. You profit of our vast knowledge in development, engineering and production technology.

Contact us:

E-Mail: info.et@hummel.com

Tel.: +49(0) 76 66/9 11 10-0

Advice:

➔ you can find HSK-Ex-d standard cable glands from page 137

HSK Ex-e cable glands for special applications

HSK-K-Multi-Ex

Metr., PG, NPT



Material Polyamide V0 according to UL 94

Seal Elastomer

Protection IP 68

Operating Temperature -20 °C – 95 °C (-4 °F – 203 °F)


Colors grey (RAL 7035), black (RAL 9005)

O-Ring Buna-N

Advice:
- Installation instruction see page 170



For the international certificates
please see page 174 or our homepage
www.hummel.com



AG	GL mm	H mm	mm	Number of Holes x d	Number grey	Number black	Number of Holes x d	Number grey	Number black
M 16 x 1,5	8	22	19	4 x 1,4	1.599.1600.50	1.599.1600.51	2 x 3	1.599.1601.50	1.599.1601.51
M 20 x 1,5	9	27	24	6 x 3	1.599.2001.50	1.599.2001.51	2 x 5	1.599.2003.50	1.599.2003.51
M 25 x 1,5	11	31	33	4 x 6	1.599.2500.50	1.599.2500.51	3 x 7	1.599.2501.50	1.599.2501.51
M 32 x 1,5	11	39	42	6 x 6,5	1.599.3200.50	1.599.3200.51	4 x 9	1.599.3201.50	1.599.3201.51
M 40 x 1,5	13	48	53	7 x 9	1.599.4001.50	1.599.4001.51	2 x 15	1.599.4003.50	1.599.4003.51
M 50 x 1,5	13	49	60		1.599.5099.50	1.599.5099.51			
M 63 x 1,5	14	49	65/68	6 x 12	1.599.6301.50	1.599.6301.51	3 x 18	1.599.6302.50	1.599.6302.51
PG 9	8	22	19	4 x 1,4	1.599.0900.00	1.599.0900.01	2 x 3	1.599.0901.00	1.599.0901.01
PG 11	8	25	22	2 x 4	1.599.1102.00	1.599.1102.01	3 x 3	1.599.1101.00	1.599.1101.01
PG 13,5	9	27	24	3 x 4	1.599.1302.00	1.599.1302.01	2 x 5	1.599.1303.00	1.599.1303.01
PG 16	10	28	27	4 x 4	1.599.1602.00	1.599.1602.01	6 x 4	1.599.1604.00	1.599.1604.01
PG 16	10	28	27	3 x 5,6	1.599.1606.00	1.599.1606.01	2 x 6	1.599.1605.00	1.599.1605.01
PG 21	11	31	33	4 x 6	1.599.2100.00	1.599.2100.01	3 x 7	1.599.2101.00	1.599.2101.01
PG 29	11	39	42	6 x 6,5	1.599.2900.00	1.599.2900.01	4 x 9	1.599.2901.00	1.599.2901.01
PG 36	13	48	53	7 x 9	1.599.3601.00	1.599.3601.01	2 x 15	1.599.3603.00	1.599.3603.01
PG 48	14	49	65	6 x 12	1.599.4801.00	1.599.4801.01	3 x 18	1.599.4802.00	1.599.4802.01
3/8" NPT	15	22	19/22	4 x 1,4	1.599.3800.70	1.599.3800.71	2 x 3	1.599.3801.70	1.599.3801.71
1/2" NPT	13	27	24	3 x 4	1.599.1202.70	1.599.1202.71	2 x 5	1.599.1203.70	1.599.1203.71
1/2" NPT/16	13	28	27	6 x 4	1.599.1220.70	1.599.1220.71	2 x 6	1.599.1221.70	1.599.1221.71
3/4" NPT	14	31	33	4 x 6	1.599.3400.70	1.599.3400.71	3 x 7	1.599.3401.70	1.599.3401.71
1" NPT	19	39	42	6 x 6,5	1.599.1000.70	1.599.1000.71	4 x 9	1.599.1001.70	1.599.1001.71
1 1/4" NPT	16	39	42/46		1.599.5499.70	1.599.5499.71			
1 1/2" NPT	20	48	53	5 x 9	1.599.6400.70	1.599.6400.71	7 x 9	1.599.6401.70	1.599.6401.71

The shown inserts are samples, more inserts upon request

➔ Accessories see page 71 and 141

HSK Ex-e cable glands for special applications

HSK-K-FLAKA-Ex

Metr., PG, NPT



II 2G 1D



For the international certificates
please see page 174 or our homepage
www.hummel.com

Material Polyamide V0 according to UL 94

Seal Elastomer

Protection IP 68


Operating Temperature -20 °C – 95 °C (-4 °F – 203 °F)

Colors grey (RAL 7035), black (RAL 9005)

O-Ring Buna-N

Advice:

- Installation instruction see page 170



AG	GL mm	H mm	mm	B x H mm	Number grey	Number black	B x H mm	Number grey	Number black
M 20 x 1,5	9	28	27	12 x 7	1.589.2017.50	1.589.2017.51	14 x 6	1.589.2018.50	1.589.2018.51
M 25 x 1,5	11	31	33	14 x 6	1.589.2500.50	1.589.2500.51	14 x 7	1.589.2501.50	1.589.2501.51
M 32 x 1,5	11	39	42	22 x 8	1.589.3200.50	1.589.3200.51			
M 40 x 1,5	13	48	53	28,5 x 10	1.589.4000.50	1.589.4000.51	29 x 5,5	1.589.4001.50	1.589.4001.51
M 40 x 1,5	13	48	53	30,5 x 12	1.589.4002.50	1.589.4002.51	31 x 7,5	1.589.4003.50	1.589.4003.51
M 50 x 1,5	13	49	60	33,5 x 11,5	1.589.5000.50	1.589.5000.51			
PG 16	10	28	27	12 x 7	1.589.1601.00	1.589.1601.01	14 x 6	1.589.1602.00	1.589.1602.01
PG 21	11	31	33	14 x 6	1.589.2100.00	1.589.2100.01	14 x 7	1.589.2101.00	1.589.2101.01
PG 29	11	39	42	22 x 8	1.589.2900.00	1.589.2900.01			
PG 36	13	48	53	28,5 x 10	1.589.3600.00	1.589.3600.01	29 x 5,5	1.589.3601.00	1.589.3601.01
PG 36	13	48	53	30,5 x 12	1.589.3602.00	1.589.3602.01	31 x 7,5	1.589.3603.00	1.589.3603.01
PG 42	13	49	60	33,5 x 11,5	1.589.4200.00	1.589.4200.01			
1/2" NPT/16	13	28	27	12 x 7	1.589.1217.70	1.589.1217.71	14 x 6	1.589.1218.70	1.589.1218.71
3/4" NPT	14	31	33	14 x 6	1.589.3400.70	1.589.3400.71			
1" NPT	19	39	42	22 x 8	1.589.1000.70	1.589.1000.71			
1 1/4" NPT	16	39	42/46	22 x 8	1.589.5400.70	1.589.5400.71			
1 1/2" NPT	20	48	53	28,5 x 10	1.589.6400.70	1.589.6400.71	29 x 5,5	1.589.6401.70	1.589.6401.71
1 1/2" NPT	20	48	53	30,5 x 12	1.589.6402.70	1.589.6402.71	31 x 7,5	1.589.6403.70	1.589.6403.71

The shown inserts are samples, more inserts upon request



Accessories see page 71 and 141

HSK Ex-e cable glands for special applications

HSK-K-MZ-Ex

Metr.



For the international certificates
please see page 174 or our homepage
www.hummel.com


Material Polyamide-AL

Seal Buna-N

Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
within the specified clamping range

O-Ring Buna-N

Operating Temperature -20 °C – 70 °C (-4 °F – 158 °F)



AG	$\varnothing$ mm	GL mm	H mm	 mm	Number
M 16 x 1,5	4 – 8	15	29	19	1.215.1601.50
M 20 x 1,5	6 – 12	15	35,5	24	1.215.2001.50
M 25 x 1,5	13 – 18	11	41	33	1.215.2501.50
M 32 x 1,5	18 – 25	11	49	42	1.215.3201.50
M 40 x 1,5	22 – 32	13	58	53	1.215.4001.50
M 50 x 1,5	32 – 38	13	61,5	60	1.215.5001.50
M 63 x 1,5	37 – 44	14	62	65/68	1.215.6301.50

➔ Accessories see page 71 and 141

HSK-K-MZ-Ex

PG



For the international certificates
please see page 174 or our homepage
www.hummel.com


Material Polyamide-AL

Seal Buna-N

Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
within the specified clamping range

O-Ring Buna-N

Operating Temperature -20 °C – 70 °C (-4 °F – 158 °F)



AG	$\varnothing$ mm	GL mm	H mm	 mm	Number
PG 9	4 – 8	15	29	19	1.215.0901.14
PG 11	6 – 10	15	32,5	22	1.215.1101.14
PG 13,5	6 – 12	15	35,5	24	1.215.1301.14
PG 16	10 – 14	10	37,5	27	1.215.1601.14
PG 21	13 – 18	11	41	33	1.215.2101.14
PG 29	18 – 25	11	49	42	1.215.2901.14
PG 36	22 – 32	13	58	53	1.215.3601.14
PG 42	32 – 38	13	61,5	60	1.215.4201.14
PG 48	37 – 44	14	62	65	1.215.4801.14

➔ Accessories see page 71 and 141

HSK Ex-e cable glands for special applications

HSK-M-Multi-Ex

Metr., PG, NPT



II 2G 1D



For the international certificates
please see page 174 or our homepage
www.hummel.com

Material Nickel plated brass

Clamping insert Polyamide

Seal Elastomer


O-Ring Buna-N

Protection IP 68

Operating Temperature -20 °C – 95 °C (-4 °F – 203 °F)

Advice:

- Stainless steel on request



AG	GL mm	H mm	mm	Number of Holes x d	Number	Number of Holes x d	Number
M 16 x 1,5	6	21	17 / 19	4 x 1,4	1.687.1600.50	2 x 3	1.687.1601.50
M 20 x 1,5	6	23	22	6 x 3	1.687.2001.50	2 x 5	1.687.2003.50
M 25 x 1,5	7	26	30	4 x 6	1.687.2500.50	3 x 7	1.687.2501.50
M 32 x 1,5	8	31	40	6 x 6,5	1.687.3200.50	4 x 9	1.687.3201.50
M 40 x 1,5	8	37	50	7 x 9	1.687.4001.50	2 x 15	1.687.4003.50
M 50 x 1,5	9	37	57				1.687.5099.50
M 63 x 1,5	10	38	64 / 68	6 x 12	1.687.6301.50	3 x 18	1.687.6302.50
PG 9	6	21	17	4 x 1,4	1.687.0900.01	2 x 3	1.687.0901.01
PG 11	6	22	20	2 x 4	1.687.1102.01	3 x 3	1.687.1101.01
PG 13,5	6,5	24	22	3 x 4	1.687.1302.01	2 x 5	1.687.1303.01
PG 16	6,5	23	24	4 x 4	1.687.1602.01	6 x 4	1.687.1604.01
PG 16	6,5	23	24	3 x 5,6	1.687.1606.01	2 x 6	1.687.1605.01
PG 21	7	24	30	4 x 6	1.687.2100.01	3 x 7	1.687.2101.01
PG 29	8	29	40	6 x 6,5	1.687.2900.01	4 x 9	1.687.2901.01
PG 36	8	35	50	7 x 9	1.687.3601.01	2 x 15	1.687.3603.01
PG 48	10	38	64	6 x 12	1.687.4801.01	3 x 18	1.687.4802.01
3/8" NPT	15	21	17 / 19	4 x 1,4	1.687.3800.70	2 x 3	1.687.3801.70
1/2" NPT	13	24	24	3 x 4	1.687.1220.70	2 x 5	1.687.1203.70
3/4" NPT	13	25	30	4 x 6	1.687.3400.70	3 x 7	1.687.3401.70
1" NPT	19	29	40	6 x 6,5	1.687.1000.70	4 x 9	1.687.1001.70

The shown inserts are samples, more inserts upon request

➔ Accessories see page 71 and 141

HSK Ex-e cable glands for special applications

HSK-M-FLAKA-Ex

Metr.



For the international certificates
please see page 174 or our homepage
www.hummel.com

Material Nickel plated brass

Clamping insert Polyamide

Seal Elastomer


O-Ring Buna-N

Operating Temperature -20 °C – 95 °C (-4 °F – 203 °F)

Advice:
- Stainless steel on request



ATEX II 2G 1D



AG	GL mm	H mm	mm	w x h mm	Number	w x h mm	Number
M 20 x 1,5	6	24	24	12 x 7	1.689.2017.50	14 x 6	1.689.2018.50
M 25 x 1,5	7	26	30	14 x 6	1.689.2500.50	14 x 7	1.689.2501.50
M 32 x 1,5	8	31	40	22 x 8	1.689.3200.50		
M 40 x 1,5	8	37	50	28,5 x 10	1.689.4000.50	29 x 5,5	1.689.4001.50
M 40 x 1,5	8	37	50	30,5 x 12	1.689.4002.50	31 x 7,5	1.689.4003.50
M 50 x 1,5	9	37	57	33,5 x 11,5	1.689.5000.50		
M 63 x 1,5	10	38	64/68	38 x 12	1.689.6300.50		

The shown inserts are samples, more inserts on request

Accessories see page 71 and 141

HSK-M-FLAKA-Ex

PG, NPT



For the international certificates
please see page 174 or our homepage
www.hummel.com

Material Nickel plated brass

Clamping insert Polyamide

Seal Elastomer


O-Ring Buna-N

Operating Temperature -20 °C – 95 °C (-4 °F – 203 °F)

Advice:
- Stainless steel on request



ATEX II 2G 1D



AG	GL mm	H mm	mm	w x h mm	Number	w x h mm	Number
PG 16	6,5	23	24	12 x 7	1.689.1601.01	14 x 6	1.689.1602.01
PG 21	7	24	30	14 x 6	1.689.2100.01	14 x 7	1.689.2101.01
PG 29	8	29	40	22 x 8	1.689.2900.01		
PG 36	8	35	50	28,5 x 10	1.689.3600.01	29 x 5,5	1.689.3601.01
PG 36	8	35	50	30,5 x 12	1.689.3602.01	31 x 7,5	1.689.3603.01
PG 42	9	37	57	33,5 x 11,5	1.689.4200.01		
PG 48	10	38	64	38 x 12	1.689.4802.01		
3/4" NPT	13	25	30	14 x 6	1.689.3400.70	14 x 7	1.689.3401.70
1" NPT	19	29	40	22 x 8	1.689.1000.70		

The shown inserts are samples, more inserts on request

Accessories see page 71 and 141

HSK Ex-e cable glands for special applications

HSK-MZ-Ex / HSK-MZ-PVDF-Ex

Metr.



II 2G 1D



For the international certificates
please see page 174 or our homepage
www.hummel.com

Material Nickel plated brass

Clamping insert Polyamide / PVDF

Seal Buna-N / FPM


O-Ring Buna-N / FPM

Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
within the specified clamping range

Operating Temperature -20 °C – 95 °C (-4 °F – 203 °F) / -60 °C – 95 °C
(-76 °F – 203 °F) / -20 °C – 130 °C (-4 °F – 266 °F) (PVDF)

Advice:

- Elongated threads on request.



AG	$\varnothing$ mm	GL mm	H mm	$\varnothing$ mm	Number HSK-MZ-Ex -20 °C – 95 °C (-4 °F – 203 °F)	Number HSK-MZ-Ex -60 °C – 95 °C (-76 °F – 203 °F)	Number HSK-MZ-PVDF-Ex -20 °C – 130 °C (-4 °F – 266 °F)
M 12 x 1,5	3 – 6,5	6,5	26	14	1.611.1200.50	1.641.1200.50	1.661.1200.50
M 16 x 1,5	4 – 8	6	28	19	1.611.1600.50	1.641.1600.50	1.661.1600.50
M 16 x 1,5	6 – 10	6	30	20	1.611.1611.50	1.641.1611.50	1.661.1611.50
M 20 x 1,5	6 – 12	6	33	22	1.611.2000.50	1.641.2000.50	1.661.2000.50
M 20 x 1,5	10 – 14	6	33	24	1.611.2016.50	1.641.2016.50	1.661.2016.50
M 25 x 1,5	14 – 18	7	37	30	1.611.2500.50	1.641.2500.50	1.661.2500.50
M 32 x 1,5	20 – 25	8	43	40	1.611.3200.50	1.641.3200.50	1.661.3200.50
M 40 x 1,5	24 – 32	8	50	50	1.611.4000.50	1.641.4000.50	1.661.4000.50
M 50 x 1,5	32 – 38	9	51	57	1.611.5000.50	1.641.5000.50	
M 63 x 1,5	37 – 44	10	52	64/68	1.611.6300.50	1.641.6300.50	



Accessories see page 71 and 141

HSK Ex-e cable glands for special applications

HSK-MZ-Ex / HSK-MZ-PVDF-Ex


PG


For the international certificates
please see page 174 or our homepage
www.hummel.com

Advice:

- Elongated threads on request.

Material	Nickel plated brass
Clamping insert	Polyamide / PVDF
Seal	Buna-N / FPM
O-Ring	Buna-N / FPM
Protection	IP 68 – 10 bar / IP 69K within the specified clamping range
Operating Temperature	-20 °C – 95 °C (-4 °F – 203 °F) / -60 °C – 95 °C (-76 °F – 203 °F) / -20 °C – 130 °C (-4 °F – 266 °F) (PVDF)


ATEX
II 2G 1D


AG	$\varnothing$ mm	GL mm	H mm	$\varnothing$ mm	Number HSK-MZ-Ex -20 °C – 95 °C (-4 °F – 203 °F)	Number HSK-MZ-Ex -60 °C – 95 °C (-76 °F – 203 °F)	Number HSK-MZ-PVDF-Ex -20 °C – 130 °C (-4 °F – 266 °F)
PG 7	3 – 6,5	5	26	14	1.611.0700.01	1.641.0700.01	1.661.0700.01
PG 9	4 – 8	6	28	17	1.611.0900.01	1.641.0900.01	1.661.0900.01
PG 11	6 – 10	6	30	20	1.611.1100.01	1.641.1100.01	1.661.1100.01
PG 13,5	7 – 12	6	33	22	1.611.1300.01	1.641.1300.01	1.661.1300.01
PG 16	10 – 14	6	33	24	1.611.1600.01	1.641.1600.01	1.661.1600.01
PG 21	13 – 18	7	37	30	1.611.2100.01	1.641.2100.01	1.661.2100.01
PG 29	20 – 25	8	43	40	1.611.2900.01	1.641.2900.01	1.661.2900.01
PG 36	24 – 32	8	50	50	1.611.3600.01	1.641.3600.01	1.661.3600.01
PG 42	32 – 38	9	51	57	1.611.4200.01	1.641.4200.01	1.661.4200.01
PG 48	37 – 44	10	52	64	1.611.4800.01	1.641.4800.01	1.661.4800.01

➔ Accessories see page 71 and 141

HSK-MZ-Ex / HSK-MZ-PVDF-Ex


NPT


For the international certificates
please see page 174 or our homepage
www.hummel.com

Advice:

- Elongated threads on request.

Material	Nickel plated brass
Clamping insert	Polyamide / PVDF
Seal	Buna-N / FPM
O-Ring	Buna-N / FPM
Protection	IP 68 – 10 bar / IP 69K within the specified clamping range
Operating Temperature	-20 °C – 95 °C (-4 °F – 203 °F) / -60 °C – 95 °C (-76 °F – 203 °F) / -20 °C – 130 °C (-4 °F – 266 °F) (PVDF)


ATEX
II 2G 1D


AG	$\varnothing$ mm	GL mm	H mm	$\varnothing$ mm	Number HSK-MZ-Ex -20 °C – 95 °C (-4 °F – 203 °F)	Number HSK-MZ-Ex -60 °C – 95 °C (-76 °F – 203 °F)	Number HSK-MZ-PVDF-Ex -20 °C – 130 °C (-4 °F – 266 °F)
3/8" NPT	4 – 8	15	28	17 / 19	1.611.3800.70	1.641.3800.70	1.661.3800.70
1/2" NPT	7 – 12	13	33	22 / 24	1.611.1200.70	1.641.1200.70	1.661.1200.70
3/4" NPT	13 – 18	13	37	30	1.611.3400.70	1.641.3400.70	1.661.3400.70
1" NPT	20 – 25	19	43	40	1.611.1000.70	1.641.1000.70	

➔ Accessories see page 71 and 141

Industrial cable glands

HSK-Ex-d standard cable glands

Cable glands of the HSK-Ex-d series have been designed for standard applications in hazardous locations type "e" and/or "d" according to EN 60079-0, EN 60079-1 and EN 60079-7



You can find in this chapter:

HSK-Ex-d cable glands

- made of nickel plated brass
- made of nickel plated brass with additional strain relief
- acid-resistant stainless steel

We provide variable clamping ranges, thread types and temperature ranges. Our range is completed by global certifications.

For any further question please do not hesitate to contact us. We look forward to develop solutions together with you. You profit of our vast knowledge in development, engineering and production technology.

Contact us:

E-Mail: info.et@hummel.com

Tel.: +49(0) 76 66/9 11 10-0

HSK-Ex-d standard cable glands

HSK-M-Ex-d / HSK-M-PVDF-Ex-d

Metr.




For the international certificates
please see page 174 or our homepage
www.hummel.com

Material	Nickel plated brass
Clamping insert	Polyamide / PVDF
Seal	FPM / FPM
O-Ring	FPM / FPM
Protection	IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG) within the specified clamping range
Operating Temperature	-60 °C – 105 °C (-76 °F – 221 °F) (PA) -20 °C – 130 °C (-4 °F – 266 °F) (PVDF)



II 2G 1D Ex d IIC



AG	mm	GL mm	H mm	mm	Number HSK-M-Ex-d -60 °C – 105 °C (-76 °F – 221 °F)	Number HSK-M-PVDF-Ex-d -20 °C – 130 °C (-4 °F – 266 °F)
M 12 x 1,5	3 – 6,5	16	19	14	1.622.1200.50	1.634.1200.50
M 12 x 1,5	2 – 5	16	19	14	1.622.1200.51	1.634.1200.51
M 16 x 1,5	5 – 10	16	22	20	1.622.1600.50	1.634.1600.50
M 16 x 1,5	3 – 7	16	22	20	1.622.1600.51	1.634.1600.51
M 20 x 1,5	10 – 14	16	25	24	1.622.2000.50	1.634.2000.50
M 20 x 1,5	7 – 12	16	25	24	1.622.2000.51	1.634.2000.51
M 25 x 1,5	13 – 18	16	26,5	30	1.622.2500.50	1.634.2500.50
M 25 x 1,5	9 – 16	16	26,5	30	1.622.2500.51	1.634.2500.51
M 32 x 1,5	18 – 25	16	32	40	1.622.3200.50	1.634.3200.50
M 32 x 1,5	14 – 20	16	32	40	1.622.3200.51	1.634.3200.51
M 40 x 1,5	22 – 32	16	38,5	50	1.622.4000.50	1.634.4000.50
M 40 x 1,5	20 – 26	16	38,5	50	1.622.4000.51	1.634.4000.51

Accessories see page 71 and 141

HSK-M-Ex-d / HSK-M-PVDF-Ex-d

NPT




For the international certificates
please see page 174 or our homepage
www.hummel.com

Material	Nickel plated brass
Clamping insert	Polyamide / PVDF
Seal	FPM / FPM
O-Ring	FPM / FPM
Protection	IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG) within the specified clamping range
Operating Temperature	-60 °C – 105 °C (-76 °F – 221 °F) (PA) -20 °C – 130 °C (-4 °F – 266 °F) (PVDF)



II 2G 1D Ex d IIC



AG	mm	GL mm	H mm	mm	Number HSK-M-Ex-d -60 °C – 105 °C (-76 °F – 221 °F)	Number HSK-M-PVDF-Ex-d -20 °C – 130 °C (-4 °F – 266 °F)
NPT 3/8"	5 – 10	16	22	20	1.622.3800.70	1.634.3800.70
NPT 3/8"	3 – 7	16	22	20	1.622.3800.71	1.634.3800.71
NPT 1/2"	10 – 14	20	25	24	1.622.1200.70	1.634.1200.70
NPT 1/2"	7 – 12	20	25	24	1.622.1200.71	1.634.1200.71
NPT 3/4"	13 – 18	20,5	26,5	30	1.622.3400.70	1.634.3400.70
NPT 3/4"	9 – 16	20,5	26,5	30	1.622.3400.71	1.634.3400.71
NPT 1"	18 – 25	25	32	40	1.622.1000.70	
NPT 1"	14 – 20	25	32	40	1.622.1000.71	
NPT 1 1/4"	22 – 32	26	38,5	50	1.622.5400.70	
NPT 1 1/4"	20 – 26	26	38,5	50	1.622.5400.71	
NPT 1 1/2"	22 – 32	26,5	38,5	50	1.622.6400.70	
NPT 1 1/2"	20 – 26	26,5	38,5	50	1.622.6400.71	

Accessories see page 71 and 141


HSK-Ex-d standard cable glands

HSK-MZ-Ex-d

Metr.



II 2G 1D Ex d IIC



Material	Nickel plated brass
Clamping insert	Polyamide
Seal	FPM
O-Ring	FPM
Protection	IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG) within the specified clamping range
Operating Temperature	-60 °C – 105 °C (-76 °F – 221 °F)



For the international certificates
please see page 174 or our homepage
www.hummel.com

AG	 mm	GL mm	H mm	 mm	Number HSK-MZ-Ex-d -60 °C – 105 °C (-76 °F – 221 °F)
M 12 x 1,5	3 – 6,5	16	26	14	1.628.1200.50
M 16 x 1,5	5 – 10	16	30	20	1.628.1600.50
M 20 x 1,5	10 – 14	16	34	24	1.628.2000.50
M 25 x 1,5	13 – 18	16	38	30	1.628.2500.50
M 32 x 1,5	18 – 25	16	44	40	1.628.3200.50
M 40 x 1,5	22 – 32	16	51,5	50	1.628.4000.50




Accessories see page 71 and 141

HSK-MZ-Ex-d

NPT



II 2G 1D Ex d IIC



Material	Nickel plated brass
Clamping insert	Polyamide
Seal	FPM
O-Ring	FPM
Protection	IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG) within the specified clamping range
Operating Temperature	-60°C – 105°C (-76°F – 221°F)



For the international certificates
please see page 174 or our homepage
www.hummel.com

AG	 mm	GL mm	H mm	 mm	Number HSK-MZ-Ex-d -60 °C – 105 °C (-76 °F – 221 °F)
NPT 3/8"	5 – 10	16	30	20	1.628.3800.70
NPT 1/2"	10 – 14	20	34	24	1.628.1200.70
NPT 3/4"	13 – 18	20,5	38	30	1.628.3400.70
NPT 1"	18 – 25	25	44	40	1.628.1000.70
NPT 1 1/4"	22 – 32	26	51,5	50	1.628.5400.70
NPT 1 1/2"	22 – 32	26,5	51,5	50	1.628.6400.70



Accessories see page 71 and 141

HSK-Ex-d standard cable glands

HSK-INOX-Ex-d / HSK-INOX-PVDF-Ex-d

Metr.


For the international certificates
please see page 174 or our homepage
www.hummel.com

Material INOX (1.4404)


Clamping insert Polyamide / PVDF

Seal FPM / FPM

O-Ring FPM / FPM

Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
within the specified clamping range

Operating Temperature -60 °C – 105 °C (-76 °F – 221 °F) (PA)
-20 °C – 130 °C (-4 °F – 266 °F) (PVDF)


II 2G 1D Ex d IIC


AG	$\varnothing$ mm	GL mm	H mm	$\varnothing$ mm	Number HSK-INOX-Ex-d -60 °C – 105 °C (-76 °F – 221 °F)	Number HSK-INOX-PVDF-Ex-d -20 °C – 130 °C (-4 °F – 266 °F)
M 12 x 1,5	3 – 6,5	16	19	14	1.632.1200.50	1.633.1200.50
M 12 x 1,5	2 – 5	16	19	14	1.632.1200.51	1.633.1200.51
M 16 x 1,5	5 – 10	16	22	20	1.632.1600.50	1.633.1600.50
M 16 x 1,5	3 – 7	16	22	20	1.632.1600.51	1.633.1600.51
M 20 x 1,5	10 – 14	16	25	24	1.632.2000.50	1.633.2000.50
M 20 x 1,5	7 – 12	16	25	24	1.632.2000.51	1.633.2000.51
M 25 x 1,5	13 – 18	16	26,5	30	1.632.2500.50	1.633.2500.50
M 25 x 1,5	9 – 16	16	26,5	30	1.632.2500.51	1.633.2500.51
M 32 x 1,5	18 – 25	16	32	40	1.632.3200.50	1.633.3200.50
M 32 x 1,5	14 – 20	16	32	40	1.632.3200.51	1.633.3200.51
M 40 x 1,5	22 – 32	16	38,5	50	1.632.4000.50	1.633.4000.50
M 40 x 1,5	20 – 26	16	38,5	50	1.632.4000.51	1.633.4000.51

➔ Accessories see page 71 and 141

HSK-INOX-Ex-d / HSK-INOX-PVDF-Ex-d

NPT


For the international certificates
please see page 174 or our homepage
www.hummel.com

Material INOX (1.4404)


Clamping insert Polyamide / PVDF

Seal FPM / FPM

O-Ring FPM / FPM

Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
within the specified clamping range

Operating Temperature -60 °C – 105 °C (-76 °F – 221 °F) (PA)
-20 °C – 130 °C (-4 °F – 266 °F) (PVDF)


II 2G 1D Ex d IIC


AG	$\varnothing$ mm	GL mm	H mm	$\varnothing$ mm	Number HSK-INOX-Ex-d -60 °C – 105 °C (-76 °F – 221 °F)	Number HSK-INOX-PVDF-Ex-d -20 °C – 130 °C (-4 °F – 266 °F)
NPT 3/8"	5 – 10	16	22	20	1.632.3800.70	1.633.3800.70
NPT 3/8"	3 – 7	16	22	20	1.632.3800.71	1.633.3800.71
NPT 1/2"	10 – 14	20	25	24	1.632.1200.70	1.633.1200.70
NPT 1/2"	7 – 12	20	25	24	1.632.1200.71	1.633.1200.71
NPT 3/4"	13 – 18	20,5	26,5	30	1.632.3400.70	1.633.3400.70
NPT 3/4"	9 – 16	20,5	26,5	30	1.632.3400.71	1.633.3400.71

➔ Accessories see page 71 and 141

Industrial cable glands

Ex accessories

You can find in this chapter accessories for all series of our industrial cable glands for hazardous locations with protection "e" and/or "d":

- accessories made of plastic starting on page 142
- accessories made of nickel plated brass starting on page 145
- accessories made of stainless steel starting on page 149



V-Ex

Metr.




Material	Polyamide, fiber reinforced
O-Ring	Buna-N
Protection	IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
Operating Temperature	-20 °C – 90 °C (-4 °F – 194 °F)
Colors	black (RAL 9005)



II 2G 1D

For the international certificates
please see page 174 or our homepage
www.hummel.com



AG	GL mm	H mm	D mm	 mm	 mm	Number
M 12 x 1,5	8,5	13	16,5	15	6	1.297.1201.50
M 16 x 1,5	8,5	13	20,5	19	8	1.297.1601.50
M 20 x 1,5	9	14,5	25,5	24	8	1.297.2001.50
M 25 x 1,5	10,5	16	30,5	28	8	1.297.2501.50
M 32 x 1,5	11,5	17,5	38	36	8	1.297.3201.50
M 40 x 1,5	11,5	18	48	46	8	1.297.4001.50
M 50 x 1,5	13,5	20	60	55	8	1.297.5001.50
M 63 x 1,5	14,5	21	75	70	8	1.297.6301.50

V-Ex

PG

RoHS

CE

PG


IECEx

ATEX

IECEx

II 2G 1D

For the international certificates
please see page 174 or our homepage
www.hummel.com




Material Polyamide

O-Ring Buna-N

Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)

Operating Temperature -20 °C – 90 °C (-4 °F – 194 °F)

Colors black (RAL 9005)

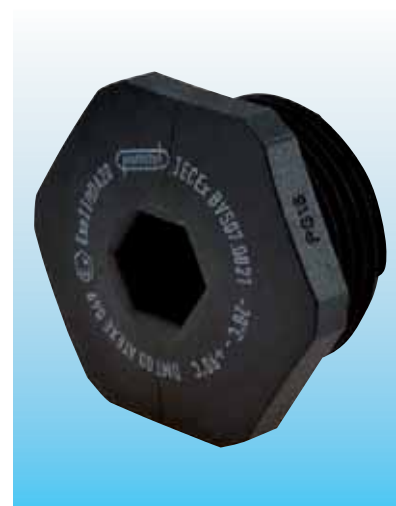

AG	GL mm	H mm	D mm	 mm	 mm	Number
PG 7	8,5	13	16,5	15	6	1.297.0701.11
PG 9	8,5	13	20,5	19	8	1.297.0901.11
PG 11	9	14,5	25,5	24	8	1.297.1101.11
PG 13,5	9	14,5	25,5	24	8	1.297.1301.11
PG 16	10,5	16	30,5	28	8	1.297.1601.11
PG 21	11,5	17,5	38	36	8	1.297.2101.11
PG 29	11,5	18	48	46	8	1.297.2901.11
PG 36	13,5	20	60	55	8	1.297.3601.11
PG 42	13,5	20	65	60	8	1.297.4201.11
PG 48	14,5	21	75	70	8	1.297.4801.11

HSK-V-Ex

Metr., PG, NPT




Material Elastomer

Operating Temperature -20 °C – 95 °C (-4 °F – 203 °F)

Colors black (RAL 9005)

Advice:
- Elongated threads on request



II 2G 1D

For the international certificates
please see page 174 or our homepage
www.hummel.com

Fits the Following Sizes			D mm	d mm	H mm	h mm	Number
PG 7	M 12 x 1,5		9,5	6,3	11,5	4,5	1.296.0701.11
PG 9	M 16 x 1,5	NPT 3/8"	11	7,8	13,5	5,5	1.296.0901.11
PG 11	M 16 x 1,5		13,5	9,8	14,5	5,5	1.296.1101.11
PG 13,5	M 20 x 1,5	NPT 1/2"	16	11,8	18	8	1.296.1301.11
PG 16	M 20 x 1,5	NPT 1/2"/16	18,5	13,8	19	9	1.296.1601.11
PG 21	M 25 x 1,5	NPT 3/4"	22	17,8	22	11	1.296.2101.11
PG 29	M 32 x 1,5	NPT 1" NPT 1 1/4"	29	25	25	10	1.296.2901.11
PG 36	M 40 x 1,5	NPT 1 1/2"	38	32	28	11	1.296.3601.11
PG 42	M 50 x 1,5		43	38	30	12	1.296.4201.11
PG 48	M 63 x 1,5		49	44	30	12	1.296.4801.11

HSK-V-Ex MZ variety

Metr., PG, NPT




Material Elastomer

Operating Temperature -20 °C – 95 °C (-4 °F – 203 °F)

Colors black (RAL 9005)

Advice:
- This plug is suitable in all HSK glands with additional strain relief



II 2G 1D

For the international certificates
please see page 174 or our homepage
www.hummel.com


Fits the Following Sizes			D mm	d mm	H mm	h mm	Number
PG 7	M 12 x 1,5		9,5	6,3	18	4,5	1.296.0701.61
PG 9	M 16 x 1,5	NPT 3/8"	11	7,8	20,5	5,5	1.296.0901.61
PG 11	M 16 x 1,5		13,5	9,8	22	5,5	1.296.1101.61
PG 13,5	M 20 x 1,5	NPT 1/2"	16	11,8	26,5	8	1.296.1301.61
PG 16	M 20 x 1,5	NPT 1/2"/16	18,5	13,8	28,4	9	1.296.1601.61
PG 21	M 25 x 1,5	NPT 3/4"	22	17,8	32	11	1.296.2101.61
PG 29	M 32 x 1,5	NPT 1" NPT 1 1/4"	29	25	35,5	10	1.296.2901.61
PG 36	M 40 x 1,5	NPT 1 1/2"	38	32	39	11	1.296.3601.61
PG 42	M 50 x 1,5		43	38	42,5	12	1.296.4201.61
PG 48	M 63 x 1,5		49	44	42,5	12	1.296.4801.61

V-Ms-Ex / V-Ms-FPM-Ex / V-Ms-VMQ-Ex

Metr.



II 2G 1D



Material Nickel plated brass

Protection IP 68 – 10 bar/IP 69K (NEMA 6 – 150 PSIG)

**V-Ms-Ex
O-Ring** Buna-N

**V-Ms-FPM-Ex
O-Ring** FPM

**V-Ms-VMQ-Ex
O-Ring** VMQ

Operating Temperature -20 °C – 95 °C (-4 °F – 203 °F) (Buna-N)
-20 °C – 180 °C (-4 °F – 356 °F) (FPM), -60 °C – 180 °C (-76 °F – 356 °F) (VMQ)



For the international certificates
please see page 174 or our homepage
www.hummel.com


AG	GL mm	H mm	mm	Number V-Ms-Ex -20 °C – 95 °C (-4 °F – 203 °F)	Number V-Ms-FPM-Ex -20 °C – 180 °C (-4 °F – 356 °F)	Number V-Ms-VMQ-Ex -60 °C – 180 °C (-76 °F – 356 °F)
M 12 x 1,5	6,5	9,5	14	1.197.1200.50	1.198.1200.50	1.199.1200.50
M 16 x 1,5	6	9	19	1.197.1600.50	1.198.1600.50	1.199.1600.50
M 20 x 1,5	6	9,5	22	1.197.2000.50	1.198.2000.50	1.199.2000.50
M 25 x 1,5	7	10,5	30	1.197.2500.50	1.198.2500.50	1.199.2500.50
M 32 x 1,5	8	12,5	41	1.197.3200.50	1.198.3200.50	1.199.3200.50
M 40 x 1,5	8	13	46	1.197.4000.50	1.198.4000.50	1.199.4000.50
M 50 x 1,5	9	15	55	1.197.5000.50	1.198.5000.50	1.199.5000.50
M 63 x 1,5	10	16,5	70	1.197.6300.50	1.198.6300.50	1.199.6300.50

V-Ms-Ex / V-Ms-FPM-Ex / V-Ms-VMQ-Ex

PG



II 2G 1D



Material Nickel plated brass

Protection IP 68 – 10 bar/IP 69K (NEMA 6 – 150 PSIG)

**V-Ms-Ex
O-Ring** Buna-N

**V-Ms-FPM-Ex
O-Ring** FPM

**V-Ms-VMQ-Ex
O-Ring** VMQ

Operating Temperature -20 °C – 95 °C (-4 °F – 203 °F) (Buna-N)
-20 °C – 180 °C (-4 °F – 356 °F) (FPM), -60 °C – 180 °C (-76 °F – 356 °F) (VMQ)




For the international certificates
please see page 174 or our homepage
www.hummel.com

AG	GL mm	H mm	mm	Number V-Ms-Ex -20 °C – 95 °C (-4 °F – 203 °F)	Number V-Ms-FPM-Ex -20 °C – 180 °C (-4 °F – 356 °F)	Number V-Ms-VMQ-Ex -60 °C – 180 °C (-76 °F – 356 °F)
PG 7	5	8	14	1.197.0700.01	1.198.0700.01	1.199.0700.01
PG 9	6	9	17	1.197.0900.01	1.198.0900.01	1.199.0900.01
PG 11	6	9,5	20	1.197.1100.01	1.198.1100.01	1.199.1100.01
PG 13,5	6,5	10	22	1.197.1300.01	1.198.1300.01	1.199.1300.01
PG 16	6,5	10	24	1.197.1600.01	1.198.1600.01	1.199.1600.01
PG 21	7	10,5	30	1.197.2100.01	1.198.2100.01	1.199.2100.01
PG 29	8	12,5	41	1.197.2900.01	1.198.2900.01	1.199.2900.01
PG 36	8	13	50	1.197.3600.01	1.198.3600.01	1.199.3600.01
PG 42	9	15	58	1.197.4200.01	1.198.4200.01	1.199.4200.01
PG 48	10	16,5	65	1.197.4800.01	1.198.4800.01	1.199.4800.01

Ex accessories

RSD-MS-Ex

Metr.

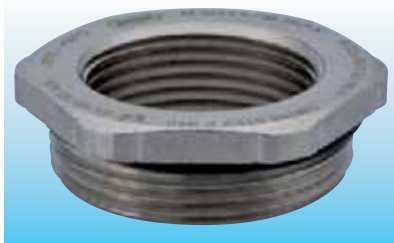

Material Nickel plated brass


O-Ring Buna-N / VMQ

Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)

Operating Temperature -20°C – 95°C (-4°F – 203°F) (Buna-N)
-60°C – 180°C (-76°F – 356°F) (VMQ)



II 2G 1D



For the international certificates
please see page 174 or our homepage
www.hummel.com

AG	IG	GL mm		Number Buna-N -20 °C – 95 °C (-4 °F – 203 °F)	Number VMQ -60 °C – 180 °C (-76 °F – 356 °F)
M 16 x 1,5	M 12 x 1,5	5	17	1.078.1612.50	1.079.1612.50
M 20 x 1,5	M 12 x 1,5	6	22	1.078.2012.50	1.079.2012.50
M 20 x 1,5	M 16 x 1,5	6	22	1.078.2016.50	1.079.2016.50
M 25 x 1,5	M 16 x 1,5	7	27	1.078.2516.50	1.079.2516.50
M 25 x 1,5	M 20 x 1,5	7	27	1.078.2520.50	1.079.2520.50
M 32 x 1,5	M 16 x 1,5	8	34	1.078.3216.50	1.079.3216.50
M 32 x 1,5	M 20 x 1,5	8	34	1.078.3220.50	1.079.3220.50
M 32 x 1,5	M 25 x 1,5	8	34	1.078.3225.50	1.079.3225.50
M 40 x 1,5	M 20 x 1,5	8	43	1.078.4020.50	1.079.4020.50
M 40 x 1,5	M 25 x 1,5	8	43	1.078.4025.50	1.079.4025.50
M 40 x 1,5	M 32 x 1,5	8	43	1.078.4032.50	1.079.4032.50
M 50 x 1,5	M 25 x 1,5	9	55	1.078.5025.50	1.079.5025.50

AG	IG	GL mm		Number Buna-N -20 °C – 95 °C (-4 °F – 203 °F)	Number VMQ -60 °C – 180 °C (-76 °F – 356 °F)
M 50 x 1,5	M 32 x 1,5	9	55	1.078.5032.50	1.079.5032.50
M 50 x 1,5	M 40 x 1,5	9	55	1.078.5040.50	1.079.5040.50
M 63 x 1,5	M 32 x 1,5	10	65	1.078.6332.50	1.079.6332.50
M 63 x 1,5	M 40 x 1,5	10	65	1.078.6340.50	1.079.6340.50
M 63 x 1,5	M 50 x 1,5	10	65	1.078.6350.50	1.079.6350.50

RSD-MS-Ex

PG



Material Nickel plated brass


O-Ring Buna-N / VMQ

Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)

Operating Temperature -20°C – 95°C (-4°F – 203°F) (Buna-N)
-60°C – 180°C (-76°F – 356°F) (VMQ)



II 2G 1D



For the international certificates
please see page 174 or our homepage
www.hummel.com

AG	IG	GL mm	H mm		Number Buna-N -20 °C – 95 °C (-4 °F – 203 °F)	Number VMQ -60 °C – 180 °C (-76 °F – 356 °F)
PG 9	PG 7	6	8,8	17	1.078.0907.01	1.079.0907.01
PG 11	PG 7	6	9	20	1.078.1107.01	1.079.1107.01
PG 11	PG 9	6	9	20	1.078.1109.01	1.079.1109.01
PG 13,5	PG 9	6,5	9,5	22	1.078.1309.01	1.079.1309.01
PG 16	PG 9	6,5	9,5	24	1.078.1609.01	1.079.1609.01
PG 16	PG 11	6,5	9,5	24	1.078.1611.01	1.079.1611.01
PG 16	PG 13,5	6,5	9,5	24	1.078.1613.01	1.079.1613.01
PG 21	PG 11	7	10,3	30	1.078.2111.01	1.079.2111.01
PG 21	PG 13,5	7	10,3	30	1.078.2113.01	1.079.2113.01
PG 21	PG 16	7	10,3	30	1.078.2116.01	1.079.2116.01
PG 29	PG 16	8	11,5	40	1.078.2916.01	1.079.2916.01
PG 29	PG 21	8	11,5	40	1.078.2921.01	1.079.2921.01

AG	IG	GL mm	H mm		Number Buna-N -20 °C – 95 °C (-4 °F – 203 °F)	Number VMQ -60 °C – 180 °C (-76 °F – 356 °F)
PG 36	PG 21	9	12,5	50	1.078.3621.01	1.079.3621.01
PG 36	PG 29	9	12,5	50	1.078.3629.01	1.079.3629.01
PG 42	PG 29	10	13,5	57	1.078.4229.01	1.079.4229.01
PG 42	PG 36	10	13,5	57	1.078.4236.01	1.079.4236.01
PG 48	PG 36	10	13,5	64	1.078.4836.01	1.079.4836.01
PG 48	PG 42	10	13,5	64	1.078.4842.01	1.079.4842.01

V-Ms-Ex-d

Metr.



II 2G 1D Ex d IIC


For the international certificates
please see page 174 or our homepage
www.hummel.com

Material Nickel plated brass

Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)

O-Ring Buna-N / FPM / VMQ


Operating Temperature -20 °C – 95 °C (-4 °F – 203 °F) (Buna-N)
-20 °C – 180 °C (-4 °F – 356 °F) (FPM), -60 °C – 180 °C (-76 °F – 356 °F) (VMQ)



AG	GL mm	H mm	mm	Number Buna-N -20 °C – 95 °C (-4 °F – 203 °F)	Number FPM -20 °C – 180 °C (-4 °F – 356 °F)	Number VMQ -60 °C – 180 °C (-76 °F – 356 °F)
M 12 x 1,5	16	17	14	1.875.1200.50	1.876.1200.50	1.877.1200.50
M 16 x 1,5	16	16	19	1.875.1600.50	1.876.1600.50	1.877.1600.50
M 20 x 1,5	16	15,5	22	1.875.2000.50	1.876.2000.50	1.877.2000.50
M 25 x 1,5	16	15,5	30	1.875.2500.50	1.876.2500.50	1.877.2500.50
M 32 x 1,5	16	16,5	41	1.875.3200.50	1.876.3200.50	1.877.3200.50
M 40 x 1,5	16	17	46	1.875.4000.50	1.876.4000.50	1.877.4000.50
M 50 x 1,5	16	18	55	1.875.5000.50	1.876.5000.50	1.877.5000.50
M 63 x 1,5	16	18,5	70	1.875.6300.50	1.876.6300.50	1.877.6300.50

RSD-MS-Ex-d

Metr.

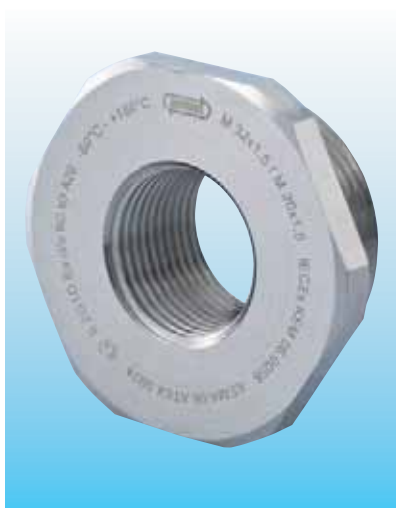

Material Nickel plated brass

O-Ring Buna-N / VMQ

Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)


Operating Temperature -20 °C – 95 °C (-4 °F – 203 °F) (Buna-N)
-60 °C – 180 °C (-76 °F – 356 °F) (VMQ)



II 2G 1D Ex d IIC



For the international certificates
please see page 174 or our homepage
www.hummel.com



AG	IG	GL mm	H mm	mm	Number Buna-N -20 °C – 95 °C (-4 °F – 203 °F)	Number VMQ -60 °C – 180 °C (-76 °F – 356 °F)
M 16 x 1,5	M 12 x 1,5	16	15	19	1.878.1612.50	1.879.1612.50
M 20 x 1,5	M 12 x 1,5	16	15,5	22	1.878.2012.50	1.879.2012.50
M 20 x 1,5	M 16 x 1,5	16	15,5	22	1.878.2016.50	1.879.2016.50
M 25 x 1,5	M 16 x 1,5	16	15,5	30	1.878.2516.50	1.879.2516.50
M 25 x 1,5	M 20 x 1,5	16	15,5	30	1.878.2520.50	1.879.2520.50
M 32 x 1,5	M 16 x 1,5	16	16,5	41	1.878.3216.50	1.879.3216.50
M 32 x 1,5	M 20 x 1,5	16	16,5	41	1.878.3220.50	1.879.3220.50
M 32 x 1,5	M 25 x 1,5	16	16,5	41	1.878.3225.50	1.879.3225.50
M 40 x 1,5	M 20 x 1,5	16	17	46	1.878.4020.50	1.879.4020.50
M 40 x 1,5	M 25 x 1,5	16	17	46	1.878.4025.50	1.879.4025.50
M 40 x 1,5	M 32 x 1,5	16	17	46	1.878.4032.50	1.879.4032.50

V-INOX-Ex

Metr.

II 2G 1D

Material	INOX (1.4305)
Protection	IP 68 - 10 bar / IP 69K (NEMA 6 - 150 PSIG)
V-INOX-Ex O-Ring	Buna-N
V-INOX-FPM-Ex O-Ring	FPM
V-INOX-VMQ-Ex O-Ring	VMQ
Operating Temperature	-20 °C – 95 °C (-4 °F – 203 °F) (Buna-N) -20 °C – 180 °C (-4 °F – 356 °F) (FPM), -60 °C – 180 °C (-76 °F – 356 °F) (VMQ)

For the international certificates
please see page 174 or our homepage
www.hummel.com

AG	GL mm	H mm	mm	Number V-INOX-Ex -20 °C – 95 °C (-4 °F – 203 °F)	Number V-INOX-FPM-Ex -20 °C – 180 °C (-4 °F – 356 °F)	Number V-INOX-VMQ-Ex -60 °C – 180 °C (-76 °F – 356 °F)
M 12 x 1,5	6,5	9,5	14	1.192.1200.50	1.193.1200.50	1.194.1200.50
M 16 x 1,5	6	9	19	1.192.1600.50	1.193.1600.50	1.194.1600.50
M 20 x 1,5	6	9,5	22	1.192.2000.50	1.193.2000.50	1.194.2000.50
M 25 x 1,5	7	10,5	30	1.192.2500.50	1.193.2500.50	1.194.2500.50
M 32 x 1,5	8	12,5	41	1.192.3200.50	1.193.3200.50	1.194.3200.50
M 40 x 1,5	8	13	46	1.192.4000.50	1.193.4000.50	1.194.4000.50
M 50 x 1,5	9	15	55	1.192.5000.50	1.193.5000.50	1.194.5000.50
M 63 x 1,5	10	16,5	70	1.192.6300.50	1.193.6300.50	1.194.6300.50

V-INOX-Ex

PG

II 2G 1D

Material	INOX (1.4305)
Protection	IP 68 - 10 bar / IP 69K (NEMA 6 - 150 PSIG)
V-INOX-Ex O-Ring	Buna-N
V-INOX-FPM-Ex O-Ring	FPM
V-INOX-VMQ-Ex O-Ring	VMQ
Operating Temperature	-20 °C – 95 °C (-4 °F – 203 °F) (Buna-N) -20 °C – 180 °C (-4 °F – 356 °F) (FPM), -60 °C – 180 °C (-76 °F – 356 °F) (VMQ)


For the international certificates
please see page 174 or our homepage
www.hummel.com

AG	GL mm	H mm	mm	Number V-INOX-Ex -20 °C – 95 °C (-4 °F – 203 °F)	Number V-INOX-FPM-Ex -20 °C – 180 °C (-4 °F – 356 °F)	Number V-INOX-VMQ-Ex -60 °C – 180 °C (-76 °F – 356 °F)
PG 7	5	8	14	1.192.0700.01	1.193.0700.01	1.194.0700.01
PG 9	6	9	17	1.192.0900.01	1.193.0900.01	1.194.0900.01
PG 11	6	9,5	20	1.192.1100.01	1.193.1100.01	1.194.1100.01
PG 13,5	6,5	10	22	1.192.1300.01	1.193.1300.01	1.194.1300.01
PG 16	6,5	10	24	1.192.1600.01	1.193.1600.01	1.194.1600.01
PG 21	7	10,5	30	1.192.2100.01	1.193.2100.01	1.194.2100.01
PG 29	8	12,5	41	1.192.2900.01	1.193.2900.01	1.194.2900.01
PG 36	8	13	50	1.192.3600.01	1.193.3600.01	1.194.3600.01
PG 42	9	15	58	1.192.4200.01	1.193.4200.01	1.194.4200.01
PG 48	10	16,5	65	1.192.4800.01	1.193.4800.01	1.194.4800.01

Ex accessories

RSD-INOX-Ex


Metr.

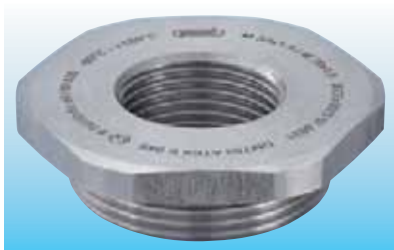

Material	INOX (1.4305)
O-Ring	Buna-N / VMQ
Protection	IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
Operating Temperature	-20 °C – 95 °C (-4 °F – 203 °F) (Buna-N) -60 °C – 180 °C (-76 °F – 356 °F) (VMQ)



II 2G 1D



For the international certificates
please see page 174 or our homepage
www.hummel.com

AG	IG	GL mm		Number Buna-N -20 °C – 95 °C (-4 °F – 203 °F)	Number VMQ -60 °C – 180 °C (-76 °F – 356 °F)	AG	IG	GL mm		Number Buna-N -20 °C – 95 °C (-4 °F – 203 °F)	Number VMQ -60 °C – 180 °C (-76 °F – 356 °F)
M 16 x 1,5	M 12 x 1,5	5	17	1.098.1612.50	1.099.1612.50	M 50 x 1,5	M 32 x 1,5	9	55	1.098.5032.50	1.099.5032.50
M 20 x 1,5	M 12 x 1,5	6	22	1.098.2012.50	1.099.2012.50	M 50 x 1,5	M 40 x 1,5	9	55	1.098.5040.50	1.099.5040.50
M 20 x 1,5	M 16 x 1,5	6	22	1.098.2016.50	1.099.2016.50	M 63 x 1,5	M 32 x 1,5	10	65	1.098.6332.50	1.099.6332.50
M 25 x 1,5	M 16 x 1,5	7	27	1.098.2516.50	1.099.2516.50	M 63 x 1,5	M 40 x 1,5	10	65	1.098.6340.50	1.099.6340.50
M 25 x 1,5	M 20 x 1,5	7	27	1.098.2520.50	1.099.2520.50	M 63 x 1,5	M 50 x 1,5	10	65	1.098.6350.50	1.099.6350.50
M 32 x 1,5	M 16 x 1,5	8	34	1.098.3216.50	1.099.3216.50						
M 32 x 1,5	M 20 x 1,5	8	34	1.098.3220.50	1.099.3220.50						
M 32 x 1,5	M 25 x 1,5	8	34	1.098.3225.50	1.099.3225.50						
M 40 x 1,5	M 20 x 1,5	8	43	1.098.4020.50	1.099.4020.50						
M 40 x 1,5	M 25 x 1,5	8	43	1.098.4025.50	1.099.4025.50						
M 40 x 1,5	M 32 x 1,5	8	43	1.098.4032.50	1.099.4032.50						
M 50 x 1,5	M 25 x 1,5	9	55	1.098.5025.50	1.099.5025.50						

RSD-INOX-Ex


PG



Material	INOX (1.4305)
O-Ring	Buna-N / VMQ
Protection	IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
Operating Temperature	-20 °C – 95 °C (-4 °F – 203 °F) (Buna-N) -60 °C – 180 °C (-76 °F – 356 °F) (VMQ)



II 2G 1D



For the international certificates
please see page 174 or our homepage
www.hummel.com

AG	IG	GL mm	H mm	 mm	Number Buna-N -20 °C – 95 °C (-4 °F – 203 °F)	Number VMQ -60 °C – 180 °C (-76 °F – 356 °F)	AG	IG	GL mm	 mm	Number Buna-N -20 °C – 95 °C (-4 °F – 203 °F)	Number VMQ -60 °C – 180 °C (-76 °F – 356 °F)	
PG 9	PG 7	6	8,8	17	1.098.0907.01	1.099.0907.01	PG 29	PG 21	8	11,5	40	1.098.2921.01	1.099.2921.01
PG 11	PG 7	6	9	20	1.098.1107.01	1.099.1107.01	PG 36	PG 21	9	12,5	50	1.098.3621.01	1.099.3621.01
PG 11	PG 9	6	9	20	1.098.1109.01	1.099.1109.01	PG 36	PG 29	9	12,5	50	1.098.3629.01	1.099.3629.01
PG 13,5	PG 9	6,5	9,5	22	1.098.1309.01	1.099.1309.01	PG 42	PG 29	10	13,5	57	1.098.4229.01	1.099.4229.01
PG 13,5	PG 11	6,5	9,5	22	1.098.1311.01	1.099.1311.01	PG 42	PG 36	10	13,5	57	1.098.4236.01	1.099.4236.01
PG 16	PG 9	6,5	9,5	24	1.098.1609.01	1.099.1609.01	PG 48	PG 36	10	13,5	64	1.098.4836.01	1.099.4836.01
PG 16	PG 11	6,5	9,5	24	1.098.1611.01	1.099.1611.01	PG 48	PG 42	10	13,5	64	1.098.4842.01	1.099.4842.01
PG 16	PG 13,5	6,5	9,5	24	1.098.1613.01	1.099.1613.01							
PG 21	PG 11	7	10,3	30	1.098.2111.01	1.099.2111.01							
PG 21	PG 13,5	7	10,3	30	1.098.2113.01	1.099.2113.01							
PG 21	PG 16	7	10,3	30	1.098.2116.01	1.099.2116.01							
PG 29	PG 16	8	11,5	40	1.098.2916.01	1.099.2916.01							

V-INOX-Ex-d

Metr.



II 2G 1D Ex d IIC


For the international certificates
please see page 174 or our homepage
www.hummel.com

Material INOX (1.4404)

Protection IP 68 – 10 bar/IP 69K (NEMA 6 – 150 PSIG)

O-Ring Buna-N / FPM / VMQ


Operating Temperature - 20 °C – 95 °C (-4 °F – 203 °F) (Buna-N)
- 20 °C – 180 °C (-4 °F – 356 °F) (FPM), - 60 °C – 180 °C (-76 °F – 356 °F) (VMQ)



AG	GL mm	H mm	 mm	Number Buna-N -20 °C – 95 °C (-4 °F – 203 °F)	Number FPM -20 °C – 180 °C (-4 °F – 356 °F)	Number VMQ -60 °C – 180 °C (-76 °F – 356 °F)
M 12 x 1,5	16	15	14	1.895.1200.50	1.896.1200.50	1.897.1200.50
M 16 x 1,5	16	15	19	1.895.1600.50	1.896.1600.50	1.897.1600.50
M 20 x 1,5	16	15,5	22	1.895.2000.50	1.896.2000.50	1.897.2000.50
M 25 x 1,5	16	15,5	30	1.895.2500.50	1.896.2500.50	1.897.2500.50
M 32 x 1,5	16	16,5	41	1.895.3200.50	1.896.3200.50	1.897.3200.50
M 40 x 1,5	16	17	46	1.895.4000.50	1.896.4000.50	1.897.4000.50
M 50 x 1,5	16	18	55	1.895.5000.50	1.896.5000.50	1.897.5000.50
M 63 x 1,5	16	18,5	70	1.895.6300.50	1.896.6300.50	1.897.6300.50

RSD-INOX-Ex-d

Metr.

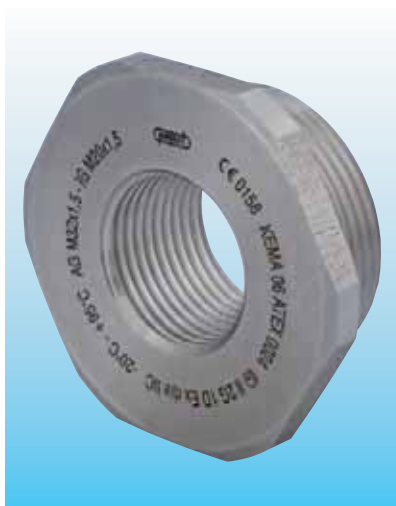

Material INOX (1.4404)

O-Ring Buna-N / VMQ

Protection IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)


Operating Temperature -20 °C – 95 °C (-4 °F – 203 °F) (Buna-N)
-60 °C – 180 °C (-76 °F – 356 °F) (VMQ)



II 2G 1D Ex d IIC



For the international certificates
please see page 174 or our homepage
www.hummel.com



AG	IG	GL mm	H mm	mm	Number Buna-N -20 °C – 95 °C (-4 °F – 203 °F)	Number VMQ -60 °C – 180 °C (-76 °F – 356 °F)
M 16 x 1,5	M 12 x 1,5	16	15	19	1.898.1612.50	1.899.1612.50
M 20 x 1,5	M 12 x 1,5	16	15,5	22	1.898.2012.50	1.899.2012.50
M 20 x 1,5	M 16 x 1,5	16	15,5	22	1.898.2016.50	1.899.2016.50
M 25 x 1,5	M 16 x 1,5	16	15,5	30	1.898.2516.50	1.899.2516.50
M 25 x 1,5	M 20 x 1,5	16	15,5	30	1.898.2520.50	1.899.2520.50
M 32 x 1,5	M 16 x 1,5	16	16,5	41	1.898.3216.50	1.899.3216.50
M 32 x 1,5	M 20 x 1,5	16	16,5	41	1.898.3220.50	1.899.3220.50
M 32 x 1,5	M 25 x 1,5	16	16,5	41	1.898.3225.50	1.899.3225.50
M 40 x 1,5	M 20 x 1,5	16	17	46	1.898.4020.50	1.899.4020.50
M 40 x 1,5	M 25 x 1,5	16	17	46	1.898.4025.50	1.899.4025.50
M 40 x 1,5	M 32 x 1,5	16	17	46	1.898.4032.50	1.899.4032.50

Corrugated conduit systems

Snapflex Industry standard metric

Conduits of the Snapflex series are based on metric dimensions and fulfil current and future requirements.



You can find in this chapter:

- metric conduits
- conduit glands
- combined conduit/cable glands
- T and Y-shaped distributors for metric conduits
- snap elbow systems for metric conduits
- Nylon mounting brackets for metric conduits

Snapflex Industry standard metric

Snapflex



Material

Polyamide



RoHS

Operating Temperature

-30 °C – 100 °C (-22 °F – 212 °F)

Colors

grey (RAL 7035), black (RAL 9005)

Advice:

- PP on request



Size D	d mm	D mm	Number grey	Number black
16	10,7	16	1.510.1600.50	1.510.1601.50
20	14,1	20	1.510.2000.50	1.510.2001.50
25	18,3	25	1.510.2500.50	1.510.2501.50
32	24,3	32	1.510.3200.50	1.510.3201.50
40	31,2	40	1.510.4000.50	1.510.4001.50
50	39,6	50	1.510.5000.50	1.510.5001.50
63	50,6	63	1.510.6300.50	1.510.6301.50

RoHS



Polyamide



-40 °C – 100 °C (-40°F – 212°F)

IP 42

black (RAL 9005)



Y-Connector



Snapflex Industry standard metric

SM-N

Metr.




Material Polyamide

Protection IP 54, with O-Ring
with fixed conduit mounting IP 65

Operating Temperature -20 °C – 80 °C (-4 °F – 176 °F)

Colors grey (RAL 7031), black (RAL 9005)

Advice:
- International certificat under development



AG	GL mm	H mm	D mm	 mm	fits to Snapflex	Number grey	Number black
M 16 x 1,5	8	23	23	17	16	1.514.1600.50	1.514.1601.50
M 20 x 1,5	9	28	28,6	24	20	1.514.2000.50	1.514.2001.50
M 25 x 1,5	11	32	34	35	25	1.514.2500.50	1.514.2501.50
M 32 x 1,5	11	35	41	39	32	1.514.3200.50	1.514.3201.50
M 40 x 1,5	13	40	51	47	40	1.514.4000.50	1.514.4001.50
M 50 x 1,5	14	48	62	57	50	1.514.5000.50	1.514.5001.50

Snapflex Industry standard metric

Snapturn
Metr.

Material	Polyamide
Operating Temperature	-20 °C – 80 °C
Protection	IP 42
Colors	black (RAL 9005)

Advice:
- International certificat under development

AG	d mm	GL mm	D mm	H mm	 mm	fits to Snapflex	Number
M 16 x 1,5	9,5	9,5	25,6	29,5	25	16	1.515.1601.50
M 20 x 1,5	12,5	9,5	31	33	30	20	1.515.2001.50
M 25 x 1,5	17	10	40,2	36,5	39	25	1.515.2501.50
M 32 x 1,5	22,5	13	47,5	38,5	47,5	32	1.515.3201.50
M 40 x 1,5	29	13	56,5	41	55	40	1.515.4001.50
M 50 x 1,5	36,5	13,5	67	43	65	50	1.515.5001.50

Snapturn-M
Metr.

Material	Polyamide, Brass
Operating Temperature	-20 °C – 80 °C
Protection	IP 42
Colors	black (RAL 9005)

Advice:
- International certificat under development
- NPT on request

AG	d mm	GL mm	D mm	H mm	 mm	fits to Snapflex	Number
M 16 x 1,5	9,5	6	25,6	29,5	25	16	1.515.1681.50
M 20 x 1,5	12,5	6	31	33	30	20	1.515.2081.50
M 25 x 1,5	17	6,5	40,2	36,5	39	25	1.515.2581.50
M 32 x 1,5	22,5	8	47,5	38,5	47,5	32	1.515.3281.50
M 40 x 1,5	29	8	56,5	41	55	40	1.515.4081.50
M 50 x 1,5	36,5	10	67	43	65	50	1.515.5081.50

Snapflex Industrie Standard metrisch

Snapturn 90°

Metr.




Material Polyamide

Operating Temperature -20 °C – 80 °C

Protection IP 42

Colors black (RAL 9005)

Advice:
- International certificat under development



AG	d mm	GL mm	H mm	L mm	mm	fits to Snapflex	Number
M 16 x 1,5	9,5	9,5	30	57	12	16	1.525.1601.50
M 20 x 1,5	12,5	9,5	35,5	64	16	20	1.525.2001.50
M 25 x 1,5	17	10	45	71,5	20	25	1.525.2501.50
M 32 x 1,5	22,5	13	51	87,5	27	32	1.525.3201.50
M 40 x 1,5	29	13	65,4	97,2	32	40	1.525.4001.50
M 50 x 1,5	36,5	13,5	72	106,5	41	50	1.525.5001.50

Snapturn-M 90°

Metr.




Material Polyamide, Brass

Operating Temperature -20 °C – 80 °C

Protection IP 42

Colors black (RAL 9005)

Advice:
- International certificat under development
- NPT on request




AG	d mm	GL mm	H mm	L mm	mm	fits to Snapflex	Number
M 16 x 1,5	9,5	6	33,5	57	12	16	1.525.1681.50
M 20 x 1,5	12,5	6	39	64	16	20	1.525.2081.50
M 25 x 1,5	17	6,5	48,5	71,5	20	25	1.525.2581.50
M 32 x 1,5	22,5	8	54,5	87,5	27	32	1.525.3281.50
M 40 x 1,5	29	8	68,5	97,2	32	40	1.525.4081.50
M 50 x 1,5	36,5	9	72,5	106,5	41	50	1.525.5081.50

Snapflex Industrie Standard metrisch

Snapturn 135°

Metr.



Material Polyamide

Operating Temperature -20 °C – 80 °C

Protection IP 42

Colors black (RAL 9005)


Advice:
- International certificat under development



AG	d mm	GL mm	H mm	L mm	mm	fits to Snapflex	Number
M 16 x 1,5	9,5	9,5	38,9	40,4	12	16	1.526.1601.50
M 20 x 1,5	12,5	9,5	44,7	48,2	16	20	1.526.2001.50
M 25 x 1,5	17	10	53,9	57,4	20	25	1.526.2501.50
M 32 x 1,5	22,5	13	60,8	68,8	27	32	1.526.3201.50
M 40 x 1,5	29	13	69,5	79,5	32	40	1.526.4001.50
M 50 x 1,5	36,5	13,5	78,5	89,5	41	50	1.526.5001.50

Snapturn-M 135°

Metr.



Material Polyamide, Brass

Operating Temperature -20 °C – 80 °C

Protection IP 42

Colors black (RAL 9005)

Advice:
- International certificat under development
- NPT on request



AG	d mm	GL mm	H mm	L mm	mm	fits to Snapflex	Number
M 16 x 1,5	9,5	6	42,4	41,4	12	16	1.526.1681.50
M 20 x 1,5	12,5	6	48,2	48,2	16	20	1.526.2081.50
M 25 x 1,5	17	6,5	57,4	57,9	20	25	1.526.2581.50
M 32 x 1,5	22,5	8	64,3	68,8	27	32	1.526.3281.50
M 40 x 1,5	29	8	73	79,5	32	40	1.526.4081.50
M 50 x 1,5	36,5	9	82	89,5	41	50	1.526.5081.50

Snapflex Industry standard metric

Snapclic-DUO-PA

Metr.



Material Polyamide




Seal NBR



Operating Temperature -40 °C – 100 °C (-40 °F – 212 °F)

Colors black (RAL 9005)

Advice:
- NPT and elongated thread upon request



AG	Ø mm	GL mm	H mm	D mm	Ø mm	fits to Snapflex	Number
M 16 x 1,5	5-10	8	42	25	22	16	1.542.1601.50
M 16 x 1,5	3-7	8	42	25	22	16	1.542.1601.51
M 20 x 1,5	10-14	10	46	30	27	20	1.542.2001.50
M 20 x 1,5	7-12	10	46	30	27	20	1.542.2001.51
M 25 x 1,5	13-18	11	50	35	33	25	1.542.2501.50
M 25 x 1,5	9-16	11	50	35	33	25	1.542.2501.51
M 32 x 1,5	18-24	11	60	42	42	32	1.542.3201.50
M 32 x 1,5	13-20	11	60	42	42	32	1.542.3201.51
M 40 x 1,5	22-31	13	60	50	53	40	1.542.4001.50
M 40 x 1,5	20-26	13	60	50	53	40	1.542.4001.51

Snapclic-DUO-PA

PG



Material Polyamide




Seal NBR

Operating Temperature -40 °C – 100 °C (-40 °F – 212 °F)

Colors black (RAL 9005)

Advice:
- NPT and elongated thread upon request



AG	Ø mm	GL mm	H mm	D mm	Ø mm	fits to Snapflex	Number
PG 11	5-10	8	42	25	22	16	1.543.1116.14
PG 11	3-7	8	42	25	22	16	1.543.1116.15
PG 16	10-14	10	46	30	27	20	1.543.1620.14
PG 16	7-12	10	46	30	27	20	1.543.1620.15
PG 21	13-16	11	50	35	33	25	1.543.2125.14
PG 21	9-16	11	50	35	33	25	1.543.2125.15
PG 29	18-22	11	60	42	42	32	1.543.2932.14
PG 29	13-20	11	60	42	42	32	1.543.2932.15
PG 36	22-31	13	60	50	53	40	1.543.3640.14
PG 36	20-26	13	60	50	53	40	1.543.3640.15


Snapflex Industry standard metric

Snapclic-PA-W

Metr.



Material	Polyamide
O-Ring	NBR
Operating Temperature	-40 °C – 100 °C (-40 °F – 212 °F)
Colors	black (RAL 9005)



Advice:
- NPT thread on request


AG	GL mm	H mm	L mm	 mm	fits to Snapflex	Number
M 25 x 1,5	11	40	53	33	20	1.552.2520.50
M 25 x 1,5	11	40	53	33	25	1.552.2525.50
M 32 x 1,5	11	51,5	64,5	42	32	1.552.3200.50

Snapclic-PA-W

PG, NPT



Material	Polyamide
O-Ring	NBR
Operating Temperature	-40 °C – 100 °C (-40 °F – 212 °F)
Colors	black (RAL 9005)



Advice:
- NPT thread on request

AG	GL mm	H mm	L mm	 mm	fits to Snapflex	Number
PG 16	10	32,5	41,5	27	16	1.552.1616.14
PG 21	11	40	53	33	20	1.552.2120.14
PG 21	11	40	53,5	33	25	1.552.2125.14
PG 29	11	51,5	64,5	42	32	1.552.2932.14
3/4" NPT	13	40	53	33	20	1.552.3420.70
3/4" NPT	13	40	53,5	33	25	1.552.3425.70
1" NPT	19	51,5	64,5	42	32	1.552.1032.70

Snapflex Industry standard metric

Snapclip



Material Polyamide




RoHS

Operating Temperature -30 °C – 100 °C (-22 °F – 212 °F)


Colors grey (RAL 7031), black (RAL 9005)

Advice:
- PP on request



fits to Snapflex	H mm	H1 mm	L mm	L1 mm	D mm	d mm	Number grey	Number black
16	27	29,5	21	27	10	5,3	1.730.1600.50	1.730.1601.50
20	31	33,5	28	31	10	5,3	1.730.2000.50	1.730.2001.50
25	36	36	34	37	10	5,3	1.730.2500.50	1.730.2501.50
32	43	45,5	42	42,5	10	5,3	1.730.3200.50	1.730.3201.50
40	51	53,5	51	52	10	5,3	1.730.4000.50	1.730.4001.50
50	61	63,5	62	65	10	5,3	1.730.5000.50	1.730.5001.50
63	73	77	76	78	10	5,3	1.730.6300.50	1.730.6301.50


Snapform

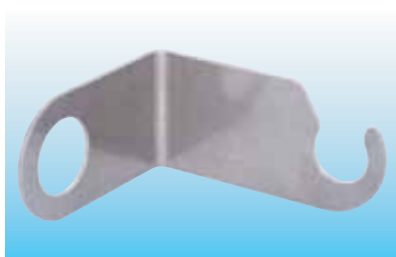

Material Special steel



RoHS



fits to Snapflex	H mm	L mm	B mm	Number
16	50	66	30	1.318.1600.04
20	60	75	34	1.318.2000.04
25	65	80	39	1.318.2500.04
32	75	90	46	1.318.3200.04
40	95	105	55	1.318.4000.04
50	115	125	66	1.318.5000.04
63	145	165	82	1.318.6300.04

Corrugated conduit systems

Snapflex-Ex metric


Conduits of the Snapflex-Ex series are based on metric dimensions. They were designed for standard applications in hazardous locations type "e" according to EN 60079-0 and EN 60079-7.



You can find in this chapter:

- ATEX certified conduits
- ATEX certified combined conduit/cable glands

Snapflex-Ex

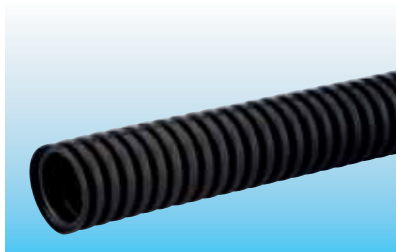

Material Polyamide



Operating Temperature -20 °C – 95 °C (-4 °F – 203 °F)

Colors black (RAL 9005)

Advice:
- For the international certificates
please see page 174 or our homepage
www.hummel.com



Size D	d mm	D mm	Number black
16	10,7	16	1.560.1601.50
20	14,1	20	1.560.2001.50
25	18,3	25	1.560.2501.50
32	24,3	32	1.560.3201.50
40	31,2	40	1.560.4001.50

Snapclip-Ex




Material Polyamide



Operating Temperature -20 °C – 95 °C (-4 °F – 203 °F)

Colors black (RAL 9005)

Advice:
- For the international certificates
please see page 174 or our homepage
www.hummel.com



Size D	H mm	H1 mm	L mm	L1 mm	D mm	d mm	Number black
16	27	29,5	21	27	10	5,3	1.731.1601.50
20	31	33,5	28	37	10	5,3	1.731.2001.50
25	36	36	34	37	10	5,3	1.731.2501.50
32	43	45,5	42	42,5	10	5,3	1.731.3201.50
40	51	53,5	51	52	10	5,3	1.731.4001.50

Snapclic-DUO-MS-Ex

Metr.



II 2G 1D

Material Nickel plated brass


Clamping insert Polyamide

Seal NBR

Operating Temperature -20 °C – 95 °C (-4 °F – 203 °F)

Advice:

- NPT and elongated thread on request
- For the international certificates please see page 174 or our homepage www.hummel.com



AG	mm	GL mm	H mm	D mm	mm	fits to Snapflex-Ex	Number
M 16 x 1,5	5 – 10	6	20	38,5	23	16	1.566.1601.50
M 16 x 1,5	3 – 7	6	20	38,5	23	16	1.566.1601.51
M 20 x 1,5	10 – 14	6	24	41,5	29	20	1.566.2001.50
M 20 x 1,5	7 – 12	6	24	41,5	29	20	1.566.2001.51
M 25 x 1,5	13 – 18	7	30	44,5	30	25	1.566.2501.50
M 25 x 1,5	9 – 16	7	30	44,5	30	25	1.566.2501.51
M 32 x 1,5	18 – 24	8	40	52,5	39	32	1.566.3201.50
M 32 x 1,5	13 – 20	8	40	52,5	39	32	1.566.3201.51
M 40 x 1,5	22 – 31	8	50	59	45	40	1.566.4001.50
M 40 x 1,5	20 – 26	8	50	59	45	40	1.566.4001.51

Snapclic-DUO-Ms-Ex

PG



Material Nickel plated brass

Clamping insert Polyamide

Seal NBR


Operating Temperature -20 °C – 95 °C (-4 °F – 203 °F)

Advice:

- NPT and elongated thread on request
- For the international certificates please see page 174 or our homepage www.hummel.com



II 2G 1D



AG	$\varnothing$ mm	GL mm	H mm	D mm	 mm	fits to Snapflex-Ex	Number
PG 11	5-10	6	38,5	23	20	16	1.567.1116.01
PG 11	3-7	6	38,5	23	20	16	1.567.1116.15
PG 16	10-14	6	41,5	29	24	20	1.567.1620.01
PG 16	7-12	6	41,5	29	24	20	1.567.1620.15
PG 21	13-16	7	44,5	30	30	25	1.567.2125.01
PG 21	9-16	7	44,5	30	30	25	1.567.2125.15
PG 29	18-22	8	52,5	39	40	32	1.567.2932.01
PG 29	13-20	8	52,5	39	40	32	1.567.2932.15
PG 36	22-28	8	59	45	50	40	1.567.3640.01
PG 36	20-16	8	59	45	50	40	1.567.3640.15

Corrugated conduit systems

DN conduits


You can find in this chapter:

- DN conduit made of polyamide
- SM fittings for fast mounting of DN conduit
- snap elbow systems for DN conduit



SM-WS-PA

DN

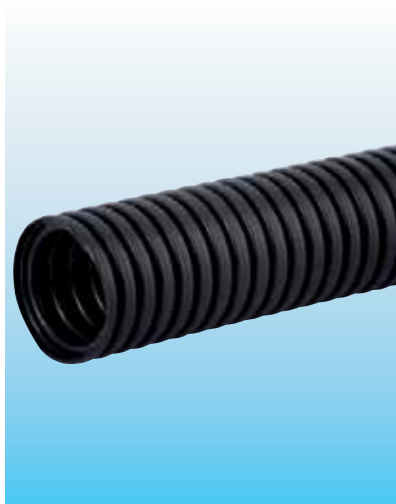

Material Polyamide



RoHS

Operating Temperature -40 °C – 110 °C (-40 °F – 230 °F)

Colors grey (RAL 7031), black (RAL 9005)



Size DN	Typ	d mm	D mm	Number grey	Number black
10	PA	10	13	1.510.0900.14	1.510.0901.14
12	PA	12	15,5	1.510.1100.14	1.510.1101.14
14	PA	14	18,5	1.510.1300.14	1.510.1301.14
17	PA	16,5	21	1.510.1600.14	1.510.1601.14
23	PA	22,5	28,5	1.510.2100.14	1.510.2101.14
29	PA	28,5	34,5	1.510.2900.14	1.510.2901.14
37	PA	36	42	1.510.3600.14	1.510.3601.14
50	PA	47,5	54	1.510.4800.14	1.510.4801.14

SM-N

Metr., PG, NPT




RoHS

Material Polyamide

Protection IP 54, with O-Ring
with fixed conduit mounting IP 65

Operating Temperature -20 °C – 80 °C (-4 °F – 176 °F)

Colors grey (RAL 7031), black (RAL 9005)




AG	GL mm	H mm	D mm	mm	DN	Number grey	Number black
M 16 x 1,5	8	23	20	17	10	1.511.1600.50	1.511.1601.50
M 20 x 1,5	9	28	26,5	24	14	1.511.2000.50	1.511.2001.50
M 25 x 1,5	11	32	38,5	35	23	1.511.2500.50	1.511.2501.50
M 32 x 1,5	11	35	46	42	29	1.511.3200.50	1.511.3201.50
PG 9	8	23	19	17	10	1.511.0900.14	1.511.0901.14
PG 11	8	25	23	21	12	1.511.1100.14	1.511.1101.14
PG 13,5	9	28	26,5	24	14	1.511.1300.14	1.511.1301.14
PG 16	10	29	30	27	17	1.511.1600.14	1.511.1601.14
PG 21	11	32	38,5	35	23	1.511.2100.14	1.511.2101.14
PG 29	11	35	46	42	29	1.511.2900.14	1.511.2901.14
PG 36	13	41	54,5	50	37	1.511.3600.14	1.511.3601.14
PG 48	14	46	70	64	50	1.511.4800.14	1.511.4801.14
NPT 3/8"	15	23	19	17	10	1.511.3800.70	1.511.3801.70
NPT 1/2"	13	29	30	27	17	1.511.1216.70	1.511.1217.70
NPT 3/4"	13	32	38,5	35	23	1.511.3400.70	1.511.3401.70
NPT 1"	15	35	46	42	29	1.511.1000.70	1.511.1001.70

SM-W

Metr., PG, NPT



Material	Polyamide
O-Ring	NBR
Protection	IP 54 with fixed conduit mounting IP 65
Operating Temperature	-20 °C – 80 °C (-4 °F – 176 °F)
Colors	black (RAL 9005)




AG	GL mm	H mm	L mm	 mm	D mm	fits to SM-Conduit DN	Number
M 16 x 1,5	8	23	43	19	20	10	1.513.1601.50
M 20 x 1,5	9	30,5	52	24	26,5	14	1.513.2001.50
M 25 x 1,5	11	40	70	33	38,5	23	1.513.2501.50
M 32 x 1,5	11	51,5	83	42	46	29	1.513.3201.50
PG 9	8	23	43	19	19	10	1.513.0901.14
PG 11	8	27	48	22	23	12	1.513.1101.14
PG 13,5	9	30,5	52	24	26,5	14	1.513.1301.14
PG 16	10	32,5	56	27	30	17	1.513.1601.14
PG 21	11	40	70	33	38,5	23	1.513.2101.14
PG 29	11	51,5	83	42	46	29	1.513.2901.14
NPT 3/8"	15	23	43	19	19	10	1.513.3801.70
NPT 1/2"	13	32,5	56	27	30	17	1.513.1217.70
NPT 3/4"	13	40	70	33	38,5	23	1.513.3401.70
NPT 1"	15	51,5	83	42	46	29	1.513.1001.70

DN



RoHS

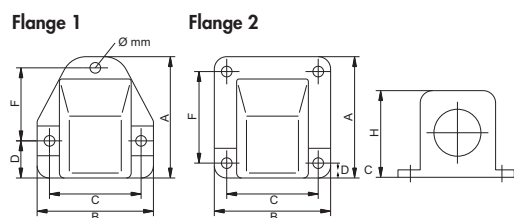

Size DN	Flange	Ø mm	A mm	B mm	C mm	D mm	F mm	H mm	Number grey	Number black
12	1	4,3	49	47	37	15,5	29	35	1.312.1100.15	1.312.1101.15
17	1	4,3	49	47	37	15,5	29	35	1.312.1600.15	1.312.1601.15
23	1	6,0	69	65	51,5	21,5	41,5	44	1.312.2100.15	1.312.2101.15
29	2	6,5	90	78	64,5	9,5	64,5	55	1.312.2900.15	1.312.2901.15
37	2	6,5	99	94	79,5	10,5	79,5	66	1.312.3600.15	1.312.3601.15
50	2	6,5	116	101	87,5	12,5	87,5	76	1.312.4800.15	1.312.4801.15

Technical Information

Other International Ex-Certifications



Ukraine

No. 1100



Russia

PPC 00-27485

POCC-DE-RG05-B03140, POCC-RU-0001-11TB05



China

CQST CNEx06.1147U

CQST CNEx06.1148U



Brazil

INMETRO MC AEX-4665-X

INMETRO MC AEX-5233-X

INMETRO MC AEX-5234-X

INMETRO MC AEX-5235-X

INMETRO MC AEX-8528

INMETRO MC AEX-6203-X

INMETRO MC AEX-6410-X

INMETRO MC AEX-6411-X

INMETRO MC AEX-6412-X

INMETRO MC AEX-8822-X

Installation Instructions

Multi hole inserts:

Cable diameter should not be less than 20% of hole diameter and the difference between cable diameter and hole should never exceed 1 mm (.04").

Flat cable inserts:

The clamping range of the cable used may not deviate from the manufacturer-specified minimum values by more than 1 mm in length and 1 mm in width.

The geometries of the cable and the insert hole must be compatible (semicircular or straight at the sides).



IECEX BVS 07.0019X

IECEX BVS 07.0021

IECEX BVS 07.0020X

IECEX BVS 07.0022X

IECEX BVS 10.0078X

IECEX KEM 06.0056

IECEX KEM 07.0012

IECEX KEM 07.0014X

IECEX KEM 07.0013X

Approvals for HSK Strain Relief Fittings / Licence Number 40012033

Page	Article	Number	Temperature Range	Approval G (Gas)	Approval D (Dust)	EC-Type Examination Certificate
146	RSD-MS-Ex	1.078.*	-20 °C – 95 °C	x	x	DMT 03 ATEX E 049
146	RSD-MS-Ex	1.079.*	-60 °C – 180 °C	x	x	DMT 03 ATEX E 049
150	RSD-INOX-Ex	1.098.*	-20 °C – 180 °C	x	x	DMT 03 ATEX E 049
150	RSD-INOX-Ex	1.099.*	-60 °C – 180 °C	x	x	DMT 03 ATEX E 049
149	V-INOX-Ex	1.192.*	-20 °C – 95 °C	x	x	DMT 03 ATEX E 049
149	V-INOX-FPM-Ex	1.193.*	-20 °C – 180 °C	x	x	DMT 03 ATEX E 049
149	V-INOX-VMQ-Ex	1.194.*	-60 °C – 180 °C	x	x	DMT 03 ATEX E 049
145	V-MS-Ex	1.197.*	-20 °C – 95 °C	x	x	DMT 03 ATEX E 049
145	V-MS-FPM-Ex	1.198.*	-20 °C – 180 °C	x	x	DMT 03 ATEX E 049
145	V-MS-VMQ-Ex	1.199.*	-60 °C – 180 °C	x	x	DMT 03 ATEX E 049
132	HSK-K-MZ-Ex	1.215.*	-20 °C – 70 °C	x	x	KEMA 99 ATEX 6971 X
110–114	HSK-K-Ex	1.291.*	-20 °C – 95 °C	x	x	DMT 02 ATEX E 047 X
110, 111	HSK-K-Ex	1.295.*	-20 °C – 95 °C	x	x	DMT 02 ATEX E 047 X
144	HSK-V-Ex / Mz-V-Ex	1.296.*	-20 °C – 95 °C	x	x	BVS 03 ATEX E 298
142, 143	V-Ex	1.297.*	-20 °C – 90 °C	x	x	DMT 03 ATEX E 049
167, 168	Snapclip-Duo-MS-Ex	1.566.* / 1.567.*	-20 °C – 95 °C	x	x	BVS 06 ATEX E 069 X
166	Snapflex-Ex	1.560.*	-20 °C – 95 °C	x	x	BVS 06 ATEX E 069 X
131	HSK-K-FLAKA-Ex	1.589.*	-20 °C – 95 °C	x	x	DMT 02 ATEX E 047 X
134	HSK-M-FLAKA-Ex	1.689.*	-20 °C – 95 °C	x	x	DMT 03 ATEX E 051 X
130	HSK-K-Multi-Ex	1.599.*	-20 °C – 95 °C	x	x	DMT 02 ATEX E 047 X
104, 105	EXIOS Barrier	1.606.*	-60 °C – 85 °C	x	x	Sira-11-ATEX-1110-X
102, 103	EXIOS Standard	1.605.*	-60 °C – 105 °C	x	x	BVS 10 ATEX E 062 X
115–118, 124, 125	HSK-M/EMV-Ex	1.610.* / 1.616.*	-20 °C – 95 °C	x	x	DMT 03 ATEX E 051 X
126, 127, 135, 136	HSK-MZ/EMV-Ex	1.611.* / 1.617.*	-20 °C – 95 °C	x	x	DMT 03 ATEX E 051 X
119, 120	HSK-INOX-Ex	1.612.*	-20 °C – 95 °C	x	x	DMT 03 ATEX E 051 X
138	HSK-M-Ex-d	1.622.*	-60 °C – 105 °C	x	x	KEMA 99 ATEX 6968 X
139	HSK-MZ-Ex-d	1.628.*	-60 °C – 105 °C	x	x	KEMA 99 ATEX 6968 X
140	HSK-INOX-Ex-d	1.632.*	-60 °C – 105 °C	x	x	KEMA 99 ATEX 6968 X
140	HSK-INOX-PVDF-Ex-d	1.633.*	-20 °C – 130 °C	x	x	KEMA 99 ATEX 6968 X
138	HSK-M-PVDF-Ex-d	1.634.*	-20 °C – 130 °C	x	x	KEMA 99 ATEX 6968 X
122, 123	HSK-M-EMV-D-Ex	1.636.*	-20 °C – 95 °C	x	x	DMT 03 ATEX E 051 X
122, 123	HSK-M-EMV-D-Ex	1.637.*	-60 °C – 95 °C	x	x	KEMA 99 ATEX 6971 X
115–118, 124, 125	HSK-M/EMV-Ex	1.640.* / 1.646.*	-60 °C – 95 °C	x	x	KEMA 99 ATEX 6971 X
126–128	HSK-MZ/EMV-Ex	1.647.*	-60 °C – 95 °C	x	x	KEMA 99 ATEX 6971 X
119, 120	HSK-INOX-Ex	1.642.*	-60 °C – 95 °C	x	x	KEMA 99 ATEX 6971 X
115–118	HSK-M-PVDF-Ex	1.660.*	-20 °C – 130 °C	x	x	KEMA 99 ATEX 6971 X
135, 136	HSK-MZ-PVDF-Ex	1.661.*	-20 °C – 130 °C	x	x	KEMA 99 ATEX 6971 X
119, 120	HSK-INOX-PVDF-Ex	1.662.*	-20 °C – 130 °C	x	x	KEMA 99 ATEX 6971 X
125	HSK-M-EMV-PVDF-Ex	1.666.*	-20 °C – 130 °C	x	x	KEMA 99 ATEX 6971 X
127, 128	HSK-MZ-EMV-PVDF-Ex	1.667.*	-20 °C – 130 °C	x	x	KEMA 99 ATEX 6971 X
133	HSK-M-Multi-Ex	1.687.*	-20 °C – 95 °C	x	x	DMT 03 ATEX E 051 X
166	Snapclip-Ex	1.731.*	-20 °C – 95 °C	x	x	BVS 06 ATEX E 069 X
147, 151	V-MS-/INOX-Ex-d	1.875.* / 1.895.*	-20 °C – 95 °C	x	x	KEMA 06 ATEX 0024
147, 151	V-MS-/INOX-FPM-Ex-d	1.876.* / 1.896.*	-20 °C – 180 °C	x	x	KEMA 06 ATEX 0024
147, 151	V-MS-/INOX-VMQ-Ex-d	1.877.* / 1.897.*	-60 °C – 180 °C	x	x	KEMA 06 ATEX 0024
148, 152	RSD-MS-/INOX-Ex-d	1.878.* / 1.898.*	-20 °C – 95 °C	x	x	KEMA 06 ATEX 0024
148, 152	RSD-MS-/INOX-Ex-d	1.879.* / 1.899.*	-60 °C – 180 °C	x	x	KEMA 06 ATEX 0024

Assembly Instructions

International Protection, EN 60529


1. Code		2. Code	Penetration of water	Non-protected	protection against dripping water	Protected against vertically falling water drops when device is tilted up to 15°	Water sprayed at an angle up to 60° on either side of the vertical shall have no harmful effects	Water splashed from any direction shall have no harmful effects	Water projected in jets from any direction shall have no harmful effects	Water projected in powerful jets from any direction shall have no harmful effects	protection against temporary submersion	protection against permanent submersion
Protection against human access to hazardous parts	Protection of equipment against penetration of solid foreign objects			IP x0	IP x1	IP x2	IP x3	IP x4	IP x5	IP x6	IP x7	IP x8
Non-protected	Non-protected	IP 0x		IP 00								
Protected against access to hazardous parts with the back of the hand	Protected against solid foreign objects larger in diameter than 50mm	IP 1x		IP 10	IP 11	IP 12						
Protected against access to hazardous parts with a finger	Protected against solid foreign object larger in diameter than 12,5 mm	IP 2x		IP 20	IP 21	IP 22	IP 23					
Protected against access to hazardous parts with a tool larger in diameter than 25 mm	Protected against solid foreign objects larger in diameter than 2,5 mm	IP 3x		IP 30	IP 31	IP 32	IP 33	IP 34				
Protected against access to hazardous parts with a wire larger in diameter than 1,0 mm	Protected against solid foreign objects larger in diameter than 1 mm	IP 4x		IP 40	IP 41	IP 42	IP 43	IP 44				
Protected against access to hazardous parts with a wire larger in diameter than 1,0 mm	Prevents penetration of dust sufficient to cause damage inside the equipment.	IP 5x		IP 50				IP 54	IP 55			
Protected against access to hazardous parts with a wire larger in diameter than 1,0 mm	Dust proof	IP 6x		IP 60					IP 65	IP 66	IP 67	IP 68

Product Material Abbreviations

CR	Chloroprene rubber	PP	Polypropylene
FPM	Fluorelastomer	PVC	Polyvinylchloride
Ms	Nickel plated brass	PVDF	Polyvinylidenfluoride
NBR	Buna-N	SB	Styrene Butadiene
PA	Polyamide	VMQ	Silicone
PE	Polyethylene		


Technical Information

Metric ISO Thread Specifications




Size	Pitch mm	Outside-Ø D1 mm	Inside-Ø D2 mm	Thru- hole mm
M 12 x 1,5	1,5	12	10,13	12,2
M 16 x 1,5	1,5	16	14,13	16,2
M 20 x 1,5	1,5	20	18,13	20,2
M 25 x 1,5	1,5	25	23,13	25,2
M 32 x 1,5	1,5	32	30,13	32,2
M 40 x 1,5	1,5	40	38,13	40,2
M 50 x 1,5	1,5	50	48,13	50,2
M 63 x 1,5	1,5	63	61,13	63,2

PG Thread Specifications




Size	Pitch mm	Outside-Ø D1 mm	Inside-Ø D2 mm	Thru- hole mm
PG 7	1,270	12,5	11,28	12,7
PG 9	1,410	15,2	13,86	15,4
PG 11	1,410	18,6	17,26	18,8
PG 13,5	1,410	20,4	19,06	20,7
PG 16	1,410	22,5	21,16	22,8
PG 21	1,588	28,3	26,78	28,6
PG 29	1,588	37,0	35,48	37,4
PG 36	1,588	47,0	45,48	47,5
PG 42	1,588	54,0	52,48	54,5
PG 48	1,588	59,3	57,78	59,8

NPT Thread Specifications



Size	Pitch mm	Outside-Ø mm	Number of pitches n
1/4" NPT	1,411	13,716	18
3/8" NPT	1,411	17,145	18
1/2" NPT	1,814	21,336	14
3/4" NPT	1,814	26,67	14
1" NPT	2,208	33,4	11 1/2
1 1/4" NPT	2,208	42,164	11 1/2
1 1/2" NPT	2,208	48,26	11 1/2
2" NPT	2,208	60,325	11 1/2
2 1/2" NPT	3,175	73,025	8
3" NPT	3,175	88,9	8
3 1/2" NPT	3,175	101,6	8

British G Thread Specifications



Size	Pitch mm	Outside-Ø D1 mm	Inside-Ø D2 mm	Thru- hole mm
G 1/4"	1,337	13,157	11,145	13,4
G 3/8"	1,337	16,662	14,950	17,0
G 1/2"	1,814	20,955	18,631	21,3
G 5/8"	1,814	26,441	24,117	26,8
G 1"	2,309	33,249	30,291	33,7
G 1 1/4"	2,309	41,910	38,952	42,4
G 1 1/2"	2,309	47,803	44,845	48,3
G 2"	2,309	59,614	56,656	60,2
G 2 1/2"	2,309	75,184	72,226	75,7
G 3"	2,309	87,884	84,926	88,5
G 3 1/2"	2,309	100,330	97,372	101,0
G 4"	2,309	113,030	110,072	114,0

Snapturn

High strain relief on corrugated conduit!

1. Screw Snapturn into mounting hole
2. Insert Snapflex into Snapturn
3. Hold Snapturn against the housing and tighten the nut – finished!



finished

Snapturn

the efficient way of
corrugated conduit
mounting

HSK-M-EMV / METRICA-M-EMV



Step 1



- + Strip cable
- + Expose braided shield

Step 2

- + Feed cable through dome nut and clamping insert
- + Fold braided shield over clamping insert
- + Make sure that braided shield overlaps the O-Ring by 3/32" (2 mm)



Step 3




- + Push clamping insert into body and tighten dome nut
- + Assemble into housing
- + Finished!

HSK-M-EMV-D

Option 1

Feed-through of cable and shield (braided or foil)


- + Expose shield approximately 7/16" (10 mm)
- + Insert cable into fitting until the shield reaches the contact position
- + Tighten dome nut

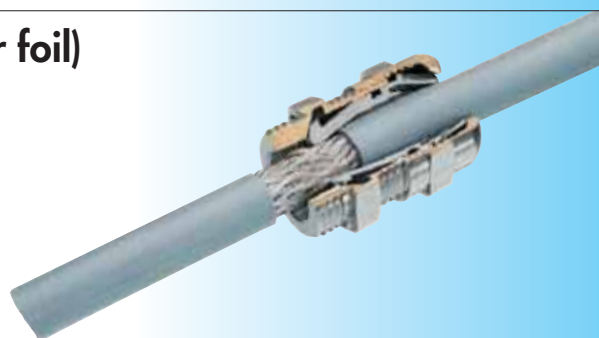

Option 2

Feed-through of shield (braided or foil)


- + Remove cable jacket to expose the shield as required
- + Insert cable into fitting until the shield reaches the contact position
- + Tighten dome nut

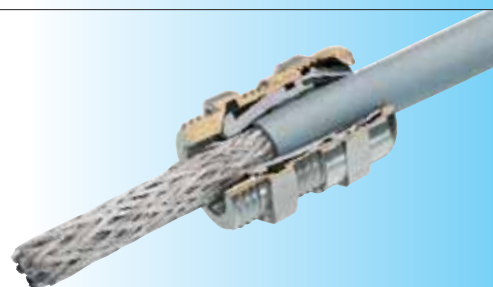

Option 3

Termination of the braided shield in the fitting

- + Strip cable jacket and braided shield to different lengths
- + For small diameter cables fold the braided shield back over the cable jacket
- + Insert cable into fitting until the shield reaches the contact position
- + Tighten dome nut

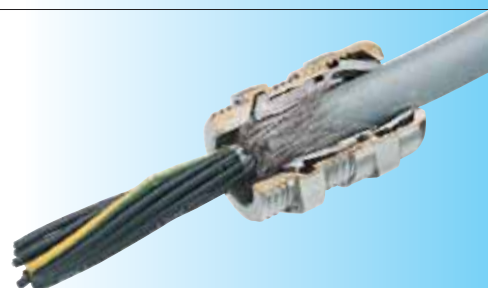

Did you know...

...that HUMMEL can offer you Industrial Enclosures?

■ **Steel / Stainless Steel (INOX)**

Available in different standard sizes.

Customised housing dimensions available even for small order quantities.

■ **Aluminium**

Available in different standard sizes.

Also as EMC version or with customised housing dimensions.

■ **Industry standard enclosures**

Besides, our range of products includes a host of standard enclosures made of ABS, polycarbonate and polyester.

We process and equip your enclosures at your option.

Create your own solutions, selecting from a wide range of materials and sizes.

■ Empty Enclosures ■ Processed Enclosures ■ Mounted Enclosures ■ Fully equipped Enclosures



Did you know...

...that HUMMEL can offer you Circular Connectors?

■ **Signal connectors**
in the sizes:

- M 16
- M 23
- M 27

■ **Power connectors**
in the sizes:

- M 16
- M 23
- M 40 Gr. 1,5

■ **Special connectors**

- M 23 RJ 45
- Profinet, for high-speed data applications
- TWINTUS, cost efficient connections for small drives


■ **All sizes are also available in the following versions**

- push-pull version, for fast and secure mounting
- stainless steel (INOX), for offshore, food and medical environments
- overmould, available with or without kink protection
- with direct conduit attachment
- with multi-hole insert
- with anti-kink spiral



CONNECTOR
4 SMALL DRIVES
TWINTUS



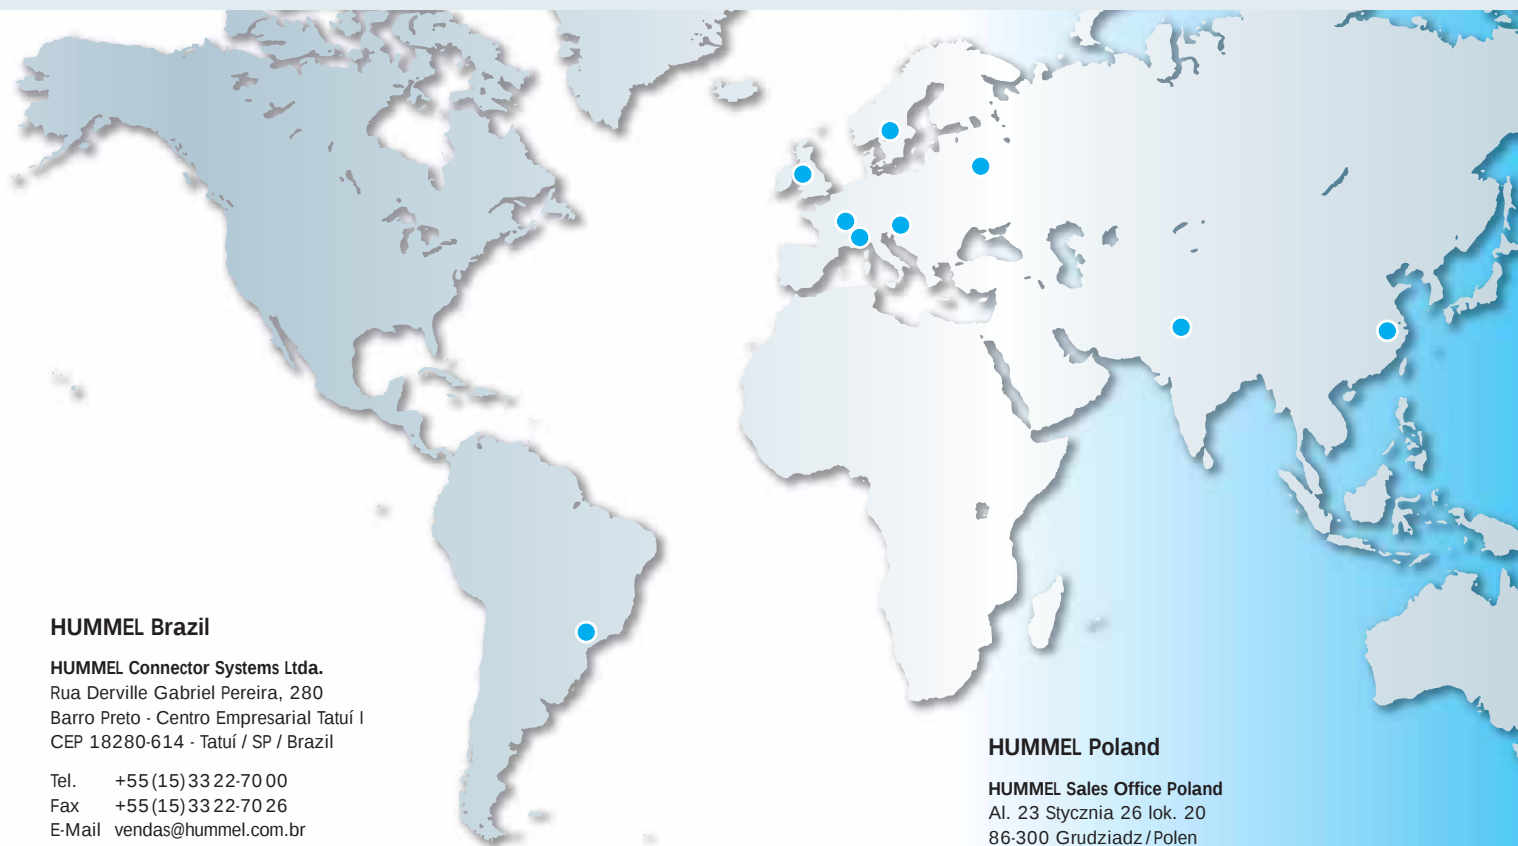

HUMMEL Brazil

HUMMEL Connector Systems Ltda.
Rua Derville Gabriel Pereira, 280
Barro Preto - Centro Empresarial Tatuí I
CEP 18280-614 - Tatuí / SP / Brazil

Tel. +55(15)33 22-70 00
Fax +55(15)33 22-70 26
E-Mail vendas@hummel.com.br
www.hummel.com.br

HUMMEL China

HUMMEL Connector Systems (Shanghai) Co., Ltd.
Room 1701 Central Plaza
No.227 Huang Pi (N) Road
200003 Shanghai / P.R. China

Tel. +86 / 21 63 75 85-51
Fax +86 / 21 63 75 85-53
E-Mail info.hcs.cn@hummel.com
www.hummel.com

HUMMEL France

HUMMEL s.a.r.l.
4, rue des fleurs
68190 Ungersheim / France

Tel. +33(0)3 89 / 55 37 20
Fax +33(0)3 89 / 53 80 27
E-Mail info.fr@hummel.com
www.hummel.com

HUMMEL UK

HUMMEL UK Limited
Office 3, Momentum House
Enterprise Way, Lowton St Marys,
Warrington, Cheshire, WA3 2BP
United Kingdom

Tel. +44(0)19 42 / 60 56 95
Fax +44(0)19 42 / 26 93 24
E-Mail s.kelly@hummel.com
www.hummel.com

HUMMEL India

HUMMEL Connector Systems Pvt. Ltd.
1211, Surya Kiran Building, 19,
Kasturba Gandhi Marg
110001 New Delhi / India

Tel. +91 / 11 / 430075-21 / - 23
Fax +91 / 11 / 430075-22
E-Mail info.in@hummel.com
www.hummel.com

HUMMEL Italy

HUMMEL s.r.l.
Via Valdellatorre 182
10091 Alpignano (Torino) / Italy

Tel. +39 / (0) 11 / 9 68 26 38
Fax +39 / (0) 11 / 9 78 55 50
E-Mail info.it@hummel.com
www.hummel.com

HUMMEL Kazakhstan

HUMMEL Sales Office Kasachstan
Turksibskij rayon, Mikrorayon Zhuldyz-1,
dom 6, kvartira 19
050049 Almaty / Kasachstan

Tel. +7 701 7262004
E-Mail a.zholybayev@hummel.com
www.hummel.com

HUMMEL Poland

HUMMEL Sales Office Poland
Al. 23 Stycznia 26 lok. 20
86-300 Grudziadz / Polen

Tel. +48 (0) 662382799
Fax +48 (0) 566430011
E-Mail g.piotrowski@hummel.com
www.hummel.com

HUMMEL Russia

OOO HUMMEL
Retschnikow 21, Strojenije 1
115142 Moskau / Russia

Tel. +7 / 499 / 7 82-40 75
Fax +7 / 499 / 6 14-67 40
E-Mail info@hummel-russia.ru
www.hummel-russia.ru

HUMMEL Scandinavia

HUMMEL Connector Systems AB
Första Magasinsgatan 5
80310 Gävle / Sweden

Tel. +46 / 73 800 12 00
Fax +46 / 26 14 38 73
E-Mail info.se@hummel.com
www.hummel.com

HUMMEL Hungary

HUMMEL Ungarn Kft.
Ko'rösi út 49.
2360 Gyál / Hungary

Tel. +36 / 29 54 06 33
Fax +36 / 29 54 06 35
E-Mail info.hcs.hu@hummel.com
www.hummel.com

HUMMEL Divisions

Touch

Touchsensors - Touchpanels - Touchsystems



Electronic

Operator Panels - Frontsheets and Keyboards
Custom fabrication of Enclosures - Battery Chargers - Cable Assembly
Sensors - Controls - Systems Solutions - Temperature Controllers



Electro Technology

Industrial Enclosures - Cable Glands
Cable Protection - Circular Connectors



Heating Equipment

Valves and Fittings - Compression Fittings
Heat Pumps - Thermostatic Heads



Customized

Parts made of Metal and Nylon



www.hummel.com

HUMMEL AG

Division ET
Lise-Meitner-Straße 2
79211 Denzlingen
Germany

Tel. +49 (0)76 66/9 11 10-0
Fax +49 (0)76 66/9 11 10-20
E-Mail info.et@hummel.com

HUMMEL AG

Lise-Meitner-Straße 2
79211 Denzlingen
Germany
www.hummel.com

