

Setting Standards

Cable Glands for „Hazardous Areas“




EXIOS

Cable Glands for „Hazardous Areas“



EXIOS



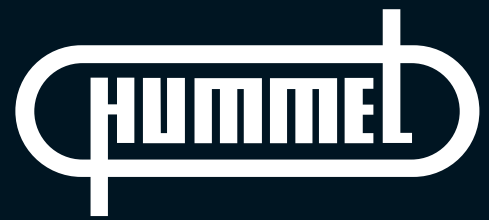

HUMMEL AG



For over 60 years HUMMEL AG has provided outstanding solutions for all forms of cable management applications in the form of cable glands, metal circular connectors and box enclosures. Our NEW innovative EXIOS range of Ex-d cable glands now offers the highest quality, reliability, ease of installation and above all safety for all hazardous area applications by meeting the very latest ATEX / IECEx Standards.

HUMMEL AG continues to invest in its ongoing programme of Ex product development to provide its customers with the best product and safety features – We aim to meet our Company motto:

Setting Standards

HUMMEL AG has a worldwide reputation as a leading manufacturer of electro-mechanical devices and offers the latest construction, tool making, plating, and assembly within our automated factory processes. Our staffs are trained to the highest standards.

EXIOS should be the new choice of specification

Used primarily on Offshore / Onshore Oil & Gas Exploration the EXIOS is gaining rapid global recognition as the leading Ex Gland for Dual Seal and Barrier applications. Together with the existing high specification of our premier brand – HSK – HUMMEL can offer cable glands for Exd / Exe / Exi areas in V0 rated plastic, brass, nickel plated, stainless steel. Linked to these items are our approved range of cable gland accessories.

HUMMEL AG offers its customer base the Global Coverage demanded with point of contact in most continents. See the HUMMEL website for our locations and network of sales agents and distributors. Quality Management is fundamental to our approach and EXIOS is produced to ISO 9001:2008 and the very latest flameproof standards globally.

EXIOS IS THE NUMBER ONE CHOICE FOR ALL Ex d CABLE GLANDS



www.hummel.com

General:

The quality of our products has been certified by many different certification bodies and authorities. HUMMEL AG is a certified manufacturer and supplier of electro-mechanical devices.




What is an explosion?

So that an explosion can occur, three conditions must be fulfilled; see the explosion triangle diagram.



1. Fuel
2. Oxygen
3. Source of ignition

If one removes one of these three conditions, an explosion cannot occur.



Potentially Explosive Atmosphere

A potentially explosive atmosphere is understood to be a mixture of a combustible material and oxygen. Oxygen is generally present as a component of air. Combustible materials can be e.g.: gases, fluids, vapours, mist or dusts. If the proportion of oxygen falls below a certain value dependent on the material, known as the oxygen limit concentration, then this mixture cannot be ignited.

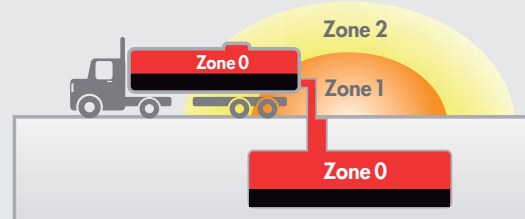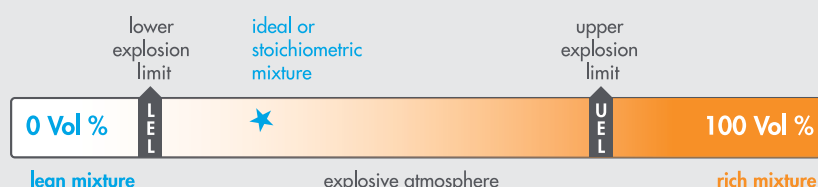

Zones IEC/CENELEC/ATEX

GAS	Zone 0	relates to areas in which a potentially explosive atmosphere consisting of a mixture of air and gases, vapours or mist exists continuously, for long periods or frequently
	Zone 1	relates to areas in which it can be considered that a potentially explosive atmosphere of gases, vapours or mist occurs occasionally
	Zone 2	relates to areas in which it is unlikely that a potentially explosive atmosphere of gases, vapours or mist might occur, but if it does occur then in all probability only seldom and for a short period
DUST	Zone 20	relates to areas in which a potentially explosive atmosphere consisting of a mixture of dust and air exists continuously, for long periods or frequently
	Zone 21	relates to areas in which it can be considered that a potentially explosive atmosphere of a mixture of dust and air occurs occasionally
	Zone 22	(note the difference between conductive and non-conductive dust!) relates to areas in which it is unlikely that a potentially explosive atmosphere of suspended dust might occur, but if it does occur then in all probability only seldom and for a short period

Apparatus Group and Device Category EPL

Group I Mining

- M1 high degree of safety EPL Ma
- M2 high degree of safety EPL Mb

Group II Non-Mining

- 1 very high degree of safety
 - Gas (Zone 0, 1, 2) EPL Ga
 - Dust (Zone 20, 21, 22) EPL Da
- 2 high degree of safety
 - Gas (Zone 1, 2) EPL Gb
 - Dust (Zone 21, 22) EPL Db
- 3 normal degree of safety
 - Gas (Zone 2) EPL Gc
 - Dust (Zone 22) EPL Dc

Gases and Dust


Gas		Dust	
IIA	Propane	IIIA	combustible dust
IIB	Ethylene	IIIB	non-conductive dust
IIC	Hydrogene	IIIC	conductive dust

Temperature Classes

Temperature class	Highest permissible surface temperature of the operating facility	Ignition temperature of combustible materials
T1	450 °C	> 450 °C
T2	300 °C	> 300 °C < 450 °C
T3	200 °C	> 200 °C < 300 °C
T4	135 °C	> 135 °C < 200 °C
T5	100 °C	> 100 °C < 200 °C
T6	85 °C	> 85 °C < 100 °C

Protection Concepts

Electrical

Intrinsic safety	Ex-ia	IEC 60079-11/EN 60079-11	Zone 0,1,2	Limit the energy	
Intrinsic safety	Ex-ib	IEC 60079-11/EN 60079-11	Zone 1,2		
Intrinsic safety	Ex-ic	IEC 60079-11/EN 60079-11	Zone 2		
Increased safety	Ex-e	IEC 60079-7/EN 60079-7	Zone 1,2	No arcs, sparks or hot surfaces, IP54 or better.	
Flameproof enclosure	Ex-d	IEC 60079-1/EN 60079-1	Zone 1,2	Contain the explosion Use a flamepath.	

Dust Protection

Enclosure	Ex-t	IEC 60079-31/EN 60079-31	Zone 20,21,22	Dust tight enclosure IP6X	
-----------	------	--------------------------	---------------	---------------------------	---

International Protection, EN 60529

1. Code		2. Code	Penetration of water	Non-protected	protection against drip water (or dripping water)	Protected against vertically falling water drops when device is tilted up to 15°	Water sprayed at an angle up to 60° on either side of the vertical shall have no harmful effects	Water splashed from any direction shall have no harmful effects	Water projected in jets from any direction shall have no harmful effects	Water projected in powerful jets from any direction shall have no harmful effects	protection against temporary submersion	protection against permanent submersion
Protection against human access to hazardous parts	Protection of equipment against penetration of solid foreign objects											
Non-protected	Non-protected	IP 0x	IP 00									
Protected against access to hazardous parts with the back of the hand	Protected against solid foreign objects larger in diameter than 50 mm	IP 1x	IP 10	IP 11	IP 12							
Protected against access to hazardous parts with a finger	Protected against solid foreign object larger in diameter than 12,5 mm	IP 2x	IP 20	IP 21	IP 22	IP 23						
Protected against access to hazardous parts with a tool larger in diameter than 2,5 mm	Protected against solid foreign objects larger in diameter than 2,5 mm	IP 3x	IP 30	IP 31	IP 32	IP 33	IP 34					
Protected against access to hazardous parts with a wire larger in diameter than 1,0 mm	Protected against solid foreign objects larger in diameter than 1 mm	IP 4x	IP 40	IP 41	IP 42	IP 43	IP 44					
Protected against access to hazardous parts with a wire larger in diameter than 1,0 mm	Prevents penetration of dust sufficient to cause damage inside the equipment.	IP 5x	IP 50				IP 54	IP 55				
Protected against access to hazardous parts with a wire larger in diameter than 1,0 mm	Dust proof	IP 6x	IP 60					IP 65	IP 66	IP 67	IP 68	

EXIOS Standards

IEC 60079-0:2007-10
EN 60079-0:2009
EN 60529

IEC 60079-1:2007-4
EN 60079-1:2007

IEC 60079-7:2006-7
EN 60079-7:2007

IEC 60079-31:2008
EN 60079-31:2009

EXIOS



+ STANDARD

- Dual seal on the inner and outer sheath of the cable
- Time-proven HUMMEL clamping system
- Armour acceptance range from 0 – 2,5 mm
- Exceptional clamping range
- Innovative „Interlocking Armour Cone“
- Zero torsion on cable cores and armour
- Fast and easy pre-assembly by hand by the use of profile material with maximum grip
- According to the latest IECEx and ATEX standards
- Ex-e / Ex-d / Ex-ta
- Zones 1, 2, 20, 21, 22
- II 2G Ex d/e IIC Gb / II 1D Ex ta IIIC Da
- Equipment Protection Level GbDa
- IP 66, 67 and 68 (5 bar)
- Halogen- and phosphorous-free
- Silicone Seals and O-Ring are standard




ATEX

ABS



Type: EXIOS Standard Materials and Technical Data

Material	brass, nickel-plated brass, stainless steel
Seals / O-Rings	silicone, VMQ
Clamping insert	PA 6
Armour	Metallic Armour or Screen
Temperature Range	-60°C – 105°C (-76°F – 221°F)
Protection	IP 66, 67 and 68 (5 bar)
Certificate	IECEX BVS 10.0078 X BVS 10 ATEX E 062 X

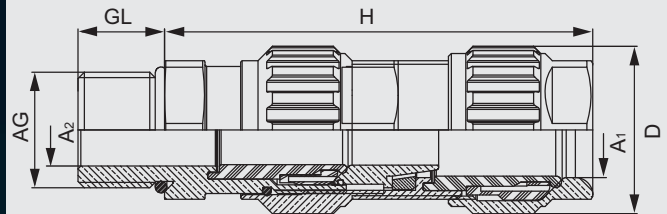

Metric Brass

Number	Gland Size	AG	mm	D mm	H max.	GL mm	Øk A1 mm	Øk A2 mm	Armour Øk mm		
									Clamping ring 1	Clamping ring 2	Ring 3 optional
1.605.1600.50	20-1	M 16x1,5	22	27	69,5	16	6-12	3-8,1	0-0,7	0,7-1,25	-
1.605.2000.50	20-2	M 20x1,5	24	29	74,3	16	9-16	6-12	0-0,7	0,7-1,25	-
1.605.2000.51	20-3	M 20x1,5	30	35	80,5	16	12,5-20,5	9-14	0-0,7	0,7-1,4	-
1.605.2500.51	25	M 25x1,5	36	42	91	16	16,9-26	12,5-20,5	0-0,7	0,9-1,6	0,7-1,4
1.605.3200.50	32	M 32x1,5	46	52	96	16	22-33	16,9-26	0-0,7	1,3-2,0	0,7-1,4
1.605.4000.50	40	M 40x1,5	55	64	107	16	28-41	22-33	0-0,7	1,3-2,0	0,7-1,4
1.605.5000.50	50	M 50x1,5	65	73	131,5	16	36-52,6	28,9-44,4	0-1,0	1,5-2,5	1,0-2,0
1.605.6300.50	63	M 63x1,5	80	90	144,5	16	46-65,3	39,9-56,3	0-1,0	1,5-2,5	1,0-2,0
1.605.7500.50	75	M 75x1,5	95	107	154	16	57-78	50,5-68,2	0-1,0	1,5-2,5	1,0-2,0

NPT brass

Number	Gland Size	AG	mm	D mm	H max.	GL mm	Øk A1 mm	Øk A2 mm	Armour Øk mm		
									Clamping ring 1	Clamping ring 2	Ring 3 optional
1.605.3800.70	20-1	NPT 3/8"	22	27	69,5	16	6-12	3-8,1	0-0,7	0,7-1,25	-
1.605.1200.70	20-2	NPT 1/2"	24	29	74,3	20	9-16	6-12	0-0,7	0,7-1,25	-
1.605.1200.71	20-3	NPT 1/2"	30	35	80,5	20	12,5-20,5	9-14	0-0,7	0,7-1,4	-
1.605.3400.70	25	NPT 3/4"	36	42	91	20,5	16,9-26	12,5-20,5	0-0,7	0,9-1,6	0,7-1,4
1.605.1000.70	32	NPT 1"	46	52	96	25	22-33	16,9-26	0-0,7	1,3-2,0	0,7-1,4
1.605.5400.70	40	NPT 1 1/4"	55	64	107	26	28-41	22-33	0-0,7	1,3-2,0	0,7-1,4
1.605.6400.70	40	NPT 1 1/2"	55	64	107	26,5	28-41	22-33	0-0,7	1,3-2,0	0,7-1,4
1.605.2000.70	50	NPT 2"	65	73	131,5	27	36-52,6	28,9-44,4	0-1,0	1,5-2,5	1,0-2,0
1.605.5200.70	63	NPT 2 1/2"	80	90	144,5	40	46-65,3	39,9-56,3	0-1,0	1,5-2,5	1,0-2,0
1.605.3000.70	75	NPT 3"	95	107	154	41	57-78	50,5-68,2	0-1,0	1,5-2,5	1,0-2,0




EXIOS

+ BARRIER

The innovative and advanced design of the EXIOS is available as a barrier version.


The EXIOS Barrier has all the outstanding EXIOS features, but uses a compound barrier to make it flameproof. Whenever installation requires a barrier gland (IEC 60079-14 / 10.4.2), EXIOS Barrier is your solution.

- According to the latest IECEx and ATEX standards
- Ex-e / Ex-d / Ex-ta
- Zones 1, 2, 20, 21, 22
- I M2 Ex d/e I Mb IIC Gb / Ex ta IIIC Da
- Equipment Protection Level MbGbDa
- IP 66, 67 and 68 (5 bar)
- Halogen- and phosphorous-free
- Silicone Seals and O-Ring are standard



Type: EXIOS BARRIER Materials and Technical Data

Material	brass, nickel-plated brass, stainless steel
Seals / O-Rings	silicone, VMQ
Compound	Epoxy-Putty
Clamping insert	PA 6
Armour	Metallic Armour or Screen
Temperature Range	-60°C – 85°C (-76°F – 185°F)
Protection	IP 66, 67 and 68 (5 bar)
Certificate	IECEX SIR 11.0044X Sira 11 ATEX 1110X

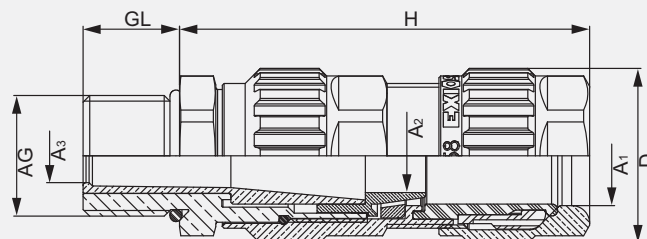

Metric brass

Number	Gland Size	AG	mm	D mm	H max.	GL mm	Ø A1 mm	A2 Ø Max. Inner Sheath	A3 Ø Max. over cores	Armour Ø mm		
										Max. No. cores	Clamping ring 1	Clamping ring 2
1.606.1600.50	20-1	M16x1,5	22	27	69,5	16	6-12	8,2	7,9	8	0-0,7	0,7-1,25
1.606.2000.50	20-2	M20x1,5	24	29	74,3	16	9-16	12	8,8	10	0-0,7	0,7-1,25
1.606.2000.52	20-3	M20x1,5	30	35	80,5	16	12,5-20,5	14	11,5	15	0-0,7	0,7-1,4
1.606.2500.51	25	M25x1,5	36	42	91	16	16,9-26	20	16,4	25	0-0,7	0,9-1,6
1.606.3200.50	32	M32x1,5	46	52	96	16	22-33	26	21,4	45	0-0,7	1,3-2,0
1.606.4000.50	40	M40x1,5	55	64	107	16	28-41	33,2	27,6	70	0-0,7	1,3-2,0
1.606.5000.50	50	M50x1,5	65	73	131,5	16	36-52,6	44,2	37,5	85	0-1,0	1,5-2,5
1.606.6300.50	63	M63x1,5	80	90	144,5	16	46-65,3	56,2	47,3	120	0-1,0	1,5-2,5
1.606.7500.50	75	M75x1,5	95	107	154	16	57-78	68,2	58,0	150	0-1,0	1,5-2,5

NPT brass

Number	Gland Size	AG	mm	D mm	H max.	GL mm	Ø A1 mm	A2 Ø Max. Inner Sheath	A3 Ø Max. over cores	Armour Ø mm		
										Max. No. cores	Clamping ring 1	Clamping ring 2
1.606.3800.70	20-1	NPT 3/8"	22	27	64,0	16	6-12	8,2	7,9	8	0-0,7	0,7-1,25
1.606.1200.70	20-2	NPT 1/2"	24	29	68,0	20	9-16	12	8,8	10	0-0,7	0,7-1,25
1.606.1200.71	20-3	NPT 1/2"	30	35	73,0	20	12,5-20,5	14	11,5	15	0-0,7	0,7-1,4
1.606.3400.70	25	NPT 3/4"	36	42	81,3	20,5	16,9-26	20	16,4	25	0-0,7	0,9-1,6
1.606.1000.70	32	NPT 1"	46	52	85,5	25	22-33	26	21,4	45	0-0,7	1,3-2,0
1.606.5400.70	40	NPT 1 1/4"	55	64	94,4	26	28-41	33,2	27,6	70	0-0,7	1,3-2,0
1.606.6400.70	40	NPT 1 1/2"	55	64	94,4	26,5	28-41	33,2	27,6	70	0-0,7	1,3-2,0
1.606.2000.70	50	NPT 2"	65	73	116,3	27	36-52,6	44,2	37,5	85	0-1,0	1,5-2,5
1.606.5200.70	63	NPT 2 1/2"	80	90	127,6	40	46-65,3	56,2	47,3	120	0-1,0	1,5-2,5
1.606.3000.70	75	NPT 3"	95	107	136,5	41	57-78	68,2	58,0	150	0-1,0	1,5-2,5

EXIOS

+A2F


With the EXIOS A2F, HUMMEL follows the successful design of the EXIOS range of cable glands. This model is especially designed for unarmoured and braided cables where durability and quality is a must.

The EXIOS A2F incorporates the time-proven HUMMEL clamping system, which offers a large clamping range in a small gland size. Therefore a smaller gland size can often be used.

- According to the latest IECEx and ATEX standards
- Ex-e / Ex-d / Ex-ta
- Zones 1, 2, 20, 21, 22
- II 2G Ex d/e IIC Gb / II 1D Ex ta IIIC Da
- Equipment Protection Level GbDa
- IP 66, 67 and 68 (5 bar)
- Halogen- and phosphorous-free
- Silicone Seals and O-Ring are standard




ATEX 



Type: EXIOS A2F **Materials and Technical Data**

Material	brass, nickel-plated brass, stainless steel
Seals / O-Rings	silicone, VMQ
Clamping insert	PA 6
Temperature Range	-60°C – 105°C (-76°F – 221°F)
Protection	IP 66, 67 and 68 (5 bar)
Certificate	IECEX DEK 12.0039X DEKRA 12 ATEX 0139X

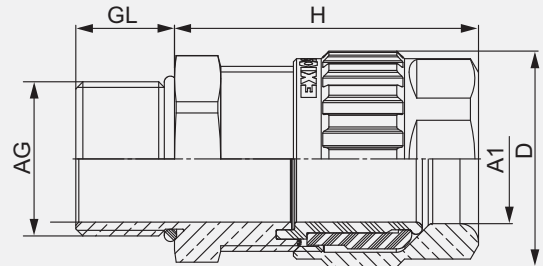

Metric brass

Number	Gland Size	AG	 mm	D mm	H max.	GL mm	∅ A1 mm
1.608.1600.50	20-1	M16x1,5	22	27	35,6	16	6-12
1.608.2000.50		M20x1,5					
1.608.2000.51	20-2	M20x1,5	24	29	39,7	16	9-16
1.608.2500.50	20-3	M25x1,5	30	35	47,5	16	12,5-20,5
1.608.3200.50	25	M32x1,5	36	42	47,8	16	16,9-26
1.608.4000.50	32	M40x1,5	46	52	51,1	16	22-33
1.608.5000.50	40	M50x1,5	55	64	56,8	16	28-41
1.608.6300.50	50	M63x1,5	65	73	65,4	16	40-52,6
1.608.7500.50	63	M75x1,5	80	90	70,3	16	51-65,3
1.608.9000.50	75	M90x2,0	95	107	76,2	20	62-78

NPT brass

Number	Gland Size	AG	 mm	D mm	H max.	GL mm	∅ A1 mm
1.608.3800.70	20-1	NPT 3/8"	22	27	35,6	16	6-12
1.608.1200.70		NPT 1/2"	22/24			20	
1.608.1200.71	20-2	NPT 1/2"	24	29	39,7	20	9-16
1.608.3400.70	20-3	NPT 3/4"	30	35	47,5	20,5	12,5-20,5
1.608.1000.70	25	NPT 1"	36	42	47,8	25	16,9-26
1.608.5400.70	32	NPT 1 1/4"	46	52	51,1	26	22-33
1.608.6400.70	40	NPT 1 1/2"	55	64	56,8	26,5	28-41
1.608.2000.70	50	NPT 2"	65	73	65,4	27	40-52,6
1.608.5200.70	63	NPT 2 1/2"	80	90	70,3	40	51-61
1.608.3000.70	75	NPT 3"	95	107	76,2	41,5	62-78



EXIOS

+ MZ

- Dual seal on the inner and outer sheath of the cable
 - Time-proven HUMMEL clamping system
 - Armour acceptance range from 0 – 2,5 mm
 - Exceptional clamping range
 - Innovative „Interlocking Armour Cone“
 - Zero torsion on cable cores and armour
 - Fast and easy pre-assembly by hand by the use of profile material with maximum grip
 - With additional cable clamp (MZ)
-
- According to the latest IECEx and ATEX standards
 - Ex-e / Ex-d / Ex-ta
 - Zones 1, 2, 20, 21, 22
 - II 2G Ex d/e IIC Gb / II 1D Ex ta IIIC Da
 - Equipment Protection Level GbDa
-
- IP 66, 67 and 68 (5 bar)
 - Halogen- and phosphorous-free
 - Silicone Seals and O-Ring are standard




ATEX



Type: EXIOS MZ

Materials and Technical Data

Material	brass, nickel-plated brass, stainless steel
Seals / O-Rings	silicone, VMQ
Clamping insert	PA 6
Armour	Metallic Armour or Screen
Temperature Range	-60°C – 105°C (-76°F – 221°F)
Protection	IP 66, 67 and 68 (5 bar)
Certificate	IECEX BVS 10.0078 X BVS 10 ATEX E 062 X

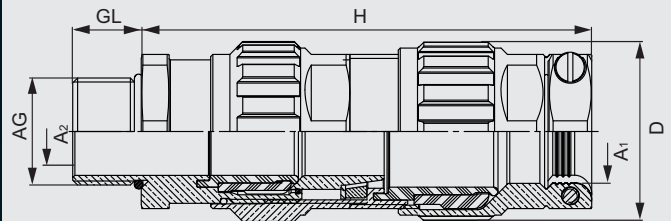

Metric Brass

Number	Gland Size	AG	mm	D mm	H max.	GL mm	Øk A1 mm	Øk A2 mm	Armour Øk mm		
									Clamping ring 1	Clamping ring 2	Ring 3 optional
1.6Z5.1600.50	20-1	M 16x1,5	22	27	79	16	6-11	3-8,1	0-0,7	0,7-1,25	-
1.6Z5.2000.50	20-2	M 20x1,5	24	29	83,8	16	9-13	6-12	0-0,7	0,7-1,25	-
1.6Z5.2000.52	20-3	M 20x1,5	30	35	91,5	16	12,5-17,5	9-14	0-0,7	0,7-1,4	-
1.6Z5.2500.51	25	M 25x1,5	36	42	105,7	16	16,9-24	12,5-20,5	0-0,7	0,9-1,6	0,7-1,4
1.6Z5.3200.50	32	M 32x1,5	46	52	107	16	22-32,5	16,9-26	0-0,7	1,3-2,0	0,7-1,4
1.6Z5.4000.50	40	M 40x1,5	55	64	120	16	28-39,5	22-33	0-0,7	1,3-2,0	0,7-1,4
1.6Z5.5000.50	50	M 50x1,5	65	73	144,5	16	36-49	28,9-44,4	0-1,0	1,5-2,5	1,0-2,0
1.6Z5.6300.50	63	M 63x1,5	80	90	157,5	16	46-64	39,9-56,3	0-1,0	1,5-2,5	1,0-2,0
1.6Z5.7500.50	75	M 75x1,5	95	107	167	16	57-78	50,5-68,2	0-1,0	1,5-2,5	1,0-2,0

NPT brass

Number	Gland Size	AG	mm	D mm	H max.	GL mm	Øk A1 mm	Øk A2 mm	Armour Øk mm		
									Clamping ring 1	Clamping ring 2	Ring 3 optional
1.6Z5.3800.70	20-1	NPT 3/8"	22	27	79	16	6-11	3-8,1	0-0,7	0,7-1,25	-
1.6Z5.1200.70	20-2	NPT 1/2"	24	29	83,8	20	9-13	6-12	0-0,7	0,7-1,25	-
1.6Z5.1200.71	20-3	NPT 1/2"	30	35	91,5	20	12,5-17,5	9-14	0-0,7	0,7-1,4	-
1.6Z5.3400.70	25	NPT 3/4"	36	42	105,7	20,5	16,9-24	12,5-20,5	0-0,7	0,9-1,6	0,7-1,4
1.6Z5.1000.70	32	NPT 1"	46	52	107	25	22-32,5	16,9-26	0-0,7	1,3-2,0	0,7-1,4
1.6Z5.5400.70	40	NPT 1 1/4"	55	64	120	26	28-39,5	22-33	0-0,7	1,3-2,0	0,7-1,4
1.6Z5.6400.70	40	NPT 1 1/2"	55	64	120	26,5	28-39,5	22-33	0-0,7	1,3-2,0	0,7-1,4
1.6Z5.2000.70	50	NPT 2"	65	73	144,5	27	36-49	28,9-44,4	0-1,0	1,5-2,5	1,0-2,0
1.6Z5.5200.70	63	NPT 2 1/2"	80	90	157,5	40	46-64	39,9-56,3	0-1,0	1,5-2,5	1,0-2,0
1.6Z5.3000.70	75	NPT 3"	95	107	167	41	57-78	50,5-68,2	0-1,0	1,5-2,5	1,0-2,0

Accessories

Red Fibre Washer




Metric	Item No.	NPT	Item No.
M16	1.326.1600.50	1/2"	1.326.1200.70
M20	1.326.2000.50	3/4"	1.326.3400.70
M25	1.326.2500.50	1"	1.326.1000.70
M32	1.326.3200.50	1 1/4"	1.326.5400.70
M40	1.326.4000.50	1 1/2"	1.326.6400.70
M50	1.326.5000.50	2"	1.326.2000.70
M63	1.326.6300.50	2 1/2"	1.326.5200.70
M75	1.326.7500.50	3"	1.326.3000.70

PVC Shroud (LSF upon request)



EXIOS Size	Item No.
20 – 1	1.802.2000.50
20 – 2	1.802.2000.51
20 – 3	1.802.2000.52
25	1.802.2500.50
32	1.802.3200.50
40	1.802.4000.50
50	1.802.5000.50
63	1.802.6300.50
75	1.802.7500.50


Earth Tag Brass



Metric	Item No.	NPT	Item No.
M16	1.022.1600.50	1/2"	1.022.1200.70
M20	1.022.2000.50	3/4"	1.022.3400.70
M25	1.022.2500.50	1"	1.022.1000.70
M32	1.022.3200.50	1 1/4"	1.022.5400.70
M40	1.022.4000.50	1 1/2"	1.022.6400.70
M50	1.022.5000.50	2"	1.022.2000.70
M63	1.022.6300.50	2 1/2"	1.022.5200.70
M75	1.022.7500.50	3"	1.022.3000.70



Accessories

Serrated Washer INOX



Metric	Item No.	NPT	Item No.
M 16	1.329.1600.50	1/2"	1.329.1600.70
M 20	1.329.2000.50	3/4"	1.329.3400.70
M 25	1.329.2500.50	1"	1.329.1000.70
M 32	1.329.3200.50	1 1/4"	1.329.5400.70
M 40	1.329.4000.50	1 1/2"	1.329.6400.70
M 50	1.329.5000.50	2"	1.329.2000.70
M 63	1.329.6300.50	2 1/2"	1.329.5200.70
M 75	1.329.7500.50	3"	1.329.3000.70

Locknut Nickel Plated Brass (GM-Ms) (NPT upon request)



IG	H mm	 mm	Item No.
M 16 x 1,5	2,8	19	1.161.1600.50
M 20 x 1,5	3,0	23	1.161.2000.50
M 25 x 1,5	3,5	29	1.161.2500.50
M 32 x 1,5	4,0	36	1.161.3200.50
M 40 x 1,5	4,5	45	1.161.4000.50
M 50 x 1,5	5,5	55	1.161.5000.50
M 63 x 1,5	6,0	70	1.161.6300.50
M 75 x 1,5	8,0	85	1.161.7500.50



HUMMEL Worldwide

HUMMEL Brazil

HUMMEL Connector Systems Ltda.
Rua Derville Gabriel Pereira, 280
Barro Preto - Centro Empresarial Tatui I
CEP 18280-614 - Tatui / SP / Brazil

Tel. +55 (15) 33 22-70 00
Fax +55 (15) 33 22-70 26
E-Mail vendas@hummel.com.br
www.hummel.com.br

HUMMEL China

HUMMEL Connector Systems (Shanghai) Co., Ltd.
Room 1701 Central Plaza
No.227 Huang Pi (N) Road
200003 Shanghai / P.R. China

Tel. +86 / 21 63 75 85-51
Fax +86 / 21 63 75 85-53
E-Mail info.hcs.cn@hummel.com
www.hummel.com

HUMMEL France

HUMMEL s.a.r.l.
4, rue des fleurs
68190 Ungersheim / France

Tel. +33 (0) 3 89 / 55 37 20
Fax +33 (0) 3 89 / 53 80 27
E-Mail info.fr@hummel.com
www.hummel.com

HUMMEL Hungary

HUMMEL Ungarn Kft.
Kőrső út 49.
2360 Gyál / Hungary

Tel. +36 / 29 54 06 33
Fax +36 / 29 54 06 35
E-Mail info.hcs.hu@hummel.com
www.hummel.com

HUMMEL India

HUMMEL Connector Systems Pvt. Ltd.
1211, Surya Kiran Building, 19,
Kasturba Gandhi Marg
110001 New Delhi / India

Tel. +91/11/ 430075-21/- 23
Fax +91/11/430075-22
E-Mail info.in@hummel.com
www.hummel.com

HUMMEL Italy

HUMMEL s.r.l.
Via Valdellatore 182
10091 Alpignano (Torino) / Italy

Tel. +39 / (0) 11 / 9 68 26 38
Fax +39 / (0) 11 / 9 78 55 50
E-Mail info.it@hummel.com
www.hummel.com

HUMMEL Kazakhstan

HUMMEL Sales Office Kasachstan
Turksibskij rayon, Mikrorayon Zhuldyz-1,
dom 6, kvartira 19
050049 Almaty / Kasachstan

Tel. +7 701 7262004
E-Mail a.zholdybayev@hummel.com
www.hummel.com

HUMMEL Poland

HUMMEL Sales Office Poland
Al. 23 Stycznia 26 lok. 20
86-300 Grudziadz / Polen

Tel. +48 (0) 662382799
Fax +48 (0) 566430011
E-Mail g.piotrowski@hummel.com
www.hummel.com

HUMMEL Russia

OOO HUMMEL
Reitschnikow 21, Strojenije 1
115142 Moskau / Russia

Tel. +7 / 499 / 7 82-4075
Fax +7 / 499 / 6 14-67 40
E-Mail info@hummel-russia.ru
www.hummel-russia.ru

HUMMEL Scandinavia

HUMMEL Connector Systems AB
Första Magasinsgatan 5
80310 Gävle / Sweden

Tel. +46 / 73 800 12 00
Fax +46 / 26 14 38 73
E-Mail info.se@hummel.com
www.hummel.com

HUMMEL South Korea

HUMMEL Sales Office South Korea
#311 Chung-Gwang Nobleheim 447-3
Gang dong-gu, Seoul 134-020 / South Korea

Tel. +82 / 2 470 27 62
Fax +82 / 2 470 27 63
E-Mail w.jeong@hummel.com
www.hummel.com

HUMMEL UK

HUMMEL UK Limited
Office 3, Momentum House
Enterprise Way, Lowton St Marys,
Warrington, Cheshire, WA3 2BP
United Kingdom

Tel. +44 (0) 19 42 / 60 56 95
Fax +44 (0) 19 42 / 26 93 24
E-Mail s.kelly@hummel.com
www.hummel.com



For HUMMEL Sales offices and Distributors
please see our website.

HUMMEL AG

Division ET
Lise-Meitner-Straße 2
79211 Denzlingen
Germany

Tel. +49 (0) 76 66 / 9 11 10-0
Fax +49 (0) 76 66 / 9 11 10-20
E-Mail info.et@hummel.com

HUMMEL AG

Lise-Meitner-Straße 2
79211 Denzlingen
Germany
www.hummel.com

