

DOWNLIGHTS


03

QUADROLED	64
FRAMELIGHT 60	66
FRAMELIGHT 1	68
FRAMELIGHT 2	70
FRAMELIGHT 3	72
FRAMELIGHT 4	74
FRAMELIGHT 5	76
FRAMELIGHT SUSPENDED	78 - 81
FRAME TRACK	82
PROJECT 50	84
PROJECT 85	86
PROJECT 95	88
PROJECT 115	90
PROJECT PAR	92
PROJECT PACKS	94
QUADRATO	96
ARC 111	98
ARC 145	100
ARC 183	102
HIGHLUX 100	104
HIGHLUX 130	106
HIGHLUX 195	108
UNISEAL IP20	110
LIGHTSEAL IP44	112
UNILUX ECO	114
TWINLUX ECO	116
OPAZ	118
UNISEAL IP65	120
LIGHTSEAL IP65	122
PROSEAL	124
FIRESEAL	126



DOWNLIGHTS



Downlights are the most common way of providing light for retail applications and office environments, circulation zones and office perimeter areas.

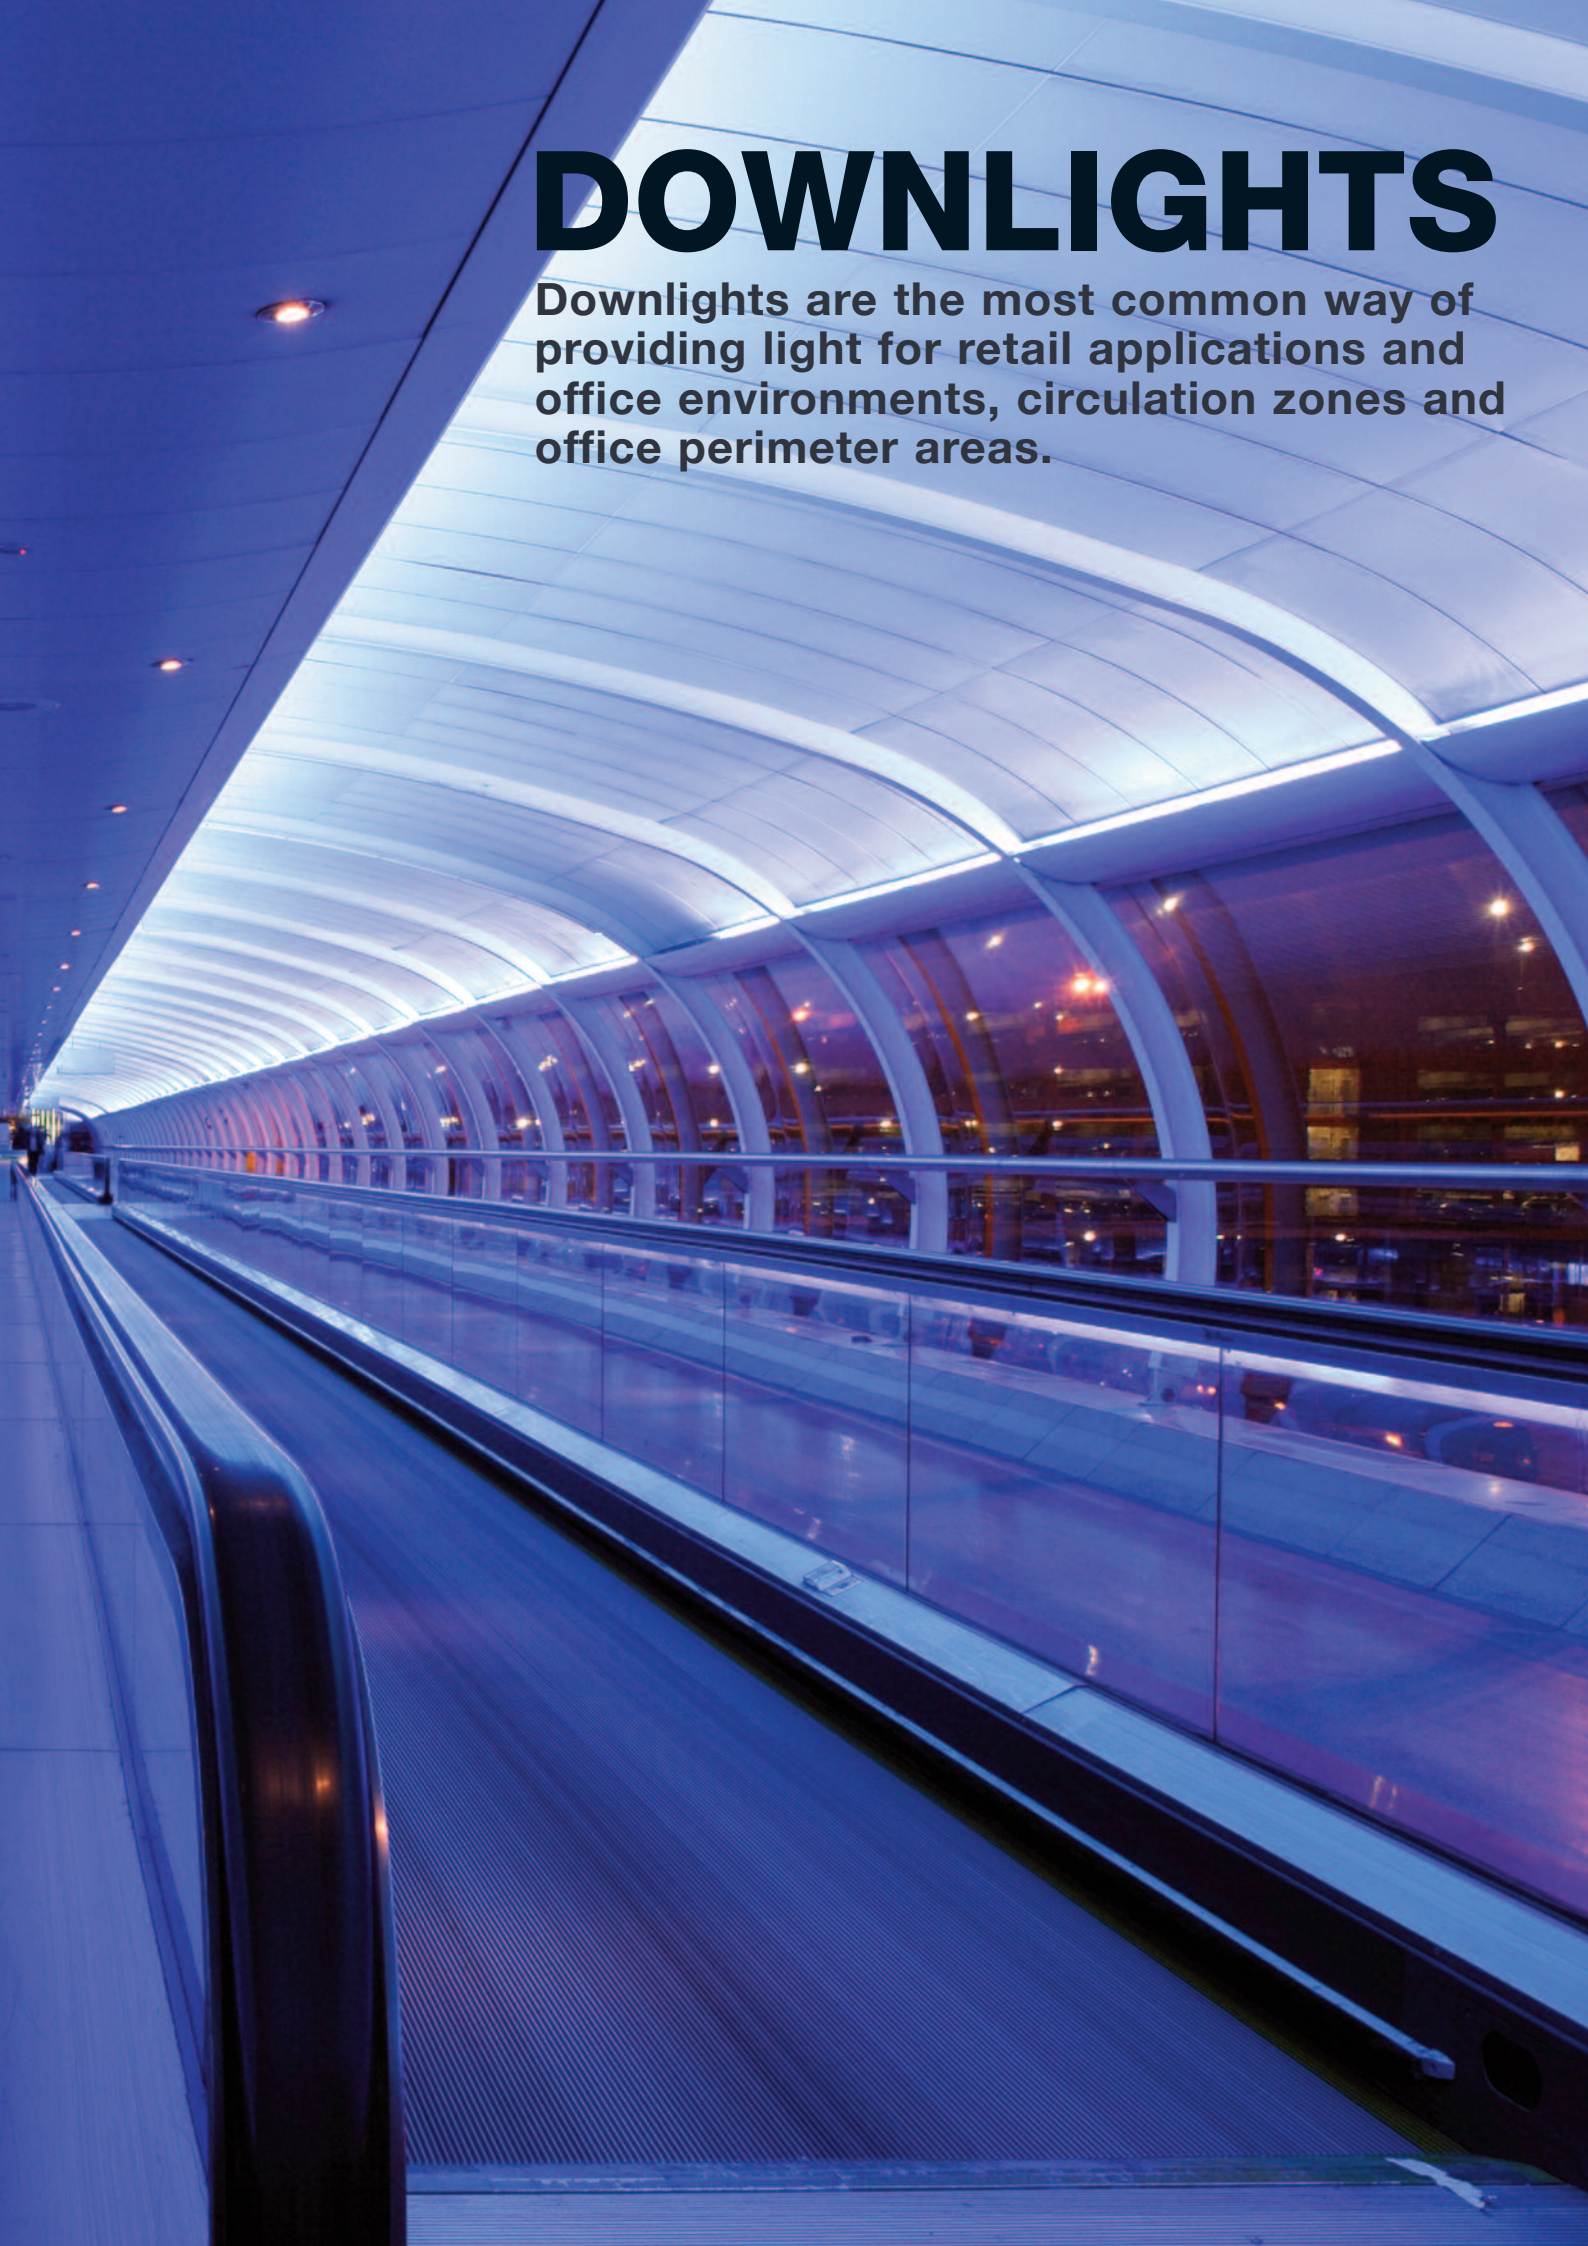

QUADROLED

A contemporary recessed fitting featuring high output LEDs. Ideal for commercial, retail and leisure environments.

- Incorporates the latest Tridonic ATCO TALEXXeos LEDs
- Unique reflector minimises glare
- High output LEDs
- Suitable for mounting in plasterboard and ceiling tiles.

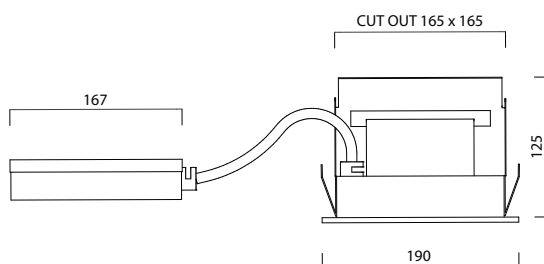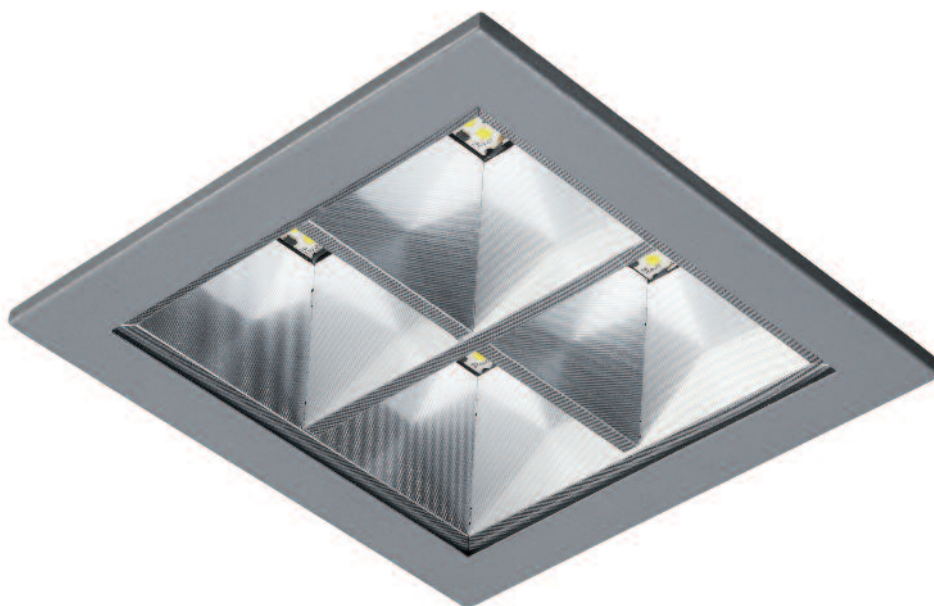

Part Code Description

DSR432NW/EL

Quadroled recessed
Neutral White

Finish

WH ☐ SG ☒

Lamp Type

LED c/w LEDs and Power Supply

Wattage

32W

Materials

Housing: Mild steel
Reflector: Aluminium
Heat sink: Aluminium

Weight

1.75kg

Symbols

illumaled

DSR432WW/EL

Quadroled recessed
Warm White

WH ☐ SG ☒

LED c/w LEDs and Power Supply

32W

Housing: Mild steel
Reflector: Aluminium
Heat sink: Aluminium

1.75kg

illumaled









FRAMELIGHT 60

A micro-size range of LED plate-mounted gimbal downlights. An ideal solution for small retail displays, undercabinet and furniture applications.

- High output 1.2W 350mA LED modules
- Tension springs allow quick and easy installation

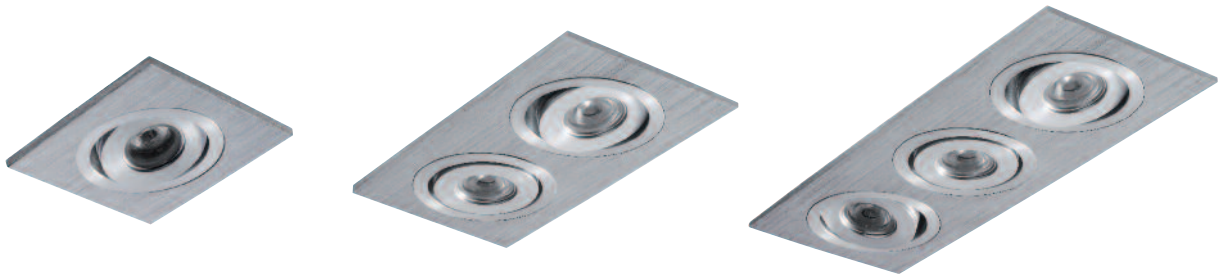

Part Code
Description

DFL1112NW
1 x 1.2W **Neutral White**
12° beam Single square

DFL2112NW
2 x 1.2W **Neutral White**
12° beam Double square

DFL3112NW
3 x 1.2W **Neutral White**
12° beam Triple square

Part Code
Description

DFL1112WW
1 x 1.2W **Warm White**
12° beam Single square

DFL2112WW
2 x 1.2W **Warm White**
12° beam Double square

DFL3112WW
3 x 1.2W **Warm White**
12° beam Triple square

Part Code
Description

DFL1130NW
1 x 1.2W **Neutral White**
30° beam Single square

DFL2130NW
2 x 1.2W **Neutral White**
30° beam Double square

DFL3130NW
3 x 1.2W **Neutral White**
30° beam Triple square

Part Code
Description

DFL1130WW
1 x 1.2W **Warm White**
30° beam Single square

DFL2130WW
2 x 1.2W **Warm White**
30° beam Double square

DFL3130WW
3 x 1.2W **Warm White**
30° beam Triple square

Finish
Lamp Type
Wattage
Materials
Weight
Symbols

AB ■
LED c/w LEDs
1.2W
Aluminium
0.07kg
illumaled

AB ■
LED c/w LEDs
1.2W
Aluminium
0.13kg
illumaled

AB ■
LED c/w LEDs
1.2W
Aluminium
0.19kg
illumaled

Power Supply

(Constant current 350mA)

PSL03350 1-3W Max
PSL12350 6-12W Max
PSL18350 10-18W Max

Splitter block

PSE6350(1000) 350mA 6 way extension (1m lead) c/w 3 x **PSP350**
PSE2350(1000) 350mA 2 way extension (1m lead)
PSP350 1 x close-loop plug for 350mA


For further information, see page 218 - 219

- LED heads come pre-wired as standard


- Easy plug and socket wiring

- Plug-in power supply connection

1



2




3




FRAMELIGHT 1

A clean, classic accent lighting solution for multiple retail, leisure and commercial applications. Fully adjustable $\pm 45^\circ$ pivot on two axes.


- Multiple light sources
- Tension springs/clamps allow quick & easy installation
- Many combinations, sizes & versions
- LED version available



Circular




Square



LED / MR16



Circular

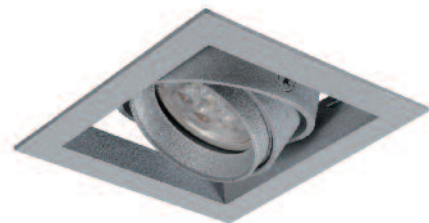

LED Square

CIRCULAR

Part Code	DFAR1	DFADR1035/C/EL/L24	DFADR1070/C/EL/L24
Description	Circular Framelight	Circular Framelight	Circular Framelight
Finish	WH ☐ SG ☒	WH ☐ SG ☒	WH ☐ SG ☒
Lamp Type	AR111 12V Transformer Required, see p. 218	CDMR111 Metal Halide c/w Pre-wired Electronic Control	CDMR111 Metal Halide c/w Pre-wired Electronic Control
Lamp Cap	G53	GX8.5	GX8.5
Wattage	1 x 100W max.	1 x 35W	1 x 70W
Materials	Housing: Steel Bezel: Aluminium Gimbal: Aluminium	Housing: Steel Bezel: Aluminium Gimbal: Aluminium	Housing: Steel Bezel: Aluminium Gimbal: Aluminium
Weight	0.76kg	1.84kg	1.88kg
Symbols			

CIRCULAR

Part Code	DFDR1035/C/EL/L	DFDR1070/C/EL/L	DFDR1150/C/EL/L
Description	Circular Framelight	Circular Framelight	Circular Framelight
Finish	WH ☐ SG ☒	WH ☐ SG ☒	WH ☐ SG ☒
Lamp Type	CDM-T Metal Halide c/w Pre-wired Electronic Control	CDM-T / HQI-T Metal Halide c/w Pre-wired Electronic Control	CDM-T / HQI-T Metal Halide c/w Pre-wired Electronic Control
Lamp Cap	G12	G12	G12
Wattage	1 x 35W	1 x 70W	1 x 150W
Materials	Housing: Steel Bezel & Gimbal: Aluminium Reflector: Aluminium	Housing: Steel Bezel & Gimbal: Aluminium Reflector: Aluminium	Housing: Steel Bezel & Gimbal: Aluminium Reflector: Aluminium
Weight	1.15kg	1.27kg	1.41kg

ADD Suffix to Code for following options: /ELDA 1-10V analogue dimmable ballast
(Metal Halide versions dim down to 55% minimum)



SQUARE

DFL10736WW

Square LED Framelight Warm White
SG ■

LED

c/w LEDs and Power Supply

n/a

8W



Housing: Steel
Bezel: Aluminium
Gimbal: Aluminium
0.60kg

illuma**led**

DFGX1


Square Framelight
SG ■

MR16 12V

Transformer required,
see page 218.

GX5.3 / GU5.3

1 x 50W max.



Housing: Steel
Bezel: Aluminium
Gimbal: Aluminium
0.50kg



DFA1

Square Framelight
WH □ SG ■

AR111 12V

Transformer required,
see page 218.

G53

1 x 100W max.



Housing: Steel
Bezel: Aluminium
Gimbal: Aluminium
1.40kg



DFAD1035/C/EL/L24

Square Framelight
WH □ SG ■

CDMR111 Metal Halide

c/w Pre-wired Electronic
Control Gear & 24° lamp
GX8.5

1 x 35W



Housing: Steel
Bezel: Aluminium
Gimbal: Aluminium
2.44kg



SQUARE

DFAD1070/C/EL/L24

Square Framelight
WH □ SG ■

CDMR111 Metal Halide

c/w Pre-wired Electronic Control
Gear & 24° Lamp
GX8.5

1 x 70W



Housing: Steel
Bezel: Aluminium
Gimbal: Aluminium
2.48kg

DFD1035/C/EL/L

Square Framelight
WH □ SG ■

CDM-T Metal Halide

c/w Pre-wired Electronic
Control Gear & Lamp
G12

1 x 35W



Housing: Steel
Bezel & Gimbal: Aluminium
Reflector: Aluminium
1.81kg

DFD1070/C/EL/L

Square Framelight
WH □ SG ■

CDM-T / HQI-T Metal Halide

c/w Pre-wired Electronic
Control Gear & Lamp
G12

1 x 70W



Housing: Steel
Bezel & Gimbal: Aluminium
Reflector: Aluminium
1.93kg

DFD1150/C/EL/L

Square Framelight
WH □ SG ■

CDM-T / HQI Metal Halide

c/w Pre-wired Electronic
Control Gear & Lamp
G12

1 x 150W




Housing: Steel
Bezel & Gimbal: Aluminium
Reflector: Aluminium
2.07kg

FRAMELIGHT 2

The classic design theme expanded. Fully adjustable $\pm 45^\circ$ pivot on two axes.

- Multiple light sources
- Tension springs/ceiling clamps allow quick and easy installation
- LED version available

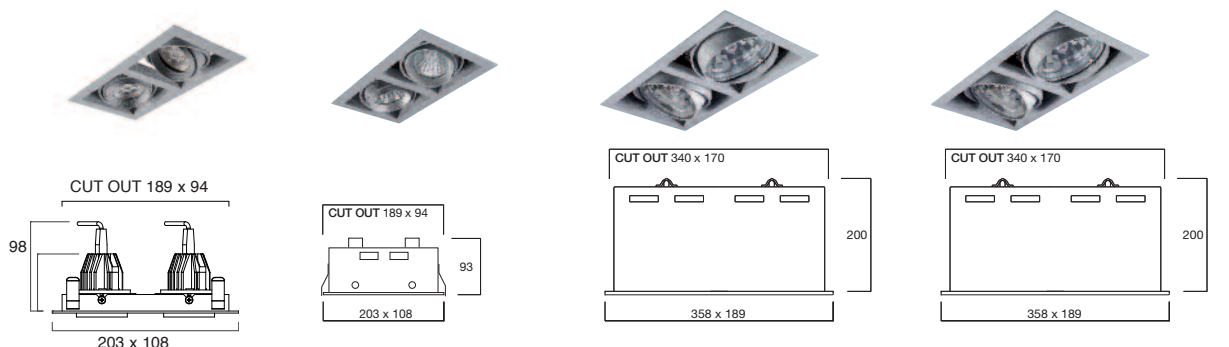

Part Code
Description

Finish
Lamp Type

Lamp cap
Wattage

Materials

Weight
Symbols

DFL20736WW/EL

Framelight 2 LED
Warm White

SG ■

LED c/w LEDs and
Power Supply

n/a

2 x 8W

Housing: Steel

Bezel and Gimbal:

Aluminium

1.00kg

illumaled

DFGX2

Framelight 2

SG ■

MR16 12V Transformer
Required, see p.218

GX5.3 / GU5.3

2 x 50W max.

Housing: Steel

Bezel and Gimbal:

Aluminium

0.73kg



DFA2

Framelight 2

WH □ SG ■

AR111 12V Transformer
Required, see p.218

G53

2 X 100W max.

Housing: Steel

Bezel and Gimbal:

Aluminium

2.80kg



DFAD2035/C/EL/L24

Framelight 2

WH □ SG ■

CDMR111 Metal Halide
c/w Control Gear & 24° Lamps

GX8.5

2 X 35W

Housing: Steel

Bezel and Gimbal:


Aluminium

3.62kg

ADD Suffix to Code for following options:

/ELDA 1-10V analogue dimmable ballast

(Metal Halide versions dim down to 55% minimum)

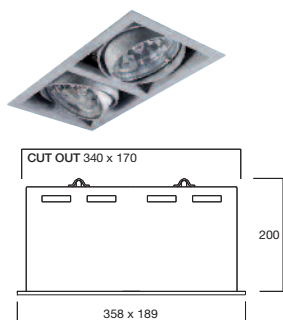


DFAD2070/C/EL/L24
Framelight 2

WH ☐ SG ☒

CDMR111 Metal Halide
c/w Control Gear & 24° Lamps
GX8.5
2 X 70W



Housing: Steel
Bezel and Gimbal: Aluminium
Reflector: Aluminium
3.66kg

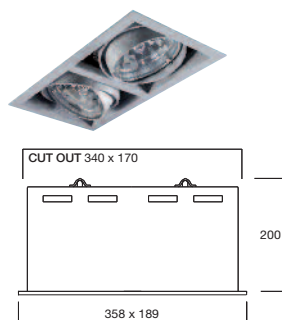


DFD2035/C/EL/L
Framelight 2

WH ☐ SG ☒

CDM-T Metal Halide
c/w Control Gear & Lamps
G12
2 X 35W



Housing: Steel
Bezel and Gimbal: Aluminium
Reflector: Aluminium
3.62kg

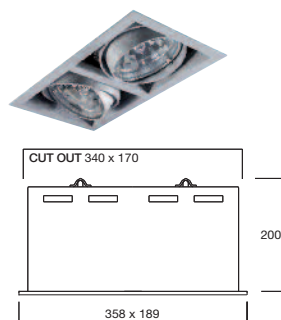


DFD2070/C/EL/L
Framelight 2

WH ☐ SG ☒

CDM-T / HQI-T Metal Halide
c/w Control Gear & Lamps
G12
2 X 70W



Housing: Steel
Bezel and Gimbal: Aluminium
Reflector: Aluminium
3.86kg

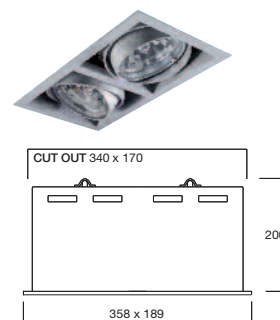

DFD2150/C/EL/L
Framelight 2

WH ☐ SG ☒

CDM-T / HQI-T Metal Halide
c/w Control Gear & Lamps
G12
2 X 150W






Housing: Steel
Bezel and Gimbal: Aluminium
Reflector: Aluminium
4.14kg

FRAMELIGHT 3

**A triple module providing further flexibility.
Fully adjustable $\pm 45^\circ$ pivot on two axes.**

- Combinations of spot & floodlighting easily achieved • Tension springs/ceiling clamps for quick and easy installation
- LED version available

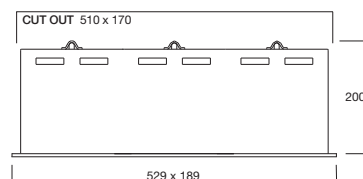

**Part Code
Description**

DFL30736WW
Framelight 3 LED
Warm White

DFGX3
Framelight 3

DFA3
Framelight 3

DFAD3035/C/EL/L24
Framelight 3

**Finish
Lamp Type**

SG ■

SG ■

WH □ SG ■

WH □ SG ■

**Lamp cap
Wattage**

LED c/w LEDs and
Power Supply
n/a

MR16 12V Transformer
Required, see p.218
GX5.3 / GU5.3

AR111 12V Transformer
Required, see p.218
G53

CDMR111 Metal Halide
c/w Control Gear & 24° Lamps
GX8.5

Materials

Housing: Steel
Bezel and Gimbal:
Aluminium

Housing: Steel
Bezel and Gimbal:
Aluminium

Housing: Steel
Bezel and Gimbal:
Aluminium

Housing: Steel
Bezel and Gimbal:
Aluminium

**Weight
Symbols**

1.15kg

1.08kg

3.90kg



5.60kg

illumaLED



ADD Suffix to Code for following options:

/ELDA 1-10V analogue dimmable ballast
(Metal Halide versions dim down to 55% minimum)

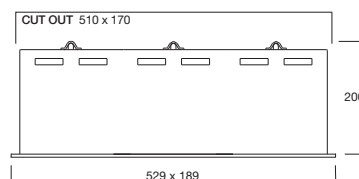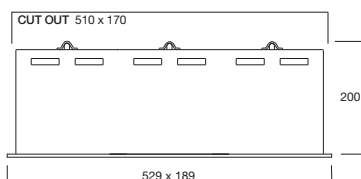

DFAD3070/C/EL/L24

Framelight 3

WH ☐ SG ☒

CDMR111 Metal Halide 

c/w Control Gear & 24° Lamps

GX8.5

3 X 70W



Housing: Steel

Bezel and Gimbal:

Aluminium

5.90kg

DFD3035/C/EL/L

Framelight 3

WH ☐ SG ☒

CDM-T Metal Halide 

c/w Control Gear & Lamps

G12

3 X 35W



Housing: Steel

Bezel and Gimbal: Aluminium

Reflector: Aluminium

5.23kg

DFD3070/C/EL/L

Framelight 3

WH ☐ SG ☒

CDM-T / HQI-T Metal Halide 

c/w Control Gear & Lamps

G12

3 X 70W



Housing: Steel

Bezel and Gimbal: Aluminium

Reflector: Aluminium

5.59kg

DFD3150/C/EL/L

Framelight 3

WH ☐ SG ☒

CDM-T / HQI-T Metal Halide 

c/w Control Gear & Lamps

G12

3 X 150W



Housing: Steel

Bezel and Gimbal: Aluminium


Reflector: Aluminium

6.01kg

FRAMELIGHT 4

A four-way module for dynamic retail solutions. Lighting heads fully adjustable $\pm 45^\circ$ pivot on two axes.

- Multiple light sources
- Tension springs/ceiling clamps for quick and easy installation
- LED version available

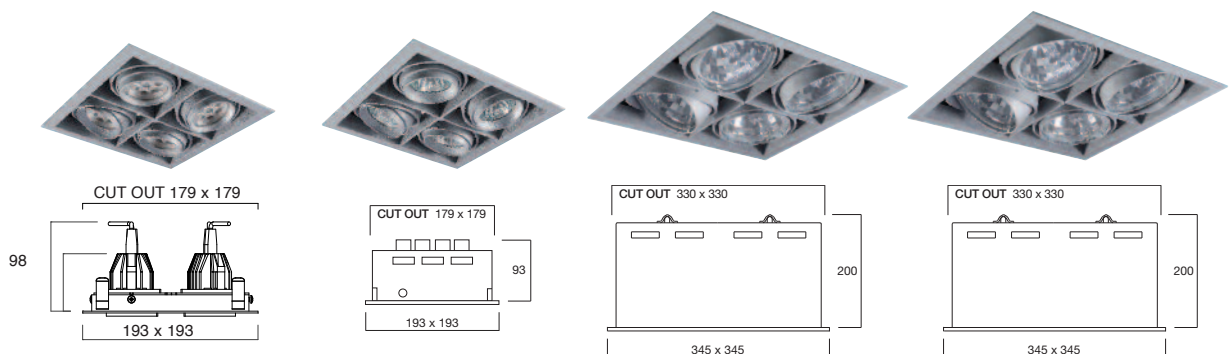

Part Code
Description

DFL40736WW
Framelight 4 LED
Warm White

DFGX4
Framelight 4

DFA4
Framelight 4

DFAD4035/C/EL/L24
Framelight 4

Finish
Lamp Type

SG ■
LED c/w LEDs and
Power Supply

SG ■
MR16 12V Transformer
Required, see p.218

WH □ SG ■
AR111 12V Power
Supply Required, see p.218

WH □ SG ■
CDMR111 Metal Halide
c/w Control Gear & 24° Lamps

Lamp cap
Wattage

n/a
4 x 8W

GX5.3 / GU5.3
4 x 50W max.

G53
4 x 100W max.

GX8.5
4 X 35W

Materials

Housing: Steel
Bezel and Gimbal:
Aluminium

Housing: Steel
Bezel and Gimbal:
Aluminium

Housing: Steel
Bezel and Gimbal:
Aluminium

Housing: Steel
Bezel and Gimbal:
Aluminium

Weight
Symbols

1.40kg
illumaled


1.20kg
Ⓜ

3.90kg
Ⓜ

6.00kg

ADD Suffix to Code for following options:

/ELDA 1-10V analogue dimmable ballast
(Metal Halide versions dim down to 55% minimum)

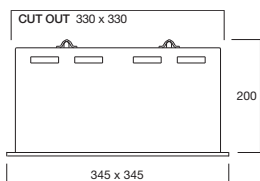


DFAD4070/C/EL/L24
Framelight 4

WH ☐ SG ☒

CDMR111 Metal Halide
c/w Control Gear & 24° Lamps
GX8.5
4 X 70W



Housing: Steel
Bezel and Gimbal:
Aluminium
6.20kg

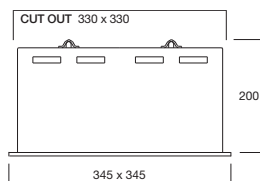


DFD4035/C/EL/L
Framelight 4

WH ☐ SG ☒

CDM-T Metal Halide
c/w Control Gear & Lamps
G12
4 X 35W



Housing: Steel
Bezel and Gimbal: Aluminium
Reflector: Aluminium
5.64kg

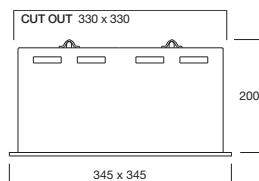


DFD4070/C/EL/L
Framelight 4

WH ☐ SG ☒

CDM-T / HQI-T Metal Halide
c/w Control Gear & Lamps
G12
4 X 70W



Housing: Steel
Bezel and Gimbal: Aluminium
Reflector: Aluminium
6.12kg

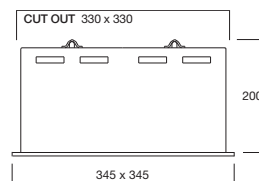

DFD4150/C/EL/L
Framelight 4

WH ☐ SG ☒

CDM-T / HQI-T Metal Halide
c/w Control Gear & Lamps
G12
4 X 150W




Housing: Steel
Bezel and Gimbal: Aluminium
Reflector: Aluminium
6.68kg

FRAMELIGHT 5

A simple yet sophisticated solution that combines general ambient with directional accent lighting. Lighting heads fully adjustable $\pm 45^\circ$ pivot on two axes.

- CDM-T lamps supplied
- Multiple light sources
- Ceiling clamps allow quick and easy installation

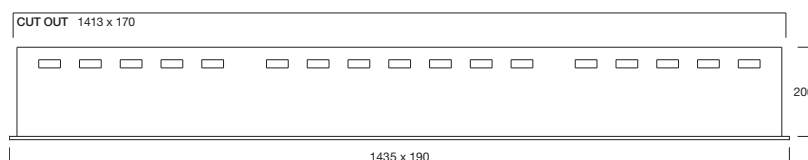

Part Code Description

Finish

Lamp Type

Lamp Cap

Wattage

Materials

Weight

Symbols

DFDDFDD4035/EL/L

22° beam square downlight,
1 x 55W linear section

WH ☐ SG ☒

**CDM-T Metal Halide /
TC-L Compact Fluorescent**
c/w Pre-wired Electronic
Control Gear & CDM-T Lamps
(55w Fluorescent not supplied)

CDM-T: G12.
TC-L: 4-pin 2 G11.

4 x 35W
1 x 55W

Housing: Steel.
Bezel & Gimbal: Aluminium.
Reflector: Aluminium.

10.34kg



DFDDFDD4070/EL/L

22° beam square downlight,
1 x 55W linear section

WH ☐ SG ☒

**CDM-T Metal Halide /
TC-L Compact Fluorescent**
c/w Pre-wired Electronic
Control Gear & CDM-T Lamps
(55w Fluorescent not supplied)

CDM-T: G12.
TC-L: 4-pin 2 G11.

4 x 70W
1 x 55W

Housing: Steel.
Bezel & Gimbal: Aluminium.
Reflector: Aluminium.

10.82kg



DFDDFDD4150/EL/L

22° beam square downlight,
1 x 55W linear section

WH ☐ SG ☒

**CDM-T Metal Halide /
TC-L Compact Fluorescent**
c/w Pre-wired Electronic
Control Gear & CDM-T Lamps
(55w Fluorescent not supplied)

CDM-T: G12.
TC-L: 4-pin 2 G11.

4 x 150W
1 x 55W

Housing: Steel.
Bezel & Gimbal: Aluminium.
Reflector: Aluminium.

11.38kg



ADD Suffix to Code for following options:

/E Pre-wired to a remote emergency pack for the TC-L lamp

/ELDA 1-10V Analogue dimmable ballast (Metal Halide lamps dim down to 55% minimum).


dedicato a te



FRAMELIGHT

All the advantages of recessed Framelights in a complimentary suspended version.

- Multiple light sources
- Cable is height adjustable
- Integral control gear and transformers in all models

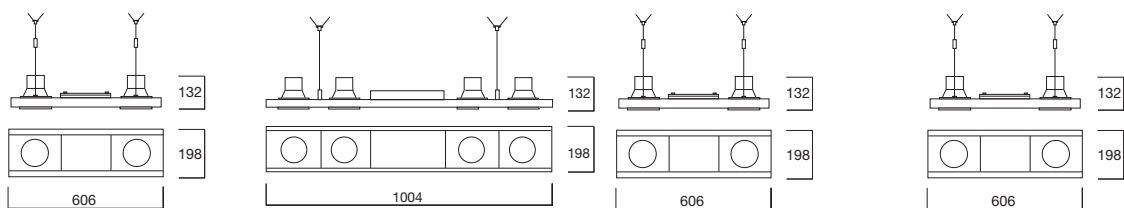

Part Code
Description

Finish
Lamp Type


Lamp cap
Wattage
Materials

Weight
Symbols

DFAS2/EL

Framelight 2 way
Suspended
SG ■

AR111 12V c/w Integral
Transformer



G53

2 x 100W max.


Housing: Aluminium
Bezel and Gimbal:
Aluminium
2.20kg



DFAS4/EL

Framelight 4 way
Suspended
SG ■

AR111 12V c/w Integral
Transformer



G53

4 x 100W max.

Housing: Aluminium
Bezel and Gimbal:
Aluminium
4.40kg



DFDS2035/C/EL/L

Framelight 2 way
Suspended
SG ■

CDM-T Metal Halide
c/w Control Gear and
Lamps



G12

2 X 35W

Housing: Aluminium
Bezel/ Gimbal/ Reflector:
Aluminium
2.71kg

DFDS2070/C/EL/L

Framelight 2 way
Suspended
SG ■

CDM-T Metal Halide
c/w Control Gear and
Lamps




G12

2 X 70W

Housing: Aluminium
Bezel/ Gimbal/ Reflector:
Aluminium
2.74kg


SUSPENDED



DFDS2150/C/EL/L
Framelight 2 way
Suspended
SG ■

CDM-T Metal Halide
c/w Control Gear and
Lamps
G12
2 x 150W


Housing: Aluminium
Bezel/ Gimbal/ Reflector:
Aluminium
2.74kg

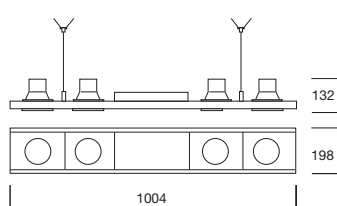

DFDS4035/C/EL/L
Framelight 4 way
Suspended
SG ■

CDM-T Metal Halide
c/w Control Gear and
Lamps
G12
4 x 35W


Housing: Aluminium
Bezel/ Gimbal/ Reflector:
Aluminium
5.10kg



DFDS4070/C/EL/L
Framelight 4 way
Suspended
SG ■

CDM-T Metal Halide
c/w Control Gear and
Lamps
G12
4 X 70W


Housing: Aluminium
Bezel/ Gimbal/ Reflector:
Aluminium
5.20kg

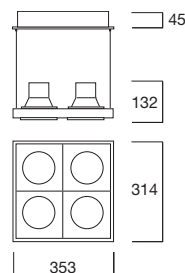

DFDS2X24035/C/EL/L
Framelight 2 x 2 way
Suspended
SG ■

CDM-T Metal Halide
c/w Control Gear and
Lamps
G12
4 X 35W (2 x 2 way)

Housing: Aluminium
Bezel/ Gimbal/ Reflector:
Aluminium
5.10kg

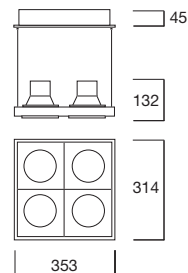

DFDS2X24070/C/EL/L
Framelight 2 x 2 way
Suspended
SG ■



CDM-T Metal Halide
c/w Control Gear and
Lamps
G12
4 X 70W (2 x 2 way)

Housing: Aluminium
Bezel/ Gimbal/ Reflector:
Aluminium
5.20kg

FRAMELIGHT

All the advantages of recessed Framelights in a complimentary suspended version with centre fluorescent

- Multiple light sources
- Cable is height adjustable
- Integral control gear and transformers in all models

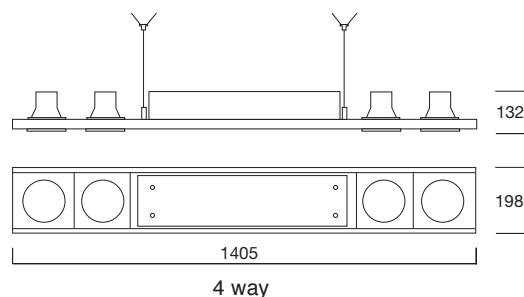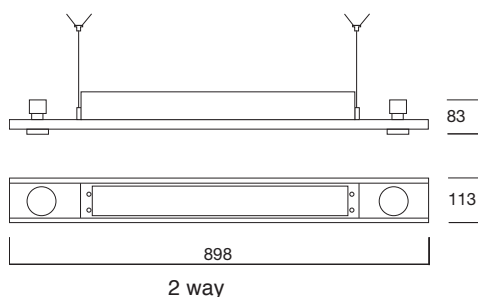

Part Code
Description

Finish
Lamp Type

Lamp cap
Wattage
Materials

Weight
Symbols

DFGXS2F55/EL

Framelight 2 way + Centre
Fluorescent. Suspended
SG ■

MR16 12V c/w Integral
Transformer



GX5.3 / GU5.3 + 4-pin 2G11
2 x 50W max + 55W TC-L

Housing: Aluminium
Bezel and Gimbal:
Aluminium

4.20kg



DFGXS4F55/EL

Framelight 4 way + Centre
Fluorescent. Suspended
SG ■

MR16 12V c/w Integral
Transformer



GX5.3 / GU5.3 + 4-pin 2G11
4 x 50W max + 55W TC-L

Housing: Aluminium
Bezel and Gimbal:
Aluminium

5.40kg



DFAS2F55/EL

Framelight 2 way + Centre
Fluorescent. Suspended
SG ■

AR111 12V
c/w Integral Transformer



G53 + 4-pin 2G11

2 X 100W max + 55W TC-L

Housing: Aluminium
Bezel and Gimbal:
Aluminium

6.20kg



DFAS4F55/EL

Framelight 4 way + Centre
Fluorescent. Suspended
SG ■

AR111 12V
c/w Integral Transformer



G53 + 4-pin 2G11

4 X 100W max + 55W TC-L

Housing: Aluminium
Bezel and Gimbal:
Aluminium

7.40kg



SUSPENDED



DFDS2035F55/C/EL/L

Framelight 2 way + Centre
Fluorescent. Suspended
SG ■

CDM-T Metal Halide

c/w Control Gear and CDM-T
Lamps (TC-L required)
G12 + 4-pin 2G11

2 x 35W + 55W TC-L

Housing: Aluminium
Bezel/ Gimbal/ Reflector:
Aluminium
6.41kg



DFDS2070F55/C/EL/L

Framelight 2 way + Centre
Fluorescent. Suspended
SG ■

CDM-T Metal Halide

c/w Control Gear and CDM-T
Lamps (TC-L required)
G12 + 4-pin 2G11

2 x 70W + 55W TC-L

Housing: Aluminium
Bezel/ Gimbal/ Reflector:
Aluminium
6.44kg



DFDS4035F55/C/EL/L

Framelight 4 way + Centre
Fluorescent. Suspended
SG ■

CDM-T Metal Halide

c/w Control Gear and CDM-T
Lamps (TC-L required)
G12 + 4-pin 2G11

4 x 35W + 55W TC-L

Housing: Aluminium
Bezel/ Gimbal/ Reflector:
Aluminium
7.80kg



DFDS4070F55/C/EL/L

Framelight 4 way + Centre
Fluorescent. Suspended
SG ■

CDM-T Metal Halide

c/w Control Gear and CDM-T
Lamps (TC-L required)
G12 + 4-pin 2G11

4 x 70W + 55W TC-L



Housing: Aluminium
Bezel/ Gimbal/ Reflector:
Aluminium
7.90kg



FRAME TRACK

An innovative spotlight system developed from the popular framelight range. This versatile fitting is ideal for retail applications where mobile products are essential to accent changing displays.

- Compatible with 3-circuit track
- Integral Control Gear
- Gimbal downlights fully adjustable $\pm 45^\circ$ pivot on two axes

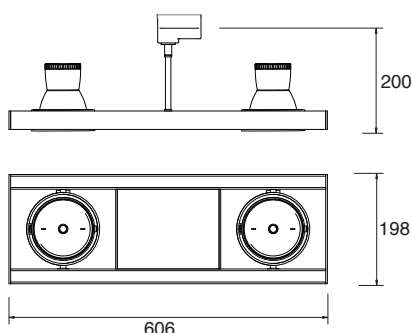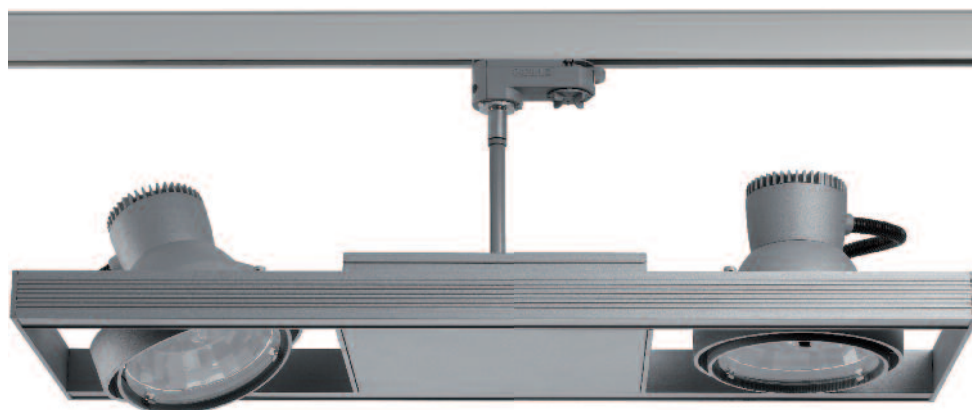

Part Code	TFDS2035/G3/L	TFDS2070/G3/L
Description	22° beam 2 way 3-circuit track mounted	22° beam 2 way 3-circuit track mounted
Finish	SG ■	SG ■
Lamp Type	CDM-T Metal Halide c/w Electronic Control Gear and Lamps	CDM-T Metal Halide c/w Electronic Control Gear and Lamps
Lamp Cap	G12	G12
Wattage	2 x 35W	2 x 70W
Materials	Housing: Aluminium Bezel: Aluminium Gimbal: Aluminium	Housing: Aluminium Bezel: Aluminium Gimbal: Aluminium
Weight	2.65kg	2.75kg

*Not suitable for wall mounting.




PROJECT 50

A range of aluminium micro downlights where discreet application is required. An ideal solution for low level, small retail displays, undercabinet and furniture applications.


- High output 700 mA 3W LEDs
- Clean and unobtrusive design
- Tension springs allow quick and easy installation




Open




Baffle



Gimbal



Cone



Part Code
Description
Part Code
Description
Finish
Lamp Type
Wattage
Materials
Weight
Symbols

D010312NW

Open Neutral White

D010312WW

Open Warm White

AB ■

LED c/w LEDs

**3W**

Aluminium

0.04kg

**D020312NW**

Baffle Neutral White

D020312WW

Baffle Warm White

AB ■

LED c/w LEDs

**3W**

Aluminium

0.05kg

**D030312NW**

Gimbal Neutral White

D030312WW

Gimbal Warm White

AB ■

LED c/w LEDs

**3W**

Aluminium

0.06kg

**D040312NW**

Cone Neutral White

D040312WW

Cone Warm White

AB ■

LED c/w LEDs

**3W**

Aluminium

0.07kg



Power supply

(Constant current 700mA)

PSL03700

1-3W Max

PSL12700

6-12W Max

PSL18700

10-18W Max

Splitter block

PSE6700(1000)700mA 6 way extension (1m lead) c/w 3 x **PSP700****PSE2700(1000)**

700mA 2 way extension (1m lead)

PSP700

1 x close-loop plug for 700mA

For further information, see page 218 - 219.

- LED heads come pre-wired as standard


- Easy plug and socket wiring

- Plug-in power supply connection

1



2



3




An evergreen design for the ultimate in simplicity with many diverse applications.


- Shallow recess depth
- Simple spring-loaded lamp change
- Leaf-spring fixing for quick and easy installation




LED Open




Open



Open with Disc Glass



LED Open

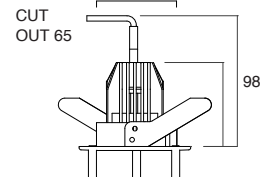

LED Open with Disc Glass

Part Code
Description


D1010

Open

Finish

 WH ☐ SG ☐ BL ☐
 CH ☐ BN ☐

Lamp Type
Lamp Cap
Wattage
Materials

PAR16 Mains

GU10

50W max.**PAR16 Mains**

GU10

50W max.**LED**

c/w LEDs and Power Supply

8W**LED**

c/w LEDs and Power Supply

8W

Weight

0.16kg

0.23kg

0.36kg

0.43kg

Symbols



illumaLED



illumaLED

Part Code
Description

D100X

Open

Finish

 WH ☐ SG ☐ BL ☐
 CH ☐ BN ☐
D100X/G10Open with Disc Glass,
55mmØ apertureWH ☐ CH ☐ BN ☐**DPC100X**WH ☐ CH ☐D100X pack including lamp
and transformer

Lamp Type

MR16 12VTransformer Required,
See page 218.**MR16 12V**Transformer Required,
See page 218.

Lamp Cap

GX5.3 / GU5.3

GX5.3 / GU5.3

Wattage

50W max.**50W max.**

Materials

Bezel: Diecast aluminium.

Bezel: Diecast aluminium.
Disc Glass: Glass.

Weight

0.15kg

0.22kg

Symbols

Emergency Packs available
See page 218 - 219Emergency Packs available
See page 218 - 219

Alternative
Finishes



Silver Grey



Black



Chrome



Brushed Nickel

Wiring: Connector box in accordance with BS EN 60598.

- Leaf springs for easy installation

- Leaf springs minimise damage to the ceiling.

1



2




A classic, shallow-depth downlight. Ideal for both highlighting and general lighting in retail, commercial and general interior applications.


- Gimbal $\pm 30^\circ$ pivot
- Simple spring-loaded lamp change
- Leaf-spring fixing for quick and easy installation




LED Gimbal



Gimbal




Pinhole



Baffle

Part Code
Description
Finish
Lamp Type
Lamp Cap
Wattage
Materials
Weight
Symbols

D1025Gimbal $\pm 30^\circ$ pivotWH ☐ SG ☐ BL ☐ CH ☐ BN ☐**PAR16 Mains**

GU10


50W max.

Bezel: Steel.
Gimbal: Diecast aluminium.

0.20kg

**D1051**

Pinhole

WH ☐ CH ☐ BN ☐**PAR16 Mains**

GU10


50W max.

Bezel: Steel.
Pinhole: Aluminium.

0.17kg

**D1020**

Black baffle

WH ☐**PAR16 Mains**

GU10

50W max.

Bezel: Steel.
Baffle: Diecast aluminium.

0.20kg



Part Code
Description
Finish
Lamp Type
Lamp Cap
Wattage
Materials
Weight
Symbols

D225XGimbal $\pm 30^\circ$ pivotWH ☐ SG ☐ BL ☐ CH ☐ BN ☐**MR16 12V**

Transformer Required, see page 218

GX5.3 / GU5.3

50W max.

Bezel: Steel.
Gimbal: Diecast aluminium.

0.19kg

Emergency Packs available
See page 218-219**D251X**

Pinhole

WH ☐ CH ☐ BN ☐**MR16 12V**

Transformer Required, see page 218

GX5.3 / GU5.3

50W max.

Bezel: Steel.
Pinhole: Aluminium.

0.16kg

Emergency Packs available
See page 218-219**D120X**

Black baffle

WH ☐**MR16 12V**

Transformer Required, see page 218


GX5.3 / GU5.3

50W max.

Bezel: Steel.
Baffle: Diecast aluminium.

0.19kg

Emergency Packs available
See page 218-219



LED Gimbal

D2250736WW/EL

LED Gimbal $\pm 30^\circ$ pivot Warm White
WH ☐ SG ☐ BL ☐ CH ☐ BN ☐


LED

c/w LEDs and Power Supply

8W



Bezel: Steel.
Gimbal: Diecast aluminium.
0.40kg

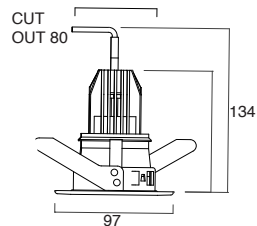

LED Black baffle

D1200736WW/EL

LED Black baffle Warm White
WH ☐

LED

c/w LEDs and Power Supply

8W



Bezel: Steel.
Baffle: Diecast aluminium.
0.40kg



Alternative Finishes



Silver Grey



Black



Chrome



Brushed Nickel





DPC225X WH ☐ CH ☐
D225X pack including lamp
and transformer

A range of miniature, shallow recess-depth downlights, ideal for both highlighting and general lighting in retail, commercial and interior applications.

- New illumaled technology
- Wallwash version adjustable
- Emergency packs available separately (see page 218 - 219)



Silver Cone



Part Code
Description

D1053

Wallwash 45° pivot
355° rotation

WH ☐ CH ☐ BN ☐

Finish

Lamp Type

Lamp Cap

Wattage

Materials

Weight

Symbols

PAR16 Mains Non-dichroic version only

GU10

50W max.



Bezel: Steel.

Wallwash: Steel.

0.28kg

**D1055**

White cone ±25° pivot

WH ☐

PAR16 Mains Non-dichroic version only

GU10

50W max.



Bezel: Steel.

Cone: Diecast aluminium.

0.24kg

**D1058**

Silver cone ±25° pivot

WH ☐ CH ☐ BN ☐

PAR16 Mains Non-dichroic version only

GU10

50W max.



Bezel: Steel.

Cone: Diecast aluminium.

0.24kg

**D1057**

Black baffle ±25° pivot

WH ☐ CH ☐ BN ☐

PAR16 Mains Non-dichroic version only

GU10

50W max.



Bezel: Steel.

Baffle: Diecast aluminium.

0.24kg



Part Code
Description

D253X

Wallwash 45° pivot
355° rotation

WH ☐ CH ☐ BN ☐

Finish

Lamp Type

Lamp Cap

Wattage

Materials

Weight

Symbols

MR16 12V Transformer Required.

See Page 218.

GX5.3 / GU5.3

50W max.



Bezel: Steel.

Wallwash: Steel.

0.29kg

Emergency Packs available
See page 218-219

D255X

White cone ±25° pivot

WH ☐

MR16 12V Transformer Required.

See Page 218.

GX5.3 / GU5.3

50W max.



Bezel: Steel.

Cone: Diecast aluminium.

0.23kg



Emergency Packs available
See page 218-219

D258X

Silver cone ±25° pivot

WH ☐ CH ☐ BN ☐

MR16 12V Transformer Required.

See Page 218.

GX5.3 / GU5.3

50W max.



Bezel: Steel.

Cone: Diecast aluminium.

0.23kg



Emergency Packs available
See page 218-219

D257X

Black baffle ±25° pivot

WH ☐ CH ☐ BN ☐

MR16 12V Transformer Required.

See Page 218.

GX5.3 / GU5.3

50W max.



Bezel: Steel.


Baffle: Diecast aluminium.

0.23kg



Emergency Packs available
See page 218-219

Wiring: Connector box in accordance with BS EN 60598.



118

LED Silver Cone

D2580736WW/EL

LED Silver Cone $\pm 25^\circ$ pivot
Warm White

WH ☐ CH ☐ BN ☐

LED

c/w LEDs and Power Supply

n/a


8W



Bezel: Steel.

Cone: Diecast aluminium.

0.44kg



118

LED Cone Baffle

D2570736WW/EL

LED Cone Baffle $\pm 25^\circ$ pivot
Warm White

WH ☐ CH ☐ BN ☐

LED

c/w LEDs and Power Supply

n/a

8W



Bezel: Steel.

Baffle: Diecast aluminium.

0.44kg



Alternative Finishes



Chrome



Brushed Nickel

PROJECT PAR

A versatile yet simple lighting instrument for general downlighting purposes.



- Easily dimmable
- Tension springs provide quick & easy installation




LED Open




Open



Black Baffle



Cone



Part Code
Description
Finish
Lamp Type
Lamp Cap
Wattage
Materials
Weight

D330

Open

WH ☐

PAR30 Mains

E27

100W max. 10° 30°

Bezel: Steel

0.25kg

D637

Black baffle

WH ☐

PAR30 Mains

E27

100W max. 10° 30°

Bezel: Steel
Baffle: Aluminium

0.36kg

D638

Silver cone

WH ☐

PAR30 Mains

E27

100W max. 10° 30°

Bezel: Steel
Reflector: Aluminium

0.34kg



Non-dichroic
version only




Non-dichroic
version only




Non-dichroic
version only

Wiring: Connector box in accordance with BS EN 60598.



LED Open



D330/LED/L

Open LED

WH ☐

PAR30 LED c/w Lamp


E27

11W


Bezel: Steel

0.57kg

illumaled



Black Baffle



D637/LED/L

Black baffle LED

WH ☐

PAR30 LED c/w Lamp

E27

11W

Bezel: Steel


Baffle: Aluminium

0.68kg

illumaled



Cone



D638/LED/L

Silver cone LED

WH ☐

PAR30 LED c/w Lamp

E27

11W

Bezel: Steel

Reflector: Aluminium

0.64kg

illumaled


PROJECT LED PACKS

A classic range of downlights now available in LED packs. Ideal for both highlighting and general lighting in retail, commercial and general interior applications.

- 4 downlights per pack • Supplied complete with four way junction box, cables and power supply
- 8W high output LED in Warm White.



Project 95 LED Gimbal

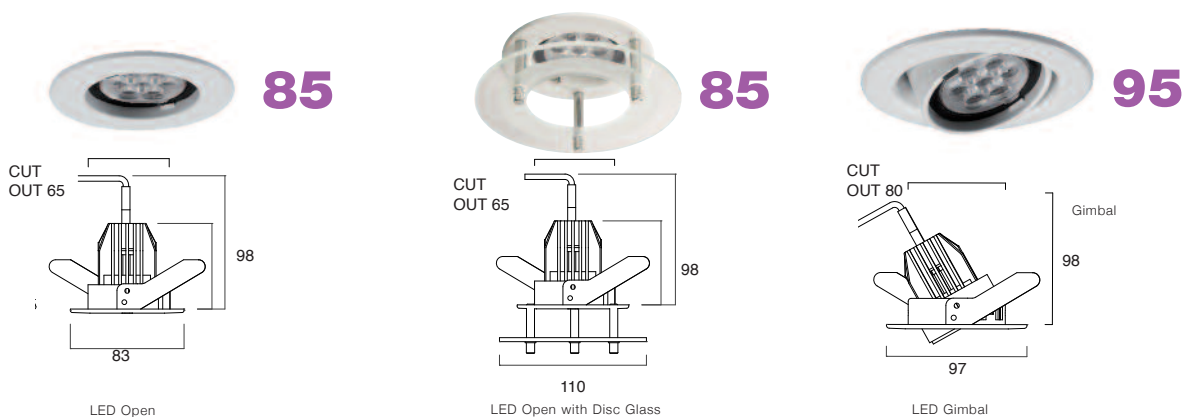

LED Open

LED Open with Disc Glass

LED Gimbal

Part Code
Description

DP1000736WW/EL
4 x Project 85 LED Open, Warm White c/w 4 way junction box, cables and power supply.

DP1000736WW/G10/EL
4 x Project 85 LED Open with disc glass, Warm White c/w 4 way junction box, cables and power supply.

DP2250736WW/EL
4 x Project 95 LED Gimbal $\pm 30^\circ$, Warm White c/w 4 way junction box, cables and power supply.

Finish

WH ☐

WH ☐

WH ☐

Lamp Type

LED

LED

LED

Lamp Cap

c/w LEDs

c/w LEDs

c/w LEDs

Wattage

8W

8W

8W

Materials

Bezel: Diecast aluminium.

Bezel: Diecast aluminium.

Bezel: Steel

Weight

0.36kg per unit

0.43kg per unit

0.40kg per unit

Symbols


☐ illumaLED

☐ illumaLED

☐ illumaLED



95



LED Black Baffle

DP1200736WW/EL

4 x Project 95 LED Black baffle, Warm White c/w 4 way junction box, cables and power supply.

WH ☐

LED

c/w LEDs



8W


Bezel: Steel

Baffle: Diecast aluminium.

0.40kg per unit



115



LED Silver Cone

DP2580736WW/EL

4 x Project 115 LED Silver Cone, $\pm 25^\circ$ pivot, Warm White c/w 4 way junction box, cables and power supply.

WH ☐

LED

c/w LEDs



8W


Bezel: Steel

Cone: Diecast aluminium.

0.44kg per unit



115



LED Cone Baffle

DP2570736WW/EL

4 x Project 115 LED Cone baffle, $\pm 25^\circ$ pivot, Warm White c/w 4 way junction box, cables and power supply.

WH ☐

LED

c/w LEDs



8W

Bezel: Steel

Baffle: Diecast aluminium

0.44kg per unit



QUADRATO

Stylish design featuring a contemporary brushed aluminium finish, available in two lamp types. Ideal for multiple commercial, leisure and retail applications.




- Machined from a solid aluminium plate
- Supplied complete with control gear



CDM-TC



TCT-DEL Compact Fluorescent



Part Code	DS9852486/EL	DSHQ60353/EL/L	DSHQ60703/EL/L
Description	Quadrato CFL	Quadrato CDM-TC	Quadrato CDM-TC
Finish	AB ■	AB ■	AB ■
Lamp Type	TC-TEL Compact Fluorescent	CDM-TC Metal Halide c/w Lamp	CDM-TC Metal Halide c/w Lamp
Lamp Cap	GX24q-3	G8.5	G8.5
Wattage	2 x 26 / 32 / 42W	35W	70W
Materials	Housing: Steel Bezel: Aluminium	Housing: Steel Bezel: Aluminium	Housing: Steel Bezel: Aluminium
Weight	2.08kg	0.63kg	0.75kg
Symbols	Emergency Packs available See page 218-219	Emergency Packs available See page 218-219	Emergency Packs available See page 218-219



ARC 111

**Fully adjustable model provides 60° pivot and 355° rotation.
Easy orientation for accent applications.**

- Ideal for leisure, retail and commercial applications, particularly where illumination of vertical surfaces is important
- Diecast aluminium housing pulls down for easy lamp change.



White




Silver Grey



Chrome



Brushed Nickel



Part Code	D226X
Description	ARC111
Finish	WH ☐ SG ☐ CH ☐ BN ☐
Lamp Type	MR16 12V 
Lamp Cap	Transformer Required, see page 218
Wattage	GX5.3 / GU5.3 50W max.    
Materials	Housing and Bezel: Diecast aluminium
Weight	0.30kg
Symbols	

Wiring: Connector box in accordance with BS EN 60598.



ARC 145

Sealed with a toughened safety glass.

Fully adjustable - provides 65° pivot and 355° rotation.

- All versions dimmable to 55% with ELDA gear
- Tension springs provide quick and easy installation




20° beam



20° beam



45° beam



Part Code
Description
Finish
Lamp Type
Lamp Cap
Wattage
Materials
Weight

DHQMS020/C/EL/L

20° beam

WH ☐ SG ☐ BL ☐

CDM-TC Metal Halide
c/w Pre-wired Electronic
Control Gear & Lamp

G8.5

20W

Housing and Bezel: Diecast aluminium
0.73kg

Wiring: Connector box in accordance with BS EN 60598.

ADD Suffix to Code for following options:

DHQMF020/C/EL/L

45° beam

WH ☐ SG ☐ BL ☐

CDM-TC Metal Halide
c/w Pre-wired Electronic
Control Gear & Lamp

G8.5

20W

Housing and Bezel: Diecast aluminium
0.73kg

/PS Plug & Socket

/ELDA 1-10V Analogue dimmable ballast
(for dimming down to 55% minimum)

DHQMS035/C/EL/L

20° beam

WH ☐ SG ☐ BL ☐

CDM-TC Metal Halide
c/w Pre-wired Electronic
Control Gear & Lamp

G8.5

35W

Housing and Bezel: Diecast aluminium
0.94kg



DHQMFO35/C/EL/L

45° beam

WH ☐ SG ☐ BL ☒

CDM-TC Metal Halide

c/w Pre-wired Electronic

Control Gear & Lamp

G8.5

35W

Housing and Bezel: Diecast aluminium
0.94kg



DHQMS070/C/EL/L

20° beam

WH ☐ SG ☐ BL ☒

CDM-TC Metal Halide

c/w Pre-wired Electronic

Control Gear & Lamp

G8.5

70W

Housing and Bezel: Diecast aluminium
1.06kg



DHQMFO70/C/EL/L

45° beam

WH ☐ SG ☐ BL ☒

CDM-TC Metal Halide

c/w Pre-wired Electronic

Control Gear & Lamp

G8.5

70W


Housing and Bezel: Diecast aluminium
1.06kg



ARC 183

A versatile directional solution for various retail and commercial applications. Provides 60° pivot and 355° rotation.

- Metal halide versions dimmable to 55% with ELDA gear for energy saving



Part Code	DX626	DHQAS035/C/EL/L	DHQAF035/C/EL/L	DHQAS070/C/EL/L
Description	Arc 183	Arc 183 24° beam	Arc 183 45° beam	Arc 183 24° beam
Finish	WH ☐ SG ☐ BL ☐	WH ☐ SG ☐ BL ☐	WH ☐ SG ☐ BL ☐	WH ☐ SG ☐ BL ☐
Lamp Type	AR111 12V Transformer Required.  See Page 218.	CDM-T Metal Halide c/w Pre-Wired Electronic Gear & Lamp. 	CDM-T Metal Halide c/w Pre-Wired Electronic Gear & Lamp. 	CDM-T / HQI-T Metal Halide c/w Pre-Wired Electronic Gear & Lamp. 
Lamp Cap	G53	G12	G12	G12
Wattage	100W max.    	35W 	35W 	70W 
Materials	Housing and Bezel: Diecast aluminium. Reflector: Aluminium.	Housing and Bezel: Diecast aluminium. Reflector: Aluminium.	Housing and Bezel: Diecast aluminium. Reflector: Aluminium.	Housing and Bezel: Diecast aluminium. Reflector: Aluminium.
Weight	1.00kg	1.21kg	1.21kg	1.33kg

Wiring: Connector box in accordance with BS EN 60598.

ADD Suffix to Code: /U UV Stop Glass /PS Plug & Socket /ELDA 1-10V Analogue dimmable ballast
(Metal Halide versions dim down to 55% minimum)



DHQAF070/C/EL/L

Arc 183 45° beam

WH ☐ SG ☒ BL ☒

CDM-T / HQI-T Metal Halide

c/w Pre-Wired Electronic Gear & Lamp.

G12

70W



Housing and Bezel:
Diecast aluminium.
Reflector: Aluminium.
1.33kg

DHQAS150/C/EL/L

Arc 183 24° beam

WH ☐ SG ☒ BL ☒

CDM-T / HQI-T Metal Halide

c/w Pre-Wired Electronic Gear & Lamp.

G12

150W



Housing and Bezel:
Diecast aluminium.
Reflector: Aluminium.
1.47kg

DHQAF150/C/EL/L

Arc 183 45° beam

WH ☐ SG ☒ BL ☒

CDM-T / HQI-T Metal Halide

c/w Pre-Wired Electronic Gear & Lamp.

G12

150W



Housing and Bezel:
Diecast aluminium.
Reflector: Aluminium.
1.47kg

HIGHLUX 100

IP44 Miniature, diecast aluminium downlights with energy efficient discharge lamps and decorative versions. Suitable for diverse retail, leisure and commercial sector schemes.


- Discreet 100mm diameter bezel
- Suitable for shallow recess depths
- Electronic gear for extended lamp life



Clear Glass



Disc Glass



Clear Glass



Central Frost Glass



Frosted Glass

Part Code	DHQ50201/C/EL/L	DHQ50202/C/EL/L	DHQ50203/C/EL/L
Description	IP44 Clear glass	IP44 Central frost glass	IP44 Frosted glass
Finish	WH ☐ SG ☒	WH ☐ SG ☒	WH ☐ SG ☒
Lamp Type	CDM-Tm Metal Halide c/w Pre-wired Electronic Control Gear and Lamp 	CDM-Tm Metal Halide c/w Pre-wired Electronic Control Gear and Lamp 	CDM-Tm Metal Halide c/w Pre-wired Electronic Control Gear and Lamp 
Lamp Cap	PGJ5	PGJ5	PGJ5
Wattage	20W	20W	20W
Materials	Housing and Bezel: Diecast aluminium. Reflector: Aluminium.	Housing and Bezel: Diecast aluminium. Reflector: Aluminium.	Housing and Bezel: Diecast aluminium. Reflector: Aluminium.
Weight	0.41kg	0.41kg	0.41kg
Symbols			

Wiring: Connector box in accordance with BS EN 60598.

ADD Suffix to Code for following options: /ELDA 1-10V Analogue dimmable ballast
(for dimming down to 55% minimum)

- Simply twist to remove cover.

- Easy lamp change.

- Twist to replace cover.


1



2



3



Disc Glass

DHQ50204/C/EL/L

IP44 Disc glass

WH ☐ SG ☒

CDM-Tm Metal Halide

c/w Pre-wired Electronic Control Gear and Lamp

PGJ5

20W

Housing and Bezel: Diecast aluminium. Reflector: Aluminium.

0.41kg



Frosted Ring

DHQ50205/C/EL/L

IP44 Frosted ring

WH ☐ SG ☒

CDM-Tm Metal Halide

c/w Pre-wired Electronic Control Gear and Lamp

PGJ5

20W

Housing and Bezel: Diecast aluminium. Reflector: Aluminium.

0.41kg



HIGHLUX 130

IP44 A range of compact, diecast aluminium, energy efficient discharge lamp downlights with decorative versions for general commercial interior projects.


- Compact 130mm diameter
- Electronic control gear for extended lamp life and lumen maintenance



Clear Glass



Disc Glass



Clear Glass



Central Frost Glass



Frosted Glass

Part Code	DHQ60351/C/EL/L	DHQ60352/C/EL/L	DHQ60353/C/EL/L
Description	IP44 Clear glass	IP44 Central frost glass	IP44 Frosted glass
Finish	WH ☐ SG ☒	WH ☐ SG ☒	WH ☐ SG ☒
Lamp Type	CDM-T Metal Halide c/w Pre-wired Electronic Control Gear and Lamp	CDM-T Metal Halide c/w Pre-wired Electronic Control Gear and Lamp	CDM-T Metal Halide c/w Pre-wired Electronic Control Gear and Lamp
Lamp Cap	G12	G12	G12
Wattage	35W	35W	35W
Materials	Housing and Bezel: Diecast aluminium. Reflector: Aluminium.	Housing and Bezel: Diecast aluminium. Reflector: Aluminium.	Housing and Bezel: Diecast aluminium. Reflector: Aluminium.
Weight	0.85kg	0.85kg	0.85kg
Symbols			

Wiring: Connector box in accordance with BS EN 60598.

ADD Suffix to Code for following options: /ELDA 1-10V Analogue dimmable ballast
(for dimming down to 55% minimum)



Disc Glass

DHQ60354/C/EL/L

IP44 Disc glass

WH ☐ SG ☒

CDM-T Metal Halide

c/w Pre-wired Electronic
Control Gear and Lamp

G12

35W

Housing and Bezel: Diecast
aluminium. Reflector: Aluminium.
0.85kg



Frosted Ring

DHQ60355/C/EL/L

IP44 Frosted ring

WH ☐ SG ☒

CDM-T Metal Halide

c/w Pre-wired Electronic
Control Gear and Lamp

G12

35W

Housing and Bezel: Diecast
aluminium. Reflector: Aluminium.
0.85kg



HIGHLUX 195

A range of high output energy efficient discharge downlights. Includes wattages suitable for higher ceiling areas in retail, leisure and commercial applications.


- Supplied complete with control gear and lamp
- Dimmable to 55%
- Range of various wattages




Double ended 30° beam




Single ended 13° beam



Single-Ended



Single-Ended



Single-Ended


Part Code	DHQS70356/C/EL/L	DHQS70706/C/EL/L	DHQS71506/C/EL/L
Description	13° beam IP44 Single-ended lamp	13° beam IP44 Single-ended lamp	13° beam IP44 Single-ended lamp
Finish	WH ☐ SG ☒	WH ☐ SG ☒	WH ☐ SG ☒
Lamp Type	CDM-T Metal Halide c/w Pre-wired Electronic Control Gear and Lamp	CDM-T Metal Halide c/w Pre-wired Electronic Control Gear and Lamp	CDM-T Metal Halide c/w Pre-wired Electronic Control Gear and Lamp
Lamp Cap	G12	G12	G12
Wattage	35W	70W	150W
Materials	Bezel: Steel Reflector: Aluminium	Bezel: Steel Reflector: Aluminium	Bezel: Steel Reflector: Aluminium
Weight	0.91kg	1.03kg	1.17kg
Symbols			

Wiring: BS EN 60598 enables compliance with IEE Wiring Regulations.

ADD Suffix to Code: /U UV Stop Glass /PS Plug & Socket /ELDA 1-10V Analogue dimmable ballast (for dimming down to 55% minimum)



Min. recess depth: 160mm



Double-Ended

DHQ70706/C/EL/L

30° beam IP44 Double-ended lamp

WH ☐ SG ☒

CDM-TD Metal Halide c/w Pre-wired
Electronic Control Gear and Lamp

Rx7s


70W



Bezel: Steel
Reflector: Aluminium
1.03kg



Min. recess depth: 160mm



Double-Ended

DHQ71506/C/EL/L

30° beam IP44 Double-ended lamp

WH ☐ SG ☒

CDM-TD Metal Halide c/w Pre-wired
Electronic Control Gear and Lamp

Rx7s


150W



Bezel: Steel
Reflector: Aluminium
1.17kg



Min. recess depth: 220mm



Single-Ended

DWSS100/C/EL/L

13° beam IP44 Single-ended lamp

WH ☐ SG ☒

SDW-TG White SON c/w Pre-wired
Electronic Control Gear and Lamp

GX12-1

100W




Bezel: Steel
Reflector: Aluminium
1.00kg



An essential solution for orientation and general lighting applications.

- Discreet diameter
- Tension springs allow ease of installation
- High frequency gear
- Available in IP65, see page 120 - 121



Part Code	D64TC1369S/EL	D64TC1869S/EL
Description	IP20 Polished silver reflector	IP20 Polished silver reflector
Finish	WH ☐	WH ☐
Lamp Type	TC-DEL Compact Fluorescent c/w Integral Electronic Control Gear 	TC-DEL Compact Fluorescent c/w Integral Electronic Control Gear 
Lamp Cap	4-pin G24q-1	4-pin G24q-2
Wattage	13W	18W
Materials	Bezel: Polycarbonate. Reflector: Super-pure aluminium.	Bezel: Polycarbonate. Reflector: Super-pure aluminium.
Weight	0.48kg	0.48kg
Symbols	☐ 	☐ 

Wiring: Connector box in accordance with BS EN 60598.

ADD Suffix to Code for following options:

- /E Made to order pre-wired to a remote emergency pack
- /ELDA 1-10V Analogue dimmable ballast
- /ELDD Digital dimmable/Switch DIM




IP44 rated moisture and particle ingress protection.


- Dimmable versions
- Tension springs allow easy installation
- Fresnel lens for even light distribution
- Also available IP65, see page 122 - 123



White Reflector
Fresnel Lens

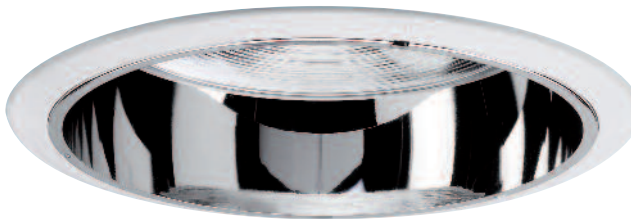

Silver Reflector
Fresnel Lens

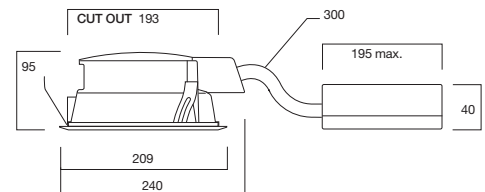

Part Code	D85185/EL	D85186/EL	D86185/EL
Description	IP44 White Reflector, Fresnel lens	IP44 Silver Reflector, Fresnel lens	IP44 White Reflector, Fresnel lens
Finish	WH □	WH □	WH □
Lamp Type	TC-SEL Compact Fluorescent	TC-SEL Compact Fluorescent	TC-DEL Compact Fluorescent
	c/w Remote Electronic Control Gear	c/w Remote Electronic Control Gear	c/w Remote Electronic Control Gear
Lamp Cap	4-pin 2G7	4-pin 2G7	4-pin G24q-2
Wattage	2 x 7W / 9W	2 x 7W / 9W	1 x 18W
Materials	Bezel, Lens & Housing: UV stable flame retardant polycarbonate.	Bezel, Lens & Housing: UV stable flame retardant polycarbonate.	Bezel, Lens & Housing: UV stable flame retardant polycarbonate.
Weight	0.90kg	0.90kg	0.90kg
Symbols			
Part Code	D86186/EL	D86265/EL	D86266/EL
Description	IP44 Silver Reflector, Fresnel lens	IP44 White Reflector, Fresnel lens	IP44 Silver Reflector, Fresnel lens
Finish	WH □	WH □	WH □
Lamp Type	TC-DEL Compact Fluorescent	TC-DEL Compact Fluorescent	TC-DEL Compact Fluorescent
	c/w Remote Electronic Control Gear	c/w Remote Electronic Control Gear	c/w Remote Electronic Control Gear
Lamp Cap	4-pin G24q-2	4-pin G24q-3	4-pin G24q-3
Wattage	1 x 18W	1 x 26W	1 x 26W
Materials	Bezel, Lens & Housing: UV stable flame retardant polycarbonate.	Bezel, Lens & Housing: UV stable flame retardant polycarbonate.	Bezel, Lens & Housing: UV stable flame retardant polycarbonate.
Weight	0.90kg	1.00kg	1.00kg
Symbols			

Wiring: Connector box in accordance with BS EN 60598.

ADD Suffix to Code for following options: /E Made to order pre-wired to a remote emergency pack.

/ELDA 1-10V Analogue dimmable ballast. /ELDD Digital dimmable/Switch DIM.

**D87365/EL**

IP44 White Reflector,
Fresnel lens
WH ☐

TC-DEL Compact Fluorescent
c/w Remote Electronic 
Control Gear
4-pin G24q-2
2 x 18W

Bezel, Lens & Housing:
UV stable flame retardant
polycarbonate.
1.00kg

**D87366/EL**

IP44 Silver Reflector,
Fresnel lens
WH ☐

TC-DEL Compact Fluorescent
c/w Remote Electronic 
Control Gear
4-pin G24q-2
2 x 18W

Bezel, Lens & Housing:
UV stable flame retardant
polycarbonate.
1.00kg

**D87525/EL**

IP44 White Reflector,
Fresnel lens
WH ☐

TC-DEL Compact Fluorescent
c/w Remote Electronic 
Control Gear
4-pin G24q-3
2 x 26W

Bezel, Lens & Housing:
UV stable flame retardant
polycarbonate.
1.00kg

**D87526/EL**

IP44 Silver Reflector,
Fresnel lens
WH ☐


TC-DEL Compact Fluorescent
c/w Remote Electronic 
Control Gear
4-pin G24q-3
2 x 26W

Bezel, Lens & Housing:
UV stable flame retardant
polycarbonate.
1.00kg



Simplicity of virtual design, excellent performance from a single CFL lamp and choice of models.

- High frequency Multi wattage ballast
- Range of finishes and covers

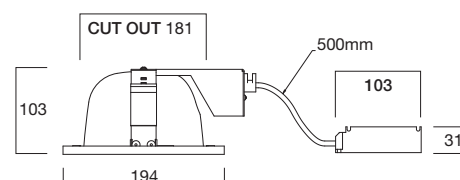

Open Rim



Semi Frosted Glass



Centre Cone / Frosted Diffuser



Turbo Louvre

Part Code	D7826421/EL	D7826422/EL	D7826423/EL	D7826424/EL
Description	Open Rim	Semi frosted glass IP44	Centre cone / frost diffuser	Turbo louvre
Finish	WH ☐ SG ☒	WH ☐ SG ☒	WH ☐ SG ☒	WH ☐ SG ☒
Lamp Type	TC-TEL Compact Fluorescent			
Lamp Cap	c/w Pre-wired Electronic Control Gear	c/w Pre-wired Electronic Control Gear	c/w Pre-wired Electronic Control Gear	c/w Pre-wired Electronic Control Gear
Wattage	4-pin GX24q-3	4-pin GX24q-3	4-pin GX24q-3	4-pin GX24q-3
Materials	1 x 26 / 32 / 42W	1 x 26 / 32 / 42W	1 x 26 / 32 / 42W	1 x 26 / 32 / 42W
Weight	Housing: Steel. Bezel: Diecast aluminium. Reflector: Aluminium.	Housing: Steel. Bezel: Diecast aluminium. Reflector: Aluminium.	Housing: Steel. Bezel: Diecast aluminium. Reflector: Aluminium.	Housing: Steel. Bezel: Diecast aluminium. Reflector: Aluminium.
Symbols	0.80kg	0.90kg	0.95kg	0.90kg

Wiring: Connector box in accordance with BS EN 60598.

ADD Suffix to Code for following options: /E Made to order pre-wired to a remote emergency pack.

/ELDA can be made to order 1 - 10V Analogue dimmable ballast

/ELDD can be made to order Digital dimmable/ Switch dim



Clear Glass

D7826420/EL

Clear Glass

WH ☐ SG ☒

TC-TEL Compact Fluorescent

c/w Pre-wired Electronic
Control Gear

4-pin GX24q-3

1 x 26 / 32 / 42W

Housing: Steel.

Bezel: Diecast aluminium.

Reflector: Aluminium.

0.90kg



Floating Glass

D7826426/EL

Floating Glass

WH ☐ SG ☒

TC-TEL Compact Fluorescent

c/w Pre-wired Electronic
Control Gear

4-pin GX24q-3

1 x 26 / 32 / 42W

Housing: Steel.

Bezel: Diecast aluminium.

Reflector: Aluminium.

0.95kg



Frosted Ring

D7826427/EL

Frosted Ring IP44

WH ☐ SG ☒

TC-TEL Compact Fluorescent

c/w Pre-wired Electronic
Control Gear

4-pin GX24q-3

1 x 26 / 32 / 42W

Housing: Steel.

Bezel: Diecast aluminium.

Reflector: Aluminium.

0.90kg



A double lamp companion model to the Unilux Eco with a higher lumen package and added application types.

- High frequency ballast
- Emergency versions
- Removable trim for easy installation
- Remote Electronic Control Gear
- TC-TEL has multi wattage ballast



Open



Clear Glass IP44



Open Rim



Semi Frosted Glass

Centre Cone /
Frosted Diffuser

Turbo Louvre

Part Code	D88360/EL	D88361/EL	D88362/EL	D88363/EL	D88364/EL
Description	Clear Glass IP44	Open	Semi Frosted Glass IP44	Centre Cone / Frosted Diffuser	Turbo Louvre
Lamp type	TC-DEL CFL	TC-DEL CFL	TC-DEL CFL	TC-DEL CFL	TC-DEL CFL
Lamp Cap	G24q-2	G24q-2	G24q-2	G24q-2	G24q-2
Wattage	2 x 18W	2 x 18W	2 x 18W	2 x 18W	2 x 18W
Part Code	D88520/EL	D88521/EL	D88522/EL	D88523/EL	D88524/EL
Description	Clear Glass IP44	Open	Semi Frosted Glass IP44	Centre Cone / Frosted Diffuser	Turbo Louvre
Lamp type	TC-DEL CFL	TC-DEL CFL	TC-DEL CFL	TC-DEL CFL	TC-DEL CFL
Lamp Cap	G24q-3	G24q-3	G24q-3	G24q-3	G24q-3
Wattage	2 x 26W	2 x 26W	2 x 26W	2 x 26W	2 x 26W
Part Code	D9852840/EL	D9852841/EL	D9852842/EL	D9852843/EL	D9852844/EL
Description	Clear Glass IP44	Open	Semi Frosted Glass IP44	Centre Cone / Frosted Diffuser	Turbo Louvre
Lamp type	TC-TEL CFL	TC-TEL CFL	TC-TEL CFL	TC-TEL CFL	TC-TEL CFL
Lamp Cap	4-pin GX24q-3	4-pin GX24q-3	4-pin GX24q-3	4-pin GX24q-3	4-pin GX24q-3
Wattage	2 x 26 / 32 / 42W	2 x 26 / 32 / 42W	2 x 26 / 32 / 42W	2 x 26 / 32 / 42W	2 x 26 / 32 / 42W
Finish	WH ☐ SG ☒	WH ☐ SG ☒	WH ☐ SG ☒	WH ☐ SG ☒	WH ☐ SG ☒
Materials	Housing / Bezel / Lens: Polycarbonate	Housing / Bezel / Lens: Polycarbonate	Housing / Bezel / Lens: Polycarbonate	Housing / Bezel / Lens: Polycarbonate	Housing / Bezel / Lens: Polycarbonate
Weight	1.15kg / 1.35kg	1.00kg / 1.20kg	1.15kg / 1.35kg	1.20kg / 1.40kg	1.15kg / 1.35kg
Symbols					

Control Gear: c/w Remote Electronic Control Gear

Wiring: Connector box in accordance with BS EN 60598.

ADD Suffix to Code for following options: /E Made to order pre-wired to a remote emergency pack.

/ELDA can be made to order 1 - 10V Analogue dimmable ballast

/ELDD can be made to order Digital dimmable/ Switch dim

- Simply twist to remove cover.

- Easy lamp change.

- Twist to replace cover.


1




2




3

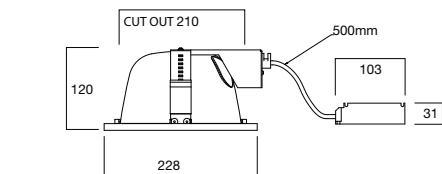


(a) **D88 Series:** TC-DEL Compact Fluorescent

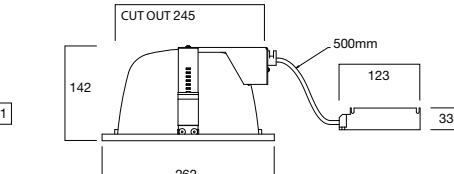


(b) **D98 Series:** TC-TEL Compact Fluorescent

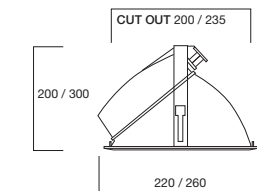

(d) **DW Series:** TC-DEL CFL Wallwasher



(e) Surface Mounted

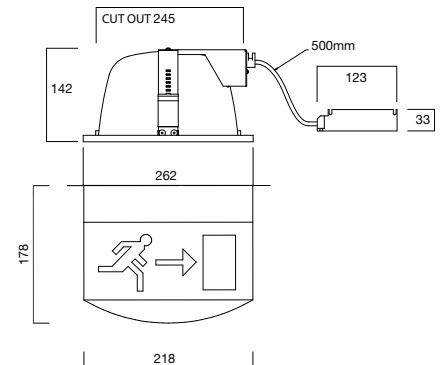

(c) Emergency Exit Sign



Floating Glass

D88366/EL
Floating Glass

TC-DEL CFL
G24q-2
2 x 18W



Frosted Ring IP44

D88367/EL
Frosted Ring
IP44

TC-DEL CFL
G24q-2
2 x 18W



Wallwasher

D88526/EL
Floating Glass

TC-DEL CFL
G24q-3
2 x 26W

D88527/EL
Frosted Ring
IP44

TC-DEL CFL
G24q-3
2 x 26W

DW78261/EL
Wallwasher

TC-DEL CFL
G24q-1
2 x 13W



Emergency Exit



Surface Mounted

D9852846/EL
Floating Glass

TC-TEL CFL
4-pin GX24q-3
2 x 26 / 32 / 42W

D9852847/EL
Frosted Ring
IP44

TC-TEL CFL
4-pin GX24q-3
2 x 26 / 32 / 42W

DW98521/EL
Wallwasher

TC-DEL CFL
G24q-3
2 x 26W

D9852845/EL/E
Emergency Exit Sign
c/w legend kit

TC-TEL CFL
4-pin GX24q-3
2 x 26 / 32 / 42W

D88521S/EL
Surface Mounted, Clear Glass

TC-DEL CFL
G24q-3
2 x 26W

WH □ SG ■
Housing / Bezel /
Lens: Polycarbonate
1.20kg / 1.40kg



WH □ SG ■
Housing / Bezel /
Lens: Polycarbonate
1.20kg / 1.40kg



WH □ SG ■
Housing / Bezel /
Lens: Polycarbonate
1.60kg / 1.70kg



WH □ SG ■
Housing / Bezel /
Lens: Polycarbonate
1.50kg



WH □
Housing / Bezel /
Lens: Polycarbonate
1.81kg




OPAZ 300

An innovative and stylish dual lighting solution. Whilst the outer diffuser ring provides soft ambient lighting, the heart of OPAZ 300 offers a variety of lamp types for a more intense illumination.

- Available with dimmable gear and emergency versions.
- Quick-fit ceiling clamps for ease of maintenance.



CUT OUT 280

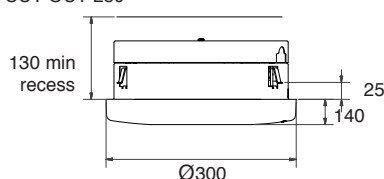

Opaz requires a **1 x 22W T5C** long life compact lamp, which sits inside the external diffuser ring. There is then a choice of three central lamp types. All metal halide options are supplied complete with lamp, however the compact fluorescent lamps are not supplied and need to be bought separately.



Part Code
Description

Finish
Lamp Type

Lamp cap
Wattage
Materials

Weight
Symbols

DZ3TF220/EL

IP20 Metal Halide
Dual circuit

WH ☐

CDM-Tf Metal Halide,
Integral Control Gear,
c/w CDM-Tf Lamp
GU6.5

1 x 20W / 1 x 22W T5C

Housing: Powder
coated, mild steel
Lense: Opal,
Polycarbonate
Reflector: Aluminium
Fixing clamps: Zinc-
plated steel

2.20kg



DZ3TF235/EL

IP20 Metal Halide
Dual circuit

WH ☐

CDM-Tf Metal Halide,
Integral Control Gear,
c/w CDM-Tf Lamp
GU6.5

1 x 35W / 1 x 22W T5C

Housing: Powder
coated, mild steel
Lense: Opal,
Polycarbonate
Reflector: Aluminium
Fixing clamps: Zinc-
plated steel

2.20kg



DZ3CT235/EL

IP20 Metal Halide
Dual circuit

WH ☐

CDM-T Metal Halide,
Integral Control Gear,
c/w CDM-T Lamp
G12

1 x 35W / 1 x 22W T5C

Housing: Powder
coated, mild steel
Lense: Opal,
Polycarbonate
Reflector: Aluminium
Fixing clamps: Zinc-
plated steel

2.70kg



DZ3TT226/EL

IP20 CFL
Dual circuit

WH ☐

**TCT-EL Compact
Fluorescent**, Integral
Control Gear,
GX24q-3

1 x 26W / 1 x 22W T5C

Housing: Powder coated,
mild steel
Lense: Opal,
Polycarbonate
Reflector: Aluminium
Fixing clamps: Zinc-
plated steel

2.10kg



ADD Suffix to Code for following options: /E Made to order pre-wired to a remote emergency pack.

/ELDA can be made to order 1 - 10V Analogue dimmable ballast



/ELDD can be made to order Digital dimmable/ Switch dim

- Easy to wire

- After wiring, replace back cover

- Simply insert into the ceiling


- Screw in place.



UNISEAL IP65

Discreet sealed version of a basic downlight suitable for use in small humid areas such as kitchens and bathrooms, as well as exterior soffits.

- Integral high frequency control gear
- Tension springs provide quick & easy installation



Part Code	D64TC1361S/EL	D64TC1861S/EL	D64TT2661S/EL
Description	IP65 Opal lens	IP65 Opal lens	IP65 Opal lens
Finish	WH □	WH □	WH □
Lamp Type	TC-DEL Compact Fluorescent c/w Integral Electronic Control Gear	TC-DEL Compact Fluorescent c/w Integral Electronic Control Gear	TC-DEL Compact Fluorescent c/w Integral Electronic Control Gear
Lamp Cap	4-pin G24q-1	4-pin G24q-2	4-pin G24q-3
Wattage	13W	18W	26W
Materials	Bezel: Polycarbonate. Reflector: Super-pure aluminium.	Bezel: Polycarbonate. Reflector: Super-pure aluminium.	Bezel: Polycarbonate. Reflector: Super-pure aluminium.
Weight	0.50kg	0.50kg	0.50kg
Symbols	□ e ▲ ▲	□ e ▲ ▲	□ e ▲ ▲

Wiring: Connector box in accordance with BS EN 60598.

ADD Suffix to Code for following options:

- /E Made to order pre-wired to a remote emergency pack
- /ELDA 1-10V Analogue dimmable ballast
- /ELDD Digital dimmable/Switch DIM

- Simply remove cover

- ...for easy lamp change

1




2



LIGHTSEAL IP65

Higher output sealed downlight, suitable for use in larger areas such as shower rooms, kitchens and exterior canopies.

- Remote high frequency control gear
- Tension springs provide quick & easy installation

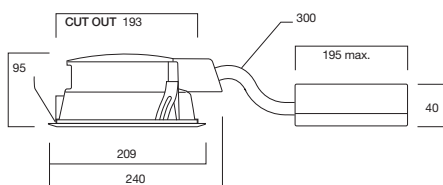

Part Code	D85180/EL	D85181/EL	D86131/EL	D86181/EL
Description	IP65 Clear lens	IP65 Opal lens	IP65 Opal lens	IP65 Opal lens
Finish	WH □	WH □	WH □	WH □
Lamp Type	TC-SEL Compact Fluorescent	TC-SEL Compact Fluorescent	TC-DEL Compact Fluorescent	TC-DEL Compact Fluorescent
	c/w Remote Electronic Control Gear	c/w Remote Electronic Control Gear	c/w Remote Electronic Control Gear	c/w Remote Electronic Control Gear
Lamp Cap	4-pin 2G7	4-pin 2G7	4-pin G24q-1	4-pin G24q-2
Wattage	2 x 7W / 9W	2 x 7W / 9W	1 x 13W	1 x 18W
Materials	Bezel, Lens and Housing: UV stable flame retardant polycarbonate.	Bezel, Lens and Housing: UV stable flame retardant polycarbonate.	Bezel, Lens and Housing: UV stable flame retardant polycarbonate.	Bezel, Lens and Housing: UV stable flame retardant polycarbonate.
Weight	0.90kg	0.90kg	0.90kg	0.90kg
Symbols				
Part Code	D86261/EL	D87261/EL	D87361/EL	D87521/EL
Description	IP65 Opal lens	IP65 Opal lens	IP65 Opal lens	IP65 Opal lens
Finish	WH □	WH □	WH □	WH □
Lamp Type	TC-DEL Compact Fluorescent	TC-DEL Compact Fluorescent	TC-DEL Compact Fluorescent	TC-DEL Compact Fluorescent
	c/w Remote Electronic Control Gear	c/w Remote Electronic Control Gear	c/w Remote Electronic Control Gear	c/w Remote Electronic Control Gear
Lamp Cap	4-pin G24q-3	4-pin G24q-1	4-pin G24q-2	4-pin G24q-3
Wattage	1 x 26W	2 x 13W	2 x 18W	2 x 26W
Materials	Bezel, Lens and Housing: UV stable flame retardant polycarbonate.	Bezel, Lens and Housing: UV stable flame retardant polycarbonate.	Bezel, Lens and Housing: UV stable flame retardant polycarbonate.	Bezel, Lens and Housing: UV stable flame retardant polycarbonate.
Weight	1.00kg	1.00kg	1.00kg	1.00kg
Symbols				

Wiring: Connector box in accordance with BS EN 60598.

ADD Suffix to Code for following options: /E Made to order pre-wired to a remote emergency pack





/ELDA 1-10V Analogue dimmable ballast

/ELDD Digital dimmable/Switch DIM



IP65 miniature, diecast aluminium downlights, ideal for wet and humid environments, such as hotel showers and bathrooms, kitchens and exterior soffits.

- Front glass pulls down for lamp change
- IP65 rating
- Leaf-spring fixing for quick and easy installation



Part Code
Description

D1080

IP65 Clear Glass

D1081

IP65 Frosted Glass

D180X

IP65 Clear Glass


D181X

IP65 Frosted Glass

Finish
Lamp Type

WH ☐ CH ☐ BN ☐ ■

PAR16 Mains



WH ☐ CH ☐ BN ☐ ■

PAR16 Mains



WH ☐ CH ☐ BN ☐ ■


MR16 12V

Transformer Required.

See Page 218.

GX5.3 / GU5.3

50W max.



WH ☐ CH ☐ BN ☐ ■

MR16 12V

Transformer Required.

See Page 218.

GX5.3 / GU5.3

50W max.



Lamp Cap

GU10

50W max.



GU10

50W max.



GU10

50W max.



GU10

50W max.



Materials

Bezel: Diecast aluminium.
Housing: Steel.

Bezel: Diecast aluminium.
Housing: Steel.

Bezel: Diecast aluminium.
Housing: Steel.

Bezel: Diecast aluminium.
Housing: Steel.

Weight

0.31kg

0.31kg

0.30kg

0.30kg

Symbols



Wiring: Connector box in accordance with BS EN 60598.

Emergency Packs available
See page 218-219

Emergency Packs available
See page 218-219




Alternative Finishes



Chrome



Brushed Nickel



D1800736WW/EL

LED IP65 Clear Glass,
Warm White

WH ☐ CH ☐ BN ☒

LED

c/w LEDs and Power
Supply


8W



Bezel: Diecast aluminium.

Housing: Steel.

0.51kg



D1810736WW/EL

LED IP65 Frosted Glass
Warm White

WH ☐ CH ☐ BN ☒

LED

c/w LEDs and Power
Supply

8W



Bezel: Diecast aluminium.

Housing: Steel.

0.51kg



DPC180X

WH ☐ CH ☒

D180X pack including lamp
and transformer

FIRESEAL

Fire rated, diecast aluminium downlights with intumescent protection. Suitable for use where local building control insists a fire rated ceiling be used.



- 130 minutes fire protection
- Four versions: fixed, showerlight, domed and flat glass




LED fixed




Fixed



Showerlight



Interchangeable Domed Glass / Flat Glass



Part Code
Description

DDF10611
IP20 Fireproof fixed

Finish
Lamp Type

WH ☐ CH ☐ BN ☐

PAR16 Mains



Lamp Cap

GU10

Wattage

50W max.



Materials

Bezel: Diecast aluminium.
Housing: Steel.

Weight

0.30kg

Symbols



DDF10616
IP65 Fireproof showerlight

WH ☐ CH ☐ BN ☐

PAR16 Mains



GU10

50W max.



Bezel: Diecast aluminium.
Housing: Steel.


0.50kg



DF1082
IP65 c/w interchangeable
domed & flat glasses

WH ☐ CH ☐ BN ☐

PAR16 Mains



GU10

50W max.




Bezel: Diecast aluminium.
Housing: Steel.

0.45kg





Fixed



DDF10601

IP20 Fireproof fixed

WH ☐ CH ☐ BN ☒

MR16 12V

Transformer Required. See Page 218.



GX5.3 / GU5.3


50W max.



Bezel: Diecast aluminium.
Housing: Steel.
0.30kg



Showerlight



DDF10610

IP65 Fireproof showerlight

WH ☐ CH ☐ BN ☒

MR16 12V

Transformer Required. See Page 218.



GX5.3 / GU5.3


50W max.



Bezel: Diecast aluminium.
Housing: Steel.
0.50kg



Interchangeable Domed Glass / Flat Glass

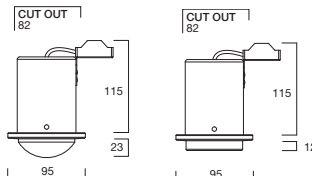

DF182X

IP65 c/w interchangeable domed & flat glasses

WH ☐ CH ☐ BN ☒

MR16 12V

Transformer Required. See Page 218.



GX5.3 / GU5.3


50W max.



Bezel: Diecast aluminium.
Housing: Steel.
0.45kg



LED Fixed



DF1610736WW/EL

LED IP65 fixed, Warm White

WH ☐ CH ☐ BN ☒

LED

c/w LEDs and Power Supply
n/a

8W max.



Bezel: Diecast aluminium.
Housing: Steel.
0.50kg



illumed