

SPOTLIGHTS

01

MOUNTING OPTIONS	14
SHAKER	16
WING	18
TORP	20
CONCEPTA	22
CONCEPTA ACCESSORIES	24
FLOODLINE HO	26
HIGHSPOT	28
ELECTROSTAR	30
ELECTROSPOT	32
LUMAPAR	34
ROCKET	36
TOPSPOT	38
MARKTRACK SPOTS	40
TRAC12 SPOTS	42
TRAC12 FLOODS	44
THE O'DRISCOLL	46



SPOTLIGHTS

We understand that interiors are dynamic not static. Spotlights offer a truly flexible solution, ideal for retail and display, they can adapt to the changing needs of a fast paced environment.

Accent lighting creates texture, focus and shape to general lighting. It adds depth and shade by creating shadows and highlights for dramatic effects and accenting features.



MOUNTING

* All spotlight heads tilt through 90°.

Please note our LumaPAR spotlight is featured below to illustrate mounting options.

ADAPTOR COLOURS

All **Chrome** spotlights are supplied with a **black** adaptor / pendant / surface plate / lightstem rod.



Illuma 1- Circuit Switched Track Adaptor

For use with Illuma 1-circuit mains track.

Supplied as standard on all track spotlights.

(Spotlights with a switched adaptor have **/S** in the catalogue number, e.g. TM3410-WH/**S**.)

/S



1- Circuit Multi Track Adaptor

***Not compatible with Illuma single circuit track.**

Suitable for use with current **Concord, Lytespan and Thorn 1-circuit tracks.**

Available on all spotlights showing **/S** in the catalogue number, Replace **/S** with **/G1** e.g. TM3410-WH/**G1**.

/G1



3-Circuit Switched Track Adaptor

For use with Global 3-circuit mains track. Suitable for use with current **Illuma, Concord, Erco, Hoffmeister, iGuzzini, Staff, Zumtobel, Nordic and Thorn 3-circuit mains tracks.**

Available on all spotlights showing **/S** in the catalogue number, Replace **/S** with **/G3** e.g. TM3410-WH/**G3**.

/G3

OPTIONS



Mono Point

TS70 WH ☐ SG ☐ BL ☐

A mono point is suitable for use with three circuit track adaptors, enabling existing track fittings to be surface mounted. Compatible spotlights will end in /G3.



Surface Mounting Plate

80mmØ, 50mm fixing centres. (Depth of plate: 23mm)

Available on **Shaker, Wing, Torp, Concepta, Floodline HO, Highspot, Electrostar, Electrospot, LumaPAR, Rocket, Topspot and Marktrack Spots.**

Remove the first **3** in the catalogue number and replace with **4**. Then remove the /S. eg. **TM3410-WH/S** becomes **TM4410-WH**.

4




Pendant Stem

300mm, 500mm or 1000mm lengths

Available on all **Shaker, Electrostar, Electrospot, LumaPAR, Rocket and Topspot** spotlights.

To order with a switched 1-circuit track adaptor, insert **P** in the catalogue number, and specify length in brackets e.g. **TMP3410-WH(500)/S**.

P

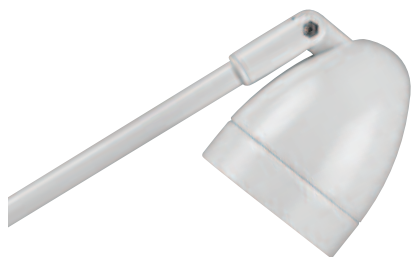

Lightstem Rod

300mm or 500mm lengths

Made to special order with surface mounting plate, slimline fixing plate, or clamp on any PAR16 **LumaPAR** spotlight (part code beginning TM...). Add **R** for rod then **4, 6 or 7** for mounting option.


Ordering examples for LumaPAR Ellipse spotlight:

with **surface** plate – **TMR4410-WH(500)**

with **slimline** plate – **TMR6410-WH(500)**

with **clamp** – **TMR7410-WH(500)**

TMR

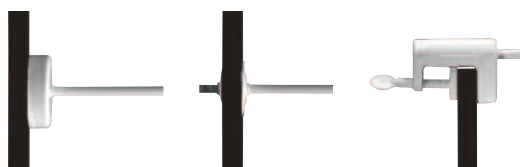

4 Surface Plate




6 Slim Plate

7 Clamp

SHAKER

A superbly engineered LED aluminium spotlight range with immaculate finishing. The contemporary, compact product design is ideal for multiple applications.

- Body swivels through 355° • Head tilts through 90° • High output OSRAM Golden DRAGON LEDs
- Efficacy 63 lumens per watt • Choice of track adaptors • Ideal for galleries, museums, exhibitions, numerous retail, architectural, display and accent uses.



Part Code Description

Finish Lamp Type

Wattage

Materials

Weight

Symbols

TLED303NW015/S

Shaker, Neutral White LED
spotlight. 1 circuit track adaptor
AB ■

LED c/w LEDs

Integral Power Supply

3W



Solid Aluminium

0.35kg

illumaled

TLED306NW015/S

Shaker, Neutral White LED
spotlight. 1 circuit track adaptor
AB ■

LED c/w LEDs

Integral power supply

6W



Solid Aluminium

0.50kg

illumaled

TLED312NW015/S

Shaker, Neutral White LED
spotlight, 1 circuit track adaptor
AB ■

LED c/w LEDs

Integral power supply

12W




Solid Aluminium

1.40kg

illumaled

For further mounting options: See page 14 - 15



TLED303WW015/S

Shaker, Warm White LED
spotlight. 1 circuit track adaptor
AB ■

LED c/w LEDs


Integral power supply

3W

Solid Aluminium

0.35kg

illumaled



TLED306WW015/S

Shaker, Warm White LED
spotlight. 1 circuit track adaptor
AB ■

LED c/w LEDs


Integral power supply

6W

Solid Aluminium

0.50kg

illumaled



TLED312WW015/S

Shaker, Warm White LED
spotlight. 1 circuit track adaptor
AB ■

LED c/w LEDs

Integral power supply

12W

Solid Aluminium



1.40kg

illumaled

For further mounting options: See page 14 - 15

A distinctive range of aluminium, metal halide spotlights. High output is ideal for accent lighting in retail, leisure and commercial environments.

- Supplied complete with lamp
- Front ring easily removes for lamp changing
- Supplied with safety glass
- Range of beam angles and wattages available

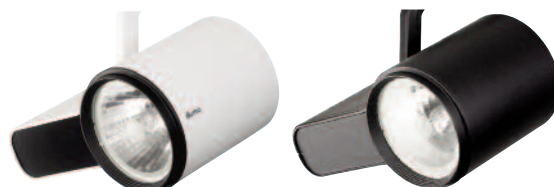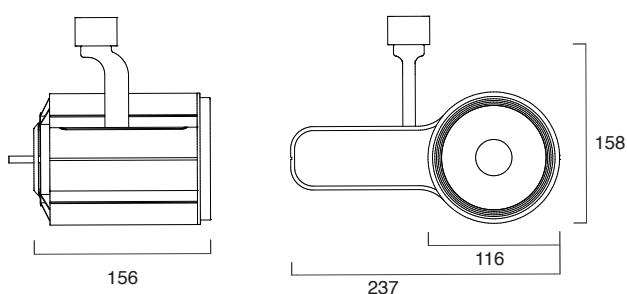

**Part Code
Description**

THQJ303510/S/L

Wing spotlight 10° beam
1 circuit track adaptor

Finish

WH ☐ SG ☐ BL ☐

Lamp Type

CDM-T Metal Halide

Integral Electronic Control Gear c/w Lamp

Lamp Cap

G12

Wattage

35W

Materials

Body and Trim:
Diecast aluminium

Weight

1.32kg



THQJ303524/S/L

Wing spotlight 24° beam
1 circuit track adaptor

WH ☐ SG ☐ BL ☐

CDM-T Metal Halide

Integral Electronic Control Gear c/w Lamp

G12

35W

Body and Trim:
Diecast aluminium

1.32kg



THQJ303545/S/L

Wing spotlight 45° beam
1 circuit track adaptor

WH ☐ SG ☐ BL ☐

CDM-T Metal Halide

Integral Electronic Control Gear c/w Lamp

G12

35W

Body and Trim:
Diecast aluminium

1.32kg



For further mounting options: See page 14 - 15
NOT SUITABLE FOR VERTICAL MOUNTING



THQJ307010/S/L

Wing spotlight 10° beam
1 circuit track adaptor

WH ☐ SG ☐ BL ☐

CDM-T Metal Halide



Integral Electronic Control Gear c/w Lamp
G12

70W

10°

Body and Trim:
Diecast aluminium
1.65kg

THQJ307024/S/L

Wing spotlight 24° beam
1 circuit track adaptor

WH ☐ SG ☐ BL ☐

CDM-T Metal Halide



Integral Electronic Control Gear c/w Lamp
G12

70W

24°

Body and Trim:
Diecast aluminium
1.65kg

THQJ307045/S/L

Wing spotlight 45° beam
1 circuit track adaptor

WH ☐ SG ☐ BL ☐

CDM-T Metal Halide



Integral Electronic Control Gear c/w Lamp
G12



70W

45°

Body and Trim:
Diecast aluminium
1.65kg

A bold range of aluminium, metal halide spotlights. A flexible solution for accent lighting in retail, leisure and commercial environments.

- Supplied complete with lamp
- Front ring easily removes for lamp changing
- Supplied with safety glass
- Range of beam angles and wattages available



**Part Code
Description**

THQK303510/S/L

Torp spotlight 10° beam
1 circuit track adaptor

Finish

WH ☐ SG ☐ BL ☐

Lamp Type

CDM-T Metal Halide

Integral Electronic Control Gear c/w Lamp

Lamp Cap

G12

Wattage

35W

Materials

Body and Trim:
Diecast aluminium

Weight

1.47kg



THQK303524/S/L

Torp spotlight 24° beam
1 circuit track adaptor

WH ☐ SG ☐ BL ☐

CDM-T Metal Halide

Integral Electronic Control Gear c/w Lamp

G12

35W

Body and Trim:
Diecast aluminium

1.47kg



THQK303545/S/L

Torp spotlight 45° beam
1 circuit track adaptor

WH ☐ SG ☐ BL ☐

CDM-T Metal Halide

Integral Electronic Control Gear c/w Lamp

G12

35W

Body and Trim:
Diecast aluminium

1.47kg



For further mounting options: See page 14 - 15
NOT SUITABLE FOR VERTICAL MOUNTING



THQK307010/S/L

Torp spotlight 10° beam
1 circuit track adaptor

WH ☐ SG ☐ BL ☐

CDM-T Metal Halide 

Integral Electronic Control Gear c/w Lamp
G12

70W



Body and Trim:
Diecast aluminium
1.80kg

THQK307024/S/L

Torp spotlight 24° beam
1 circuit track adaptor

WH ☐ SG ☐ BL ☐

CDM-T Metal Halide 

Integral Electronic Control Gear c/w Lamp
G12

70W



Body and Trim:
Diecast aluminium
1.80kg

THQK307045/S/L

Torp spotlight 45° beam
1 circuit track adaptor

WH ☐ SG ☐ BL ☐

CDM-T Metal Halide 

Integral Electronic Control Gear c/w Lamp
G12


70W



Body and Trim:
Diecast aluminium
1.80kg

A robust, diecast aluminium range of spotlights. Fully adjustable body and head. Ideal for accent lighting in retail, commercial and leisure environments.

- Body swivels through 355° • Head tilts through 90° • Metal Halide version supplied complete with lamp
- Supplied with safety glass • Front ring easily removes for lamp changing • Full range of attachments
- AR111 version dimmable

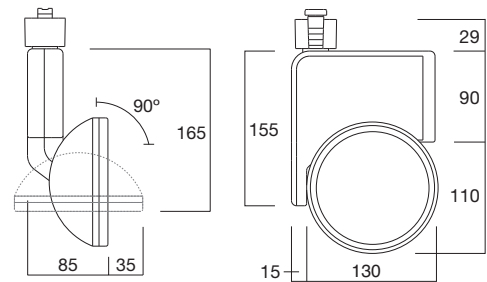

Metal Halide



AR111

**Part Code
Description**

**Finish
Lamp Type**

**Lamp Cap
Wattage
Materials**

Weight

THQS320C/S/L

Concepta 27° beam (Spot)
1-circuit track adaptor

WH ☐ SG ☐ BL ☐

CDM-TC Metal Halide

Integral Electronic Control Gear

c/w Lamp

G8.5

20W

Body and Trim:
Diecast aluminium

0.84kg

THQF320C/S/L

Concepta 50° beam (Flood)
1-circuit track adaptor

WH ☐ SG ☐ BL ☐

CDM-TC Metal Halide

Integral Electronic Control Gear

c/w Lamp

G8.5

20W

Body and Trim:
Diecast aluminium

0.84kg

THQS335C/S/L

Concepta 27° beam (Spot)
1-circuit track adaptor

WH ☐ SG ☐ BL ☐

CDM-TC Metal Halide

Integral Electronic Control Gear

c/w Lamp

G8.5

35W

Body and Trim:
Diecast aluminium

0.84kg

THQF335C/S/L

Concepta 50° beam (Flood)
1-circuit track adaptor

WH ☐ SG ☐ BL ☐

CDM-TC Metal Halide

Integral Electronic Control Gear

c/w Lamp

G8.5

35W

Body and Trim:
Diecast aluminium

0.84kg



THQS370C/S/L

Concepta 27° beam (Spot)
1-circuit track adaptor
WH ☐ SG ☐ BL ☐

CDM-TC Metal Halide 
Integral Electronic Control Gear
c/w Lamp 
G8.5
70W

Body and Trim:
Diecast aluminium
0.96kg

THQF370C/S/L

Concepta 50° beam (Flood)
1-circuit track adaptor
WH ☐ SG ☐ BL ☐

CDM-TC Metal Halide 
Integral Electronic Control Gear
c/w Lamp 
G8.5
70W

Body and Trim:
Diecast aluminium
0.96kg

TH3111X/S

Concepta Low voltage.
1-circuit track adaptor
WH ☐ SG ☐ BL ☐

AR111 12V 
Integral Electronic Control Gear
no Lamp 
G53
50W min.100W max.

Body and Trim:
Diecast aluminium
0.71kg

CONCEPTA ACCESSORIES

- Full range of attachments. • Not suitable for AR111 versions.
- Only one attachment can be used per spotlight



Anti-glare ring

TH582

Anti-glare ring (spot only)

WH ☐ SG ☐ BL ☐

Clear glass

TH584

Clear glass (27° spot)

WH ☐ SG ☐ BL ☐

Colour filter

TH581S/A

Amber spot filter

WH ☐ SG ☐ BL ☐

Colour filter

TH581S/B

Blue spot filter

WH ☐ SG ☐ BL ☐

Colour filter

TH581S/G


Green spot filter

WH ☐ SG ☐ BL ☐

Colour filter

TH581S/R

Red spot filter

WH ☐ SG ☐ BL ☐

Honeycomb louvre

TH583S

Honeycomb louvre (spot only)

WH ☐ SG ☐ BL ☐

Spread lens

TH585

Spread lens (50° beam flood)

WH ☐ SG ☐ BL ☐

Colour filter

TH581F/A

Amber flood filter

WH ☐ SG ☐ BL ☐

Colour filter

TH581F/B

Blue flood filter

WH ☐ SG ☐ BL ☐

Colour filter

TH581F/G

Green flood filter

WH ☐ SG ☐ BL ☐

Colour filter

TH581F/R

Red flood filter



WH ☐ SG ☐ BL ☐



FLOODLINE HO

Compact profile, high output, T5 wallwasher which is ideal for an even illumination of vertical surfaces. Excellent for displays which require good colour rendering.

- Wide, uniform beam for optimum light output
- Rotates through 90° in both directions
- Spring-loaded lampholders with 90° rotary lock
- Compact design
- Louvre easily removed for lamp replacement




Part Code	T37T2X24/S	T37T2X39/S	T37T2X54/S
Description	Floodline 1-circuit track adaptor, 686mm length	Floodline 1-circuit track adaptor, 984mm length	Floodline 1-circuit track adaptor, 1286mm length
Finish	WH ☐ BL ☒	WH ☐ BL ☒	WH ☐ BL ☒
Lamp Type	T5 Fluorescent	T5 Fluorescent	T5 Fluorescent
Lamp Cap	Integral Electronic Control Gear	Integral Electronic Control Gear	Integral Electronic Control Gear
Wattage	G5	G5	G5
Materials	2 x 24W	2 x 39W	2 x 54W
Weight	Body: Extruded aluminium, Louvre: Brushed stainless steel, End-caps: Diecast aluminium. Reflector: Aluminium 2.00kg	Body: Extruded aluminium, Louvre: Brushed stainless steel, End-caps: Diecast aluminium. Reflector: Aluminium 2.60kg	Body: Extruded aluminium, Louvre: Brushed stainless steel, End-caps: Diecast aluminium. Reflector: Aluminium 3.20kg

For further mounting options: See page 14 - 15



od nano

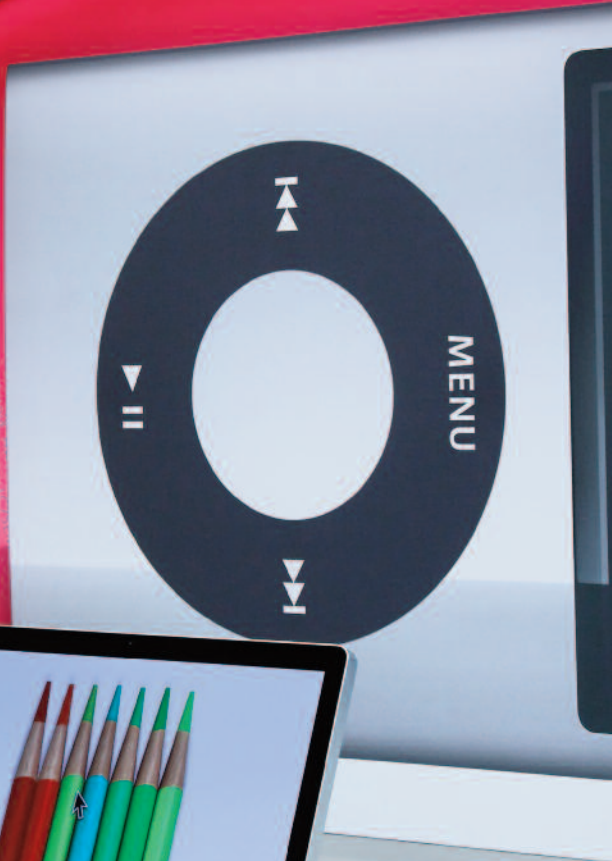



HIGHSPOT

Classic style floodlights, ideal for areas requiring high illumination. For shop windows, showrooms, exhibitions and galleries.

- Supplied with toughened safety glass
- High-efficiency, super-pure aluminium reflector
- Compact design



Double-ended



Single-ended



Part Code
Description

THQS3035/EL/S/L

Highspot 1-circuit track adaptor, single-ended Lamp

WH ☐ SG ☐ BL ☐

Finish
Lamp Type

CDM-T Metal Halide

Integral Electronic Control Gear c/w Lamp



THQS3070/EL/S/L

Highspot 1-circuit track adaptor, single-ended Lamp

WH ☐ SG ☐ BL ☐

CDM-T Metal Halide

Integral Electronic Control Gear c/w Lamp



TWSS3100/EL/S/L

Highspot 1-circuit track adaptor, single-ended Lamp

WH ☐ SG ☐ BL ☐

SDW-TG White SON

Integral Electronic Control Gear c/w Lamp



Lamp Cap
Wattage

G12

35W

G12

70W

GX12-1

100W

Materials

Body and Reflector: Aluminium.
Safety Glass: Toughened glass.
Yoke: Steel.

Body and Reflector: Aluminium.
Safety Glass: Toughened glass.
Yoke: Steel.

Body and Reflector: Aluminium.
Safety Glass: Toughened glass.
Yoke: Steel.

Weight

2.44kg

2.84kg

2.90kg



THQE3070/EL/S/L

Highspot 1-circuit track
adaptor, double-ended Lamp

WH ☐ SG ☐ BL ☒

CDM-TD Metal Halide 

Integral Electronic Control Gear
c/w Lamp

Rx7s

70W

Body and Reflector: Aluminium.
Safety Glass: Toughened glass.
Yoke: Steel.
2.28kg

THQE3150/EL/S/L

Highspot 1-circuit track
adaptor, double-ended Lamp

WH ☐ SG ☐ BL ☒

CDM-TD Metal Halide 

Integral Electronic Control Gear
c/w Lamp

Rx7s

150W

Body and Reflector: Aluminium.
Safety Glass: Toughened glass.
Yoke: Steel.
2.52kg

ATTACHMENTS

Only one attachment can be used per spotlight

THQ72 BL ☒

Louvre

THQ75 WH ☐ SG ☐ BL ☒

Barn-door



Louvre




Barn-door

ELECTROSTAR

Compact, lightweight spotlights for mains track or surface mounting. Ideal for both highlighting and general lighting in retail, commercial and leisure environments.

- Short circuit and thermal overload protection
- Attachments available for a variety of lighting effects
- Soft-start electronic transformer maintains MR16 12V lamp life
- Can be used with most types of dimmer, including leading & trailing edge



Part Code Description

TH340X/S
Electrostar 1-circuit track
adaptor

Finish Lamp Type

WH ☐ SG ☐ BL ☐

MR16 12V



Integral Electronic Transformer

Lamp Cap Wattage

GX5.3 / GU5.3

50W max.



Materials

Body and Housing: Diecast
aluminium / polycarbonate.

Weight

0.16kg

For further mounting options: See page 14 - 15.

Suitable for use with most types of good quality dimmer, including leading and trailing edge dimmers.
There may be an increase in transformer noise when dimming.

Attachments

Attachments can be used with open or glass-fronted 50mm reflector lamps, providing that on the latter the glass is flush with the rim (except T55 which can even be used with lamps where the glass protrudes beyond the rim).
Glass filters can be used in combination with T55, T57, T58 and T59.

T55

SG ☐ BL ☐

Barn-door

T56/Y

SG ☐ BL ☐

Yellow glass filter

T56/B

SG ☐ BL ☐

Blue glass filter

T57

SG ☐ BL ☐

Spread lens – elongates the circle of light

T56/G

SG ☐ BL ☐

Green glass filter

T58

SG ☐ BL ☐

Louvre

T56/R

SG ☐ BL ☐

Red glass filter

T59

SG ☐ BL ☐

Honeycomb



Barn-door



Glass filters



Spread lens



Louvre



Honeycomb




ELECTROSPOT

A timeless design for use on mains track or surface mounting. Ideal for both highlighting and general lighting.


- Includes new illumaled lamp technology
- Short circuit and thermal overload protection
- Integrated GU5.3 lamp retaining springdimmer
- Anti Glare Ring twists off for easy lamp change
- MR16 version can be used with most types of good quality including leading & trailing edge



LED



LED

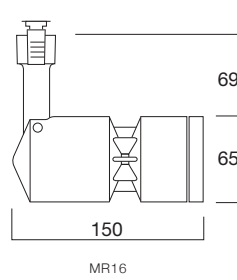

MR16



MR16

Part Code	TH365X/S	TH365X/SD/S
Description	ElectrospotLED 1-circuit track adaptor, Warm White LED	Electrospot 1-circuit track adaptor, Self dim
Finish	WH ☐ SG ☐ BL ☐	WH ☐ SG ☐ BL ☐
Lamp Type	LED	MR16 12V
Lamp Cap	c/w LEDs and Integral Driver	Integral Transformer
Wattage	N/A	GX5.3 / GU5.3
Materials	8W	50W max.
Weight	0.50kg	0.30kg
Symbols	illumaled	

For further mounting options: See page 14 - 15.

Suitable for use with most types of good quality dimmer, including leading and trailing edge dimmers. There may be an increase in transformer noise when dimming. LED cannot be dimmed.

Attachments

TH75 WH ☐ SG ☐ BL ☐ Barn-door (not suitable for LED)



Barn-door

- MR16 version available with self dimming switch


- Individual fittings can be dimmed easily

- To order with self dimming switch add /SD

1



2



3








LUMAPAR

A flexible range of discreet spotlights for mains lamps not requiring a transformer. Ideal for highlighting and general lighting applications.

- Easy to dim with standard mains dimmer
- Bright, white light
- Excellent colour rendering
- Two back housing styles – Flat-Back and Ellipse
- Four front body styles
- No transformer required



Ellipse PAR16



Part Code Description

Finish

Lamp Type Lamp Cap Wattage Materials

Weight

Attachments

TM3210/S

LumaPAR Flat-Back
1-circuit track adaptor

WH ☐ SG ☐ BL ☐ CH ☐

TM3410/S

LumaPAR Ellipse
1-circuit track adaptor

WH ☐ SG ☐ BL ☐ CH ☐

TM3211/S

LumaPAR Flat-Back
1-circuit track adaptor

WH ☐ SG ☐ BL ☐

TM3411/S

LumaPAR Ellipse
1-circuit track adaptor

WH ☐ SG ☐ BL ☐

T3220/S

LumaPAR Flat-Back
1-circuit track adaptor

WH ☐ SG ☐ BL ☐

PAR16 Mains

GU10 25° 50°
50W max.



PAR16 Mains

GU10 25° 50°
50W max.



Mini CFL

GU10 100°
14W max.




Mini CFL

GU10 100°
14W max.



PAR20 Mains

E27 10° 30°
50W max.



Body and Housing:
Diecast aluminium
0.15kg

Body and Housing:
Diecast aluminium
0.14kg

Body and Housing:
Diecast aluminium
0.15kg

Body and Housing:
Diecast aluminium
0.14kg

Body and Housing:
Diecast aluminium
0.17kg

T55

SG ☐ BL ☐

Barn-door


TM60

WH ☐ SG ☐ BL ☐


Anti-glare ring

(For use with PAR16 lamp only. Only one attachment can be used per spotlight)


For further mounting options: See page 14 - 15




T3420/S
LumaPAR Ellipse
1-circuit track adaptor
WH ☐ SG ☐ BL ☐




T3225/S
LumaPAR Flat-Back
1-circuit track adaptor
WH ☐ SG ☐ BL ☐



T3425/S
LumaPAR Ellipse
1-circuit track adaptor
WH ☐ SG ☐ BL ☐



T3230/S
LumaPAR Flat-Back with
cone 1-circuit track adaptor
WH ☐ SG ☐ BL ☐



T3430/S
LumaPAR Ellipse with
cone 1-circuit track adaptor
WH ☐ SG ☐ BL ☐

PAR20 Mains


E27
50W max.



Body and Housing:
Diecast aluminium
0.16kg

PAR30 Mains


E27
100W max.



Body and Housing:
Diecast aluminium
0.15kg

PAR30 Mains


E27
100W max.



Body and Housing:
Diecast aluminium
0.14kg

PAR30 Mains


E27
100W max.



Body and Housing:
Diecast aluminium
0.20kg

PAR30 Mains

E27
100W max.



Body and Housing:
Diecast aluminium
0.19kg

An essential range of compact spotlights for mains operated PAR halogen reflector lamps. Designed for universal applications.

- Cone versions conceal the lamp and reduce glare
- Accepts a variety of lamp type and wattages
- Easy to dim with standard mains dimmer
- Operate directly off the mains supply without the need for a transformer
- Superior beam control through lamp selection



Rocket
PAR30







Rocket with Cone
PAR30



Rocket
R60 / R63 / R80 / PAR20



Rocket with Cone
R60 / R63 / PAR20



Part Code Description

T325/S

Rocket spotlight
1-circuit track adaptor

Finish

WH ☐ SG ☐ BL ☐

Lamp Type

PAR30 Mains

PAR30 CFL

PAR30 LED



Non-dichroic
version only

Lamp Cap

E27

Wattage

PAR 30: 100W max.



T328/S

Rocket Spotlight with Cone,
1-circuit track adaptor

WH ☐ SG ☐ BL ☐

PAR30 Mains



Non-dichroic
version only

E27

100W max.



T326/S

Rocket Spotlight
1-circuit track adaptor

WH ☐ SG ☐ BL ☐

R60 / R63

R80

PAR20




Non-dichroic
version only

E27

R60 / R63: 60W max.

R80: 100W max.

PAR20: 50W max.



T327/S

Rocket Spotlight with Cone,
1-circuit track adaptor.

WH ☐ SG ☐ BL ☐

R60 / R63

PAR20



Non-dichroic
version only

E27

R60 / R63: 60W max.

PAR20: 50W max.



Materials

Body and Housing:
Steel / polycarbonate.

0.20kg



Body and Housing:
Aluminium / polycarbonate.

0.30kg



Body and Housing:
Steel / polycarbonate.

0.30kg



Body and Housing:
Aluminium / polycarbonate.

0.20kg



For further mounting options: See page 14 - 15.




A versatile highly-tooled stem spotlight for PAR halogen and GLS lamps. Ideal for both highlighting and general lighting in retail and commercial applications.

- Available with a choice of track adaptors or surface mounting plate • Accepts a variety of lamps



PAR 20



Compatible with the following lamps:



R80 CFL lamp



R63 CFL lamp



PAR30H CFL



PAR38 CFL lamp

Part Code
Description
Finish
Lamp Type

T310/S

Topspot 1-circuit track adaptor

WH ☐

R60 / R63

R80

PAR20

PAR30 / PAR38



Non-dichroic
version only

No transformer required


E27

R60 / R63: 60W max

R80: 75W max

PAR20: 50W max

PAR30 / PAR38: 100W max



Lamp Cap
Wattage

Materials

Injection-moulded body and
stem, silicone rubber gasket

Weight

0.20kg

For further mounting options: See page 14 - 15

Accessories

T62 WH ☐

Cowl Reflector



ne chair?

Choose the look.


Love the chair?

Cho

MARKTRACK SPOTS

Low voltage miniature spotlights for use with 12V Marktrack or for surface mounting. Ideal in applications where unobtrusive profiles are required.

- Unique 'bulldog clip' track adaptor for quick and easy mounting to track
- Three designs: Ministar, Superstar & Eurostar
- Remote transformer required unless used with Marktrack Pack (See page 53)




TH300X

Ministar. Marktrack adaptor


WH ☐ BL ☒

MR16 12V
GX5.3 / GU5.3

50W max.



Body and Housing: Aluminium
0.11kg




TH305X

Eurostar. Marktrack adaptor


WH ☐ BL ☒

MR16 12V
GX5.3 / GU5.3

50W max.



Body and Housing: Aluminium
0.12kg




TH330X

Superstar. Marktrack adaptor

WH ☐ BL ☒

MR16 12V
GX5.3 / GU5.3

50W max.



Body and Housing: Aluminium
0.13kg



Part Code
Description

Finish

Lamp Type

Lamp Cap

Wattage

Materials

Weight

Symbols

For further mounting options: See page 14 - 15

For surface mounted fittings you will require a remote transformer. See page 190-191

Attachments

Attachments can be used with open or glass-fronted 50mm reflector lamps, providing that on the latter the glass is flush with the rim (except T55 which can even be used with lamps where the glass protrudes beyond the rim).
Glass filters can be used in combination with T55, T57, T58 and T59.



Barn-door



Glass filters



Spread lens



Louvre



Honeycomb

T55

SG ☐ BL ☒

Barn-door

T56/B

SG ☐ BL ☒

Blue glass filter

T56/G

SG ☐ BL ☒

Green glass filter

T56/R

SG ☐ BL ☒

Red glass filter

T56/Y

SG ☐ BL ☒

Yellow glass filter

T57

SG ☐ BL ☒

Spread lens – elongates the circle of light

T58

SG ☐ BL ☒

Louvre

T59

SG ☐ BL ☒

Honeycomb

- Easy to use 'bulldog clip' track adaptor

- Simply squeeze and push into the track

- Easy to add and remove spotlights to your scheme

1



2



3



TRACK12 SPOTS

Unobtrusive display lighting systems for LV halogen lamps. Spotlights and floodlights can be used together to create wash and accent lighting effects.


- Spring-loaded latch on adaptor enables fittings to be attached to the track with one hand
- For use with TRAC12 only




Gimbal Ring MR11




Gimbal Ring MR11




Cylinder




Gimbal Ring MR16



Universal



Delta



Part Code Description

Finish Lamp Type Lamp Cap Wattage Materials Weight Symbols

TL110

Gimbal Ring MR11
TRAC12 adaptor

WH ☐ BL ☒

MR11 12V

GU4

20W max.

Aluminium

0.06kg



TL112

Cylinder
TRAC12 adaptor

WH ☐ BL ☒

MR11 12V

GU4

20W max.

Aluminium

0.14kg



TL196

Gimbal Ring MR16
TRAC12 adaptor

WH ☐ BL ☒

MR16 12V

GX5.3 / GU5.3

50W max.

Aluminium

0.09kg



TL301

Universal
TRAC12 adaptor

WH ☐ BL ☒

MR16 12V

GX5.3 / GU5.3

50W max.

Aluminium

0.06kg



TL116

Delta
TRAC12 adaptor

WH ☐ BL ☒

MR16 12V

GX5.3 / GU5.3

50W max.

Aluminium

0.06kg



- Easy to use twist and lock track adaptor

- Simply insert into the track, twist...

- ...and lock into place.
You can use one hand.


1



2



3

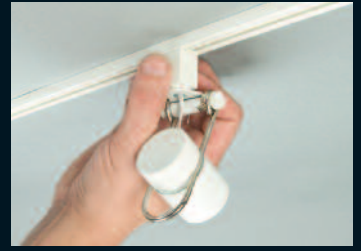


TRACK12 FLOODS


Miniature LV halogen lighting products to provide indirect, wash and accent lighting in confined spaces such as showcases, display cabinets and cornices.

- Xenon buds small enough to be concealed in architectural details, accentuating features and providing soft even lighting

Xenon Bud

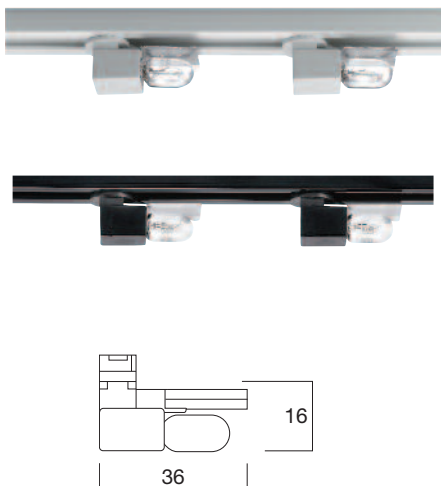

Halogen Flood

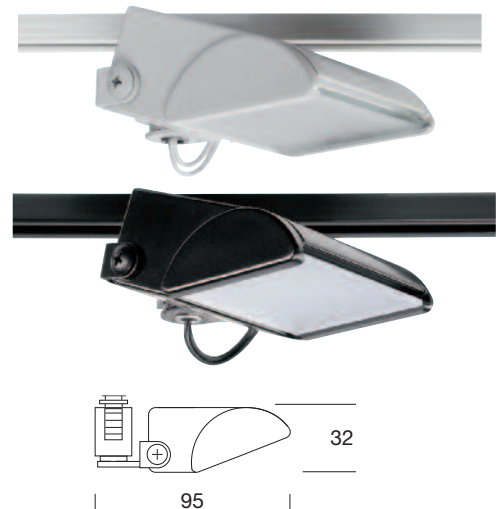

Part Code
Description

Finish
Lamp Type

Lamp Cap
Wattage

Materials
Weight
Symbols

Part Code
Description

TL201/5

Xenon Bud 12 Pack
TRAC12 adaptor
WH ☐ BL ☒

Xenon Capsule 12V

c/w Lamp
Wedge base
5W max.

Aluminium / polycarbonate
0.01kg



TL201/10

Xenon Bud 12 Pack
TRAC12 adaptor
WH ☐ BL ☒

Xenon Capsule 12V

c/w Lamp
Wedge base
10W max.

Aluminium / polycarbonate
0.01kg



TL103

Halogen Flood
TRAC12 adaptor
WH ☐ BL ☒

Halogen Capsule 12V

G4
20W max.

Diecast aluminium
0.12kg



TL901

5W Xenon capsule replacement
lamp

TL903


10W Xenon capsule replacement
lamp



THE O'DRISCOLL

Miniature LED spotlight featuring high output LEDs, a flexible stem and brushed aluminium finish. Ideal for retail and display applications.

- Surface mounted • 15° beam angle • Discrete size • Optical lens • High output 60 lumens per watt
- 350 mA feed • Featuring CREE XR-E LEDs



Part Code	T4010115NW	T4010115WW
Description	O'Driscoll Neutral White LED spotlight	O'Driscoll Warm White LED spotlight
Finish	AB ■	AB ■
Lamp Type	LED c/w LEDs	LED c/w LEDs
Wattage	1W	1W
Materials	Aluminium	Aluminium
Weight	0.04kg	0.04kg
Symbols		
Power Supply	(Constant current)	
	PSL03350	3W Power Supply
	PSL12350	12W Power Supply
	PSL18350	18W Power Supply
Splitter Block	PSE6350(1000)	350mA 6 way extension (1m lead) c/w 3 x PSP350
	PSE2350(1000)	350mA 2 way extension (1m lead)
	PSP350	1 x close-loop plug for 350mA

