

FEATURE

04

CONCEAL	132
PATHFINDER	134
CONGA	136
VIA/CAMINO	138
TUUB	140
MICRA	142
AMBIT	144
BANDA	146
CIRCUIT	148
LUMASEAL	150
UPLINE	152
ZEDOS PM	154
TRILOGY HALO	156
REFLEKTOR	158
KIORA	160
GEORGIA OP	162
AXALIS	164



ladies

its You

FEATURE

Feature lighting covers a broad array of lighting elements which extend beyond ambient and accent lighting. They can be used for display, mood or orientation functions, as well as a focus for the eye.



CONCEAL

A low profile LED system which connects to make up continuous runs. Ideal for feature lighting in retail and leisure interiors, or for incorporation into bespoke furniture.


- High output LEDs $\geq 70\text{lm/W}$
- Neutral White version Ra80
- Warm White version Ra95



Clear lens



Frosted lens



Part Code
Description
Finish
Lamp Type
Wattage
Materials
Weight
Symbols

Part Code	LEDS304NW120	LEDS304WW120	LEDS304NWFR	LEDS304WWFR
Description	Neutral White Clear lens	Warm White Clear lens	Neutral White Frosted lens	Warm White Frosted lens
Finish	AL ■	AL ■	AL ■	AL ■
Lamp Type	LED	LED	LED	LED
Wattage	Power Supply Required 6W	Power Supply Required 6W	Power Supply Required 6W	Power Supply Required 6W
Materials	Body: Extruded aluminium. Lens, Ends and Connectors: Injection moulded polycarbonate.	Body: Extruded aluminium. Lens, Ends and Connectors: Injection moulded polycarbonate.	Body: Extruded aluminium. Lens, Ends and Connectors: Injection moulded polycarbonate.	Body: Extruded aluminium. Lens, Ends and Connectors: Injection moulded polycarbonate.
Weight	0.09kg	0.09kg	0.09kg	0.09kg
Symbols				

Power Supply

(Constant voltage 24V)
LEDPSU24020 20W 3 max. in-line units
LEDPSU24100 100W 16 max. in-line units

Accessories

LEDS38(3000) GY ■ Live end cable 3000mm length
LEDSDE GY ■ Dead-end



*you will require one live end cable and dead-end per run.

LEDS23 GY ■ End-to-end connector



LEDS20 GY ■ Flexible connector (65mm)
LEDS20(1000) GY ■ Flexible connector 1000mm lead



- Easy to install, plug and play system. You will require a live end cable.


- Click together using end-to-end connectors to create straight runs.

- Flexible connectors offer versatility in application.

1



2

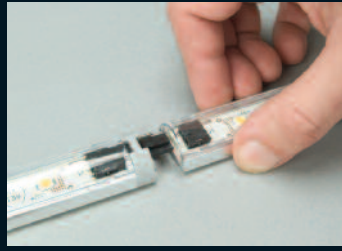


3



PATHFINDER

A unique system designed for incorporation into long runs of hand rails or tubular profiles where positioning power supplies at regular intervals is not viable or practical.

- IP66 rating
- IK10 rating
- Available in two lengths
- Full range of installation accessories
- Continuous runs of up to 150m can be powered by one transformer

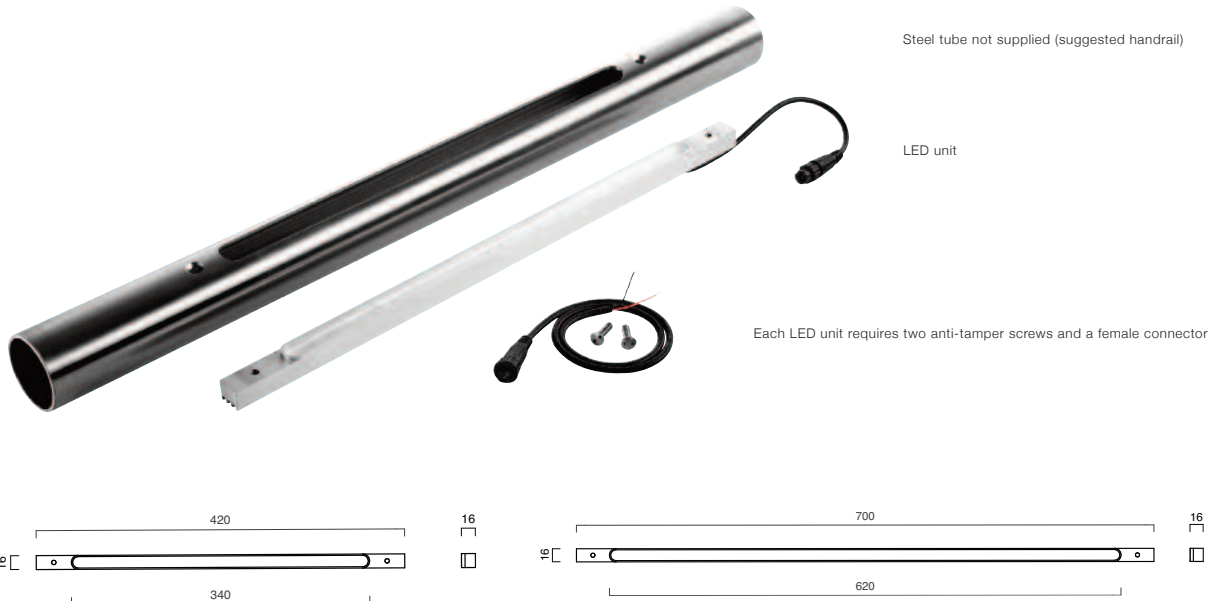

Part Code	HL45WW	HL45NW	HL79WW	HL79NW
Description	Warm White LED unit IP66, 420mm length	Neutral White LED unit IP66, 420mm length	Warm White LED unit IP66, 700mm length	Neutral White LED unit IP66, 700mm length
Finish	AL ■	AL ■	AL ■	AL ■
Lamp Type	LED c/w LEDs, IP66 male plug and flex power entry Power Supply Required 4.5W	LED c/w LEDs, IP66 male plug and flex power entry Power Supply Required 4.5W	LED c/w LEDs, IP66 male plug and flex power entry Power Supply Required 9W	LED c/w LEDs, IP66 male plug and flex power entry Power Supply Required 9W
Wattage				
Materials	Body: Aluminium	Body: Aluminium	Body: Aluminium	Body: Aluminium
Weight	0.19kg	0.19kg	0.40kg	0.40kg
Symbols				

Power Supply	LEDPSU24020	GY ■	20 VA 24V DC Transformer
	LEDPSU24075	GY ■	75 VA 24V DC Transformer
	LEDPSU24100	GY ■	100 VA 24V DC Transformer
	LEDPSU24120	GY ■	120 VA 24V DC Transformer
	LEDPSU24240	GY ■	240 VA 24V DC Transformer
	LEDPSU24300	GY ■	300 VA 24V DC Transformer
	LEDPSU24600	GY ■	600 VA 24V DC Transformer

Accessories	HLF001	Female IP66 Connector and lead
	HLATSM5	Pair of Snake Eye Anti-Tamper Screws
	HLATSBIT	Snake Eye Anti-Tamper Bit


*Each LED unit requires two anti-tamper screws and a female connector





An easy to install, flexible RGB LED solution allowing universal usage for dramatic colour changing applications.

- DMX colour setting & cycling control
- Multi-chip technology
- High reliability drive circuit
- IP67, Submersible to 1000mm (not suitable for chlorinated or salt water)

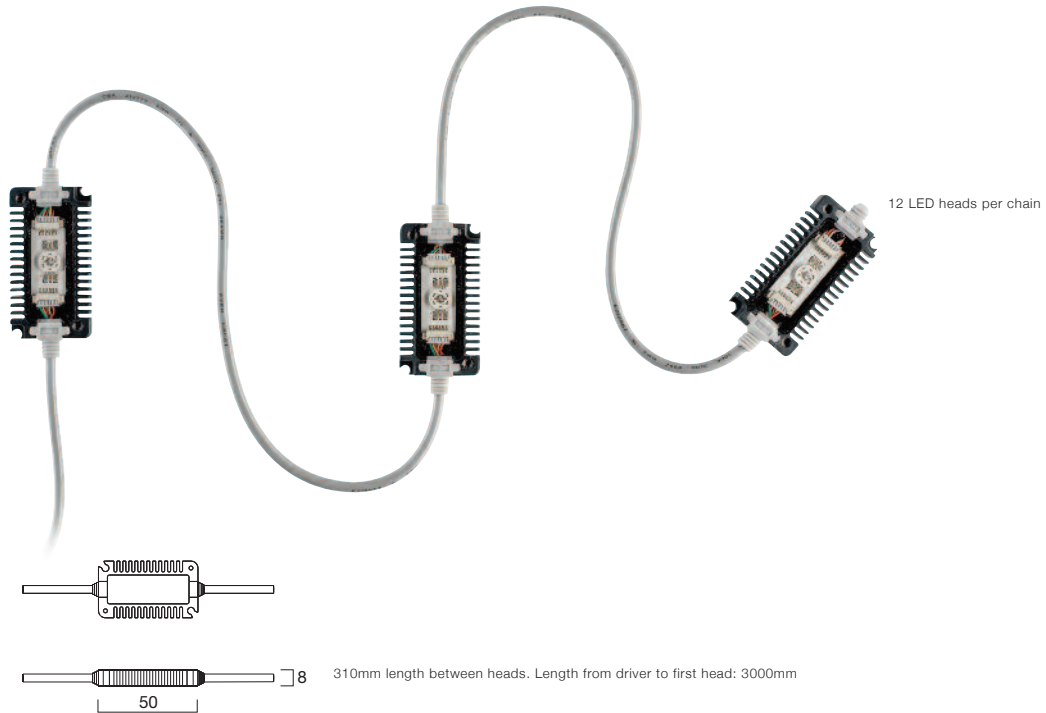

Part Code	LEDC112RGB120
Description	12 x 3W RGB heads IP68 chain 3600mm
Finish	GY ■
Lamp Type	LED
	Driver Required
Wattage	36W per chain
Materials	Housing: Diecast aluminium Lens: Polycarbonate
Weight	0.50kg
Symbols	illumaled ♪♪
Driver	LEDCD36DMX Colour driver, DMX compatible
Advanced Control	LC512 SS ■ Colour Style 512

An optional sophisticated controller for maximum control and flexibility including automatic set-up, sound-to-light, full DMX timing configuration, astronomical clock and control / diagnostics via the built-in web server. For use with the Colour Driver, see above.




- This flexible colour change system means that LED heads can be condensed...

- ... or dispersed as required.

- Easy to change dip switches for colour changing using the **LEDCD36DMX** colour driver.

1

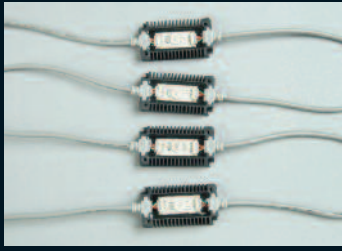

2



3




CAMINO / VIA

An unobtrusive series of lighting modules which can be used for orientation and decorative lighting purposes.

- Prismatic lens
- Integral LED driver
- Low voltage power supply
- Surface and recessed options
- Shallow depth
- Constant voltage
- IP67

1

Choose base unit

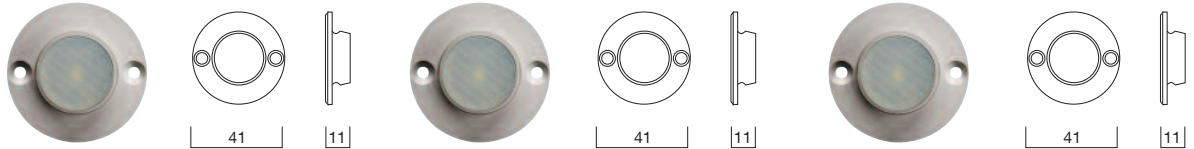

Part Code
Description
Finish
Lamp Type
Wattage
Materials
Weight
Symbols


LED21NW120
Base Unit, Neutral White, IP67
AL ■
LED, c/w LEDs
Power Supply Required
1.2W
Housing: Diecast Aluminium
Diffuser: Opal Prismatic Vandal Proof Polycarbonate
0.02kg
illumaled ●●

LED21WW120
Base Unit, Warm White, IP67
AL ■
LED, c/w LEDs
Power Supply Required
1.2W
Housing: Diecast Aluminium
Diffuser: Opal Prismatic Vandal Proof Polycarbonate
0.02kg
illumaled ●●

LED21BL120
Base Unit, Blue, IP67
AL ■
LED, c/w LEDs
Power Supply Required
1.2W
Housing: Diecast Aluminium
Diffuser: Opal Prismatic Vandal Proof Polycarbonate
0.02kg
illumaled ●●

2

Choose a CAMINO cover (IP67) or...

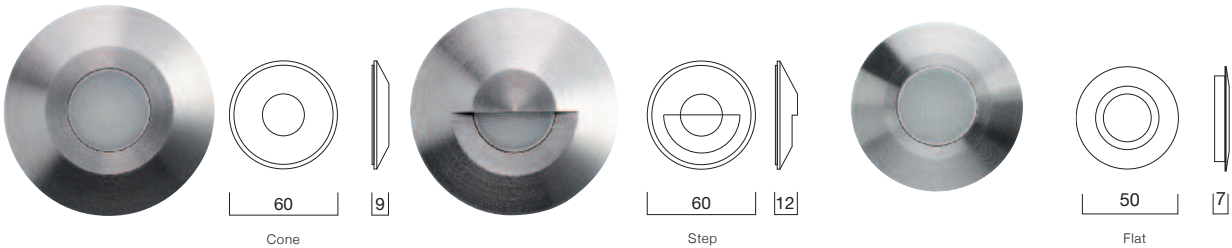

Part Code
Description
Finish
Materials
Weight


LED2CONE
Camino CONE cover (wall)
IP67 (Suitable for exterior use)
SS ■
Bezel: 316L Marine Grade Stainless Steel
0.10kg
●●

LED2STEP
Camino STEP cover (wall)
IP67 (Suitable for exterior use)
SS ■
Bezel: 316L Marine Grade Stainless Steel
0.12kg
●●

LED2FLAT
Camino FLAT cover (wall / recessed / in-ground)
IP67 (Suitable for exterior use)
SS ■
Bezel: 316L Marine Grade Stainless Steel
0.10kg
●●

3

... alternatively choose a VIA cover

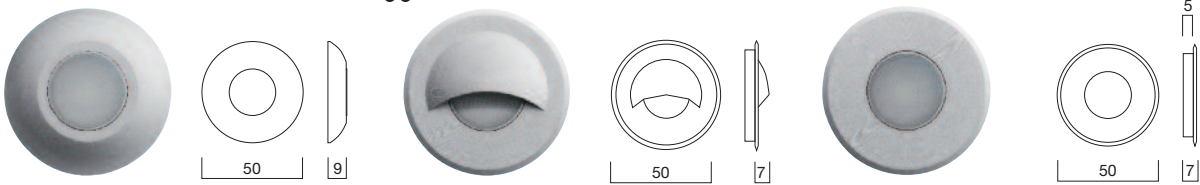

Part Code
Description
Finish
Materials
Weight

LED2DOME
Via DOME cover (wall)
AL ■
Bezel: Aluminium
0.02kg
(Constant voltage 24V)

LED2EYELID
Via EYELID cover (wall / recessed)
AL ■
Bezel: Aluminium
0.02kg

LED2FLUSH
Via FLUSH cover (wall / recessed / in-ground)
AL ■
Bezel: Aluminium
0.02kg

Power Supply

LEDPSU24020 20W 5 max. units
LEDPSU24100 100W 20 max. units

- Select a colour LED base unit, compatible for both Camino and Via covers.

- Simply push cover over the base unit. Camino is IP67 and suitable for external use.

- Alternatively, Via can simply click over the unit, suitable for internal applications.


1



2



3

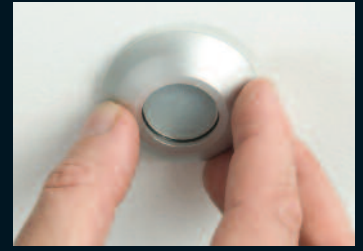


VISION OF THE WORLD, AND ALL THE WONDER




A stylish and contemporary LED feature fitting. Miniature design is ideal for defining distinctive interiors in diverse leisure and retail applications.

- Semi recessed
- Available in two sizes
- LED colour options

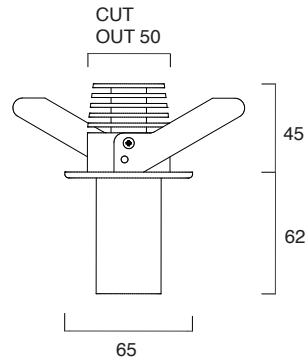

Part Code	DT0106WW	DT0106NW
Description	Tuub Warm White LED	Tuub Neutral White LED
Finish	AB ■	AB ■
Lamp Type	LED c/w LEDs	LED c/w LEDs
Power Supply Required	Power Supply Required	Power Supply Required
Wattage	6W	6W
Materials	Heatsink: Aluminium	Heatsink: Aluminium
Weight	0.13kg	0.13kg
Symbols	illumaled	illumaled
Power Supply	PSL12350 6-12W max.	

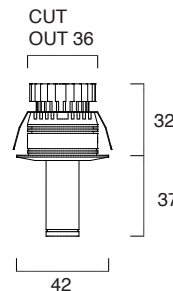

Part Code	DT0103BL	DT0103WW	DT0103NW
Description	Mini Tuub LED, Blue	Mini Tuub Warm White LED	Mini Tuub Neutral White LED
Finish	AB ■	AB ■	AB ■
Lamp Type	LED c/w LEDs	LED c/w LEDs	LED c/w LEDs
Power Supply Required	Power Supply Required	Power Supply Required	Power Supply Required
Wattage	3W	3W	3W
Materials	Heatsink: Aluminium	Heatsink: Aluminium	Heatsink: Aluminium
Weight	0.05kg	0.05kg	0.05kg
Symbols	illumaled	illumaled	illumaled
Power Supply	(Constant current 700mA)		
	PSL03700	1-3W Max	
	PSL12700	6-12W Max	
	PSL18700	10-18W Max	


Splitter Block	PSE6700(1000)	700mA 6 way extension (1m lead) c/w 3 x PSP700
	PSE2700(1000)	700mA 2 way extension (1m lead)
	PSP700	1 x close-loop plug for 700mA

For further information, see page 218 - 219



An unobtrusive decorative fixture with a timeless design.

- High output single 3W LED
- Brushed aluminium finish
- Integral converter/driver
- Discrete design


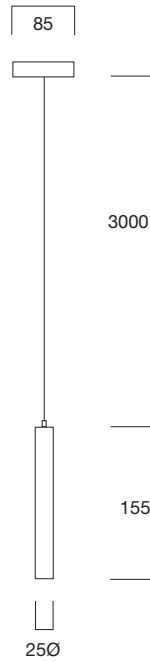






















Part Code	MP0315NW	MP0315WW
Description	Neutral White Micra	Warm White Micra
Finish	AB ■	AB ■
Lamp Type	LED	LED
	c/w Power Supply & LEDs ▶ 15°	c/w Power Supply & LEDs ▶ 15°
Wattage	1 x 3W	1 x 3W
Materials	Housing and Bezel: Aluminium.	Housing and Bezel: Aluminium.
Weight	0.41kg	0.41kg
Symbols	⚡ ⚙	⚡ ⚙





A classic ambient lighting solution with good diffusion and complimentary 'halo'.

- Enclosed IP65 construction
- Brushed aluminium finish



Part Code	DA3TC4181/EL	DA3TC4261/EL	DA3TD4161/EL	DA3TD4281/EL
Description	IP65 450mmØ	IP65 450mmØ	IP65 450mmØ	IP65 450mmØ
Finish	AB ■	AB ■	AB ■	AB ■
Lamp Type	TC-DEL 	TC-DEL 	TC-DD 	TC-DD 
Lamp Cap	Compact Fluorescent c/w Integral Electronic Gear	Compact Fluorescent c/w Integral Electronic Gear	Compact Fluorescent 	Compact Fluorescent 
Wattage	4 pin GX24-q2 1 x 18W	4 pin GX24-q1 2 x 13W	4 pin GR10q 1 x 16W	4 pin GR10q 1 x 28W
Materials	Housing and Diffuser: V-0 rated polycarbonate. Trim: Aluminium.	Housing and Diffuser: V-0 rated polycarbonate. Trim: Aluminium.	Housing and Diffuser: V-0 rated polycarbonate. Trim: Aluminium.	Housing and Diffuser: V-0 rated polycarbonate. Trim: Aluminium.
Weight	1.66kg	1.76kg	1.66kg	1.76kg
Symbols	  	  	   	   

ADD Suffix to Code for following options: /E Made to order pre-wired to a remote emergency pack

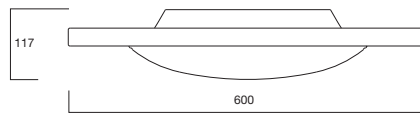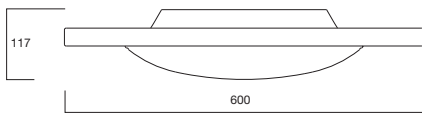

DA4TD4281/EL

IP65 600mmØ

AB ■

TC-DD

Compact Fluorescent
c/w Integral Electronic Gear
4 pin GR10q
1 x 28W

Housing and Diffuser:
V-0 rated polycarbonate.
Trim: Aluminium.
2.80kg



DA4TD4281/EL/E

IP65 600mmØ Maintained
Integral 3 hour Emergency

AB ■

TC-DD

Compact Fluorescent
4 pin GR10q
1 x 28W

Housing and Diffuser:
V-0 rated polycarbonate.
Trim: Aluminium.
3.70kg



DA4TD4381/EL

IP65 600mmØ

AB ■

TC-DD

Compact Fluorescent
c/w Integral Electronic Gear
4 pin GR10q
1 x 38W

Housing and Diffuser:
V-0 rated polycarbonate.
Trim: Aluminium.
2.80kg



DA4TD4381/EL/NI

IP65 600mmØ, 1 x 7W Night-light

AB ■

TC-DD / TC-S

Compact Fluorescent
c/w Integral Electronic Gear
TC-DD: 4-pin GR10q. TC-S: 2 pin G23.
1 x 38W + 1 x 7W Night-light




Housing and Diffuser:
V-0 rated polycarbonate.
Trim: Aluminium.
3.00kg



* Remote Emergency version cannot be wall mounted.



A robust solution for assorted functional interior and exterior ambient lighting applications.

- Robust IP65 construction
- Ceiling or wall mounting

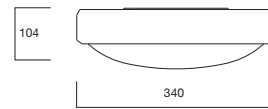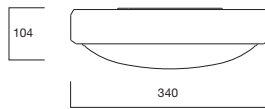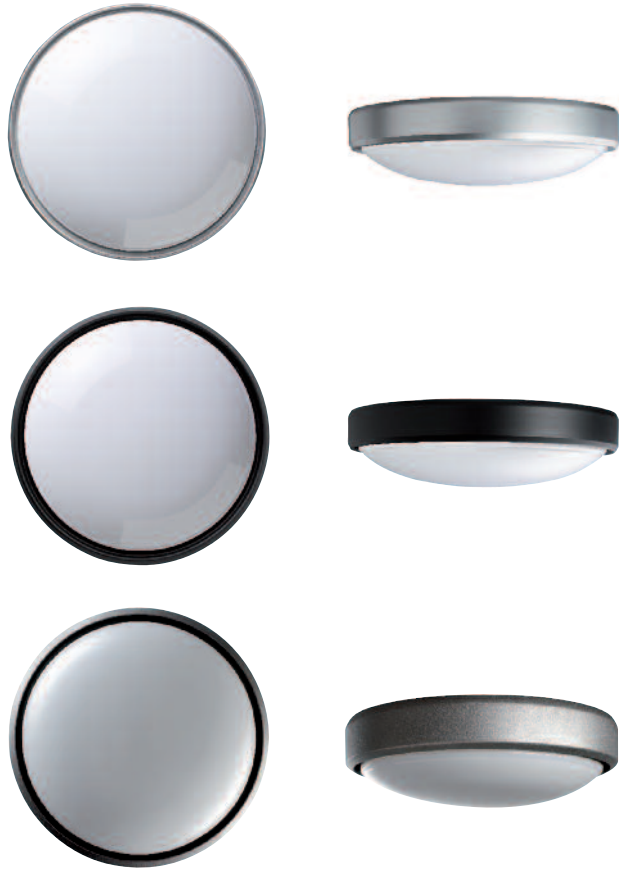

Part Code	DB3TC4181/EL	DB3TC4261/EL	DB3TD4161/EL	DB3TD4281/EL
Description	IP65 340mmØ	IP65 340mmØ	IP65 340mmØ	IP65 340mmØ
Finish	SG ■ BL ■ AG ■	SG ■ BL ■ AG ■	SG ■ BL ■ AG ■	SG ■ BL ■ AG ■
Lamp Type	TC-DEL Compact Fluorescent c/w Integral Electronic Gear	TC-DEL Compact Fluorescent c/w Integral Electronic Gear	TC-DD Compact Fluorescent c/w Integral Electronic Gear	TC-DD Compact Fluorescent c/w Integral Electronic Gear
Lamp Cap	4 pin GX24-q2	4 pin GX24-q1	4 pin GR10q	4 pin GR10q
Wattage	1 x 18W	2 x 13W	1 x 16W	1 x 28W
Materials	Housing and Diffuser: V-0 rated polycarbonate. Trim: Aluminium.	Housing and Diffuser: V-0 rated polycarbonate. Trim: Aluminium.	Housing and Diffuser: V-0 rated polycarbonate. Trim: Aluminium.	Housing and Diffuser: V-0 rated polycarbonate. Trim: Aluminium.
Weight	1.46kg	1.56kg	1.46kg	1.56kg
Symbols	⊕ ▲ ▲	⊕ ▲ ▲	⊕ e ▲ ▲	⊕ e ▲ ▲

ADD Suffix to Code for following options: /E Made to order pre-wired to a remote emergency pack

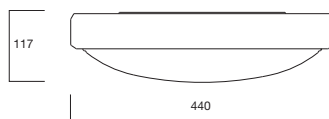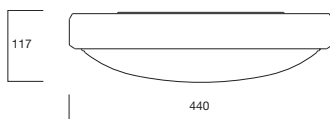


DB4TD4281/EL

IP65 440mmØ

SG ■ BL ■ AG ■

TC-DD

Compact Fluorescent 
c/w Integral Electronic Gear
4 pin GR10q
1 x 28W

Housing and Diffuser:
V-0 rated polycarbonate.
Trim: Aluminium.
2.40kg




DB4TD4281/EL/E

IP65 440mmØ Maintained
Integral 3 hour Emergency

SG ■ BL ■ AG ■

TC-DD

Compact Fluorescent 
4 pin GR10q
1 x 28W

Housing and Diffuser:
V-0 rated polycarbonate.
Trim: Aluminium.
3.30kg




DB4TD4381/EL

IP65 440mmØ

SG ■ BL ■ AG ■

TC-DD

Compact Fluorescent 
c/w Integral Electronic Gear
4 pin GR10q
1 x 38W

Housing and Diffuser:
V-0 rated polycarbonate.
Trim: Aluminium.
2.40kg





DB4TD4381/EL/NI

IP65 440mmØ, 1 x 7W Night-light

SG ■ BL ■ AG ■

TC-DD / TC-S

Compact Fluorescent  
c/w Integral Electronic Gear
TC-DD: 4-pin GR10q. TC-S: 2 pin G23.
1 x 38W + 1 x 7W Night-light

Housing and Diffuser:
V-0 rated polycarbonate.
Trim: Aluminium.
2.60kg





* Remote Emergency version
cannot be wall mounted.

A universal pendant, ceiling and wall range combining ambient lighting with distinct style.

- IP65 construction

- 'Halo' effect on ceiling & wall versions



Part Code	DC3TD4161/EL	DC3TD4281/EL	DC3TC4181/EL	DC3TC4261/EL
Description	Ceiling / Wall, IP65 600mmØ	Ceiling / Wall, IP65 600mmØ	Ceiling / Wall, IP65 600mmØ	Ceiling / Wall, IP65 600mmØ
Finish	SG ■	SG ■	SG ■	SG ■
Lamp Type	TC-DD Compact Fluorescent c/w Integral Electronic Gear	TC-DD Compact Fluorescent c/w Integral Electronic Gear	TC-DEL Compact Fluorescent c/w Integral Electronic Gear	TC-DEL Compact Fluorescent c/w Integral Electronic Gear
Lamp Cap	4 pin GR10q	4 pin GR10q	4 pin GR24q-2	4 pin GR24q-2
Wattage	1 x 16W	1 x 28W	1 x 18W	2 x 13W
Materials	Housing and Diffuser: V-0 rated polycarbonate. Trim: Aluminium.	Housing and Diffuser: V-0 rated polycarbonate. Trim: Aluminium.	Housing and Diffuser: V-0 rated polycarbonate. Trim: Aluminium.	Housing and Diffuser: V-0 rated polycarbonate. Trim: Aluminium.
Weight	1.90kg	2.00kg	1.90kg	2.00kg
Symbols	⊕ ▲ ▲	⊕ ▲ ▲	⊕ ▲ ▲	⊕ ▲ ▲



DCS4TD4381/EL(3000)

Pendant 800mmØ 3m Adjustable suspensions
SG ■

TC-DD

Compact Fluorescent
c/w Integral Electronic Gear



4 pin GR10q

1 x 38W

Housing and Diffuser:
V-0 rated polycarbonate.
Trim: Aluminium.

6.11kg



DCS4TC4521/EL(3000)

Pendant 800mmØ 3m Adjustable suspensions
SG ■

TC-D

Compact Fluorescent
c/w Integral low loss switch gear start




2 pin G24d-3

2 x 26W

Housing and Diffuser:
V-0 rated polycarbonate.
Trim: Aluminium.



5.71kg

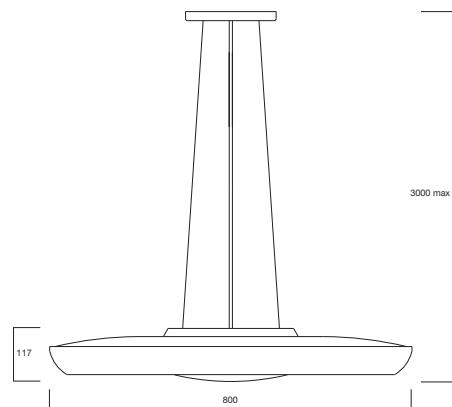







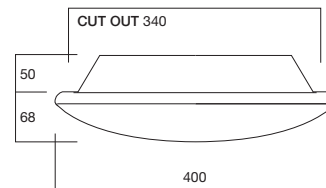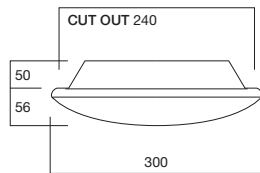









LUMASEAL

A tough contender for numerous general and ambient lighting solutions. IP65 construction makes it suitable for interior wet environments as well as exterior usage.

- High impact resistance
- Surface or semi-recessed mounting options
- Night-light options provide low level lighting at night in buildings for added security and safety



Part Code	DL3TC4181/EL	DL3TC4261/EL	DL4TC4361/EL	DL4TC4521/EL
Description	IP65 300mmØ	IP65 300mmØ	IP65 400mmØ	IP65 400mmØ
Finish	WH □	WH □	WH □	WH □
Lamp Type	TC-DEL 	TC-DEL 	TC-DEL 	TC-DEL 
	Compact Fluorescent	Compact Fluorescent	Compact Fluorescent	Compact Fluorescent
	c/w Integral Electronic Control Gear	c/w Integral Electronic Control Gear	c/w Integral Electronic Control Gear	c/w Integral Electronic Control Gear
Lamp Cap	2-pin G24d-2	2-pin G24d-2	2-pin G24d-2	2-pin G24d-2
Wattage	1 x 18W	2 x 13W	2 x 18W	2 x 26W
Materials	Housing and Diffuser: V-0 rated polycarbonate.	Housing and Diffuser: V-0 rated polycarbonate.	Housing and Diffuser: V-0 rated polycarbonate.	Housing and Diffuser: V-0 rated polycarbonate.
Weight	1.00kg	1.10kg	1.90kg	3.20kg
Symbols				
Part Code	DL3TD4161/EL	DL3TD4281/EL	DL4TD4381/EL	DL4TD4281/EL
Description	IP65 300mmØ	IP65 300mmØ	IP65 400mmØ	IP65 400mmØ
Finish	WH □	WH □	WH □	WH □
Lamp Type	TC-DD 	TC-DD 	TC-DD 	TC-DD 
	Compact Fluorescent	Compact Fluorescent	Compact Fluorescent	Compact Fluorescent
	c/w Integral Electronic Control Gear	c/w Integral Electronic Control Gear	c/w Integral Electronic Control Gear	c/w Integral Electronic Control Gear
Lamp Cap	2-pin GR8	2-pin GR8	2-pin GR8	2-pin GR8
Wattage	1 x 16W	1 x 28W	1 x 38W	1 x 28W
Materials	Housing and Diffuser: V-0 rated polycarbonate.	Housing and Diffuser: V-0 rated polycarbonate.	Housing and Diffuser: V-0 rated polycarbonate.	Housing and Diffuser: V-0 rated polycarbonate.
Weight	1.20kg	1.40kg	2.40kg	1.80kg
Symbols				

ADD Suffix to Code for following options: /E Made to order pre-wired to a remote emergency pack

- Easy to remove opal lens diffuser.

- Simply unscrew the hinge tray and lift...

- ...for easy wiring.

1



2



3



DL4TD4281/EL/E

IP65 400mmØ
Maintained integral 3 hour emergency
WH □

TC-DD
Compact Fluorescent



2-pin GR8
1 x 28W

Housing and Diffuser:
V-0 rated polycarbonate.
2.70kg



DL4TD4381/EL/NI

IP65 400mmØ
1 x 7W Night-light
WH □

TC-DD / TC-S
Compact Fluorescent
c/w Integral Electronic
Control Gear



TC-DD: 2-pin GR8. TC-S: 2 pin G23.
1 x 38W

Housing and Diffuser:
V-0 rated polycarbonate.
2.60kg




* Remote Emergency version
cannot be wall mounted.

DL4TD4381/EL/RE/NI

IP65 400mmØ
1 x 7W Night-light Remote emergency pack
WH □

TC-DD / TC-S
Compact Fluorescent




TC-DD: 2-pin GR8. TC-S: 2 pin G23.
1 x 38W + 1 x 7W Night-light

Housing and Diffuser:
V-0 rated polycarbonate.
4.60kg




Large wall mounted uplights providing indirect, glare-free lighting for modern commercial interiors.

- Unique 'Quick-Fix' bracket
- Metal halide version available with auxiliary lamp to give light during start-up
- Supplied white as standard, but other finishes available on request

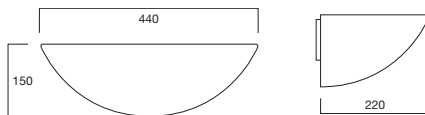

Upline Bowl

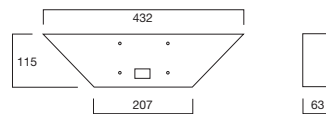

Emergency Pack


Part Code	U1TD018/EL	U1TD026/EL	U1TD036/EL	U1TD052/EL
Description	Upline CFL	Upline CFL	Upline CFL	Upline CFL
Finish	WH <input type="checkbox"/>	WH <input type="checkbox"/>	WH <input type="checkbox"/>	WH <input type="checkbox"/>
Lamp Type	TC-DEL	TC-DEL	TC-DEL	TC-DEL
Lamp Cap	Compact Fluorescent	Compact Fluorescent	Compact Fluorescent	Compact Fluorescent
Wattage	Integral Electronic Gear	Integral Electronic Gear	Integral Electronic Gear	Integral Electronic Gear
Materials	4-pin G24q-2	4-pin G24q-3	4-pin G24q-2	4-pin G24q-3
Weight	1 x 18W	1 x 26W	2 x 18W	2 x 26W
	Clear toughened glass	Clear toughened glass	Clear toughened glass	Clear toughened glass
	Housing: Steel.	Housing: Steel.	Housing: Steel.	Housing: Steel.
	Bowl: Aluminium.	Bowl: Aluminium.	Bowl: Aluminium.	Bowl: Aluminium.
	1.90kg	1.90kg	2.10kg	2.10kg
Part Code	U1HQ070/EL	U1HQ070/EL/AUX	U1HQ150/EL	U1HQ150/EL/AUX
Description	Upline Metal Halide	Upline Metal Halide 100W max. B15d Auxiliary lamp	Upline Metal Halide	Upline Metal Halide 100W max. B15d Auxiliary lamp
Finish	WH <input type="checkbox"/>	WH <input type="checkbox"/>	WH <input type="checkbox"/>	WH <input type="checkbox"/>
Lamp Type	CDM-TD / HQI-TS	CDM-TD / HQI-TS	CDM-TD / HQI-TS	CDM-TD / HQI-TS
Lamp Cap	Metal Halide	Metal Halide	Metal Halide	Metal Halide
Wattage	Integral Electronic Gear	Integral Electronic Gear	Integral Electronic Gear	Integral Electronic Gear
Materials	Rx7s	Rx7s	Rx7s	Rx7s
Weight	70W	70W	150W	150W
	Clear toughened glass	Clear toughened glass	Clear toughened glass	Clear toughened glass
	Housing: Steel.	Housing: Steel.	Housing: Steel.	Housing: Steel.
	Bowl: Aluminium.	Bowl: Aluminium.	Bowl: Aluminium.	Bowl: Aluminium.
	3.30kg	3.50kg	4.20kg	4.40kg

ADD Suffix to Code for following options: /ELDA 1-10V Analogue dimmable ballast (Metal Halide version dims down to 55% minimum)
/ELDD Digital dimmable/Switch DIM.

**U1ECG13**

Upline CFL
Self-contained Emergency pack
3-hour non-maintained
WH

TC-DEL

Compact Fluorescent 
Integral Electronic Gear
4-pin G24q-1

13W


Clear toughened glass
Housing: Steel.
Bowl: Aluminium.

2.00kg

**U1ECG13/M3**

Upline CFL
Self-contained Emergency pack
3-hour maintained
WH

TC-DEL

Compact Fluorescent 
Integral Electronic Gear
4-pin G24q-1

13W

Clear toughened glass
Housing: Steel.
Bowl: Aluminium.

2.10kg




ZEDOS PM

An ambient lighting range for universal application which incorporates a subtle decorative light spill feature.

- Opal lens with even diffusion
- Ceiling/wall and semi-wall models
- Integral emergency versions



Ceiling / Wall

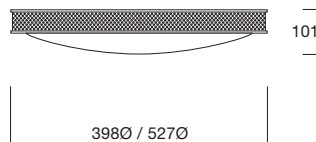



Part Code	681615	681615/EM	682115	682115/EM
Description	398mmØ Ceiling / Wall mounted	398mmØ Ceiling / Wall Maintained 3 hour emergency	527mmØ Ceiling / Wall mounted	527mmØ Ceiling / Wall Maintained 3 hour emergency
Finish	WH □ SN ■	WH □ SN ■	WH □ SN ■	WH □ SN ■
Lamp Type	TC-DE	TC-DE	TC-DE	TC-DE
	Compact Fluorescent c/w Integral Electronic Control Gear	Compact Fluorescent c/w Integral Electronic Control Gear	Compact Fluorescent c/w Integral Electronic Control Gear	Compact Fluorescent c/w Integral Electronic Control Gear
Lamp Cap	G24q-3	G24q-3	G24q-3	G24q-3
Wattage	2 x 26W	2 x 26W	2 x 26W	2 x 26W
Materials	Body and Trim: Steel and aluminium. Diffuser: Opal acrylic or polycarbonate.	Body and Trim: Steel and aluminium. Diffuser: Opal acrylic or polycarbonate.	Body and Trim: Steel and aluminium. Diffuser: Opal acrylic or polycarbonate.	Body and Trim: Steel and aluminium. Diffuser: Opal acrylic or polycarbonate.
Weight	1.80kg	3.00kg	2.50kg	3.70kg
Symbols				

ADD Suffix to Code for following Diffuser options:

/OP Opal Acrylic

/PC Opal Polycarbonate

/PR Prismatic Polycarbonate



398

Semi-wall

681513

398mmØ Semi-wall


WH SN

TC-DE 

Compact Fluorescent
c/w Integral Electronic
Control Gear

G24q-3

1 x 26W



199

100

Body and Trim:
Steel and aluminium.
Diffuser: Opal acrylic
Dust Cover: Clear Polycarbonate

1.80kg



ADD Suffix to Code for following

Dust Cover options: /OC Opal Dust Cover


TRILOGY HALO

A graceful programme of decorative ambient lighting elements for applications in commercial and leisure environments.


- Opal lens with even diffusion
- Pendant, ceiling and wall mounting
- Integral emergency versions





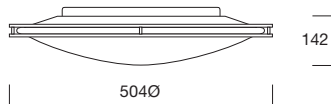



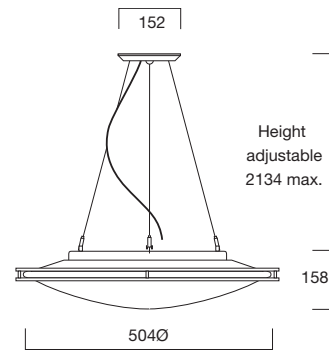

Ceiling / Wall



Pendant



Part Code	638855	638855/EM	639803/HR	639803/EM
Description	504mmØ	504mmØ Maintained 3 hour integral emergency	504mmØ Bi-direct	504mmØ Bi-direct Maintained 3 hour integral emergency
Finish	SN ■	SN ■	SN ■	SN ■
Lamp Type	TC-DE  Compact Fluorescent c/w Integral Electronic Control Gear	TC-DE  Compact Fluorescent c/w Integral Electronic Control Gear	TC-TEL  Compact Fluorescent c/w Integral Electronic Control Gear	TC-TEL  Compact Fluorescent c/w Integral Electronic Control Gear
Lamp Cap	G24q-3	G24q-3	GX24-q-4 	GX24-q-4 
Wattage	2 x 26W	2 x 26W	2 x 42W	2 x 42W
Materials	Body and Trim: Steel and aluminium. Diffuser: 3 ply satin opal glass.	Body and Trim: Steel and aluminium. Diffuser: 3 ply satin opal glass.	Body and Trim: Steel and aluminium. Diffuser: 3 ply satin opal glass.	Body and Trim: Steel and aluminium. Diffuser: 3 ply satin opal glass.
Weight	4.85kg	6.05kg	6.50kg	7.70kg
Symbols				




*Product shown is the cradle version, available on request





REFLEKTOR

A classic indirect solution for open areas with high ceilings such as lobbies, foyers and halls.

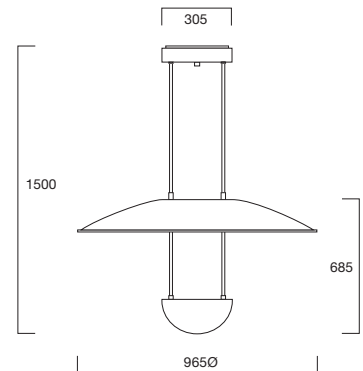- Fixed rod suspension

- CFL and ceramic metal halide versions




Part Code	206124/UH	206151/UH
Description	965mmØ Bi-Direct with uplight hole	965mmØ Bi-Direct with uplight hole
Finish	WH □	WH □
Lamp Type	TC-TEL  Compact Fluorescent c/w Integral Electronic Control Gear	CDM-TP  Metal Halide c/w Integral Electronic Control Gear
Lamp Cap	GX24q-4	PGX 12-2
Wattage	4 x 42W 	1 x 150W 
Materials	Body and Trim: Steel and aluminium. Internal Reflector: Specular aluminium.	Body and Trim: Steel and aluminium. Internal Reflector: Specular aluminium.
Weight	12.40kg	12.40kg




*Product shown uses wire suspension system. Standard version supplied with fixed rod suspension



A contemporary pendant design which incorporates direct and diffused lighting components. The clear diffuser and etched band mask a faceted reflector.

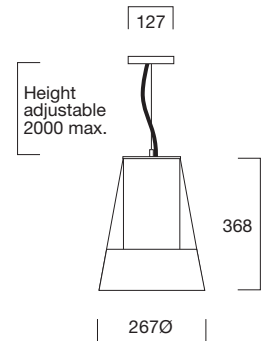- Adjustable suspension height
- Universal feature lighting application




Part Code	440902	440902/EM
Description	267mmØ	267mmØ Remote maintained 3 hour emergency
Finish	WH <input type="checkbox"/>	WH <input type="checkbox"/>
Lamp Type	TC-TEL  Compact Fluorescent c/w Integral Electronic Control Gear	TC-TEL  Compact Fluorescent c/w Integral Electronic Control Gear
Lamp Cap	GX24q-4	GX24q-4
Wattage	1 x 26 / 32 / 42W	1 x 26 / 32 / 42W
Materials	Outer Diffuser: Clear acrylic with etched lower band. Internal Diffuser: Opal acrylic. Reflector: Aluminium Frosted Finish with Vertical facets.	Outer Diffuser: Clear acrylic with etched lower band. Internal Diffuser: Opal acrylic. Reflector: Aluminium Frosted Finish with Vertical facets.
Weight	2.00kg	2.00kg + 1.20kg
Symbols		 *Maximum suspension is 500mm



A versatile ambient solution for enhancing wall mounted applications. Shallow convex profile.

- Diffused direct and soft spill light
- Integral emergency versions

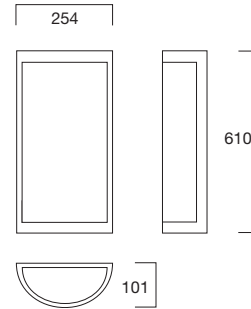


Part Code	611105	611105/EM
Description	Direct / Bi-directional spill c/w clear dust covers	Direct / Bi-directional spill Maintained 3 hour emergency c/w clear dust covers
Finish	SN ■	SN ■
Lamp Type	TC-EL Compact Fluorescent c/w Integral Electronic Control Gear	TC-EL Compact Fluorescent c/w Integral Electronic Control Gear
Lamp Cap	2G11	2G11
Wattage	1 x 36W	1 x 36W
Materials	Body and Trim: Steel and aluminium. Diffuser: Opal acrylic.	Body and Trim: Steel and aluminium. Diffuser: Opal acrylic.
Weight	8.00kg	9.20kg
Symbols		




An understated ambient lighting design for wall mounted applications.


- Diffused direct and soft spill light
- Integral emergency versions

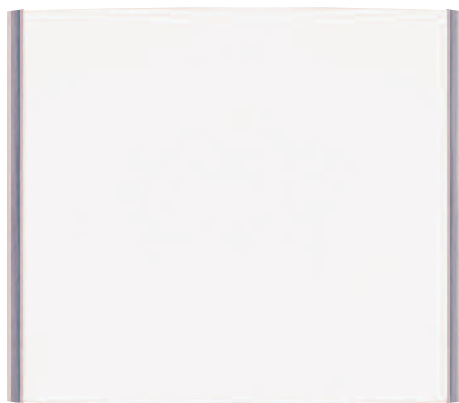

Axalis SQ



Axalis TL

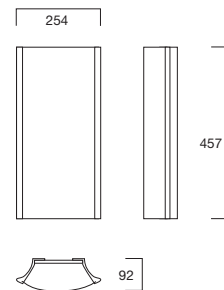

Part Code	701004/OP	701004/OP/EM	701103/OP	701103/OP/EM
Description	Opal Diffuser Direct / Bi-directional spill	Opal Diffuser Direct / Bi-directional spill Maintained 3 hour emergency	Opal Diffuser Direct / Bi-directional spill	Opal Diffuser Direct / Bi-directional spill Maintained 3 hour emergency
Finish	AB ■	AB ■	AB ■	AB ■
Lamp Type	TC-DE Compact Fluorescent c/w Integral Electronic Control Gear	TC-DE Compact Fluorescent c/w Integral Electronic Control Gear	TC-EL Compact Fluorescent c/w Integral Electronic Control Gear	TC-EL Compact Fluorescent c/w Integral Electronic Control Gear
Lamp Cap	G24q-3	G24q-3	2G11	2G11
Wattage	1 x 26W	1 x 26W	1 x 36W	1 x 36W
Materials	Body and Trim: Steel and aluminium. Diffuser: Opal acrylic. Dust Covers: Clear Polycarbonate	Body and Trim: Steel and aluminium. Diffuser: Opal acrylic. Dust Covers: Clear Polycarbonate	Body and Trim: Steel and aluminium. Diffuser: Opal acrylic. Dust Covers: Clear Polycarbonate	Body and Trim: Steel and aluminium. Diffuser: Opal acrylic. Dust Covers: Clear Polycarbonate
Weight	2.00kg	3.20kg	3.10kg	4.30kg
Symbols				

ADD Suffix to Code for following
Dust Cover options: /OC Opal Dust Cover



*Trim claws (shown above) are not included as standard