



JASON

POLYURETHANE TIMING BELTS



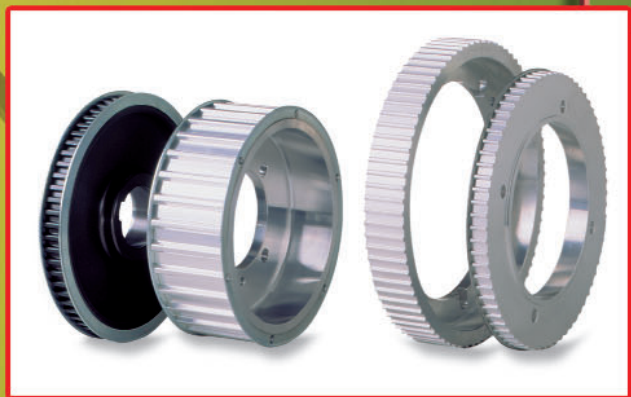




TABLE OF CONTENTS

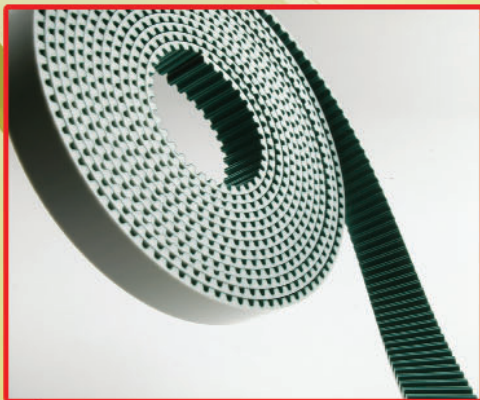

MEGAPOWER[®]

PU Endless Timing Belts


3 - 6



MEGALINEAR[®]

PU Open-End Timing Belts


7 - 10



MEGAFLEX[®]

PU Truly Endless Timing Belts

11 - 14



MEGARIB[®]

PU Endless Megarib Belts

15 - 16



MEGAFLAT[®]

PU and Rubber Endless Flat Belts

17 - 18



SPECIAL

Any Special Pitches, Custom-Made Coatings & Profiles

19 - 20



PULLEYS/ CLAMPING PLATES

Custom-Made and Standard Pulleys & Clamping Plates

21 - 22

JASON POLYURETHANE TIMING BELTS

Jason Industrial® is a Megadyne Group company that manufactures and delivers a comprehensive inventory of rubber and polyurethane synchronous belts, rubber v-belts, industrial hose and couplings, plus hardware to the industrial community worldwide.

When extraordinary needs require specialized components, we will work with you from prototype to production, creating custom solutions that suit your unique application.

As a Jason customer, you can feel confident in the quality and integrity of our products, the speed and efficiency at which they are delivered, and the expertise and customer focus that our local representatives are committed to providing.


Jason's corporate headquarters is based in Fairfield, New Jersey. Our distribution center is located just outside of Chicago, Illinois, with additional corporate offices in Canada, Mexico and Brazil, as well as manufacturing, warehousing and distribution centers in cities across the globe.


Welcome to Jason...the first name in mechanical rubber and urethane products that power industry forward.





MEGAPOWER[®]
PU Endless Timing Belts

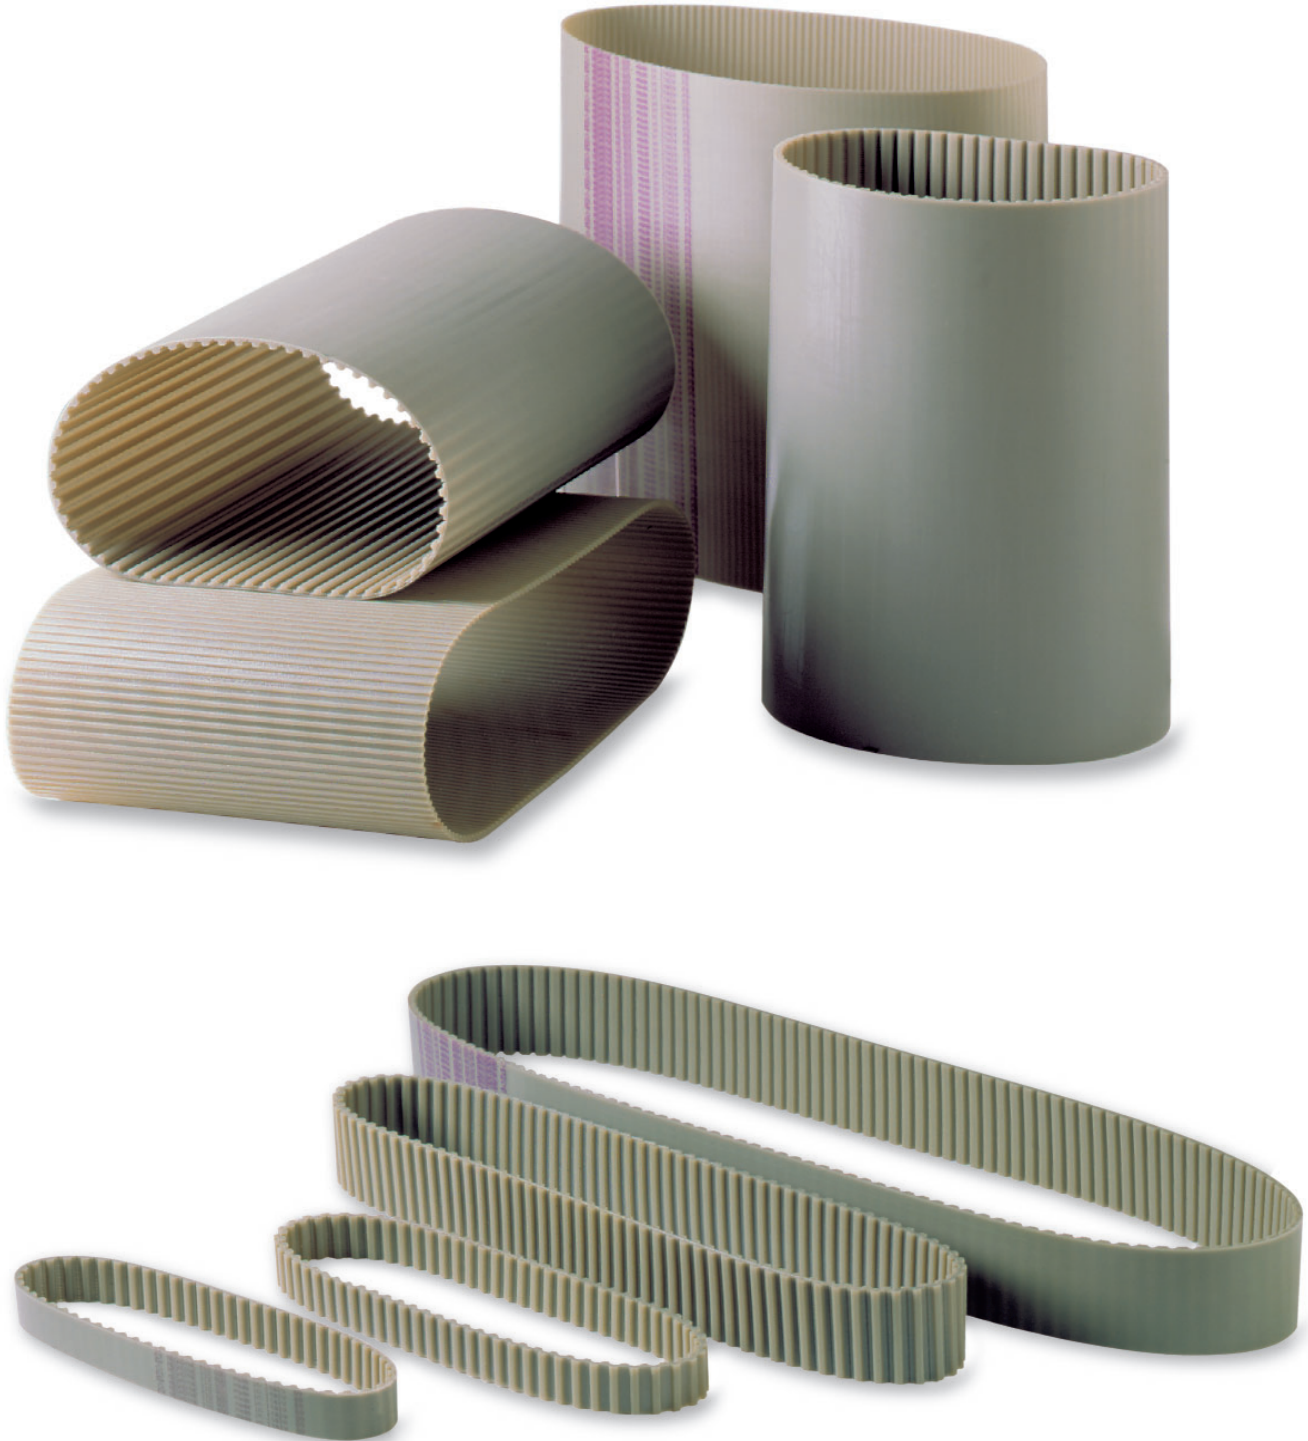

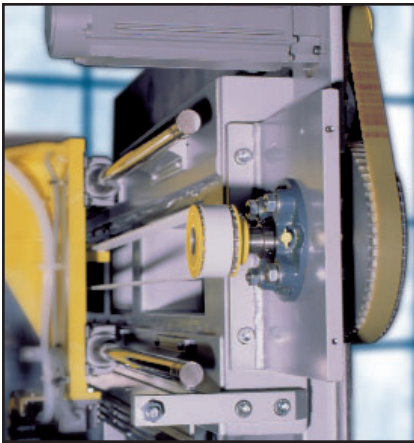

MEGAPOWER timing belts are manufactured by a unique thermoset molding process.

The high-grade polyurethane gives excellent abrasion and shear resistance, combined with a variety of graded steel cords, ensuring high strength and tractive resistance. The result is a timing belt with excellent dimensional stability. Megapower molded timing belts are manufactured to a tight tolerance range, which assures consistent length and thickness.

The combination of these factors results in Megapower, performing to the highest physical and chemical levels.

Special compounds and cords have to be tested and homologated on the application. Jason is not responsible for wrong functioning of special products.

MEGAPOWER PU belts are suitable for high power, precision motion and control even with high speed.




MECHANICAL features:

- Consistent
- Low pre-tension
- Low noise
- High abrasion resistance
- Low maintenance
- High flexibility
- Linear speeds up to 80 m/second

CHEMICAL features:

- Good resistance to aging, hydrolisis, UVA rays & ozone
- Working temperature: -25° C to + 80° C (up to +110° C for short periods)
- High resistance to oils, fats and greases
- Good resistance to most acids and Alkalis

MEGAPOWER PU belts perform especially well on light synchronized and stepped drives, in office automation and domestic appliance applications.

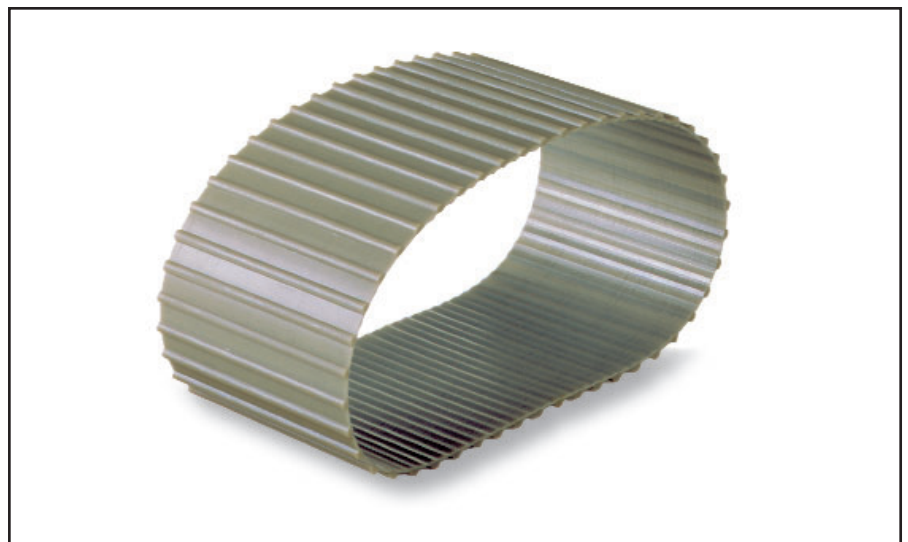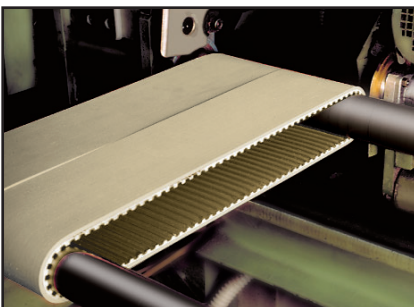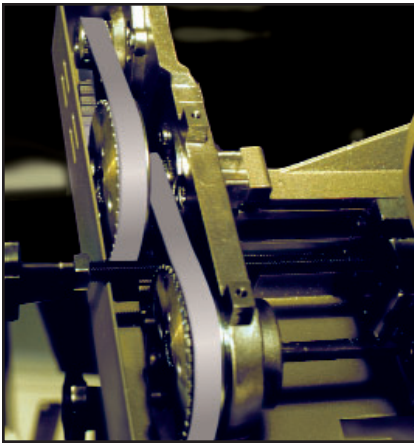




MEGAPOWER®


PU Endless Timing Belts

We can cut any Megapower Belt width up to 300mm


T2 - T2.5 - T5 - T10

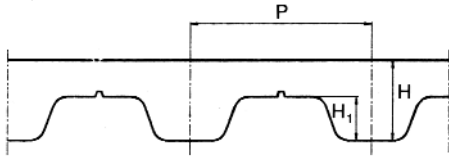


T5 - T10* available without nose

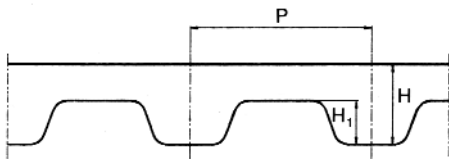


T2.5 DL - T5 DL - T10 DL

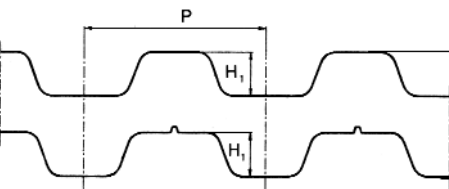

AT5 - AT10

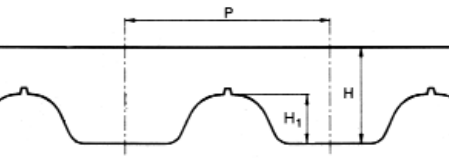

MXL - XL - L - H

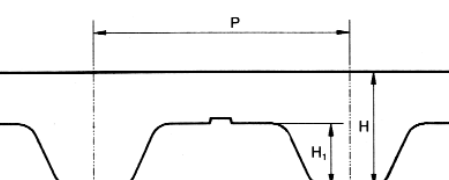

T2.5

Std. width (mm)

4/6/8/10/12

T5

Std. width (mm)

6/8/10/12/16/20/25

T10

Std. width (mm)

10/12/16/20/25/32/50/75

T2.5 DL

Std. width (mm)

4/6/8/10/12

T2.5

Code Pitch Length (mm)

120	120
145	145
160	160
177.5	177.5
180	180
182.5	182.5
200	200
230	230
245	245
265	265
285	285
290	290
305	305
317.5	317.5
330	330
380	380
420	420
480	480
500	500
540	540
600	600
620	620
650	650
680	680
700	700
780	780
880	880
915	915
950	950
1185	1185

P	2.5
H	1.3
H ₁	0.7

T2

Std. width (mm)

4/6/8/10/12

T2

Code Pitch Length (mm)

180	180
200	200
288	288
P	2
H	1.1
H ₁	0.5

T5

P	5
H	2.2
H ₁	1.2

T5

Code Pitch Length (mm)

120	120
150	150
165	165
180	180
185	185
200	200
210	210
215	215
220	220
225	225
245	245
250	250
255	255
260	260
270	270
275	275
280	280
295	295
305	305
330	330
340	340
350	350
355	355
365	365
390	390
400	400
410	410
420	420
425	425
440	440
445	445
450	450
455	455
460	460
475	475
480	480
500	500
510	510
515*	515*
525	525
545	545
550	550
560	560
560*	560*
575	575
590	590
610	610
620	620
630	630
640	640
650	650
660	660
675	675
690	690
700	700
720	720
725	725
750	750
765	765
780	780
800	800
815	815
830	830
840	840
850	850
860	860
885	885
900	900
940	940
990	990
1075	1075
1100	1100
1160	1160
1200	1200
1215	1215
1275	1275
1280	1280
1315	1315
1355	1355
1380	1380
1440	1440
1470	1470
1500	1500
1580	1580
1955	1955

T10

Code Pitch Length (mm)

260	260
340	340
370	370
390	390
400	400
410	410
440	440
450	450
480	480
500	500
530	530
550	550
560	560
600	600
600*	600*
610	610
630	630
630*	630*
650	650
660	660
680	680
690	690
700	700
720	720
720*	720*
730	730
750	750
780	780
800*	800*
810	810
840	840
850	850
880	880
890	890
900	900
900*	900*
910	910
920	920
920*	920*
950	950
960	960
970	970
980	980
1010	1010
1080	1080
1100	1100
1110	1110
1140	1140
1150	1150
1200	1200
1210	1210
1240	1240
1250	1250
1300	1300
1320	1320
1350	1350
1390	1390
1400	1400
1420	1420
1440	1440
1450	1450
1460	1460
1500	1500
1560	1560
1610	1610
1700	1700
1750	1750
1780	1780
1880	1880
1960	1960
2250	2250
P	5
H	2.2
H ₁	1.2

T2.5 DL

Code Pitch Length (mm)

457.5 DL	457.5
P	2.5
H	1.3
H ₁	0.7

T5 DL

Std. width (mm)

6/8/10/12/16/20/25

T5 DL

Code Pitch Length (mm)

410 DL	410
460 DL	460
590 DL	590
620 DL	620
685 DL	685
750 DL	750
815 DL	815
840 DL	840
860 DL	860
940 DL	940
1100 DL	1100
P	5
H	2.2
H ₁	1.2

T10 DL

Std. width (mm)

10/12/16/20/25/32/50/75

T10 DL

Code Pitch Length (mm)

260 DL	260
530 DL	530
630 DL	630
660 DL	660
720 DL	720
840 DL	840
920 DL	920
980 DL	980
1100 DL	1100
1210 DL	1210
1240 DL	1240
1250 DL	1250
1320 DL	1320
1350 DL	1350
1420 DL	1420
1610 DL	1610
1880 DL	1880
P	10
H	4.5
H ₁	2.5

MEGAPOWER®


PU Endless Timing Belts



We can cut any Megapower Belt width up to 300mm

AT5 Std. width (mm)	AT10 Std. width (mm)	MXL Std. width (mm)	XL Std. width (mm)	L Std. width (mm)	H Std. width (mm)
6/8/10/12/16/20/25	10/12/16/20/25/32/50/75	3.2/4.8/6.4	6.4/7.9/9.4	12.7/19.1/25.4	19.1/25.4/38.1/50.8/76.2




AT5 Code Pitch Length (mm)		AT10 Code Pitch Length (mm)		MXL Code Pitch Length (mm)		XL Code Pitch Length (mm)		L Code Pitch Length (mm)		H Code Pitch Length (mm)	
225	225	370	370	80055	111.7	60	152.4	86	218.6	230	584.2
255	255	500	500	80057	115.8	70	177.8	124	314.3	240	609.6
275	275	560	560	80060	121.9	76	193.0	150	381.0	270	685.8
280	280	580	580	80070	142.2	80	203.2	173	438.1	300	762.0
300	300	600	600	80072	146.3	90	228.6	187	476.2	330	838.2
330	330	610	610	80075	152.4	100	254.0	202	514.4	360	914.4
340	340	660	660	80076	154.4	110	269.4	210	533.4	390	990.6
375	375	700	700	80079	160.5	120	304.8	225	571.5	420	1066.8
390	390	730	730	80080	162.5	130	330.2	240	609.6	450	1143.0
420	420	780	780	80082	166.6	134	340.3	255	647.7	480	1219.2
450	450	800	800	80088	178.8	140	355.6	270	685.8	510	1295.4
455	455	810	810	80091	184.9	150	381.0	285	723.9		
480	480	840	840	80092	186.9	160	406.4	300	762.0	P	12.7
500	500	880	880	80096	195.1	170	431.8	322	817.9	H	4.3
525	525	890	890	80101	205.2	180	457.2	345	876.3	H1	2.29
545	545	920	920	80102	207.2	190	482.6	367	933.4		
600	600	960	960	80103	209.2	194	492.7	390	990.6		
610	610	980	980	80105	213.3	200	508.0	420	1066.8		
630	630	1000	1000	80110	223.5	210	533.4	450	1143.0		
660	660	1010	1010	80114	231.6	220	558.8	480	1219.2		
670	670	1050	1050	80118	239.7	230	584.2	510	1295.4		
710	710	1080	1080	80120	243.8	240	609.6	540	1371.6		
720	720	1100	1100	80130	264.1	250	635.0	570	1447.8		
750	750	1150	1150	80132	268.2	260	660.4	600	1524.0		
780	780	1200	1200	80135	274.3	270	685.8				
825	825	1210	1210	80140	284.4	288	731.5	P	9.525		
860	860	1220	1220	80145	294.6	290	736.6	H	3.6		
975	975	1230	1230	80150	304.8	300	762.0	H1	1.9		
1050	1050	1240	1240	80155	314.9	356	904.2				
1125	1125	1250	1250	80175	355.6	414	1051.5				
1500	1500	1280	1280	80190	386.5	450	1143.0				
2000	2000	1300	1300	80200	406.8	566	1437.6				
		1320	1320	80221	449.1						
		1350	1350	80256	520.1	P	5.080				
		1360	1360	80280	568.9	H	2.25				
		1400	1400	80285	579.1	H1	1.25				
		1420	1420	80308	625.8						
		1480	1480	80332	674.6						
		1500	1500	80352	715.2						
		1600	1600	80360	731.5						
		1630	1630	80395	802.6						
		1700	1700	80405	822.9						
		1720	1720	80412	837.1						
		1800	1800	80432	877.8						
		1860	1860	80454	922.5						
		1940	1940	80485	985.5						
		P	10	P	2.032						
		H	4.5	H	1.2						
		H1	2.5	H1	0.51						

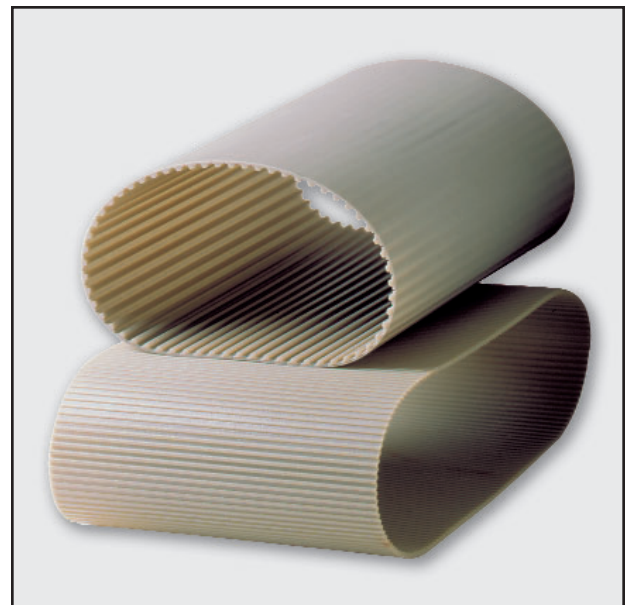



MEGALINEAR[®]

PU Open-End Timing Belts

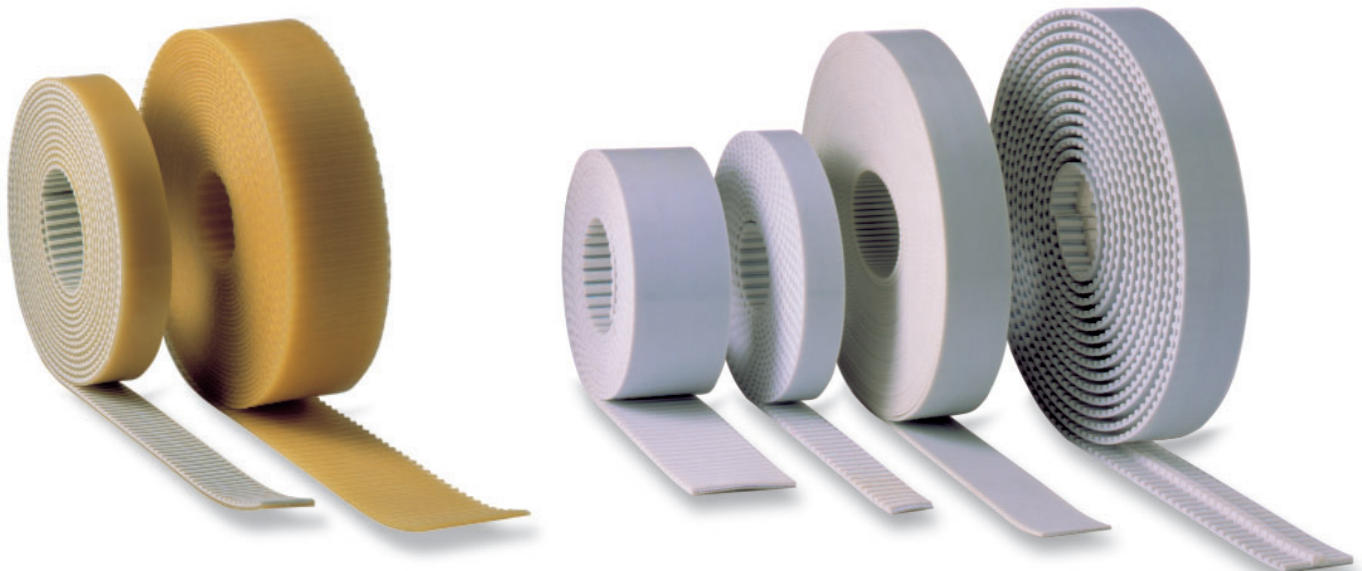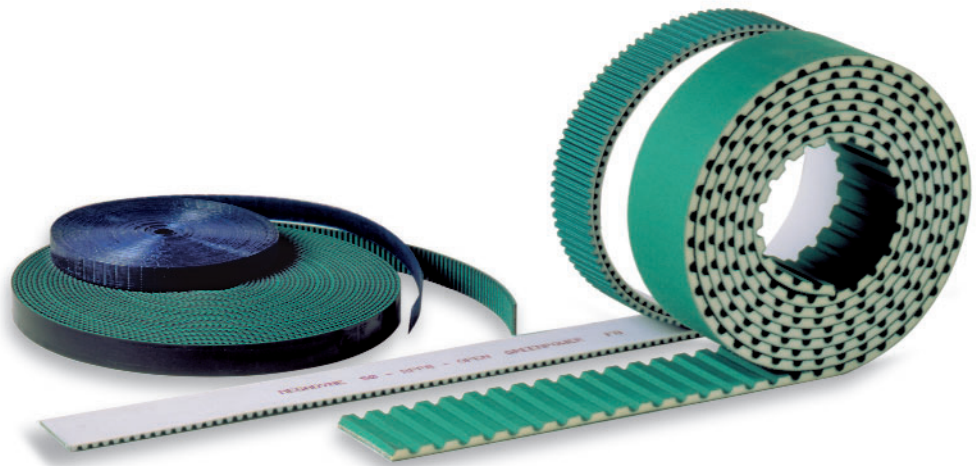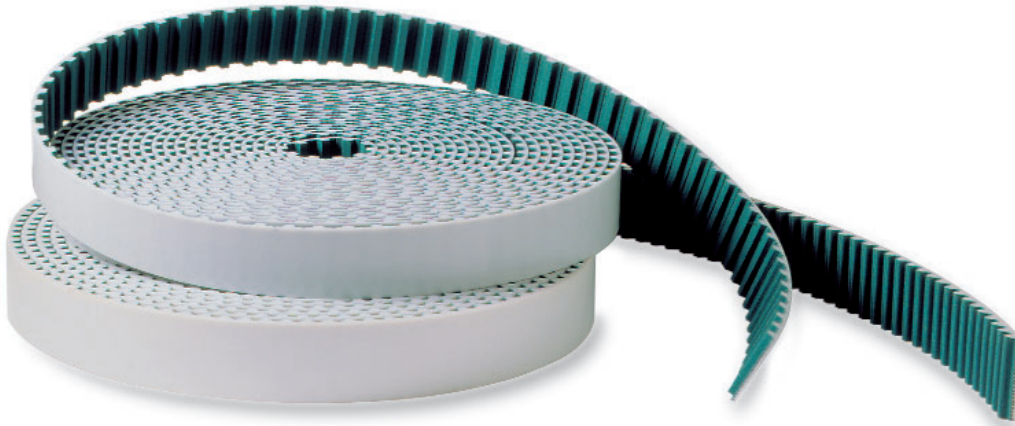



MEGALINEAR open length timing belts are manufactured in thermoplastic polyurethane, giving superior wear and abrasion resistance. Various grades of steel cords offer good running characteristics, even with high tractive loads.

Manufactured to tight tolerances, Megalinear delivers reliability and excellent dimensional stability. The addition of a nylon coating on the tooth and/or the back of the belt during production enhances the running properties for specific applications. An extra thickness of polyurethane is also possible on the back of the belt, offering extra protection against aggressive or heavy products.

MEGALINEAR offers the following features:

MECHANICAL features:

- Consistent dimensional stability
- Low pre-tension
- Low noise
- High abrasion resistance
- Low maintenance
- High flexibility
- Linear speeds up to 80 m/second
- High precision linear positioning

CHEMICAL features:

- Good resistance to aging, hydrolisis, UVA rays & ozone
- Working temperature: -25° C to + 80° C (up to +110° C for short periods)
- High resistance to oils, fats and greases
- Good resistance to most acids and Alkalis
- Compatible for fabrication with other thermoplastic materials.

MEGALINEAR can be supplied as open length rolls, or as endless spliced belts.

OPEN LENGTH BELTS

These are manufactured as continuous lengths, with the reinforcement in a parallel configuration. Standard roll lengths are 50 or 100 meters. Other lengths available upon request.



MEGALINEAR belts as an open length are normally used in linear motion drives.

ENDLESS SPLICED BELTS

By splicing, using the thermoplastic properties of the open length belt, endless belts can be produced to any length by welding. The finished splice is resistant to fatigue from flexing and tension due to the unique symmetrical Vee shaped pattern of the splice.

Endless spliced belts are suitable for conveying applications, particularly when indexing and/or positive drive is required. Supplementary application of flights, profiles and coatings is possible, to suit specific applications.

MEGALINEAR is also available with alternative reinforcement cords such as, Kevlar (K), High Flex (HF), High Performance (HP) and High Performance Flex (HPF).

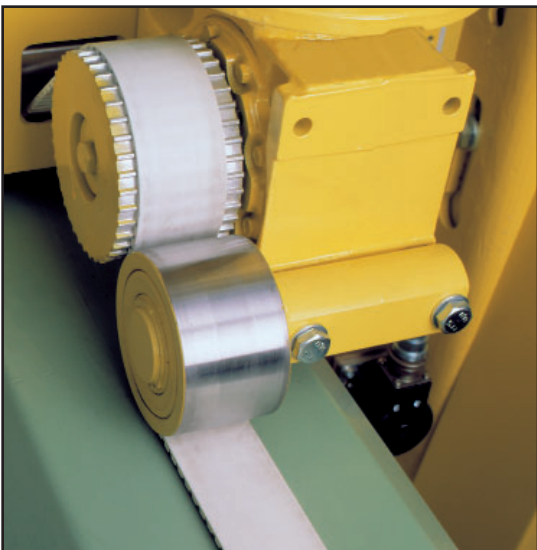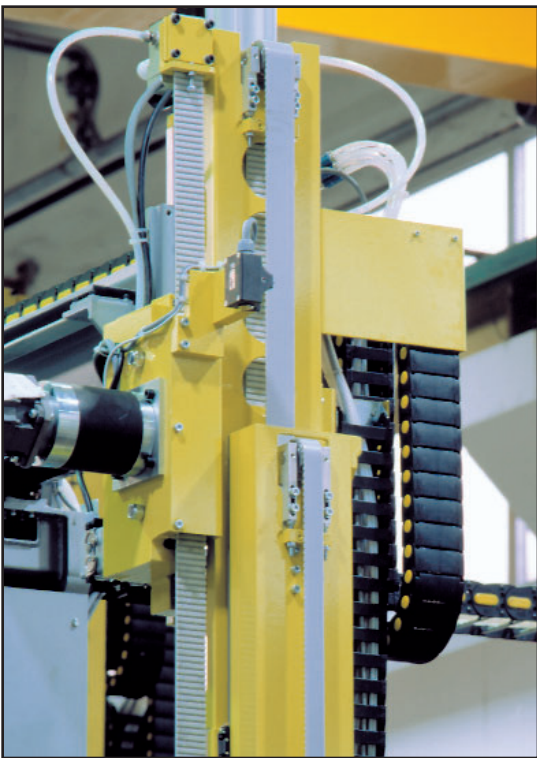





MEGALINEAR®

PU Open-End Timing Belts


T5 - T10 - T20

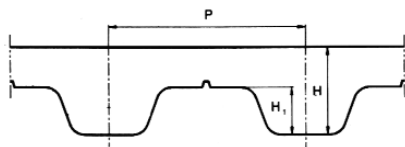


AT3 - AT5 - AT10 - AT20

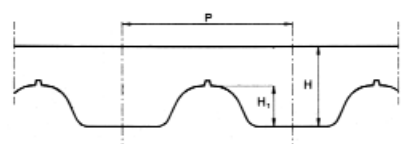


MTD 3M - MTD 5M - MTD 8M - MTD 14M

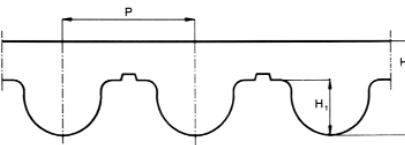


STD 5M - STD 8M

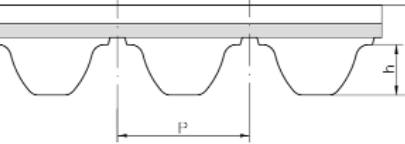


RPP5 - RPP8 - RPP14

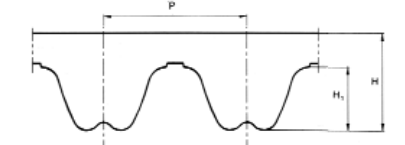


XL - L - H - XH

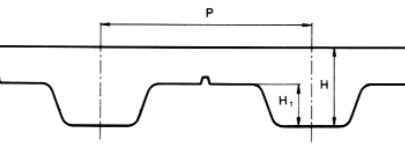

P1 - P2 - P4

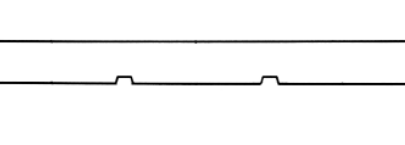

TG5 - TG10 - TG20 - ATG10 - ATG20 - HG

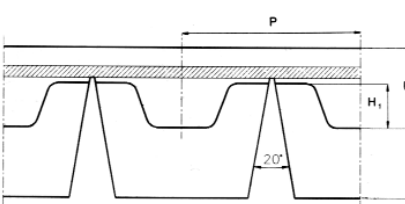

MTD 3M Std. width (mm)

10
20
25
50

P	3
H	2.2
H ₁	1.13

MTD 5M Std. width (mm)

10
15
25
50

P	5
H	3.6
H ₁	2.1

MTD 8M Std. width (mm)

10
15
20
30
50
85
100

P	8
H	5.6
H ₁	3.4

MTD 14M Std. width (mm)

25
40
55
85
100
115

P	14
H	10
H ₁	6.1

RPP5 Std. width (mm)

10
15
25
30
50

P	5
H	3.8
H ₁	2

RPP8 Std. width (mm)

10
15
20
30
50
85
100

P	8
H	5.4
H ₁	3.2

RPP14 Std. width (mm)

40
55
85
115
150

P	14
H	10
H ₁	6

TG5 K6 Std. width (mm)

25
32
50

P	5
H	2.2
H ₁	1.2
B	6
h	4

TG10 K6 Std. width (mm)

50

P	10
H	4.5
H ₁	2.5
B	6
h	3.3

TG10 K13 Std. width (mm)

25
32
50
75
100

P	10
H	4.5
H ₁	2.5
B	13
h	6.5

TG20 K13 Std. width (mm)

50
75
100

P	20
H	8
H ₁	5
B	13
h	5.5

ATG10 K13 Std. width (mm)

25
32
50
75
100
150

P	10
H	4.5
H ₁	2.5
B	13
h	7

ATG20 K13 Std. width (mm)

75
150

P	20
H	8
H ₁	5
B	13
h	6.4

HG K13 Std. width (in)

1.50
2.00
3.00
4.00

P	12.7
H	4.3
H ₁	2.29
B	13
h	6.29

MEGALINEAR®

PU Open-End Timing Belts



XL Std. width (in)	
0.25	
0.37	
0.50	
0.75	
1.00	
1.50	
2.00	
P	5.08
H	2.3
H _i	1.27

L Std. width (in)	
0.37	
0.50	
0.75	
1.00	
1.50	
2.00	
4.00	
P	9.525
H	3.6
H _i	1.90

H Std. width (in)	
0.50	
0.75	
1.00	
1.50	
2.00	
3.00	
4.00	
6.00	
P	12.7
H	4.3
H _i	2.29

H* Std. width (in)	
8.00	
200.00	
P	12.7
H	4.3
H _i	2.29

XH Std. width (in)	
1.00	
1.50	
2.00	
3.00	
4.00	
6.00	
P	22.225
H	11.2
H _i	6.35

T5 Std. width (mm)	
6	
10	
16	
25	
32	
50	
75	
100	
P	5
H	2.2
H _i	1.2

T10 Std. width (mm)	
12	
16	
25	
32	
50	
75	
100	
150	
P	10
H	4.5
H _i	2.5

T10* Std. width (mm)	
200	
250	
300	
400	
450	
500	
P	10
H	4.5
H _i	2.5

T20 Std. width (mm)	
25	
32	
50	
75	
100	
150	
P	20
H	8
H _i	5




AT3 Std. width (mm)	
10	
20	
25	
50	
P	3
H	1.9
H _i	1.1

AT5 Std. width (mm)	
6	
10	
16	
25	
32	
50	
75	
100	
P	5
H	2.7
H _i	1.2

AT10 Std. width (mm)	
16	
25	
32	
50	
75	
100	
150	
P	10
H	4.5
H _i	2.5

AT20 Std. width (mm)	
25	
32	
50	
75	
100	
150	
200	
P	20
H	8
H _i	5

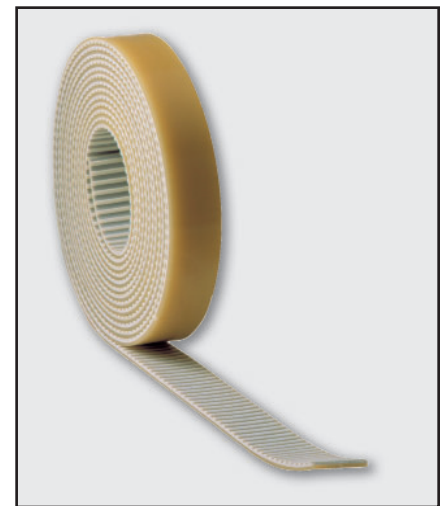

STD 5M Std. width (mm)	
10	
15	
25	
50	
P	5
H	3.4
H _i	1.91

STD 8M Std. width (mm)	
10	
12	
15	
20	
30	
50	
85	
P	8
H	5.1
H _i	3.05

*Only with Kevlar cords and reduced number of cords

P1 Std. width (mm)	
10	
20	
H	1

P2 Std. width (mm)	
25	
50	
75	
100	
H	2



P4 Std. width (mm)	
25	
50	
100	
H	4





MEGAFLEX[®]

PU Truly Endless Timing Belts

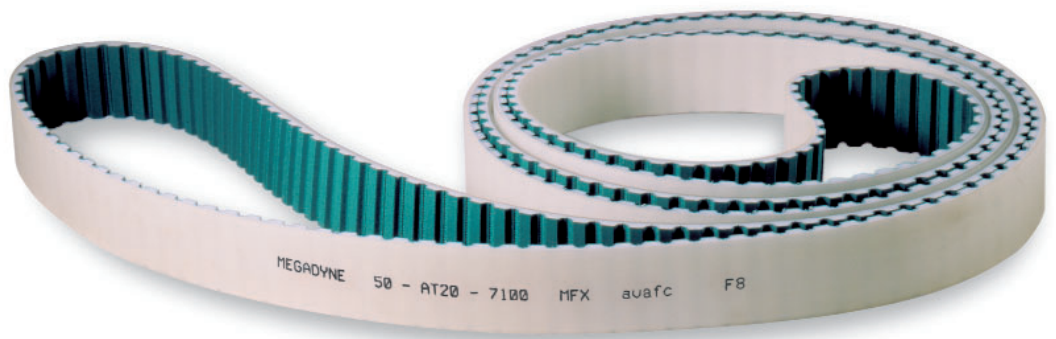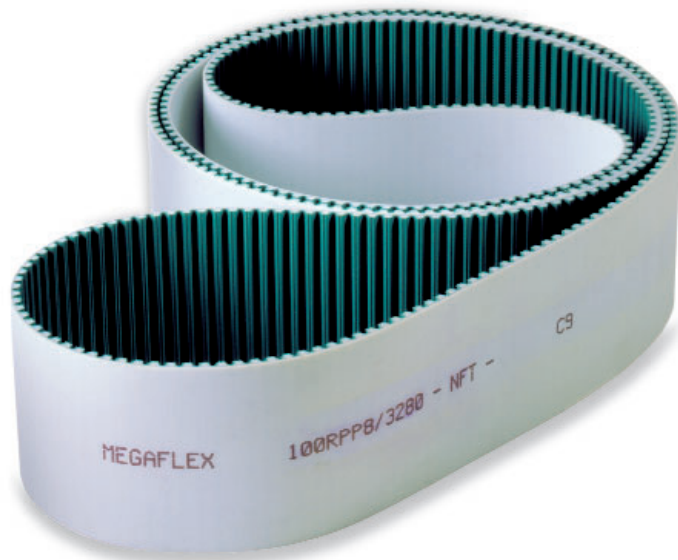



MEGAFLEX TIMING BELTS are manufactured in thermoplastic polyurethane with continuous spiral steel cords.


This type of belt, developed by our Research & Development, offers good running characteristics and high traction loads.

They are especially suited for power transmission and conveying with high loads and high speeds (up to 10,000 RPM).

The addition of a nylon coating on the teeth during production enhances the running properties for specific applications and reduces the noise frictional coefficient.

An extra thickness of special coating is also possible on the back of the belt, offering extra protection against aggressive or heavy products. Megaflex belts are truly endless, enabling them to deliver exceptional performance.

MEGAFLEX TIMING BELTS ARE AVAILABLE FROM 1.500 UP TO 22.700 mm LENGTH.

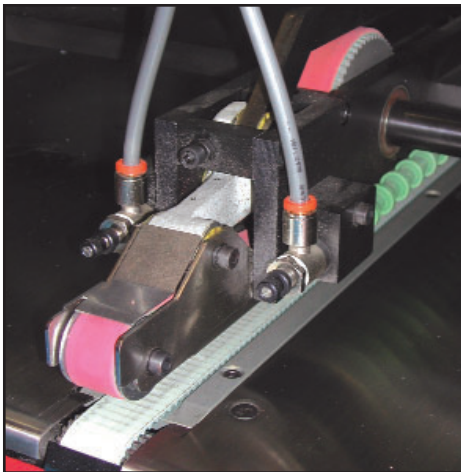

MEGAFLEX Special Constructions

- High flex cords
- (NFT) nylon fabric on the teeth (available from 1,900 mm long)
- Custom milling, grinding and drilling to specification
- Additional continuous coatings on the back of the belt in:
 - PU 85° ShA
 - Tenax 50° ShA
 - Linatex 40° ShA
 - Yellow PUR 60° ShA
 - Gray PUR 60° ShA
 - Neoprene rubber 70° ShA

Other hardesses available upon request.







MEGAFLEX®

PU Truly Endless Timing Belts


T5 - T10 - T20

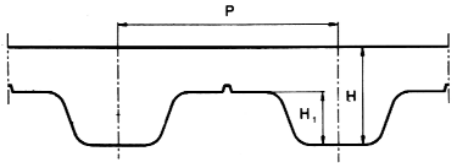


T5 DL - T10 DL - T20 DL

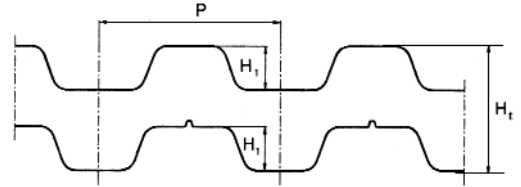


AT5 - AT10 - AT20

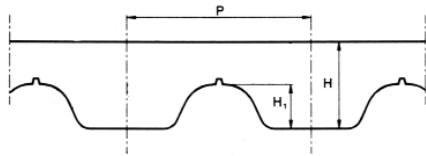


AT5 DL - AT10 DL - AT20 DL

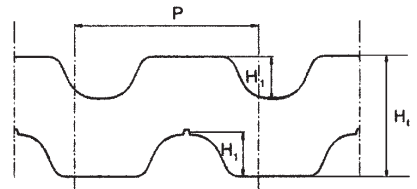


XL - L - H - XH




XL DL - L DL - H DL - XH DL

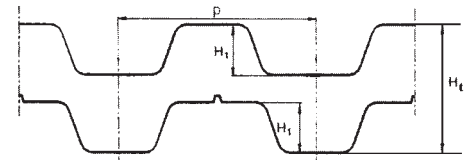


RPP5 - RPP8 - RPP14

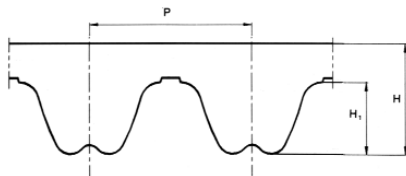


RPP5 DL - RPP8 DL - RPP14 DL

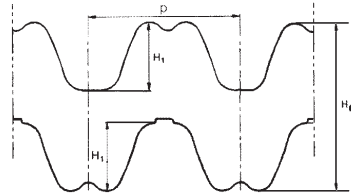


MTD 8M

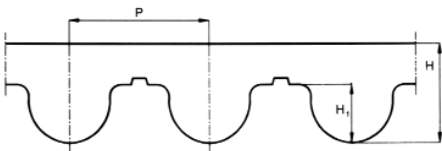

P2



ATG10

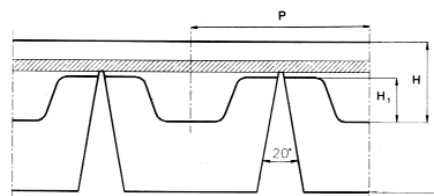

P2 Std. width (mm)	ATG10 K13 Std. width (mm)	MTD 8M Std. width (mm)
25	10	10
50	16	16
75	25	25
100	32	32
150	50	50
	75	75
	100	100
	150	150
P 2.0	P 10	P 8
	H 4.5	H 5.6
	H1 2.5	H1 3.4
	B 13	
	h 6.4	

MEGAFLEX®

PU Truly Endless Timing Belts



T5/T5DL Std. width (mm)	
10	
16	
25	
32	
50	
75	
100	
150	
P	5
H	2.2
H _i	1.2
H _t	3.4

T10/T10DL Std. width (mm)	
10	
16	
25	
32	
50	
75	
100	
150	
P	10
H	4.5
H _i	2.5
H _t	7

T20/T20DL Std. width (mm)	
10	
16	
25	
32	
50	
75	
100	
150	
P	20
H	8
H _i	5
H _t	13



AT5/AT5DL Std. width (mm)	
10	
16	
25	
32	
50	
75	
100	
150	
P	5
H	2.7
H _i	1.2
H _t	3.9

AT10/AT10DL Std. width (mm)	
10	
16	
25	
32	
50	
75	
100	
150	
P	10
H	4.5
H _i	2.5
H _t	7


AT20/AT20DL Std. width (mm)	
10	
16	
25	
32	
50	
75	
100	
150	
P	20
H	8
H _i	5
H _t	13



RPP5/RPP5DL Std. width (mm)	
10	
15	
20	
25	
50	
85	
100	
150	
P	5
H	3.8
H _i	2
H _t	5.2

RPP8/RPP8DL Std. width (mm)	
10	
15	
20	
25	
50	
85	
100	
150	
P	8
H	5.4
H _i	3.2
H _t	7.8

RPP14/RPP14DL Std. width (mm)	
10	
15	
20	
25	
50	
85	
100	
150	
P	8
H	5.4
H _i	3.2
H _t	7.8

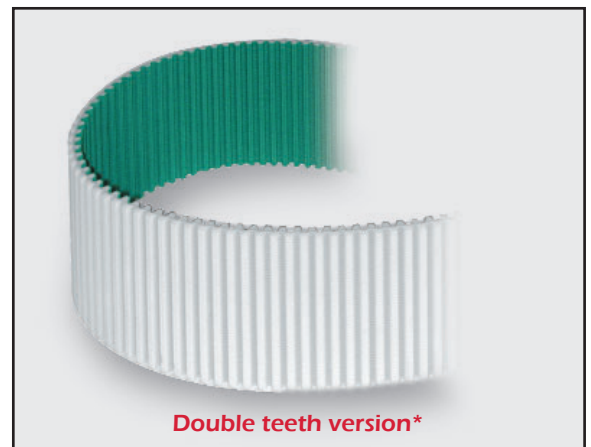

*For double teeth version, there is a minimum order requirement.

XL/XLDL Std. width (mm)	
12.7	
19.1	
25.4	
38.1	
50.8	
76.2	
101.6	
152.4	
P	5.08
H	2.3
H _i	1.27
H _t	3.05

L/LDL Std. width (mm)	
12.7	
19.1	
25.4	
38.1	
50.8	
76.2	
101.6	
152.4	
P	9.525
H	3.6
H _i	1.9
H _t	4.58



H/HDL Std. width (mm)	
12.7	
19.1	
25.4	
38.1	
50.8	
76.2	
101.6	
152.4	
P	12.7
H	4.3
H _i	2.29
H _t	5.95

XH/XHDL Std. width (mm)	
12.7	
19.1	
25.4	
38.1	
50.8	
76.2	
101.6	
152.4	
P	22.225
H	11.2
H _i	6.35
H _t	15.49



MEGARIB[®]

PU Endless Megarib Belts

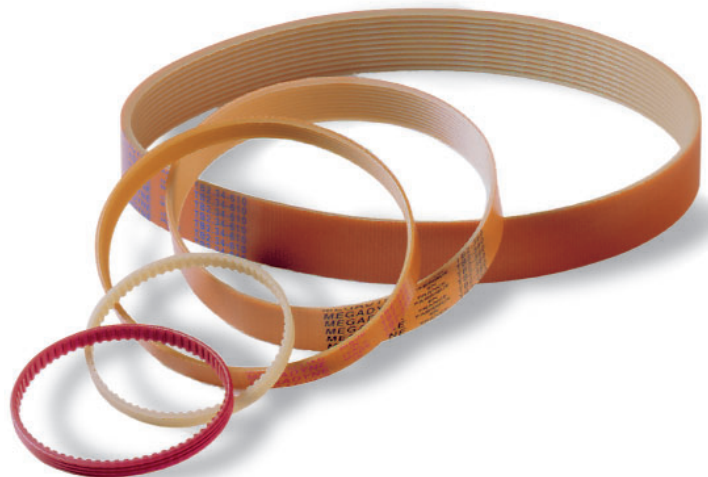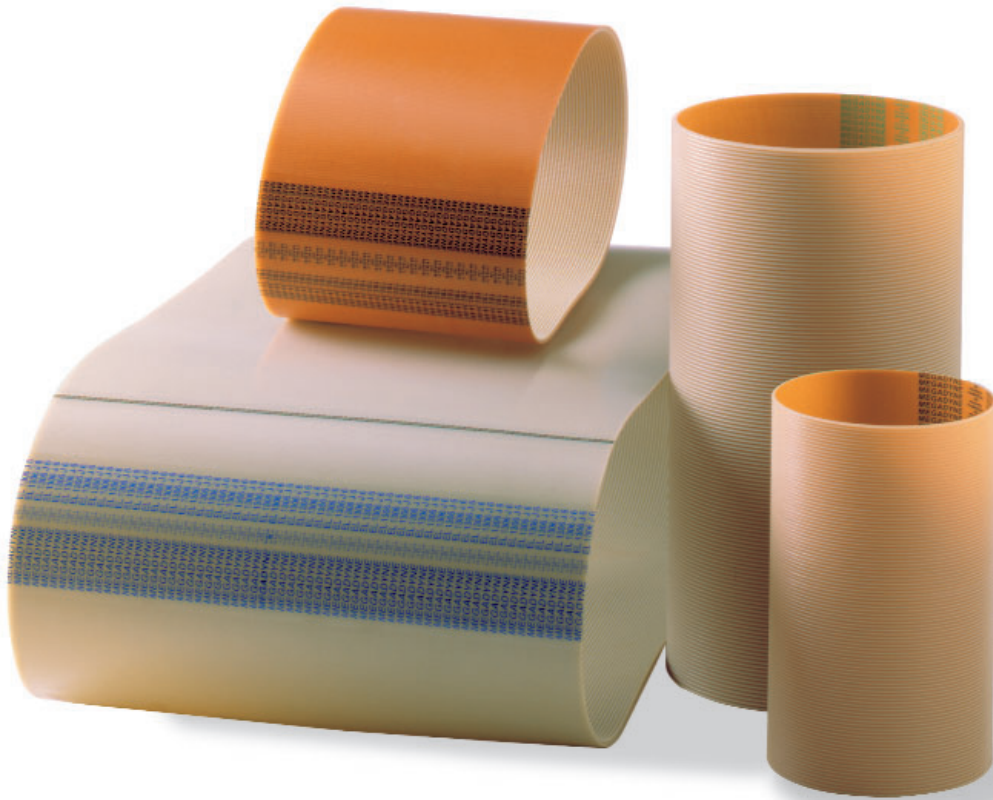



MEGARIB belts are manufactured in polyurethane high tension cords, which combine the high flexibility of flat belts with the power transmission capability of v-belts.

These belts have the following features:

- Dimensional stability
- High flexibility
- Small pulley diameters
- High speeds
- Excellent oil, water and ozone resistance




The main applications are:

- Food processors
- Grass cutting equipment
- Electrical household appliances
- Washing machines
- Electrical tools
- Woodworking equipment
- Domestic power tools



On request, special elastic Megarib belts can be manufactured in polyurethane with the semi-elastic tension member. They can be fitted on fix center drives, reducing noise and vibrations. The absence of a tensioning mechanism offers additional cost savings.

Standard Megarib belts are available in a wide variety of rib pitches and lengths (see below).

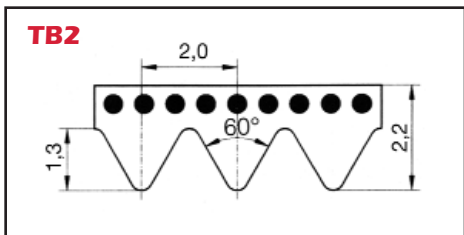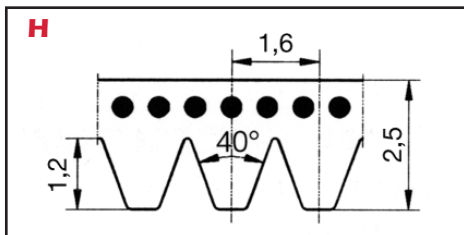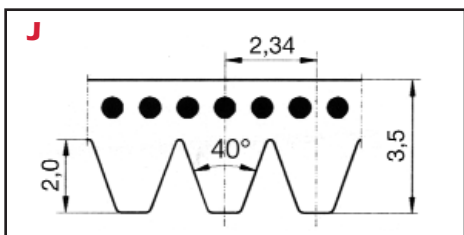

J	
Standard Length	
(mm)	(inches)
220	87
271	107
275	108
278	110
283	114
304	120
330	130
345	135
356	140
381	150
392	154
406	160
431	170
444	175
457	180
483	190
508	200
558	220
610	240
660	260
681	268
711	280
762	300
864	340
914	360
953	376
1010	398
1086	428
1120	440
1163	458
1202	474
1239	488
1268	500
1397	590



H
Standard Length
(mm)
178
217
223
227
229
295
330
340
375
389
400
485
507
588
602
609
650
768
935
1000
1086
1120
1163
1203
1240
1775
1976

TB2
Standard Length
(mm)
156
170
200
220
231
248
266
295
310
327
330
345
360
380
390
400
430
480
510
526
535
598
630
660
675
725
770
1186



MEGAFLAT[®]

PU and Rubber Endless Flat Belts

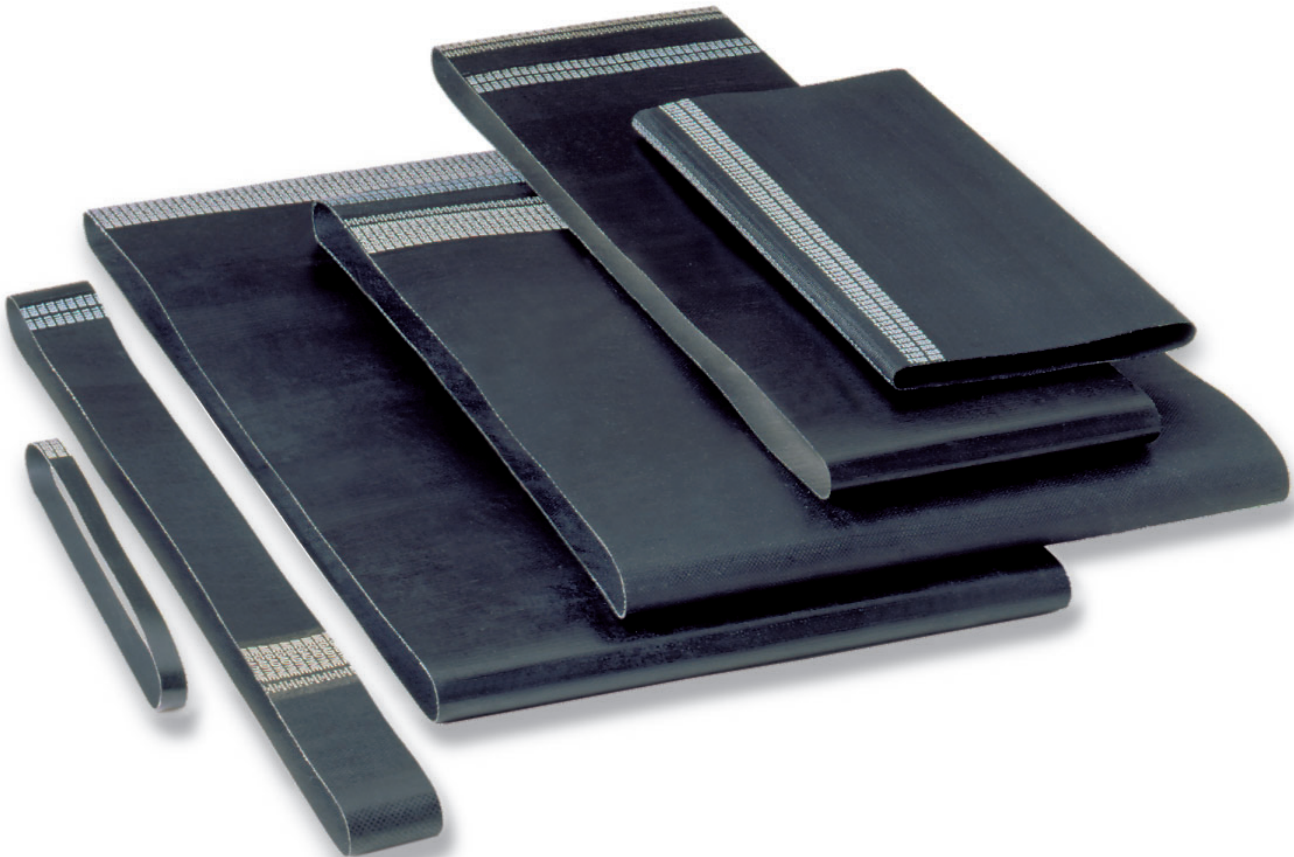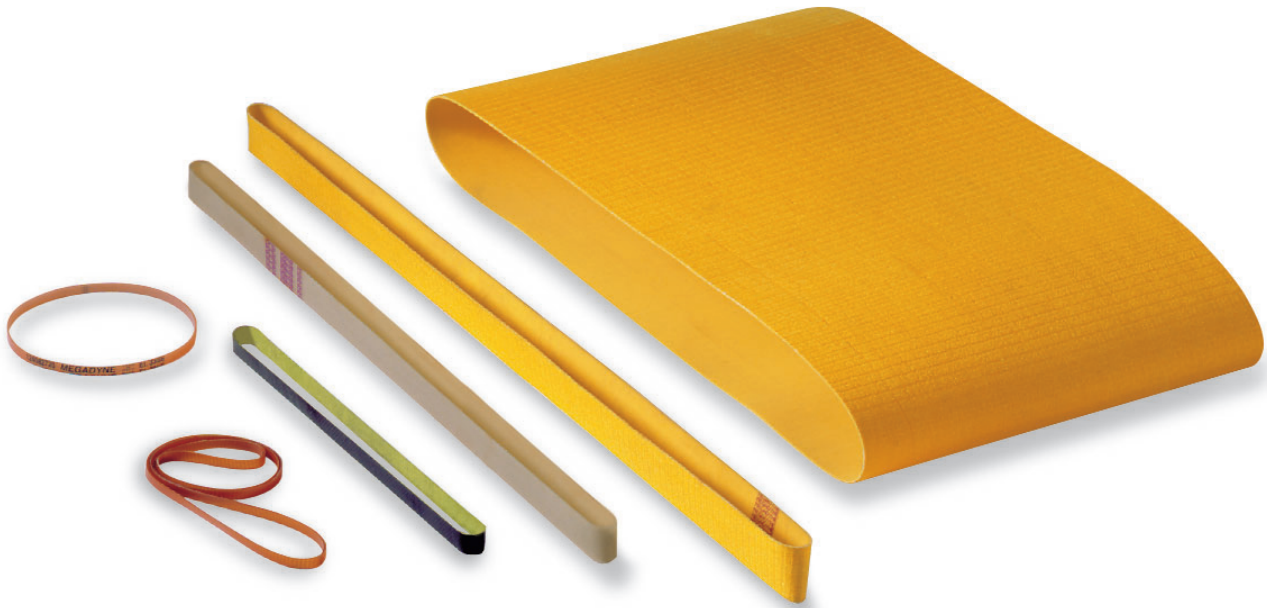



MEGAFLAT belts are truly endless mandrel molded, available in both polyurethane or chloroprene rubber, with either polyester, Kevlar or cotton reinforcements. Standard sleeves are available 330 mm wide.

These belts have the following features:

- High flexibility
- Small pulley diameters
- Dimensional accuracy
- High speed
- Energy efficient
- Low noise and vibration
- Low maintenance
- Good chemical and ozone resistance
- High friction surface

MEGAFLAT belts are particularly suitable for both power transmission and conveying.

TENSILE REINFORCEMENT	P 0 No fabric	P 102 Elastic fabric/nylon	P 108 Polyester/cotton	P 110 Polyester fabric
INSTALLATION TENSION x cm WIDTH (N) ENDLESS	-	10	200	150
MIN. PULLEY DIA. mm	8	25	5	12
THICKNESS mm	0.9	1.8	0.8	1
STANDARD LENGTH mm	240/1200	240/2500	240/3850	240/3850
COATING MATERIAL	POLYURETHANE	POLYURETHANE	POLYURETHANE	POLYURETHANE
ANTISTATIC	NO	POSSIBLE	POSSIBLE	POSSIBLE



TENSILE REINFORCEMENT	P 120 Polyester fabric	P 155 Kevlar/polyester	S 110 Polyester fabric
INSTALLATION TENSION x cm WIDTH (N) ENDLESS	350	400	125
MIN. PULLEY DIA. mm	20	25	12
THICKNESS mm	1.5	2	1.0
STANDARD LENGTH mm	240/3850	240/3850	240/3850
COATING MATERIAL	POLYURETHANE	POLYURETHANE	SILICON
ANTISTATIC	POSSIBLE	POSSIBLE	POSSIBLE

Megaflat Belts are made to order. Minimum order quantities will apply.




SPECIAL

**Any Special Pitches, Custom-Made
Coatings & Profiles**

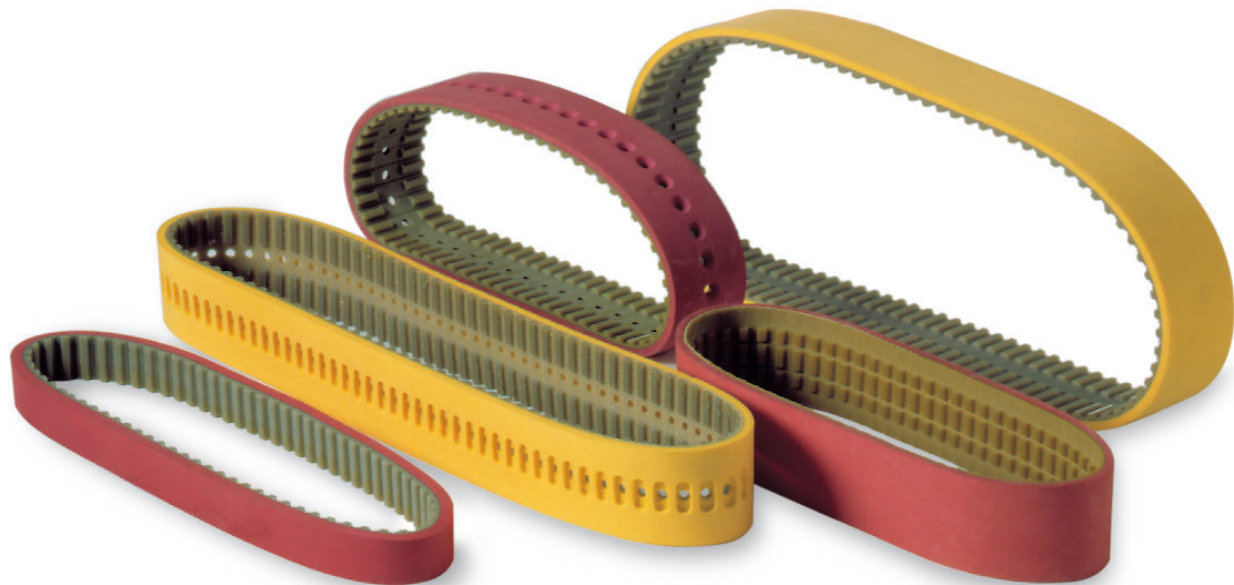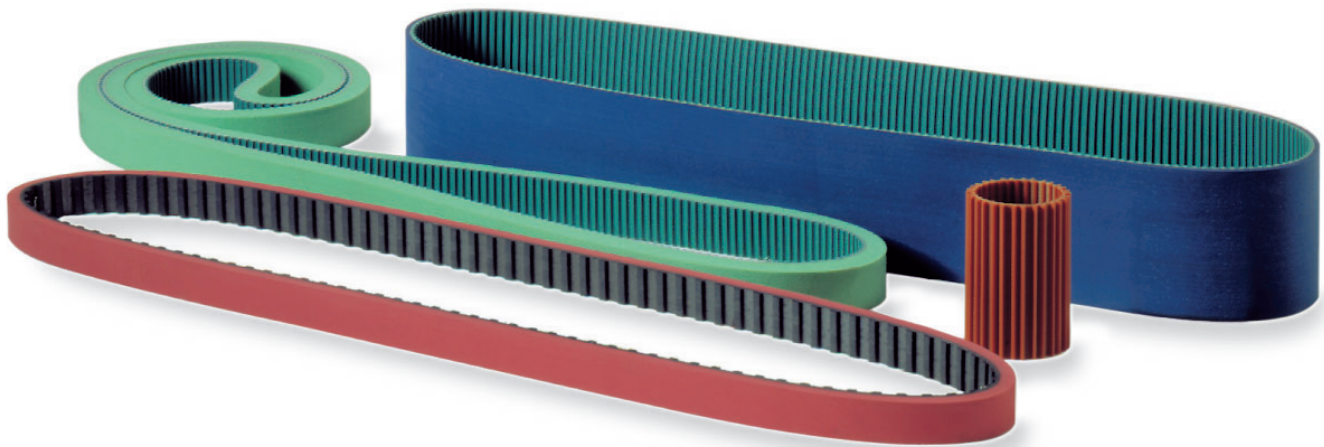

SPECIAL




Any Special Pitches, Custom-Made
Coatings & Profiles

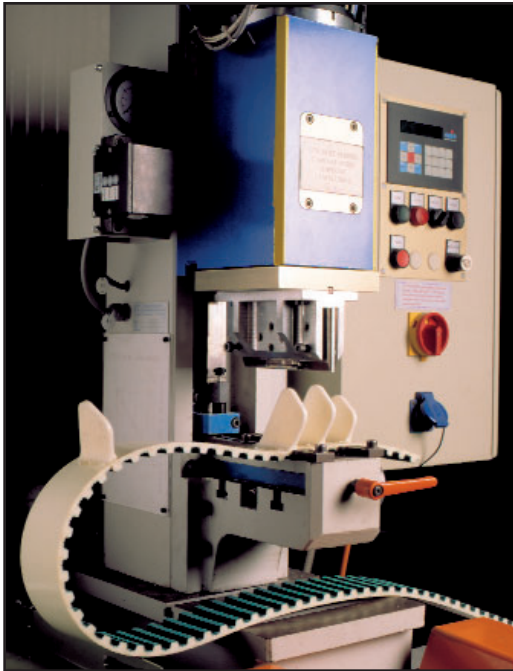

All **SPECIAL Belts** can be manufactured in a standard or coated execution, according to customer specific requirements.

Jason Urethane belts can be made up with a variety of welded-on profiles to handle your specific application. These profiles can be used as indexers, actuators, carriers and pushers. They can provide accuracy to assembly, packaging and inserting operations.


Custom profile designs are possible.

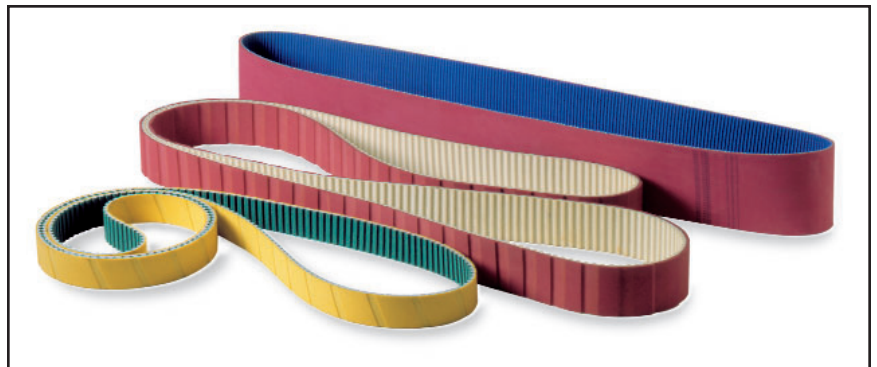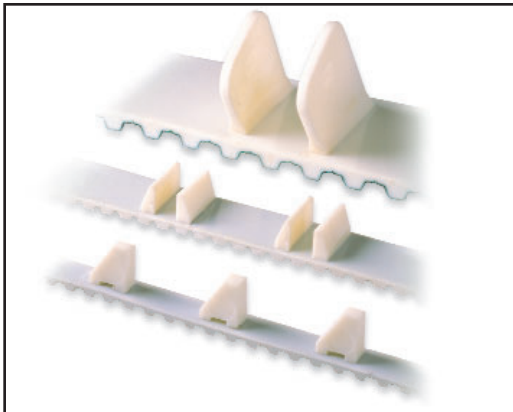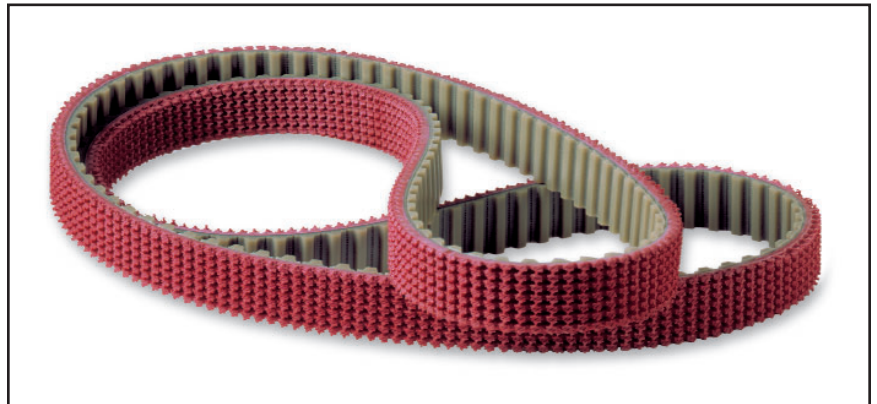



PULLEYS/ CLAMPING PLATES

**Custom-Made and Standard
Pulleys & Clamping Plates**




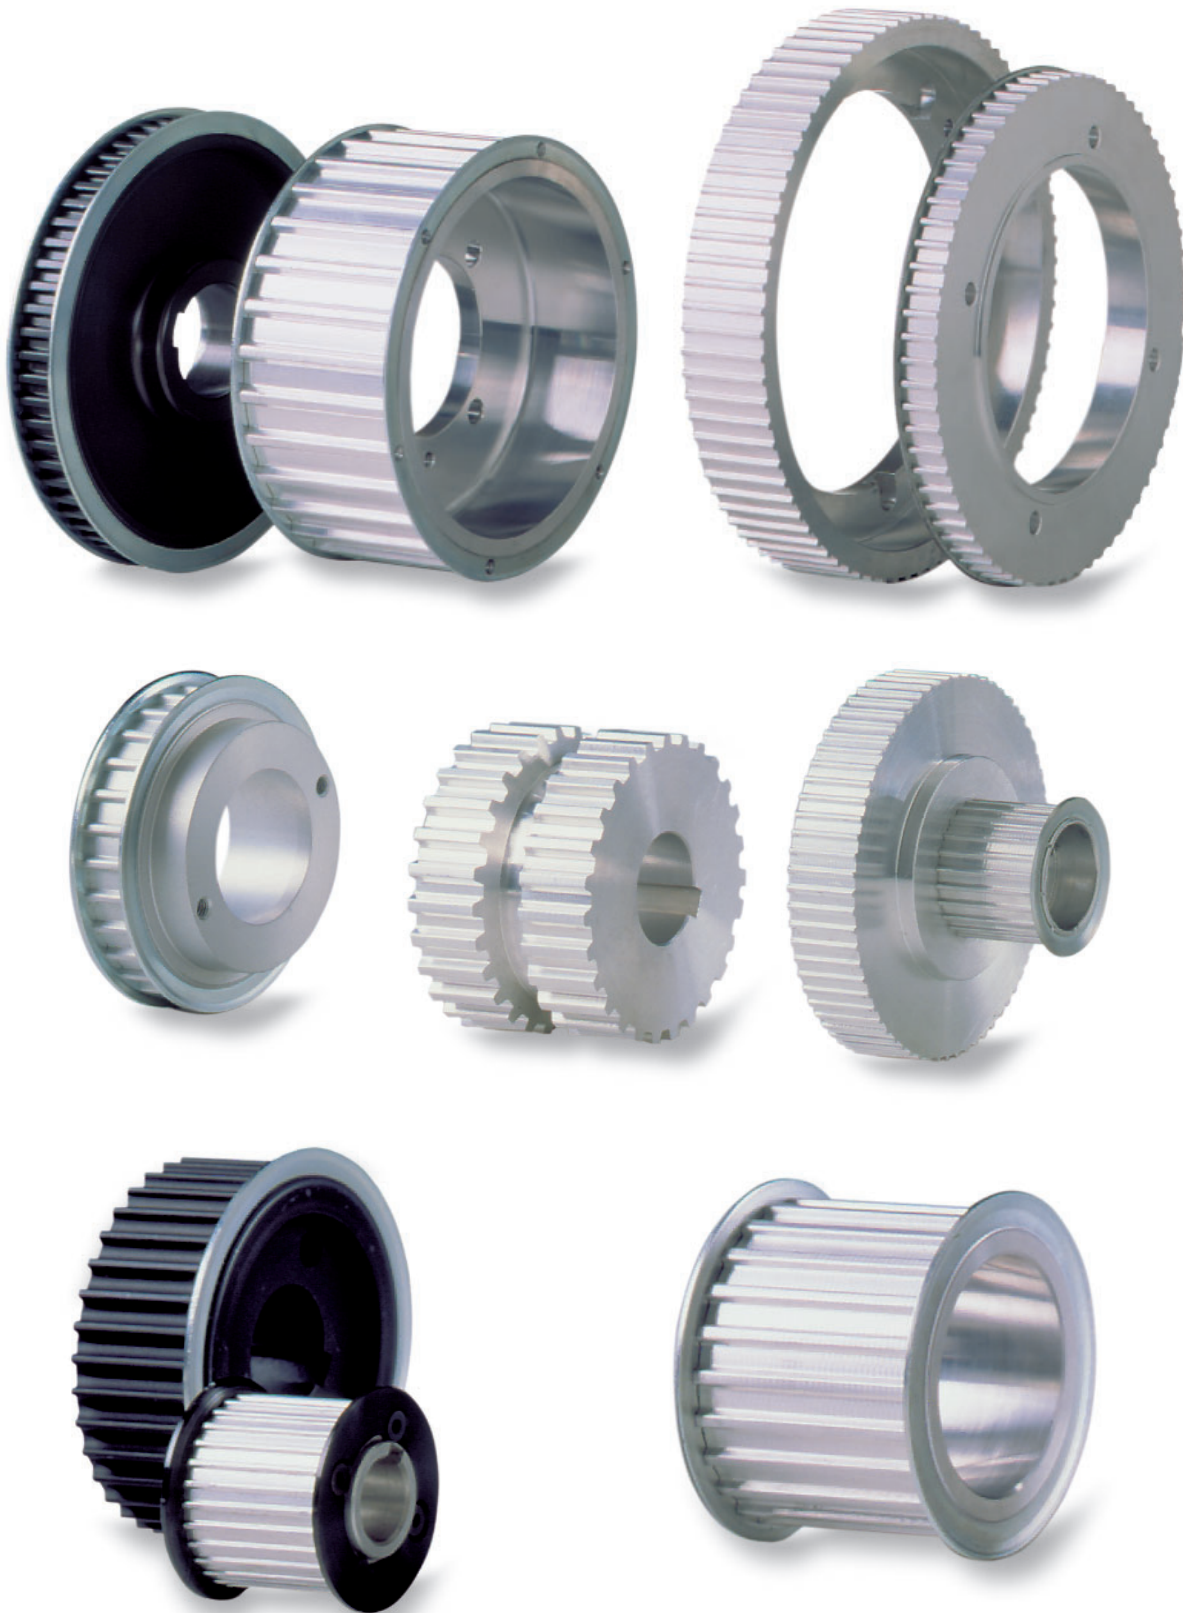


PULLEYS/ CLAMPING PLATES

Custom-Made and Standard
Pulleys & Clamping Plates



Jason can supply the complete drives. We can provide either standard pulleys, made in accordance to ISO spec and customer specific requirements.

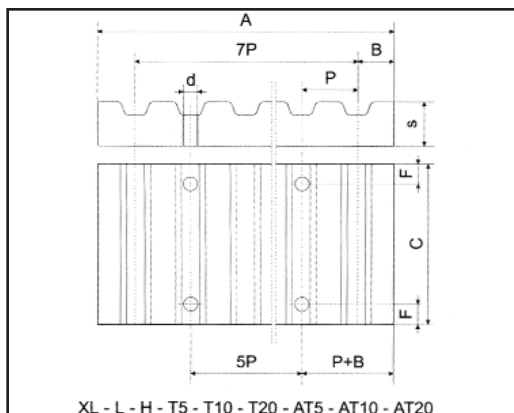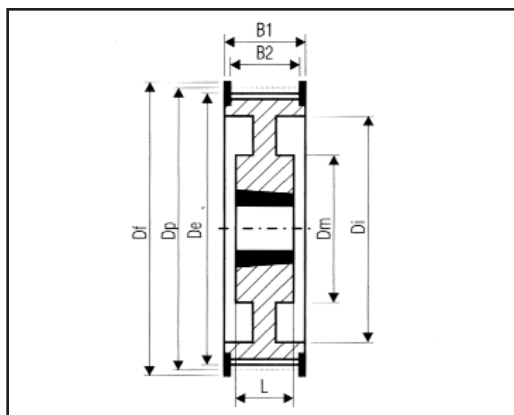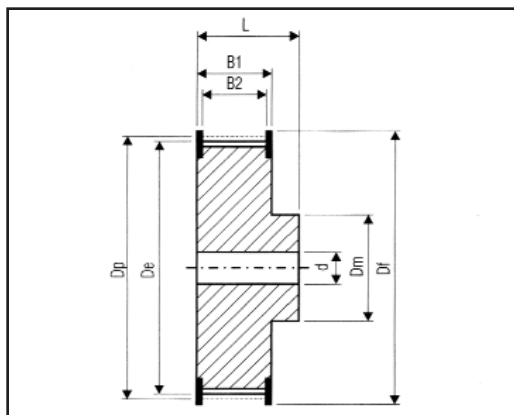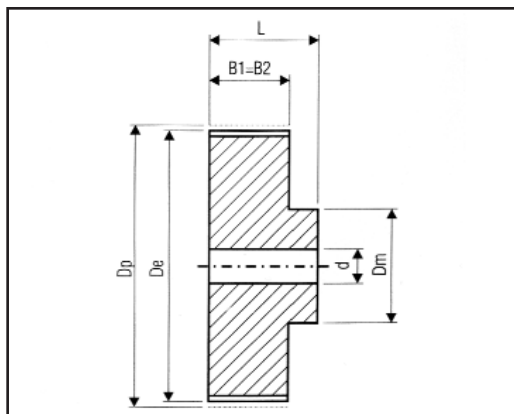

XL - L - H - T5 - T10 - T20 - AT5 - AT10 - AT20



Imperial	MXL - XL - L - H - XH - XXH - HG
HTD	3M - 5M - 8M - 14M
METRIC	T2.5 - T5 - T10 - T20 - AT3 - AT5 - AT10 AT20 - TG5 - TG10 - TG20 - ATG10
RPP	RPP5 - RPP8 - RPP14

TERMS, CONDITIONS AND LIMITED WARRANTY OF SALE

All prices, terms and conditions of sale are subject to change without prior notice. Buyer agrees to all terms and conditions of seller upon the placement of any and all purchase orders.

GENERAL

- All orders are subject to a minimum charge of \$25.00.
- All claims must be made within seven (7) days of receipt of merchandise.
- The company reserves the right at all times to reject any and all orders for any reason.

PAYMENT TERMS

- Net 30 days (to approved and qualified accounts).
- We reserve the right to hold shipments against past due accounts.
- Seller may require full or partial payment in advance if, in its sole judgement, the financial condition of the buyer does not justify the terms specified.
- All past due accounts are subject to a late payment charge of 1.5% per month, or maximum allowed by law if different, along with the expenses incidental to collection including reasonable attorney's fees.
- Returned checks are subject to a minimum \$50.00 charge.

FREIGHT TERMS

- Freight Prepaid on \$1,000 net.
- Orders with different numbers and dates may not be combined to make freight allowance.
- Prepaid orders requiring immediate delivery that must be shipped from different Jason locations may be subject to a freight surcharge. Such determination will be made at the time of order.
- Backorders will be shipped in the most practical fashion with charges consistent with our freight policy established with the original order.

ACCEPTANCE, ALTERATION AND CANCELLATION OF ORDERS

Orders for other than standard items or standard lengths may not be cancelled after purchase has been committed, production scheduled or any costs incurred.

RETURN OF DEFECTIVE MERCHANDISE

Defective or failed material to be held at the buyer's premises until authorization has been granted by seller to return or dispose of merchandise. Merchandise to be returned for final inspection must be returned Freight Prepaid in the most economical way. Credit will be issued for material found to be defective upon our inspection based on prices at time of purchase.

MERCHANDISE SHIPPED IN ERROR

Buyer must notify seller immediately on any merchandise shipped in error. Upon notification, merchandise is to be returned to seller either via truck on a Freight Collect basis, via carrier of our choice, or via UPS on a Freight Prepaid basis. Buyer will be reimbursed for cost of merchandise, plus any additional freight which may have been incurred due to shipping error.

MERCHANDISE ORDERED IN ERROR

Standard packaged merchandise only may be returned, provided that the merchandise is in the original buyer's possession not more than 30 days. If merchandise is accepted for return, merchandise must be returned Freight Prepaid, and buyer will be charged a minimum of 15% rehandling charge, plus a chargeback for outbound freight charges if the original order was shipped prepaid. Returns are not accepted for any merchandise that is specifically manufactured to meet the buyer's requirement of either specifications or large quantity.

DELIVERY, DAMAGES, SHORTAGES

Delivery to the initial common carrier shall constitute the delivery to the buyer. Our responsibility, insofar as transportation risks are concerned, ceases upon the delivery of the merchandise in good condition to such a carrier, and all the merchandise shall be shipped at the buyer's risk.

GOODS DAMAGED IN SHIPMENT

Upon receipt of shipment, any evidence of damage to original shipping package must be reported by the receiving party and a claim made with the delivering carrier upon receipt of shipment.

CONCEALED DAMAGE

Any evidence of damage to material shipped, upon the opening of the original shipping package, must be reported by the receiving party to and a claim made with the delivering carrier without delay.

LIMITED WARRANTY

The merchandise or products sold or distributed by Jason Industrial Inc. are warranted to our customers to be free from defects in material and workmanship at the time of shipment by us. All warranty claims shall be made within 90 days after we have shipped the merchandise. Our liability hereunder is limited to the purchase price of any merchandise proved defective, or, at our option, to the replacement of such merchandise upon its authorized return to us.

THIS WARRANTY IS IN LIEU OF AND EXCLUDES ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, STATUTORY, OR OTHERWISE CREATED UNDER APPLICABLE LAW INCLUDING, BUT NOT LIMITED TO, THE WARRANTY OF MERCHANT ABILITY AND THE WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE. IN NO EVENT SHALL WE BE LIABLE FOR SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING LOSS OF PROFITS.








Jason Industrial Inc.®

A MEGADYNE GROUP CO.



- Power Transmission Belting
- Sheaves, Pulleys & Accessories
- Industrial Hose & Couplings
- Skirtboard Rubber



Fairfield, NJ



**Distribution Center
Carol Stream, IL**



Tampa, FL



Los Angeles, CA



**Megadyne America
Charlotte, NC**



TBMC - Greenville, SC

Other Jason Industrial Locations:

- Irving, Texas
- Sorocaba - Sao Paulo Brazil
- Azcapotzalco, Mexico
- Mississauga, Ontario Canada
- Edmonton, Alberta Canada
- Dorval, Quebec Canada

Contact Jason Industrial for additional information. Visit us online at

www.jasonindustrial.com

JASON POLYURETHANE TIMING BELTS

www.jasonindustrial.com



 **Jason
Industrial Inc.®**
A MEGADYNE GROUP CO.



All recommendations for the use of the products described herein and all other data or information set forth in this publication, whether concerning such products or otherwise, are furnished without any guarantee, warranty representations or inducement of any kind whether expressed or implied, including but not limited to implied warranties of merchantability and fitness for a particular purpose. And Jason expressly disclaims liability under any theory, including without limitation, contract negligence, misrepresentation or breach of any obligation relating to the recommendation, data or information set forth herein. Readers and customers are encouraged to conduct their own test before using any product. Read its label and all related instructions. The information in this publication is not intended as permission or recommendations to practice a patented invention without permission of the patent owner.

Jason Locations

Corporate Office Central Warehouse

Jason Industrial Inc.

340 Kaplan Drive
Fairfield, NJ 07004
973-227-4904 • FAX: 973-227-1651

Branch Offices & Warehouses

Jason Distribution Center

221 S. Westgate Drive
Carol Stream, IL 60188-2243
630-752-0600 • FAX: 630-752-0680

Jason Industrial Inc.

3236 Royalty Row
Irving, TX 75062
972-438-6992 • FAX: 972-721-9162

Jason Industrial Inc.

4809 Eastern Avenue
Bell, CA 90201
323-265-8061 • FAX: 323-265-0813

Jason Industrial Inc.

5120-B East Adamo Drive
Tampa, FL 33619
813-241-4111 • FAX: 813-241-4212

Jason Do Brazil Ltda.

Avenida Armando Panunzio 610
Sorocaba - Sao Paulo
Brazil CEP 18050-000
011 55 15 222 00 07
FAX: 011 55 15 222 90 12 or
011 55 15 222 75 65

Jason Industrial Canada Ltd.

9135 Cote De Liesse
Dorval, Quebec H9P-2N9
514-631-6781 • FAX: 514-631-7408

Jason Industrial Canada Ltd.

927 Matheson Blvd, East
Mississauga, Ontario L4W-2R7
905-602-4400 • FAX: 905-602-4406

Jason Industrial Canada Ltd.

10020 42nd Street
Edmonton, Alberta T6E-5B4
780-461-4400 • FAX: 780-461-1034

Jason Industrial, S. De R.L. De C.V.

AV. Ceylan No. 959 Bodega 8
Col. Industrial Vallejo C.P. 02300
Azcapotzalco, Mexico D.F.
011 52 5555873680
FAX: 011 52 5555873688