


JDN TROLLEYS



J.D. NEUHAUS
powered by air!

JDN TROLLEYS

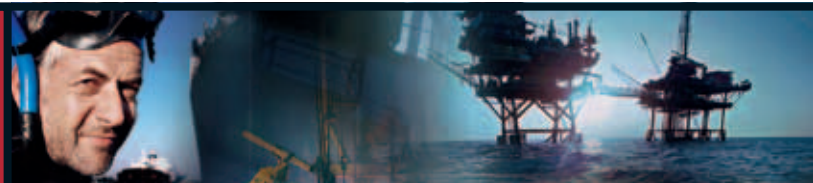

Carrying capacities: up to 20 t

JDN Trolleys are available for all hoists of the PROFI and M series:

- As manual trolleys (LN) for pushing or pulling the trolleys by hand
- As reel chain trolleys (LH) for moving the trolleys by operating the reel chain mechanism
- As motorised trolley (LM) powered by an air motor

Standard Features

- Easy to install
- With anti-climb and anti-drop devices
- Robust manufacture requiring little maintenance
- Able to negotiate curves

Options

- Rack and pinion drive
- Spark-resistant package
- Offshore paint

Energy Feeding Systems

The air supply can be fed by various systems:

- Energy chain
- C-rail
- Square rail
- Spiral hose
- Hose trolleys

Technical Data

The designation of the trolley is composed of the short code (LN, LH, LM) and the carrying capacity acc. to table, as for example LN 1t.

JDN Air Hoist PROFI		025 TI	05 TI	1 TI	1.5 TI	2 TI	3 TI/2	3 TI	6 TI	10 TI	16 TI	20 TI
Carrying capacity of trolley LN	mt	0.5		1		2		3.2	6.3	10-16		-
Carrying capacity of trolley LH and LM	mt			2				3.2	6.3	10-16		20
Carrying capacity of hoist with trolley	mt	0.25	0.5	1	1.6	2		3.2	6.3	10	16	20
Weight of Manual Trolley (LN)	lbs kg	17 7.7		23.1 10.5		39.6 18		57.3 26	257.9 117	418.9 190		-
Weight of Reel Chain Trolley (LH)	lbs kg			57.3 26				81.6 37	280 127	485 220		628.3 285
Weight of Motor Trolley (LM)	lbs kg			57.3 26				72.8 33	273.4 124	485 220		628.3 285
Hoist weight, standard lift	lbs kg	59.5 27	59.5 27	61.7 28	123.5 56	75 34	145.5 66	189.6 86	242.5 110	344 156	529 240	628.3 285
Total weight with standard lift Manual Trolley	lbs kg	76.5 34.7	76.5 34.7	84.9 38.5	163.1 74	114.6 52	202.8 92	246.9 112	500.4 227	762.8 346	948 430	-
Total weight with standard lift Reel Chain Trolley	lbs kg	116.8 53	116.8 53	119.1 54	180.8 82	132.3 60	227.1 103	271.1 123	522.5 237	829 376	1014 460	1257 570
Total weight with standard lift Motor Trolley	lbs kg	116.8 53	116.8 53	119.1 54	180.8 82	132.3 60	218.3 99	262.4 119	515.9 234	829 376	1014 460	1257 570
Weight of chain	lbs/ft kg/m		0.67 1		1.2 1.8	0.67 1	1.2 1.8	2.6 3.8			3.9 5.8	
Chain dimension	mm		7x21		9x27	7x21	9x27	13x36			16x45	
Number of chain strands			1			2		1	2		3	4
Air pressure Motor Trolley	PSI bar	85 6			65-85 4-6	85 6	65-85 4-6			85 6		
Air consumption Motor Trolley ⁴ (at full load)	cfm m ³ /min				21.2 0.6						45.9 1.3	
Air consumption hoist (at full load)	cfm m ³ /min	53 1.5			53-92 1.5-2.6	53 1.5	53-92 1.5-2.6			194.2 5.5		
Motor output Motor Trolley ⁴	kW				0.2						0.7	
Motor output hoist	kW	1			1.3-2	1	1.3-2			3.5		
Travelling distance Reel Chain Trolley, chain reel off	33 ft 10 m				4.6 1.4					3.6 1.1	3.3 1.0	
Travelling speed Motor Trolley ⁴ (at full load)	ft/min m/min				29.5*/45.9 9*/14					16.4*/39.4 5*/12		
Hose connection Motor Trolley			G 1/2		G 3/4	G 1/2			G 3/4			
Minimum radius Manual Trolley	ft m	3 ¹ 0.9 ¹		3.3 ¹ 1.0 ¹		3.9 ¹ 1.2 ¹		1.6 ¹ 0.5 ²		3.3 ¹ 1 ²		-
Minimum radius Reel Chain Trolley and Motor Trolley	ft m					1.6 ² 0.5 ²				3.3 ² 1 ²		4.9 ² 1.5 ²
Max. bottom flange thickness t Manual Trolley	inch mm	1.2 30		1.0 25		1.1 28		1.6 40		2.6 ⁵ 65 ⁵		-
Max. bottom flange thickness t Reel Chain and Motor Trolley	inch mm					1.6 40				2.6 ⁵ 65 ⁵		-
Max. bottom flange width b Manual Trolley	inch mm	8.7 220				12 305			12.2 310			-
Max. bottom flange width b Reel Chain and Motor Trolley	inch mm			11 280					12.2 310			-
Min. bottom flange width b Manual Trolley	inch mm	2 50		2.3 58		2.6 66		2.3 58	2.1 54	5 128		-
Min. bottom flange width b Reel Chain and Motor Trolley	inch mm			2 50				2.3 58	2.1 54	5 128		5.8 148
Noise level at Motor Trolley ^{3,4}	dB(A)							80				

*1st speed of F control with two speeds

¹Measured at the middle of the beam

²Measured at the inner edge of the beam

³Measured at 1m distance acc. to DIN 45635 part 20

⁴At 6 bar

⁵55 mm, if hoist is suspended

- Capacities over 20 t see JDN Monorail Air Hoists page 24
- Versions with one and two hooks (e.g. BBH) see page 22
- Low Headroom Trolleys for restricted headrooms see page 20





J.D. NEUHAUS
powered by air!

PROFI in Manual Trolley (LN)


Dimensions

JDN Air Hoist PROFI		025 TI		05 TI	1 TI		1.5 TI		2 TI	3 TI/2		3 TI	6 TI		10 TI		16 TI	
With Trolley		LN 0.5 t			LN 1 t		LN 2 t			LN 3.2 t			LN 6.3 t		LN 10-16 t			
A	inch mm	10.2 260				12.2 310				11.5 292			19.7 500		19.3 490			
B max.	inch mm	4.7 119			4.8 122			6.4 162			4.5 113		5.6 141		5.8 142			
C	inch mm	b + 1.1 b + 28				b + 1 b + 26			b + 2.4 b + 60				b + 2.8 b + 70					
d	inch mm	2.2 55			2.7 68		3.2 80			3.3 84			6.5 165					
D max.	inch mm	4.7 119				4.8 122			4.5 113			5.6 141		5.8 142				
E	inch mm	5.4 137				5.7 170		5.4 137		5.5 140		7.4 187		6.1 154		7.8 197		7.8 199
F	inch mm	1.5 39				1.8 45		1.8 46		3.0 75		1.8 46		3.1 79		4.3 109		
G	inch mm	5.7 145				7.9 200		5.7 145		7.9 200		9.2 233			12.1 308		15 382	
H	inch mm	6 152				3.3 212		6 152		3.3 212		9.8 250			10.5 267		12.2 310	
J* (mounted)	inch mm	– –	– –	– –	– –	– –	24.1 613		25 635		30 763		37 929		39 982			
J* (suspended)	inch mm	20.9 530				23.1 588		23.5 597		– –		31.4 798		36.2 919		46.3 1176		49.6 1260
K	inch mm	2.7 67.5			3.2 81.5		3.7 94			4.2 107			7.4 188					
L	inch mm	1.1 28				1.0 26		1.1 28		1.2 30		1.6 40		1.7 44		2.1 53		
M	inch mm	1.7 42				1.6 40		1.7 42			2 51		2.6 66		3.2 82			
N	inch mm	5.1 130				5.9 150			5.4 136			9.3 236						

*Chain containers increase the hoist headroom

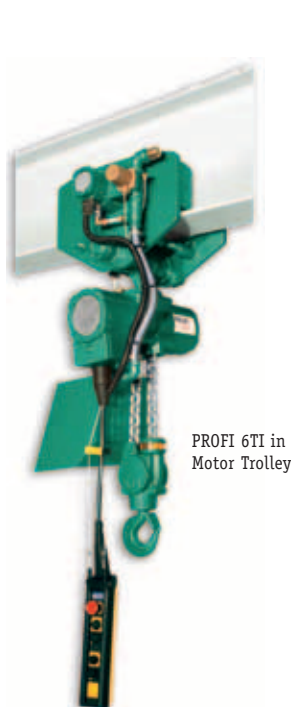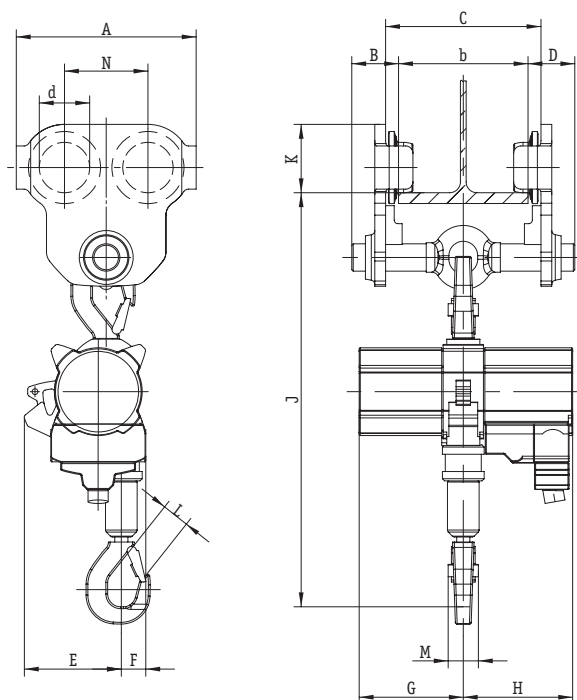

JDN TROLLEYS

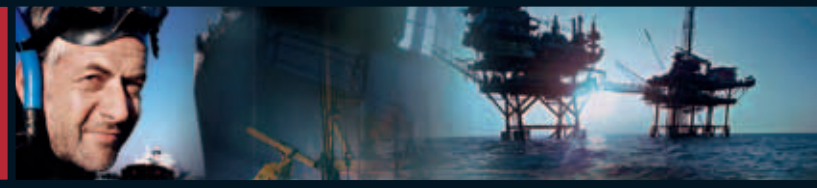


PROFI in Reel Chain Trolley (LH)

Dimensions

JDN Air Hoist PROFI		025 TI	05 TI	1 TI	1.5 TI	2 TI	3 TI/2	3 TI	6 TI	10 TI	16 TI	20 TI
With Trolley				LH 2 t			LH 3.2 t		LH 6.3 t	LH 10-16 t		LH 20 t
A	inch			9.8			11.5		19.7	19.3		23.6
	mm			250			292		500	490		600
B max.	inch			5.1			4.4		5.6	5.6		5.2
	mm			130			113		141	142		132
C	inch			b + 1.4			b + 2.4			b + 2.8		b + 2.7
	mm			b + 36			b + 60			b + 70		b + 68
d	inch			2.8			3.3			6.5		7.3
	mm			70			84			165		185
D	inch		11.2		11.1	11.2	11.7	11.6	12.1	12.6		12.6
	mm		284		283	284	297	294	307	320		320
E	inch		5.4		6.7	5.4	5.5	7.4	6.1	7.8	7.8	7.1
	mm		137		170	137	140	187	154	197	199	180
F	inch		1.5		1.7	1.8	3.0	1.8	3.1	4.3		5.3
	mm		39		45	46	75	46	79	109		135
G	inch		5.7		7.9	5.7	7.9	9.2		12.1	15	
	mm		145		200	145	200	233		308	382	
H	inch		6		3.3	6	3.3	9.8		10.5	12.2	
	mm		152		212	152	212	250		267	310	
J* (mounted)	inch	-	-	-	-	-	24.1	25	30	37	39	44.3
	mm	-	-	-	-	-	613	635	763	929	982	1125
J* (suspended)	inch		22.2		23.7	24.1	-	31.4	36.2	46.3	46.1	58.1
	mm		563		602	611	-	798	919	1176	1171	1475
K	inch			4.1			4.4			8.5		8.9
	mm			103			110			215		226
L	inch		1.1		1.0	1.1		1.2	1.6	1.7	2.1	2.9
	mm		28		26	28		30	40	44	53	75
M	inch		1.7		1.6		1.7		2	2.6	3.2	3.4
	mm		42		40		42		51	66	82	86
N	inch			4.6			5.4			9.3		10.8
	mm			116			136			236		274

*Chain containers increase the hoist headroom

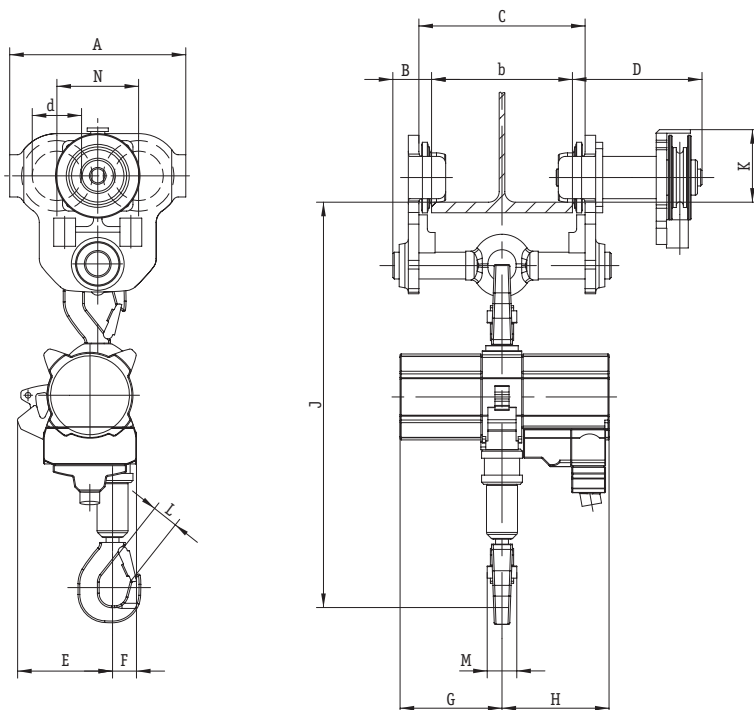

PROFI 1 TI in
Reel Chain Trolley






J.D. NEUHAUS
powered by air!

PROFI in Motor Trolley (LM)

Dimensions

JDN Air Hoist PROFI		025 TI	05 TI	1 TI	1.5 TI	2 TI	3 TI/2	3 TI	6 TI	10 TI	16 TI	20 TI
With Trolley				LM 2 t			LM 3.2 t		LM 6.3 t	LM 10-16 t		LM 20 t
A	inch mm			9.8 250			11.5 292		19.7 500	19.3 490		23.6 600
B max.	inch mm			5.1 130			4.4 113		5.6 141	5.6 142		5.2 132
C	inch mm			b + 1.4 b + 36			b + 2.4 b + 60			b + 2.8 b + 70		b + 2.7 b + 68
d	inch mm			2.8 70			3.3 84			6.5 165		7.3 185
D	inch mm		7.2 183		7.3 185	7.2 183	7.5 191		8.1 205	12.9 328		12.9 328
E	inch mm		5.4 137		6.7 170	5.4 137	5.5 140	7.4 187	6.1 154	7.8 197	7.8 199	7.1 180
F	inch mm		1.5 39		1.7 45	1.8 46	3.0 75	1.8 46	3.1 79	4.3 109		5.3 135
G	inch mm		5.7 145		7.9 200	5.7 145	7.9 200	9.2 233		12.1 308	15 382	
H	inch mm		6 152		3.3 212	6 152	3.3 212	9.8 250		10.5 267	12.2 310	
J* (mounted)	inch mm	- -	- -	- -	- -	- -	24.1 613	25 635	30 763	37 929	39 982	44.3 1125
J* (suspended)	inch mm		22.2 563		23.7 602	24.1 611	- -	31.4 798	36.2 919	46.3 1176	46.1 1171	58.1 1475
K	inch mm			3.7 95			4.2 107			7.4 188		8.6 218
L	inch mm		1.1 28		1.0 26	1.1 28		1.2 30	1.6 40	1.7 42	2.1 55	2.9 75
M	inch mm		1.7 42		1.6 40		1.7 42		2 51	2.6 66	3.2 82	3.4 86
N	inch mm			4.6 116			5.4 136			9.3 236		10.8 274

*Chain containers increase the hoist headroom

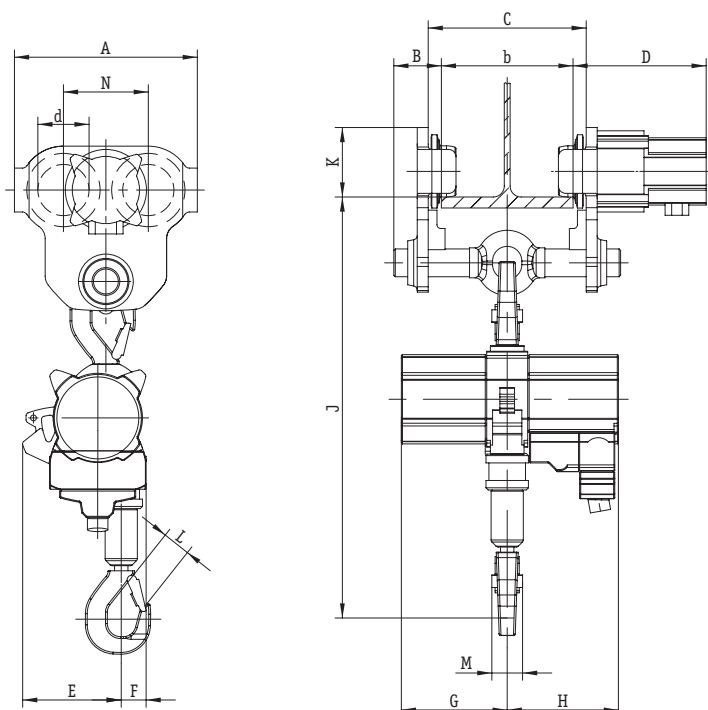

PROFI 2 TI in
Motor Trolley