



KABA[®]

Kaba Access Control Simplex Catalog

Effective November 2010

Why Is Simplex Everywhere?



Easy to Install, Use
and Maintain!

- No Wiring
- No Batteries
- No Computer
- No Downtime
- No License Fees
- No Software
- No Hassle

Simplex—Access Control Without Complication!

Simplex Products Are Made in the USA



Simplex products are manufactured and inspected by detail-oriented associates with decades of Simplex experience in our ISO 9001 Certified 150,000 square foot factory located in Winston-Salem, North Carolina*



A Simplex lock begins as raw materials at one end of the factory, and then after passing through several manufacturing and assembly processes, a complete lock comes off the assembly line at the other end of the building.



*Simplex LD (Light Duty) products are not made in the USA facility.


IF YOU'D LIKE A FACTORY TOUR SO YOU CAN SEE IT AS IT HAPPENS, PLEASE CONTACT 336-725-1331 x298



To attend one of our Kaba certification classes, please contact our certified factory trainer and licensed locksmith at 336-725-1331 x280.



Get Electronic Access Control Without Wires or Batteries

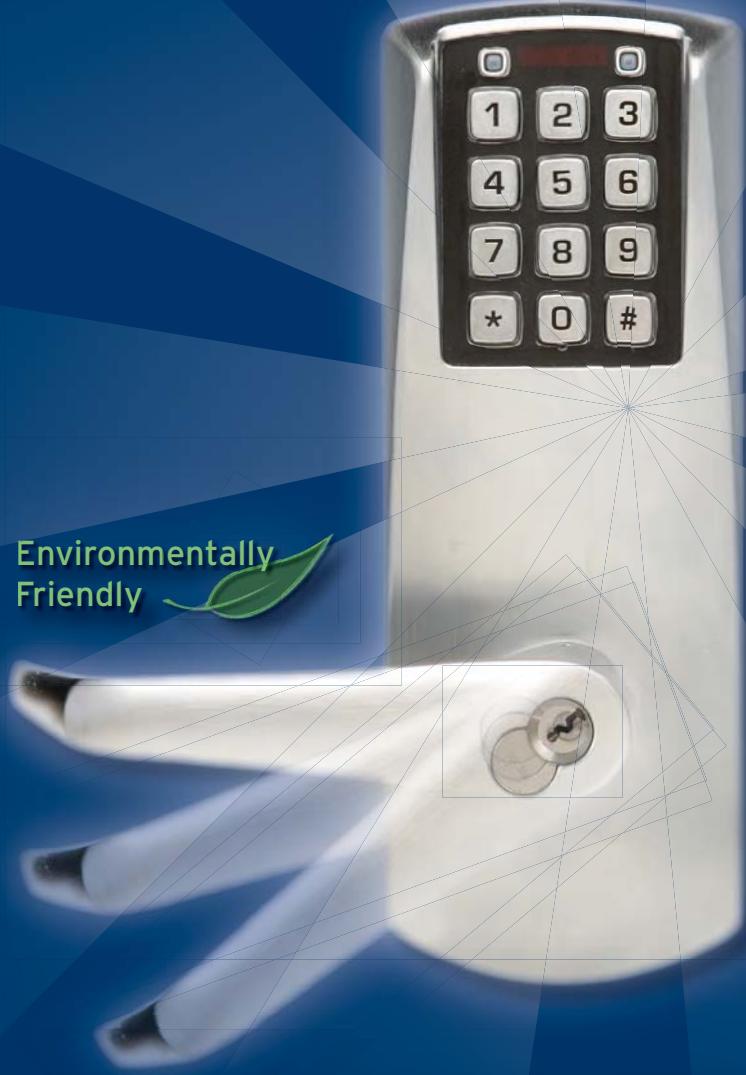

- No Wires to Install or Get Pinched
- No Batteries to Replace
- Environmentally Friendly
- PowerStar™ Patented Technology Powers the Lock with Each Turn of the Lever

Introducing the E-Plex® 2000 with  **POWERSTAR™**
Self-Powered Electronic Access Control

KABA®

**Simplex Features:**

- PIN Access
- Mechanical Pushbutton Locks
- Easily Programmed at the Door
- Single Code Access—One Code for all Authorized Users
- Available in Cylindrical, Exit Trim, and Mortise (where applicable)
- Easy to Manage—No Keys or Cards
- Easy to Install—No Wiring or Computers
- ANSI/BHMA Grade-1 Certified (where applicable)

How to Order	3
Door Handing	3
Where to Order.....	3
For More Information	3
Terms and Conditions	4

5000 Series

- PIN Access
- Mechanical Pushbutton Lock
- Single Access Code
- Cylindrical and Exit Trim
- Lever/Knob
- ANSI/BHMA Grade-1 Certified



Pages 7-11

1000 Series

- PIN Access
- Mechanical Pushbutton Lock
- Single Access Code
- Cylindrical
- Knob



Pages 12-15

L1000 Series

- PIN Access
- Mechanical Pushbutton Lock
- Single Access Code
- Cylindrical
- Lever



Pages 16-19

EE1000 Series

- PIN Access
- Mechanical Pushbutton Lock
- Control Both Entry/Egress
- Single Access Code
- Cylindrical
- Knob



Pages 20-23

8100 Series

- PIN Access
- Mechanical Pushbutton Lock
- Single Access Code
- Mortise
- Lever



Pages 24-26

LP1000 Series

- PIN Access
- Mechanical Pushbutton Lock
- Single Access Code
- Exit Trim
- Lever



Pages 27-29

Table of Contents (continued)

KABA®

2015 Series

- PIN Access
- Mechanical Pushbutton Lock
- Single Access Code
- Exit Trim
- Thumbtturn



Pages 30-32

6200 Series

- PIN Access
- Mechanical Pushbutton Lock
- Single Access Code
- Cylindrical
- Thumbtturn



Pages 36-38

3000 Series

- PIN Access
- Mechanical Pushbutton Lock
- Single Access Code
- Fits Narrow Stile Aluminum Glass Doors
- Thumbtturn



Pages 33-35

7100 Series

- PIN Access
- Mechanical Pushbutton Lock
- Single Access Code
- Deadbolt/Spring Latch/ Rim Deadlocking Latch
- Thumbtturn



Pages 39-41

900 Series

- PIN Access
- Mechanical Pushbutton Lock
- Single Access Code
- Deadbolt/Spring Latch
- Thumbtturn



Pages 42-45

9600 Series

- PIN Access
- Mechanical Pushbutton Lock
- Single Access Code
- Deadbolt/Spring Latch
- Thumbtturn



Pages 46-49

File Guard

- PIN Access
- Mechanical Pushbutton Lock
- Single Access Code
- Fits Standard 2, 4, and 5 Drawer Cabinets
- Special Lengths Available
- Thumbtturn



Pages 50-52

LD450/LD470 Series

- PIN Access
- Mechanical Pushbutton Lock
- Single Access Code
- Light Duty Application



Pages 53-58


Simplex® Accessories . . . 59-61

For information—please visit our Web site at:

<http://www.kabaaccess.com> or contact Customer Service at: 1.800.849.8324


How to Order

To order any of the products in this catalog, a part number must be provided. In most situations the part number has to be assembled to specify the desired product, as various options are available.

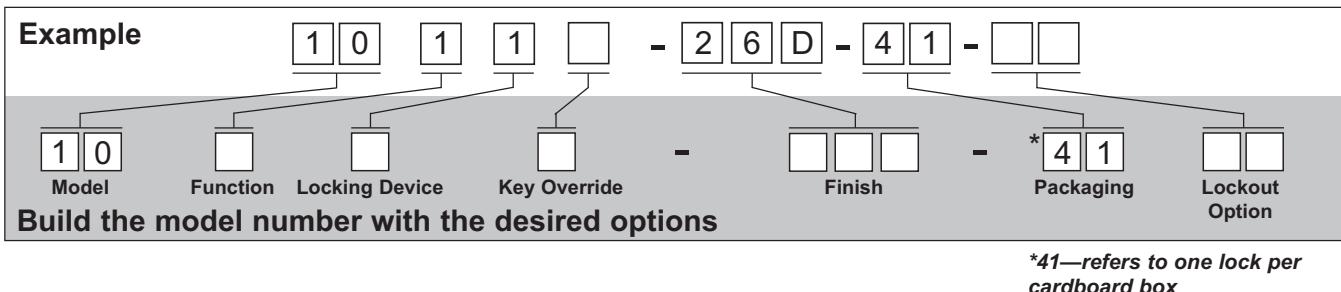

Door Handing

Some locks also require you to specify door handing. To determine handing, face the door from the exterior (access) side and select the corresponding diagram below.

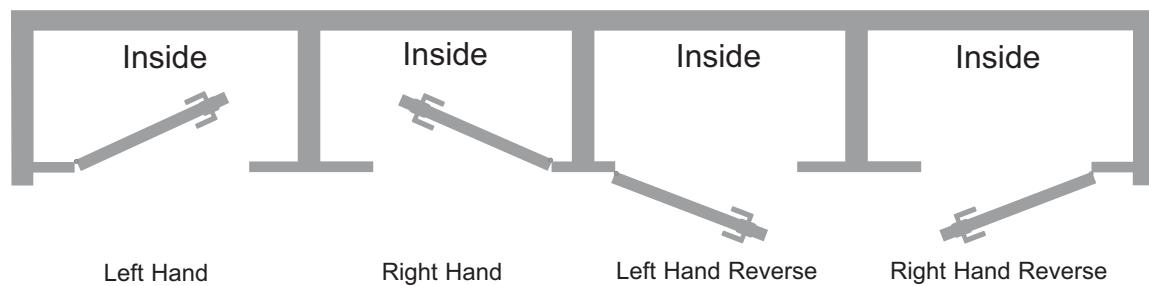

Where to Order

 **Contact your local supplier or call
1.800.849.8324 or 1.336.725.1331**

For More Information

www.kabaaccess.com



General Terms and Conditions of Sale

General Terms and Conditions of Sale

1. **ENTIRE AGREEMENT:** This Agreement constitutes the entire agreement between KABA ILCO Corp. dba Kaba Access Control ("KABA") and the Purchaser, and contains all of the terms and conditions relating to the sale of the product(s). This agreement supersedes all prior agreements, previous catalog terms and conditions, and other documents unless expressly incorporated herein.
2. **PAYMENT TERMS:** Unless otherwise stated, terms are net 30 days from the date of invoice. KABA reserves the right to charge interest at 1.5% per month (18% annually) on any overdue amounts. If KABA discovers that the Purchaser's financial condition does not warrant the above payment terms, then KABA, in its absolute discretion, may demand that the Purchaser pay in advance, pay cash upon delivery, or refuse Purchaser's order. In the latter case, KABA cannot be held liable for any damages of any nature whatsoever for its refusal to deliver goods in whole or in part.
3. **PRICES:** The product price(s) shall be according to KABA's price list in effect at the time of acceptance of the purchase order or according to its authorized quotation in force at the time of acceptance of the applicable purchase order.
4. **TAXES:** The price does not include any amounts for U.S. or International Federal Custom Duties, Canadian, U.S. or International Federal, Provincial, State, Local Excise, Goods and Services, Sales or Use, or Value added taxes. However, should KABA be obligated to pay any of the foregoing taxes, the Purchaser, upon demand, shall, within fifteen (15) days, reimburse KABA the total amount disbursed in respect thereof.
5. **MINIMUM ORDER REQUIREMENTS:** The minimum order amount for all orders accepted is \$400 USD, excluding the shipping charges. This does not apply to cut keys.
6. **PRODUCT INFORMATION:** Unless expressly stated in this Agreement, all information contained in the product brochures, pamphlets, or information circulars, are for reference purposes only and based on the best information available at time of publication. KABA reserves the right to make reasonable changes in its products from time to time and to deliver the modified products.
7. **INSTALLATION:** Unless otherwise expressly stated, the costs and materials required for installation are not included in the prices and/or quotations.
8. **POINT OF DELIVERY & SHIPPING:** Delivery points and terms are FOB KABA warehouses in the USA and Canada for KABA products. Should Purchaser request a shipping method or carrier different than KABA's standard, then the full amount of the shipping cost will be invoiced to the Purchaser. Drop shipments to a third party are subject to a \$25 surcharge, which is invoiced to Purchaser.
9. **DELIVERY TERMS:** KABA will notify the Purchaser if for any reason, it is unable to deliver the products as scheduled and cannot be held liable for any damages of any nature resulting from these delays.
10. **FORCE MAJEURE:** Should a delay in delivery be caused by a Force Majeure event, the time of delivery shall be extended by a reasonable amount of time with regard to all applicable circumstances. Upon mutual agreement, the parties shall set a new date for delivery. Except as to payments due hereunder, neither party shall be liable for failure to perform hereunder for the duration of and to the extent such failure is occasioned by a Force Majeure event, which is defined as follows: war, riots, insurrections, fire, flood, explosions, strikes and other labor or industrial disturbances, inevitable accidents, Government, State, Provincial or Municipal regulations and/or ordinances, an act of God, embargoes, blockades, delay in obtaining materials, legal restrictions, currency regulations, or any cause or condition beyond the reasonable control of the parties. Where such conditions continue for more than three (3) months, either party shall be free to terminate the Agreement. In the case of termination, KABA shall be paid the value proportionate to the Agreement price for the finished product and/or the work-in-progress as of the date of termination and the supportable costs.
11. **FAILURE TO ACCEPT DELIVERY:** If Purchaser fails to accept delivery at the scheduled time, the purchase price shall become due and payable in accordance with the original payment schedule and all risks associated with the product or parts of the product to be delivered, shall be borne by the Purchaser. Purchaser shall be responsible for all storage and handling costs incurred and to be incurred as a result thereof.
12. **TITLE:** Unless otherwise stipulated in this Agreement, ownership of the goods shall remain with KABA until full payment of the sale price has been received. Until complete payment has been received, Purchaser undertakes to warrant and keep the goods free and clear of all liens, other charges or encumbrances.
13. **RETURN POLICY:** Purchaser must obtain a Return Goods Authorization (RGA) number from KABA's Customer Service by calling in North America: (800) 849-8324 or Worldwide: (336) 725-1331, before returning any products whatsoever. The Purchaser must have the product serial number and invoice number pertaining to the original purchase available to give to the Customer Service Agent. KABA will send via Facsimile the Return Goods Authorization form, which includes the RGA number along with the "Ship To" address and RGA return instructions. RGAs expire after sixty (60) days from date of issuance. Returns of product by Purchaser are FOB KABA.
- 13.1 KABA warrants its new products free from design, material or workmanship flaws. Specific new product warranties vary according to products and are listed in the respective product section of the Access Control catalog or the respective product installation manual. Third party product(s) sold by KABA are warranted only to the extent provided by the original manufacturer's warranty and Purchaser must refer to the original manufacturer's warranty in such case. Refurbished or reconditioned KABA products are warranted for a ninety (90) day period from date of shipment. Failure of the Purchaser to notify KABA within the time limit set in the section shall constitute Purchaser's waiver to have the malfunction or damage remedied.

—continued



General Terms and Conditions of Sale (continued)

- The express warranties as set out herein, are the exclusive warranties provided under this Agreement and are in lieu of any other warranties, expressed or implied, statutory or otherwise, including but not limited to warranty of fitness for a particular purpose and merchantability. No distributor, dealer, sales representative and alike is authorized to bind KABA to any other warranty Agreement.
 - KABA will, at their discretion and at no charge, either repair, exchange or replace the product provided it is returned complete to KABA during the warranty period. However, purchaser is responsible for the labor to remove and reinstall the product(s) from Purchaser's premises.
 - Defective parts, which have been replaced, become the property of KABA who may dispose of them in any manner. Replacement parts become the property of the Purchaser upon their delivery.
 - KABA is not liable for any defects in materials, designs, drawings or information provided by the Purchaser, nor for information which is missing and could not be reasonably identified as such, by KABA.
 - KABA does not warrant the following:
 - (a) Normal wear and tear from use;
 - (b) Printer ribbons, batteries, key cards and other consumable parts used or supplied with the product;
 - (c) Damage of any nature to hardware finishes;
 - (d) Faulty or defective product operation(s) caused by unusual or unforeseeable use or conditions;
 - (e) Improper installation, operation or maintenance of the product;
 - (f) Any product or system in which KABA's product(s) is incorporated;
 - (g) Force majeure as defined by section 11 of this Agreement;
 - (h) Repairs or alterations carried out by anyone other than KABA;
- 13.2 **VARIANCE:** Any claims that the quantity and description of goods delivered and the quantity and description of goods ordered do not conform to this Agreement are waived unless the Purchaser advises KABA's Customer Service department in writing, within fifteen (15) days from the date of receipt of the product(s).
- 13.3 **RETURNS FOR CREDIT:** In order to return new merchandise, the Purchaser must obtain a Returned Goods Authorization (RGA) number from KABA Customer Service department. There is a twenty-five percent (25%) restocking charge applied to all returns of new product. Custom products cannot be returned for credit for any reason other than product failure. Credit will not be offered for product that is returned incomplete or damaged.
14. **LIMITATION OF LIABILITY:** The total liability of KABA for all claims of any kind, whether in contract, liability or otherwise, arising out of, connected with or resulting from KABA's performance or breach of this Agreement or services furnished hereunder shall in no event exceed the total purchase price expressed in this Agreement. KABA shall not under any circumstances be held liable for loss of profits or revenues, loss of use of product or any other product software, system, or facility, loss of data or information, lack or loss of productivity, interest charges or cost of capital, cost of substitute product, software, systems or services, cost of purchases or replacement power, downtime costs, or for any special, indirect or consequential damages of any nature.
15. **ASSIGNMENT:** KABA may assign this Agreement in whole or in part, to any parent, subsidiary or affiliated corporation. Subject to the prior written approval of KABA, Purchaser may assign the present Agreement to any parent, subsidiary or affiliated corporation.
16. **DAMAGES:** If Purchaser does not fulfill its obligations or is in default or breach of contract by the terms of this Agreement, KABA may then terminate the agreement by notice in writing as set out on the face of KABA's acknowledgement. KABA has the right to claim compensation for any loss it incurs as a result of Purchaser's default.
17. **APPLICABLE LAW:** This Agreement shall be governed by and construed in accordance with the laws of the State of North Carolina, USA.
18. **TERMINATION:** If the Purchaser terminates this Agreement, in whole or in part, by written notice, KABA will, upon receipt of the termination notice, cease the performance of the contract according to the instructions of the Purchaser. In such a case, Purchaser shall be invoiced for costs incurred depending on the nature of the product.
19. **SEVERABILITY:** Any term, condition or provision of this Agreement, or any part thereof, which is or may be found to be prohibited or unenforceable in any jurisdiction shall, as regards such jurisdiction and to the extent of such prohibition or unenforceability, be deemed to be severed from this Agreement, and the remaining terms, conditions and provisions of this Agreement shall remain in full force and effect.
20. **WAIVER:** Any act or omission by KABA will not constitute or be deemed to be a waiver of the rights granted to KABA by the terms of this Agreement.
21. **SPECIAL CLAUSES FOR KEY CONTROL PRODUCTS:**
 - (a) For combined products, master keying is included in the product price.
 - (b) KABA will only accept orders for key blanks, cut keys and combined cylinders if the appropriate and current authorizations are enclosed, which depend upon the product and key section.
 - (c) Cylinders should be ordered in multiples of 10.
 - (d) Failure to use genuine KABA components will void all warranties.
 - (e) Laser cutting key blanks void all warranties.

Disclaimer: While reasonable efforts were made to ensure the accuracy of this document at the time of printing, KABA assumes no liability for any errors or omissions. This information is subject to be revised without notice, and changes may be incorporated in future releases.



Notes



- PIN Access
- Mechanical Pushbutton Lock
- Single Access Code
- Cylindrical and Exit Trim
- Lever/Knob
- ANSI/BHMA Grade-1 Certified

Features

Access Control:	Mechanical pushbutton lock—eliminates problems and costs associated with issuing, controlling, and collecting keys and cards. Provides exterior access by combination, while allowing free egress.																	
No Battery:	Fully mechanical lock eliminates the material and labor expense of battery replacements																	
Locking Device Options:	<p><u>Cylindrical:</u> Cylindrical latch with 3 hour UL/ULC fire rating on "A" labeled doors</p> <p><u>Rim Exit Device:</u> Compatible with most leading brands of exit devices (exit device and mounting hardware not included)</p> <p>Universal mounting plate (included) simplifies installation and eliminates any requirement to stock different locks/plates for various exit devices</p>																	
Exit Device Compatibility:*	<p>*For the most accurate listing of compatible exit devices, see this page on our website.</p> <table> <tbody> <tr> <td>Arrow S1250</td> <td>Monarch 18R/F-18R</td> <td>Sargent 8888</td> </tr> <tr> <td>Arrow S3800</td> <td>Precision 21/FL 21</td> <td>Von Duprin 22/22F</td> </tr> <tr> <td>Corbin Russwin 5200/5200A</td> <td>Sargent 2828</td> <td>Von Duprin 98/98F</td> </tr> <tr> <td>Detex 10/F10</td> <td>Sargent 3828</td> <td>Von Duprin 99/99F</td> </tr> <tr> <td>Dorma 9300/9300F</td> <td>Sargent 8800</td> <td>Yale 7100</td> </tr> </tbody> </table> <p>• Cannot be used with mortise design or most vertical rod Exit Devices</p> <p>ATTENTION: Compatibility is subject to change if modifications are made by Exit Device manufacturers without Kaba Access Control's knowledge</p>			Arrow S1250	Monarch 18R/F-18R	Sargent 8888	Arrow S3800	Precision 21/FL 21	Von Duprin 22/22F	Corbin Russwin 5200/5200A	Sargent 2828	Von Duprin 98/98F	Detex 10/F10	Sargent 3828	Von Duprin 99/99F	Dorma 9300/9300F	Sargent 8800	Yale 7100
Arrow S1250	Monarch 18R/F-18R	Sargent 8888																
Arrow S3800	Precision 21/FL 21	Von Duprin 22/22F																
Corbin Russwin 5200/5200A	Sargent 2828	Von Duprin 98/98F																
Detex 10/F10	Sargent 3828	Von Duprin 99/99F																
Dorma 9300/9300F	Sargent 8800	Yale 7100																
Number of Codes:	Single access code—one easy to manage code for all users																	
Programming:	Lock is easily programmed via keypad without removing lock from the door																	
Handing:	Non-handed, pre-assembled for left-hand door installations—easily changed in the field																	
Key Override:	Key-in-lever cylinders, small format interchangeable cores, and large format removable cores																	
Operation Modes:	<p>Single credential—access</p> <p>Passage (select models)—Allows access without using the lock entry code. Feature activated from the inside with a thumbturn or key (included with all passage feature models)</p> <p>Exit trim may be "dogged" if exit device allows</p>																	
Direct Drive Design:	Clutch free design—minimizes friction and wear																	
Economical:	A cost effective access control solution																	

Mechanical Features

Construction:	Extra heavy-duty, solid cast housings, solid cast levers, and wear tested for extensive use in indoor and outdoor applications
Numeric Keypad:	Vandal resistant, solid metal pushbuttons
Handing:	Non-handed, pre-assembled for left-hand door installations--easily changed in the field
Standard Finishes:	Satin Chrome 26D (626) housings and levers Black 676 housings with Satin Chrome 26D (626) levers and accents
Optional Finishes:	Bright Brass 03 (605) housings and levers Bright Chrome 026 (625) housings and levers Dark Bronze 744 housings and levers with Brass accents Satin Brass 04 (606) housings and levers
Backset:	<u>Cylindrical</u> : 2 3/4" (70 mm) backset, 2 3/8" (60 mm) backset <u>Exit Device</u> : varies by exit device
Latch:	1/2" (13 mm) latch, 3/4" (19 mm) latch (optional)
Minimum Stile Recommended:	5" (127 mm)
Weight:	<u>Cylindrical</u> : 9 lbs. (4.08 kg) <u>Exit Device</u> : 8 lbs (3.63 kg)

Key Override

Universal Key-In-Lever Cylinders:	Includes Kaba 1599 6-pin cylinder (prepped to Kaba 90 or Schlage "C" Keyway, keyed different) and tailpieces for compatibility with:
Abloy 5277	Kaba Peaks 1099
Abloy 5477	Marks
Arrow C 100	Medeco 20W200H1
ASSA 65611	Sargent 10 Line
ASSA 65691	Schlage 23-001
Corbin Russwin 2000-03	Schlage Primus 20-760
Kaba 1539	Australian: Kaba expert 107K5 and Boyd KC286
Kaba 1599	European: Quattro S/Expert an AP2 (5 and 6-pin)
Kaba Gemini 4730	
Interchangeable Cores:	Small format-Best and equivalents (6 or 7-pin length)
Removable Cores:	Large format-Medeco/ASSA/Yale (5 or 6-pin), Corbin Russwin, Schlage, and Sargent

Installation

Door Preparation:	Easily installs on wood or metal doors. ASA 161 door preparation with additional through holes
Door Thickness:	<u>Cylindrical</u> : 1 3/8" (35 mm) to 2 1/4" (57 mm). Pre-assembled to accommodate doors 1 5/8" (41 mm) to 2" (51 mm) <u>Exit Trim</u> : 1 3/4" (44 mm) to 2 1/4" (57 mm). Pre-assembled to accommodate doors 1 3/4" (44 mm) to 2 1/8" (54 mm)
Items Supplied Include:	Lock assembly, installation manual, full scale template and required installation hardware
Additional Items Supplied With Key-in-Lever Cylinder model only:	Universal Kaba high security 1599 6-pin cylinder with tailpiece, and two nickel silver keys


Certification and Testing

Accessibility Standard:	Americans with Disabilities Act (ADA)
Durability:	ANSI/BHMA Grade 1 Certified, A156.2; weather resistant, wear tested for extensive use in indoor and outdoor applications
Fire Rating:	3-hour UL/ULC fire rating for "A" label doors




Warranty

Warranty:	3-year warranty
------------------	-----------------

Cylindrical

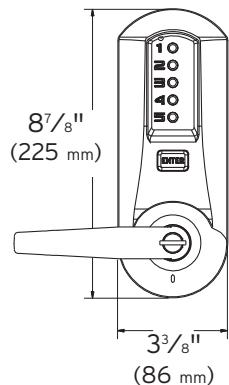


Exterior

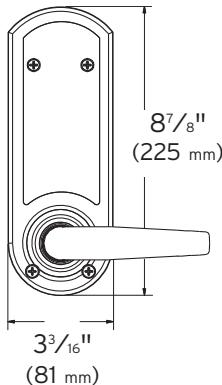


Interior

Model 502x




- Combination Entry
- Key Override
- Exterior Combination Change
- Knob Available

Model 503x




- Combination Entry
- Key Override
- Interior Combination Change, DOD Compliant
- Knob Available

Model 504x




- Combination Entry
- Key Override
- Exterior Combination Change
- Passage
- Knob Available

Model 505x




- Combination Entry
- Key Override
- Interior Combination Change, DOD Compliant, Passage
- Knob Available

Exit Trim

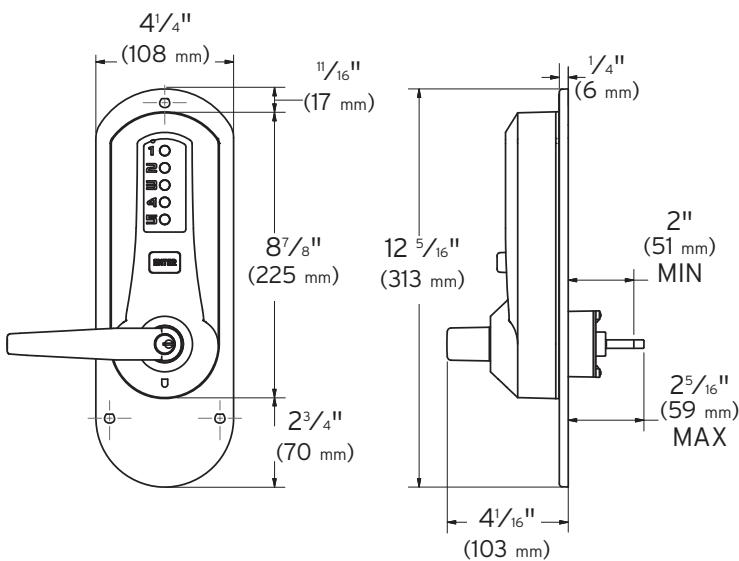


Exterior

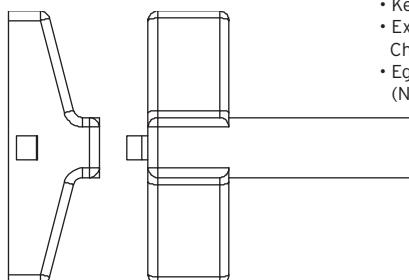


Interior
(not supplied)

Model 5010



- Combination Entry
- Key Override
- Exterior Combination Change (only)
- Egress with Exit Device (Not Supplied)

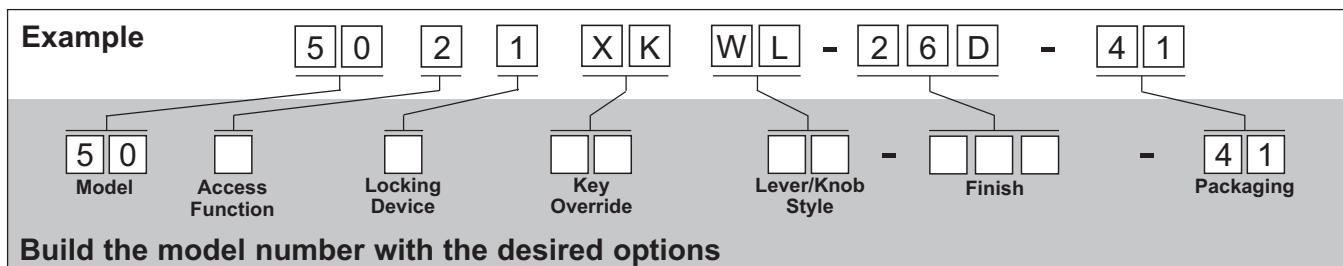

Base Model	Description	Base Price
5021XKWL26D41	Cylindrical Lock with Lever, Key-in-Lever Cylinder	\$486.00

Choose one option from each category

Function Options	Description	Price
1*	Exit Trim (E.T.) (available with lever only)	Add \$100.00
2	Cylindrical Lock	No Charge
3	Cylindrical Lock, Interior Combination Change—D.O.D.	Add \$50.00
4	Cylindrical Lock, Passage	Add \$50.00
5	Cylindrical Lock, Passage, Interior Combination Change—D.O.D.	Add \$100.00

Locking Device Options	Description	Price
0*	Exit Trim (available with E.T. only)	No Charge
1	Cylindrical $\frac{1}{2}$ " (13 mm) throw latch, floating face plate $2\frac{3}{4}$ " (70 mm) backset (UL listed)	No Charge
2	Cylindrical $\frac{1}{2}$ " (13 mm) throw latch, floating face plate $2\frac{3}{8}$ " (60 mm) backset (UL listed)	No Charge
5	Cylindrical $\frac{3}{4}$ " (19 mm) throw latch, beveled face plate $2\frac{3}{8}$ " (70 mm) backset (UL listed)	No Charge

Key Override Options**	Description	Price
XK	K-I-L Kaba Cylinder (Kaba 90 keyway) Included	No Charge
XS	K-I-L Kaba Cylinder (Schlage "C" keyway) Included	No Charge
B	I/C Best and Equivalents (6 or 7-pin Length)	No Charge
C	R/C Corbin Russwin	No Charge
M	R/C Medeco/ASSA/Yale (5 or 6-pin Length)	No Charge
R	R/C Sargent	No Charge
S	R/C Schlage	No Charge





Simplex®
5000 Series

SIMPLEX®

Lever/Knob Options	Description	Price
WL	Winston Lever	No Charge
WK	Winston Knob (Cylindrical Locks Only)	No Charge
Finish Options	Description	Price
026	Bright Chrome (625)	Add \$25.00
03	Bright Brass (605)	Add \$25.00
04	Satin Brass (606)	Add \$25.00
26D	Satin Chrome (626)	No Charge
676	Black with Satin Chrome Accents	No Charge
744	Dark Bronze with Brass Accents (Simulated 10B/613)	Add \$100.00

Notes

+ Exit Device Compatibility

***For the most accurate listing of compatible exit devices, see this page on our website.**

Arrow S1250	Monarch 18R / F-18R	Sargent 8888
Arrow S3883F	Precision 21 / FL 21	Von Duprin 22 / 22F
Corbin Russwin 5200	Sargent 2828	Von Duprin 98 / 98F
Detex 10 / F10	Sargent 3828	Von Duprin 99 / 99F
Dorma 9300 / 9300F	Sargent 8800	Yale 7100

• Cannot be used with mortise design or most vertical rod Exit Devices

ATTENTION: Compatibility is subject to change if modifications are made by Exit Device manufacturers without Kaba Access Control's knowledge

**** Interchangeable/Removable core cylinders are not included with the lock**

Items Supplied with the Lock

- Installation Manual
- Full-Scale Template
- Required Installation Hardware
- Tailpiece for Specified Key Override

Additional Items Supplied with Key-In-Lever Models Only

- Universal Kaba High Security 1599 6-pin cylinder with tailpiece (includes two nickel silver keys)
- Four additional tailpieces that can be used with many leading conventional cylinders

Exit device not included (sold separately)



- **PIN Access**
- **Mechanical Pushbutton Lock**
- **Single Access Code**
- **Cylindrical**
- **Knob**

Features

Access Control:	Mechanical pushbutton lock—eliminates problems and costs associated with issuing, controlling, and collecting keys and cards. Provides exterior access by combination, while allowing free egress.
No Battery:	Fully mechanical lock eliminates the material and labor expense of battery replacements
Locking Device Options:	Cylindrical latch with 3-hour UL/ULC fire rating on "A" labeled doors
Number of Codes:	Single access code—one easy to manage code for all users
Programming:	Lock is easily programmed via keypad without removing lock from the door
Handing:	Factory-handed for left hand doors; easily field reversible
Key Override (Optional):	Small format interchangeable cores, large format removable cores
Operation Modes:	Single credential—access Passage (select models)—Allows access without using the lock entry code Feature activated from the inside with a thumbturn or key (included with all passage feature models) Lockout (select models)—Disables the lock from the inside so that the entry codes can not be used to gain access. Access is permitted using the key override only.
Economical:	A cost effective access control solution

Mechanical Features

Construction:	Heavy-duty cylindrical lock housing with cast front housing; unified trim plate; cast knobs
Numeric Keypad:	Vandal resistant, solid metal pushbuttons
Handing:	Factory-handed for left hand doors; easily field reversible
Standard Finishes:	Satin Chrome 26D (626), Antique Brass 05 (609)
Optional Finishes:	Bright Brass 03 (605), Bright Chrome 026 (625)
Backset:	2 $\frac{3}{4}$ " (70 mm), 2 $\frac{3}{8}$ " (60 mm)
Latch:	$\frac{1}{2}$ " (13 mm) throw latch; $\frac{3}{4}$ " (19 mm) throw latch (optional)
Minimum Stile Recommended:	5" (127 mm)
Weight:	7.25 lbs. (3.3 kg)
Strike:	Standard strike plate; ASA strike plate

Key Override

Interchangeable Cores:	Small format—Best and equivalents (6 or 7-pin length)
Removable Cores:	Large format—Medeco/ASSA/Yale (5 or 6-pin length), Corbin Russwin, Schlage, and Sargent

Installation


Door Preparation:	Easily installs on wood or metal doors. ASA 161 door preparation with additional through bore holes required
Door Thickness:	1 $\frac{3}{8}$ " (35 mm) to 2 $\frac{1}{4}$ " (57 mm)—Preassembled to accommodate 1 $\frac{5}{8}$ " (41 mm) to 2" (51 mm)
Items Supplied Include:	Lock assembly, installation manual, full-scale template, combination change plug and access key, and required installation hardware

Certification and Testing


Durability:	Highly weather resistant
Fire Rating:	3-hour UL/ULC fire rating for "A" labeled doors

Warranty


Warranty:	3-year warranty
------------------	-----------------

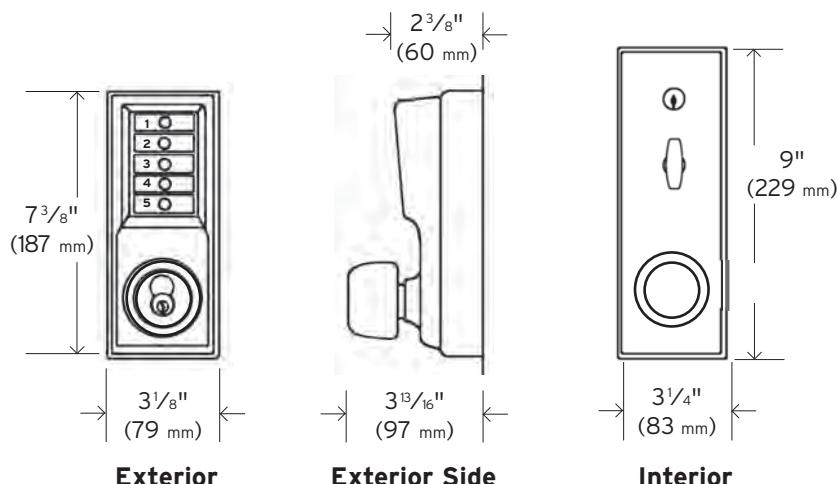Cylindrical

Model 101x	Model 102x
<ul style="list-style-type: none"> Combination Entry Interior Combination Change 	<ul style="list-style-type: none"> Combination Entry Key Override (not supplied) Interior Combination Change
Model 103x	Model 104x
<ul style="list-style-type: none"> Combination Entry Interior Combination Change Passage 	<ul style="list-style-type: none"> Combination Entry Key Override (not supplied) Passage Interior Combination Change

Lockout Models

- Combination Entry
- Key Override (not supplied)
- Interior Combination Change
- Lockout from inside trim

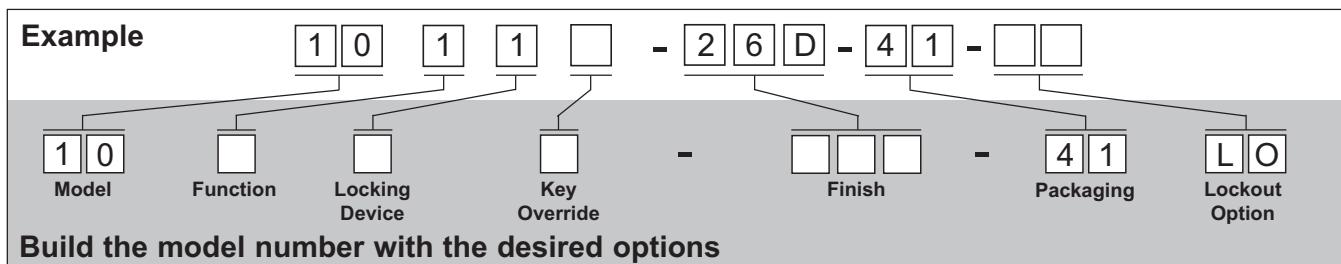

Base Model	Description	Base Price
101126D41	Cylindrical Lock with Knob, No Key Override	\$415.00

Choose one option from each category

Function Options	Description	Price
1	Cylindrical Lock, Combination Entry Only	No Charge
2	Cylindrical Lock, Combination Entry and Key Override	Add \$70.00
3	Cylindrical Lock, Combination Entry and Passage	Add \$50.00
4	Cylindrical Lock, Combination Entry, Key Override, and Passage	Add \$120.00

Locking Device Options	Description	Price
1	Cylindrical $\frac{1}{2}$ " (13 mm) throw latch, floating face plate $2\frac{3}{4}$ " (70 mm) backset (UL listed)	No Charge
2	Cylindrical $\frac{1}{2}$ " (13 mm) throw latch, floating face plate $2\frac{5}{8}$ " (60 mm) backset (UL listed)	No Charge
5	Cylindrical $\frac{3}{4}$ " (19 mm) throw latch, beveled face plate $2\frac{3}{4}$ " (70 mm) backset (UL listed)	No Charge

Key Override Options*	Description	Price
B	I/C Best and Equivalents (6 or 7-pin Length)	No Charge
C	R/C Corbin Russwin	No Charge
M ⁺⁺	R/C Medeco/ASSA/Yale (5 or 6-pin Length)	No Charge
R	R/C Sargent	No Charge
S	R/C Schlage	No Charge





Simplex®
1000 Series

SIMPLEX®

Finish Options	Description	Price
026	Bright Chrome (625)	Add \$25.00
03	Bright Brass (605)	Add \$25.00
05	Antique Brass (609)	No Charge
26D	Satin Chrome (626)	No Charge

Lockout Option***	Description	Price
LO	Lock Out (Available on Key Override Models Only)	Add \$100.00

Notes

* Interchangeable/Removable core cylinders are not included with the lock

** Medeco/ASSA/Yale (5 and 6-pin length)

5 and 6-pin Medeco/ASSA cylinders require a special knob spacer (Included in Package).

*** Lockout Option

This field can be left blank if no optional features are required.

Items Supplied with the Lock

- Installation Manual
- Full-Scale Template
- Required Installation Hardware

Note: Knob locks are factory handed for left hand operation unless otherwise pre-arranged with manufacturing facility (minimum quantity required).



- PIN Access
- Mechanical Pushbutton Lock
- Single Access Code
- Cylindrical
- Lever

Features

Access Control:	Mechanical pushbutton lock—eliminates problems and costs associated with issuing, controlling, and collecting keys and cards. Provides exterior access by combination, while allowing free egress.
No Battery:	Fully mechanical lock eliminates the material and labor expense of battery replacements
Locking Device Options:	Cylindrical latch with 3-hour UL/ULC fire rating on "A" labeled doors
Number of Codes:	Single access code—one easy to manage code for all users
Programming:	Lock is easily programmed via keypad without removing lock from the door
Handing:	Factory-handed; not field reversible
Key Override (Optional):	Small format interchangeable cores, large format removable cores
Operation Modes:	Single credential—access Passage (select models)—Allows access without using the lock entry code Feature activated from the inside with a thumbturn or key (included with all passage feature models) Privacy (select models)—Disables the lock from the inside so that the entry codes can not be used to gain access. Access is permitted using the key override only when in this mode.
Economical:	A cost effective access control solution

Mechanical Features

Construction:	Heavy-duty cylindrical lock housing with cast front housing, unified trim plate, and fixed ADA-compliant levers
Numeric Keypad:	Vandal resistant, solid metal pushbuttons
Handing:	Factory-handed; not field reversible
Standard Finishes:	Satin Chrome 26D (626), Antique Brass 05 (609)
Optional Finishes:	Bright Brass 03 (605), Bright Chrome 026 (625)
Backset:	2 $\frac{3}{4}$ " (70 mm), 2 $\frac{3}{8}$ " (60 mm)
Latch:	1/2" (13 mm) throw latch; 3/4" (19 mm) throw latch (optional)
Minimum Stile Recommended:	5" (127 mm)
Weight:	8.25 lbs. (3.7 kg)
Strike:	Standard strike plate; ASA strike plate

Key Override

Interchangeable Cores:	Small format—Best and equivalents (6 or 7-pin length)
Removable Cores:	Large format—Medeco/ASSA/Yale (5 or 6-pin length), Corbin Russwin, Schlage, and Sargent

Installation

Door Preparation:	Easily installs on wood or metal doors. ASA 161 door preparation with additional through holes
Door Thickness:	1 $\frac{3}{8}$ " (35 mm) to 2 $\frac{1}{4}$ " (57 mm)—Pre-assembled to accommodate 1 $\frac{5}{8}$ " (41 mm) to 2" (51 mm) doors
Items Supplied Include:	Lock assembly, installation manual, full-scale template, combination change plug and access key, and required installation hardware

Certification and Testing



Accessibility Standard:	Americans with Disabilities Act (ADA)
Durability:	Compliance with D.O.D. 5220.22M; highly weather resistant
Fire Rating:	3-hour UL/ULC fire rating for "A" labeled doors

Warranty


Warranty:	3-year warranty
------------------	-----------------

Cylindrical


Door handing must be specified when ordering.

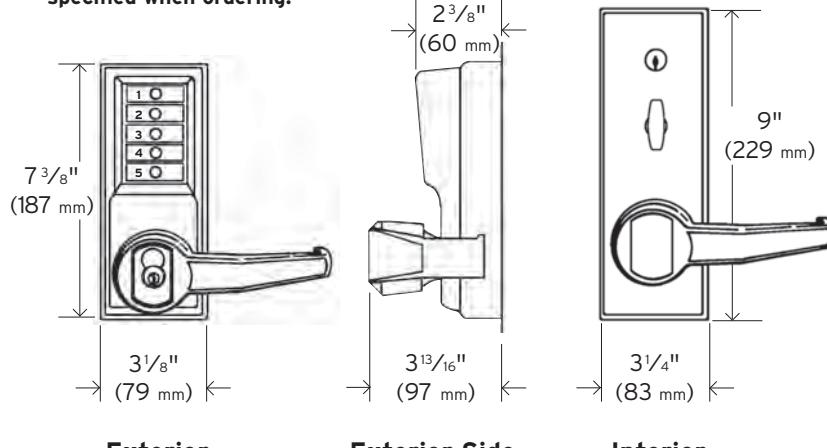**Exterior****Exterior Side****Interior****Model L101x**


- Combination Entry
- Interior Combination Change

Model L102x


- Combination Entry
- Key Override (not supplied)
- Interior Combination Change

Model L103x


- Combination Entry
- Interior Combination Change
- Passage

Model L104x

- Combination Entry
- Key Override (not supplied)
- Interior Combination Change
- Passage

Model L1076

- Combination Entry
- Key Override (not supplied)
- Interior Combination Change
- Privacy (Lockout)

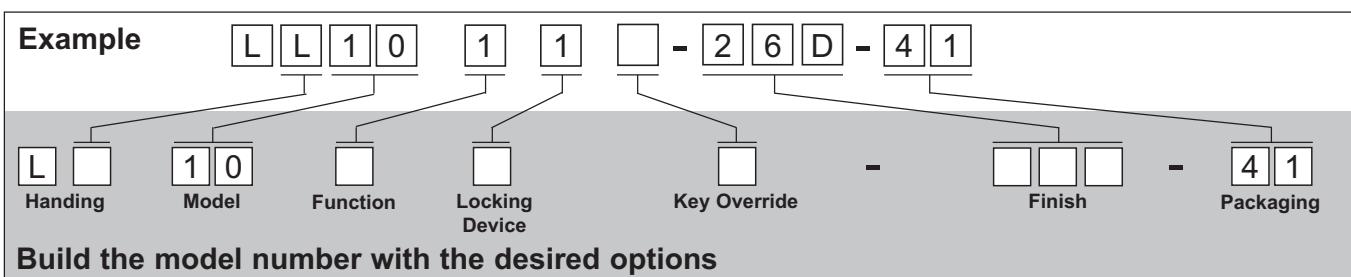

Base Model	Description	Base Price
LL101126D41	Cylindrical Lock with Lever, No Key Override	\$496.00

Choose one option from each category

Handing Options	Description	Price
L	Left Hand or Left Hand Reverse	No Charge
R	Right Hand or Right Hand Reverse	No Charge

Function Options	Description	Price
1	Cylindrical Lock, Combination Entry Only	No Charge
2	Cylindrical Lock, Combination Entry and Key Override	Add \$70.00
3	Cylindrical Lock, Combination Entry and Passage	Add \$50.00
4	Cylindrical Lock, Combination Entry, Key Override, and Passage	Add \$120.00
7	Cylindrical Lock, Combination Entry, Key Override, and Privacy (Lockout) (Requires "6" Locking Device Option) 1 3/4"(44mm) door thickness <u>only</u>	Add \$90.00

Locking Device Options	Description	Price
1	Cylindrical 1/2" (13 mm) throw latch, floating face plate 2 3/4" (70 mm) backset (UL listed)	No Charge
2	Cylindrical 1/2" (13 mm) throw latch, floating face plate 2 5/8" (60 mm) backset (UL listed)	No Charge
5	Cylindrical 3/4" (19 mm) throw latch, beveled face plate 2 3/4" (70 mm) backset (UL listed)	No Charge
6	Cylindrical 3/4" (19 mm) throw latch, beveled face plate—(for 1076 Only) 2 3/4" (70 mm) backset (UL listed) 1 3/4"(44mm) door thickness <u>only</u>	No Charge





Simplex®
L1000 Series

SIMPLEX®

Key Override Options*	Description	Price
B	I/C Best and Equivalents (6 or 7-pin Length)	No Charge
C	R/C Corbin Russwin	No Charge
M ⁺⁺	R/C Medeco/ASSA/Yale (5 or 6-pin Length)	No Charge
R	R/C Sargent	No Charge
S	R/C Schlage	No Charge

Finish Options	Description	Price
026	Bright Chrome (625)	Add \$25.00
03	Bright Brass (605)	Add \$25.00
05	Antique Brass (609)	No Charge
26D	Satin Chrome (626)	No Charge

Notes

* Interchangeable/Removable core cylinders are not included with the lock

** Medeco/ASSA/Yale (5 and 6-pin length)

5 and 6-pin Medeco/ASSA cylinders require a special knob spacer (Included in Package).

Items Supplied with the Lock

- Installation Manual
- Full-Scale Template
- Required Installation Hardware



- **PIN Access**
- **Mechanical Pushbutton Lock**
- **Control Both Entry and Egress**
- **Single Access Code**
- **Cylindrical**
- **Knob**

Features

Access Control:	Mechanical pushbutton lock—eliminates problems and costs associated with issuing, controlling, and collecting keys and cards. Provides interior and exterior access by combination.
No Battery:	Fully mechanical lock eliminates the material and labor expense of battery replacements
Locking Device Options:	Cylindrical latch with 3-hour UL/ULC fire rating on "A" labeled doors
Number of Codes:	Single access code—one easy to manage code for all users
Programming:	Lock is easily programmed via keypad without removing lock from the door
Handing:	Factory handed for left hand doors; field reversible
Key Override (Optional):	Small format interchangeable cores, large format removable cores
Operation Modes:	Single credential—access Single credential—egress
Economical:	A cost effective access control solution

Mechanical Features

Construction:	Heavy-duty cylindrical lock with cast front and back housings; cast knobs
Numeric Keypad:	Vandal resistant, solid metal pushbuttons
Door Handing:	Factory handed for left hand doors; easily field reversible
Finishes:	Bright Chrome 026 (625), Bright Brass 03 (605), Antique Brass 05 (609), Satin Chrome 26D (626)
Backset:	2 3/4" (70 mm)
Latch:	1/2" (13 mm) throw latch, 3/4" (19 mm) throw latch (optional)
Strike:	Standard strike plate; ASA strike plate
Minimum Stile Recommended:	5" (127 mm)
Weight:	10.25 lbs. (4.6 kg)

Key Override

Interchangeable Cores:	Small format—Best and equivalents (6 or 7-pin length)
Removable Cores:	Large format—Medeco/ASSA/Yale (5 or 6-pin length), Corbin Russwin, Schlage, and Sargent

Installation



Door Preparation:	ASA 161-door preparation with additional through bore holes
Door Thickness:	1 3/4" (44 mm) to 2 1/4" (57 mm); Modified lock for more than 2" (51) thick door (up to 2 1/4") available (specify when ordering)
Items Supplied Include:	Lock assembly, installation manual, full-scale template, combination change tool and required installation hardware

Certification and Testing


Durability:	Highly-weather resistant
Fire Rating:	3-hour UL/ULC fire rating for "A" labeled doors

Warranty


Warranty:	1-year warranty
------------------	-----------------

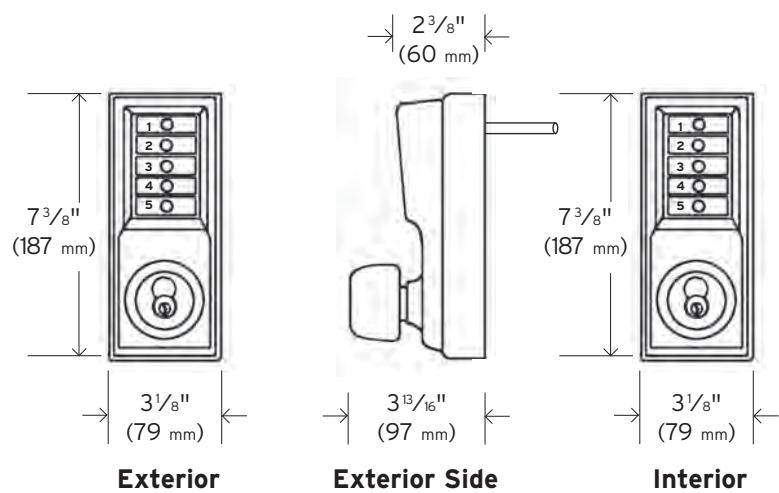Cylindrical**Model
EE101x/EE101x**


- Combination Entry
- Combination Egress

**Model
EE102x/EE101x**

- Combination Entry
- Combination Egress
- Key Override Entry (not supplied)

**Model
EE102x/EE102x**

- Combination Entry
- Combination Egress
- Key Override Entry (not supplied)
- Key Override Egress (not supplied)

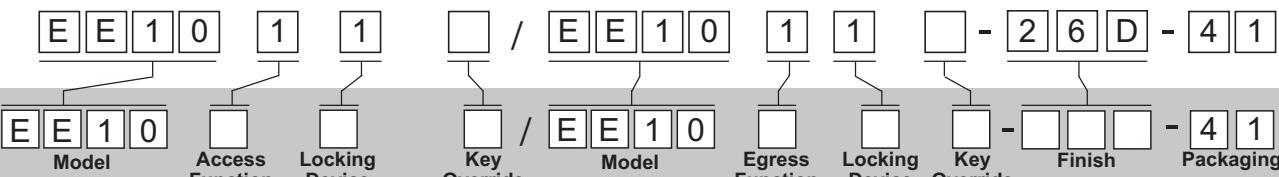Example**Build the model number with the desired options**

Base Model	Description	Base Price
EE1011/EE101126D41	Cylindrical Lock with Knobs, Entry/Egress (Back-to-Back), No Key Override	\$900.00

Choose one option from each category

Access Function Options	Description	Price
1	Cylindrical Lock, Combination Entry Only	No Charge
2	Cylindrical Lock, Combination Entry and Key Override	Add \$70.00

Locking Device Options	Description	Price
1	Cylindrical $\frac{1}{2}$ " (13 mm) throw latch, floating face plate 2 $\frac{3}{4}$ " (70 mm) backset (UL listed)	No Charge
5	Cylindrical $\frac{3}{4}$ " (19 mm) throw latch, beveled face plate 2 $\frac{3}{4}$ " (70 mm) backset (UL listed)	No Charge

Key Override Options*	Description	Price
B	I/C Best and Equivalents (6 or 7-pin Length)	No Charge
C	R/C Corbin Russwin	No Charge
M ⁺⁺	R/C Medeco/ASSA/Yale (5 or 6-pin Length)	No Charge
R	R/C Sargent	No Charge
S	R/C Schlage	No Charge

Egress Function Options	Description	Price
1	Cylindrical Lock, Combination Entry Only	No Charge
2	Cylindrical Lock, Combination Entry and Key Override	Add \$70.00

Locking Device Options	Description	Price
1	Cylindrical $\frac{1}{2}$ " (13 mm) throw latch, floating face plate 2 $\frac{3}{4}$ " (70 mm) backset (UL listed)	No Charge
5	Cylindrical $\frac{3}{4}$ " (19 mm) throw latch, beveled face plate 2 $\frac{3}{4}$ " (70 mm) backset (UL listed)	No Charge





Simplex®
EE1000 Series

SIMPLEX®

Key Override Options ⁺	Description		Price
B	I/C	Best and Equivalents (6 or 7-pin Length)	No Charge
C	R/C	Corbin Russwin	No Charge
M ⁺⁺	R/C	Medeco/ASSA/Yale (5 or 6-pin Length)	No Charge
R	R/C	Sargent	No Charge
S	R/C	Schlage	No Charge

Finish Options	Description	Price
026	Bright Chrome (625)	Add \$50.00
03	Bright Brass (605)	Add \$50.00
05	Antique Brass (609)	No Charge
26D	Satin Chrome (626)	No Charge

Notes


⁺ Interchangeable/Removable core cylinders are not included with the lock

⁺⁺ Medeco/ASSA/Yale (5 and 6-pin length)

5 and 6-pin Medeco/ASSA cylinders require a special knob spacer (Included in Package).

Items Supplied with the Lock

- Installation Manual
 - Full-Scale Template
 - Required Installation Hardware
-

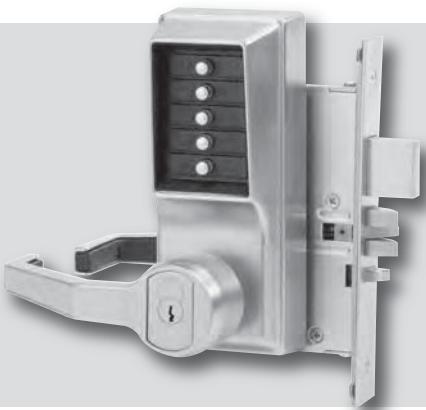

- **PIN Access**
- **Mechanical Pushbutton**
- **Single Access Code**
- **Mortise**
- **Lever**

Features

Access Control:	Mechanical pushbutton lock—eliminates problems and costs associated with issuing, controlling, and collecting keys and cards. Provides exterior access by combination, while allowing free egress.
No Battery:	Fully mechanical lock eliminates the material and labor expense of battery replacements
Locking Device Options:	Mortise with 1" (25 mm) deadbolt, $\frac{3}{4}$ " (19 mm) two-piece anti-friction latch Mortise with $\frac{3}{4}$ " (19 mm) two-piece anti-friction latch
Number of Codes:	Single access code—one easy to manage code for all users
Programming:	Lock is easily programmed via keypad without removing lock from the door
Handing:	Factory handed; not field reversible
Key Override (Optional):	Small format interchangeable cores, large format removable cores
Operation Modes:	Single credential—access Passage (select models)—Allows access without using the lock entry code Feature activated from the inside with a thumbturn or key (included with all passage feature models) Deadbolt (select models)—Added security of 1" deadbolt Lockout (all models)—Disables the lock from the inside so that the entry codes can not be used to gain access. Access is permitted using key override.
Economical:	A cost effective access control solution

Mechanical Features

Construction:	Cast front housing; unified trim plate; fixed ADA-compliant levers
Numeric Keypad:	Vandal resistant, solid metal pushbuttons
Handing:	Factory handed; not field reversible
Finishes:	Bright Chrome 026 (625), Bright Brass 03 (605), Antique Brass 05 (609), and Satin Chrome 26D (626)
Backset:	$2\frac{3}{4}$ " (70 mm)
Latch:	$\frac{3}{4}$ " (19 mm) two-piece anti-friction latch; accommodates $\frac{1}{2}$ " (13 mm) throw, 1" (25 mm) optional deadbolt
Minimum Stile Recommended:	5" (127 mm)
Weight:	9.8 lbs. (3.7 kg)
Strike:	4 $\frac{7}{8}$ " (124 mm) L x 1 $\frac{1}{4}$ " (32 mm) W x $\frac{1}{4}$ " (6 mm) D Deadbolt/Latch mortise strike plate

Key Override

Interchangeable Cores:	Small format—Best and equivalents (6 or 7-pin length)
Removable Cores:	Large format—Medeco/ASSA/Yale (5 or 6-pin length), Corbin Russwin, Schlage, and Sargent

Installation

Door Preparation:	Easily installs on wood or metal doors. Standard (86) mortise preparation
Door Thickness:	1 $\frac{3}{4}$ " (44 mm) to 2 $\frac{1}{4}$ " (57 mm)
Items Supplied Include:	Lock assembly, installation manual, full-scale template, combination change tool, and required installation hardware

Certification and Testing



Accessibility Standard:	Americans with Disabilities Act (ADA)
Durability:	Highly weather resistant
Fire Rating:	3-hour UL/ULC fire rating for "A" labeled doors

Warranty


Warranty:	3-year warranty
------------------	-----------------

Mortise


Door handing must be specified when ordering.

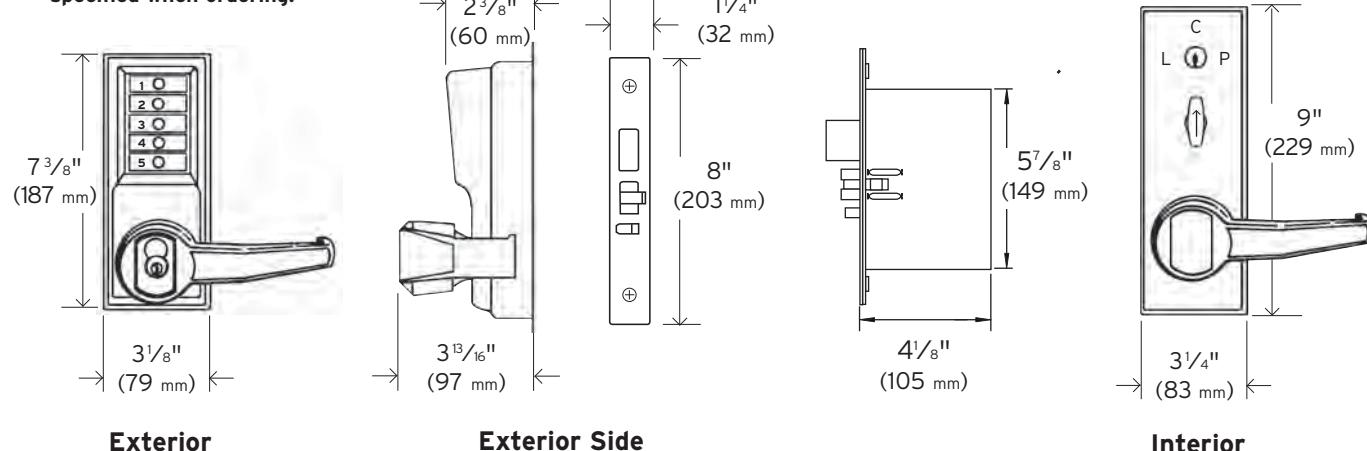**Exterior****Exterior Side****Interior****Model 8146**

- Combination Entry
- Key Override (not supplied)
- Passage
- Lockout

Model 8148

- Combination Entry
- Key Override (not supplied)
- Passage
- Lockout
- Deadbolt

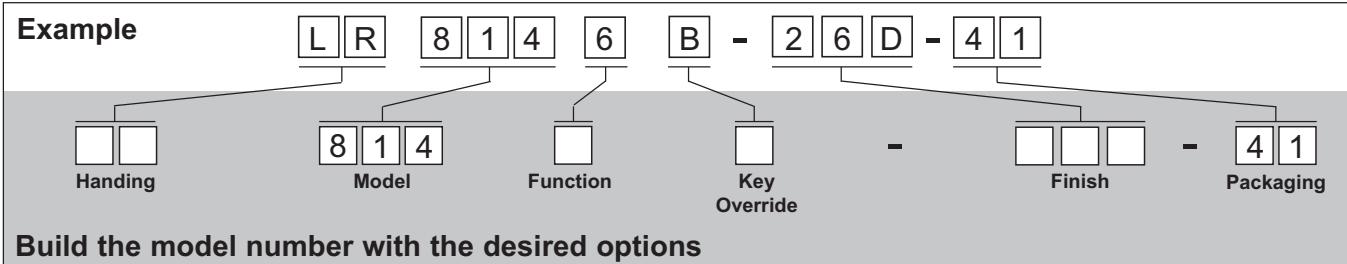

Base Model	Description	Base Price
LR8146B26D41	Mortise Lock with Lever, Key Override, Passage, Lockout	\$640.00

Choose one option from each category

Handing Options	Description	Price
L	Left Hand	No Charge
LR	Left Hand Reverse	No Charge
R	Right Hand	No Charge
RR	Right Hand Reverse	No Charge

Function Options	Description	Price
6	Combination Entry, Key Override, Passage, Lockout	No Charge
8	Combination Entry, Key Override, Passage, Lockout, Deadbolt	Add \$30.00

Key Override Options ⁺	Description	Price
B	I/C Best and Equivalents (6 or 7-pin Length)	No Charge
C	R/C Corbin Russwin	No Charge
M ⁺⁺	R/C Medeco/ASSA/Yale (5 or 6-pin Length)	No Charge
R	R/C Sargent	No Charge
S	R/C Schlage	No Charge

Finish Options	Description	Price
026	Bright Chrome (625)	Add \$25.00
03	Bright Brass (605)	Add \$25.00
05	Antique Brass (609)	No Charge
26D	Satin Chrome (626)	No Charge

Notes

⁺ Interchangeable/Removable core cylinders are not included with the lock

⁺⁺ Medeco/ASSA/Yale (5 and 6-pin length)
5 and 6-pin Medeco/ASSA cylinders require a special knob spacer (Included in Package).



Items Supplied with the Lock

- Installation Manual
- Full-Scale Template
- Required Installation Hardware



- PIN Access
- Mechanical Pushbutton
- Single Access Code
- Exit Trim
- Lever

Features

Access Control:	Mechanical pushbutton lock—eliminates problems and costs associated with issuing, controlling, and collecting keys and cards. Provides exterior access by combination, while allowing free egress with exit device (not supplied).
No Battery:	Fully mechanical lock eliminates the material and labor expense of battery replacements
Locking Device Options:	Rim Exit Device: Compatible with most leading brands of exit devices—see list below (Exit Device and Mounting hardware not included)
Exit Device Compatibility:	<p>* For the most accurate listing of compatible exit devices, see this page on our website.</p> <ul style="list-style-type: none"> • Von Duprin Exit Only (EO) or Exit Only Fire (EOF) 22, 88 NL, 98, 99, 987, 9957 • Dorma 9100, 9300, 9400 • Detex Advantex Series 10, 20, 21 40, 50, 51 • Monarch XX-R*, FXX-R, 18-R*, F-18-R*, XX-V*, F-XX-V*, 18-V*, F-18-V* (* Requires special k-hub adapter) <p>• Cannot be used with mortise design or most vertical rod Exit Devices</p> <p>ATTENTION: Compatibility is subject to change if modifications are made by Exit Device manufacturers without Kaba Access Control's knowledge</p>
Number of Codes:	Single access code—one easy to manage code for all users Exit Device may be dogged without affecting the LP1000
Handing:	Factory handed; not field reversible
Key Override (Optional):	Small format interchangeable cores, large format removable cores
Operation Modes:	Single credential—access
Economical:	A cost effective access control solution

Mechanical Features

Construction:	Heavy-duty cast front housing; heavy-duty mounting plate; fixed ADA-compliant lever
Numeric Keypad:	Vandal resistant, solid metal pushbuttons
Handing:	Factory handed; not field reversible
Finishes:	Bright Chrome 026 (625), Bright Brass 03 (605), Antique Brass 05 (609), and Satin Chrome 26D (626)
Latch & Exit Device:	Not supplied (See list for compatibility above)
Strike:	Supplied with Exit Device
Exit Device Hub Rotation:	Up to 60°, counterclockwise for left hand and clockwise for right hand
Tailpiece:	2 3/4" (70 mm) tailpiece for Exit Device operation from outside optional 5" (125 mm) tailpiece for freezer doors (purchased separately)
Minimum Stile Recommended:	5" (127 mm)
Weight:	8 lbs. (3.6 kg)

Key Override

Interchangeable Cores:	Small format—Best and equivalents (6 or 7-pin length)
Removable Cores:	Large format—Medeco/ASSA/Yale (5 or 6-pin length), Corbin Russwin, Schlage, and Sargent

Installation

Door Preparation:	Recessed through bolts may be required for exit device preparation
Door Thickness:	1 $\frac{3}{8}$ " (35 mm) to 2 $\frac{1}{4}$ " (57 mm); optional 5" (127 mm) tailpiece (purchased separately)
Items Supplied Include:	Installation manual, full-scale template, combination change tool, and required lock installation hardware only

Certification and Testing



Accessibility Standard:	Americans with Disabilities Act (ADA)
Durability:	Highly weather resistant
Fire Rating:	3-hour UL/ULC fire rating for "A" labeled doors

Warranty


Warranty:	3-year warranty
------------------	-----------------

Exit Trim


Door handing must be specified when ordering.

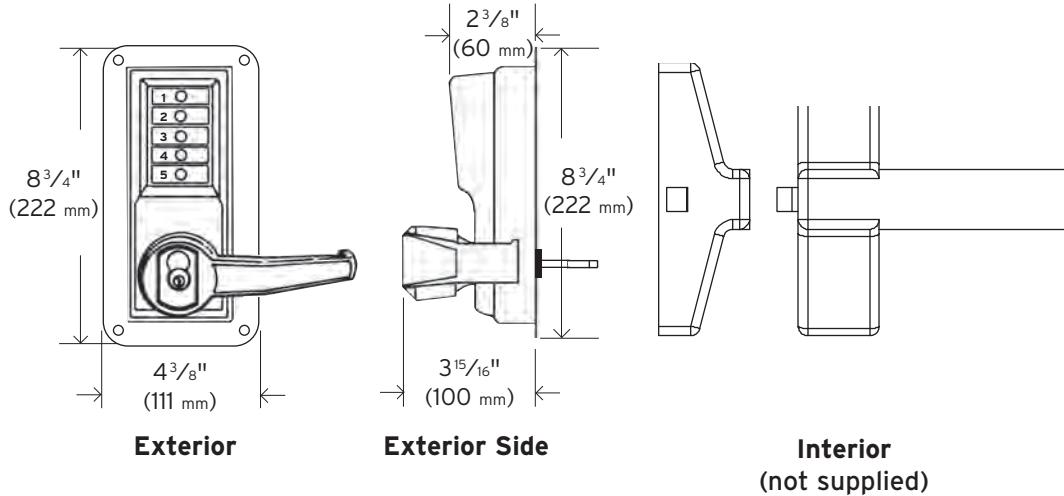**LP1010**

- Combination Entry
- Egress with Exit Device (Not Supplied)
- Exterior Combination Change (Only)

LP1020

- Combination Entry
- Egress with Exit Device (Not Supplied)
- Key Override (Not Supplied)
- Exterior Combination Change (Only)

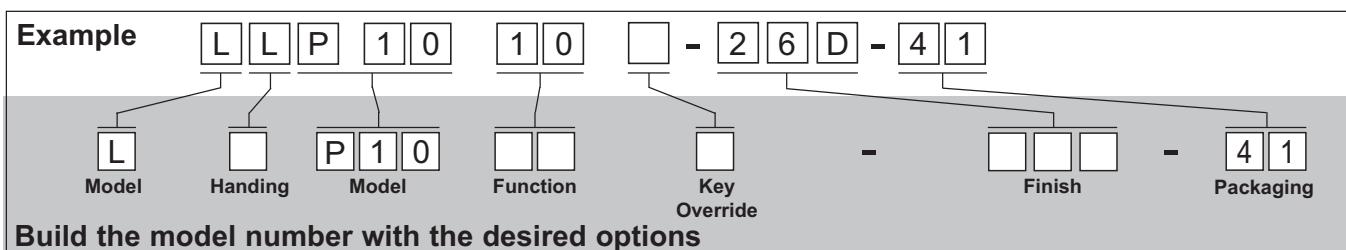

Build the model number with the desired options

Base Model	Description	Base Price
LLP101026D41	Exit Trim Lock with Lever, No Key Override*	\$564.00

Choose one option from each category

Handing Options	Description	Price
L	Left Hand or Left Hand Reverse	No Charge
R	Right Hand or Right Hand Reverse	No Charge

Function Options	Description	Price
10	Combination Entry Only	No Charge
20	Combination Entry and Key Override	Add \$70.00

Key Override Options**	Description	Price
B	I/C Best and Equivalents (6 or 7-pin Length)	No Charge
C	R/C Corbin Russwin	No Charge
M***	R/C Medeco/ASSA/Yale (5 or 6-pin Length)	No Charge
R	R/C Sargent	No Charge
S	R/C Schlage	No Charge

Finish Options	Description	Price
026	Bright Chrome (625)	Add \$25.00
03	Bright Brass (605)	Add \$25.00
05	Antique Brass (609)	No Charge
26D	Satin Chrome (626)	No Charge

Notes

* Exit Device Compatibility

*For the most accurate listing of compatible exit devices, see this page on our website.

- Von Duprin Exit Only (EO) or Exit Only Fire (EOF) 22, 88 NL, 98, 99, 9857, 9957
 - Dorma 9100, 9300, 9400
 - Detex Advantex Series 10, 20, 21, 40, 50, 51
 - Monarch XX-R*, FXX-R, 18-R*, F-18-R*, XX-V*, F-XX-V*, 18-V*, F-18-V*
- (*Requires special k-hub adapter—Contact Monarch)

- **Cannot be used with mortise design or most vertical rod Exit Devices**

ATTENTION: Compatibility is subject to change if modifications are made by Exit Device manufacturers without Kaba Access Control's knowledge

** Interchangeable/Removable core cylinders are not included with the lock

*** Medeco/ASSA/Yale (5 and 6-pin length)

5 and 6-pin Medeco/ASSA cylinders require a special knob spacer (Included in Package).

Items Supplied with the Lock

- Installation Manual
- Full-Scale Template
- Required Installation Hardware

Exit device not included (sold separately)





- **PIN Access**
- **Mechanical Pushbutton Lock**
- **Single Access Code**
- **Exit Trim**
- **Thumtturn**

Features

Access Control:	Mechanical pushbutton lock—eliminates problems and costs associated with issuing, controlling, and collecting keys and cards. Provides exterior access by combination, while allowing free egress at all times by interior exit device (not supplied).
No Battery:	Fully mechanical lock eliminates the material and labor expense of battery replacements
Locking Device Options:	Rim Exit Device: Compatible with most leading brands of Exit Devices (Exit Device and Mounting hardware not included)
Exit Device Compatibility:	<p style="text-align: center;">*For the most accurate listing of compatible exit devices, see this page on our website.</p> <ul style="list-style-type: none"> • American Device 6300 Series, 6303 Series • Corbin 21, 22, 25, 26NT, 27K, 29, 29-1/4, 29M2, 29-1/2M2, 29NTM2, 29D20, LA29, 39, 39EL, 39LLD, 390, LA39 • Detex Advantex Series 10, 20, 21, 40, 50, 51 • Magno Krom LHR only: 500-4, 550-4, 650-4, 1500-4, 1550-4, 1650-4; RHR only: 600-3 • Monarch 18RBA, 18RP, 18VP, F18RBA, F18RP, F18VP, FXXRBA, FXXRP, FXXVP, XXRBA, XXRP, XXVP • Precision Hardware FL-D103; RHRB only 810-H; RH or LH: 103, R103, D203, H-203, 1103, D1203, H1203 • Cannot be used with surface-mounted Exit Devices with counterclockwise rotating hubs, with thumb-operated Mortise design Exit Devices, or most vertical rod Exit Devices <p style="text-align: center;">ATTENTION: Compatibility is subject to change if modifications are made by Exit Device manufacturers without Kaba Access Control's knowledge</p>
Number of Codes:	Single access code—one easy to manage code for all users
Programming:	Lock is easily programmed via keypad without removing lock from the door
Handing:	For non-handed or clockwise-rotating (adjustable up to 90°) Exit Device hubs only
Operation Modes:	Single credential—access
Economical:	A cost effective access control solution
Tailpiece:	2 3/4" (70 mm) adjustable tailpiece for Exit Device operation from outside; optional 5" (127 mm) tailpiece available
Exit Device Hub Rotation:	Adjustable up to 90° clockwise for right hand (adjustable cam)

Mechanical Features

Construction:	Heavy-duty, cast front housing
Numeric Keypad:	Vandal resistant, solid metal pushbuttons
Handing:	For non-handed or clockwise-rotating (adjustable up to 90°) Exit Device hubs only
Finish:	Satin Chrome 26D (626)
Control:	6-pin tumbler cylinder keys for combination change access; keyed differently; optional keyed alike or master keyed
Latch:	Not supplied (see compatibility list on previous page)
Strike:	Not supplied (supplied with exit device)
Minimum Stile Recommended:	3 $\frac{1}{8}$ " (79 mm)
Weight:	3.5 lbs. (1.6 kg)

Installation


Door Preparation:	Exit Device preparation may require recessed through bolting; 2015 installation is based on centerline of mating exit device hub
Door Thickness:	1 $\frac{3}{8}$ " (35 mm) to 2 $\frac{1}{2}$ " (64 mm); optional 5" (127 mm) tailpiece (purchased separately)
Items Supplied Include:	Installation manual, full-scale template, combination change keys, and required lock installation hardware only


Certification and Testing

Durability:	Highly weather resistant
--------------------	--------------------------

Warranty

Warranty:	1-year warranty
------------------	-----------------

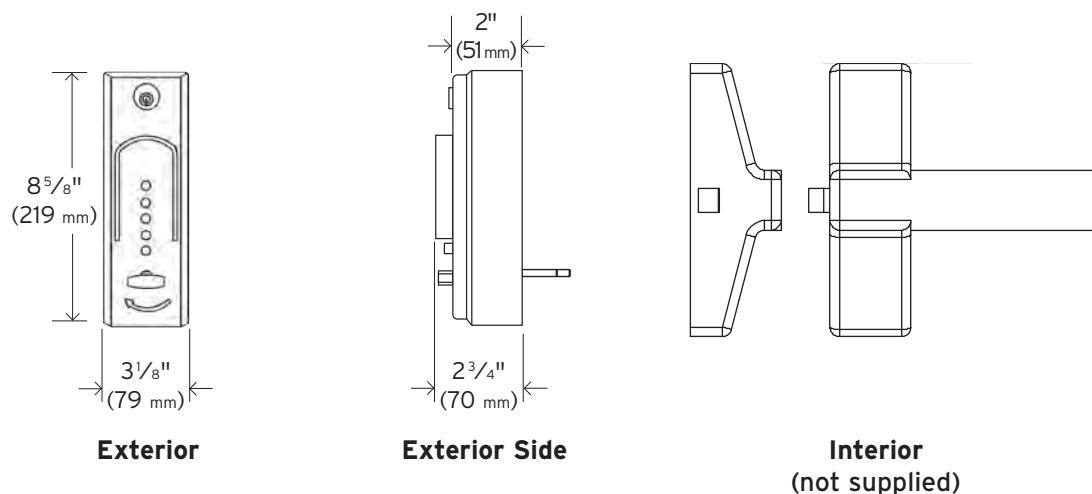Exit Trim

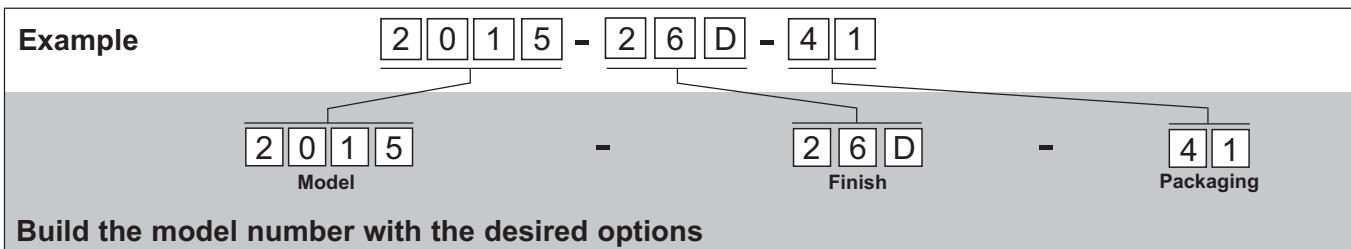

Base Model	Description	Base Price
201526D41	Combination Entry with Thumtturn Style Knob ⁺ (Clockwise rotation only)	\$355.00

Notes

+ Exit Device Compatibility

*** For the most accurate listing of compatible exit devices, see this page on our website.**

- American Device 6300 Series, 6303 Series
- Corbin 21, 22, 25, 26NT, 27K, 29, 29-1/4, 29M2, 29-1/2M2, 29NTM2, 29D20, LA29, 39, 39EL, 39LLD, 390, LA39
- Detex Advantex Series 10, 20, 21, 40, 50, 51
- Magno Krom LHR only: 500-4, 550-4, 650-4, 1500-4, 1550-4, 1650-4; RHR only: 600-3
- Monarch 18RBA, 18RP, 18VP, F18RBA, F18RP, F18VP, FXXRBA, FXXRP, FXXVP, XXRBA, XXRP, XXVP
- Precision Hardware FL-D103; RHRB only 810-H; RH or LH: 103, R103, D203, H-203, 1103, D1203, H1203
- Russwin 365, 3651/4, LT365, 370, 372, LA372, 375, LT375, 377, 382, 384, 385, 388, 572, 572EL, 572ELD, U572, LA572
- Sargent 2813, 2804, 6804, 12-6804, 9804RHRB, 12-9804LHRB, 9898E, 9898K
- Von Duprin 22 Rim, 22 Rim-F, 88 Rim, 88 Rim-F, 98 Rim, 98 Rim-F, 99 Rim, 99 Rim-F; 2227, 2227-F, 9827, 9827-F, 9847, 9847-F, 9927-F, 9947-F; Yale 1500 Series, 7000 Series
- **Cannot be used with surface-mounted Exit Devices with counterclockwise rotating hubs, with thumb-operated Mortise design Exit Devices, or most vertical rod Exit Devices**

ATTENTION: Compatibility is subject to change if modifications are made by Exit Device manufacturers without Kaba Access Control's knowledge

Exit device not included (sold separately)





- **PIN Access**
- **Mechanical Pushbutton Lock**
- **Single Access Code**
- **Fits Narrow Stile Aluminum Glass Doors**
- **Thumturn**

Features

Access Control:	Mechanical pushbutton lock—eliminates problems and costs associated with issuing, controlling, and collecting keys and cards. Provides exterior access by combination.
No Battery:	Fully mechanical lock eliminates the material and labor expense of battery replacements
Locking Device Options:	Adams Rite 4510/4710/4910 mortise latch
Number of Codes:	Single access code—one easy to manage code for all users
Programming:	Lock is easily programmed via keypad without removing lock from the door
Handing:	Non-handed; Required drive assembly is factory handed—not field reversible
Key Override:	Accepts Maximum Security (MS) mortise cylinders; can be used to override the lock combination and gain access using a key. Allows facilities to initiate or maintain a master-keyed security system (keyed alike or keyed differently).
Operation Modes:	Single credential—access Passage—Allows access without using the lock entry code. Feature activated from the outside using cylinder override key. Lockout—Disables the lock so that entry codes cannot be used to gain access. Access is permitted using the key override only. This is activated from the outside using the cylinder override key.
Economical:	A cost effective access control solution

Mechanical Features

Construction:	All metal cast front housing, force-proof, clutch-protected fixed thumturn
Numeric Keypad:	Vandal resistant, solid metal pushbuttons
Handing:	Non-handed; Required drive assembly is factory handed—not field reversible
Finishes:	Satin Chrome 26D (626); 55 (695) Duranodic
Backset:	Model 3010: Right Hand; Right Hand Reverse— $3\frac{1}{32}$ " (25 mm) Model 3020: Left Hand; Left Hand Reverse— $3\frac{1}{32}$ " (25 mm) Model 3030: Right Hand; Right Hand Reverse— $1\frac{1}{8}$ " (29 mm) or $1\frac{1}{2}$ " (38 mm) Model 3040: Left Hand; Left Hand Reverse— $1\frac{1}{8}$ " (29 mm) or $1\frac{1}{2}$ " (38 mm)
Latch:	Purchased separately (Adams Rite)
Stile Width:	$1\frac{1}{8}$ " (48 mm) minimum, required for mounting
Door Thickness:	$1\frac{3}{4}$ " (44 mm) maximum
Weight:	4 lbs. (1.8 kg)
Strike:	Purchased separately (Adams Rite)
Items Supplied Include:	Installation instructions, full-scale template, combination change key, and screwdriver

Simplex® 3000 Series

KABA®

SIMPLEX®


Certification and Testing

Durability: Highly weather resistant

Warranty

Warranty: 1-year warranty


Narrow Stile Aluminum Door Lock

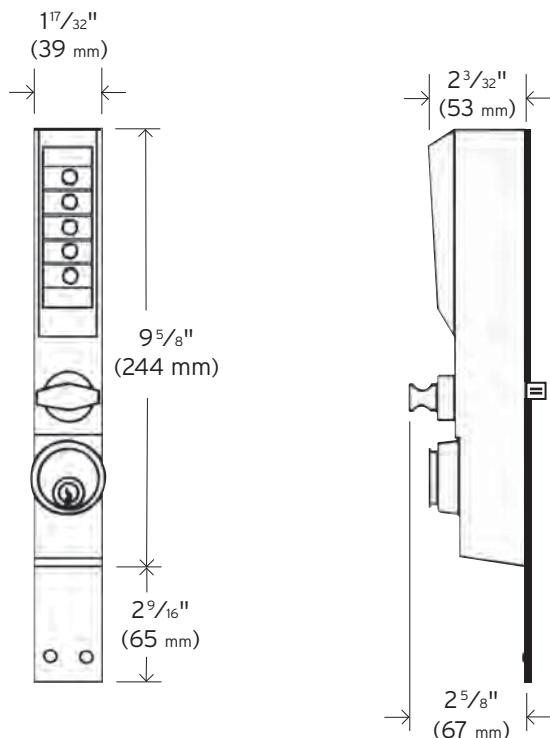

Exterior


Exterior Side

Model 3001



- Combination Entry
- Key Override (not supplied)
- Passage
- Lockout

Model 3002



- Combination Entry
- Key Override (not supplied)
- Passage
- Lockout
- Cylinder Guard

Housing Example

3 0 0 1 - 2 6 D - 4 1

3 0 0

1

2 6 D

4 1

Model

Function

Finish

Packaging

Build the model number with the desired options

Base Model	Description	Base Price
300126D41	Narrow Stile Lock with Thumturn, Key Override, Passage, Lockout Drive Assembly Required	\$250.00

Choose one option from each category

Function Options	Description	Price
1	Combination Entry, Key Override, Passage, Lockout	No Charge
2	Combination Entry, Key Override, Passage, Lockout, Cylinder Guard	Add \$16.00

Finish Options	Description	Price
26D	Satin Chrome (626)	No Charge
55	Duranodic—Powder Paint (695)	No Charge

Note
For complete installation, you should purchase both a housing and drive assembly.
Adams Rite hardware sold separately.
+ Choose a drive assembly

Model Options	Description	Price
3010-19-41	3 1/32" (25 mm) Backset/Handing Right Hand or Right Hand Reverse	\$66.00
3020-19-41	3 1/32" (25 mm) Backset/Handing Left Hand or Left Hand Reverse	\$66.00
3030-19-41*	1 1/8" (29 mm) Backset/Handing Right Hand or Right Hand Reverse	\$66.00
3040-19-41*	1 1/8" (29 mm) Backset/Handing Left Hand or Left Hand Reverse	\$66.00

* Also accommodate equivalent 1 1/8" (38 mm) Backset

Note
Cylinder not included.
Items Supplied with the Lock

- Installation Manual
- Full-Scale Template
- Required Installation Hardware





- **PIN Access**
- **Mechanical Pushbutton Lock**
- **Single Access Code**
- **Cylindrical**
- **Thumbtturn**

Features

Access Control:	Mechanical pushbutton lock—eliminates problems and costs associated with issuing, controlling, and collecting keys and cards. Provides fully mechanical exterior access by combination, while allowing free egress at all times by interior knob.
No Battery:	Fully mechanical lock eliminates the material and labor expense of battery replacements
Locking Device Options:	Cylindrical latch with 3-hour UL/ULC fire rating for "A" labeled doors
Number of Codes:	Single access code—one easy to manage code for all users
Programming:	Lock is easily programmed via keypad without removing lock from the door
Handing:	Factory-handed left; easily field reversible
Operation Modes:	Single credential—access
Economical:	A cost effective access control solution

Mechanical Features

Construction:	All metal cast front housing, force-proof, clutch-protected exterior thumbtturn, unified interior trim plate, fixed interior knob
Numeric Keypad:	Vandal resistant, solid metal pushbuttons
Handing:	Factory-handed left; easily field reversible
Finishes:	Hard durable powder paint finishes: Gold Tone (60), Almond (67), Black (85), and Gray (86)
Latch:	½" (13 mm) throw latch, floating or flat face plate (light-duty or UL listed options)
Backset:	2 ¾" (70 mm) or 2 ½" (60 mm) backset
Minimum Stile Recommended:	5" (127 mm)
Weight:	4.5 lbs. (2 kg)
Strike:	Standard strike plate

Installation

Installation:	ASA 161 door preparation with 2 additional through bore holes. Lock can be inverted if the existing auxiliary lock obstructs installation
Door Thickness:	1 ¾" (35 mm) to 2 ¼" (57mm); wood or metal
Items Supplied Include:	Installation manual, full-scale template, combination change tool and required installation hardware


Certification and Testing

Fire Rating:	3-hour UL/ULC Fire rating for "A" labeled doors (select models—see latch options)
Durability:	Highly weather resistant

Warranty

Warranty: 1-year warranty


Cylindrical

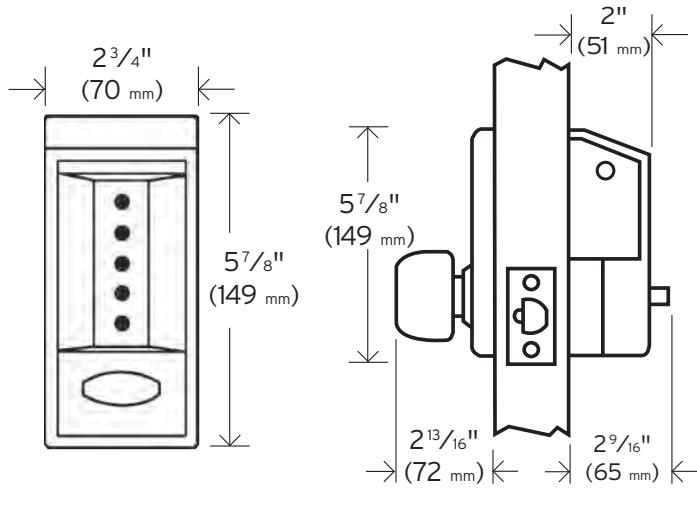

Exterior


Interior / Exterior Side

Model 6202




- Combination Entry
- 1/2" (13 mm) Throw
- Floating Face Plate
- Backset 2 3/8" (60 mm)
- Primary Lock

Model 6204




- Combination Entry
- 1/2" (13 mm) Throw
- Floating Face Plate
- Backset 2 3/4" (70 mm)
- Primary Lock

Model 6214



- Combination Entry
- 1/2" (13 mm) Throw
- Flat Face Plate
- Backset 2 3/4" (70 mm)
- Primary Lock

Model 6218



- Combination Entry
- 1/2" (13 mm) Throw
- Flat Face Plate
- Backset 2 3/8" (60 mm)
- Primary Lock

Example

6 2 0 4 - 6 0 - 4 1

6 2
Model

0 4
Function

6 0
Finish

4 1
Packaging

Build the model number with the desired options

Base Model	Description	Base Price
62046041	Cylindrical Lock with Exterior Thumturn, Internal Knob, 2 3/4" (70 mm) Backset	\$205.00

Choose one option from each category

Function Options	Description	Price
02	Cylindrical 1/2" (13 mm) throw latch, floating face plate 2 3/8" (60 mm) backset (UL listed)	No Charge
04	Cylindrical 1/2" (13 mm) throw latch, floating face plate 2 3/4" (70 mm) backset (UL listed)	No Charge
14	Cylindrical 1/2" (13 mm) throw latch, flat face plate 2 3/4" (70 mm) backset	No Charge
18	Cylindrical 1/2" (13 mm) throw latch, flat face plate 2 3/8" (60 mm) backset	No Charge

Finish Options	Description	Price
60	Gold Tone—Powder Paint (60)	No Charge
67	Almond—Powder Paint (67)	No Charge
85	Black—Powder Paint (85)	No Charge
86	Grey—Powder Paint (86)	No Charge

Items Supplied with the Lock

- Installation Manual
- Full-Scale Template
- Required Installation Hardware





- **PIN Access**
- **Mechanical Pushbutton Lock**
- **Single Access Code**
- **Deadbolt/Spring Latch/Rim Deadlocking Latch**
- **Thumbturn**

Features

Access Control:	Mechanical pushbutton lock—eliminates problems and costs associated with issuing, controlling, and collecting keys and cards. Provides fully mechanical primary or auxiliary pushbutton access control by exterior combination, while allowing free egress at all times by interior thumbturn. Deadbolt models must be manually relocked. Deadlocking latch models automatically relock each time the door closes.
No Battery:	Fully mechanical lock eliminates the material and labor expense of battery replacements
Locking Device Options:	Deadbolt—must be manually relocked Deadlocking latch—relocks automatically when door closes Rim locking latch—relocks automatically when door closes; also has latch holdback
Number of Codes:	Single access code—one easy to manage code for all users
Programming:	Lock is easily programmed via keypad without removing lock from the door
Handing:	Field reversible
Operation Modes:	Single credential—access Latch holdback (7106 only)
Economical:	A cost effective access control solution

Mechanical Features

Construction:	All metal cast front housing; force-proof, clutch-protected exterior thumbturn
Numeric Keypad:	Vandal resistant, solid metal pushbuttons
Handing:	Field reversible
Finishes:	For all models except 7106: Bright Brass 03 (605), Satin Chrome 26D (626), Antique Copper (AC) (059), Gold Vein (GV) (060), Antique White (AW) (062), Silver Vein (SV) (061), Black 19 (676), and Antique Brass 05 (609) Model 7106: Inside Trim (Black Only) All other Black models, Inside Trim (Satin Chrome)
Latch:	1" (25 mm) tubular deadbolt ½" (13 mm) deadlocking latch 5/8" (16 mm) rim deadlocking latch
Backset:	2 3/4" (70 mm) or 2 5/8" (60 mm) backset
Strike:	Models 7102 and 7108: Flat deadbolt strike plate Model 7104: Curved lip strike plate Model 7106: Box strike for in-swing doors and flat strike for out-swing doors
Minimum Stile Required:	4" (102 mm)
Weight:	2.5 lbs. (1.1 kg)

Installation

Installation:	1 $\frac{3}{8}$ " (35 mm) diameter through bore; 1" (25 mm) diameter cross bore; $\frac{3}{4}$ " (19 mm) through bore; 2 x $\frac{1}{4}$ " through bores
Door Thickness:	1 $\frac{3}{8}$ " (35 mm) to 2 $\frac{1}{4}$ " (57 mm), wood or metal
Items Supplied Include:	Installation manual, full-scale template and required installation hardware


Certification and Testing

Durability:	Highly weather resistant
--------------------	--------------------------

Warranty


Warranty:	1-year warranty
------------------	-----------------

Auxiliary Lock

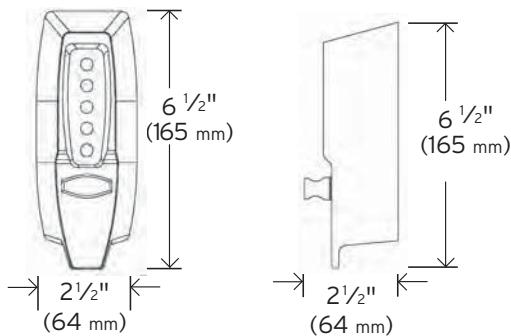


Exterior

Exterior Side

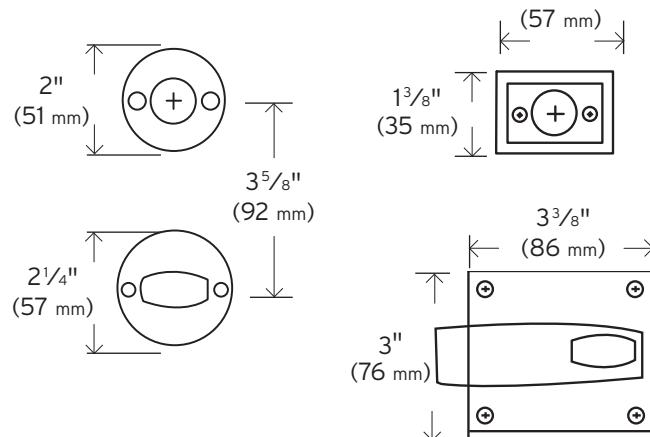


Models 7102, 7104, 7108

Model 7102




- 1" (25 mm) Tubular Deadbolt, Flat Face Plate
- Backset 2 $\frac{3}{4}$ " (70 mm)
- Auxiliary Lock
- Manual Relock
- Numerous Finishes

Model 7104




- $\frac{1}{2}$ " (13 mm) Deadlocking Latch, Flat Face Plate
- Backset 2 $\frac{3}{8}$ "-2 $\frac{3}{4}$ " (60-70 mm)- Adjustable
- Primary/Auxiliary Lock
- Automatic Relock
- Numerous Finishes

Model 7106



- $\frac{5}{8}$ " (16 mm) Rim Deadlocking Latch, Flat Face Plate
- Backset 2 $\frac{3}{8}$ " (60 mm)
- For Wood Doors Only
- Auxiliary Lock
- Automatic Relock and Latch Holdback
- Select Finishes


Model 7108



- 1" (25 mm) Tubular Deadbolt, Flat Face Plate
- Backset 2 $\frac{3}{8}$ " (60 mm)
- Auxiliary Lock
- Manual Relock
- Numerous Finishes

Interior

Models 7106

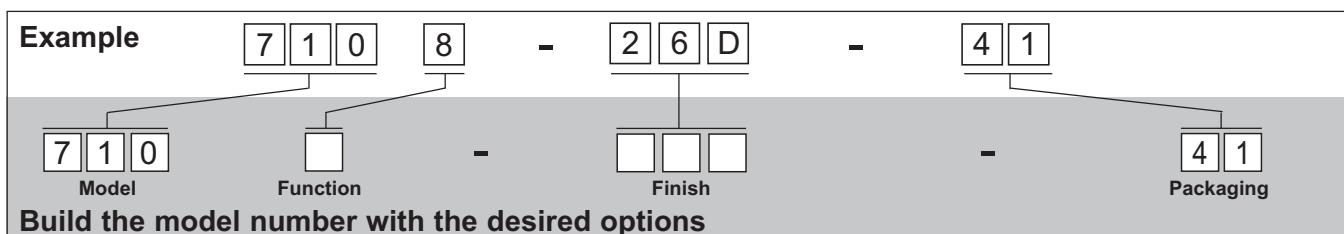

Base Model	Description	Base Price
710826D41	Auxiliary Lock with Thumturn, Deadbolt, 2 3/8" (60 mm) Backset	\$142.00

Choose one option from each category

Function Options	Description	Price
2	1" (25 mm) Tubular deadbolt, flat front faceplate 2 3/8" (70 mm) backset	No Charge
4	1/2" (13 mm) deadlocking latch, flat front faceplate Adjustable 2 3/8" (60 mm) to 2 3/4" (70 mm) backset	No Charge
6 ⁺	5/8" (16 mm) Rim deadlocking latch (for wood doors only) 2 3/8" (60 mm) backset (Black or Satin Chrome Only) ⁺⁺	No Charge
8	1" (25 mm) Tubular deadbolt, flat front faceplate 2 3/8" (60 mm) backset	No Charge

Finish Options	Description	Price
26D	Satin Chrome (626)	No Charge
05	Antique Brass (609)	Add \$25.00
03	Bright Brass (605)	Add \$25.00
AW	Antique White (Powder Paint) (062)	No Charge
AC	Antique Copper (Powder Paint) (051)	No Charge
GV	Gold Vein (Powder Paint) (060)	No Charge
SV	Silver Vein (Powder Paint) (061)	No Charge
19 ⁺⁺	Black (Powder Paint) (676) ⁺⁺	No Charge

Notes

⁺ Automatic relock and latch holdback feature—Available in Satin Chrome or Black Only—Inside trim is black only on this model

⁺⁺ 7106 Models Inside Trim (Black Only)—All Other Black Models, Inside Trim (Satin Chrome)

Items Supplied with the Lock

- Installation Manual
- Full-Scale Template
- Required Installation Hardware





- **PIN Access**
- **Mechanical Pushbutton Lock**
- **Single Access Code**
- **Deadbolt/Spring Latch**
- **Thumturn**

Features

Access Control:	Mechanical pushbutton lock—eliminates problems and costs associated with issuing, controlling, and collecting keys and cards. Provides fully mechanical access control, while allowing free egress at all times by interior thumturn. Deadbolt models must be manually relocked. Deadlocking spring latch models automatically relock each time the door closes.
No Battery:	Fully mechanical lock eliminates the material and labor expense of battery replacements
Locking Device Options:	Deadbolt—1" throw, manual relock Deadlocking Latch— $\frac{5}{8}$ " throw, with automatic relock
Number of Codes:	Single access code—one easy to manage code for all users
Programming:	Lock is easily programmed via keypad without removing lock from the door
Handing:	Field reversible latch; invert the lock for right hand doors; roman numerals are easily read in either orientation
Optional Key Override:	Can be used to override the lock combination and gain access using a key. Allows facilities to initiate or maintain a master-keyed security system (keyed alike or keyed differently). Override models can be ordered with or without a cylinder.
Options:	<ul style="list-style-type: none"> • Add panic bar release kit (select models) • Master keying available (select models) • Latch holdback (select models) • DOD compliance (select model) • Substitute a 2 1/2" (64 mm) lever in place of the standard inside thumturn (select models)
Operation Modes:	Single credential—access Latch holdback—keeps latch retracted to allow access with combination (select models)
Economical:	A cost effective access control solution

Mechanical Features

Construction:	All metal cast front housing, force-proof, clutch-protected thumturn, metal exterior trim plate
Numeric Keypad:	Vandal resistant, solid metal pushbuttons
Handing:	Field reversible latch; invert the lock for right hand doors; roman numerals are easily read in either orientation
Finishes:	04 (633) Satin Brass and 26D (626) Satin Chrome Model 929: 26D (626) Satin Chrome only
Latch:	1" (25 mm) deadbolt; $\frac{5}{8}$ " deadlocking spring latch
Weight:	4 lbs. (1.8 kg)
Strike:	Includes strike plate for outswing doors, cast box strike for inswing doors; metal door frames require the optional surface mortise box strike or use of an adapter kit

Installation






Backset:	2 $\frac{9}{16}$ " (65 mm) for outswing doors, 2 $\frac{1}{2}$ " (64 mm) for inswing doors
Door Thickness:	1 $\frac{3}{8}$ " (35 mm) to 1 $\frac{1}{2}$ " (38 mm) 1 $\frac{3}{4}$ " (44 mm) to 2 $\frac{1}{8}$ " (54 mm)
	Model 929: Lockset for DOD standards, 1 $\frac{3}{4}$ " (44 mm) to 2 $\frac{1}{8}$ " (54 mm) only
Items Supplied Include:	Installation manual, full-scale template, strike for inswing and outswing doors (appropriate to latch type), and required installation hardware

Certification and Testing

Durability:	Highly weather resistant
--------------------	--------------------------


Warranty

Warranty:	1-year warranty
------------------	-----------------

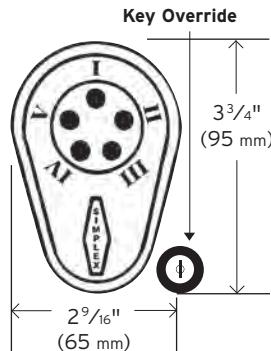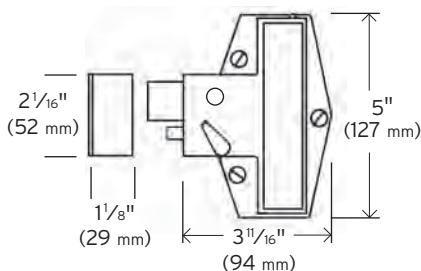Auxiliary Lock**Exterior****Exterior Side****Interior**
(Spring latch models)**Interior Side****Models 902, 904, 906, 910**


- Combination Entry
- Deadbolt
- 1" (25 mm) Throw, Flat Face Plate

- Auxiliary Lock
- Manual Relock
- Key Override (Select Models)

Models 917, 919, 935, 938

- Combination Entry
- Deadlocking Latch
- 5/8" (16 mm) Throw, Flat Face Plate

- Primary or Auxiliary Lock
- Automatic Relock
- Key Override (Select Models)

Model 927, 929

- Combination Entry
- Security Lock
- 5/8" (16 mm) Throw

- Primary or Auxiliary Lock
- Automatic Relock
- DOD Compliant

Example

9 0 2 0 0 0 - 2 6 D - 4 1

9 Model

Options

Finish

Packaging

Build the model number with the desired options

Base Model	Description	Base Price
902000026D41	Auxiliary Lock with Thumturn, 1" (25 mm) Deadbolt, Fits 1 $\frac{1}{8}$ "–1 $\frac{1}{2}$ " (35 mm–38 mm) thick	\$140.00

Choose one option from this category

Model Options	Description	Price
02	1" (25 mm) Deadbolt latch, 1 $\frac{1}{8}$ "–1 $\frac{1}{2}$ " (35 mm–38 mm) thick	No Charge
04	1" (25 mm) Deadbolt latch, 1 $\frac{1}{4}$ "–2 $\frac{1}{8}$ " (44 mm–54 mm) thick	No Charge
06	1" (25 mm) Deadbolt latch, 1 $\frac{1}{8}$ "–1 $\frac{1}{2}$ " (35 mm–38 mm) thick, key override	Add \$58.00
10	1" (25 mm) Deadbolt latch, 1 $\frac{1}{4}$ "–2 $\frac{1}{8}$ " (44 mm–54 mm) thick, key override	Add \$58.00
17	$\frac{5}{8}$ " (16 mm) Deadlocking spring latch, flat front, 1 $\frac{1}{8}$ "–1 $\frac{1}{2}$ " (35 mm–38 mm) thick, latch holdback	Add \$25.00
19	$\frac{5}{8}$ " (16 mm) Deadlocking spring latch, flat front, 1 $\frac{1}{4}$ "–2 $\frac{1}{8}$ " (44 mm–54 mm) thick, latch holdback	Add \$25.00
20	$\frac{5}{8}$ " (16 mm) Deadlocking spring latch, flat front, 1 $\frac{1}{8}$ "–1 $\frac{1}{2}$ " (35 mm–38 mm) thick, no latch holdback	Add \$25.00
22	$\frac{5}{8}$ " (16 mm) Deadlocking spring latch, flat front, 1 $\frac{1}{4}$ "–2 $\frac{1}{8}$ " (44 mm–54 mm) thick, no latch holdback	Add \$25.00
27 ⁺⁺	$\frac{5}{8}$ " (16 mm) Deadlocking spring latch, flat front, 1 $\frac{1}{8}$ "–1 $\frac{1}{2}$ " (35 mm–38 mm) thick	Add \$114.00
29 ⁺⁺	$\frac{5}{8}$ " (16 mm) Deadlocking spring latch, flat front, 1 $\frac{1}{4}$ "–2 $\frac{1}{8}$ " (44 mm–54 mm) thick	Add \$114.00
35	$\frac{5}{8}$ " (16 mm) Deadlocking spring latch, flat front, 1 $\frac{1}{8}$ "–1 $\frac{1}{2}$ " (35 mm–38 mm) thick, latch holdback, key override	Add \$82.00
38	$\frac{5}{8}$ " (16 mm) Deadlocking spring latch, flat front, 1 $\frac{1}{4}$ "–2 $\frac{1}{8}$ " (44 mm–54 mm) thick, latch holdback, key override	Add \$82.00





Simplex®
900 Series

SIMPLEX®

Choose up to 4 options - Insert 0 if less than 4 options are required.

Options	Description	Price
1	Substitutes a surface mounted strike box for <u>metal door frames</u> in place of the standard strike box (part number 74464). (See 900 Series Accessories—Adapter Kit)	Add \$5.00
2	Deletes the key cylinder from key override models. Recessed escutcheon recommended for standard rim cylinder installation. Your rim cylinder tailpiece must be reduced in width to accommodate the tail receptacle. Specify the position of your cylinder tailpiece (vertical or horizontal) to mate with your standard size rim cylinder (not supplied).	Less \$21.00
3	Substitutes a $2\frac{1}{2}$ " (64 mm) lever in place of the standard inside thumbturn (part number 74437) <u>(Can not be used with option 5)</u>	Add \$32.00
4	Master key (key override model).	Add \$12.00
5	Adds the panic bar release kit to a spring latch model (part number 74438) <u>(Can not be used with option 3)</u>	Add \$34.00
6	Deletes latch holdback (935 and 938 models).	No Charge
7	Deletes the key cylinder from key override models and changes gear plate to a 100 Series. Recessed escutcheon recommended for standard rim cylinder installation. Your rim cylinder tailpiece must be reduced in width to accommodate the tail receptacle. Specify the position of your cylinder tailpiece (vertical or horizontal) to mate with your standard size rim cylinder (not supplied).	Less \$21.00
8	Changes gear plate to accept a horizontal tailpiece.	No Charge

Finish Options	Description	Price
26D	Satin Chrome (Powder Paint)	No Charge
04 ⁺	Satin Brass (Powder Paint)	No Charge

Notes

⁺ 04 Finish not available on Model 927/929

⁺⁺ DOD Compliant



- **PIN Access**
- **Mechanical Pushbutton Lock**
- **Single Access Code**
- **Deadbolt/Spring Latch**
- **Thumturn**

Features

Access Control:	Mechanical pushbutton lock—eliminates problems and costs associated with issuing, controlling, and collecting keys and cards. Uses same proven combination system as our other pushbutton access controls, and are specifically designed for cabinet doors, desk drawers and similar applications. Ideal for use in many locations: medicine chests, liquor cabinets, gun boxes, courier pick-up boxes, home entertainment units, cleaning supply cabinets, tool chests, private files, audio-visual cabinets, and petty cash drawers.
No Battery:	Fully mechanical lock eliminates the material and labor expense of battery replacements
Locking Device Options:	Flat deadbolt Round deadbolt Round spring latch bolt
Number of Codes:	Single access code—one easy to manage code for all users
Programming:	Lock is easily programmed via keypad without removing lock from the door
Handing:	Non-handed
Operation Modes:	Single credential—access
Economical:	A cost effective access control solution
Key Override (Optional):	Select models

Mechanical Features

Construction:	All metal cast face plate; force-proof protected exterior knob
Numeric Keypad:	Vandal resistant, solid metal pushbuttons
Handing:	Non-handed
Finishes:	Bright Brass 03 (605), Satin Brass 04 (606), and Satin Chrome 26D (626); black trim plate (optional)
Weight:	1 lb. (0.5 kg)
Bolt:	End-throw/cross-throw deadbolt (must be manually relocked); End-throw/cross-throw spring latch (with automatic relock) Double-throw bolt (Sheet metal, end throw only)

Installation



Door Thickness:	Wood doors: $5\frac{1}{8}$ " (16 mm) to $7\frac{1}{8}$ " (22 mm) Sheet metal applications: 14 to 20 gauge
Installation:	Horizontal or vertical. Two-step mortise installation using router or $5\frac{1}{2}$ " (140 mm) x 1" (25 mm) slot with trim plate (for wood applications). Punched slot or series of $\frac{7}{16}$ " (11 mm) drilled holes (for metal applications)

Warranty


Warranty:	1-year warranty
------------------	-----------------

Cabinet Lock

Escutcheon Plate

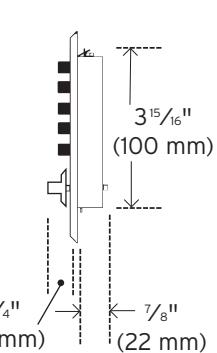


Black Trim Plate

**Exterior****Side View****Exterior with Trim Plate**

Simplex® 9600 Series

KABA®

SIMPLEX®

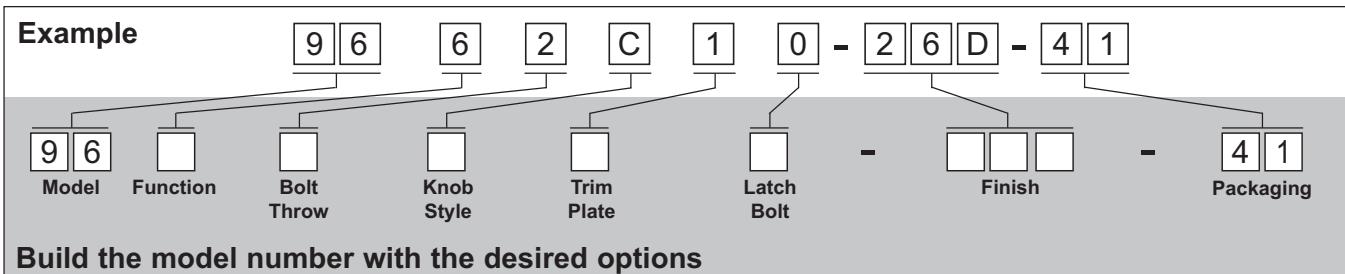

Base Model	Description	Base Price
9662C1026D41	Cabinet Lock, Sheet Metal, End Throw, Clutch Ball Bearing Knob, No Trim Plate, Standard Deadbolt	\$81.00

Choose one option from each category

Function Options	Description	Price
2	Wood Application, $\frac{5}{8}$ " (16 mm) to $\frac{7}{8}$ " (27 mm) door thickness	Add \$2.00
6	Sheet Metal, 14 to 20 Gauge door thickness	No Charge
7	Sheet Metal, $\frac{1}{8}$ " (3 mm) door thickness	No Charge
8	Sheet Metal, $\frac{3}{16}$ " (5 mm) door thickness	No Charge
9	Sheet Metal, $\frac{1}{4}$ " (6 mm) door thickness	No Charge

Bolt Throw Options	Description	Price
1	Cross Throw	No Charge
2	End Throw	No Charge
3	End Throw with Cross Throw Parts	No Charge

Knob Style Options	Description	Price
C	Clutch Ball Bearing Knob	No Charge

Trim Plate Options	Description	Price
1	Without Trim Plate	No Charge
2	With Trim Plate (Not available on 969 Model)	No Charge

Latch Bolt Options	Description	Price
0	Standard Deadbolt	No Charge
1	Spring Loaded Latch	Add \$6.00
2	Spring Loaded Latch with Key Override ⁺	Add \$14.00
3	Deadbolt with Chamber Return Spring	No Charge
9	Double Throw Bolt (Sheet Metal, End Throw Only)	Add \$8.00





Simplex®
9600 Series

SIMPLEX®

Finish Options	Description	Price
03	Bright Brass (605)	No Charge
04	Satin Brass (606)	No Charge
26D	Satin Chrome (626)	No Charge

⁺ Keyed Alike

Cabinet Locks, no options available

Model	Description	Price
C9601-xxx-41 ⁺⁺	Wood, $\frac{5}{8}$ " (16 mm) to $\frac{7}{8}$ " (27 mm), door thickness, End Throw, Deadbolt, Trim Plate Included, Ball Bearing Clutch Knob	\$88.00
C9602-xxx-41 ⁺⁺	Wood, $\frac{5}{8}$ " (16 mm) to $\frac{7}{8}$ " (27 mm), door thickness, End Throw, Spring Latch, Trim Plate Included, Ball Bearing Clutch Knob	\$88.00

⁺⁺ Replace xxx with your preferred finish code.

File Guard FG10, F2500, F2570, F2580 Series



- **PIN Access**
- **Mechanical Pushbutton Lock**
- **Single Access Code**
- **Fits Standard 2, 4, and 5 Drawer Cabinets**
- **Thumbturn**
- **Special lengths available**

Features






Access Control:	Mechanical pushbutton lock—eliminates problems and costs associated with issuing, controlling, and collecting keys and cards. Ideal for turning an ordinary filing cabinet into a security cabinet. Meets U.S. Department of Defense requirements for storage of secret and classified material when used with an appropriate lock.
No Battery:	Fully mechanical lock eliminates the material and labor expense of battery replacements
Locking Device Options:	Self contained tubular deadbolt
Number of Codes:	Single access code—one easy to manage code for all users
Programming:	Lock is easily programmed via keypad without removing lock from the door
Handing:	Non-handed
Operation Modes:	Single credential—access
Economical:	A cost effective access control solution
Options:	Model FG10: Pushbutton lock File Guard Model F2500: For use with a padlock (not included) Model F2570: For use with a padlock (not included) Model F2580: Built in 5-pin key lock (Schlage "C" or Weiser keyway) in a rugged steel housing


Mechanical Features

Construction:	Heavy-duty steel channel bar
Installation:	Model FG10, F2500, F2580: Attach mounting pins (3/8" steel bolts) to cabinet Model F2570: Attach mounting pins (3/8" steel bolts) and hinges to cabinet
Control (for pushbutton):	Model FG10: Screwdriver (not included) Model F2580: Key lock
Numeric Keypad:	Vandal resistant, solid metal pushbuttons
Handing:	Non-handed
Finishes:	B-Black
Items Supplied Include:	Mounting hardware: Notch pins, clevis pins, lock washers, screw nuts, and screws as required (as applicable)

Warranty

Warranty:	1-year warranty
------------------	-----------------

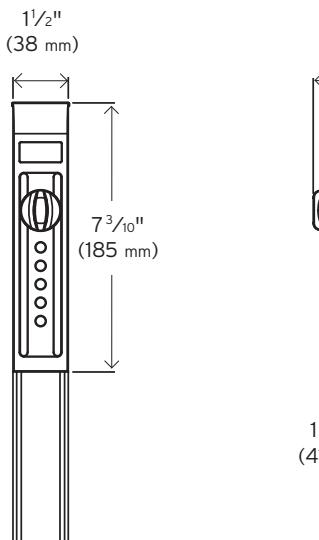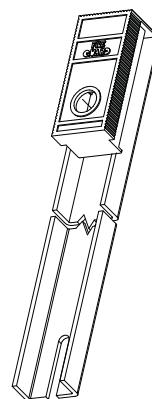Dimensions**FG Series****Exterior****Exterior Side****Clevis Pin****Notch Bolt****F2500 Series****F2570 Series****F2580 Series**

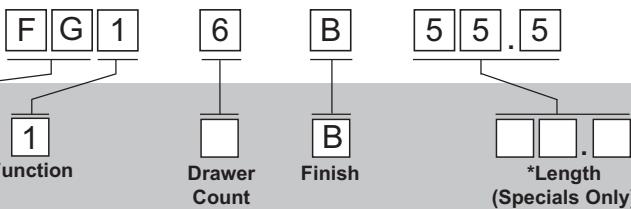Example**Build the model number with the desired options**

Base Model	Description	Length	Base Price
FG12B	Pushbutton Fileguard, 2-Drawer cabinet	29"	\$140.00

Available in Black (B) only.

Models	Description	Length	Price
FG12 - B	Pushbutton, 2-drawer cabinet	29"	\$140.00
FG14 - B	Pushbutton, 4-drawer cabinet	51 1/4"	\$146.00
FG15 - B	Pushbutton, 5-drawer cabinet	59"	\$149.00
FG16 - B	Pushbutton, special length (indicate length when ordering)		\$163.00
F25002	Accessory Pack ⁺	—	\$16.00
F2502 - B	Padlock, 2-drawer cabinet (padlock not included)	29"	\$64.00
F2504 - B	Padlock, 4-drawer cabinet (padlock not included)	51 1/4"	\$69.00
F2505 - B	Padlock, 5-drawer cabinet (padlock not included)	59"	\$74.00
F2506 - B	Padlock, special length (indicate length when ordering)		\$84.00
F25002	Accessory Pack ⁺	—	\$16.00
F2572 - B	Self-storing lock, 2-drawer cabinet	29"	\$80.00
F2574 - B	Self-storing lock, 4-drawer cabinet	51 1/4"	\$87.00
F2575 - B	Self-storing lock, 5-drawer cabinet	59"	\$91.00
F2576 - B ⁺⁺⁺	Self-storing lock, special length (indicate length when ordering)		\$96.00
F25703	Accessory Pack ⁺	—	\$16.00
F2582 - B	Key lock, 2-drawer cabinet, specify Schlage "C" or Weiser keyway	29"	\$80.00
F2584 - B	Key lock, 4-drawer cabinet, specify Schlage "C" or Weiser keyway	51 1/4"	\$88.00
F2585 - B	Key lock, 5-drawer cabinet, specify Schlage "C" or Weiser keyway	59"	\$91.00
F2586 - B	Key lock, special length (indicate length when ordering)		\$100.00
F25804	Accessory Pack ⁺	—	\$16.00

Notes⁺ Hardware Pack provides additional/replacement mounting hardware**Includes:** Mounting Hardware: Notch Pins, Clevis Pins, Lock Washers, Screw Nuts and Screws as required.**Special Lengths:** Maximum 66", Minimum 17"**Available with minimum quantity of 12 per length.**

To order, specify 6 as a last digit of product number followed by length (inches).

⁺⁺⁺ F2576—Self-storing lock, special length has extended lead time



- **PIN Access**
- **Mechanical Pushbutton Lock**
- **Single Access Code**
- **Light Duty Application**
- **Knob**
- **Latch Holdback**

Features

Access Control:	Mechanical pushbutton lock—eliminates problems and costs associated with issuing, controlling, and collecting keys and cards
No Battery:	Fully mechanical lock eliminates the material and labor expense of battery replacements
Locking Device Options:	Tubular latch
Number of Codes:	Single access code—one easy to manage code for all users
Programming:	Lock is easily programmed via keypad once removed from door
Handing:	Pre-assembled for right hand door installations (easily changed in field)
Operation Modes:	Single credential—access Latch holdback (easily removed in field)
Economical:	A cost effective access control solution
Key Override (Optional):	Not available

Mechanical Features

Construction:	Solid cast housings; cast knobs and levers
Numeric Keypad:	Vandal resistant, metal pushbuttons
Handing:	Non-handed, pre-assembled for right hand door installations (easily changed in field)
Finishes:	Satin Stainless 32D (630) housings and knobs
Backset:	2 3/4" (70 mm) backset, 2 3/8" (66 mm) backset
Latch:	1/2" (51 mm) latch
Weight:	4 lbs. (1.81 kg)

Installation

Door Preparation:	Easily installs on wood or metal doors. Requires 4 holes (2 for through bolts, 1 for latch spindle, and 1 for latch support post)
Door Thickness:	1 3/8" (35 mm) to 2 1/2" (64 mm)
Supplies Included:	Lock assembly, installation manual, template, and required hardware; as well as two 2 1/2" (64 mm) x 8" (203 mm) cover plates and two 2" (51 mm) gaskets

Warranty


Warranty:	1-year warranty
------------------	-----------------

Simplex® LD450 Series


KABA®

Dimensions


SIMPLEX®

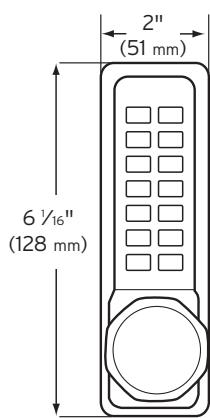


Exterior

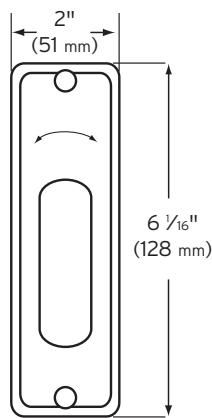

Interior

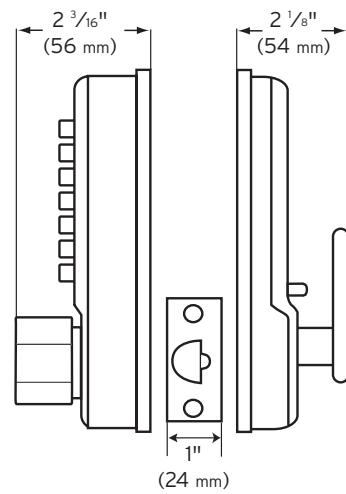

Side View

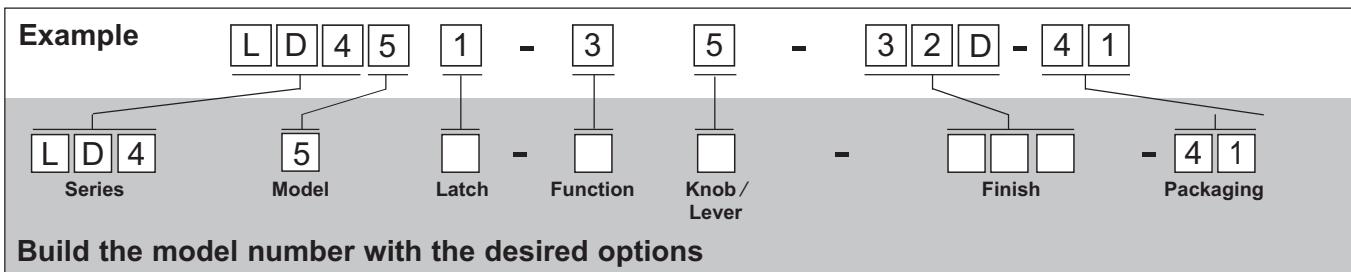

Base Model	Description	Base Price
LD4513532D41	Light Duty Pushbutton Lock, 2 3/8" Backset, Latch Holdback, Knob	\$135.00

Choose one option from each category

Model Options	Description	Price
5	Mechanical pushbutton lock	No Charge
Latch Options	Description	Price
1	Tubular latch bolt 2 3/8" (60 mm) backset	No Charge
2	Tubular latch bolt 2 3/4" (70 mm) backset	No Charge
Function Options	Description	Price
3	Latch Holdback (45 series only)	No Charge
Knob/Lever	Description	Price
5	Octagon Knob (45 series only)	No Charge
Finish Options	Description	Price
32D	Satin Stainless (simulated 630 finish)	No Charge

Items Supplied with the Lock

- Installation Manual
- Full-Scale Template
- Required Installation Hardware
- Internal/External Gaskets
- Internal/External Cover Plates

Note: Bright Brass (03) and Antique Brass (05) available while supplies last





- **PIN Access**
- **Mechanical Pushbutton Lock**
- **Single Access Code**
- **Light Duty Application**
- **Lever**
- **Passage**

Features

Access Control:	Mechanical pushbutton lock—eliminates problems and costs associated with issuing, controlling, and collecting keys and cards
No Battery:	Fully mechanical lock eliminates the material and labor expense of battery replacements
Locking Device Options:	Tubular latch
Number of Codes:	Single access code—one easy to manage code for all users
Programming:	Lock is easily programmed via keypad once removed from door
Handing:	Pre-assembled for right hand door installations (easily changed in field)
Operation Modes:	Single credential—access Passage (easily removed in field)
Economical:	A cost effective access control solution
Key Override (Optional):	Not available

Mechanical Features




Construction:	Solid cast housings; solid cast levers
Numeric Keypad:	Vandal resistant, metal pushbuttons
Handing:	Non-handed, pre-assembled for right hand door installations (easily changed in field)
Finishes:	Satin Stainless 32D (630) housings and levers
Backset:	2 $\frac{3}{4}$ " (70 mm) backset, 2 $\frac{3}{8}$ " (66 mm) backset
Latch:	3 $\frac{1}{2}$ " (89 mm) latch
Weight:	5 lbs. (2.27 kg)


Installation

Door Preparation:	Easily installs on wood or metal doors. Requires 3 holes (2 through bolts, 1 for latch spindle)
Door Thickness:	1 $\frac{3}{8}$ " (35 mm) to 2 $\frac{1}{2}$ " (64 mm)
Supplies Included:	Lock assembly, installation manual, template, and required hardware; as well as two 2 $\frac{1}{2}$ " (64 mm) x 8" (203 mm) cover plates and two 2" (51 mm) gaskets

Warranty

Warranty:	1-year warranty
------------------	-----------------

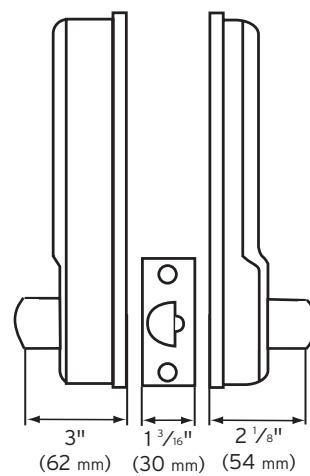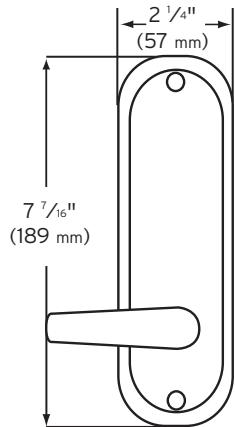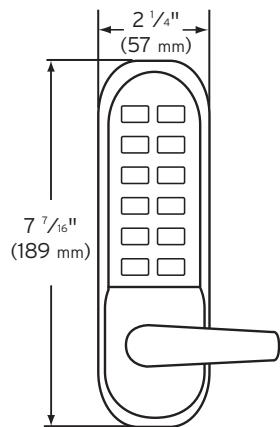Dimensions**Exterior****Interior****Side View**

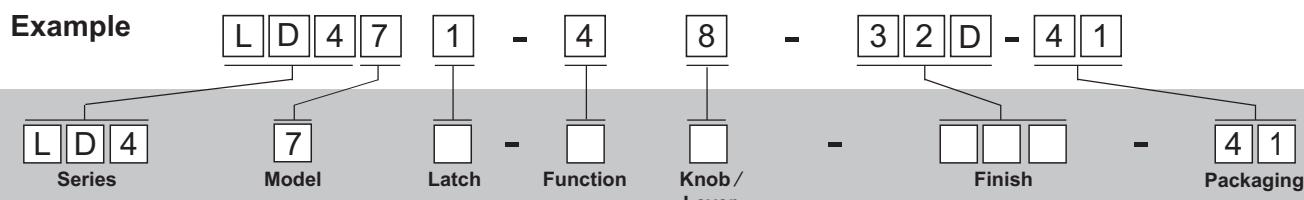

Build the model number with the desired options

Base Model	Description	Base Price
LD4714832D41	Light Duty Pushbutton Lock, 2 3/8" Backset, Passage, Lever	\$265.00

Choose one option from each category

Model Options	Description	Price
7	Mechanical pushbutton lock with vandal resistant clutching lever	No Charge
Latch Options	Description	Price
1	Tubular latch bolt 2 3/8" (60 mm) backset	No Charge
2	Tubular latch bolt 2 3/4" (70 mm) backset	No Charge

Function Options	Description	Price
4	Passage (47 series only)	No Charge

Knob/Lever	Description	Price
8	Flat Lever (47 series only)	No Charge

Finish Options	Description	Price
32D	Satin Stainless (simulated 630 finish)	No Charge

Items Supplied with the Lock

- Installation Manual
- Full-Scale Template
- Required Installation Hardware
- Internal/External Gaskets
- Internal/External Cover Plates

Note: Bright Brass (03) and Antique Brass (05) available while supplies last





Simplex®

Accessories



Simplex® 2015 Series

Item#	Description	Price
 54266	Blank Keys	\$3.50
 54266-1-11	Master Keys for key override models. (Old #54266-1) (Specify Keycut)	\$12.50
 54266-2-11	Service Keys for override models. (Old #54266-2) (Specify Keycut)	\$6.50

Simplex® 6200 Series

Item#	Description	Price
 55072-19-01	Filler Plate—Available in Black Only	\$20.00

Simplex® 900 Series

Item#	Description	Price
 800-04-41	Adapter kit for doors with metal frames. Includes riser plates and surface mounted strike. Finish 04 Satin Brass; packaged 1 per box. (Old #74464/74468)	\$32.00
 800-26D-41	Adapter kit for doors with metal frames. Includes riser plates and surface mounted strike. Finish 26D Satin Chrome; packaged 1 per box. (Old #74464/74468)	\$32.00
 805-26D-41	Face plate shield. Not for use with key override models. Inhibits unauthorized observation of the combination. Finish 26D Satin Chrome; packaged 1 per box. (Old #24081-000-01)	\$28.00
 54266	Blank Keys	\$3.50
 54266-1-11	Master Keys for key override models. (Old #54266-1) (Specify Keycut)	\$12.50
 54266-2-11	Service Keys for override models. (Old #54266-2) (Specify Keycut)	\$6.50
 74437-26D-01	Inside Lever Handle (lock not included)	\$32.00
 74437-04-01	Inside Lever Handle (lock not included)	\$32.00
 74438-26D-01	Panic Bar Release Kit (lock not included)	\$32.00
 74438-04-01	Panic Bar Release Kit (lock not included)	\$32.00
 24095-04-10	Strike Spacers (10 pack)	\$9.00

SIMPLEX®

Simplex® 1000, L1000, and 5000 Series (continued)

Item#	Description	Price
	204231-03-41 Wrap Plate, (h)10 1/2" (267 mm) x (d)5" (127 mm), Bright Brass (605)	\$60.00
	204231-05-41 Wrap Plate, (h)10 1/2" (267 mm) x (d)5" (127 mm), Antique Brass (609)	\$60.00
	204231-26D-41 Wrap Plate, (h)10 1/2" (267 mm) x (d)5" (127 mm), Satin Chrome (626)	\$60.00
	204232-03-41 Wrap Plate, (h)15" (381 mm) x (d)5" (127 mm), Bright Brass (605)	\$85.00
	204232-05-41 Wrap Plate, (h)15" (381 mm) x (d)5" (127 mm), Antique Brass (609)	\$85.00
	204232-26D-41 Wrap Plate, (h)15" (381 mm) x (d)5" (127 mm), Satin Chrome (626)	\$85.00
	201484-03-01 Best Equivalent Small Format Interchangeable Core, Bright Brass (605)	\$55.00
	201484-05-01 Best Equivalent Small Format Interchangeable Core, Antique Brass (609)	\$55.00
	201484-26D-01 Best Equivalent Small Format Interchangeable Core, Satin Chrome (626)	\$55.00
	201600-083-01 Anti-Spy Shield (1000/L1000 Models Only)	\$40.00
	204022-000-01 Latch Extension Assembly converts to 3 3/4" (10 cm) Backset	\$30.00
	204023-000-01 Latch Extension Assembly converts to 5" (13 cm) Backset	\$26.00
	54644-000-41 Weather Cover (smoke colored)	\$50.00
	64684-26D-01 Installation Jig (1000/L1000 / 5000 / E5000)	\$350.00
	201821-26D-01 ASA Roller Strike	\$38.00
	201821-05-01 ASA Roller Strike	\$38.00
	201821-03-01 ASA Roller Strike	\$38.00

Simplex® Mounts*—Hardwood product demonstration mount, packaged 1 per box.

Item#	Description	Price
	204083-000-41 8100 Series	\$143.00
	204086-000-41 EE1000 Series	\$143.00
	204087-000-41 LP1000 Series	\$143.00
	203053-000-41 900 Series— 904 and 919 Dual Mount	\$143.00



Simplex®
Accessories

Simplex® Mounts* (continued)

Item#	Description	Price
	204189-000-41 7100 Series— 7108 and 7104 Dual Mount	\$143.00
	204092-000-41 7100 Series— 7106 model Only	\$143.00
	204094-000-41 6200 Series	\$143.00
	204096-000-41 2015 Series	\$143.00
	203044-000-41 1000, L1000, 5000, and E-Plex 5x00 Series	\$143.00
	203056-000-41 5010 Series (Exit Trim only)	\$143.00
	204246-000-41 LD Series— 450 and 470 Dual Mount	\$143.00
	74378-CH 3000 Series Narrow Stile (includes Adams Rite latch and paddle)	\$623.00
	SP5000 ACLMT Simplex 5000 Acrylic Mount	\$265.00

* Mounts do not include locks

All Models

Item	Model	Description	Price
	64754-000-01	Lubriplate Aero Grease	\$13.00

SIMPLEX®

Notes

Notes

Notes

Security. Versatility. Control.



PEAKS® Preferred Patented Key System

- PEAKS® Preferred—the next generation of PEAKS®
- Patented key control system restricts unauthorized key duplication
- Key blanks and cylinders available only from Kaba, with proper authorization
- Preferred key blanks are backward compatible with Peaks® Classic cylinders
- Available in rim, mortise, interchangeable/removable cores, and key-in-lever/knob cylinders
- Compatible with most manufacturers' door hardware
- Extra long patent life until 2024

KABA®

For More Information, See Kaba's Peaks® Catalog or www.kabaaccess.com

SIMPLEX® Mechanical Pushbutton Locks		5000	1000 EE1000	L1000 8100	2015	3000	6200	7100	LD450 LD470
									
Access	PIN Access (Single User)	✓	✓	✓	✓	✓	✓	✓	✓
	Mechanical Key Override	✓	✓	✓		✓			
Locking Devices	Cylindrical Latch	✓	✓	✓			✓		
	Mortise (ASM)			✓					
	Exit Trim	✓		✓	✓				
	AR Latch					✓			
	Tubular Latch							✓	✓
	Tubular Deadbolt							✓	
	Auxillary Latch							✓	
Mechanical Features	No Wire Installation	✓	✓	✓	✓	✓	✓	✓	✓
	No Computer Programming	✓	✓	✓	✓	✓	✓	✓	✓
	No Software Programming	✓	✓	✓	✓	✓	✓	✓	✓
	Mechanical Key Override	✓	✓	✓		✓			
	Interchangeable Core (Best)	✓	✓	✓					
	Removable Core (Large Format)	✓	✓	✓					
	Removable Mortise Cylinder					✓			
	Key-in-Lever	✓							
	Non-handed (Field Reversible)	✓	✓				✓	✓	✓
	Vandal Resistant Clutch					✓	✓	✓	✓
	Fits 1 3/8" to 2 1/4" *	✓	✓	✓	✓		✓	✓	✓
	No Batteries	✓	✓	✓	✓	✓	✓	✓	✓
	Indoor/Outdoor (Approved)	✓	✓	✓	✓	✓	✓	✓	✓
	Latch Holdback							✓	✓
	Passage	✓	✓	✓		✓			✓
	Lockout/Privacy		✓	✓		✓			
	Programmed at Keypad	✓	✓	✓	✓	✓	✓	✓	✓
	Various Finishes Available	✓	✓	✓		✓	✓	✓	
Warranty/Certification	3-Year Warranty	✓	✓	✓					
	1-Year Warranty				✓	✓	✓	✓	✓
	BHMA Grade 1 Certified	✓							
	3 Hr UL/ULC Fire Rated Latch	✓	✓	✓			✓		
	ADA Compliant	✓		✓					✓

* 8100 and EE1000 series fit 1 3/4" to 2 1/4" door thickness

* L1076 model fits 1 3/4" door thickness only

* LD series fit 1 3/8" to 2 1/2" door thickness

Strong, Powerful Security Solutions Since 1862

A Solution for Every Door ... and Every Budget

SIMPLEX®	5000	1000 EE1000	L1000 8100	2015	3000	6200	7100	LD450 LD470
ACCESS CREDENTIAL								
NUMBER OF ACCESS CODES								
LOCKING DEVICE OPTIONS								
OPTIONS	EXTERIOR/INTERIOR COMBINATION CHANGE 	PRIVACY/LOCKOUT 	PRIVACY/LOCKOUT 	PASSAGE 	INTERIOR COMBINATION CHANGE 	PRIVACY/LOCKOUT 	PASSAGE 	INTERIOR COMBINATION CHANGE
CERTIFICATIONS	ADA Compliant CERTIFIED GRADE 1		ADA Compliant					ADA Compliant
KEY OVERRIDE								

* 8100 and EE1000 series fit 1 3/4" to 2 1/4" door thickness

* L1076 model fits 1 3/4" door thickness only

* LD series fit 1 3/8" to 2 1/2" door thickness

For more detailed information, please go to www.kabaaccess.com

Disclaimer: While reasonable efforts were made to ensure the accuracy of this document at the time of printing, Kaba assumes no liability for any errors or omissions. This information is subject to be revised without notice, and changes may be incorporated in future releases.

KABA®



Kaba Access Control
2941 Indiana Avenue
Winston-Salem, NC 27105 USA
Tel: 800.849.8324
Fax: 800.346.9640

www.kabaaccess.com

KAA1026 0910