

MAGNETIC HOLDERS
MAGNETIC TOOLS
MAGNETIC TOOLS FOR WELDING OPERATION
LIFTING MAGNET
MAGBORE
CHIP & SLUDGE TRANSPORTERS
ENVIRONMENTAL
MAGNETIZERS AND DEMAGNETIZERS
MAGNETIC EQUIPMENT FOR TRANSPORTATION
SEPARATORS
HIGH GRADE MAGNETIC
MEASURING INSTRUMENTS
MAGNETIC MATERIALS

Magnetic properties of magnets

Various types of magnetic materials are available. Many kinds including isotropic and anisotropic ferrites, rare earth magnets, rubber magnet sheets, colored magnet sheets, etc. are available in various sizes.

Kinds of Permanent Magnet	Residual Magnetic Flux Density (Br)	Holding Power (BHC)
	T (G)	kA/m (Oe)
Isotropic ferrite	0.21—0.23 (2100—2300)	135—151 (1700—1900)
Anisotropic ferrite	0.36—0.42 (3600—4200)	239—271 (3000—3400)
Rare earth magnet samarium-cobalt	0.98—1.06 (9800—10600)	477—637 (6000—8000)
Rare earth magnet neodymium	1.0—1.33 (10000—13300)	836—995 (10500—12500)
Alnico magnet	1.28—1.35 (12800—13500)	52—58 (650—726)

Rubber magnet sheet

Kinds of Permanent Magnet	Residual Magnetic Flux Density (Br)	Holding Power (BHC)
	T (G)	kA/m (Oe)
Anisotropic	0.22—0.23 (2250—2350)	159—174 (2000—2180)
Isotropic	0.14—0.15 (1400—1550)	100—111 (1250—1400)

No. 1 RUBBER MAGNET SHEET


Flexible rubber magnet sheets having excellent magnetic properties.



[mm (in)]				[mm (in)]			
Type	Thickness	Width	Length	Type	Thickness	Width	Length
Solid color				Solid color			
Isotropic	0.8 (0.031)	100 (3.93)	1000 (39.3)	Isotropic	0.8 (0.031)	1000 (39.3)	1000 (39.3)
	1.0 (0.039)	100 (3.93)	1000 (39.3)		1.0 (0.039)	1000 (39.3)	1000 (39.3)
	1.0 (0.039)	200 (7.87)	1000 (39.3)		2.0 (0.078)	10 (0.39)	1000 (39.3)
	1.2 (0.047)	200 (7.87)	1000 (39.3)		3.0 (0.118)	15 (0.59)	1000 (39.3)
	1.5 (0.059)	200 (7.87)	1000 (39.3)		4.0 (0.157)	8 (0.31)	1000 (39.3)
	1.6 (0.063)	100 (3.93)	1000 (39.3)		5.0 (0.197)	15 (0.59)	1000 (39.3)
Anisotropic	2.0 (0.078)	100 (3.93)	1000 (39.3)	Colored sheets (white, red, yellow, green, blue)			
	2.0 (0.078)	200 (7.87)	1000 (39.3)	Isotropic	0.8 (0.031)	300 (11.8)	400S (15.7)
	3.0 (0.118)	100 (3.93)	1000 (39.3)	Colored sheets (white, red, yellow, green, blue, orange)			
	3.0 (0.118)	200 (7.87)	1000 (39.3)	Isotropic	0.8 (0.031)	100 (3.93)	300S (11.8)
	2.5 (0.098)	200 (7.87)	1000 (39.3)		0.8 (0.031)	200 (7.87)	300S (11.8)
	3.5 (0.137)	200 (7.87)	1000 (39.3)		0.8 (0.031)	300 (11.8)	300S (11.8)
	4.0 (0.157)	200 (7.87)	1000 (39.3)		0.8 (0.031)	1000 (39.3)	1000S (39.3)
	3.0 (0.118)	20 (0.78)	1000 (39.3)	Colored sheets (white only)			
	5.0 (0.197)	61 (2.40)	950 (37.4)	Isotropic	0.8 (0.031)	100 (3.93)	300D (11.8)
	10.0 (0.393)	30 (1.18)	1000 (39.3)		0.8 (0.031)	200 (7.87)	300D (11.8)

※ “S” refers to non-lustrous sheets and “D” refers to lustrous sheets.
※ Colored sheets have been cut to specific sizes.

No. 2 FERRITE MAGNET (ROUND/RECTANGULAR)

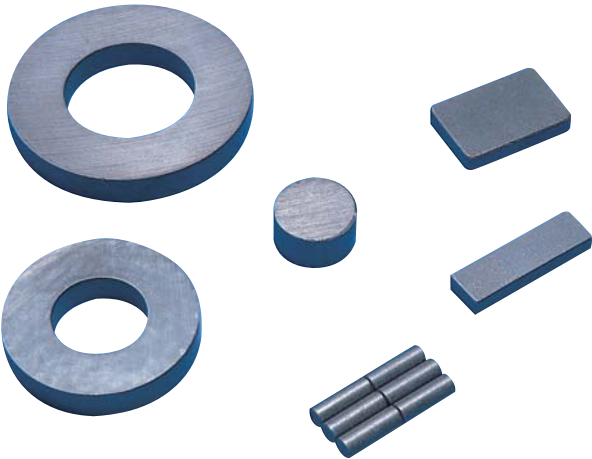

- Isotropic: Standard type for general applications.
- Anisotropic: Ferrite magnets having significantly higher magnetic property than isotropic magnets. In addition to dry types, a wet anisotropic magnet having a particularly high magnetic flux density is also available (made to order).

Isotropic


[mm (in)]					
Shape	Diameter	Thickness	Shape	Size	Thickness
Round	φ 6 (0.23)	3.0 (0.11)	Rectangular	15 (0.59) × 10 (0.39)	3.2 (0.12)
	φ 10 (0.39)	4.0 (0.15)		20 (0.78) × 8 (0.31)	4.0 (0.15)
	φ 10 (0.39)	5.0 (0.19)		25 (0.98) × 16 (0.62)	4.0 (0.15)
	φ 20 (0.78)	4.0 (0.15)		30 (1.18) × 20 (0.78)	5.0 (0.19)
	φ 25 (0.98)	4.0 (0.15)		42 (1.65) × 17 (0.66)	5.0 (0.19)
	φ 25 (0.98)	5.0 (0.19)			
	φ 30 (1.18)	5.0 (0.19)			

Anisotropic

[mm (in)]					
Shape	Diameter	Thickness	Shape	Size	Thickness
Round (incl. ring)	φ 15 (0.59)	4.0 (0.15)	Rectangular	20 (0.78) × 15 (0.59)	4.0 (0.15)
	φ 20 (0.78)	4.0 (0.15)		20 (0.78) × 15 (0.59)	7.0 (0.27)
	φ 27 (1.06) × φ 17 (0.66)	3.0 (0.11)		40 (1.57) × 25 (0.98)	10.0 (0.39)
	φ 30 (1.18)	5.0 (0.19)		40 (1.57) × 10 (0.39)	7.0 (0.27)
	φ 30 (1.18)	8.0 (0.31)		40 (1.57) × 40 (1.57)	10.0 (0.39)
	φ 100 (3.93) × φ 60 (2.36)	15.0 (0.59)		100 (3.93) × 100 (3.93)	10.0 (0.39)

※ Sizes not listed above are special sizes.
※ Even if a magnet of a size listed above is to be ordered, a certain quantity of such magnets may in some cases need to be ordered at a time.

No. 3 ALNICO MAGNET (ROUND)

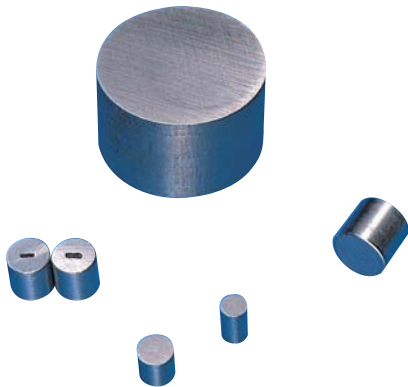


● Cast magnets consisting mainly of iron, aluminum, nickel and cobalt (Fe, Al, Ni, Co). These magnets feature a larger residual magnetic flux density and magnetic stability against changes in temperature.

[mm (in.)]	
Diameter	Length
φ 3 (0.11)	8 (0.31), 9 (0.35), 12 (0.47), 20 (0.78), 22 (0.86)
φ 4 (0.15)	10 (0.39)
φ 5 (0.19)	8 (0.31), 10 (0.39), 15 (0.59), 20 (0.78), 25 (0.98), 60 (2.36)
φ 6 (0.23)	8 (0.31), 12 (0.47), 15 (0.59), 20 (0.78), 25 (0.98), 60 (2.36)
φ 8 (0.31)	10 (0.39), 16 (0.62), 50 (1.96)
φ 10 (0.39)	10 (0.39), 15 (0.59), 30 (1.18), 50 (1.96), 100 (3.93), 140 (5.51)
φ 13 (0.51)	10 (0.39), 12 (0.47), 15 (0.59)
φ 14 (0.55)	10 (0.39)
φ 15 (0.59)	70 (2.75)
φ 20 (0.78)	15 (0.59)
φ 25 (0.98)	15 (0.59), 20 (0.78)

* Sizes not listed above are special sizes.

No. 4 RARE EARTH MAGNET (RECTANGULAR/ROUND)

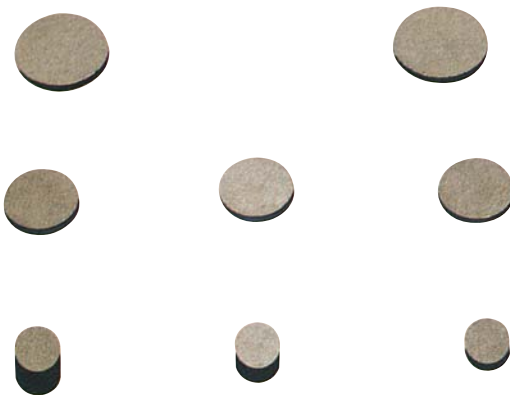

- Very small yet strong magnetic force.
- The samarium-cobalt type having high thermal stability and corrosion resistance and the neodymium type having the highest magnetic force and strong mechanical strength and less susceptible to cracking are available.

Rectangular


[mm (in.)]					
Samarium-Cobalt		Neodymium			
Size	Thickness	Size	Thickness	Size	Thickness
40 (1.57) × 20 (0.78)	10 (0.39)	12 (0.47) × 7 (0.27)	4 (0.15)	20 (0.78) × 15 (0.59)	5 (0.19)
		20 (0.78) × 12 (0.47)	5 (0.19)	30 (1.18) × 30 (1.18)	10 (0.39)

Round


[mm (in.)]					
Samarium-Cobalt			Neodymium		
Diameter	Thickness		Diameter	Thickness	
φ 2 (0.07)	2 (0.07), 3 (0.11)		φ 2 (0.07)	2 (0.07), 3 (0.11)	
φ 3 (0.11)	1.5 (0.05), 2 (0.07), 3 (0.11)		φ 3 (0.11)	2 (0.07), 3 (0.11), 10 (0.39)	
φ 4 (0.15)	2 (0.07), 3 (0.11), 4 (0.15)		φ 4 (0.15)	2 (0.07)	
φ 5 (0.19)	3 (0.11), 5 (0.19)		φ 5 (0.19)	3 (0.11), 5 (0.19)	
φ 6 (0.23)	2 (0.07), 3 (0.11), 3.5 (0.13)		φ 6 (0.23)	2 (0.07), 3 (0.11), 5 (0.19)	
φ 7 (0.27)	3.5 (0.13)		φ 7 (0.27)	3.5 (0.13)	
			φ 8 (0.31)	3 (0.11), 4 (0.15), 5 (0.19), 8 (0.31)	
			φ 10 (0.39)	3 (0.11), 5 (0.19), 10 (0.39)	
			φ 12 (0.47)	2.5 (0.09), 5 (0.19)	
			φ 14 (0.55)	10 (0.39)	
			φ 15 (0.59)	5 (0.19)	
			φ 20 (0.78)	5 (0.19)	
			φ 22 (0.86)	10 (0.39)	

* For sizes not listed above, please contact us.


No. 5 SIMPLE MAGNETIC HOLDER

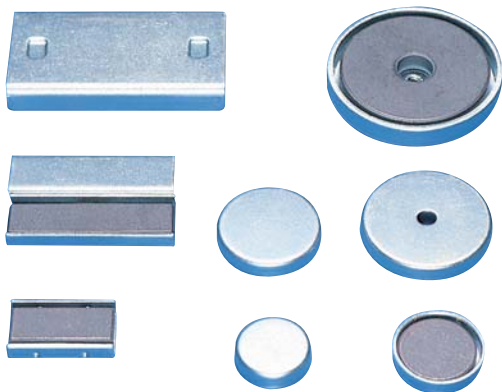

Rectangular



Round



Simple holders consisting of an isotropic ferrite permanent magnet covered by an iron yoke. Dimensionally, the finishing accuracy is not good and these holders are not recommended for incorporation in jigs/fixtures. These holders are recommended for the purpose of attraction only by themselves at low cost.

Round

[mm (in.)]						
Model	Yoke Dimensions			Magnet Dimensions	Magnet Type	Remarks
	D_1	H_1	t			
KM-FC2	φ18 (0.70)	5 (0.19)	0.8 (0.03)	φ15 (0.59) × 4 (0.15)	Isotropic	
KM-FC3	φ20.8 (0.82)			φ18 (0.70) × 4 (0.15)		
KM-FC4	φ24 (0.94)			φ20 (0.78) × 4 (0.15)		
KM-FC5	φ31.5 (1.24)			φ28 (1.10) × φ5.5 (0.21) × 3.5 (0.13)		φ5 hole provided
KM-FC6	φ36.5 (1.43)	7.2 (0.28)	1.6 (0.06)	φ30 (1.18) × 5 (0.19)	Anisotropic	
KM-FC7	φ44 (1.73)	8 (0.31)		φ38 (1.49) × φ9 (0.35) × 5.7 (0.22)		M4 tapped hole provided
KM-FC8	φ86 (3.38)	10 (0.39)		φ80 (3.15) × φ40 (1.57) × 8 (0.31)		φ6 hole provided

Rectangular

[mm (in.)]						
Model	Yoke Dimensions				Magnet Dimensions	Remarks
	L_1	W_1	H_1	t		
KM-FK3	20 (0.78)	34 (1.33)	7 (0.27)	1.5	20 (0.78) × 30 (1.18) × 5 (0.19)	Isotropic
KM-FK5	55 (2.16)	30 (1.18)	8 (0.31)	(0.05)	49 (1.92) × 24 (0.94) × 6 (0.23)	

MAGNETIC HOLDERS

MAGNETIC TOOLS

MAGNETIC TOOLS FOR WELDING OPERATION

LIFTING MAGNET

MAGBORE

CHIP & SLUDGE TRANSPORTERS

ENVIRONMENTAL EQUIPMENT

MAGNETIZERS AND DEMAGNETIZERS

MAGNETIC EQUIPMENT FOR TRANSPORTATION

MAGNETIC SEPARATORS

HIGH GRADE MAGNETIC INSTRUMENTS

MEASURING MATERIALS