


Model **FS** MAGNETIC PLUMB BOB


## Plumb bob with strong magnet



An example of usage

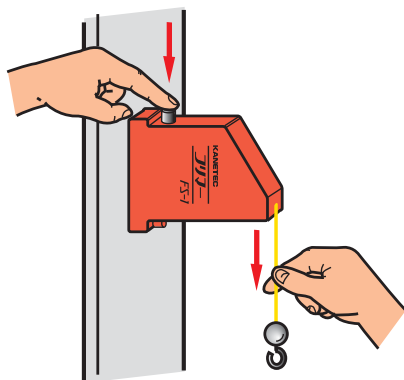

FS-1

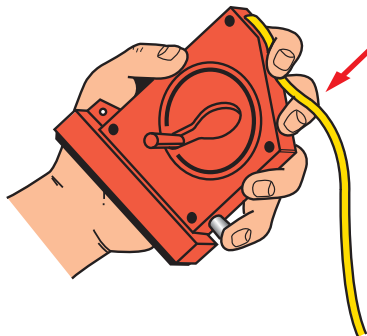

Wind up while lightly holding down string with finger to prevent tangling of string.

## [Application]


A plumb bob incorporating a strong magnet suitable for use in building and bridge construction and shipbuilding sites. As the plumb bob is held by the magnet, one person can take accurate measurements easily. Easy to carry with improved safety. A plastic case is employed to reduce the weight.

## [Features]

- The case is made of reinforced plastic to provide both light weight and durability.
- A large diameter reel to speed up windup.
- A ratchet mechanism is provided for better operability. A safety stopper is also incorporated to absorb unexpected shocks.
- A scale of magnet with increased magnetic force is included.

Model	Holding Power	Dimensions	Mass		Accessories		
			Body	Plumb	Plumb	Scale	String
FS-1	60N (6kgf)	104 (4.09) × 120 (4.72) × 25 (0.98)	350g/0.8 lb	850g/1.9 lb	φ55 (2.16) × 86.5 (3.40)	φ36.5 (1.43) × 130 (5.11)	10m (393.7)

※ The holding power (side slip resistance) applies to mill scale iron plate 9 mm or thicker.

Model **SE** STRAIGHT EDGE


SE-50

A steel straight edge incorporating a magnet. The magnetic force on/off function is not incorporated.

Model	Effective Length	Height	Width	Mass
SE-50	500 (19.6)	30 (1.18)	20 (0.78)	2kg/4.4 lb

Model **SK** MAGSQUARE

SK-10



A square with one of its orthogonal reference planes magnetized. It is held by the magnet on an inclined face or back face for easy operation.

Model	Dimension						Squareness	Mass
	A	B	C	D	E	t		
SK-10	100 (3.93)	70 (2.75)	20 (0.78)	40 (1.57)	20 (0.78)	2.5 (0.09)	0.02+ $\frac{A}{10000}$	0.5kg/1.1 lb
SK-15	150 (5.90)	120 (4.72)	28 (1.10)		24 (0.94)	3.0 (0.11)		1.0kg/2.2 lb
SK-20	200 (7.87)	150 (5.90)	20 (0.78)		29 (1.14)	4.0 (0.15)		1.3kg/2.8 lb
SK-25	250 (9.84)	160 (6.29)	20 (0.78)		32 (1.26)			1.2kg/2.6 lb