



KOSHIN

Koshin Portable Power Systems



KOSHIN Quality **Contractor**

KOSHIN is introducing a professional line of generators.

FEATURES	BENEFITS
Extended Run Fuel Tank with gauge and easy access fuel valve	Longer run times, less maintenance
Full Roll Cage for ultimate protection	Job site and transport protection. No lifting eye required
Idle Control*	Longer run times & fuel efficiency
Premium Quiet Package	75 dba, low tone exhaust, lower noise levels, quieter operation
Hydraulic / Magnetic Circuit Breakers	Reliable, superior overload protection
Easy to Read Control Panel	Complete with voltage selector, hour meter, GFCI and twist lock receptacles, UL / CSA* / OSHA compliant
Premium Brushless Alternator	Less than 5% harmonic distortion – clean electric power
Wheel Kit available	Job site portability (standard on GEH-14000EW)
Honda Engine with low oil alert	EPA, CARB and CSA compliant
Backed by Koshin	3-year warranty


*Excludes GEH-3100DX



Contractor Grade

and Industrial Grade Generators

For the rental and contractor markets, these generators are designed to survive the tough conditions on job sites and back-up power.

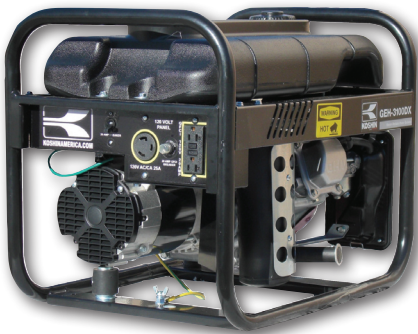

GEH-3100DX



GEH-6000DX



GEH-7200EX



GEH-14000EW




Industrial Reliability

Wheel Kit Available

standard on GEH-14000EW

KOSHIN Generators **Specifications**



					
	GEH-3100DX	GEH-4000DX	GEH-6000DX	GEH-7200EX	GEH-14000EW
RATED POWER (WATTS)	2600	3800	5300	6100	11700
SURGE POWER (WATTS)	3100	4000	6000	7200	14000
VOLTAGE	120	120 / 240	120 / 240	120 / 240	120 / 240
AMPS @ 120 VAC	25.8	31.6	44.2	50.8	97.5
AMPS @ 240 VAC		15.8	21.1	25.4	48.7
ENGINE	HONDA GX160	HONDA GX240	HONDA GX340	HONDA GX390	HONDA GX630
START SYSTEM	Recoil	Recoil	Recoil	Electric* Recoil	Electric*
FULL LOAD RUN TIME (HOURS)	7.1	12.4	10.4	9.2	6.5
FUEL TANK (GAL)	7.91	7	8	8	8
DIMENSIONS (IN) L x W x H	23 x 17 x 18	30 x 23 x 26	32 x 23 x 27	32 x 23 x 27	39 x 23 x 32
WEIGHT (LBS)	88	161	189	200	316
WHEEL KIT- WKG-10	Optional	Optional	Optional	Optional	Standard
RECEPTACLES	NEMA 5-26R 125V GFCI NEMA 15-30R 125V T/L	2-NEMA 5-20R 125V GFCI NEMA L5-30R 125V T/L NEMA L14-20R 125-250V T/L	2-NEMA 5-20R 125V GFCI NEMA L5-30R 125V T/L NEMA L14-30R 125-250V T/L	2-NEMA 5-20R 125V GFCI NEMA L5-30R 125V T/L NEMA L14-30R 125-250V T/L	2-NEMA 5-20R 125V GFCI NEMA L14-30R 125-250V T/L NEMA 14-30R 125-250V
BATTERY				UB12220	U1L

*Recommended Battery — Sealed 12V 18 amp

For more information contact

KOSHIN AMERICA CORP.

1218 Remington Road
Schaumburg, IL 60173

(847) 884-1570

(800) 634-4092

Fax (847) 310-0740

www.KOSHINAmerica.com