



LOW PRESSURE

INDUSTRIAL • REUSABLE

HOSE FITTINGS



REUSABLE LOW-PRESSURE HOSE FITTINGS



OXYGEN & ACETYLENE FITTINGS

PAINT SPRAY FITTINGS



"PUSH-ON" FITTINGS



HOSE FITTING ADAPTERS



UNION SWIVEL ADAPTERS



LOW PRESSURE "PUSH-ON" HOSE ASSEMBLIES



JOINERS

PIPE FITTINGS
CONNECTORS
NIPPLES
& BUSHINGS

INDIVIDUAL
FITTINGS &
ADAPTERS
ALL TYPES
■
ASSEMBLIES
■
1 & 2 RAYON
BRAID RUBBER
COVERED HOSE
■
SINGLE FABRIC
BRAID RUBBER
OR COTTON
COVERED HOSE
■
ACCESSORIES



LOW PRESSURE
HOSE ASSEMBLIES



HOSE
STEMS



LENZ
COMPANY

P.O. Box 1044
DAYTON • OHIO
PHONE:
937/277-9364
FAX:
937/277-6516

CATALOG OF SIZES & SPECIFICATIONS

Specify and Depend on Lenz
...There's A Valuable Difference



LENZ Company

Our Mailing Address:

P.O. Box 1044 • Dayton, Ohio 45401

Our Plant Address:

3301 Klepinger Road • Dayton, Ohio 45406

PHONE: 937/277-9364

FAX: 937/277-6516

The LENZ Company was founded as, and continues as, an exclusive manufacturer of Hose Fittings, Tube Fittings, Pipe Fittings and allied fitting products. As a result, The Lenz Company has gained industry-wide recognition as a leader and specialist in the design, engineering and manufacture of a full and comprehensive line of fittings of all types. A modern, expanding plant, continuous research, development and modern methods have established and maintained this leadership.

A Full Line Manufacturing Specialist In Industrial Hydraulic & Allied Hydraulic Products and Accessories, Write For Free Lenz Catalogs On: High & Medium Pressure Hose Fittings (HP-401); "O-Ring Seal" and Flare Tube Fittings & Pipe Fittings (127R-A); Hydraulic Reservoir Accessories (TA81); Glycerin-Filled and Standard Pressure Gauges (PG-111); Hydraulic Strainers & Filters (SF-11A)



HP-401



CAT. 127R-A



TA-81

PG-111



SF-11A

HOW TO ORDER

Detailed and cut-away illustrations of all Lenz parts are clearly shown with part numbers and complete specifications for your convenience in ordering.

HOSE ASSEMBLIES - When giving a hose assembly part number, add the desired overall assembly length in inches to complete the part number. Example: To part number CL-4-44 add the overall assembly length (O.A.) . . . CL-4-44-18" for a 1/2" Male Pipe to 1/2" Union Female Pipe, 1/2" 2 BSR Hose and O.A. length of 18". To order "Push-On" assemblies see page 21.

If hose ends have pipe threads of different sizes such as 1/4" Male Pipe one end and 3/8" Male Pipe on the other end of 1/4" 2BSR Hose, the assembly number would be AL2-32-O.A.

On hose assemblies with Union on one end, indicate which pipe size is to be union by spelling out.

HOSE LENGTHS - Order bulk hose in feet. Specify random or cut lengths. 1 and 2 BSR Hose are available up to 50 ft. lengths, 1 1/2 FTR Multi-Purpose Hose up to 250 ft. lengths.

HOW TO ASSEMBLE LENZ LOW PRESSURE HOSE FITTINGS




1. Place Ferrule Over Hose End and oil inside of hose.



2. Oil stem thread and place stem in Ferrule



3. Screw Stem Down

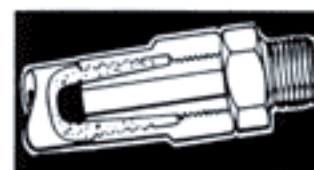

4. Completely Assembled


LENZ INDUSTRIAL LOW PRESSURE HOSE

LENZ
HOSE
FITTINGS

INDUSTRIAL
LOW PRESSURE
RAYON BRAID HOSE
1 & 2 RAYON BRAID
RUBBER COVER

TYPE 1BSR • 1 RAYON BRAID HOSE


Lenz Type 1BSR, industrial low pressure hydraulic 1 Rayon Braid hose is a quality product of synthetic rubber tube and cover, compounded for resistance to oil, heat and cold. The cut-away view shows the construction and reinforcement provided by a layer of uniformly braided tough rayon cord that also adds greater flexibility under working conditions. Recommended working temperatures are -40° F. to +200° F. Type 1BSR meets S.A.E. 100R6 specifications.

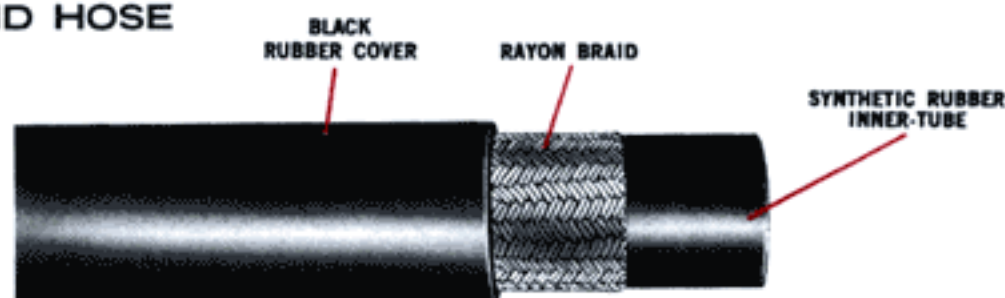

PART NO.	HOSE I.D.	HOSE O.D.	RECOMMENDED WORKING PRESSURE P.S.I.	MIN. BURST PRESSURE P.S.I.	MIN. BEND RADIUS	APPROX. WT. PER 100 FT.	USE WITH FOLLOWING FITTING SERIES
3/8 1BSR	3/8	3/4	500	2000	2 1/2"	9.0	95 Series
1/4 1BSR	1/4	1/2	400	1600	2 1/2"	11.0	99 Series
3/8 1BSR	3/8	3/4	400	1600	3"	12.0	106 Series
3/8 1BSR	3/8	3/4	400	1600	3"	14.0	112 Series

TYPE 2BSR • 2 RAYON BRAID HOSE


Lenz Type 2BSR, industrial low pressure hydraulic 2 Rayon Braid hose is made of synthetic rubber tube and cover that is compounded for resistance to oil, heat and cold. As shown in the cut-away view it is reinforced with two layers of tough rayon cord, uniformly braided for greater flexibility under working conditions. Recommended working temperatures are -40° F. to +200° F. Type 2BSR meets S.A.E. 100R3 specifications.

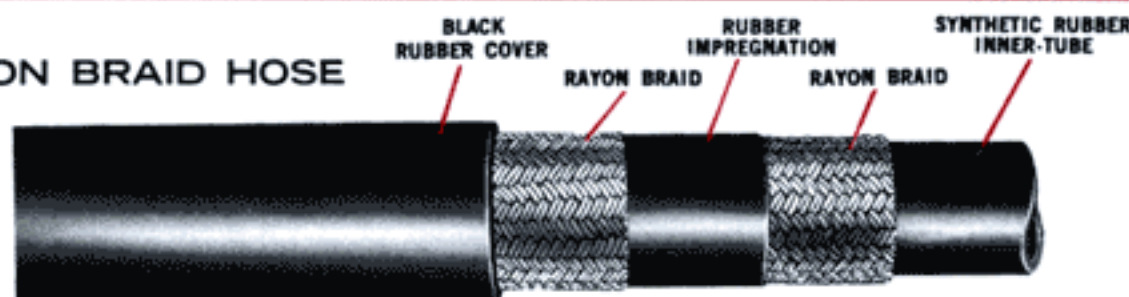

PART NO.	HOSE I.D.	HOSE O.D.	RECOMMENDED WORKING PRESSURE P.S.I.	MIN. BURST PRESSURE P.S.I.	MIN. BEND RADIUS	APPROX. WT. PER 100 FT.	USE WITH FOLLOWING FITTING SERIES
1/4 2BSR	1/4	1 1/2	1250	5000	3"	13.0	98 Series
3/8 2BSR	3/8	3/4	1125	4500	4"	20.0	115 Series
1/2 2BSR	1/2	1 1/4	1000	4000	5"	31.0	206 Series
3/4 2BSR	3/4	1 1/4	750	3000	6"	47.0	217 Series
1" 2BSR	1"	1 1/2	550	2250	8"	60.0	226 Series

1 1/2 FTR MULTI-PURPOSE RAYON BRAID HOSE

1 1/2 Lenz Multi-Purpose Rayon Braid Hose is offered in Type FTR, double rayon braid. As the name implies, this is the hose for many low pressure applications. It is an economical hose for use with air, water, oils, fuels and other common petroleum base fluids. As shown in the cutaway, it has a seamless, oil-resistant synthetic rubber outer cover. The working temperature range is -40° F to +200° F.

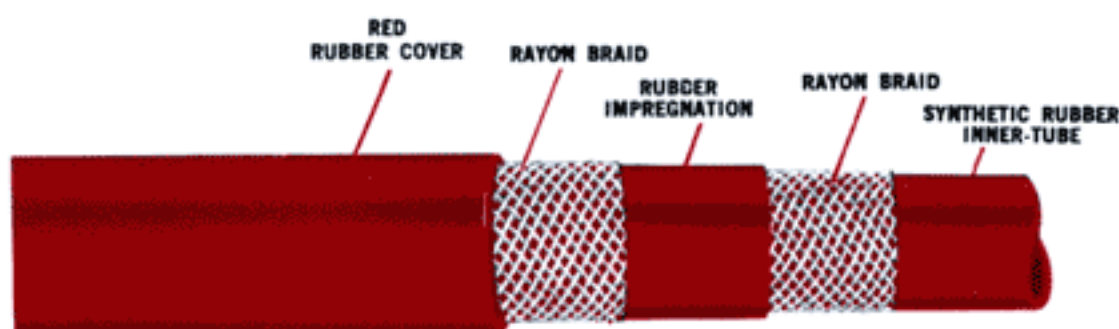


PART NO.	HOSE I.D.	HOSE O.D.	RAYON BRAIDS	REC. WORKING PRESSURE (PSI)	APPROX. WT. PER 100 FT.	USE FOLLOWING FITTINGS SERIES
1 1/2 FTR	1 1/2	2 1/2	2	250	82.0	245 Series

LENZ FULL LINE OF RE-USABLE

Brass and Steel Hose Fittings


* Need not be discarded with worn hose. Remove and reuse with new hose.

**MALE
FITTINGS**
90H thru
136H

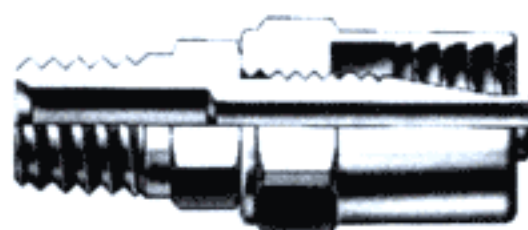


Brass Male
Fittings For
3/16", 1/4", 5/16",
3/8", 1/2" Hose I.D.

**MALE
FITTINGS**
205H thru
245H

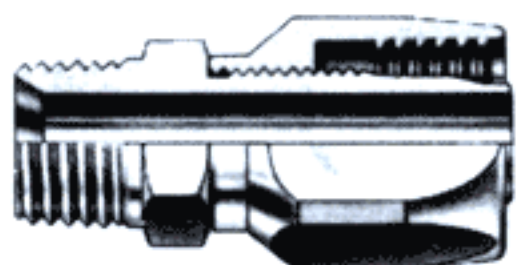


Steel Male
Fittings For
1/2", 3/4",
1", 1 1/2" Hose I.D.

***UNION
MALE
FITTINGS**
90HUM thru
136HUM

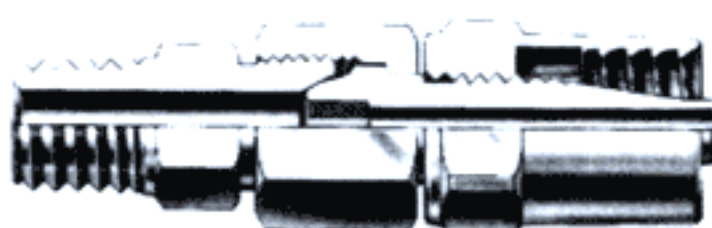


Brass, Complete
With Adapter For
3/16", 1/4", 5/16",
3/8" and 1/2"
Hose I.D.

***UNION
MALE
FITTINGS**
205HUM thru
245HUM

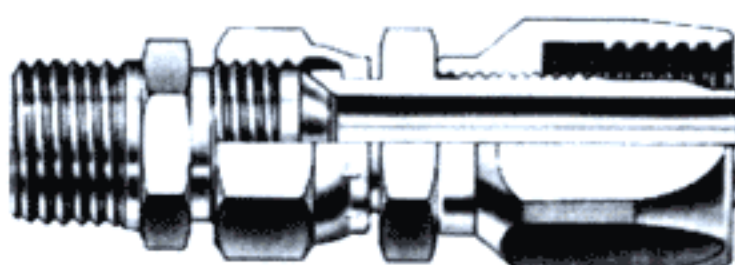


Steel, Complete
With Adapter For
1/2", 3/4", 1",
1 1/2" Hose I.D.

***UNION
FEMALE
FITTINGS**
90HUF thru
136HUF

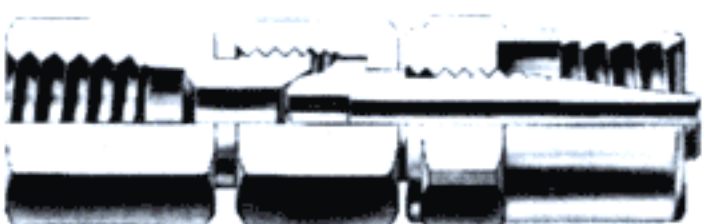

Brass, Complete
With Adapter For
3/16", 1/4", 5/16",
3/8" and 1/2"
Hose I.D.

***UNION
FEMALE
FITTINGS**
205HUF thru
245HUF

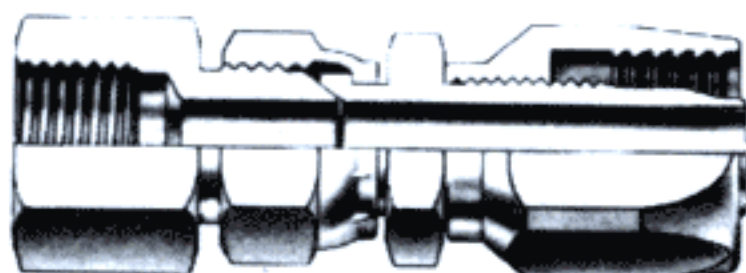

Steel, Complete
With Adapter For
1/2", 3/4", 1",
1 1/2" Hose I.D.

**FEMALE
FITTINGS**
97HF thru
105HF



Brass Female
Fittings For
1/4" Hose I.D.

It is critical that the O.D. and I.D. of the hose and fitting correspond. EXAMPLE: 1/4" I.D. and 1/2" O.D. We use 99 Series fittings.

FITTINGS FOR 3/16" HOSE I.D. (Brass)

MALE FITTING	UNION MALE FITTING	UNION FEMALE FITTING	FEMALE FITTING	HOSE O.D.	PIPE SIZE
90H-1	90HUM-1	90HUF-1	—	7/16	1/8
—	90HUM-2	90HUF-2	—	7/16	1/4
—	90HUM-3	90HUF-3	—	7/16	3/8
—	90HUM-4	—	—	7/16	1/2
93H-1	93HUM-1	93HUF-1	—	1/2	1/8
93H-2	93HUM-2	93HUF-2	—	1/2	1/4
—	93HUM-3	93HUF-3	—	1/2	3/8
—	93HUM-4	—	—	1/2	1/2
95H-1	95HUM-1	95HUF-1	—	15/32	1/8
95H-2	95HUM-2	95HUF-2	—	15/32	1/4
—	95HUM-3	95HUF-3	—	15/32	3/8
—	95HUM-4	—	—	15/32	1/2
96H-1	96HUM-1	96HUF-1	—	9/16	1/8
96H-2	96HUM-2	96HUF-2	—	9/16	1/4
—	96HUM-3	96HUF-3	—	9/16	3/8
—	96HUM-4	—	—	9/16	1/2

FITTINGS FOR 1/4" HOSE I.D. (Brass)

97H-1	97HUM-1	97HUF-1	—	15/32	1/8
97H-2	97HUM-2	97HUF-2	97HF-2	15/32	1/4
97H-3	97HUM-3	97HUF-3	—	15/32	3/8
—	97HUM-4	—	—	15/32	1/2
98H-1	98HUM-1	98HUF-1	—	19/32	1/8
98H-2	98HUM-2	98HUF-2	98HF-2	19/32	1/4
98H-3	98HUM-3	98HUF-3	—	19/32	3/8
—	98HUM-4	—	—	19/32	1/2
99H-1	99HUM-1	99HUF-1	—	1/2	1/8
99H-2	99HUM-2	99HUF-2	99HF-2	1/2	1/4
99H-3	99HUM-3	99HUF-3	—	1/2	3/8
—	99HUM-4	—	—	1/2	1/2
100H-1	100HUM-1	100HUF-1	—	17/32	1/8
100H-2	100HUM-2	100HUF-2	100HF-2	17/32	1/4
100H-3	100HUM-3	100HUF-3	—	17/32	3/8
—	100HUM-4	—	—	17/32	1/2
101H-1	101HUM-1	101HUF-1	—	9/16	1/8
101H-2	101HUM-2	101HUF-2	101HF-2	9/16	1/4
101H-3	101HUM-3	101HUF-3	—	9/16	3/8
—	101HUM-4	—	—	9/16	1/2
102H-1	102HUM-1	102HUF-1	—	5/8	1/8
102H-2	102HUM-2	102HUF-2	102HF-2	5/8	1/4
102H-3	102HUM-3	102HUF-3	—	5/8	3/8
—	102HUM-4	—	—	5/8	1/2
103H-1	103HUM-1	103HUF-1	—	21/32	1/8
103H-2	103HUM-2	103HUF-2	103HF-2	21/32	1/4
103H-3	103HUM-3	103HUF-3	—	21/32	3/8
—	103HUM-4	—	—	21/32	1/2
104H-1	104HUM-1	104HUF-1	—	11/16	1/8
104H-2	104HUM-2	104HUF-2	104HF-2	11/16	1/4
104H-3	104HUM-3	104HUF-3	—	11/16	3/8
—	104HUM-4	—	—	11/16	1/2
105H-1	105HUM-1	105HUF-1	—	3/4	1/8
105H-2	105HUM-2	105HUF-2	105HF-2	3/4	1/4
105H-3	105HUM-3	105HUF-3	—	3/4	3/8
—	105HUM-4	—	—	3/4	1/2

See "How To Assemble Low Pressure Hose Fittings" Instructions On Inside Front Cover

Attention:

None of the hose fittings manufactured and/or sold by THE LENZ COMPANY are to be used for life dependency applications such as in diving, for oxygen, air, or other breathing applications.

There are instances where the weight of long hose lines would be on the fitting with the possibility of the hose pulling out of the fitting. This could have disastrous results in a breathing application.

We specifically call your attention to the 90 through 136 Low Pressure Fittings shown in this Catalog LP 301, WDM, or revisions thereof. These fittings are intended for welding, low pressure hydraulics or pneumatics.

This non-use for life dependency applications such as in diving, for oxygen, air or other breathing applications applies to all of the hose fittings manufactured and/or sold by THE LENZ COMPANY and/or related companies. None of our fittings are designed for this type of use.

LOW PRESSURE HOSE FITTINGS

LENZ
HOSE
FITTINGS

INDUSTRIAL
LOW PRESSURE
HOSE FITTINGS
FOR USE WITH 1 &
RAYON BRAID HOSE

* EXCLUSIVE LENZ FEATURE

All Lenz Union Male and Union Female Fittings are supplied complete with hose adapters. No other parts needed to make connections. Without adapters, see ordering instructions below.

This selection of Lenz low pressure hose fittings is one of the largest and most complete in the country. Fittings are made especially for use with 1 and 2 Braid Rayon Reinforced Hose. Reusable, with high resistance to wear, they can be used over and over again. Easily and quickly attached they provide positive end seal that prevents absorption of fluid into fabric reinforcement and grip tightly with no damage to the hose. See "How To Assemble", on inside front cover.

FITTINGS FOR 5/16" HOSE I.D. (Brass)

MALE FITTING	UNION MALE FITTING	UNION FEMALE FITTING	FEMALE FITTING	HOSE O.D.	PIPE SIZE
—	106HUM-1	106HUF-1	—	3/8	1/8
106H-2	106HUM-2	106HUF-2	—	3/8	1/4
106H-3	106HUM-3	106HUF-3	—	3/8	3/8
—	106HUM-4	—	—	3/8	1/2
—	107HUM-1	107HUF-1	—	3/8	1/8
107H-2	107HUM-2	107HUF-2	—	3/8	1/4
107H-3	107HUM-3	107HUF-3	—	3/8	3/8
—	107HUM-4	—	—	3/8	1/2
—	108HUM-1	108HUF-1	—	7/32	1/8
108H-2	108HUM-2	108HUF-2	—	7/32	1/4
108H-3	108HUM-3	108HUF-3	—	7/32	3/8
—	108HUM-4	—	—	7/32	1/2
—	109HUM-1	109HUF-1	—	13/32	1/8
109H-2	109HUM-2	109HUF-2	—	13/32	1/4
109H-3	109HUM-3	109HUF-3	—	13/32	3/8
—	109HUM-4	—	—	13/32	1/2
—	110HUM-1	110HUF-1	—	3/4	1/8
110H-2	110HUM-2	110HUF-2	—	3/4	1/4
110H-3	110HUM-3	110HUF-3	—	3/4	3/8
—	110HUM-4	—	—	3/4	1/2

FITTINGS FOR 3/8" HOSE I.D. (Brass)

112H-2	112HUM-2	112HUF-2	—	3/8	1/4
112H-3	112HUM-3	112HUF-3	—	3/8	3/8
—	112HUM-4	—	—	3/8	1/2
—	113HUM-1	113HUF-1	—	7/32	1/8
113H-2	113HUM-2	113HUF-2	—	7/32	1/4
113H-3	113HUM-3	113HUF-3	—	7/32	3/8
—	113HUM-4	—	—	7/32	1/2
—	114HUM-1	114HUF-1	—	13/32	1/8
114H-2	114HUM-2	114HUF-2	—	13/32	1/4
114H-3	114HUM-3	114HUF-3	—	13/32	3/8
—	114HUM-4	—	—	13/32	1/2
—	115HUM-1	115HUF-1	—	3/4	1/8
115H-2	115HUM-2	115HUF-2	—	3/4	1/4
115H-3	115HUM-3	115HUF-3	—	3/4	3/8
—	115HUM-4	—	—	3/4	1/2

FITTINGS FOR 1/2" HOSE I.D. (Brass)*

—	135HUM-2	135HUF-2	—	3/4	1/4
135H-3	135HUM-3	135HUF-3	—	3/4	3/8
135H-4	135HUM-4	135HUF-4	—	3/4	1/2
—	136HUM-2	136HUF-2	—	7/8	1/4
136H-3	136HUM-3	136HUF-3	—	7/8	3/8
136H-4	136HUM-4	136HUF-4	—	7/8	1/2

* Steel Swivel Nuts Std., Brass Nuts Optional

It is critical that the O.D. and I.D. of the hose and fitting correspond. EXAMPLE: 1/4" I.D. and 1/2" O.D. We use 99 Series fittings.

NOTE: See Pages 14, 18 And 19 For Adapters For Both Brass And Steel Fittings

FITTINGS FOR 1/2" HOSE I.D. (Steel)

MALE FITTING	UNION MALE FITTING	UNION FEMALE FITTING	OTHER FITTINGS	HOSE O.D.	PIPE SIZE
—	205HUM-2	205HUF-2	—	1 1/8	1/4
205H-3	205HUM-3	205HUF-3	—	1 1/8	3/8
205H-4	205HUM-4	205HUF-4	—	1 1/8	1/2
—	205HUM-6	—	—	1 1/8	3/4
—	206HUM-2	206HUF-2	—	1 3/8	1/4
206H-3	206HUM-3	206HUF-3	—	1 3/8	3/8
206H-4	206HUM-4	206HUF-4	—	1 3/8	1/2
—	206HUM-6	—	—	1 3/8	3/4
—	207HUM-2	207HUF-2	—	1"	1/4
207H-3	207HUM-3	207HUF-3	—	1"	3/8
207H-4	207HUM-4	207HUF-4	—	1"	1/2
—	207HUM-6	—	—	1"	3/4
—	209HUM-2	209HUF-2	—	1 1/4	1/4
209H-3	209HUM-3	209HUF-3	—	1 1/4	3/8
209H-4	209HUM-4	209HUF-4	—	1 1/4	1/2
—	209HUM-6	—	—	1 1/4	3/4

FOR 3/4" HOSE I.D.

—	214HUM-4	214HUF-4	—	1 3/8	1/2
214H-6	214HUM-6	214HUF-6	—	1 3/8	3/4
—	216HUM-4	216HUF-4	—	1 3/8	1/2
216H-6	216HUM-6	216HUF-6	—	1 3/8	3/4
—	217HUM-4	217HUF-4	—	1 1/4	1/2
217H-6	217HUM-6	217HUF-6	—	1 1/4	3/4

FOR 1" HOSE I.D.

—	224HUM-6	224HUF-6	—	1 3/4	3/4
224H-8	224HUM-8	224HUF-8	—	1 3/4	1"
—	225HUM-6	225HUF-6	—	1 3/4	3/4
225H-8	225HUM-8	225HUF-8	—	1 3/4	1"
—	226HUM-6	226HUF-6	—	1 1/2	3/4
226H-8	226HUM-8	226HUF-8	—	1 1/2	1"

FOR 1-1/2" HOSE I.D.

245H-10	245HUM-10	—	—	2 1/2	1 1/4
245H-12	245HUM-12	245HUF-12	—	2 1/2	1 1/2

OTHER FITTING ENDS AVAILABLE FROM STOCK - 205 Through 226 Series, SUCH AS MALE J.I.C., LENZ "O-RING-SEAL" TUBE END, J.I.C. SWIVEL and UNION MALE PIPE HOSE END - WRITE FOR COMPLETE INFORMATION.

(Steel)

1 3/8	1/2
1 3/8	3/4
1 3/8	1/2
1 3/8	3/4
1 1/4	1/2
1 1/4	3/4

(Steel)

1 3/4	3/4
1 3/4	1"
1 3/4	3/4
1 3/4	1"
1 1/2	3/4
1 1/2	1"

(Steel)

2 1/2	1 1/4
2 1/2	1 1/2

HOW TO ORDER LENZ UNION SWIVEL FITTINGS WITHOUT ADAPTERS



In Cases where Union Swivel Fittings are desired without adapters specify the series number followed by HU. For Example: For 3/8" I.D. x 3/4" O.D. hose specify 115HU. 205-HU, and up, are J.I.C. 37° Flare Swivel Fittings, see page 10 for smaller sizes in 37° Fittings.

Attention:

None of the hose fittings manufactured and/or sold by THE LENZ COMPANY are to be used for life dependency applications such as in diving, for oxygen, air, or other breathing applications.

There are instances where the weight of long hose lines would be on the fitting with the possibility of the hose pulling out of the fitting. This could have disastrous results in a breathing application.

We specifically call your attention to the 90 through 136 Low Pressure Fittings shown in this Catalog LP 301, WDM, or revisions thereof. These fittings are intended for welding, low pressure hydraulics or pneumatics.

This non-use for life dependency applications such as in diving, for oxygen, air or other breathing applications applies to all of the hose fittings manufactured and/or sold by THE LENZ COMPANY and/or related companies. None of our fittings are designed for this type of use.


LENZ 1 AND 2 RAYON BRAID

Most Popular Size Assemblies from Stocked Hose Fittings

MALE PIPE END TO MALE PIPE END ASSEMBLIES



SHOWN ABOVE - AL and SAL ASSEMBLIES THROUGH $\frac{1}{8}$ " I.D. HOSE SIZE (BRASS FITTINGS)

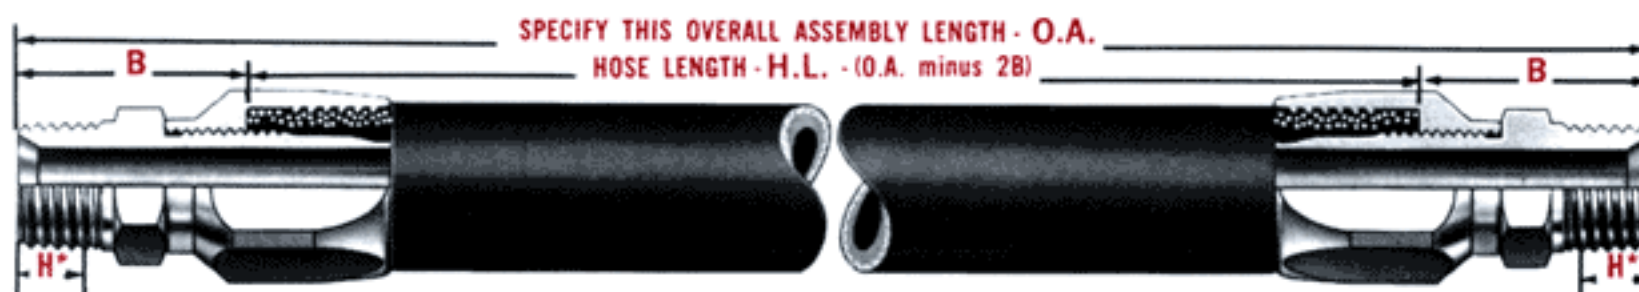

SHOWN ABOVE - AL ASSEMBLIES $\frac{1}{2}$ " I.D. HOSE SIZE and LARGER (STEEL FITTINGS)

TYPE 2BSR • TWO RAYON BRAID HOSE ASSEMBLIES

ASS'Y. NO.	HOSE I.D.	HOSE O.D.	MALE NPT	MALE NPT	MALE HOSE FITTING	MALE HOSE FITTING	MALE FITTING ALLOW. B	TOTAL FITTING ALLOW. 2B	H*
AL2-11	$\frac{1}{4}$	$\frac{3}{8}$	$\frac{1}{8}$	$\frac{1}{8}$	98H-1	98H-1	$\frac{3}{32}$	$1\frac{1}{16}$	$\frac{5}{32}$
AL2-22	$\frac{1}{4}$	$\frac{3}{8}$	$\frac{1}{4}$	$\frac{1}{4}$	98H-2	98H-2	$1\frac{3}{16}$	$2\frac{3}{8}$	$\frac{3}{8}$
AL2-33	$\frac{1}{4}$	$\frac{3}{8}$	$\frac{3}{8}$	$\frac{3}{8}$	98H-3	98H-3	$1\frac{3}{16}$	$2\frac{3}{8}$	$1\frac{1}{32}$
AL2-44	$\frac{1}{4}$	$\frac{3}{8}$	$\frac{1}{2}$	$\frac{1}{2}$	98H-4	98H-4	$1\frac{1}{32}$	$2\frac{1}{16}$	$1\frac{1}{32}$
AL3-22	$\frac{3}{8}$	$\frac{3}{4}$	$\frac{1}{4}$	$\frac{1}{4}$	115H-2	115H-2	$1\frac{3}{16}$	$2\frac{3}{8}$	$\frac{3}{8}$
AL3-33	$\frac{3}{8}$	$\frac{3}{4}$	$\frac{3}{8}$	$\frac{3}{8}$	115H-3	115H-3	$1\frac{3}{16}$	$2\frac{3}{8}$	$1\frac{1}{32}$
AL4-33†	$\frac{1}{2}$	$1\frac{1}{8}$	$\frac{3}{8}$	$\frac{3}{8}$	206H-3	206H-3	$1\frac{1}{32}$	$3\frac{1}{8}$	$1\frac{1}{32}$
AL4-44†	$\frac{1}{2}$	$1\frac{1}{8}$	$\frac{1}{2}$	$\frac{1}{2}$	206H-4	206H-4	$1\frac{1}{16}$	$3\frac{3}{8}$	$1\frac{1}{32}$
AL6-44†	$\frac{3}{4}$	$1\frac{1}{4}$	$\frac{1}{2}$	$\frac{1}{2}$	217H-4	217H-4	$1\frac{1}{32}$	$3\frac{1}{16}$	$1\frac{1}{32}$
AL6-66†	$\frac{3}{4}$	$1\frac{1}{4}$	$\frac{3}{4}$	$\frac{3}{4}$	217H-6	217H-6	$1\frac{3}{8}$	$3\frac{3}{4}$	$\frac{5}{8}$
AL8-66†	1"	$1\frac{1}{2}$	$\frac{3}{4}$	$\frac{3}{4}$	226H-6	226H-6	$1\frac{1}{8}$	$3\frac{3}{8}$	$\frac{5}{8}$
AL8-88†	1"	$1\frac{1}{2}$	1"	1"	226H-8	226H-8	$2\frac{1}{8}$	$4\frac{1}{4}$	$2\frac{1}{32}$
AL12-1010†	$1\frac{1}{2}$	$2\frac{1}{2}$	$1\frac{1}{4}$	$1\frac{1}{4}$	245H-10	245H-10	$2\frac{1}{32}$	$4\frac{1}{16}$	$1\frac{1}{8}$
AL12-1212†	$1\frac{1}{2}$	$2\frac{1}{2}$	$1\frac{1}{2}$	$1\frac{1}{2}$	245H-12	245H-12	$2\frac{3}{8}$	$4\frac{3}{8}$	$1\frac{1}{8}$

†Steel Fittings

*Hand Engagement Plus One Full Thread

TYPE 1BSR • ONE RAYON BRAID HOSE ASSEMBLIES

ASS'Y. NO.	HOSE I.D.	HOSE O.D.	MALE NPT	MALE NPT	MALE HOSE FITTING	MALE HOSE FITTING	MALE FITTING ALLOW. B	TOTAL FITTING ALLOW. 2B	H*
SAL15-11	$\frac{3}{16}$	$\frac{3}{8}$	$\frac{1}{8}$	$\frac{1}{8}$	95H-1	95H-1	1"	2"	$\frac{5}{32}$
SAL15-22	$\frac{3}{16}$	$\frac{3}{8}$	$\frac{1}{4}$	$\frac{1}{4}$	95H-2	95H-2	$1\frac{1}{32}$	$2\frac{3}{8}$	$\frac{3}{8}$
SAL2-11	$\frac{1}{4}$	$\frac{1}{2}$	$\frac{1}{8}$	$\frac{1}{8}$	99H-1	99H-1	$\frac{3}{32}$	$1\frac{1}{16}$	$\frac{5}{32}$
SAL2-22	$\frac{1}{4}$	$\frac{1}{2}$	$\frac{1}{4}$	$\frac{1}{4}$	99H-2	99H-2	$1\frac{3}{16}$	$2\frac{3}{8}$	$\frac{3}{8}$
SAL2-33	$\frac{1}{4}$	$\frac{1}{2}$	$\frac{3}{8}$	$\frac{3}{8}$	99H-3	99H-3	$1\frac{3}{16}$	$2\frac{3}{8}$	$1\frac{1}{32}$
SAL2-44	$\frac{1}{4}$	$\frac{1}{2}$	$\frac{1}{2}$	$\frac{1}{2}$	99H-4	99H-4	$1\frac{1}{32}$	$2\frac{1}{16}$	$1\frac{1}{32}$
SAL25-22	$\frac{3}{8}$	$\frac{3}{4}$	$\frac{1}{4}$	$\frac{1}{4}$	106H-2	106H-2	$1\frac{3}{16}$	$2\frac{3}{8}$	$\frac{3}{8}$
SAL25-33	$\frac{3}{8}$	$\frac{3}{4}$	$\frac{3}{8}$	$\frac{3}{8}$	106H-3	106H-3	$1\frac{3}{16}$	$2\frac{3}{8}$	$1\frac{1}{32}$
SAL25-44	$\frac{3}{8}$	$\frac{3}{4}$	$\frac{1}{2}$	$\frac{1}{2}$	106H-4	106H-4	$1\frac{1}{32}$	$2\frac{1}{16}$	$1\frac{1}{32}$
SAL3-22	$\frac{3}{8}$	$\frac{3}{4}$	$\frac{1}{4}$	$\frac{1}{4}$	112H-2	112H-2	$1\frac{3}{16}$	$2\frac{3}{8}$	$\frac{3}{8}$
SAL3-33	$\frac{3}{8}$	$\frac{3}{4}$	$\frac{3}{8}$	$\frac{3}{8}$	112H-3	112H-3	$1\frac{3}{16}$	$2\frac{3}{8}$	$1\frac{1}{32}$

*Hand Engagement Plus One Full Thread


RE-USABLE HOSE ASSEMBLIES

Assemblies Shown and Listed, Made Up and Shipped Within 24 Hours

LENZ
HOSE
FITTINGS

INDUSTRIAL
LOW PRESSURE
HOSE ASSEMBLIES
1 & 2 RAYON BRAID
RUBBER COVER HOSE

MALE PIPE END TO UNION MALE END ASSEMBLIES

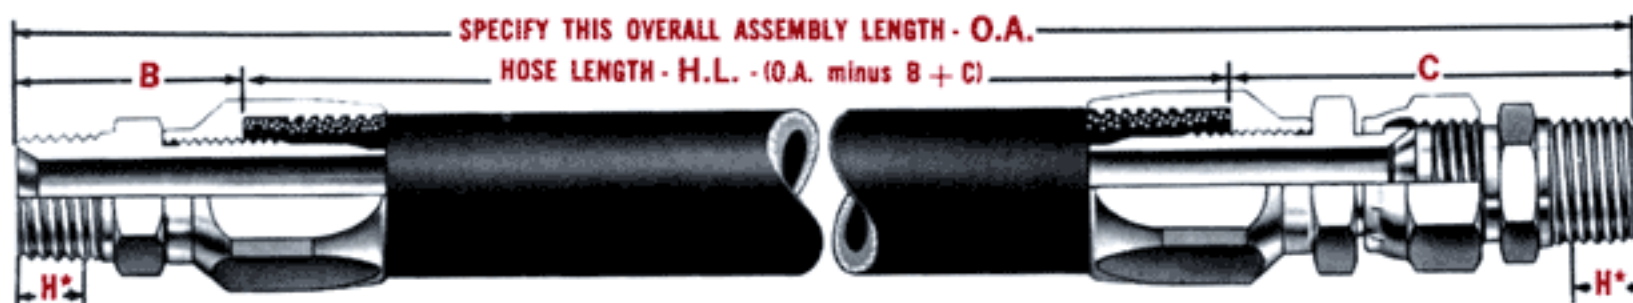

SHOWN ABOVE - BL ASSEMBLIES 1/2" I.D. HOSE SIZE and LARGER (STEEL FITTINGS)

TYPE 2BSR • TWO RAYON BRAID HOSE ASSEMBLIES

ASS'Y. NO.	HOSE I.D.	HOSE O.D.	MALE NPT	UNION MALE NPT	MALE HOSE FITTING	UNION MALE HOSE FITTING	MALE FITTING ALLOW. B	UNION MALE FITTING ALLOW. C	TOTAL FITTING ALLOW. B + C	H*
BL2-11	1/4	3/8	1/8	1/8	98H-1	98HUM-1	3/32	1 3/4	2 3/32	3/32
BL2-22	1/4	3/8	1/4	1/4	98H-2	98HUM-2	1 3/8	1 3/32	3 3/32	3/8
BL2-33	1/4	3/8	3/8	3/8	98H-3	98HUM-3	1 3/8	1 3/8	3 3/8	1 3/32
BL2-44	1/4	3/8	1/2	1/2	98H-4	98HUM-4	1 3/32	2 3/32	3 1/4	1 3/32
BL3-22	3/8	3/4	1/4	1/4	115H-2	115HUM-2	1 3/8	2 3/8	3 3/8	3/8
BL3-33	3/8	3/4	3/8	3/8	115H-3	115HUM-3	1 3/4	2 1/4	3 3/4	1 3/32
BL4-33†	1/2	1 1/8	3/8	3/8	206H-3	206HUM-3	1 1/32	2 1/32	4 1/8	1 3/32
BL4-44†	1/2	1 1/8	1/2	1/2	206H-4	206HUM-4	1 1/8	2 3/32	4 1/32	1 3/32
BL6-44†	3/4	1 1/4	1/2	1/2	217H-4	217HUM-4	1 3/32	3 1/4	5 3/32	1 3/32
BL6-66†	3/4	1 1/4	3/4	3/4	217H-6	217HUM-6	1 3/8	3 3/32	5 3/32	3/8
BL8-66†	1"	1 1/2	3/4	3/4	226H-6	226HUM-6	1 3/8	3 3/8	5 1/2	3/8
BL8-88†	1"	1 1/2	1"	1"	226H-8	226HUM-8	2 3/8	3 3/4	5 3/8	2 3/32
BL12-1010†	1 1/2	2 3/32	1 1/4	1 1/4	245H-10	245HUM-10	2 3/32	4 1/32	6 3/4	1 1/8
BL12-1212†	1 1/2	2 3/32	1 1/2	1 1/2	245H-12	245HUM-12	2 3/8	4 1/32	6 3/32	1 1/8

†Steel Fittings

*Hand Engagement Plus One Full Thread

TYPE 1BSR • ONE RAYON BRAID HOSE ASSEMBLIES

ASS'Y. NO.	HOSE I.D.	HOSE O.D.	MALE NPT	UNION MALE NPT	MALE HOSE FITTING	UNION MALE HOSE FITTING	MALE FITTING ALLOW. B	UNION MALE FITTING ALLOW. C	TOTAL FITTING ALLOW. B + C	H*
SBL15-11	3/16	7/16	1/8	1/8	95H-1	95HUM-1	1"	1 3/4	2 3/4	9/32
SBL15-22	3/16	7/16	1/4	1/4	95H-2	95HUM-2	1 1/32	1 29/32	3 1/8	3/8
SBL2-11	1/4	1/2	1/8	1/8	99H-1	99HUM-1	3/32	1 3/4	2 23/32	9/32
SBL2-22	1/4	1/2	1/4	1/4	99H-2	99HUM-2	1 3/16	1 29/32	3 3/32	3/8
SBL2-33	1/4	1/2	3/8	3/8	99H-3	99HUM-3	1 3/16	1 15/16	3 1/8	13/32
SBL2-44	1/4	1/2	1/2	1/2	99H-4	99HUM-4	1 13/32	2 9/32	3 11/16	17/32
SBL25-22	5/16	9/16	1/4	1/4	106H-2	106HUM-2	1 3/16	1 29/32	3 3/32	3/8
SBL25-33	5/16	9/16	3/8	3/8	106H-3	106HUM-3	1 3/16	1 15/16	3 1/8	13/32
SBL25-44	5/16	9/16	1/2	1/2	106H-4	106HUM-4	1 13/32	2 9/32	3 11/16	17/32
SBL3-22	3/8	5/8	1/4	1/4	112H-2	112HUM-2	1 3/16	2 3/16	3 3/8	3/8
SBL3-33	3/8	5/8	3/8	3/8	112H-3	112HUM-3	1 3/16	2 1/4	3 7/16	13/32

*Hand Engagement Plus One Full Thread

LENZ • P.O. BOX 1044 • DAYTON, OHIO 45401-1044 • PHONE: 937/277-9364 • FAX: 937/277-6516

OFFICE & FACTORY • 3301 KLEPINGER ROAD • DAYTON, OHIO 45406-1842

INTERNET: <http://www.lenzinc.com>

LENZ 1 AND 2 RAYON BRAID

Most Popular Size Assemblies from Stocked Hose Fittings

MALE PIPE END TO UNION FEMALE END ASSEMBLIES



SHOWN ABOVE - CL and SCL ASSEMBLIES THROUGH $\frac{3}{8}$ " I.D. HOSE SIZE (BRASS FITTINGS)



SHOWN ABOVE - CL ASSEMBLIES $\frac{1}{2}$ " I.D. HOSE SIZE and LARGER (STEEL FITTINGS)

TYPE 2BSR • TWO RAYON BRAID HOSE ASSEMBLIES

ASS'Y. NO.	HOSE I.D.	HOSE O.D.	MALE NPT	UNION FEMALE NPT	MALE HOSE FITTING	UNION FEMALE HOSE FITTING	MALE FITTING ALLOW. B	UNION FEMALE FITTING ALLOW. D	TOTAL FITTING ALLOW. B + D	H*
CL2-11	$\frac{1}{4}$	$\frac{3}{8}$	$\frac{1}{8}$	$\frac{1}{8}$	98H-1	98HUF-1	$\frac{3}{32}$	$1\frac{1}{8}$	$2\frac{1}{8}$	$\frac{3}{32}$
CL2-22	$\frac{1}{4}$	$\frac{3}{8}$	$\frac{1}{4}$	$\frac{1}{4}$	98H-2	98HUF-2	$1\frac{1}{8}$	$1\frac{1}{8}$	$3\frac{1}{8}$	$\frac{3}{8}$
CL2-33	$\frac{1}{4}$	$\frac{3}{8}$	$\frac{3}{8}$	$\frac{3}{8}$	98H-3	98HUF-3	$1\frac{1}{8}$	$1\frac{1}{8}$	$3\frac{1}{8}$	$1\frac{1}{32}$
CL3-22	$\frac{3}{8}$	$\frac{3}{4}$	$\frac{1}{4}$	$\frac{1}{4}$	115H-2	115HUF-2	$1\frac{1}{8}$	$2\frac{1}{8}$	$3\frac{3}{8}$	$\frac{3}{8}$
CL3-33	$\frac{3}{8}$	$\frac{3}{4}$	$\frac{3}{8}$	$\frac{3}{8}$	115H-3	115HUF-3	$1\frac{1}{8}$	$2\frac{1}{8}$	$3\frac{3}{8}$	$1\frac{1}{32}$
CL4-33†	$\frac{1}{2}$	$1\frac{1}{8}$	$\frac{3}{8}$	$\frac{3}{8}$	206H-3	206HUF-3	$1\frac{1}{32}$	$2\frac{1}{8}$	$4\frac{1}{32}$	$1\frac{1}{32}$
CL4-44†	$\frac{1}{2}$	$1\frac{1}{8}$	$\frac{1}{2}$	$\frac{1}{2}$	206H-4	206HUF-4	$1\frac{1}{8}$	$2\frac{29}{32}$	$4\frac{1}{32}$	$1\frac{1}{32}$
CL6-44†	$\frac{3}{4}$	$1\frac{1}{4}$	$\frac{1}{2}$	$\frac{1}{2}$	217H-4	217HUF-4	$1\frac{23}{32}$	$3\frac{1}{4}$	$5\frac{1}{32}$	$1\frac{1}{32}$
CL6-66†	$\frac{3}{4}$	$1\frac{1}{4}$	$\frac{3}{4}$	$\frac{3}{4}$	217H-6	217HUF-6	$1\frac{1}{8}$	$3\frac{3}{8}$	$5\frac{1}{8}$	$\frac{1}{8}$
CL8-66†	1"	$1\frac{1}{2}$	$\frac{3}{4}$	$\frac{3}{4}$	226H-6	226HUF-6	$1\frac{1}{8}$	$3\frac{3}{8}$	$5\frac{1}{8}$	$\frac{1}{8}$
CL8-88†	1"	$1\frac{1}{2}$	1"	1"	226H-8	226HUF-8	$2\frac{1}{8}$	$3\frac{29}{32}$	$5\frac{29}{32}$	$1\frac{1}{32}$
CL12-1212†	$1\frac{1}{2}$	$2\frac{1}{2}$	$1\frac{1}{2}$	$1\frac{1}{2}$	245H-12	245HUF-12	$2\frac{1}{8}$	$4\frac{1}{8}$	$6\frac{1}{4}$	$1\frac{1}{8}$

†Steel Fittings

*Hand Engagement Plus One Full Thread

TYPE 1BSR • ONE RAYON BRAID HOSE ASSEMBLIES

ASS'Y. NO.	HOSE I.D.	HOSE O.D.	MALE NPT	UNION FEMALE NPT	MALE HOSE FITTING	UNION FEMALE HOSE FITTING	MALE FITTING ALLOW. B	UNION FEMALE FITTING ALLOW. D	TOTAL FITTING ALLOW. B + D	H*
SCL15-11	$\frac{3}{16}$	$\frac{3}{8}$	$\frac{1}{8}$	$\frac{1}{8}$	95H-1	95HUF-1	1"	$1\frac{1}{8}$	$2\frac{1}{8}$	$\frac{3}{32}$
SCL15-22	$\frac{3}{16}$	$\frac{3}{8}$	$\frac{1}{4}$	$\frac{1}{4}$	95H-2	95HUF-2	$1\frac{1}{32}$	$1\frac{1}{8}$	$3\frac{1}{32}$	$\frac{3}{8}$
SCL2-11	$\frac{1}{4}$	$\frac{1}{2}$	$\frac{1}{8}$	$\frac{1}{8}$	99H-1	99HUF-1	$\frac{3}{32}$	$1\frac{1}{8}$	$2\frac{1}{32}$	$\frac{3}{32}$
SCL2-22	$\frac{1}{4}$	$\frac{1}{2}$	$\frac{1}{4}$	$\frac{1}{4}$	99H-2	99HUF-2	$1\frac{1}{8}$	$1\frac{1}{8}$	$3\frac{1}{8}$	$\frac{3}{8}$
SCL2-33	$\frac{1}{4}$	$\frac{1}{2}$	$\frac{3}{8}$	$\frac{3}{8}$	99H-3	99HUF-3	$1\frac{1}{8}$	$1\frac{1}{8}$	$3\frac{1}{8}$	$1\frac{1}{32}$
SCL25-22	$\frac{3}{8}$	$\frac{3}{4}$	$\frac{1}{4}$	$\frac{1}{4}$	106H-2	106HUF-2	$1\frac{1}{8}$	$1\frac{1}{8}$	$3\frac{1}{8}$	$\frac{3}{8}$
SCL25-33	$\frac{3}{8}$	$\frac{3}{4}$	$\frac{3}{8}$	$\frac{3}{8}$	106H-3	106HUF-3	$1\frac{1}{8}$	$1\frac{1}{8}$	$3\frac{1}{8}$	$1\frac{1}{32}$
SCL3-22	$\frac{3}{8}$	$\frac{3}{4}$	$\frac{1}{4}$	$\frac{1}{4}$	112H-2	112HUF-2	$1\frac{1}{8}$	$2\frac{1}{8}$	$3\frac{3}{8}$	$\frac{3}{8}$
SCL3-33	$\frac{3}{8}$	$\frac{3}{4}$	$\frac{3}{8}$	$\frac{3}{8}$	112H-3	112HUF-3	$1\frac{1}{8}$	$2\frac{1}{8}$	$3\frac{3}{8}$	$1\frac{1}{32}$

*Hand Engagement Plus One Full Thread


RE-USABLE HOSE ASSEMBLIES

Assemblies Shown and Listed, Made Up and Shipped Within 24 Hours

LENZ
HOSE
FITTINGS

INDUSTRIAL
LOW PRESSURE
HOSE ASSEMBLIES
1 & 2 RAYON BRAID
RUBBER COVER HOSE

UNION MALE END TO UNION MALE END ASSEMBLIES

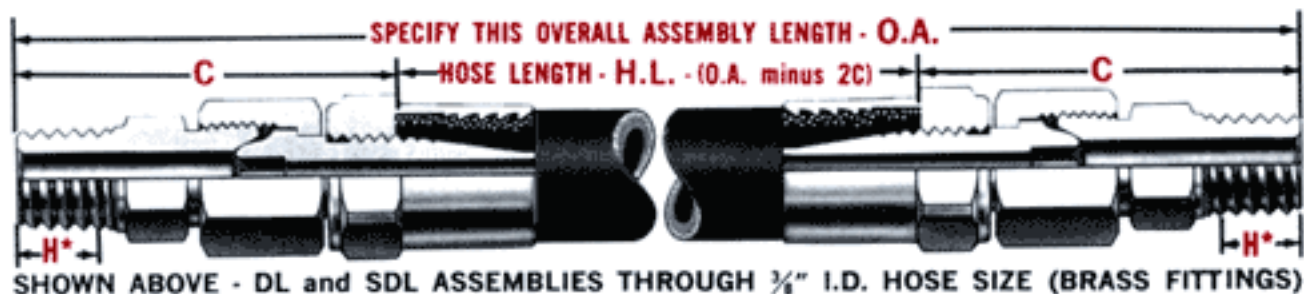

TYPE 2BSR • TWO RAYON BRAID HOSE ASSEMBLIES

ASS'Y. NO.	HOSE I.D.	HOSE O.D.	UNION MALE NPT	UNION MALE NPT	UNION MALE HOSE FITTING	UNION MALE HOSE FITTING	UNION MALE FITTING ALLOW. C	TOTAL FITTING ALLOW. 2C	H*
DL2-11	1/4	3/8	1/8	1/8	98HUM-1	98HUM-1	1 3/4	3 1/2	3/32
DL2-22	1/4	3/8	1/4	1/4	98HUM-2	98HUM-2	1 3/8	3 1/8	3/8
DL2-33	1/4	3/8	3/8	3/8	98HUM-3	98HUM-3	1 3/4	3 3/8	13/32
DL2-44	1/4	3/8	1/2	1/2	98HUM-4	98HUM-4	2 3/8	4 3/8	17/32
DL3-11	3/8	3/4	1/8	1/8	115HUM-1	115HUM-1	2 3/8	4 3/8	3/32
DL3-22	3/8	3/4	1/4	1/4	115HUM-2	115HUM-2	2 3/8	4 3/8	3/8
DL3-33	3/8	3/4	3/8	3/8	115HUM-3	115HUM-3	2 1/4	4 1/2	13/32
DL3-44	3/8	3/4	1/2	1/2	115HUM-4	115HUM-4	2 1/8	5 3/8	17/32
DL4-22†	1/2	1 3/8	1/4	1/4	206HUM-2	206HUM-2	2 1/8	5 3/8	3/8
DL4-33†	1/2	1 3/8	3/8	3/8	206HUM-3	206HUM-3	2 1/8	5 3/8	13/32
DL4-44†	1/2	1 3/8	1/2	1/2	206HUM-4	206HUM-4	2 3/8	5 1/8	17/32
DL4-66†	1/2	1 3/8	3/4	3/4	206HUM-6	206HUM-6	2 3/8	5 1/8	3/4
DL6-44†	3/4	1 1/4	1/2	1/2	217HUM-4	217HUM-4	3 1/4	6 1/2	17/32
DL6-66†	3/4	1 1/4	3/4	3/4	217HUM-6	217HUM-6	3 3/8	6 3/8	3/8
DL8-66†	1"	1 1/2	3/4	3/4	226HUM-6	226HUM-6	3 3/8	7 1/8	3/8
DL8-88†	1"	1 1/2	1"	1"	226HUM-8	226HUM-8	3 3/4	7 1/2	21/32
DL12-1010†	1 1/2	2 3/8	1 1/4	1 1/4	245HUM-10	245HUM-10	4 1/8	8 1/8	13/16
DL12-1212†	1 1/2	2 3/8	1 1/2	1 1/2	245HUM-12	245HUM-12	4 1/8	8 1/8	13/16

†Steel Fittings

*Hand Engagement Plus One Full Thread

TYPE 1BSR • ONE RAYON BRAID HOSE ASSEMBLIES

ASS'Y. NO.	HOSE I.D.	HOSE O.D.	UNION MALE NPT	UNION MALE NPT	UNION MALE HOSE FITTING	UNION MALE HOSE FITTING	UNION MALE FITTING ALLOW. C	TOTAL FITTING ALLOW. 2C	H*
SDL15-11	3/8	3/8	1/8	1/8	95HUM-1	95HUM-1	1 3/4	3 1/2	3/32
SDL15-22	3/8	3/8	1/4	1/4	95HUM-2	95HUM-2	1 3/8	3 1/8	3/8
SDL15-33	3/8	3/8	3/8	3/8	95HUM-3	95HUM-3	1 3/4	3 3/8	13/32
SDL15-44	3/8	3/8	1/2	1/2	95HUM-4	95HUM-4	2 3/8	4 3/8	17/32
SDL2-11	1/4	1/2	1/8	1/8	99HUM-1	99HUM-1	1 3/4	3 1/2	3/32
SDL2-22	1/4	1/2	1/4	1/4	99HUM-2	99HUM-2	1 3/8	3 1/8	3/8
SDL2-33	1/4	1/2	3/8	3/8	99HUM-3	99HUM-3	1 3/4	3 3/8	13/32
SDL2-44	1/4	1/2	1/2	1/2	99HUM-4	99HUM-4	2 3/8	4 3/8	17/32
SDL25-11	3/8	3/8	1/8	1/8	106HUM-1	106HUM-1	1 3/4	3 1/2	3/32
SDL25-22	3/8	3/8	1/4	1/4	106HUM-2	106HUM-2	1 3/8	3 1/8	3/8
SDL25-33	3/8	3/8	3/8	3/8	106HUM-3	106HUM-3	1 3/4	3 3/8	13/32
SDL25-44	3/8	3/8	1/2	1/2	106HUM-4	106HUM-4	2 3/8	4 3/8	17/32
SDL3-11	3/8	3/8	1/8	1/8	112HUM-1	112HUM-1	2 3/8	4 3/8	3/32
SDL3-22	3/8	3/8	1/4	1/4	112HUM-2	112HUM-2	2 3/8	4 3/8	3/8
SDL3-33	3/8	3/8	3/8	3/8	112HUM-3	112HUM-3	2 1/4	4 1/2	13/32
SDL3-44	3/8	3/8	1/2	1/2	112HUM-4	112HUM-4	2 3/8	5 3/8	17/32

*Hand Engagement Plus One Full Thread

LENZ • P.O. BOX 1044 • DAYTON, OHIO 45401-1044 • PHONE: 937/277-9364 • FAX: 937/277-6516

OFFICE & FACTORY • 3301 KLEPINGER ROAD • DAYTON, OHIO 45406-1842

INTERNET: <http://www.lenzinc.com>

LENZ 1 AND 2 RAYON BRAID

Most Popular Size Assemblies from Stocked Hose Fittings

UNION FEMALE END TO UNION FEMALE END ASSEMBLIES



TYPE 2BSR • TWO RAYON BRAID HOSE ASSEMBLIES

ASS'Y. NO.	HOSE I.D.	HOSE O.D.	UNION FEMALE NPT	UNION FEMALE NPT	UNION FEMALE HOSE FITTING	UNION FEMALE HOSE FITTING	UNION FEMALE FITTING ALLOW. D	TOTAL FITTING ALLOW. 2D	H*
EL2-11	1/4	3/8	1/8	1/8	98HUF-1	98HUF-1	1 1/8	3 1/4	3/32
EL2-22	1/4	3/8	1/4	1/4	98HUF-2	98HUF-2	1 1/8	3 3/4	3/8
EL2-33	1/4	3/8	3/8	3/8	98HUF-3	98HUF-3	1 1/8	3 3/4	13/32
EL3-11	3/8	3/4	1/8	1/8	115HUF-1	115HUF-1	1 1/8	3 3/8	3/32
EL3-22	3/8	3/4	1/4	1/4	115HUF-2	115HUF-2	2 3/8	4 3/8	3/8
EL3-33	3/8	3/4	3/8	3/8	115HUF-3	115HUF-3	2 3/8	4 3/8	13/32
EL4-22†	1/2	1 1/8	1/4	1/4	206HUF-2	206HUF-2	2 1/8	5 3/8	3/8
EL4-33†	1/2	1 1/8	3/8	3/8	206HUF-3	206HUF-3	2 1/8	5 3/8	13/32
EL4-44†	1/2	1 1/8	1/2	1/2	206HUF-4	206HUF-4	2 29/32	5 13/16	13/32
EL6-44†	3/4	1 1/4	1/2	1/2	217HUF-4	217HUF-4	3 1/4	6 1/2	13/32
EL6-66†	3/4	1 1/4	3/4	3/4	217HUF-6	217HUF-6	3 3/8	6 3/8	3/4
EL8-66†	1"	1 1/2	3/4	3/4	226HUF-6	226HUF-6	3 3/8	6 3/4	3/4
EL8-88†	1"	1 1/2	1"	1"	226HUF-8	226HUF-8	3 29/32	7 3/8	29/32
EL12-1212†	1 1/2	2 1/2	1 1/2	1 1/2	245HUF-12	245HUF-12	4 3/8	8 3/8	13/16

†Steel Fittings

*Hand Engagement Plus One Full Thread

TYPE 1BSR • ONE RAYON BRAID HOSE ASSEMBLIES

ASS'Y. NO.	HOSE I.D.	HOSE O.D.	UNION FEMALE NPT	UNION FEMALE NPT	UNION FEMALE HOSE FITTING	UNION FEMALE HOSE FITTING	UNION FEMALE FITTING ALLOW. D	TOTAL FITTING ALLOW. 2D	H*
SEL15-11	3/8	3/8	1/8	1/8	95HUF-1	95HUF-1	1 1/8	3 1/4	3/32
SEL15-22	3/8	3/8	1/4	1/4	95HUF-2	95HUF-2	1 1/8	3 3/4	3/8
SEL15-33	3/8	3/8	3/8	3/8	95HUF-3	95HUF-3	1 1/8	3 3/4	13/32
SEL2-11	1/4	1/2	1/8	1/8	99HUF-1	99HUF-1	1 1/8	3 1/4	3/32
SEL2-22	1/4	1/2	1/4	1/4	99HUF-2	99HUF-2	1 1/8	3 3/4	3/8
SEL2-33	1/4	1/2	3/8	3/8	99HUF-3	99HUF-3	1 1/8	3 3/4	13/32
SEL25-11	3/8	3/8	1/8	1/8	106HUF-1	106HUF-1	1 1/8	3 3/4	3/32
SEL25-22	3/8	3/8	1/4	1/4	106HUF-2	106HUF-2	1 1/8	3 3/4	3/8
SEL25-33	3/8	3/8	3/8	3/8	106HUF-3	106HUF-3	1 1/8	3 3/4	13/32
SEL3-11	3/8	3/8	1/8	1/8	112HUF-1	112HUF-1	1 1/8	3 3/8	3/32
SEL3-22	3/8	3/8	1/4	1/4	112HUF-2	112HUF-2	2 3/8	4 3/8	3/8
SEL3-33	3/8	3/8	3/8	3/8	112HUF-3	112HUF-3	2 3/8	4 3/8	13/32

*Hand Engagement Plus One Full Thread

LENZ • P.O. BOX 1044 • DAYTON, OHIO 45401-1044 • PHONE: 937/277-9364 • FAX: 937/277-6516

OFFICE & FACTORY • 3301 KLEPINGER ROAD • DAYTON, OHIO 45406-1842

INTERNET: <http://www.lenzinc.com>

RE-USABLE HOSE ASSEMBLIES

Assemblies Shown and Listed, Made Up and Shipped Within 24 Hours

LENZ
HOSE
FITTINGS

INDUSTRIAL
LOW PRESSURE
HOSE ASSEMBLIES
1 & 2 RAYON BRAID
RUBBER COVER HOSE

UNION MALE END TO UNION FEMALE END ASSEMBLIES



TYPE 2BSR • TWO RAYON BRAID HOSE ASSEMBLIES

ASS'Y. NO.	HOSE I.D.	HOSE O.D.	UNION MALE NPT	UNION FEMALE NPT	UNION MALE HOSE FITTING	UNION FEMALE HOSE FITTING	UNION MALE FT'G ALLOW. C	UNION FEMALE FT'G ALLOW. D	TOTAL FT'G ALLOW. C + D	H*
FL2-11	$\frac{1}{4}$	$\frac{3}{16}$	$\frac{1}{8}$	$\frac{1}{8}$	98HUM-1	98HUF-1	$1\frac{1}{4}$	$1\frac{1}{8}$	$3\frac{3}{8}$	$\frac{9}{32}$
FL2-22	$\frac{1}{4}$	$\frac{3}{16}$	$\frac{1}{4}$	$\frac{1}{4}$	98HUM-2	98HUF-2	$1\frac{29}{32}$	$1\frac{7}{8}$	$3\frac{25}{32}$	$\frac{3}{8}$
FL2-33	$\frac{1}{4}$	$\frac{3}{16}$	$\frac{3}{8}$	$\frac{3}{8}$	98HUM-3	98HUF-3	$1\frac{15}{16}$	$1\frac{7}{8}$	$3\frac{13}{16}$	$\frac{13}{32}$
FL3-11	$\frac{3}{8}$	$\frac{3}{4}$	$\frac{1}{8}$	$\frac{1}{8}$	115HUM-1	115HUF-1	$2\frac{1}{32}$	$1\frac{15}{16}$	$3\frac{31}{32}$	$\frac{9}{32}$
FL3-22	$\frac{3}{8}$	$\frac{3}{4}$	$\frac{1}{4}$	$\frac{1}{4}$	115HUM-2	115HUF-2	$2\frac{3}{16}$	$2\frac{3}{16}$	$4\frac{3}{8}$	$\frac{3}{8}$
FL3-33	$\frac{3}{8}$	$\frac{3}{4}$	$\frac{3}{8}$	$\frac{3}{8}$	115HUM-3	115HUF-3	$2\frac{1}{4}$	$2\frac{3}{16}$	$4\frac{7}{16}$	$\frac{13}{32}$
FL4-22†	$\frac{1}{2}$	$1\frac{1}{16}$	$\frac{1}{4}$	$\frac{1}{4}$	206HUM-2	206HUF-2	$2\frac{19}{32}$	$2\frac{11}{16}$	$5\frac{9}{32}$	$\frac{3}{8}$
FL4-33†	$\frac{1}{2}$	$1\frac{1}{16}$	$\frac{3}{8}$	$\frac{3}{8}$	206HUM-3	206HUF-3	$2\frac{19}{32}$	$2\frac{11}{16}$	$5\frac{9}{32}$	$\frac{13}{32}$
FL4-44†	$\frac{1}{2}$	$1\frac{1}{16}$	$\frac{1}{2}$	$\frac{1}{2}$	206HUM-4	206HUF-4	$2\frac{27}{32}$	$2\frac{29}{32}$	$5\frac{3}{4}$	$\frac{17}{32}$
FL6-44†	$\frac{3}{4}$	$1\frac{1}{4}$	$\frac{1}{2}$	$\frac{1}{2}$	217HUM-4	217HUF-4	$3\frac{1}{4}$	$3\frac{1}{4}$	$6\frac{1}{2}$	$\frac{17}{32}$
FL6-66†	$\frac{3}{4}$	$1\frac{1}{4}$	$\frac{3}{4}$	$\frac{3}{4}$	217HUM-6	217HUF-6	$3\frac{9}{32}$	$3\frac{5}{16}$	$6\frac{19}{32}$	$\frac{9}{16}$
FL8-66†	1"	$1\frac{1}{2}$	$\frac{3}{4}$	$\frac{3}{4}$	226HUM-6	226HUF-6	$3\frac{9}{16}$	$3\frac{3}{8}$	$6\frac{15}{16}$	$\frac{9}{16}$
FL8-88†	1"	$1\frac{1}{2}$	1"	1"	226HUM-8	226HUF-8	$3\frac{3}{4}$	$3\frac{25}{32}$	$7\frac{17}{32}$	$\frac{21}{32}$
FL12-1212†	$1\frac{1}{2}$	$2\frac{1}{32}$	$1\frac{1}{2}$	$1\frac{1}{2}$	245HUM-12	245HUF-12	$4\frac{11}{32}$	$4\frac{5}{16}$	$8\frac{21}{32}$	$\frac{11}{16}$

†Steel Fittings

*Hand Engagement Plus One Full Thread

TYPE 1BSR • ONE RAYON BRAID HOSE ASSEMBLIES

ASS'Y. NO.	HOSE I.D.	HOSE O.D.	UNION MALE NPT	UNION FEMALE NPT	UNION MALE HOSE FITTING	UNION FEMALE HOSE FITTING	UNION MALE FT'G ALLOW. C	UNION FEMALE FT'G ALLOW. D	TOTAL FT'G ALLOW. C + D	H*
SFL15-11	$\frac{3}{8}$	$\frac{3}{4}$	$\frac{1}{8}$	$\frac{1}{8}$	95HUM-1	95HUF-1	$1\frac{3}{4}$	$1\frac{1}{8}$	$3\frac{1}{8}$	$\frac{5}{32}$
SFL15-22	$\frac{3}{8}$	$\frac{3}{4}$	$\frac{1}{4}$	$\frac{1}{4}$	95HUM-2	95HUF-2	$1\frac{29}{32}$	$1\frac{7}{8}$	$3\frac{25}{32}$	$\frac{3}{8}$
SFL15-33	$\frac{3}{8}$	$\frac{3}{4}$	$\frac{3}{8}$	$\frac{3}{8}$	95HUM-3	95HUF-3	$1\frac{15}{16}$	$1\frac{7}{8}$	$3\frac{13}{16}$	$\frac{13}{32}$
SFL2-11	$\frac{1}{4}$	$\frac{1}{2}$	$\frac{1}{8}$	$\frac{1}{8}$	99HUM-1	99HUF-1	$1\frac{3}{4}$	$1\frac{1}{8}$	$3\frac{1}{8}$	$\frac{5}{32}$
SFL2-22	$\frac{1}{4}$	$\frac{1}{2}$	$\frac{1}{4}$	$\frac{1}{4}$	99HUM-2	99HUF-2	$1\frac{29}{32}$	$1\frac{7}{8}$	$3\frac{25}{32}$	$\frac{3}{8}$
SFL2-33	$\frac{1}{4}$	$\frac{1}{2}$	$\frac{3}{8}$	$\frac{3}{8}$	99HUM-3	99HUF-3	$1\frac{15}{16}$	$1\frac{7}{8}$	$3\frac{13}{16}$	$\frac{13}{32}$
SFL25-11	$\frac{3}{8}$	$\frac{3}{4}$	$\frac{1}{8}$	$\frac{1}{8}$	106HUM-1	106HUF-1	$1\frac{3}{4}$	$1\frac{1}{8}$	$3\frac{1}{8}$	$\frac{5}{32}$
SFL25-22	$\frac{3}{8}$	$\frac{3}{4}$	$\frac{1}{4}$	$\frac{1}{4}$	106HUM-2	106HUF-2	$1\frac{29}{32}$	$1\frac{7}{8}$	$3\frac{25}{32}$	$\frac{3}{8}$
SFL25-33	$\frac{3}{8}$	$\frac{3}{4}$	$\frac{3}{8}$	$\frac{3}{8}$	106HUM-3	106HUF-3	$1\frac{15}{16}$	$1\frac{7}{8}$	$3\frac{13}{16}$	$\frac{13}{32}$
SFL3-11	$\frac{3}{8}$	$\frac{3}{8}$	$\frac{1}{8}$	$\frac{1}{8}$	112HUM-1	112HUF-1	$2\frac{1}{2}$	$1\frac{15}{16}$	$3\frac{31}{32}$	$\frac{9}{32}$
SFL3-22	$\frac{3}{8}$	$\frac{3}{8}$	$\frac{1}{4}$	$\frac{1}{4}$	112HUM-2	112HUF-2	$2\frac{3}{8}$	$2\frac{3}{8}$	$4\frac{3}{8}$	$\frac{3}{8}$
SFL3-33	$\frac{3}{8}$	$\frac{3}{8}$	$\frac{3}{8}$	$\frac{3}{8}$	112HUM-3	112HUF-3	$2\frac{1}{4}$	$2\frac{3}{8}$	$4\frac{1}{4}$	$\frac{13}{32}$


*Hand Engagement Plus One Full Thread

LENZ • P.O. BOX 1044 • DAYTON, OHIO 45401-1044 • PHONE: 937/277-9364 • FAX: 937/277-6516

OFFICE & FACTORY • 3301 KLEPINGER ROAD • DAYTON, OHIO 45406-1842

INTERNET: <http://www.lenzinc.com>

LENZ J.I.C. 37° S.A.E. 45° SWIVEL HOSE FITTINGS

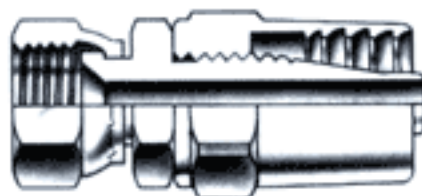


Materials Are All Brass
Except For Steel Swivel Nut.
Brass Nut Optional.
S.A.E. Swivel Nuts Are
Notched For Identification

HOSE I.D.	HOSE O.D.	CAT. NO. WITH 1/4-20 TH'D. JIC & SAE	CAT. NO. WITH 1/2-20 TH'D. JIC & SAE	CAT. NO. WITH 3/8-18 TH'D. JIC ONLY	CAT. NO. WITH 1/2-18 TH'D. SAE ONLY	CAT. NO. WITH 3/4-16 TH'D. JIC & SAE
3/8	3/8	90J-4	—	—	—	—
3/8	1/2	93J-4	—	—	—	—
3/8	15/32	95J-4	—	—	—	—
3/8	3/4	96J-4	—	—	—	—
1/4	15/32	97J-4	—	97J-6	97S-6	—
1/4	19/32	98J-4	—	98J-6	98S-6	—
1/4	1/2	99J-4	—	99J-6	99S-6	—
1/4	17/32	100J-4	—	100J-6	100S-6	—
1/4	3/8	101J-4	—	101J-6	101S-6	—
1/4	3/8	102J-4	—	102J-6	102S-6	—
1/4	23/32	103J-4	—	103J-6	103S-6	—
1/4	11/8	104J-4	—	104J-6	104S-6	—
1/4	3/4	105J-4	—	105J-6	105S-6	—
3/8	3/8	—	106J-5	—	—	—
3/8	3/8	—	107J-5	—	—	—
3/8	23/32	—	108J-5	—	—	—
3/8	11/8	—	109J-5	—	—	—
3/8	3/4	—	110J-5	—	—	—
3/8	3/8	—	—	112J-6	112S-6	—
3/8	23/32	—	—	113J-6	113S-6	—
3/8	11/8	—	—	114J-6	114S-6	—
3/8	3/4	—	—	115J-6	115S-6	—
1/2	3/4	—	—	—	—	135HU
1/2	3/8	—	—	—	—	136HU

RE-USABLE PAINT-SPRAY AIR HOSE FITTINGS (Brass)


FIT ALL STANDARD PAINT-SPRAY CONNECTIONS

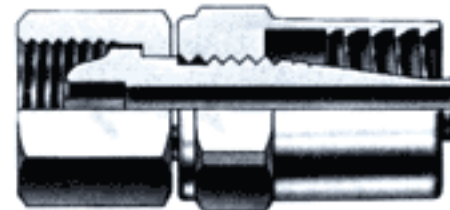

Reusable type that can be used over and over again. Accurately machined from brass bar stock. Easily and quickly attached to all standard hose connections without special tools. Stems without hex have Allen hex inside.

HOSE I.D.	HOSE O.D.	CAT. NO. with NO. 1 NUT (3/8" - 20NS)	CAT. NO. with NO. 2 NUT (1/2" - 18NF)	CAT. NO. with NO. 4 NUT (3/8" - 18NF)	CAT. NO. with NO. 5 NUT (1/2" - 18NPS)	CAT. NO. with NO. 8 NUT (3/8" - 18NPS)
3/8	3/8	90-P-1	90-P-2	90-P-4	—	90-P-8
3/8	1/2	93-P-1	93-P-2	93-P-4	—	93-P-8
3/8	15/32	95-P-1	95-P-2	95-P-4	—	95-P-8
3/8	3/4	96-P-1	96-P-2	96-P-4	—	96-P-8
1/4	15/32	97-P-1	97-P-2	97-P-4	97-P-5	97-P-8
1/4	19/32	98-P-1	98-P-2	98-P-4	98-P-5	98-P-8
1/4	1/2	99-P-1	99-P-2	99-P-4	99-P-5	99-P-8
1/4	17/32	100-P-1	100-P-2	100-P-4	100-P-5	100-P-8
1/4	3/8	101-P-1	101-P-2	101-P-4	101-P-5	101-P-8
1/4	3/8	102-P-1	102-P-2	102-P-4	102-P-5	102-P-8
1/4	23/32	103-P-1	103-P-2	103-P-4	103-P-5	103-P-8
1/4	11/8	104-P-1	104-P-2	104-P-4	104-P-5	104-P-8
1/4	3/4	105-P-1	105-P-2	105-P-4	105-P-5	105-P-8
3/8	3/8	106-P-1	106-P-2	106-P-4	106-P-5	106-P-8
3/8	3/8	107-P-1	107-P-2	107-P-4	107-P-5	107-P-8
3/8	23/32	108-P-1	108-P-2	108-P-4	108-P-5	108-P-8
3/8	11/8	109-P-1	109-P-2	109-P-4	109-P-5	109-P-8
3/8	3/4	110-P-1	110-P-2	110-P-4	110-P-5	110-P-8
3/8	3/8	112-P-1	112-P-2	112-P-4	112-P-5	112-P-8
3/8	23/32	113-P-1	113-P-2	113-P-4	113-P-5	113-P-8
3/8	11/8	114-P-1	114-P-2	114-P-4	114-P-5	114-P-8
3/8	3/4	115-P-1	115-P-2	115-P-4	115-P-5	115-P-8
1/2	3/4	135-P-1	135-P-2	135-P-4	135-P-5	—
1/2	3/8	136-P-1	136-P-2	136-P-4	136-P-5	—

LENZ PAINT SPRAY AIR HOSE CONNECTORS

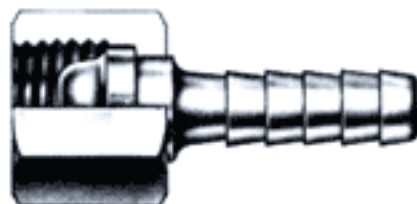

Lenz Paint-Spray Air Hose Connectors are stem type with swivel nut. They afford an inexpensive method of easily and quickly making connections on any standard paint spray hose. Accurately machined from brass bar stock.

Can Be Used With Brass Ferrules On Page 17

HOSE I.D.	CAT. NO. with NO. 1 NUT (3/8" - 20NS)	CAT. NO. with NO. 2 NUT (1/2" - 18NF)	CAT. NO. with NO. 4 NUT (3/8" - 18NF)	CAT. NO. with NO. 5 NUT (1/2" - 18NPS)	CAT. NO. with NO. 8 NUT (3/8" - 18NPS)	CAT. NO. with NO. 21 NUT (1/2" - 14NPS)	CAT. NO. with NO. 23 NUT (3/4" - 14NPS)
3/8	2WP-1	2WP-2	2WP-4	2WP-5	2WP-8	—	—
1/4	12WP-1	12WP-2	12WP-4	12WP-5	12WP-8	—	—
3/8	18WP-1	18WP-2	18WP-4	18WP-5	18WP-8	—	—
3/8	22WP-1	22WP-2	22WP-4	22WP-5	22WP-8	—	—
1/2	—	—	—	—	—	42WP-21	—
3/4	—	—	—	—	—	—	52WP-23

It is critical that the O.D. and I.D. of the hose and fitting correspond. EXAMPLE: 1/4" I.D. and 1/2" O.D. We use 99 Series fittings.

Attention:

None of the hose fittings manufactured and/or sold by THE LENZ COMPANY are to be used for life dependency applications such as in diving, for oxygen, air, or other breathing applications.

There are instances where the weight of long hose lines would be on the fitting with the possibility of the hose pulling out of the fitting. This could have disastrous results in a breathing application.

We specifically call your attention to the 90 through 136 Low Pressure Fittings shown in this Catalog LP 301, WDM, or revisions thereof. These fittings are intended for welding, low pressure hydraulics or pneumatics.

This non-use for life dependency applications such as in diving, for oxygen, air or other breathing applications applies to all of the hose fittings manufactured and/or sold by THE LENZ COMPANY and/or related companies. None of our fittings are designed for this type of use.

OXYGEN & ACETYLENE HOSE FITTINGS & CONNECTORS (Brass)

It is critical that the O.D. and I.D. of the hose and fitting correspond. EXAMPLE: 1/4" I.D. and 1/2" O.D. We use 99 Series fittings.

LENZ
HOSE
FITTINGS

OXYGEN & ACETYLENE
HOSE FITTINGS &
CONNECTORS
RE-USEABLE TYPE
BRASS



OXYGEN



ACETYLENE

Swivel CONNECTORS

Can Be Used With Brass Ferrules On Page 17

STEM & NUT	HOSE I.D.	TH'D. SIZE	STEM ONLY	NUT ONLY
2WR	3/8	3/8-18R.H.	2A	160D
2WL	3/8	3/8-18L.H.	2A	160E
2WSR	3/8	3/8-24R.H.	2AX	155D
2WSL	3/8	3/8-24L.H.	2AX	155E
12WR	1/4	3/8-18R.H.	12A	160D
12WL	1/4	3/8-18L.H.	12A	160E
18WR	3/8	3/8-18R.H.	18A	160D
18WL	3/8	3/8-18L.H.	18A	160E
22WR	3/8	3/8-18R.H.	22A	160D
22WL	3/8	3/8-18L.H.	22A	160E


Swivel FITTINGS




Oxygen - 90R Thru 110R



Acetylene - 90L Thru 110L

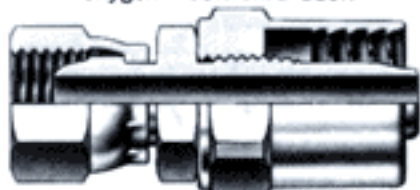

Oxygen - 111R Thru 136R

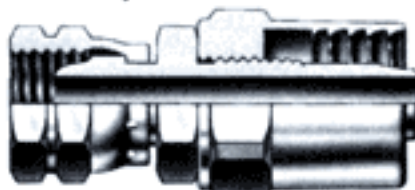

Acetylene - 111L Thru 136L

OXYGEN FITTING R.H. THREAD	ACETYLENE FITTING L.H. THREAD	THREAD SIZE	HOSE I.D.	HOSE O.D.
90R	90L	3/8-18	3/8	3/8
93R	93L	3/8-18	3/8	1/2
95R	95L	3/8-18	3/8	13/32
96R	96L	3/8-18	3/8	3/8
97R	97L	3/8-18	1/4	13/32
98R	98L	3/8-18	1/4	13/32
99R	99L	3/8-18	1/4	1/2
100R	100L	3/8-18	1/4	13/32
101R	101L	3/8-18	1/4	3/8
102R	102L	3/8-18	1/4	3/8
103R	103L	3/8-18	1/4	13/32
104R	104L	3/8-18	1/4	11/16
105R	105L	3/8-18	1/4	3/4
106R	106L	3/8-18	3/8	3/8
107R	107L	3/8-18	3/8	3/8
108R	108L	3/8-18	3/8	13/32
109R	109L	3/8-18	3/8	11/16
110R	110L	3/8-18	3/8	3/4
112R	112L	3/8-18	3/8	3/8
113R	113L	3/8-18	3/8	13/32
114R	114L	3/8-18	3/8	11/16
115R	115L	3/8-18	3/8	3/4
135R	135L	3/8-18	1/2	3/4
136R	136L	3/8-18	1/2	3/8



OXYGEN



ACETYLENE

Male FITTINGS

OXYGEN FITTING R.H. THREAD	ACETYLENE FITTING L.H. THREAD	THREAD SIZE	HOSE I.D.	HOSE O.D.
90WR	90WL	3/8-18	3/8	3/8
93WR	93WL	3/8-18	3/8	1/2
95WR	95WL	3/8-18	3/8	13/32
96WR	96WL	3/8-18	3/8	3/8
97WR	97WL	3/8-18	1/4	13/32
98WR	98WL	3/8-18	1/4	13/32
99WR	99WL	3/8-18	1/4	1/2
100WR	100WL	3/8-18	1/4	13/32
101WR	101WL	3/8-18	1/4	3/8
102WR	102WL	3/8-18	1/4	3/8
103WR	103WL	3/8-18	1/4	13/32
104WR	104WL	3/8-18	1/4	11/16
105WR	105WL	3/8-18	1/4	3/4

ADAPTERS



OXYGEN



ACETYLENE

Straight Thread Both Ends
Also See Page 14 For Other
Oxygen & Acetylene Adapters

PART NO.	THREAD SIZE	HEX SIZE
4ADR	3/8-18 R.H. to 3/8-18 R.H.	3/8
4ADL	3/8-18 L.H. to 3/8-18 L.H.	3/8

Male HOSE STEMS



OXYGEN



ACETYLENE

Can Be Used With Brass Ferrules On Page 17

OXYGEN STEM R.H. THREAD	ACETYLENE STEM L.H. THREAD	THREAD SIZE	HOSE I.D.
12MR	12ML	3/8-18	1/4

OXYGEN & ACETYLENE NUTS

OXYGEN



ACETYLENE



OXYGEN R.H. THREAD	ACETYLENE L.H. THREAD	THREAD SIZE
160D	160E	3/8-18
155D	155E	3/8-24

Attention:

None of the hose fittings manufactured and/or sold by THE LENZ COMPANY are to be used for life dependency applications such as in diving, for oxygen, air, or other breathing applications.

There are instances where the weight of long hose lines would be on the fitting with the possibility of the hose pulling out of the fitting. This could have disastrous results in a breathing application.

We specifically call your attention to the 90 through 136 Low Pressure Fittings shown in this Catalog LP 301, WDM, or revisions thereof. These fittings are intended for welding, low pressure hydraulics or pneumatics.

This non-use for life dependency applications such as in diving, for oxygen, air or other breathing applications applies to all of the hose fittings manufactured and/or sold by THE LENZ COMPANY and/or related companies. None of our fittings are designed for this type of use.

UNION STEMS & HOSE JOINERS MALE & FEMALE HOSE STEMS

LENZ UNION HOSE STEMS

It is critical that the O.D. and I.D. of the hose and fitting correspond. EXAMPLE: 1/4" I.D. and 1/2" O.D. We use 99 Series fittings.

BRASS
STEMS



Can Be
Used With
Brass
Ferrules
On Pg. 17

STEEL
STEMS



LENZ MALE UNION HOSE STEMS

PART NO.	MATERIAL	HOSE I.D.	PIPE THREAD
2UM	Brass	3/8	1/8
3UM	Brass	3/8	1/4
4UM	Brass	3/8	3/8
10UM	Brass	1/4	1/8
12UM	Brass	1/4	1/4
13UM	Brass	1/4	3/8
14UM	Brass	1/4	1/2
17UM	Brass	3/8	1/8
18UM	Brass	3/8	1/4
19UM	Brass	3/8	3/8
20UM	Brass	3/8	1/2
21UM	Brass	3/8	1/8
22UM	Brass	3/8	1/4
23UM	Brass	3/8	3/8
24UM	Brass	3/8	1/2
41UM	Steel	1/2	1/4
42UM	Steel	1/2	3/8
43UM	Steel	1/2	1/2
44UM	Steel	1/2	3/4
52UM	Steel	3/4	1/2
53UM	Steel	3/4	3/4
54UM	Steel	3/4	1"
62UM	Steel	1"	3/4
63UM	Steel	1"	1"

BRASS
STEMS



Can Be
Used With
Brass
Ferrules
On Pg. 17

STEEL
STEMS



LENZ FEMALE UNION HOSE STEMS

PART NO.	MATERIAL	HOSE I.D.	PIPE THREAD
2UF	Brass	3/8	1/8
3UF	Brass	3/8	1/4
4UF	Brass	3/8	3/8
10UF	Brass	1/4	1/8
12UF	Brass	1/4	1/4
13UF	Brass	1/4	3/8
17UF	Brass	3/8	1/8
18UF	Brass	3/8	1/4
19UF	Brass	3/8	3/8
21UF	Brass	3/8	1/8
22UF	Brass	3/8	1/4
23UF	Brass	3/8	3/8
41UF	Steel	1/2	1/4
42UF	Steel	1/2	3/8
43UF	Steel	1/2	1/2
52UF	Steel	3/4	1/2
53UF	Steel	3/4	3/4
62UF	Steel	1"	3/4
63UF	Steel	1"	1"


STANDARD BRASS MALE HOSE STEMS

Can Be
Used With
Brass
Ferrules
On Pg. 17



PART NO.	HOSE I.D.	PIPE TH'D.
1-1	1/8	1/8
2-1	3/8	1/8
2-2	3/8	1/4
12-1	1/4	1/8
12-2	1/4	1/4
12-3	1/4	3/8
18-1	3/8	1/8
18-2	3/8	1/4
22-1	3/8	1/8
22-2	3/8	1/4
22-3	3/8	3/8
22-4	3/8	1/2
42-2	1/2	1/4
42-3	1/2	3/8
42-4	1/2	1/2
42-6	1/2	3/4
47-4	3/8	1/2
52-6	3/4	3/4

STANDARD STEEL MALE HOSE STEMS

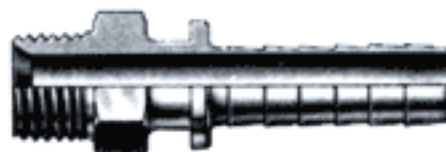

PART NO.	HOSE I.D.	PIPE TH'D.
14-1	1/4	1/8
14-2	1/4	1/4
14-3	1/4	3/8
24-2	3/8	1/4
24-3	3/8	3/8
24-4	3/8	1/2
44-2	1/2	1/4
44-3	1/2	3/8
44-4	1/2	1/2
44-6	1/2	3/4
54-4	3/4	1/2
54-6	3/4	3/4
63-6	1"	3/4
63-8	1"	1"

HOSE JOINERS

Can Be Used
With Brass
Ferrules On
Pg. 17



BRASS



STEEL

PART NO.	HOSE I.D.	MATERIAL
2DJ	3/8	Brass
12DJ	1/4	Brass
18DJ	3/8	Brass
22DJ	3/8	Brass
42DJ	1/2	Steel
54DJ	3/4	Steel
64DJ	1"	Steel

BRASS SOLID FEMALE HOSE STEMS



Can Be Used With Brass
Ferrules On Page 17

PART NO.	HOSE I.D.	PIPE TH'D.
2F-1	3/8	1/8
12F-1	1/4	1/8
12F-2	1/4	1/4

PART NO.	HOSE I.D.	PIPE TH'D.
18F-2	3/8	1/4
22F-2	3/8	1/4
22F-3	3/8	3/8

Attention:

None of the hose fittings manufactured and/or sold by THE LENZ COMPANY are to be used for life dependency applications such as in diving, for oxygen, air, or other breathing applications.

There are instances where the weight of long hose lines would be on the fitting with the possibility of the hose pulling out of the fitting. This could have disastrous results in a breathing application.

We specifically call your attention to the 90 through 136 Low Pressure Fittings shown in this Catalog LP 301, WDM, or revisions thereof. These fittings are intended for welding, low pressure hydraulics or pneumatics.

This non-use for life dependency applications such as in diving, for oxygen, air or other breathing applications applies to all of the hose fittings manufactured and/or sold by THE LENZ COMPANY and/or related companies. None of our fittings are designed for this type of use.

PIPE NIPPLES & FITTINGS

For Use With Lenz Fittings or Other Standard Applications

LENZ
HOSE
FITTINGS

INDUSTRIAL
PIPE NIPPLES &
PIPE FITTINGS
FOR USE WITH LOW
PRESSURE HOSE FITTINGS


LENZ BRASS PIPE NIPPLES & BUSHINGS



HB-B — Hex Bushing
Tapered Male Pipe Thread One End
Tapered Female Pipe Thread Other End



PN-B — Pipe Nipple
Tapered Male Pipe Thread
Both Ends




PRC-B — Pipe Reducing Connector
Tapered Male Pipe Thread One End
Tapered Female Pipe Thread Other End

PART NO.	MALE PIPE THREAD	FEMALE PIPE THREAD
4-2HB-B	1/4	1/8
6-2HB-B	3/8	1/8
6-4HB-B	3/8	1/4
8-4HB-B	1/2	1/4
8-6HB-B	1/2	3/8
12-8HB-B	3/4	1/2

PART NO.	THREAD SIZE
2PN-B	1/8MPT to 1/8MPT
4PN-B	1/4MPT to 1/4MPT
6PN-B	3/8MPT to 3/8MPT
8PN-B	1/2MPT to 1/2MPT
2-4RPN-B	1/8MPT to 1/4MPT
2-6RPN-B	1/8MPT to 3/8MPT
4-6RPN-B	1/4MPT to 3/8MPT
6-8RPN-B	3/8MPT to 1/2MPT


PART NO.	MALE PIPE THREAD	FEMALE PIPE THREAD
2PRC-B	1/8	1/8
4PRC-B	1/4	1/4
6PRC-B	3/8	3/8
2-4PRC-B	1/8	1/4
4-6PRC-B	1/4	3/8
6-8PRC-B	3/8	1/2

LENZ BRASS PIPE FITTINGS & CONNECTORS



**LENZ
PC-B
PIPE
COUPLING**
Tapered Female Pipe
Thread Both Ends

PART NO.	PIPE TH'D.	HEX SIZE
2PC-B	1/8	3/8
4PC-B	1/4	1 1/8
6PC-B	3/8	7/8
8PC-B	1/2	1 1/8



**LENZ
SE-B
STREET
ELBOW**
Tapered Male Pipe Thread
One End—Tapered Female
Pipe Thread Other End

PART NO.	MALE PIPE TH'D.	FEMALE PIPE TH'D.
2SE-B	1/8	1/8
4SE-B	1/4	1/4
6SE-B	3/8	3/8
8SE-B	1/2	1/2



**LENZ
HP-B
HEX
PLUG**
Tapered Male
Pipe Thread


PART NO.	PIPE TH'D.	HEX SIZE
2HP-B	1/8	3/8
4HP-B	1/4	7/8
6HP-B	3/8	1 1/8
8HP-B	1/2	7/8
12HP-B	3/4	1 1/8



**LENZ
PU-B
PIPE
UNION**
Tapered Female Pipe
Thread - Both Ends

PART NO.	FEMALE PIPE SIZE	HEX SIZE
2PU-B	1/8	1 1/8
4PU-B	1/4	1 3/8
6PU-B	3/8	1 1/4
8PU-B	1/2	1 1/2


STEEL and BRASS ADAPTERS FOR LOW PRESSURE FITTINGS



**LENZ 3105
MALE ADAPTERS**
Male Pipe To
J.I.C. Thread


PART NO.	MALE PIPE TH'D.	J.I.C. TH'D.	DEDUCT FROM ASS'Y O.A.L.	USE WITH THESE FITTINGS
3105-8-4	1/4	3/4-16	3/32	205HU THRU 209HU
3105-8	3/8	3/4-16	3/32	
3105-8-8	1/2	3/4-16	1/32	
3105-8-12	3/4	3/4-16	1/32	
3105-12-8	1/2	1 1/8-12	1/4	214HU THRU 217HU
3105-12	3/4	1 1/8-12	1/32	
3105-12-16	1"	1 1/8-12	1/32	
3105-16-12	3/4	1 1/8-12	1/32	224HU THRU 226HU
3105-16	1"	1 1/8-12	1/32	
3105-24-20	1 1/4	1 1/8-12	1/32	245HU
3105-24	1 1/2	1 1/8-12	1/32	

**37° FLARE STEEL
ADAPTERS FOR USE
WITH 1/2", 3/4"
1" & 1 1/2" STEEL
FITTINGS • SERIES
205 THROUGH 245
Shown On Page 3 Of
This Catalog**

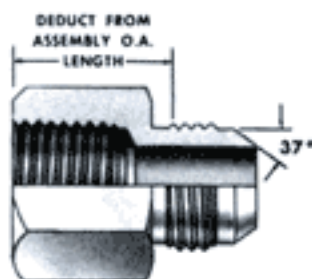

**LENZ
3255
FEMALE
ADAPTER**
Female Pipe
To J.I.C.
Thread

PART NO.	FEMALE PIPE TH'D.	J.I.C. TH'D.	DEDUCT FROM ASS'Y. O.A.L.	USE WITH THESE FITTINGS
3255-8-4	1/4	3/4-16	1"	205HU THRU 209HU
3255-8	3/8	3/4-16	1"	
3255-8-8	1/2	3/4-16	1 1/32	
3255-12-8	1/2	1 1/8-12	1 1/4	214HU THRU 217HU
3255-12	3/4	1 1/8-12	1 1/8	
3255-16-12	3/4	1 1/8-12	1 1/32	224HU THRU 226HU
3255-16	1"	1 1/8-12	1 1/32	
3255-24	1 1/2	1 1/8-12	1 1/32	245HU

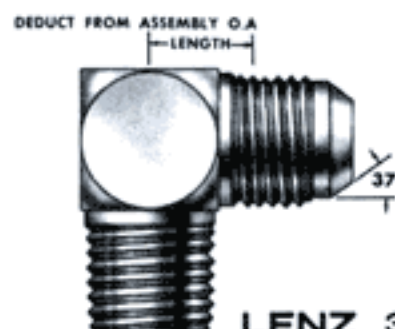


**LENZ 3405
MALE ELBOW
ADAPTER**
Male Pipe To J.I.C. Thread

PART NO.	MALE PIPE TH'D.	J.I.C. TH'D.	DEDUCT FROM ASS'Y. O.A.L.	USE WITH THESE FITTINGS
3405-8-4	1/4	3/4-16	3/32	205HU THRU 209HU
3405-8	3/8	3/4-16	3/32	
3405-8-8	1/2	3/4-16	3/8	
3405-8-12	3/4	3/4-16	3/32	
3405-12-8	1/2	1 1/8-12	1 1/8	214HU THRU 217HU
3405-12	3/4	1 1/8-12	3/32	
3405-16-12	3/4	1 1/8-12	1 1/8	224HU THRU 226HU
3405-16	1"	1 1/8-12	1 1/8	
3405-24	1 1/2	1 1/8-12	1 1/32	245HU

SEE LENZ HOSE FITTING CATALOG - HP-401 - FOR ADDITIONAL 37° FLARE FITTINGS

UNION FITTING BRASS HOSE ADAPTERS




**1AD THROUGH 7AD
1ADL THROUGH 3ADL**

For Use With R, L, and HU Fittings
Shown In Tables Below

UNION MALE ADAPTERS — STRAIGHT THREAD, ONE END — TAPERED MALE PIPE THREAD, OTHER END			
PART NO.	THREAD SIZE	HEX SIZE	USE WITH THESE FITTINGS
1AD •	⅝-18R.H. to ¼MPT	⅝	90HU THRU 115HU & 90R THRU 136R
3AD •	⅝-18R.H. to ¼MPT	⅝	
3AD, HEAVY •	⅝-18R.H. to ¼MPT	1⅝	
5AD •	⅝-18R.H. to ⅜MPT	1⅝	
7AD •	⅝-18R.H. to ½MPT	⅜	
1ADL †	⅝-18L.H. to ⅝MPT	⅝	90L THRU 136L
3ADL †	⅝-18L.H. to ¼MPT	⅝	
Male Adapters for 135HU and 136HU See Page 18 (5105 Series)			

• OXYGEN
ADAPTERS
† ACETYLENE
ADAPTERS



**1ADF THROUGH 5ADF
1ADFL**


For Use With R, L, and HU Fittings
Shown In Tables Below

UNION FEMALE ADAPTERS—STRAIGHT THREAD, ONE END— TAPERED FEMALE PIPE THREAD, OTHER END			
PART NO.	THREAD SIZE	HEX SIZE	USE WITH THESE FITTINGS
1ADF •	3/8-18R.H. to 1/8FPT	3/8	90HU THRU 115HU 90R THRU 136R &
3ADF •	3/8-18R.H. to 1/4FPT	1 1/8	
5ADF •	3/8-18R.H. to 3/8FPT	1 3/8	
1ADFL †	3/8-18L.H. to 1/8FPT	3/8	90L THRU 136L
Female Adapters For 135HU and 136HU See Page 19 (5255 Series)			

LENZ STEEL UNION SWIVEL (UAD) HOSE ADAPTERS


LENZ
HOSE
FITTINGS

UAD
STEEL UNION SWIVEL
HOSE ADAPTERS
FOR USE WITH MALE
PIPE HOSE FITTING EN

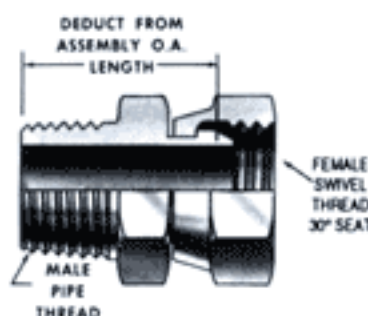

**LENZ
M-UAD
MALE UNION
SWIVEL ADAPTER**
Male Pipe To
Female NPSM
Swivel


PART NO.	MALE PIPE TH'D.	FEMALE SWIVEL TH'D.	DED'T. FROM ASS'Y. O.A.L.
2M-2UAD	1/8	1/8	27/32
2M-4UAD	1/8	1/4	1"
4M-4UAD	1/4	1/4	1 1/32
4M-6UAD	1/4	3/8	1 1/32
6M-4UAD	3/8	1/4	1 1/32
6M-6UAD	3/8	3/8	1 1/32
6M-8UAD	3/8	1/2	1 11/32
8M-6UAD	1/2	3/8	1 1/2
8M-8UAD	1/2	1/2	1 1/4
8M-12UAD	1/2	3/4	1 5/8
12M-8UAD	3/4	1/2	1 1/4
12M-12UAD	3/4	3/4	1 5/8
12M-16UAD	3/4	1"	1 31/32
16M-12UAD	1"	3/4	1 5/8
16M-16UAD	1"	1"	1 31/32
16M-20UAD	1"	1 1/4	2"
20M-20UAD	1 1/4	1 1/4	2 1/32
20M-24UAD	1 1/4	1 1/2	2 1/4
24M-24UAD	1 1/2	1 1/2	2 3/32
32M-32UAD	2"	2"	2 3/32

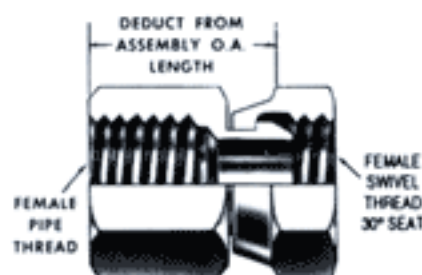


**LENZ
F-UAD
FEMALE UNION
SWIVEL ADAPTER**
Female Pipe To
Female NPSM
Swivel

PART NO.	FEMALE PIPE TH'D.	FEMALE SWIVEL TH'D.	DEDUCT FROM ASS'Y. O.A. LENGTH
2F-2UAD	1/8	1/8	3/4
4F-4UAD	1/4	1/4	1 1/8
6F-4UAD	3/8	1/4	1 1/32
6F-6UAD	3/8	3/8	1 1/32
8F-4UAD	1/2	1/4	1 1/8
8F-6UAD	1/2	3/8	1 11/32
8F-8UAD	1/2	1/2	1 13/32
12F-12UAD	3/4	3/4	1 5/8
16F-12UAD	1"	3/4	1 31/32
16F-16UAD	1"	1"	1 5/8
20F-20UAD	1 1/4	1 1/4	1 5/8
24F-24UAD	1 1/2	1 1/2	1 5/8
32F-32UAD	2"	2"	2 3/8

**LENZ
ME-UAD
MALE UNION
ELBOW SWIVEL
ADAPTER**
Male Pipe To
Female NPSM
Swivel

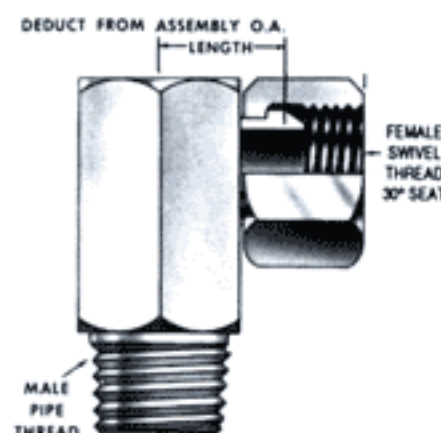


PART NO.	MALE PIPE TH'D	FEMALE SWIVEL TH'D	DED'T. FROM ASS'Y. O.A.L.
2ME-2UAD	1/8	1/8	17/32
2ME-4UAD	1/8	1/4	11/16
4ME-4UAD	1/4	1/4	3/4
4ME-6UAD	1/4	3/8	7/8
6ME-4UAD	3/8	1/4	7/8
6ME-6UAD	3/8	3/8	7/8
6ME-8UAD	3/8	1/2	15/16
8ME-4UAD	1/2	1/4	29/32
8ME-6UAD	1/2	3/8	15/16
8ME-8UAD	1/2	1/2	15/16
8ME-12UAD	1/2	3/4	1 1/16
12ME-6UAD	3/4	3/8	1 1/32
12ME-8UAD	3/4	1/2	1 1/16
12ME-12UAD	3/4	3/4	1 1/16
16ME-8UAD	1"	1/2	1 1/8
16ME-12UAD	1"	3/4	1 1/16
16ME-16UAD	1"	1"	1 1/16
16ME-20UAD	1"	1 1/4	1 1/2
20ME-20UAD	1 1/4	1 1/4	1 1/2
24ME-20UAD	1 1/2	1 1/4	1 5/8
24ME-24UAD	1 1/2	1 1/2	1 5/8
32ME-32UAD	2"	2"	2"

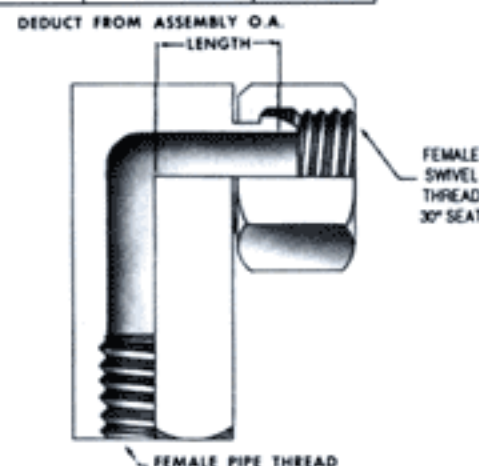

**LENZ
FE-UAD
FEMALE UNION
ELBOW SWIVEL
ADAPTER**
Female Pipe To
Female NPSM
Swivel

PART NO.	FEMALE PIPE TH'D	FEMALE SWIVEL TH'D	DEDUCT FROM ASS'Y O.A. LENGTH
2FE-2UAD	1/8	1/8	17/32
4FE-4UAD	1/4	1/4	3/4
6FE-6UAD	3/8	3/8	7/8
8FE-8UAD	1/2	1/2	15/16
12FE-12UAD	3/4	3/4	1 3/16
16FE-16UAD	1"	1"	1 5/16
20FE-20UAD	1 1/4	1 1/4	1 1/2
24FE-24UAD	1 1/2	1 1/2	1 5/8


LENZ STEEL UNION SWIVEL (UAD) HOSE ADAPTERS

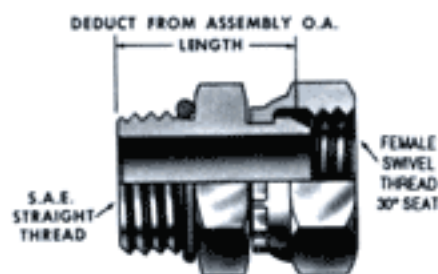


**LENZ
SM-UAD
S.A.E. STRAIGHT
THREAD MALE
UNION ADAPTER**
Male S.A.E. Thread
To Female
NPSM Swivel

PART NO.	SAE STRAIGHT THREAD	FEMALE SWIVEL THREAD	DEDUCT FROM ASS'Y O.A. THREAD
4SM-4UAD	1/2-20	1/4	1"
5SM-4UAD	1/2-20	1/4	1"
6SM-4UAD	3/4-18	1/4	1 1/2"
6SM-6UAD	3/4-18	3/8	1 1/2"
8SM-4UAD	3/4-16	1/4	1 1/2"
8SM-6UAD	3/4-16	3/8	1 1/2"
8SM-8UAD	3/4-16	1/2	1 1/2"
8SM-12UAD	3/4-16	3/4	1 1/2"
10SM-6UAD	1 1/4-14	3/8	1 1/2"
10SM-8UAD	1 1/4-14	1/2	1 1/2"
10SM-12UAD	1 1/4-14	3/4	1 1/2"
12SM-8UAD	1 1/2-12	1/2	1 1/2"
12SM-12UAD	1 1/2-12	3/4	1 1/2"
14SM-12UAD	1 3/4-12	3/4	1 1/2"
16SM-16UAD	1 3/4-12	1"	1 1/2"
20SM-16UAD	1 3/4-12	1"	1 1/2"
20SM-20UAD	1 3/4-12	1 1/4	1 1/2"
24SM-24UAD	1 3/4-12	1 1/2	1 1/2"

**LENZ
MT-UAD
MALE UNION
TEE SWIVEL
ADAPTER**
Male Pipe Branch,
Female NPSM
Swivels On Run

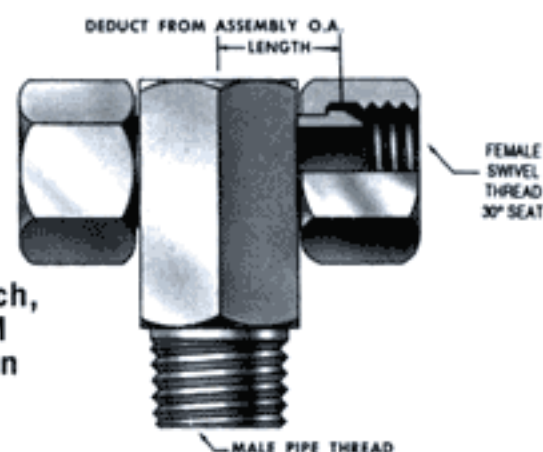


PART NO.	MALE PIPE THREAD	FEMALE SWIVEL THREAD	DEDUCT FROM ASS'Y O.A. THREAD
2MT-2UAD	1/8	1/8	1 1/32"
4MT-4UAD	1/4	1/4	3/4"
6MT-6UAD	3/8	3/8	7/8"
8MT-8UAD	1/2	1/2	1 1/16"
12MT-12UAD	3/4	3/4	1 3/16"
16MT-16UAD	1"	1"	1 5/16"
20MT-20UAD	1 1/4	1 1/4	1 1/2"

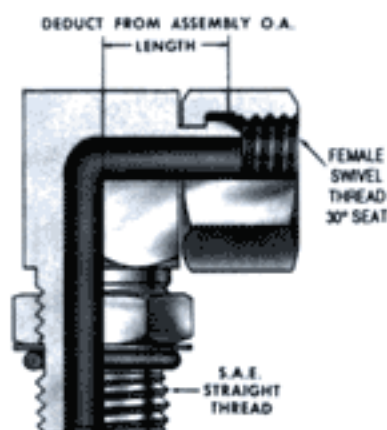

**LENZ
SME-UAD
S.A.E. STRAIGHT
THREAD MALE
UNION ELBOW
SWIVEL ADAPTER**
Male S.A.E. Thread
To Female
NPSM Swivel


PART NO.	SAE STRAIGHT THREAD	FEMALE SWIVEL THREAD	DEDUCT FROM ASS'Y O.A. THREAD
4SME-4UAD	1/2-20	1/4	3/4"
6SME-4UAD	3/4-18	1/4	3/4"
6SME-6UAD	3/4-18	3/8	7/8"
6SME-8UAD	3/4-18	1/2	1 1/16"
8SME-6UAD	3/4-16	3/8	7/8"
8SME-8UAD	3/4-16	1/2	1 1/16"
8SME-12UAD	3/4-16	3/4	1 1/16"
10SME-6UAD	1 1/4-14	3/8	2 1/32"
10SME-8UAD	1 1/4-14	1/2	1 5/16"
10SME-12UAD	1 1/4-14	3/4	1 7/16"
12SME-8UAD	1 1/2-12	1/2	1"
12SME-12UAD	1 1/2-12	3/4	1 3/16"
14SME-12UAD	1 3/4-12	3/4	1 7/16"
16SME-16UAD	1 3/4-12	1"	1 7/16"
16SME-12UAD	1 3/4-12	3/4	1 7/16"
20SME-20UAD	1 3/4-12	1 1/4	1 1/2"
20SME-12UAD	1 3/4-12	3/4	1 1/2"
24SME-24UAD	1 3/4-12	1 1/2	1 11/16"

**LENZ
MEX-UAD
MALE 45° UNION
ELBOW SWIVEL
ADAPTER**
Male Pipe To
Female NPSM
Swivel

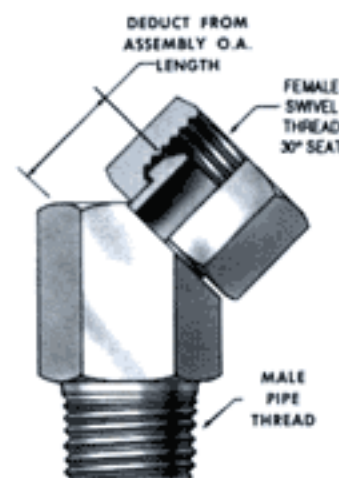

PART NO.	MALE PIPE THREAD	FEMALE SWIVEL THREAD	DEDUCT FROM ASS'Y O.A. THREAD
2MEX-2UAD	1/8	1/8	7/16"
4MEX-4UAD	1/4	1/4	2 1/32"
6MEX-6UAD	3/8	3/8	1 1/16"
8MEX-8UAD	1/2	1/2	2 1/32"
8MEX-6UAD	1/2	3/8	2 1/32"
12MEX-12UAD	3/4	3/4	2 1/32"
12MEX-8UAD	3/4	1/2	7/8"
16MEX-16UAD	1"	1"	1 1/16"
16MEX-12UAD	1"	3/4	1 1/32"
20MEX-20UAD	1 1/4	1 1/4	1 1/8"
24MEX-24UAD	1 1/2	1 1/2	1 7/32"

(UAD) HOSE ADAPTERS Cont'd.

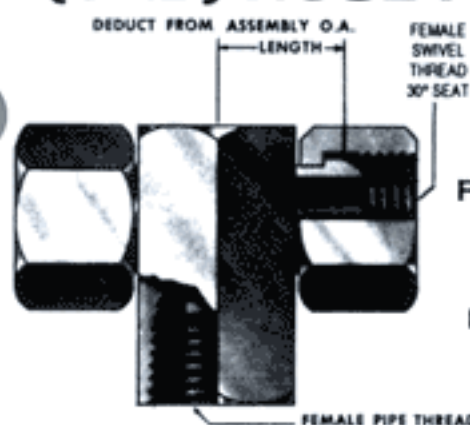


LENZ FT-UAD FEMALE UNION TEE SWIVEL ADAPTER

Female Pipe Branch, Female
NPSM Swivels On Run


PART NO.	FEMALE PIPE TH'D	FEMALE SWIVEL TH'D	DEDUCT FROM ASS'Y O.A. LENGTH
4FT-4UAD	1/4	1/4	3/4
6FT-6UAD	3/8	3/8	7/8
8FT-8UAD	1/2	1/2	1 1/16
12FT-12UAD	3/4	3/4	1 3/16
16FT-16UAD	1"	1"	1 5/16

LENZ T-UAD UNION TEE SWIVEL ADAPTER

Female NPSM Swivels
All Outlets

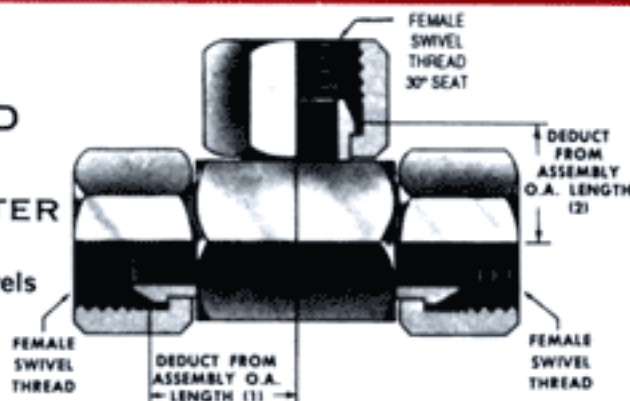

PART NO.	FEMALE SWIVEL TH'D.	(1) DEDUCT FROM ASS'Y. O.A. LENGTH	(2) DEDUCT FROM ASS'Y. O.A. LENGTH
2T-2UAD	1/8	5/8	1 1/32
4T-4UAD	1/4	7/8	3/4
6T-6UAD	3/8	1 1/8	7/8
8T-8UAD	1/2	1 1/4	1 1/8
12T-12UAD	3/4	1 3/4	1 3/8
16T-16UAD	1"	1 1/2	1 3/4

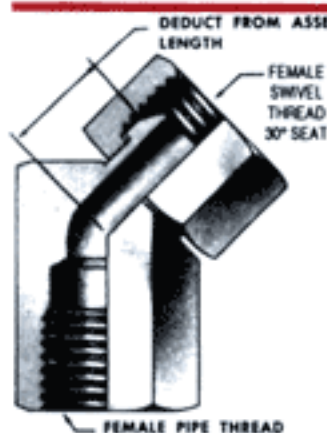

LENZ FEX-UAD FEMALE 45° UNION ELBOW SWIVEL ADAPTER

Female Pipe To Female
NPSM Swivel

PART NO.	FEMALE PIPE TH'D.	FEMALE SWIVEL TH'D.	DEDUCT FROM ASS'Y. O.A. LENGTH
4FEX-4UAD	1/4	1/4	2 1/32
6FEX-6UAD	3/8	3/8	1 1/8
8FEX-8UAD	1/2	1/2	2 1/32
12FEX-12UAD	3/4	3/4	2 1/32
16FEX-16UAD	1"	1"	1 3/4

LENZ HOSE FERRULES BRASS CRIMP TYPE



Lenz crimp-type brass ferrules are made especially for use with Lenz Brass Stems shown on pages 10, 11, and 12. These ferrules make up strong, neat appearing assemblies for the least cost.

PART NO.	HOSE O.D.	PART NO.	HOSE O.D.
12FC	3/8	23FC	2 1/32
13FC	1 1/32	24FC	3/4
14FC	3/8	25FC	2 1/32
15FC	1 1/32	26FC	1 1/8
16FC	1/2	27FC	2 1/32
17FC	1 1/32	28FC	3/8
18FC	3/8	29FC	2 1/32
19FC	1 1/32	30FC	1 1/8
20FC	3/8	31FC	2 1/32
21FC	2 1/32	32FC	1"
22FC	1 1/8	—	—

LENZ

Company

We would like to call to your attention:

That **none** of the hose fittings manufactured and/or sold by **LENZ COMPANY** are to be used for life dependency applications such as in diving, for oxygen, air, or other breathing applications.

There are instances where the weight of long hose lines would be on the fitting with the possibility of the hose pulling out of the fitting. This could have disastrous results in a breathing application.

We specifically call your attention to the 90 through 136 Low Pressure Fittings shown in this Catalog LP 301, WDM, or revisions thereof. These fittings are intended for welding, low pressure hydraulics or pneumatics.


This **non-use** for life dependency applications such as in diving, for oxygen, air or other breathing applications applies to all of the hose fittings manufactured and/or sold by **LENZ COMPANY** and/or related companies. None of our fittings are designed for this type of use.

We, therefore, do not confirm this type of use, either written or verbal, and anyone giving this impression orally, written, or implied is doing so without our consent, and **LENZ COMPANY**, or any of its affiliates or related companies, assumes **no** liability in such cases.

It is critical that the O.D. and I.D. of the hose and fitting correspond. EXAMPLE: 1/4" I.D. and 1/2" O.D. We use 99 Series fittings.

LENZ LOW PRESSURE "PUSH-ON"

TYPE Y Cotton Covered HOSE For "Push-On" Fittings

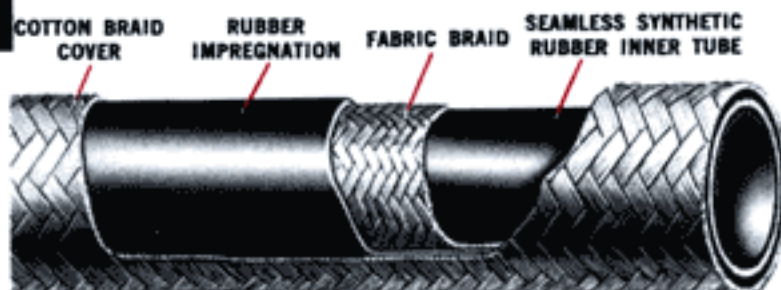


COTTON COVER PART NO.	O.D. TUBE SIZE	HOSE I.D.	HOSE O.D.	RECOM. WORK'G PRESS.	MIN. BURST. PRESS.	MIN. BEND RADII	APPROX. WT. PER 100 FT.
4Y	1/4	1/4	1/2	250	1000	3"	6
6Y	3/8	3/8	3/4	250	1000	3"	8.5
8Y	1/2	1/2	3/4	250	1000	5"	11.9
10Y	3/4	3/4	7/8	250	1000	6"	18.5
12Y	1	1	1 1/8	250	1000	7"	21.1

LENZ TYPE Y HOSE — Constructed as shown. Durable cover is oil and mildew resistant. The practical answer for low cost hose assemblies for conveying common liquids under 250 PSI. Working temperature ranges are -40° to +200° F. except air +160° F.

LENZ TYPE YR HOSE — Identical in construction to Type Y above except cover is of tough, abrasion resistant synthetic rubber in place of cotton cover. It is compounded to withstand temperatures from -40° to +200° F. except air where range is limited to +160° F.

Both types are ideally suited for carrying water, air, lubricating oils, fuels, anti-freeze solutions where pressures are under 250 PSI, and for vacuum applications to 28" Hg Negative pressure.

TYPE YR Rubber Covered HOSE For "Push-On" Fittings

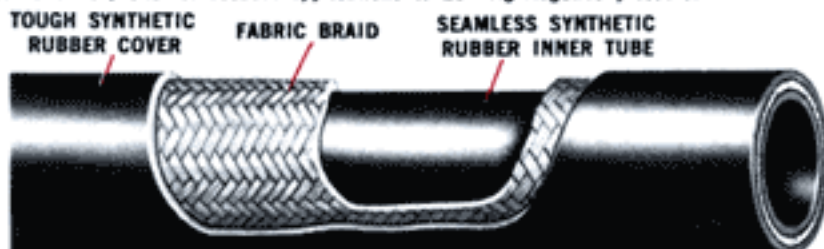

RUBBER COVER PART NO.	O.D. TUBE SIZE	HOSE I.D.	HOSE O.D.	RECOM. WORK'G PRESS.	MIN. BURST. PRESS.	MIN. BEND RADII	APPROX. WT. PER 100 FT.
4YR	1/4	1/4	1/2	250	1000	3"	7.7
6YR	3/8	3/8	3/4	250	1000	3"	11.5
8YR	1/2	1/2	3/4	250	1000	5"	15.5
10YR	3/4	3/4	7/8	250	1000	6"	22
12YR	1	1	1 1/8	250	1000	7"	25.3

"PUSH-ON" FITTINGS FOR USE WITH TYPE Y and YR HOSE

Lenz Low Pressure "Push-On" Hose Stem Fittings are reusable type that can be quickly and easily attached or removed from the hose. The barbed stems "lock" the fittings into the hose without external clamps or ferrules. Stems are machined from brass, swivel nuts are of cadmium plated steel. Conform to J.I.C. and S.A.E. standards.

Easily Assembled



1. Cut hose cleanly and squarely. Dip end in water or use a few drops of oil for light lubrication. Plastic cap furnished may or may not be used . . . serves to cover rough end of hose for neater assembly. If plastic cap is used, slide on end of hose before inserting fitting.

2. Push hose over barbed stem of fitting, then push squarely against solid object until hose seats snugly against shoulder or hex.

Easily Disassembled



1. To remove fitting use sharp knife to slit hose diagonally, cutting slightly beyond the length of the fitting.

2. After slitting, hold fitting end firmly, in hand or vise, and with a sharp bend to the side the hose will pop off the stem . . . making fitting suitable for re-use.


LENZ 45° S.A.E. BRASS FLARE HOSE ADAPTERS

HOW TO ORDER COLOR CODED ADAPTERS

The Lenz 45° Adapters shown here are for use with the 301 Series S.A.E. Swivel "Push-On" Hose Stem Fittings shown in the 301 table above on page 19. For ease and accuracy in ordering and matching, the adapter and fitting part numbers are **Color Coded** in the specification tables. To select the correct adapter for the swivel end, match the **Red Number** of the Adapter Part Number with the **Red Number** of the S.A.E. Swivel End Part Number.

EXAMPLE: Adapter 5105-1/4-6 may be used with S.A.E. Swivel Fitting End 301-6-6.

5105 and 5255 Adapters Series are accurately machined from Brass Bar Stock. Series 5405 Elbows are from Brass Forgings. All adapters conform to J.I.C. and S.A.E. Standards.

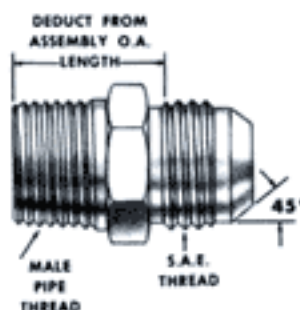

**LENZ
5105
MALE
ADAPTER**

Male Pipe
To
S.A.E. Thread

*Adapters For Use With
135HU and 136HU Swivel
Hose Fittings on Page 3


PART NO.	MALE PIPE TH'D.	TUBE O.D.	S.A.E. TH'D.	DEDUCT FROM ASS'Y. O.A. L.
5105-1/8-4	1/8	1/4	3/16-20	3/16
5105-1/4-4	1/4	1/4	3/16-20	3/4
5105-1/8-5	1/8	3/8	1/2-20	7/32
5105-1/4-5	1/4	3/8	1/2-20	7/32
5105-3/8-5	3/8	3/8	1/2-20	7/8
5105-1/8-6	1/8	3/8	3/8-18	7/32
5105-1/4-6	1/4	3/8	3/8-18	7/32
5105-3/8-6	3/8	3/8	3/8-18	13/16
5105-1/2-6	1/2	3/8	3/8-18	1 1/8
5105-1/4-8	1/4	1/2	3/4-16	1 1/2
5105-3/8-8	3/8	1/2	3/4-16	1 1/2
5105-1/2-8	1/2	1/2	3/4-16	1 3/8
5105-3/4-8	3/4	1/2	3/4-16	1 3/2
5105-3/8-10	3/8	3/8	7/8-14	1 3/2
5105-1/2-10	1/2	3/8	7/8-14	1 3/2
5105-3/4-10	3/4	3/8	7/8-14	1 3/2
5105-1/2-12	1/2	3/4	1 1/8-14	1 3/4
5105-3/4-12	3/4	3/4	1 1/8-14	1 1/2

HOSE FITTINGS and ADAPTERS

LENZ
HOSE
FITTINGS

LOW PRESSURE
"PUSH-ON" FITTINGS
& ADAPTERS
FOR Y & YR SINGLE
FABRIC BRAID HOSE


312 MALE PIPE "PUSH-ON" HOSE FITTINGS

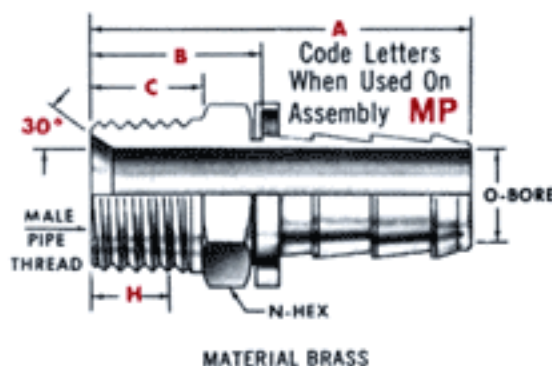

PART NO.	HOSE SIZE	HOSE I.D.	MALE PIPE TH'D	WT. PER 100 PCS.	A	B	C	H*	N HEX	O BORE
312-2-4	4	1/4	1/8	3.75	1 3/4	3/8	2 3/4	3/2	3/4	3/4
312-4-4	4	1/4	1/4	5.63	1 1/2	1 1/8	1 3/2	3/8	3/4	3/4
312-4-6	6	3/8	1/4	6.88	1 3/4	1 1/8	1 3/2	3/8	3/4	3/2
312-6-6	6	3/8	3/8	10	1 3/2	1 1/8	2 3/4	1 3/2	1 1/8	3/2
312-6-8	8	1/2	3/8	10	2"	1 1/8	2 3/4	1 3/2	1 1/8	1 3/2
312-8-8	8	1/2	1/2	15	2 3/4	1 1/8	2 3/2	1 3/2	3/8	1 3/2
312-8-10	10	3/8	1/2	16.25	2 1/2	1 3/8	2 3/2	1 3/2	3/8	1 3/2
312-12-12	12	3/4	3/4	21.88	2 3/4	1 3/8	3 1/4	3/8	1 1/8	1 3/4

For Hose O.D., Working Pressure and Complete Hose Information See Page 18


311 J.I.C. SWIVEL "PUSH-ON" HOSE FITTINGS

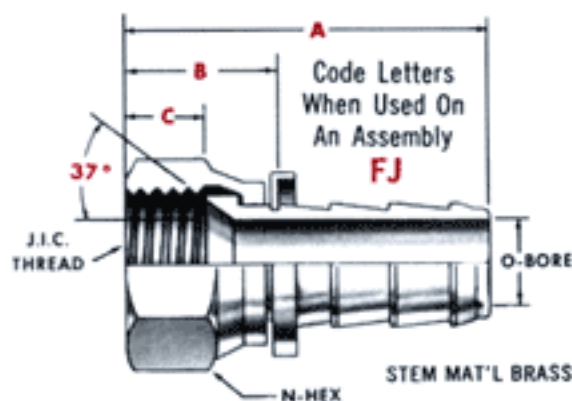

PART NO.	HOSE SIZE	HOSE I.D.	J.I.C. TH'D	WT. PER 100 PCS.	A	B	C	N HEX	O BORE
311-4-4	4	1/4	3/16-20	5	1 1/2	3/4	1 1/2	3/4	1 1/4
311-5-4	4	1/4	1/2-20	6.25	1 3/8	1 1/8	3/8	3/8	3/4
311-6-6	6	3/8	3/8-18	6.88	1 3/4	3/8	3/8	1 1/8	3/2
311-8-8	8	1/2	3/4-16	11.88	1 3/2	2 3/2	1 3/2	3/8	1 3/2
311-10-10	10	3/8	3/8-14	20	2 3/8	1"	1 3/2	1"	1/2
311-12-12	12	3/4	1 1/8-12	31.95	2 3/4	1 1/8	3/8	1 1/4	3/8

For Hose O.D., Working Pressure and Complete Hose Information See Page 18


301 S.A.E. SWIVEL "PUSH-ON" HOSE FITTINGS

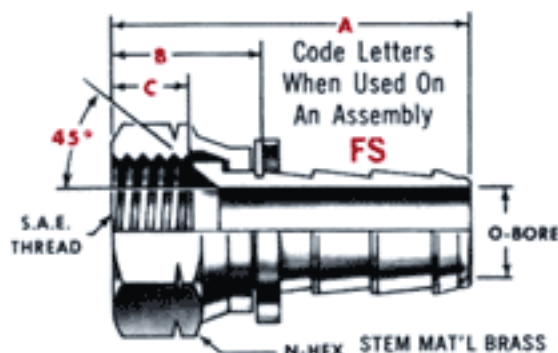

PART NO.	HOSE SIZE	HOSE I.D.	S.A.E. TH'D	WT. PER 100 PCS.	A	B	C	N HEX	O BORE
301-4-4	4	1/4	3/16-20	5	1 1/2	3/4	1 1/2	3/4	1 1/4
301-5-4	4	1/4	1/2-20	6.25	1 3/8	1 1/8	3/8	3/8	3/4
301-6-6	6	3/8	3/8-18	8.75	1 3/2	2 3/2	1 3/2	3/4	3/2
301-8-8	8	1/2	3/4-16	11.88	1 3/2	2 3/2	1 3/2	3/8	1 3/2
301-10-10	10	3/8	3/8-14	20	2 3/8	1"	1 3/2	1"	1/2
301-12-12	12	3/4	1 1/8-14	33.13	2 3/8	1 3/2	2 3/2	1 1/4	3/8

For Hose O.D., Working Pressure and Complete Hose Information See Page 18


... For Use With 301 Series Swivel Hose End Fittings Shown and Listed Above

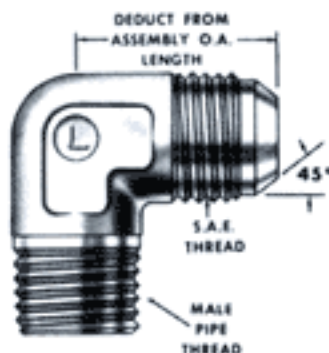

LENZ
5405
MALE
ELBOW
ADAPTER

Male Pipe
To
S.A.E. Thread

PART NO.	MALE PIPE TH'D.	TUBE O.D.	S.A.E. TH'D.	DEDUCT FROM ASS'Y. O.A. L.
5405-1/8-4	1/8	1/4	3/16-20	3/8
5405-1/4-4	1/4	1/4	3/16-20	1 1/2
5405-1/8-5	1/8	3/8	1/2-20	1/2
5405-1/4-5	1/4	3/8	1/2-20	1/2
5405-3/8-5	3/8	3/8	1/2-20	3/8
5405-1/8-6	1/8	3/8	3/8-18	1 1/2
5405-1/4-6	1/4	3/8	3/8-18	1 1/2
5405-3/8-6	3/8	3/8	3/8-18	1 1/2
5405-1/2-6	1/2	3/8	3/8-18	1 1/8
5405-1/4-8	1/4	1/2	3/4-16	2 3/2
5405-3/8-8	3/8	1/2	3/4-16	2 3/2
5405-1/2-8	1/2	1/2	3/4-16	2 3/2
5405-3/4-8	3/4	1/2	3/4-16	1 3/8
5405-3/8-10	3/8	5/8	3/8-14	1 3/8
5405-1/2-10	1/2	5/8	3/8-14	1 3/8
5405-3/4-10	3/4	5/8	3/8-14	2 3/2
5405-1/2-12	1/2	3/4	1 1/8-14	1 3/8
5405-3/4-12	3/4	3/4	1 1/8-14	1 3/8



LENZ
5255
FEMALE
ADAPTER

Female Pipe
To
S.A.E. Thread

PART NO.	FEMALE PIPE TH'D.	TUBE O.D.	S.A.E. TH'D.	DEDUCT FROM ASS'Y. O.A. L.
5255-1/8-4	1/8	1/4	3/16-20	3/8
5255-1/4-4	1/4	1/4	3/16-20	2 3/2
5255-1/8-5	1/8	3/8	1/2-20	2 3/2
5255-1/4-5	1/4	3/8	1/2-20	2 3/2
5255-1/8-6	1/8	3/8	3/8-18	2 3/2
5255-1/4-6	1/4	3/8	3/8-18	2 3/2
5255-3/8-6	3/8	3/8	3/8-18	2 3/2
5255-1/4-8	1/4	1/2	3/4-16	3 1/2
5255-3/8-8	3/8	1/2	3/4-16	1 3/2
5255-1/2-8	1/2	1/2	3/4-16	1 3/8
5255-3/8-10	3/8	5/8	3/8-14	1"
5255-1/2-10	1/2	5/8	3/8-14	1 3/8
5255-3/4-10	3/4	5/8	3/8-14	1 1/4
5255-1/2-12	1/2	3/4	1 1/8-14	1 1/4
5255-3/4-12	3/4	3/4	1 1/8-14	1 3/8
—	—	—	—	—
—	—	—	—	—
—	—	—	—	—

*Adapters For Use With
135HU and 136HU Swivel
Hose Fittings on Page 3

LENZ • P.O. BOX 1044 • DAYTON, OHIO 45401-1044 • PHONE: 937/277-9364 • FAX: 937/277-6516

OFFICE & FACTORY • 3301 KLEPINGER ROAD • DAYTON, OHIO 45406-1842

INTERNET: <http://www.lenzinc.com>

• LENZ SINGLE FABRIC BRAID •

Low Cost Fittings and Assemblies for Industrial Low Pressure Applications.

"PUSH-ON" TYPE • MALE PIPE END TO MALE PIPE END




"PUSH-ON" TYPE • J.I.C. FEMALE SWIVEL TO J.I.C. FEMALE SWIVEL



"PUSH-ON" TYPE • MALE PIPE END TO J.I.C. FEMALE SWIVEL



HOW TO ORDER SPECIAL LENZ Y OR YR "PUSH-ON" HOSE

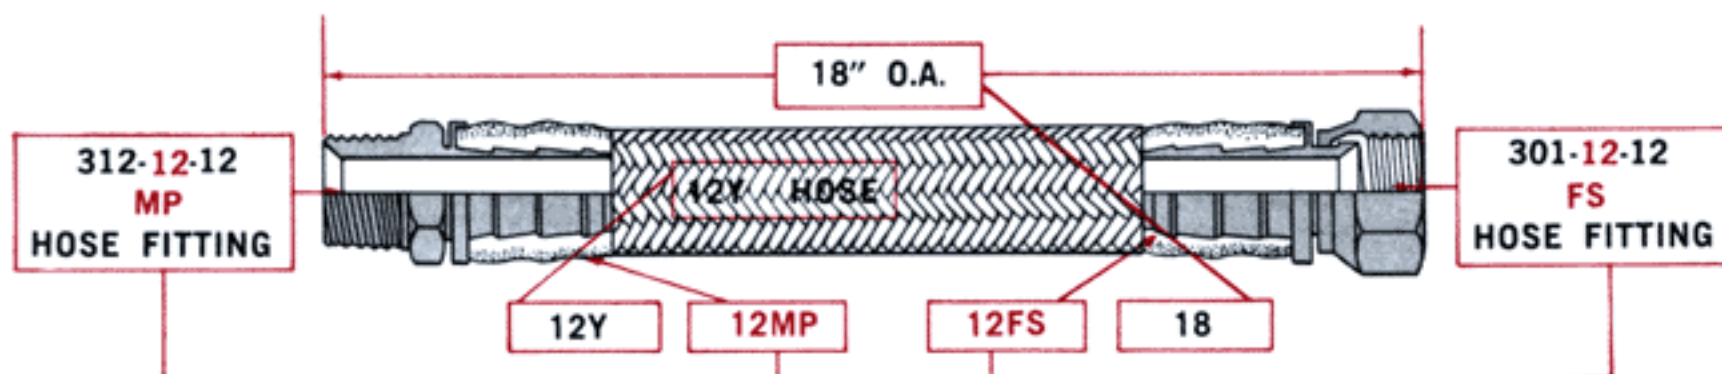

ASSEMBLY NUMBER IS: 12Y-12MP-12FS-18

LENZ • P.O. BOX 1044 • DAYTON, OHIO 45401-1044 • PHONE: 937/277-9364 • FAX: 937/277-6516

OFFICE & FACTORY • 3301 KLEPINGER ROAD • DAYTON, OHIO 45406-1842

INTERNET: <http://www.lenzinc.com>

"PUSH-ON" HOSE ASSEMBLIES

Single Fabric Braid • Y & YR HOSE TYPES • Double Male Assemblies

COTTON COVER HOSE ASS'Y. NO.	RUBBER COVER HOSE ASS'Y. NO.	O.D. TUBE SIZE	MALE PIPE TH'D.	HOSE SIZE	HOSE I.D.	MALE PIPE FITTING	MALE FITTING ALLOWANCE B	TOTAL FITTING ALLOWANCE 2B	E	H*
4Y-2MP-OA	4YR-2MP-OA	4	1/8	4	1/4	312-2-4	3/8	1 1/4	3/8	3/2
4Y-4MP-OA	4YR-4MP-OA	4	1/4	4	1/4	312-4-4	1 1/8	1 3/8	1 1/2	3/8
6Y-4MP-OA	6YR-4MP-OA	6	1/4	6	3/8	312-4-6	1 1/8	1 3/8	1 1/2	3/8
6Y-6MP-OA	6YR-6MP-OA	6	3/8	6	3/8	312-6-6	1 1/8	1 3/8	1 1/2	1 1/2
8Y-6MP-OA	8YR-6MP-OA	8	3/8	8	1/2	312-6-8	1 1/8	1 3/8	1 1/2	1 1/2
8Y-8MP-OA	8YR-8MP-OA	8	1/2	8	1/2	312-8-8	1 1/8	2 1/4	2 1/2	1 1/2
10Y-8MP-OA	10YR-8MP-OA	10	1/2	10	3/8	312-8-10	1 1/8	2 3/8	2 1/2	1 1/2
12Y-12MP-OA	12YR-12MP-OA	12	3/4	12	3/4	312-12-12	1 1/8	2 3/8	2 1/2	3/4

NOTE: If both ends do not have the same pipe thread add a second MP number — Example: 4Y-4MP-2MP-O.A.
For Hose O.D., Working Pressure and Complete Hose Information See Page 18

Single Fabric Braid • Y & YR HOSE TYPES • Double Swivel Assemblies

COTTON COVER ASS'Y. NO.	RUBBER COVER ASS'Y. NO.	O.D. TUBE SIZE	J.I.C. SWIVEL THREAD	HOSE SIZE	HOSE I.D.	J.I.C. SWIVEL FITTING	C	J.I.C. SWIVEL FITTING ALLOWANCE D	TOTAL FITTING ALLOWANCE 2D
4Y-4FJ-OA	4YR-4FJ-OA	4	3/8-20	4	1/4	311-4-4	1 1/2	3/4	1 1/2
4Y-5FJ-OA	4YR-5FJ-OA	4	1/2-20	4	1/4	311-5-4	3/8	1 1/8	1 3/8
6Y-6FJ-OA	6YR-6FJ-OA	6	3/8-18	6	3/8	311-6-6	3/8	3/8	1 3/4
8Y-8FJ-OA	8YR-8FJ-OA	8	3/4-16	8	1/2	311-8-8	1 1/2	2 1/2	1 3/8
10Y-10FJ-OA	10YR-10FJ-OA	10	3/8-14	10	3/8	311-10-10	1 1/2	1"	2"
12Y-12FJ-OA	12YR-12FJ-OA	12	1 1/8-12	12	3/4	311-12-12	3/8	1 1/8	2 1/4

NOTE: If both ends do not have the same swivel thread add a second FJ number — Example: 4Y-4FJ-5FJ-O.A.
For Hose O.D., Working Pressure and Complete Hose Information See Page 18

Single Fabric Braid • Y & YR HOSE TYPES • Male To Swivel Assemblies

COTTON COVER HOSE ASS'Y. NO.	RUBBER COVER HOSE ASS'Y. NO.	O.D. TUBE SIZE	MALE PIPE TH'D.	J.I.C. SWIVEL THREAD	HOSE SIZE	HOSE I.D.	MALE PIPE FITTING	J.I.C. SWIVEL FITTING	MALE F'T'G. ALLOW. B	C	J.I.C. SWIVEL FITTING ALLOW. D	TOTAL F'T'G. ALLOW. B & D	E	H*
4Y-2MP-4FJ-OA	4YR-2MP-4FJ-OA	4	1/8	3/8-20	4	1/4	312-2-4	311-4-4	3/8	1 1/2	3/4	1 3/8	3/8	3/2
4Y-4MP-4FJ-OA	4YR-4MP-4FJ-OA	4	1/4	3/8-20	4	1/4	312-4-4	311-4-4	1 1/8	1 1/2	3/4	1 1 1/8	1 1/2	3/8
4Y-4MP-5FJ-OA	4YR-4MP-5FJ-OA	4	1/4	1/2-20	4	1/4	312-4-4	311-5-4	1 1/8	3/8	1 1/8	1 3/4	1 1/2	3/8
6Y-4MP-6FJ-OA	6YR-4MP-6FJ-OA	6	1/4	3/8-18	6	3/8	312-4-6	311-6-6	1 1/8	3/8	3/8	1 1 1/8	1 1/2	3/8
6Y-5MP-6FJ-OA	6YR-5MP-6FJ-OA	6	3/8	3/8-18	6	3/8	312-6-6	311-6-6	1 1/8	3/8	3/8	1 1 1/8	1 1/2	1 1/2
8Y-6MP-8FJ-OA	8YR-6MP-8FJ-OA	8	3/8	3/4-16	8	1/2	312-6-8	311-8-8	1 1/8	1 1/2	2 1/2	1 3/2	1 1/2	1 1/2
8Y-8MP-8FJ-OA	8YR-8MP-8FJ-OA	8	1/2	3/4-16	8	1/2	312-8-8	311-8-8	1 1/8	1 1/2	2 1/2	2 1/2	2 1/2	1 1/2
10Y-8MP-10FJ-OA	10YR-8MP-10FJ-OA	10	1/2	3/8-14	10	3/8	312-8-10	311-10-10	1 1/8	1 1/2	1"	2 3/8	2 1/2	1 1/2
12Y-12MP-12FJ-OA	12YR-12MP-12FJ-OA	12	3/4	1 1/8-12	12	3/4	312-12-12	311-12-12	1 1/8	3/8	1 1/8	2 3/8	2 1/2	3/4

For Hose O.D., Working Pressure and Complete Hose Information See Page 18

ASSEMBLIES NOT LISTED IN THE TABLES SHOWN ABOVE

In addition to the standard Y and YR assemblies shown in the tables above, special assemblies having any combination of the Single Fabric Braid "PUSH-ON" Hose Fittings, shown on page 19, are available made-up at the factory to your specifications.

To determine part numbers when ordering special assemblies follow the formula diagrammed, explained and shown at the left. Give the size and type of hose wanted (hose part number), the size and code letters of one fitting (shown in red) and the size and code letters of the

other fitting (shown in red), and the overall assembly length (O.A.) in inches. Fitting Ends are identified in Red: MP - Male Pipe; FJ-37° J.I.C. Swivel; FS-45° S.A.E. Swivel.

EXAMPLE: 12Y-12MP-12FS-18 shows the correct assembly number for the assembly shown in the diagram. It shows that this assembly is for 3/4" I.D. Single Fabric Braid Rubber Covered Hose (12Y) having a 312-12-12 Male Pipe Hose Stem (12MP) on one end and a 301-12-12 S.A.E. Swivel Hose Stem (12FS) on the other end with an overall assembly (O.A.) length of 18".



LOW PRESSURE

INDUSTRIAL • REUSABLE

HOSE FITTINGS



REUSABLE LOW-PRESSURE HOSE FITTINGS



OXYGEN & ACETYLENE FITTINGS

PAINT SPRAY
FITTINGS"PUSH-ON"
FITTINGSHOSE FITTING
ADAPTERSUNION SWIVEL
ADAPTERSLOW PRESSURE "PUSH-ON"
HOSE ASSEMBLIES

JOINERS

PIPE FITTINGS
CONNECTORS
NIPPLES
& BUSHINGS

INDIVIDUAL
FITTINGS &
ADAPTERS
ALL TYPES

■
ASSEMBLIES

■
1 & 2 RAYON
BRAID RUBBER
COVERED HOSE

■
SINGLE FABRIC
BRAID RUBBER
OR COTTON
COVERED HOSE

■
ACCESSORIES

ROUTING SLIP

Date _____

Review and Pass along as indicated

1. Management _____
2. Engineering _____
3. _____
4. Maintenance _____
5. Testing _____
6. Purchasing _____

Finally Return to: _____

LOW PRESSURE
HOSE ASSEMBLIESHOSE
STEMS

LENZ
COMPANY

P.O. Box 1044
DAYTON • OHIO
PHONE:
937/277-9364
FAX:
937/277-6516

CATALOG OF SIZES & SPECIFICATIONS

YOUR STOCKING
DISTRIBUTOR

LENZ • P.O. BOX 1044 • DAYTON, OHIO 45401-1044 • PHONE: 937/277-9364 • FAX: 937/277-6516

OFFICE & FACTORY • 3301 KLEPINGER ROAD • DAYTON, OHIO 45406-1842

INTERNET: <http://www.lenzinc.com>

Litho U.S.A.