



LED LUMINAIRES | 2018

Ningbo Luxson Lighting Co.,Ltd



lighting
Luxson

Company profile

Ningbo Luxson Lighting is a professional manufacturer and exporter of LED Lighting fixtures located in Ningbo, China. Our knowledge of LED started since year 2003, as a supplier of LED components, including Epistar, CREE, etc – we have almost 15 years experience in LED business.

Since the factory established in 2010, Luxson has been devoted to developing and providing excellent products and service and improving our manufacturing capacity. We are a medium-sized factory – with over 10,000m² workshop, 200 employees and main products LED Floodlight, Work Light, Ceiling Lamp, Bulkhead, High Bay and so on, and still expanding our categories. We are also knowledgeable about market regulations – CE/RoHS/ErP/SAA, etc. Luxson is ISO9001:2008 certified, and a BSCI(Business Social Compliance Initiative) member of European commission.

Luxson team is always ready and happy to help our clients by reliable products and positive and efficient service to do better on market. We believe honesty and responsibility and it goes to our team in building long term friendly relationship with our supplier and customers.





CATALOGUE

LED Floodlight



LED Work Light



LED High Bay



LED Bulkhead



LED Ceiling Lamp



LED Tri-proof Light



LED Street light





LED FLOODLIGHT

FL01:




Features :

- DC solution, with built-in isolated driver
- Robust body for IP65, IK08 protection
- Aluminum reflector and PC diffuser
- Up to 5 years warranty



Model	Power	Voltage	Material	Lumen	PF	Size(mm)
LS-FL01-10W	10W	100-240V	Die-cast Alu	800lm	>0.5	130x128x27
LS-FL01-20W	20W			1600lm	>0.5	180x170x32
LS-FL01-30W	30W	100-240V	Die-cast Alu	2400lm	>0.9	180x170x32
LS-FL01-50W	50W			4000lm	>0.9	290x270x41
LS-FL01-75W	75W	100-240V	Die-cast Alu	7000lm	>0.9	360x331x42
LS-FL01-100W	100W			9000lm	>0.9	360x331x42




	10W	20W	30W	50W	75W	100W
QTY.	20 PCS	16 PCS	16 PCS	5 PCS	4 PCS	4 PCS
MEAS.	35x19x28cm	47x34x20cm	47x34x20cm	38x27x30cm	44x25x37cm	44x25x37cm
G.W.	11.5kg	15kg	15.7kg	13.5 kg	17 kg	17 kg

FL01 PIR:




Motion Sensor :

- Lux : 3-2000lux
- Time delay: min: 10sec / max: 6min
- Sensitivity: 2-6m
- Override function available



Model	Power	Voltage	Material	Lumen	PF	Size(mm)
LS-FL01-10W-S	10W	100-240V	Die-cast Alu	800lm	>0.5	146x166x57
LS-FL01-20W-S	20W			1600lm	>0.5	198x229x62
LS-FL01-30W-S	30W	100-240V	Die-cast Alu	2400lm	>0.9	198x229x62
LS-FL01-50W-S	50W			4000lm	>0.9	308x270x62



	10W	20W	30W	50W
QTY.	20 PCS	10 PCS	10 PCS	5 PCS
MEAS.	31x30x18cm	42x33x25cm	42x33x25cm	29x33x33cm
G.W.	11.6kg	15kg	15.2kg	13.6 kg

FL01 RGB:



Color:

Red / Green / Blue / White

Dimming:

Yes (for white color only)


Mode:

Flash, Strobe, Fade, Smooth




Features :

Remote controller to switch on/off the lamp, to change color, dimming and set different color changing mode.



Model	Power	Voltage	Material	PF	Size(mm)
LS-FL01-10W-RGB	10W	100-240V	Die-cast Alu	>0.5	180x170x32
LS-FL01-30W-RGB	30W	100-240V		>0.9	290x270x41




	10W	30W
QTY.	16 PCS	5 PCS
MEAS.	47x34x20cm	38x27x30cm
G.W.	15.7kg	13.5 kg

FL08 :




Features :

- High Lumen output up to 100lm/w and Ra>80
- Die-cast Alu body and 5mm tempered glass reaching IK08 protection
- Angled mounting bracket for easy installation
- Textured glass for anti-glare and attractive aesthetics




Model	Power	Voltage	Material	Lumen	PF	Size(mm)
LS-FL08-10W	10W	170-250V	Die-cast Alu	1000lm	>0.5	127x102x26
LS-FL08-20W	20W			2000lm	>0.5	159x121x28
LS-FL08-30W	30W	170-250V	Die-cast Alu	3000lm	>0.9	197x145x29
LS-FL08-50W	50W			5000lm	>0.9	243x178x32
LS-FL08-75W	75W	170-250V	Die-cast Alu	7500lm	>0.9	310x238x36
LS-FL08-100W	100W			10000lm	>0.9	310x238x36




	10W	20W	30W	50W	75W	100W
QTY.	40 PCS	20 PCS	10 PCS	6 PCS	5 PCS	5 PCS
MEAS.	18.4X24.8X33cm	18.5X28.6X35cm	22.2X17.7X36cm	27X21X24.2cm	33.5X27X22.5cm	33.5X27X22.5cm
G.W.	12.2kg	10.1kg	11.3kg	9.6kg	10.4kg	10.5kg

FL08 PIR :




Motion Sensor :

- Lux : 3-2000lux
- Time delay: min: 10sec / max: 6min
- Sensitivity: 2-6m
- Override function available



Model	Power	Voltage	Material	Lumen	PF	Size(mm)
LS-FL08-10W-S	10W	170-250V	Die-cast Alu	1000lm	>0.5	125x149x45
LS-FL08-20W-S	20W			2000lm	>0.5	159x169x46
LS-FL08-30W-S	30W	170-250V	Die-cast Alu	3000lm	>0.9	197x191x48
LS-FL08-50W-S	50W			5000lm	>0.9	243x224x48



	10W	20W	30W	50W
QTY.	30 PCS	20 PCS	10 PCS	5 PCS
MEAS.	40.5x33x32cm	35x37x32cm	22x41x36cm	26x24x36cm
G.W.	10.8kg	11.2kg	12.1kg	8.2kg

FL08 Microwave :



AUTO: Automatic mode(10", 24H, 100%)

25%: 1-2M

50%: 3-5M


75%: 5-7M

100%: 8-10M

DIM; D1; D2; D3: No function


HOLD TIME: 10sec ~ 30min optional

DAYLIGHTLUX: 5 ~ 200lux and
24H(all day long) optional

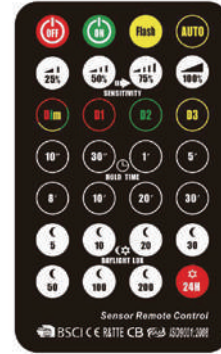


Features :

- 5.8G Microwave sensor with remote control
- Time delay, Lux and dection distance adjustable
- Memory function



Model	Power	Voltage	Material	Lumen	PF	Size(mm)
LS-FL08-10W-S	10W	220-240V	Die-cast Alu	800lm	>0.9	127x102x26
LS-FL08-20W-S	20W			1600lm	>0.9	159x121x28
LS-FL08-30W-S	30W	220-240V	Die-cast Alu	2400lm	>0.9	197x145x29
LS-FL08-50W-S	50W			4000lm	>0.9	243x178x32




	10W	20W	30W	50W
QTY.	40 PCS	20 PCS	10 PCS	6 PCS
MEAS.	18.4X24.8X33cm	18.5X28.6X35cm	22.2X17.7X36cm	27X21X24.2cm
G.W.	10.8kg	11.2kg	12.1kg	8.2kg

FL04 :




Features :

- AC solution, Driverless technology
- Die cast Alu body and tempered glass reaching IK08 protection
- Aluminum reflector and PC diffuser



Model	Power	Voltage	Material	Lumen	PF	Size(mm)
LS-FL04-10W	10W	220-240V	Die-cast Alu	700lm	>0.9	120x116x25
LS-FL04-20W	20W			1400lm	>0.9	165x170x30
LS-FL04-30W	30W	220-240V	Die-cast Alu	2100lm	>0.9	195x185x31
LS-FL04-50W	50W			3500lm	>0.9	245x226x43
LS-FL04-75W	75W	220-240V	Die-cast Alu	5250lm	>0.9	285x276x33
LS-FL04-100W	100W			7000lm	>0.9	285x276x33




	10W	20W	30W	50W	75W	100W
QTY.	20 PCS	10 PCS	10 PCS	5 PCS	5 PCS	5 PCS
MEAS.	31x18x28cm	39x23x24cm	42x23x26cm	32x26x27cm	37x31x26cm	37x31x26cm
G.W.	7.5kg	6.8kg	8.5kg	8kg	8.2 kg	12.4 kg


FL04 PIR :



- Motion Sensor :**
- Lux : 3-2000lux
 - Time delay: min: 10sec / max: 6min
 - Sensitivity: 2-6m
 - Override function available



Model	Power	Voltage	Material	Lumen	PF	Size(mm)
LS-FL04-10W-S	10W	220-240V	Die-cast Alu	700lm	>0.9	141x168x51
LS-FL04-20W-S	20W			1400lm	>0.9	186x206x56
LS-FL04-30W-S	30W	220-240V	Die-cast Alu	2100lm	>0.9	222x231x56
LS-FL04-50W-S	50W			3500lm	>0.9	271x267x64




	10W	20W	30W	50W
QTY.	10 PCS	10 PCS	10 PCS	5 PCS
MEAS.	36x33x21cm	38x42x25cm	38x46x28cm	43x33x31cm
G.W.	5kg	8kg	9.2kg	8.2kg


FL06 :



- Features :**
- AC solution, Driverless technology
 - Slim and compact design, die-cast Alu body
 - ECO line
 - Textured glass available



Model	Power	Voltage	Material	Lumen	PF	Size(mm)
LS-FL06-10W	10W	220-240V	Die-cast Alu	800/950lm	>0.9	100x96x26
LS-FL06-20W	20W			1600/1900lm	>0.9	139x110x28
LS-FL06-30W	30W	220-240V	Die-cast Alu	2400/2850lm	>0.9	160x159x30
LS-FL06-50W	50W			4000/4750lm	>0.9	208x192x31
LS-FL06-75W	75W	220-240V	Die-cast Alu	6000/7125lm	>0.9	290x252x31
LS-FL06-100W	100W			8000/9500lm	>0.9	290x252x31
LS-FL06-150W	150W	220-240V	Die-cast Alu	12000/14250lm	>0.9	390x357x42
LS-FL06-200W	200W			16000/19000lm	>0.9	390x357x42




	10W	20W	30W	50W	75W	100W	150W	200W
QTY.	80 PCS	50 PCS	30 PCS	20 PCS	10 PCS	10 PCS	5 PCS	5 PCS
MEAS.	43x36x24cm	55x21x30cm	44x43x19cm	43x36x23cm	49x31x25cm	49x31x25cm	42x35x36cm	42x35x36cm
G.W.	14.5kg	13.7kg	12.6kg	14.2kg	14.2 kg	14.2 kg	19.3 kg	19.3 kg

FL06 PIR :




Motion Sensor :

- Lux : 3-2000lux
- Time delay: min: 10sec / max: 6min
- Sensitivity: 2-6m
- Override function available



Model	Power	Voltage	Material	Lumen	PF	Size(mm)
LS-FL06-10W-S	10W	220-240V	Die-cast Alu	800/950lm	>0.9	100x155x47
LS-FL06-20W-S	20W			1600/1900lm	>0.9	139x157x50
LS-FL06-30W-S	30W	220-240V	Die-cast Alu	2400/2850lm	>0.9	160x204x58
LS-FL06-50W-S	50W			4000/4750lm	>0.9	208x219x61




	10W	20W	30W	50W
QTY.	50 PCS	30 PCS	20 PCS	10 PCS
MEAS.	60x30x38cm	44x30x40cm	35x35x47cm	45x34x25cm
G.W.	12,8kg	9,24kg	10,8kg	8,36kg

FL06 Microwave :




Microwave sensor :

- Lux: <5lx
- Time delay: 30sec
- distance: 5m



Model	Power	Voltage	Material	Lumen	PF	Size(mm)
LS-FL06-10W-MWS	10W	220-240V	Die-cast Alu	800lm	>0.9	100x96x26
LS-FL06-20W-MWS	20W			1600lm	>0.9	139x110x28
LS-FL06-30W-MWS	30W	220-240V	Die-cast Alu	2400lm	>0.9	160x159x30
LS-FL06-50W-MWS	50W			4000lm	>0.9	208x192x31



	10W	20W	30W	50W
QTY.	80 PCS	50 PCS	30 PCS	20 PCS
MEAS.	43x36x24cm	55x21x30cm	44x43x19cm	43x36x23cm
G.W.	14.5kg	13.7kg	12.6kg	14.2kg

FL06 RGB:



Color:

Red / Green / Blue / White

Dimming:



Yes (for white color only)

Mode:

Flash, Strobe, Fade, Smooth

Features :

Remote controller to switch on/off the lamp, to change color, dimming and set different color changing mode.




	10W	20W	30W	50W
QTY.	80 PCS	40 PCS	30 PCS	20 PCS
MEAS.	54x48x26cm	57x27x31cm	51x34x35cm	43x42x35cm
G.W.	14.5kg	12.7kg	12.6kg	14.2kg

FL09:




Features :

- AC solution, Driverless technology
- Super slim and compact design, stamped alu body
- Super Eco

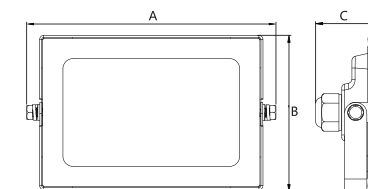

Model	Power	Voltage	Material	Lumen	PF	Size(mm)
LS-FL09-10W	10W			800lm	>0.9	62x98x40
LS-FL09-20W	20W	220-240V	Stamped Alu	1600lm	>0.9	104x140x41
LS-FL09-30W	30W			2400lm	>0.9	132x183x41
LS-FL09-50W	50W	220-240V	Stamped Alu	4000lm	>0.9	168x218x41
LS-FL09-70W	70W			5600lm	>0.9	185x249x41
LS-FL09-100W	100W	220-240V	Stamped Alu	8000lm	>0.9	233x316x44
LS-FL09-150W	150W			12000lm	>0.9	290x381x45



	10W	20W	50W	70W	100W	150W
QTY.	80 PCS	60 PCS	20 PCS	10 PCS	5 PCS	5 PCS
MEAS.	36x44x23cm	55x35x31cm	37x29x47cm	40x29x28cm	25x30x34cm	31x31x41cm
G.W.	9.9kg	17.3kg	14.7kg	9.4kg	7.4kg	11kg

LED WORK LIGHT

WL04:



Model	Power	Voltage	Material	Lumen	PF
LS-WL04-10W	10W	220-240V	Die-cast	700lm	>0.9
LS-WL04-20W	20W		Alu	1400lm	>0.9
LS-WL04-30W	30W	220-240V	Die-cast	2100lm	>0.9
LS-WL04-50W	50W		Alu	3500lm	>0.9

WL06 :



Model	Power	Voltage	Material	Lumen	PF
LS-WL06-10W	10W	220-240V	Die-cast	800lm	>0.9
LS-WL06-20W	20W		Alu	1600lm	>0.9
LS-WL06-30W	30W		Die-cast	2400lm	>0.9
LS-WL06-50W	50W	220-240V	Alu	4000lm	>0.9
LS-WL06-10WT	10Wx2		Die-cast	800lmx2	>0.9
LS-WL06-20WT	20Wx2		Alu	1600lmx2	>0.9
LS-WL06-30WT	30Wx2	220-240V	Die-cast	2400lmx2	>0.9
LS-WL06-50WT	50Wx2		Alu	4000lmx2	>0.9

WL08 :



Model	Power	Voltage	Material	Lumen	PF
LS-WL08-10W	10W	170-250V	Die-cast	1000lm	>0.5
LS-WL08-20W	20W		Alu	2000lm	>0.5
LS-WL08-30W	30W	170-250V	Die-cast	3000lm	>0.9
LS-WL08-50W	50W		Alu	5000lm	>0.9

WL07A:




Features :

- Inside cable reel for extension of max 12m mains cord;
- 2x10A sockets, can be customized;
- Switch for both lamp and sockets;
- With circuit breaker for protection and easy repair;
- Easy angle adjustable standing.



Model	Power	Voltage	Material	Lumen	PF
LS-WL07A-20W	20W			2000lm	>0.5
LS-WL07A-30W	30W	100-240V	Alu + PC	3000lm	>0.9
LS-WL07A-50W	50W			5000lm	>0.9




	20W	30W	50W
QTY.	8 PCS	8 PCS	8 PCS
MEAS.	47x34x20cm	38x27x30cm	38x27x30cm
G.W.	15.7kg	13.5 kg	13.5 kg

WL07B Rechargeable:




Features :

- Available with main charge and car charge;
- 3-Steps power output: 100%, 50% and 25%;
- USB port as power bank;
- 3h working time(100%), with battery status indicator;
- Battery pack replaceable.
- Magnetic base available
- SOS available



Model	Power	Battery	Working time	Charging time	Lumen
LS-WL07B-10W	10W	3.7V 2400mA	3h(100%)-6h(50%)-12h(25%)	5h	800lm
LS-WL07B-20W	20W	3.7V 2400mA x2	3h(100%)-6h(50%)-12h(25%)	5h	1600lm



	10W	20W
QTY.	20 PCS	10 PCS
MEAS.	47x34x20cm	38x27x30cm
G.W.	15.7kg	13.5 kg




HB01:




Features :

- Strong and robust body and PC diffuser, with IP65, IK10 protection
- Driver by Inventronics, 4KV surge protection
- LED chip by Philips SMD3030, up to 135lm/W, Ra>80
- Optical lens for 60° or 90° available
- 5 years warranty

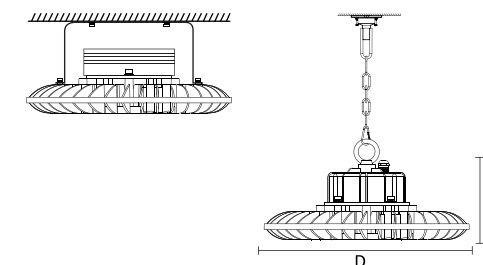

Model	Power	Voltage	Material	Lumen	PF	Size(mm)
LS-HB01-100W	100W	100-240V	Die-cast Alu	13500lm	>0.95	260x162
LS-HB01-150W	150W			20250lm	>0.95	307x177
LS-HB01-200W	200W			27000lm	>0.95	360x177




	100W	150W	200W
QTY.	4 PCS	4 PCS	2 PCS
MEAS.	56x28x28.5cm	58x32.5x33cm	60x38x20cm
G.W.	11kg	15.8kg	10kg

HB02:




Features :

- Slim design and compact size, IP65, IK08 protection
- Optional available with Inventronics driver, 4KV surge protection
- Optional available with Philips SMD3030, 100~120lm/W
- 2~5 years warranty

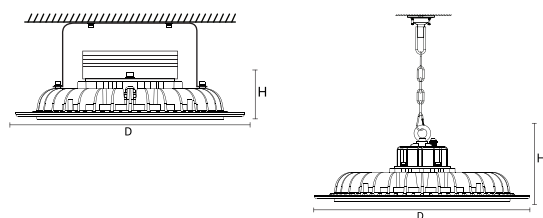

Model	Power	Voltage	Material	Lumen	PF	Size(mm)
LS-HB02-100W	100W	100-240V	Die-cast Alu	10000lm	>0.95	260x104
LS-HB02-150W	150W			15000lm	>0.95	300x113
LS-HB02-200W	200W			20000lm	>0.95	360x113




	100W	150W	200W
QTY.	10 PCS	5 PCS	4 PCS
MEAS.	55x62x28.5cm	32.5x64.5x32.5cm	38.5x38x38.5cm
G.W.	14.5kg	13.1kg	15.8kg

HB02:




Features :

- Slim and compact design, IP65, IK08 protection
- AC solution, driverless technology

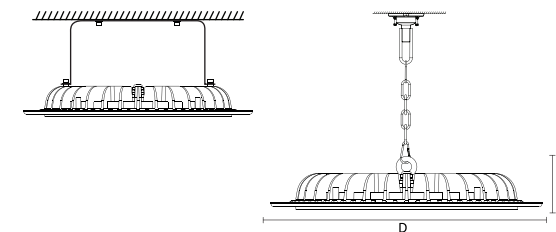

Model	Power	Voltage	Material	Lumen	PF	Size(mm)
LS-HB02-50W	50W	200-240V	Die-cast Alu	4500lm	>0.9	220*35
LS-HB02-100W	100W			9000lm	>0.9	260*35
LS-HB02-150W	150W	220-240V	Die-cast Alu	13500lm	>0.9	300*35
LS-HB02-200W	200W			18000lm	>0.9	360*35



	50W	100W	150W	200W
QTY.	10 PCS	10 PCS	10 PCS	5 PCS
MEAS.	56x28x28.5cm	48x28x28cm	48x32x32cm	38x30x38cm
G.W.	9.2kg	10.6kg	15kg	12.7kg

LED Bulkhead :



Microwave sensor :

- Lux: <5lx
- Time delay: 60sec
- distance: 5m




Sound sensor:

- Lux: <5lx
- Time delay: 30 sec
- Volume: 65db


Features :

- AC solution, driverless technology
- Compact size with anti UV plastic housing, IP65 protection
- Easy installation, no open
- Available with microwave sensor and sound sensor

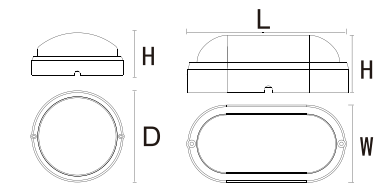

LED BULKHEAD

Model	Power	Voltage	Material	Lumen	PF	Size(mm)
LS-BL-O-8W	8W	220-240V	Plastic	640lm	>0.5	178x86x57
LS-BL-O-12W	12W			960lm	>0.5	178x86x57
LS-BL-O-15W	15W			1200lm	>0.5	202x99x57
LS-BL-O-18W	18W	220-240V	Plastic	1440lm	>0.5	202x99x57
LS-BL-C-8W	8W			640lm	>0.5	D159x62
LS-BL-C-12W	12W			960lm	>0.5	D159x62
LS-BL-C-15W	15W			1200lm	>0.5	D174x62
LS-BL-C-18W	18W			1440lm	>0.5	D174x62





	O-8/12W	O-15/18W	C-8/12W	C-15/18W
QTY.	80 PCS	60 PCS	60 PCS	40 PCS
MEAS.	51.6x47x38.6cm	54.5x39.2x43.4cm	66.8x34.5x50.6cm	67x37.4x37.4cm
G.W.	11.1kg	11kg	10.3kg	8.38kg

CL01:




Features :

- Classic design, metal base and PMMA diffuser
- Easy installation, twist and lock mechanism
- Insect resistant seal



LED CEILING LAMP

Model	Power	Voltage	Material	Lumen	PF	Size(mm)
LS-CL1-12W	12W			840lm	>0.5	D260x90
LS-CL1-18W	18W	220-240V	Metal+PMMA	1260lm	>0.5	D330x105
LS-CL1-24W	24W			1680lm	>0.5	D380x105



	12W	18W	24W
QTY.	20 PCS	10 PCS	10 PCS
MEAS.	54x47x54cm	71x57x36.5cm	81x62x41.5cm
G.W.	17.5kg	11.7kg	13.4kg

CL01:



Microwave Sensor :


- Lux : 3-2000lux
- Time delay: min: 10sec / max: 15min
- Sensitivity: 3-10m

Features :

- 5.8G Microwave sensor
- Time delay, Lux and dection distance adjustable



Model	Power	Voltage	Material	Lumen	PF	Size(mm)
LS-CL1-12W	12W	220-240V	Metal+PMMA	840lm	>0.5	D260x90
LS-CL1-18W	18W			1260lm	>0.5	D330x105
LS-CL1-24W	24W			1680lm	>0.5	D380x105




	12W	18W	24W
QTY.	20 PCS	10 PCS	10 PCS
MEAS.	54x47x54cm	71x57x36.5cm	81x62x41.5cm
G.W.	17.5kg	11.7kg	13.4kg

CL02:




Features :

- Classic shape but slim design, metal base and PMMA diffuser
- Easy installation, twist and lock mechanism
- Insect resistant seal

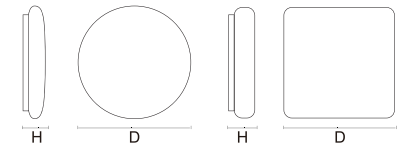

Model	Power	Voltage	Material	Lumen	PF	Size(mm)
LS-CL2-12W-C	12W	220-240V	Metal+PMMA	840lm	>0.5	D265x60
LS-CL2-18W-C	18W			1260lm	>0.5	D330x65
LS-CL2-24W-C	24W			1680lm	>0.5	D380x65
LS-CL2-32W-C	32W	220-240V	Metal+PMMA	2240lm	>0.9	D380x65
LS-CL2-12W-S	12W			840lm	>0.5	280x280x60
LS-CL2-18W-S	18W			1260lm	>0.5	330x330x60
LS-CL2-24W-S	24W			1680lm	>0.5	380x380x60
LS-CL2-32W-S	32W			2240lm	>0.9	380x380x60



	12W	18W	24/32W	12W	18W	24/32W
QTY.	10 PCS	10 PCS	10 PCS	10 PCS	10 PCS	10 PCS
MEAS.	55x47x55cm	72x34x35cm	73x39x40cm	58x34x58cm	68x34x35cm	73x39x40cm
G.W.	9.4kg	11.4kg	13.4kg	9.4kg	11.4kg	13.4kg


LED TRI-PROOF LIGHT

TP-D:




Features :

- AC solution, driverless technology
- Compact size with anti-UV PC housing, IP65 protection
- Easy installation and wire connection with terminal block



Model	Power	Voltage	Material	Lumen	PF	Size(mm)
LS-TP-D-18W	18W			1440lm	>0.5	600x48x30
LS-TP-D-36W	36W	220-240V	PC+PC	2880lm	>0.9	1200x48x30
LS-TP-D-45W	45W			3600lm	>0.9	1500x48x30




	18W	36W	45W
QTY.	30 PCS	30 PCS	30 PCS
MEAS.	70.5x29x24.5cm	128.5x29x24.5cm	158.5x29x24.5cm
G.W.	8.2kg	13.5kg	16.5kg

TP-A:




Features :

- DC solution, with built-in isolated driver
- Anti-UV PC housing, IP65, IK08 protection
- Easy installation and wire connection with terminal block
- Aluminum reflector inside



Model	Power	Voltage	Material	Lumen	PF	Size(mm)
LS-TP-A-18W	18W	220-240V	PC + PC	1620lm	>0.5	610x50x49
LS-TP-A-36W	36W			3240lm	>0.9	1210x50x49
LS-TP-A-45W	45W			4050lm	>0.9	1510x50x49



	18W	36W	45W
QTY.	12 PCS	12 PCS	12 PCS
MEAS.	67x23x20cm	127x23x20cm	156.5x23x20cm
G.W.	8.2kg	13.5kg	16.5kg





TP-C:




Features :

- DC solution, with built-in isolated driver
- Anti-UV PC housing, IP65, IK08 protection
- Easy installation and wire connection with terminal block
- Aluminum reflector inside




Model	Power	Voltage	Material	Lumen	PF	Size(mm)
LS-TP-C-10W	10W	220-240V	PC + PC	900lm	>0.5	580x60x66
LS-TP-C-18W	18W			1620lm	>0.5	1140x60x66
LS-TP-C-24W	24W			2160lm	>0.5	1480x60x66
LS-TP-C-18W	18W	220-240V	PC + PC	1620lm	>0.5	580x75x66
LS-TP-C-36W	36W			3240lm	>0.9	1140x75x66
LS-TP-C-50W	50W			4500lm	>0.9	1480x75x66




	10W	18W	24W	18W	36W	50W
QTY.	12 PCS	12 PCS	9 PCS	9 PCS	9 PCS	12 PCS
MEAS.	63x28x23.5cm	119x28x23.5cm	153x28x23.5cm	63x25x23.5cm	119x25x23.5cm	153x25x23.5cm
G.W.	8.2kg	13.5kg	16.5kg	8.2kg	13.5kg	16.5kg

LED STREET LIGHT

LED Street light :



Model	Power	Voltage	Material	Lumen	PF	Size(mm)
LS-SL01-70W	70W	100-240V	Die-cast Alu	6300lm	>0.9	195x395x67
LS-SL01-100W	100W			10000lm	>0.9	240x450x67
LS-SL01-150W	150W			15000lm	>0.9	295x575x79



	70W	100W	150W
QTY.	5 PCS	5 PCS	2 PCS
MEAS.	42x39x22cm	47.5x39x26.5cm	60x19x32cm
G.W.	9.8kg	12.75kg	6.54kg



lighting
Luxson

Ningbo Luxson Lighting Co.,Ltd

Add:Zhenhai Economic Develop Zone,Ningbo,China
Tel: 0086-(0)574-56800316 Fax: 0086-(0)574-56800318
Email: sales@luxsonled.com www.luxsonled.com