



Your Reliable Power Partner

Standard Switching Power Supply Manufacturer



2011
April

Green Power *for* A Better Tomorrow

As a leading branded standard switching power supply manufacturer, MEAN WELL has planned to dedicate in green energy power solutions in responding to the global environment protection awareness raised. The green energy related products including LED power supply, green adaptor, DC/AC solar inverter, and green battery charger will be the main focus of MEAN WELL's product roadmap.

Here are four featured product families for your quick information:

LED Power Supply

From 12W to 320W with hundreds of models, features with high efficiency (up to 95%) and high reliability (up to 5 years warranty), our LED power family are good solutions for various LED-based applications.

Notice:
The product information of the LED family has been put to a separate LED catalog.

Please refer to LED catalog



Green Battery Charger

GC series (30~220W)

Possessing very low "no load power consumption" and up to 94% of high efficiency, the whole series are real energy-saving at both standby mode and active mode, which could be rated as the most "green" battery charger in the market.

Page 49



Green Adaptor

GS series (5~220W)

GS series products are designed by state of the art circuit topology to achieve high efficiency and low no load power consumption in the same time. Full product series comply with EISA 2007 as well as ErP step 2.

Page 50~54



DC/AC Solar Inverter

TN series(1500~3000W)

Consolidating with solar panels and remote controller (IRC3), TN series can construct an independent solar power system to save the precious energy.

Page 80



■ Enclosed Switching Power Supply

G3 Series	RS-15 / 25 / 35 / 50 / 75 / 100 / 150 RD-35 / 50 / 65 / 85 / 125 RID-50 / 65 / 85 / 125, RT-50 / 65 / 85 / 125 RQ-50 / 65 / 85 / 125	2~3
NE Series	NES-15 / 25 / 35 / 50 / 75 / 100 / 150 NED-35 / 50 / 75 / 100, NET-35 / 50 / 75 NES-200 , NES-350	4~5
SE Series	SE-200 , SE-350 , SE-450 SE-600, SE-1000, SE-1500 QP-1000	6 7
G2 Series	S-25, S-40, S-60, S-100F, S-150 S-210, S-250, S-320 SP-400 D-60, ID-60, T-60, IT-60, Q-60, IQ-60 D-120, T-120, Q-120, Q-250, T-40	8 9 10 11
PFC Series	SP-75, SP-100, SP-150, SP-200, SP-240 SP-320, SP-480, SP-500, SP-750 PSP-600, RSP-1000, RSP-1500, RSP-2000 RSP-2400, RSP-3000, HSP-150 , HSP-250 TP-75, TP-100, QP-100, TP-150, QP-150, QP-200, QP-320, QP-375 HRP-75, HRP-100, HRP-150, HRP-200 HRP-300, HRP-450, HRP-600 SPV-150, SPV-300, SPV-600 , SPV-1500	12 13 14 15 16~17 18 19 20
U-bracket	USP-150 , USP-225, USP-350, USP-500	21
19" Rack Power	RCP-1000, RCP-1U, RCP-2000 , RKP-1U RCP-MU, RCP-CMU	22 23
Modular Series	MP450, MP650, MP1K0 MS-75 / 150 / 300, MD-100	24~25
DIN Series	MDR-10 / 20 / 40 / 60 / 100 DR-15, DR-30, DR-60, DR-100 DR-45, DR-75, DR-120, DRP-240, DRP-480, DRP-480S DRH-120, DRT-240, DRT-480, DRT-960 WDR-120, WDR-240 , WDR-480 SDR-120, SDR-240, SDR-480 P DR-RDN20, DR-UPS40	26 27 28 29 30 31 32

■ Open Frame Switching Power Supply

Medical Type	PM-05, PM-10, PM-15, PM-20 NFM-05, NFM-10, NFM-15, NFM-20 MPS-30, MPS-45, MPD-45, MPT-45 RSD-150/200/300 RPS-60, RPD-60, RPT-60 MPS-65, MPD-65, MPT-65 RPS-75, RPD-75, RPT-75, RPS-160, RPD-160, RPT-160 MPS-120, MPD-120, MPT-120, MPQ-120 MPS-200, MPD-200, MPT-200, MPQ-200	33 34 35 36 37 38
General Type	PS-05, PS-15, PS-25, PD-25 PS-35, ELP-75 C , PS-45, PD-45, PT-45 PT-4503, PT-6503, PS-65, PD-65, PT-65 RPD-65, RPT-65, PD-110, PQ-100 PPQ-100, PPS-125, PPT-125 ASP-150, PPS-200, PID-250 LPS-50, LPS-75, LPS-100, LPP-100, LPP-150	39 40 41 42 43 44 45

■ External Switching Power Supply

Charger	PA-120, PB-120, PS-120 ESC-120, ESP-120, ESC-240, ESP-240, PB-230, PB-300 PB-360, PB-600, PB-1000 2/3/8 Stage Charging GC30B, GC30U, GC30E, GC120, GC160, GC220	46 47 48 49
----------------	---	----------------------

■ External Switching Power Supply

Green Adaptor	GS06U, GS06E, GS12U, GS12E, GS15A, GS15B, GS15U, GS15E GE12, GE18, GE24 Interchangeable AC Inlet Plug GS18A, GS18B, GS18U, GS18E, GS25A, GS25B, GS25U, GS25E GS40, GS60, GS90, GS120 GS160, GS220, GS05U-USB ErP Compliance List	50 51 52 53 54
Adaptor	P25A, P25B, P50A DC Plug List MES30A, MES30B, MES30C, MES50A	55 56

■ Specific Purpose Power Supply

Security Series	SCP-35, SCP-50, SCP-75, PSC-60 C , PSC-100 C ADS-55, ADS-155, AD-55, AD-155, ADD-55, ADD-155	57 58
Video Game	MWP-602, MWP-606, MWP-608, MWP-610 P	59
ATX Power	ATX-100 IPC-200, IPC-250, IPC-300 YP-350A, YP-400A, YP-450A, YP-350J	59 60

■ DC/DC Converter

Module Type	SRS, SUS01 SBT01, SFT01, DET01 SPR01, SMU01, SMA01 SPU02, SPA02, SPB03 SCW03, DCW03, SCW05, DCW05 SLW05, DLW05, SCW08, DCW08 SKE10, DKE10, SCW12, DCW12 SKM15 , SKA15, DKA15 SKE15, DKE15, DKA30, TKA30 SDM30, SKA40	61 62 63 64 65 66 67 68 69 70
On Board Type	NSD05, NSD10-S, NSD10-D NSD15-S, NSD15-D, NID30, NID60	71 72
PCB Type	PSD-05, PSD-15, PSD-30, PSD-45	73
Enclosed Type	SD-15, SD-25, SD-50, SD-100 SD-150, SD-200, SD-350, SD-500 SD-1000, RSD-100	74 75 76

■ DC/AC Power Inverter


Independent Solar Inverter	ISI-500	76
Modified Sine Wave	A301-100 / 150 / 300 / 600 / 1K0 / 1K7 / 2K5 A302-100 / 150 / 300 / 600 / 1K0 / 1K7 / 2K5	77
True Sine Wave	TS-200, TS-400, TS-700 AC Output Receptacle TS-1000, TS-1500, TS-3000 , IRC1 / 2 TN-1500, TN-3000 , IRC3	78 79 80

LED Series	Introduction of LED Power Family	81
-------------------	----------------------------------	----

■ Accessories / Case Drawing

Case Drawing	Case 901 / 902 / 903 / 905 / 906 / 907 Case 910/912(B)/915A/916(A/B)/919/920A Case 926 / 927 / 928 / 929 / 931 / 932 Case 935 / 939 / 940 / 941 / 943 / 946A Case 952B / 963 / 971A / 977A / 980A / 986 Case 987A / 988 / 995 / 996A / 998A / 999	82 83 84 85 86 87
Accessories	DRL-01 / 02 / 03 / 03A, DRP-01 / 02 / 03 MHS012 / 013 / 014 / 025 / 026 / 027 TBC05 / 07 / 08	88

	: New Announced		: Available by Request
	: New Product within 1 Year		: Supplementary Information
	: Under Development		

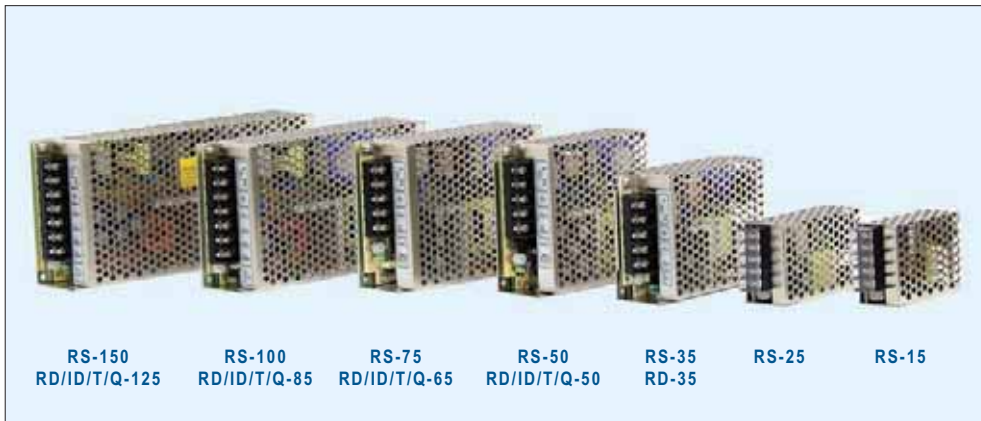

■ Features

- No load power consumption <0.5W (RS-15~75)
- All using 105°C long life electrolytic capacitors
- Protections: Short circuit / Overload / Over voltage / Over Temp. (RS-15)
- Meet EMS EN50082-2/EN61000-6-2 heavy industry level (35~150W)
- Withstand 300VAC surge input for 5 sec.
- High operating temperature up to 70°C
- Withstand 5G vibration test
- Miniature size, high power density
- High efficiency, long life and high reliability
- LED indicator for power on
- 100% full load burn-in test
- Suitable for critical applications
- 3 years warranty

■ General Specification (Please refer to www.meanwell.com for detail spec.)



Model No.	RS-15	RS-25	RS-35 RD-35	RS-50 RD / ID / T / Q-50	RS-75 RD / ID / T / Q-65	RS-100 RD / ID / T / Q-85	RS-150 RD / ID / T / Q-125
AC input voltage range	85~264VAC, 120~370VDC	88~264VAC, 124~370VDC					115 / 230VAC by switch
AC inrush current (max.)	Cold start, 65A at 230VAC	30A at 230VAC	36A at 230VAC	33A at 230VAC	40A at 230VAC		
DC adjustment range	±10% by potential meter for single output; CH1 -5%~+10% by potential meter for multiple output						
Overload protection	>105%, hiccup mode	110%~180%	110%~150% hiccup mode, auto-recovery (150% ~190% for RID-125-1205/2405)				
Over voltage protection	115%~135%, Shut off	115%~135% rated output voltage, hiccup mode, auto-recovery					
Withstand voltage	I/P - O/P: 3kVAC, I/P - FG: 1.5kVAC, O/P - FG: 0.5kVAC, 1 minute						
Working temperature	-20°C~+70°C		-25°C~+70°C (refer to the derating curve for different models)				
Vibration	10~500Hz, 5G 10min/1 cycle, period for 60 min each along X, Y, Z axes						
Safety standards	UL60950-1, TUV EN60950-1 approved						
EMC standards	EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, ENV50204, EN61000-6-2 (EN50082-2) (35~150W)						
Connection	Terminal block for input and output						
Dimension (LxWxH)(mm)	62.5x 51x 28	78x 51x 28	99x 82x 36	99x 97x 36	129x 97x 38	159x 97x 38	199x 98x 38
Case No.	971A	931A	932A	905B	903	901C	902A
Packing	108pcs /15.0kg	60pcs /13.0kg	45pcs /14.0kg	45pcs /19.5kg	30pcs /13.3kg	24pcs /15.4kg	20pcs /15kg

■ 15W — Single Output

Model No.	Output	Tol.	R&N	Effi.
RS-15-3.3	3.3V, 0~3.0A	±3%	80mV	72%
RS-15-5	5V, 0~3.0A	±2%	80mV	77%
RS-15-12	12V, 0~1.3A	±1%	120mV	81%
RS-15-15	15V, 0~1.0A	±1%	120mV	81%
RS-15-24	24V, 0~0.625A	±1%	200mV	82%
RS-15-48	48V, 0~0.313A	±1%	200mV	82%

RS-50-15	15V, 0~3.4A	±1%	120mV	86.0%
RS-50-24	24V, 0~2.2A	±1%	120mV	88.0%
RS-50-48	48V, 0~1.1A	±1%	200mV	89.0%

■ 75W — Single Output

Model No.	Output	Tol.	R&N	Effi.
RS-75-3.3	3.3V, 0~15A	±3%	80mV	75.0%
RS-75-5	5V, 0~12A	±2%	80mV	79.0%
RS-75-12	12V, 0~6.0A	±1%	120mV	84.5%
RS-75-15	15V, 0~5.0A	±1%	120mV	86.0%
RS-75-24	24V, 0~3.2A	±1%	120mV	88.5%
RS-75-48	48V, 0~1.6A	±1%	200mV	89.5%

■ 100W — Single Output

Model No.	Output	Tol.	R&N	Effi.
RS-100-3.3	3.3V, 0~20A	±3%	80mV	74%
RS-100-5	5V, 0~16A	±2%	80mV	77%
RS-100-12	12V, 0~8.5A	±1%	120mV	81%
RS-100-15	15V, 0~7.0A	±1%	120mV	82%
RS-100-24	24V, 0~4.5A	±1%	120mV	84%
RS-100-48	48V, 0~2.3A	±1%	200mV	84%

■ 150W — Single Output

Model No.	Output	Tol.	R&N	Effi.
RS-150-3.3	3.3V, 0~30A	±3%	80mV	74%
RS-150-5	5V, 0~26A	±2%	80mV	78%
RS-150-12	12V, 0~12.5A	±1%	120mV	83%
RS-150-15	15V, 0~10A	±1%	120mV	84%
RS-150-24	24V, 0~6.5A	±1%	120mV	86%
RS-150-48	48V, 0~3.3A	±1%	200mV	87%

■ 25W — Single Output

Model No.	Output	Tol.	R&N	Effi.
RS-25-3.3	3.3V, 0~6.0A	±3%	80mV	73.5%
RS-25-5	5V, 0~5.0A	±2%	80mV	78.5%
RS-25-12	12V, 0~2.1A	±1%	120mV	81.5%
RS-25-15	15V, 0~1.7A	±1%	120mV	83.5%
RS-25-24	24V, 0~1.1A	±1%	120mV	86.0%
RS-25-48	48V, 0~0.57A	±1%	200mV	85.0%

■ 35W — Single Output

Model No.	Output	Tol.	R&N	Effi.
RS-35-3.3	3.3V, 0~7.0A	±3%	80mV	76.5%
RS-35-5	5V, 0~7.0A	±2%	80mV	80.5%
RS-35-12	12V, 0~3.0A	±1%	120mV	84.5%
RS-35-15	15V, 0~2.4A	±1%	120mV	86.0%
RS-35-24	24V, 0~1.5A	±1%	120mV	88.0%
RS-35-48	48V, 0~0.8A	±1%	200mV	88.5%

■ 50W — Single Output

Model No.	Output	Tol.	R&N	Effi.
RS-50-3.3	3.3V, 0~10A	±3%	80mV	78.0%
RS-50-5	5V, 0~10A	±2%	80mV	83.0%
RS-50-12	12V, 0~4.2A	±1%	120mV	84.5%

Enclosed-G3 Series



35W — Dual Output

Model No.	Output	Tol.	R&N	Effi.	Max.
RD-35A	5V, 0.3~4.0A	±2%	80mV	79%	32W
	12V, 0.2~1.0A	±6%	120mV		
RD-35B	5V, 0.3~4.0A	±2%	80mV	82%	35W
	24V, 0.2~1.3A	±5%	120mV		
RD-3513	13.5V, 0.3~2.0A	±4%	120mV	80%	35W
	-13.5V, 0.2~0.57A	±4%	120mV		

50W — Dual Output (Output isolated for RID-50A/B)

Model No.	Output	Tol.	R&N	Effi.	Max.
RD-50A	5V, 0.3~6.0A	±2%	80mV	79%	54W
	12V, 0.3~3.0A	±7%	120mV		
RD-50B	5V, 0.3~6.0A	±2%	80mV	80%	54W
	24V, 0.2~2.0A	+8%, -4%	120mV		

65W — Dual Output (Output isolated for RID-65A/B)

Model No.	Output	Tol.	R&N	Effi.	Max.
RD-65A	5V, 0.3~8.0A	±2%	80mV	79%	66W
	12V, 0.2~4.0A	±6%	120mV		
RD-65B	5V, 0.3~8.0A	±2%	80mV	78%	68W
	24V, 0.2~3.0A	+4%, -6%	150mV		

85W — Dual Output (Output isolated for RID-85A/B)

Model No.	Output	Tol.	R&N	Effi.	Max.
RD-85A	5V, 2.0~10A	±2%	80mV	78%	88W
	12V, 0.3~5.0A	±5%	120mV		
RD-85B	5V, 2.0~10A	±2%	80mV	80%	88W
	24V, 0.3~2.5A	±5%	120mV		

125W — Dual Output

Model No.	Output	Tol.	R&N	Effi.	Max.
RD-125A	5V, 2.0~15A	±5%	80mV	82%	131W
	12V, 0.5~10A	±7%	120mV		
RD-125B	5V, 2.0~10A	±5%	80mV	85%	133W
	24V, 0.4~5.0A	±7%	120mV		

125W — Dual Output (Output isolated for RID-125)

Model No.	Output	Tol.	R&N	Effi.	Max.
RD-125-1224	12V, 1.0~7.0A	±2%	120mV	85%	133W
	24V, 0.4~5.0A	+8%, -5%	200mV		
*RD-125-2412	24V, 0.5~5.0A	±2%	200mV	85%	133W
	12V, 1.0~7.0A	±10%	120mV		
RD-125-1248	12V, 1.0~7.0A	±2%	120mV	86%	138W
	48V, 0.2~2.5A	+8%, -5%	240mV		
*RD-125-4812	48V, 0.3~2.5A	±2%	240mV	86%	138W
	12V, 1.0~7.0A	±10%	120mV		
RD-125-2448	24V, 0.5~4.0A	±1%	200mV	86%	144W
	48V, 0.2~2.5A	±4%	240mV		
*RD-125-4824	48V, 0.3~2.5A	±1%	240mV	86%	144W
	24V, 0.5~4.0A	±8%	240mV		
RID-125-1205	12V, 2.0~10.5A	±2%	120mV	80%	125W
	5V, 0.0~3.0A	±3%	80mV		
RID-125-2405	24V, 2.0~5.3A	±2%	120mV	83%	125W
	5V, 0.0~3.0A	±3%	80mV		

*Modified

50W — Quad Output (RT-50 without -5V or -12V output)

Model No.	Output	Tol.	R&N	Effi.	Max.
RQ-50B	5V, 0.5~6.0A	±2%	80mV	74%	46W
	12V, 0.2~1.5A	±6%	120mV		
	-5V, 0.0~1.0A	±2%	100mV		
	-12V, 0.0~1.0A	±2%	80mV		
RQ-50C	5V, 0.5~6.0A	±2%	80mV	75%	50W
	15V, 0.2~1.5A	±6%	120mV		
	-5V, 0.0~1.0A	±2%	100mV		
	-15V, 0.0~1.0A	±2%	80mV		
RQ-50D	5V, 0.5~6.0A	±6%	80mV	79%	53W
	12V, 0.2~1.5A	±6%	120mV		
	24V, 0.1~1.0A	+7%, -5%	180mV		
	-12V, 0.0~1.0A	±2%	80mV		

65W — Quad Output (RT-65 without -5V or -12V output)

Model No.	Output	Tol.	R&N	Effi.	Max.
RQ-65B	5V, 0.5~8.0A	±2%	80mV	76%	63W
	12V, 0.2~3.0A	+7%, -5%	120mV		
	-5V, 0.0~1.0A	±5%	80mV		
	-12V, 0.0~1.0A	±5%	80mV		
RQ-65C	5V, 0.5~8.0A	±2%	80mV	76%	65W
	15V, 0.2~3.0A	+8%, -4%	120mV		
	-5V, 0.0~1.0A	±5%	80mV		
	-15V, 0.0~1.0A	±5%	80mV		
RQ-65D	5V, 0.5~8.0A	±2%	80mV	78%	68W
	12V, 0.2~3.0A	±6%	120mV		
	24V, 0.1~1.5A	±8%	180mV		
	-12V, 0.0~1.0A	±5%	80mV		

85W — Quad Output (RT-85 without -5V or -12V output)


Model No.	Output	Tol.	R&N	Effi.	Max.
RQ-85B	5V, 2.0~10A	±2%	80mV	76%	81W
	12V, 0.3~4.0A	+7%, -3%	120mV		
	-5V, 0.0~1.0A	±8%	100mV		
	-12V, 0.0~1.0A	±5%	80mV		
RQ-85C	5V, 2.0~10A	±2%	80mV	77%	83W
	15V, 0.3~4.0A	+3%, -7%	120mV		
	-5V, 0.0~1.0A	±8%	100mV		
	-15V, 0.0~1.0A	±5%	80mV		
RQ-85D	5V, 2.0~10A	±2%	80mV	78%	84W
	12V, 0.3~4.0A	+7%, -3%	120mV		
	24V, 0.1~1.5A	±8%	150mV		
	-12V, 0.0~1.0A	±5%	80mV		

125W — Quad Output (RT-125 without -5V or -12V output)

Model No.	Output	Tol.	R&N	Effi.	Max.
RQ-125B	5V, 2.0~12A	±2%	80mV	79%	120W
	12V, 0.5~4.5A	+8%, -3%	120mV		
	-5V, 0.1~1.0A	+6%, -10%	80mV		
	-12V, 0.0~1.0A	±5%	80mV		
RQ-125C	5V, 2.0~12A	±2%	80mV	80%	123W
	15V, 0.5~4.0A	+8%, -3%	120mV		
	-5V, 0.1~1.0A	+6%, -10%	80mV		
	-15V, 0.0~1.0A	±5%	80mV		
RQ-125D	5V, 2.0~12A	±2%	80mV	82%	124W
	12V, 0.5~4.0A	+8%, -3%	120mV		
	24V, 0.1~2.5A	±8%	150mV		
	-12V, 0.0~1.0A	±5%	80mV		

Enclosed-NE Series

15~350W Miniature

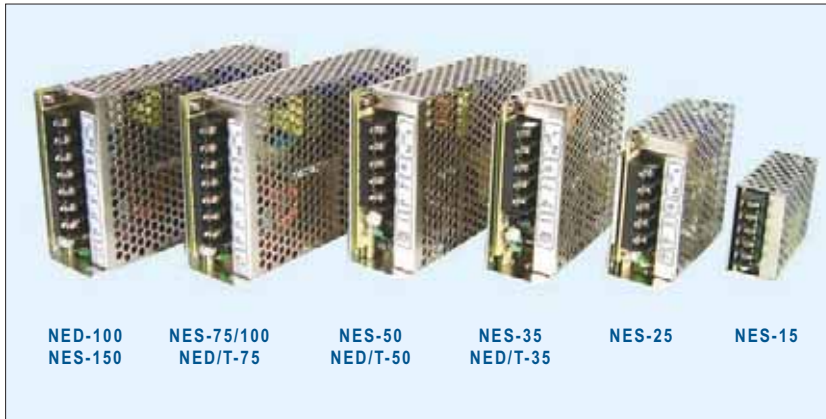

Features

- Universal AC input / Full range (NES/D-100, NES-150 AC input selectable by switch)
- Protections: Short circuit / Overload / Over voltage
- Built-in over temperature protection for NES-15
- Cooling by free air convection
- Small size, high power density
- Low cost, high reliability
- 100% full load burn-in test
- Most economical low wattage solution with safety certificates
- 2 years warranty

General Specification (Please refer to www.meanwell.com for detail spec.)



Model No.	NES-15	NES-25	NES-35 NED/T-35	NES-50 NED/T-50	NES-75 NED/T-75	NES-100	NES-150 NED-100
AC input voltage range	85~264VAC, 120~370VDC					115/230VAC by switch	
AC inrush current (max.)	Cold start, 45A at 230VAC					36A at 230VAC	45A at 230VAC
DC adjustment range	±10% by potential meter for single output; CH1 -5~+10% by potential meter for multiple output					-5%~+10% (NES-100/150) CH1 -5%~+10% (NED-100)	
Overload protection	>105%	110%~150% hiccup mode, auto-recovery					
Over voltage protection	115%~135% rated output voltage, shut off					115%~135% hiccup mode, auto-recovery	
Withstand voltage	I/P - O/P: 3kVAC, I/P - FG: 1.5kVAC, O/P - FG: 0.5kVAC, 1 minute						
Working temperature	-20 ~ +60°C (refer to the derating curve for different models)						
Vibration	10~500Hz, 2G 10min/1 cycle, period for 60 min each along X, Y, Z axes						
Safety standards	UL60950-1, EN60950-1(NES-150 only), GB4943(NES only) approved, also design refer to TUV EN60950-1						
EMC standards	EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, ENV50204, GB9254(NES only)						
Connection	Terminal block for input and output						
Dimension (LxWxH)(mm)	78x 51x 28	99x 82x 35	99x 97x 36	129x 98x 38	159x 97x 38	159x 97x 38	199x 98x 38
Case No.	931A	932B	905	903	901	901	902
Packing	60pcs/11.8kg	45pcs/14.5kg	45pcs/17.2kg	45pcs/21kg	30pcs/16.6kg	30pcs/17.5kg	20pcs/15kg

15W — Single Output

Model No.	Output	Tol.	R&N	Effi.
NES-15-5	5V, 0~3.0A	±2%	150mV	79%
NES-15-12	12V, 0~1.3A	±1%	150mV	81%
NES-15-15	15V, 0~1.0A	±1%	150mV	81%
NES-15-24	24V, 0~0.7A	±1%	200mV	85%
NES-15-48	48V, 0~0.35A	±1%	240mV	82%

25W — Single Output

Model No.	Output	Tol.	R&N	Effi.
NES-25-5	5V, 0~5.0A	±2%	80mV	78%
NES-25-12	12V, 0~2.1A	±1%	120mV	83%
NES-25-15	15V, 0~1.7A	±1%	150mV	84%
NES-25-24	24V, 0~1.1A	±1%	200mV	86%
NES-25-48	48V, 0~0.57A	±1%	240mV	86%

35W — Single Output

Model No.	Output	Tol.	R&N	Effi.
NES-35-5	5V, 0~7.0A	±2%	80mV	78%
NES-35-12	12V, 0~3.0A	±1%	120mV	81%
NES-35-15	15V, 0~2.4A	±1%	150mV	83%
NES-35-24	24V, 0~1.5A	±1%	200mV	85%
NES-35-48	48V, 0~0.8A	±1%	240mV	86%

50W — Single Output

Model No.	Output	Tol.	R&N	Effi.
NES-50-5	5V, 0~10A	±2%	80mV	79%
NES-50-12	12V, 0~4.2A	±1%	120mV	82%
NES-50-15	15V, 0~3.4A	±1%	150mV	83%
NES-50-24	24V, 0~2.2A	±1%	200mV	86%
NES-50-48	48V, 0~1.1A	±1%	240mV	87%

75W — Single Output

Model No.	Output	Tol.	R&N	Effi.
NES-75-5	5V, 0~14A	±2%	80mV	77%
NES-75-12	12V, 0~6.2A	±1%	120mV	82%
NES-75-15	15V, 0~5.0A	±1%	150mV	83%
NES-75-24	24V, 0~3.2A	±1%	200mV	86%
NES-75-48	48V, 0~1.6A	±1%	240mV	87%

100W — Single Output

Model No.	Output	Tol.	R&N	Effi.
NES-100-5	5V, 0~20A	±2%	80mV	80%
NES-100-7.5	7.5V, 0~13.6A	±1%	120mV	81%
NES-100-9	9V, 0~11.2A	±1%	120mV	81%
NES-100-12	12V, 0~8.5A	±1%	120mV	83%
NES-100-15	15V, 0~7.0A	±1%	120mV	84%
NES-100-24	24V, 0~4.5A	±1%	120mV	86%
NES-100-48	48V, 0~2.3A	±1%	150mV	86%

150W — Single Output

Model No.	Output	Tol.	R&N	Effi.
NES-150-3.3	3.3V, 0~30A	±3%	80mV	73%
NES-150-5	5V, 0~26A	±2%	80mV	78%
NES-150-7.5	7.5V, 0~20A	±1%	120mV	80%
NES-150-9	9V, 0~16.7A	±1%	120mV	83%
NES-150-12	12V, 0~12.5A	±1%	120mV	83%
NES-150-15	15V, 0~10A	±1%	120mV	83%
NES-150-24	24V, 0~6.5A	±1%	120mV	86%
NES-150-48	48V, 0~3.3A	±1%	200mV	86%

Enclosed-NE Series



35W — Dual Output

Model No.	Output	Tol.	R&N	Effi.	Max.
NED-35A	5V, 0.5~5.0A	±2%	80mV	78%	32W
	12V, 0.1~1.5A	±6%	120mV		
NED-35B	5V, 0.5~4.0A	±2%	80mV	81%	35W
	24V, 0.2~1.3A	±6%	200mV		

50W — Dual Output

Model No.	Output	Tol.	R&N	Effi.	Max.
NED-50A	5V, 1.0~6.0A	±2%	80mV	79%	54W
	12V, 0.3~3.0A	±6%	120mV		
NED-50B	5V, 1.0~6.0A	±2%	80mV	82%	54W
	24V, 0.2~2.0A	±6%	200mV		

75W — Dual Output

Model No.	Output	Tol.	R&N	Effi.	Max.
NED-75A	5V, 1.0~8.0A	±2%	80mV	78%	71W
	12V, 0.3~4.0A	±6%	120mV		
NED-75B	5V, 1.0~6.0A	±2%	80mV	81%	73W
	24V, 0.2~3.0A	±6%	200mV		

100W — Dual Output (Output isolated for NED-100□GD)

Model No.	Output	Tol.	R&N	Effi.	Max.
NED-100A	5V, 2~10A	±2%	80mV	80%	100W
	12V, 0.7~7.0A	±10%	120mV		
NED-100B	5V, 1~10A	±2%	80mV	82%	100W
	24V, 0.3~3.5A	±8%	200mV		
NED-100C	12V, 0~8.0A	±2%	120mV	80%	99W
	5V, 0~3.0A	±3%	80mV		
NED-100D	24V, 0~4.0A	±2%	120mV	82%	99W
	5V, 0~3.0A	±3%	80mV		

35W — Triple Output

Model No.	Output	Tol.	R&N	Effi.	Max.
NET-35A	5V, 0.5~4.0A	±2%	80mV	78%	30W
	12V, 0.1~1.5A	±6%	120mV		
	-5V, 0.1~0.5A	±6%	120mV		
NET-35B	5V, 0.5~4.0A	±2%	80mV	79%	33W
	12V, 0.1~1.5A	±6%	120mV		
	-12V, 0.1~0.5A	±6%	120mV		
NET-35C	5V, 0.5~3.5A	±2%	80mV	79%	35W
	15V, 0.1~1.5A	±8%	150mV		
	-15V, 0.1~0.5A	±8%	150mV		
NET-35D	5V, 0.5~3.5A	±2%	80mV	79%	37W
	24V, 0.1~1.0A	±8%	200mV		
	12V, 0.1~1.0A	±8%	120mV		

50W — Triple Output

Model No.	Output	Tol.	R&N	Effi.	Max.
NET-50A	5V, 0.6~5.0A	±2%	80mV	76%	47W
	12V, 0.2~2.5A	±6%	120mV		
	-5V, 0.1~0.7A	±5%	120mV		
NET-50B	5V, 0.6~5.0A	±2%	80mV	78%	50W
	12V, 0.2~2.5A	±6%	120mV		
	-12V, 0.1~0.7A	±5%	120mV		
NET-50C	5V, 0.6~5.0A	±2%	80mV	78%	50W
	15V, 0.1~2.0A	±8%	150mV		
	-15V, 0.1~0.7A	±5%	150mV		
NET-50D	5V, 0.6~5.0A	±2%	80mV	80%	51W
	24V, 0.1~1.5A	±8%	200mV		
	12V, 0.1~1.5A	±6%	120mV		

75W — Triple Output

Model No.	Output	Tol.	R&N	Effi.	Max.
NET-75A	5V, 0.6~7.0A	±2%	80mV	77%	69W
	12V, 0.2~3.5A	±6%	120mV		
	-5V, 0.1~0.7A	±5%	120mV		
NET-75B	5V, 0.6~7.0A	±2%	80mV	78%	65W
	12V, 0.2~3.5A	±6%	120mV		
	-12V, 0.1~0.7A	±5%	120mV		
NET-75C	5V, 0.6~7.0A	±2%	80mV	78%	72W
	15V, 0.1~3.5A	±8%	150mV		
	-15V, 0.1~0.7A	±5%	150mV		
NET-75D	5V, 0.6~6.0A	±2%	80mV	80%	73W
	24V, 0.1~2.0A	±8%	200mV		
	12V, 0.1~1.5A	±6%	120mV		

210W Single Output Switching Power Supply



- AC input selectable by switch
- Withstand 300VAC surge input for 5 seconds
- Protections: Short circuit / Overload Over voltage / Over temp.
- Cooling by free air convection
- Built-in constant current limiting circuit
- 100% full load burn-in test
- LED indicator for power on
- Low cost, high reliability
- 2 years warranty

AC input voltage range 90~132VAC / 180~264VAC selectable by switch
 DC adjustment range ±10% rated output range
 Overload protection 105%~150% constant current limiting, auto-recovery
 Over voltage protection 115%~145% rated output voltage
 Setup, rise, hold up time 1000ms, 50ms, 20ms at full load and 230VAC
 Withstand voltage I/P - O/P: 3kVAC, I/P-FG: 1.5kVAC, O/P-FG: 0.5kVAC
 Working temperature -20°C~50°C (refer to output derating curve)
 Safety standards UL60950-1 approved
 Packing 0.93kg ; 12pcs / 12kg / 0.92CUFT

Model No.	Output	Tol.	R&N	Effi.
NES-200-3.3	3.3V, 0~40A	±2%	150mV	75%
NES-200-5	5V, 0~40A	±2%	150mV	79%
NES-200-7.5	7.5V, 0~27A	±2%	150mV	82%
NES-200-12	12V, 0~17A	±1%	150mV	85%
NES-200-15	15V, 0~14A	±1%	150mV	85%
NES-200-24	24V, 0~8.8A	±1%	150mV	87%
NES-200-27	27V, 0~7.8A	±1%	200mV	88%
NES-200-36	36V, 0~5.9A	±1%	240mV	89%
NES-200-48	48V, 0~4.4A	±1%	240mV	89%

350W Single Output Switching Power Supply



- AC input selectable by switch
- Withstand 300VAC surge input for 5 seconds
- Protections: Short circuit / Overload Over voltage / Over temp.
- Forced air cooling by built-in DC fan
- Built-in fan ON/OFF control
- Built-in constant current limiting circuit
- 100% full load burn-in test
- LED indicator for power on
- Low cost, high reliability
- 2 years warranty

AC input voltage range 90~132VAC / 180~264VAC selectable by switch
 DC adjustment range ±10% rated output range
 Overload protection 105%~135% constant current limiting, auto-recovery
 Over voltage protection 115%~145% rated output voltage
 Setup, rise, hold up time 1000ms, 50ms, 20ms at full load and 230VAC
 Withstand voltage I/P - O/P: 3kVAC, I/P-FG: 1.5kVAC, O/P-FG: 0.5kVAC
 Working temperature -20°C~60°C (refer to output derating curve)
 Safety standards UL60950-1 approved
 Packing 1.07kg ; 12pcs / 13.5kg / 0.92CUFT

Model No.	Output	Tol.	R&N	Effi.
NES-350-3.3	3.3V, 0~60A	±4.5%	150mV	74.0%
NES-350-5	5V, 0~60A	±2.0%	150mV	78.0%
NES-350-7.5	7.5V, 0~46A	±2.0%	150mV	80.0%
NES-350-12	12V, 0~29A	±1.5%	150mV	83.0%
NES-350-15	15V, 0~23.2A	±1.0%	150mV	84.0%
NES-350-24	24V, 0~14.6A	±1.0%	150mV	87.0%
NES-350-27	27V, 0~13A	±1.0%	200mV	88.0%
NES-350-36	36V, 0~9.7A	±1.0%	240mV	87.5%
NES-350-48	48V, 0~7.3A	±1.0%	240mV	87.5%

Enclosed-SE Series 210~450W Single Output



Features

- AC input selectable by switch
- Withstand 300VAC surge input for 5 seconds (except for SE-450)
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Forced air cooling by built-in DC fan (SE-350/450)
- Built-in fan ON-OFF control (SE-350)
- Built-in constant current limiting circuit (SE-200/350)
- Withstand 5G vibration test (SE-200/350)
- Built-in remote sense function (SE-450)
- 100% full load burn-in test
- LED indicator for power on
- 2 years warranty

General Specification (Please refer to www.meanwell.com for detail spec.)



Model No.	SE-200 NEW	SE-350 NEW	SE-450
AC input voltage range	90~132VAC / 180~264VAC selected by switch		
AC inrush current (max.)	Cold start, 55A at 230VAC	Cold start, 60A at 230VAC	Cold start, 55A at 230VAC
DC adjustment range	±10% rated Output voltage		
Overload	Range	105%~150%	105%~135%
Protection	Type	Constant current limiting, auto-recovery	Shut down o/p voltage, re-power on to recover
Over voltage protection	115%~145%		
Withstand voltage	I/P - O/P: 3kVAC, I/P - FG: 1.5kVAC, O/P-FG: 0.5kVAC		
Working temperature	-20~+50°C	-20~+60°C	-10~+60°C (refer to output derating curve)
Safety standards	UL60950-1 approved		
Connection	9P/9.5mm pitch terminal block with cover		9P/11mm pitch terminal block with cover
Dimension (LxWxH)(mm)	215x 115x 50		225x 124x 50
Case No.	912E	912C	986
Packing	12pcs / 12kg	12pcs / 13.5kg	12pcs / 16kg

SE-200 Series **NEW**

Model No.	Output	Tol.	R&N	Effi.
SE-200-3.3	3.3V, 0~40A	±2%	150mV	75%
SE-200-5	5V, 0~40A	±2%	150mV	79%
SE-200-7.5	7.5V, 0~27A	±2%	150mV	82%
SE-200-12	12V, 0~17A	±1%	150mV	85%
SE-200-15	15V, 0~14A	±1%	150mV	85%
SE-200-24	24V, 0~8.8A	±1%	150mV	87%
SE-200-27	27V, 0~7.8A	±1%	200mV	88%
SE-200-36	36V, 0~5.9A	±1%	240mV	89%
SE-200-48	48V, 0~4.4A	±1%	240mV	89%

SE-450 Series

Model No.	Output	Tol.	R&N	Effi.
SE-450-3.3	3.3V, 0~75A	±3%	200mV	74%
SE-450-5	5V, 0~75A	±3%	200mV	78%
SE-450-12	12V, 0~37.5A	±1%	200mV	83%
SE-450-15	15V, 0~30A	±1%	200mV	84%
SE-450-24	24V, 0~18.8A	±1.5%	200mV	86%
SE-450-36	36V, 0~12.5A	±1%	200mV	86%
SE-450-48	48V, 0~9.4A	±1%	200mV	88%

SE-350 Series **NEW**

Model No.	Output	Tol.	R&N	Effi.
SE-350-3.3	3.3V, 0~60A	±4.5%	150mV	74.0%
SE-350-5	5V, 0~60A	±2.0%	150mV	78.0%
SE-350-7.5	7.5V, 0~46A	±2.0%	150mV	80.0%
SE-350-12	12V, 0~29A	±1.0%	150mV	83.0%
SE-350-15	15V, 0~23.2A	±1.0%	150mV	84.0%
SE-350-24	24V, 0~14.6A	±1.0%	150mV	87.0%
SE-350-27	27V, 0~13A	±1.0%	200mV	88.0%
SE-350-36	36V, 0~9.7A	±1.0%	240mV	87.5%
SE-350-48	48V, 0~7.3A	±1.0%	240mV	87.5%



We provide specification, drawing, test report and more information, please visit our website — <http://www.meanwell.com>



48hrs delivery—

We keep enough stock for 95% of standard models at our 2400m² warehouse. We can arrange prompt delivery within 48hrs.



Best products also need best service.

We have authorized distributors all over the world. They have sufficient stock for your prompt delivery. Also they can offer you technical support & RMA services. Please contact your local distributors for more product information. You can also contact us at info@meanwell.com for information of your local distributors.



To satisfy our customers is our goal —

- High Quality
- Low Cost
- Prompt Delivery
- Best Service



Features

- AC input selectable by switch (600~1000W)
- AC input 180~264VAC only (SE-1500)
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Forced air cooling by built-in DC fan
- Built-in remote sense function
- DC OK, remote ON/OFF control (SE-1000/1500)
- 100% full load burn-in test
- LED indicator for power on
- 2 years warranty

General Specification (Please refer to www.meanwell.com for detail spec.)



Model No.	SE-600	SE-1000	SE-1500
AC input voltage range	90~132VAC / 180~264VAC selected by switch		180~264VAC
AC inrush current (max.)	Cold start, 60A at 230VAC	Cold start, 55A at 230VAC	Cold start, 60A at 230VAC
DC adjustment range	±10% rated Output voltage		
Overload	Range	105%~125%	
Protection	Type	Shut down o/p voltage, re-power on to recover	
Over voltage protection	115%~140%		
Withstand voltage	I/P - O/P: 3kVAC, I/P - FG: 1.5kVAC, 1 minute		
Working temperature	-20~+60°C (refer to output derating curve)		-20~+70°C (refer to output derating curve)
Safety standards	UL60950-1 approved		
EMC standards	Design refer to EN55022 class B		
Connection	Terminal block with cover for input and output (SE-1000/1500: copper pillars for output)		
Dimension (LxWxH)(mm)	247x 127x 63.5	278x 127x 63.5	278x 177.8x 63.5
Case No.	926A	935B	982A
Packing	6pcs / 13.4kg	6pcs / 16kg	4pcs / 14.2kg

600W SE-600

Model No.	Output	Tol.	R&N	Effi.
SE-600-5	5V, 0~100A	±2%	150mV	78%
SE-600-12	12V, 0~50A	±1%	150mV	83%
SE-600-15	15V, 0~40A	±1%	150mV	84%
SE-600-24	24V, 0~25A	±1%	150mV	87%
SE-600-27	27V, 0~22.2A	±1%	150mV	87%
SE-600-36	36V, 0~16.6A	±1%	200mV	87%
SE-600-48	48V, 0~12.5A	±1%	200mV	88%

1000W SE-1000

Model No.	Output	Tol.	R&N	Effi.
SE-1000-5	5V, 0~150A	±1%	150mV	81%
SE-1000-9	9V, 0~100A	±1%	150mV	84%
SE-1000-12	12V, 0~83.3A	±1%	150mV	85%
SE-1000-15	15V, 0~66.7A	±1%	150mV	86%
SE-1000-24	24V, 0~41.7A	±1%	200mV	88%
SE-1000-48	48V, 0~20.8A	±1%	200mV	89%

1500W SE-1500

Model No.	Output	Tol.	R&N	Effi.
SE-1500-5	5V, 0~300A	±2%	150mV	81%
SE-1500-12	12V, 0~125A	±1%	150mV	85%
SE-1500-15	15V, 0~100A	±1%	150mV	85%
SE-1500-24	24V, 0~62.5A	±1%	150mV	87%
SE-1500-27	27V, 0~55.6A	±1%	150mV	88%
SE-1500-48	48V, 0~31.3A	±1%	150mV	89%

1000W Quad Output with PFC Function

Available by Request


Low Cost Substitute of Modular Power



- Built-in external voltage control function 10~120% for CH3 & CH4
- Universal AC input / Full range
- Built-in active PFC function, PF > 0.95
- Protections: Short circuit / Overload / Over voltage / Over temp.
- Built-in remote ON/OFF control for CH3, CH4, and the whole unit
- Isolated outputs with independent PWM control, no minimum load required
- Built-in remote sense for CH3 & CH4
- Output current monitor signal for CH3 & CH4
- Cooling by built-in DC fan
- DC output: 12V@8A / 5V@6A / 24V@12.5A / 24V@25A
- Design refer to UL60950-1, TUV EN60950-1
- Dimension(LxWxH): 278 x 177.8 x 63.5mm
- 3 years warranty

Enclosed-G2 Series

25~150W Single Output

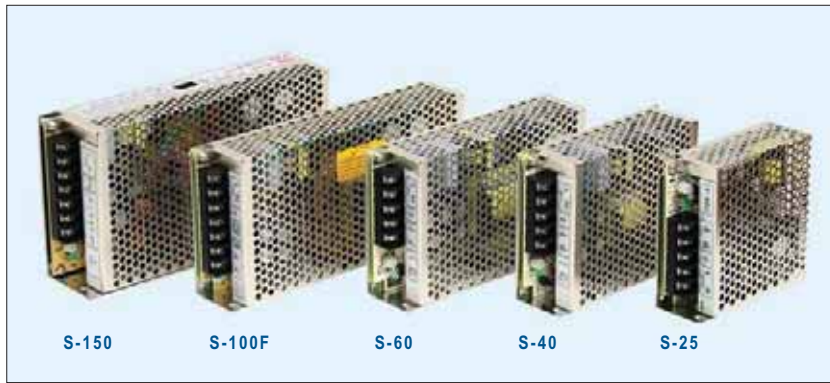

■ Features

- Universal AC input / Full range (25~60W)
AC input selectable by switch (100~150W)
- Protections: Short circuit / Overload / Over voltage
- Cooling by free air convection
- 100% full load burn-in test
- 2 years warranty

■ General Specification (Please refer to www.meanwell.com for detail spec.)

Model No.		S-25	S-40	S-60	S-100F	S-150
AC input voltage range		85~264VAC, 120~370VDC			88~132/176~264 VAC selectable by switch	
AC inrush current (max.)		Cold start, 25A at 230VAC	Cold start, 50A at 230VAC	Cold start, 40A at 230VAC		Cold start, 35A at 230VAC
DC adjustment range		±10% rated output voltage				
Overload protection	Range	105%~150% rated output power				Shut down O/P voltage, re-power on to recover
	Type	Hiccup mode, auto-recovery				
Over voltage protection	Range	115%~135% rated output voltage				115%~145%
	Type	Hiccup mode, auto-recovery				Shut down O/P voltage, re-power on to recover
Withstand voltage		I/P - O/P: 3kVAC, I/P - FG: 1.5kVAC, O/P - FG: 0.5kVAC, 1 minute				
Working temperature		-10~+60°C (refer to output derating curve)				
Safety standards		UL1012, TUV EN60950-1 approved	UL1012, UL60950-1 TUV EN60950-1 approved	UL1012, UL60950-1,TUV EN60950-1, GB4943 approved, CSA60950-1(S-100F-24 only)		
EMC standards		EN55022 class B, EN61000-3-2,3, ENV50204, EN61000-4-2,3,4,5,6,8,11 (S-25/40: EN61000-4-2,3,4,5 only), GB9254 (S-60 / S-100F / S-150 only)				
Connection		5P / 9.5mm pitch terminal block			7P / 9.5mm pitch terminal block	
Dimension (LxWxH)(mm)		99x 97x 36	129x 98x 38	159x 97x 38	199x 98x 38	199x 110x 50
Case No.		905	903	901	902	906
Packing		45pcs/18kg	30pcs/13.9kg	24pcs/13.1kg	20pcs/14.2kg	16pcs/13.8kg

■ S-25 Series



Model No.	Output	Tol.	R&N	Effi.
S-25-5	5V, 0~5A	±2%	50mV	72%
S-25-12	12V, 0~2.1A	±1%	100mV	76%
S-25-15	15V, 0~1.7A	±1%	100mV	77%
S-25-24	24V, 0~1.1A	±1%	100mV	80%

■ S-40 Series



Model No.	Output	Tol.	R&N	Effi.
S-40-5	5V, 0~8A	±2%	75mV	72%
S-40-12	12V, 0~3.5A	±1%	100mV	76%
S-40-15	15V, 0~2.8A	±1%	100mV	76%
S-40-24	24V, 0~1.8A	±1%	100mV	78%

■ S-60 Series



Model No.	Output	Tol.	R&N	Effi.
S-60-5	5V, 0~12A	±2%	120mV	73%
S-60-12	12V, 0~5.0A	±1%	120mV	76%
S-60-15	15V, 0~4.0A	±1%	150mV	77%
S-60-24	24V, 0~2.5A	±1%	150mV	79%

■ S-100F Series



Model No.	Output	Tol.	R&N	Effi.
S-100F-5	5V, 0~20A	±2%	100mV	76%
S-100F-7.5	7.5V, 0~13.5A	±1%	125mV	78%
S-100F-12	12V, 0~8.5A	±1%	125mV	80%
S-100F-15	15V, 0~6.7A	±1%	125mV	81%
S-100F-24	24V, 0~4.5A	±1%	150mV	83%
S-100F-48	48V, 0~2.2A	±1%	150mV	84%

■ S-150 Series



Model No.	Output	Tol.	R&N	Effi.
S-150-5	5V, 0~30A	±2%	150mV	78%
S-150-7.5	7.5V, 0~20A	±1%	150mV	80%
S-150-9	9V, 0~16.7A	±1%	180mV	80%
S-150-12	12V, 0~12.5A	±1%	180mV	82%
S-150-13.5	13.5V, 0~11.2A	±1%	180mV	83%
S-150-15	15V, 0~10A	±1%	180mV	84%
S-150-24	24V, 0~6.5A	±1%	240mV	85%
S-150-27	27V, 0~5.6A	±1%	240mV	86%
S-150-48	48V, 0~3.2A	±1%	240mV	87%

✧ Another SC model with constant current limiting & temperature compensation circuit.

Enclosed-G2 Series 210~320W Single Output



Features

- AC input selectable by switch
- Protections: Short circuit / Overload / Over voltage / Over temperature (S-250: Short circuit / Over voltage / Over temperature)
- Forced air cooling by built-in DC fan (except for S-210)
- Cooling fan ON/OFF auto control (S-320)
- 100% full load burn-in test
- LED indicator for power on
- 2 years warranty

General Specification (Please refer to www.meanwell.com for detail spec.)



Model No.	S-210	S-250	S-320
AC input voltage range	90~132VAC / 180~264VAC selectable by switch		
AC inrush current (max.)	Cold start, 50A at 230VAC	Cold start, 45A at 230VAC	Cold start, 36A at 230VAC
DC adjustment range	±10% rated Output voltage		
Overload protection	Range	105%~150%	105%~135%
	Type	Hiccup mode, auto-recovery	
Over voltage protection	115%~145% rated output voltage	115%~135% rated output voltage	115%~145% rated output voltage
Withstand voltage	I/P - O/P: 3kVAC, I/P - FG: 1.5kVAC, 1 minute		
Working temperature	-20~+50°C	-10~+60°C	
Safety standards	UL60950-1 approved		
EMC standards	Design refer to EN55022 class B		
Connection	Terminal block with cover for input and output		
Dimension (LxWxH)(mm)	215x 115x 50	150x 140x 86	215x 115x 50
Case No.	912E	907	912
Packing	12pcs / 12.4kg	8pcs / 11.0kg	12pcs / 13.8kg

210W S-210

Model No.	Output	Tol.	R&N	Effi.
S-210-5	5V, 0~40A	±2%	80mV	79%
S-210-7.5	7.5V, 0~27A	±2%	100mV	82%
S-210-12	12V, 0~17A	±1%	120mV	83%
S-210-13.5	13.5V, 0~15A	±1%	120mV	84%
S-210-15	15V, 0~14A	±1%	120mV	85%
S-210-24	24V, 0~8.8A	±1%	200mV	87%
S-210-27	27V, 0~7.8A	±1%	200mV	87%
S-210-48	48V, 0~4.4A	±1%	200mV	87%

250W S-250

Model No.	Output	Tol.	R&N	Effi.
S-250-5	5V, 0~40A	±2%	80mV	74.0%
S-250-12	12V, 0~18A	±1%	120mV	79.0%
S-250-15	15V, 0~15A	±1%	120mV	80.0%
S-250-24	24V, 0~10A	±1%	120mV	81.5%
S-250-27	27V, 0~9.0A	±1%	150mV	82.0%
S-250-48	48V, 0~5.2A	±1%	200mV	82.0%

320W S-320

Model No.	Output	Tol.	R&N	Effi.
S-320-5	5V, 0~50A	±2%	150mV	77%
S-320-7.5	7.5V, 0~36A	±2%	150mV	80%
S-320-12	12V, 0~25A	±1%	150mV	82%
S-320-13.5	13.5V, 0~22A	±1%	150mV	83%
S-320-15	15V, 0~20A	±1%	150mV	84%
S-320-24	24V, 0~12.5A	±1%	150mV	86%
S-320-27	27V, 0~11A	±1%	200mV	86%
S-320-48	48V, 0~6.5A	±1%	240mV	87%

Available by Request

400W

Single Output with PFC Function


- Universal AC input / Full Range
- Built-in active PFC function
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Built-in constant current limiting circuit
- Forced air cooling by built-in DC fan
- Output models: 3.3V / 5V / 12V / 15V / 24V / 36V / 48V
- Dimension(LxWxH): 225x 124x 50mm
- 3 years warranty



Best products also need best service.

We have authorized distributors all over the world. They have sufficient stock for your prompt delivery. Also they can offer you technical support & RMA services. Please contact your local distributors for more product information. You can also contact us at info@meanwell.com for information of your local distributors.

60W Dual and Triple Output Switching Power Supply



- Universal AC input / Full range
- Protections: Short circuit / Overload / Over voltage
- Fixed switching frequency at 54kHz (D-60)
- Fixed switching frequency at 50kHz (T-60)
- Cooling by free air convection
- 100% full load burn-in test
- 2 years warranty

AC input voltage range 85~264VAC; 120~370VDC
 AC inrush current Cold start, 20A at 115VAC, 40A at 230VAC
 DC adjustment range CH1: -5~+10% rated output voltage
 Overload protection 105%~150% hiccup mode, auto-recovery
 Over voltage protection CH1: 115%~135% rated output voltage
 Setup, rise, hold up time ... 300ms, 50ms, 80ms at full load and 230VAC
 Withstand voltage I/P-O/P:3.0kVAC, I/P-FG:1.5kVAC, 1minute
 Working temperature -10~60°C (refer to output derating curve)
 Safety standards UL1012(except for ID/IT-60), UL60950-1, TUV EN60950-1 approved
 EMC standards EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, ENV50204
 Connection 7P/ 9.5mm pitch terminal block
 10P/ 7.62mm pitch terminal block (IT-60)
 Packing 0.54kg ; 24pcs / 13.8kg / 0.75CUFT (D-60)
 0.55kg ; 24pcs / 13.9kg / 0.75CUFT (ID-60)
 0.55kg ; 24pcs / 14.1kg / 0.75CUFT (T-60)
 0.51kg ; 24pcs / 13.2kg / 0.75CUFT (IT-60)

❖ Dual output

Model No.	Output	Tol.	R&N	Effi.	Max.
D-60A	5V, 0.3~6.0A	±2%	75mV	73%	56W
	12V, 0.2~4.0A	±6%	150mV		
D-60B	5V, 0.3~6.0A	±2%	75mV	76%	58W
	24V, 0.2~2.2A	±5%	150mV		

❖ Dual output (Note: 5V output is isolated from 24V)

Model No.	Output	Tol.	R&N	Effi.	Max.
ID-60B	5V, 0.3~6.0A	±2%	100mV	76%	58W
	24V, 0.2~2.2A	±8%	240mV		


❖ Triple output

Model No.	Output	Tol.	R&N	Effi.	Max.
T-60A	5V, 0.5~7.0A	±2%	100mV	72%	58W
	12V, 0.2~3.5A	±6%	100mV		
	-5V, 0.0~1.0A	±6%	100mV		
T-60B	5V, 0.5~7.0A	±2%	100mV	72%	61W
	12V, 0.2~3.5A	±6%	100mV		
	-12V, 0.0~1.0A	±6%	100mV		
T-60C	5V, 0.5~7.0A	±2%	100mV	72%	63W
	15V, 0.2~3.0A	±6%	100mV		
	-15V, 0.0~1.0A	±6%	100mV		

❖ Triple output (Note: All outputs are isolated)

Model No.	Output	Tol.	R&N	Effi.	Max.
IT-60D	5V, 0.5~3.0A	±3%	80mV	76%	58W
	12V, 0.1~1.0A	±8%	120mV		
	24V, 0.2~2.0A	±8%	240mV		
IT-60F	5V, 0.5~3.0A	±3%	80mV	76%	58W
	15V, 0.1~1.0A	±8%	150mV		
	24V, 0.2~2.0A	±8%	240mV		

60W Quad Output Switching Power Supply



- Universal AC input / Full range
- Protections: Short circuit / Overload / Over voltage
- Approvals: UL / CUL / CE for Q-60, UL / CUL / TUV / CB / CE for IQ-60
- Cooling by free air convection
- LED indicator for power on
- 100% full load burn-in test
- 2 years warranty

AC input voltage range 85~264VAC; 120~370VDC for Q-60
 90~264VAC; 127~370VDC for IQ-60
 DC adjustment range CH1: -5~+10% rated output voltage
 Overload protection 105%~150% hiccup mode, auto-recovery
 Over voltage protection CH1: 115%~135% rated output voltage
 Setup, rise, hold up time 800ms, 20ms, 70ms at full load and 230VAC (Q-60)
 300ms, 20ms, 80ms at full load and 230VAC (IQ-60)
 Withstand voltage I/P-O/P:3.0kVAC, I/P-FG:1.5kVAC, 1minute
 Working temperature -10~60°C (refer to output derating curve)
 Safety standards UL60950-1 approved for Q-60
 UL60950-1, TUV EN60950-1 approved for IQ-60
 EMC standards EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, ENV50204
 Connection 8P/ 8.25mm pitch terminal block for Q-60
 10P/ 7.62mm pitch terminal block for IQ-60
 Packing 0.56kg ; 24pcs / 14.4kg / 0.75CUFT (Q-60)
 0.55kg ; 24pcs / 14.2kg / 0.75CUFT (IQ-60)

❖ Quad output and UL / CUL / CE approved


Model No.	Output	Tol.	R&N	Effi.	Max.
Q-60B	5V, 0.5~8.0A	±2%	100mV	70%	60W
	12V, 0.1~3.0A	±6%	120mV		
	-5V, 0.0~1.0A	±5%	100mV		
	-12V, 0.0~1.0A	±5%	120mV		
Q-60C	5V, 0.5~8.0A	±2%	100mV	72%	60W
	15V, 0.1~3.0A	+8%,-4%	120mV		
	-5V, 0.0~1.0A	±5%	100mV		
	-15V, 0.0~1.0A	±5%	120mV		
Q-60D	5V, 0.5~8.0A	±2%	100mV	75%	62W
	12V, 0.1~3.0A	±6%	120mV		
	24V, 0.1~1.5A	+8%,-4%	150mV		
	-12V, 0.0~1.0A	±5%	120mV		

❖ 5V, 24V are isolated from CH2 & CH3 and UL / CUL / TUV / CB / CE approved

Model No.	Output	Tol.	R&N	Effi.	Max.
IQ-60D	5V, 0.5~3.0A	±3%	80mV	76%	58W
	12V, 0.1~1.0A	±8%	120mV		
	-12V, 0.1~1.0A	±8%	120mV		
	24V, 0.2~2.0A	±8%	240mV		
IQ-60F	5V, 0.5~3.0A	±3%	80mV	76%	60W
	15V, 0.1~1.0A	±8%	150mV		
	-15V, 0.1~1.0A	±8%	150mV		
	24V, 0.2~2.0A	±8%	240mV		

► Note: Output isolated models can reduce noise interference from the system.

120W 2~4 Output Switching Power Supply



- AC input range selectable by switch
- Protections: Short circuit / Overload / Over voltage
- Cooling by free air convection
- 100% full load burn-in test
- 2 years warranty

AC input voltage range 88~132VAC / 176~264VAC selectable by switch
 DC adjustment range CH1: -5~+10% rated output voltage
 Overload protection 105%~135% shut off, AC recycle to re-start
 Over voltage protection CH1: 115%~135% rated output voltage
 Setup, rise, hold up time ... 200ms, 50ms, 20ms at full load and 230VAC (D-120, Q-120); 800ms, 20ms, 24ms at full load and 230VAC(T-120)
 Withstand voltage I/P-O/P:3.0kVAC, I/P-FG:1.5kVAC, 1minute
 Working temperature -10~60°C(refer to output derating curve)
 Safety standards UL60950-1, TUV EN60950-1, GB4943 approved
 EMC standards EN55022 class B, EN61000-3-2,3, GB9254, EN61000-4-2,3,4,5,6,8,11, ENV50204
 Connection 8P/ 9.5mm pitch terminal block
 Packing 0.82kg ; 16pcs / 14.2kg / 0.95CUFT (D-120)
 0.83kg ; 16pcs / 14.2kg / 0.95CUFT (T-120)
 0.86kg ; 16pcs / 14.7kg / 0.95CUFT (Q-120)

❖ Dual output

Model No.	Output	Tol.	R&N	Effi.	Max.
D-120A	5V, 2.0~12A	±2%	60mV	78%	120W
	12V, 0.5~5.0A	±6%	120mV		
D-120B	5V, 2.0~10A	±2%	60mV	80%	126W
	24V, 0.4~4.0A	±7%	150mV		

❖ Triple output

Model No.	Output	Tol.	R&N	Effi.	Max.
T-120A	5V, 2.0~12A	±2%	80mV	77%	120W
	12V, 0.5~5.0A	±6%	120mV		
	-5V, 0.2~1.0A	±6%	80mV		
T-120B	5V, 2.0~12A	±2%	80mV	77%	121W
	12V, 0.5~5.0A	±6%	120mV		
	-12V, 0.2~1.0A	±6%	120mV		
T-120C	5V, 2.0~12A	±2%	80mV	76%	118W
	15V, 0.5~5.0A	+10%, -5%	150mV		
	-15V, 0.2~1.0A	+10%, -5%	150mV		
T-120D	5V, 2.0~12A	±2%	80mV	80%	118W
	12V, 0.2~5.0A	±6%	120mV		
	24V, 0.2~2.0A	±6%	180mV		

❖ Quad output

Model No.	Output	Tol.	R&N	Effi.	Max.
Q-120B	5V, 2.0~12A	±2%	80mV	77%	120W
	12V, 0.5~5.0A	±6%	120mV		
	-5V, 0.2~1.0A	±6%	80mV		
	-12V, 0.2~1.0A	±6%	120mV		
Q-120C	5V, 2.0~12A	±2%	80mV	76%	123W
	15V, 0.5~5.0A	+10%, -5%	150mV		
	-5V, 0.2~1.0A	±6%	80mV		
	-15V, 0.2~1.0A	+10%, -5%	150mV		
Q-120D	5V, 2.0~12A	±2%	80mV	80%	124W
	12V, 0.2~5.0A	±6%	120mV		
	24V, 0.2~2.0A	±6%	180mV		
	-12V, 0.2~1.0A	±6%	120mV		

250W Quad Output Switching Power Supply




- AC input range selectable by switch
- Protections: Short circuit / Overload / Over voltage
- Fixed switching frequency at 75kHz
- Forced air cooling by built-in DC fan
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

AC input voltage range 90~132VAC / 176~264VAC selectable by switch
 DC adjustment range CH1: -5~+10% rated output voltage
 Overload protection 105%~150% hiccup mode, auto-recovery
 Over voltage protection CH1: 115%~135% rated output voltage
 Setup, rise, hold up time ... 800ms, 50ms, 20ms at full load and 230VAC
 Working temperature -10~50°C@100%, 60°C@60% load
 Safety standards UL60950-1 approved
 Connection 9P/ 9.5mm pitch terminal block with cover
 Packing 1.4kg ; 8pcs / 11.5kg / 0.97CUFT

Model No.	Output	Tol.	R&N	Effi.	Max.
Q-250B	5V, 2.0~20A	±2%	80mV	73%	201W
	12V, 0.5~7.0A	+8%, -10%	120mV		
	-12V, 0.5~1.0A	±10%	120mV		
	-5V, 0.0~1.0A	±6%	50mV		
Q-250C	5V, 2.0~20A	±2%	80mV	74%	195W
	15V, 0.5~5.0A	±10%	150mV		
	-15V, 0.5~1.0A	±10%	150mV		
	-5V, 0.0~1.0A	±6%	50mV		
Q-250D	5V, 2.0~15A	±2%	80mV	78%	242W
	12V, 0.5~6.0A	+6%, -10%	120mV		
	24V, 0.5~5.0A	±8%	240mV		
	-12V, 0.0~1.0A	±6%	120mV		
Q-250F	5V, 2.0~15A	±2%	80mV	78%	245W
	15V, 0.5~5.0A	+6%, -10%	150mV		
	24V, 0.5~5.0A	±8%	240mV		
	-15V, 0.0~1.0A	±6%	150mV		

40W Triple Output Switching Power Supply



- Universal AC input / Full range
- Protections: Short circuit / Overload / Over voltage
- Fixed switching frequency at 40kHz
- Cooling by free air convection
- 100% full load burn-in test
- 2 years warranty

AC input voltage range 85~264VAC; 120~370VDC
 DC adjustment range CH1: -5~+10% rated output voltage
 Overload protection 105%~150% hiccup mode, auto-recovery
 Over voltage protection CH1: 115%~135% rated output voltage
 Withstand voltage I/P-O/P:3kVAC, I/P-FG:1.5kVAC, 1minute
 Working temperature -10~60°C(refer to output derating curve)
 Safety standards CSA60950-1 approved
 EMC standards EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, ENV50204
 Connection 7P/ 9.5mm pitch terminal block with cover
 Packing 0.44kg ; 30pcs / 14.7kg / 0.86CUFT

Model No.	Output	Tol.	R&N	Effi.	Max.
T-40A	5V, 0.6~5.0A	±2%	100mV	72%	42W
	12V, 0.2~3.0A	±6%	120mV		
	-5V, 0.1~1.0A	±8%	100mV		
T-40B	5V, 0.6~5.0A	±2%	100mV	72%	45W
	12V, 0.2~3.0A	±6%	120mV		
	-12V, 0.1~1.0A	±8%	120mV		
T-40C	5V, 0.6~5.0A	±2%	100mV	72%	45W
	15V, 0.2~2.0A	±6%	120mV		
	-15V, 0.1~1.0A	±6%	120mV		



Features

- Universal AC input / Full range
- Built-in active PFC function, PF>0.93 (SP-240, PF>0.95)
- Protections: Short circuit / Overload / Over voltage / Over temp.(SP-150 / 200 / 240)
- Cooling by free air convection (SP-75 / 100 / 150)
- Forced air cooling by built-in DC fan (SP-200 / 240)
- Optional remote ON/OFF control (SP-75~200)
- Built-in fan speed control (SP-200)
- Built-in fan ON/OFF control (SP-240)
- 100% full load burn-in test
- 3 years warranty



General Specification (Please refer to www.meanwell.com for detail spec.)

Model No.		SP-75	SP-100	SP-150	SP-200	SP-240
AC input voltage range		85~264VAC, 120~370VDC				88~264VAC, 124~370VDC
AC inrush current (max.)		Cold start, 30A at 230VAC		Cold start, 40A at 230VAC		
DC adjustment range		-5~+10% rated output voltage				±15% rated output voltage
Overload protection	Range	105%~150%				105%~135%
	Type	Constant current, auto-recovery				Hiccup mode, auto-recovery
Over voltage protection	Range	115%~135%	110%~135%			120%~150%
	Type	Shut off, AC recycle to re-start				
Withstand voltage		I/P-O/P: 3kVAC, I/P-FG: 1.5kVAC, O/P-FG: 0.5kVAC, 1 minute				
Working temperature		-10~+60℃		-10~+55℃	-10~+60℃	-20~+70℃
Safety standards		UL60950-1, TUV EN60950-1, GB4943(SP-200 only) approved				
EMC standards		EN55022 class B, EN61000-4-2,3,4,5,6,8,11, EN61000-3-2,3, ENV50204, GB9254(SP-200 only)				
Connection		5P / 9.5mm pitch	7P / 9.5mm pitch terminal block with cover			
Dimension (LxWxH)(mm)		179x97x33	179x99x45	199x99x50	199x99x50	190x93x50
Case No.		920A	915A	916A	916B	987A
Packing		20pcs/12.0kg	20pcs/14.3kg	20pcs/16.4kg	20pcs/17.9kg	18pcs/15.4kg

75W SP-75

Model No.	Output	Tol.	R&N	Effi.
SP-75-3.3	3.3V, 0~15A	±2%	80mV	68%
SP-75-5	5V, 0~15A	±2%	80mV	72%
SP-75-7.5	7.5V, 0~10A	±2%	80mV	74%
SP-75-12	12V, 0~6.3A	±2%	80mV	77%
SP-75-13.5	13.5V, 0~5.6A	±2%	80mV	78%
SP-75-15	15V, 0~5.0A	±2%	80mV	79%
SP-75-24	24V, 0~3.2A	±1%	100mV	80%
SP-75-27	27V, 0~2.8A	±1%	100mV	80%
SP-75-48	48V, 0~1.6A	±1%	100mV	80%

100W SP-100

Model No.	Output	Tol.	R&N	Effi.
SP-100-3.3	3.3V, 0~20.0A	±2%	100mV	70%
SP-100-5	5V, 0~20.0A	±2%	100mV	76%
SP-100-7.5	7.5V, 0~13.5A	±2%	100mV	78%
SP-100-12	12V, 0~8.50A	±2%	100mV	80%
SP-100-13.5	13.5V, 0~7.50A	±2%	100mV	80%
SP-100-15	15V, 0~6.70A	±2%	100mV	82%
SP-100-24	24V, 0~4.20A	±1%	150mV	84%
SP-100-27	27V, 0~3.80A	±1%	150mV	83%
SP-100-48	48V, 0~2.10A	±1%	250mV	82%

150W SP-150

Model No.	Output	Tol.	R&N	Effi.
SP-150-3.3	3.3V, 0~30.0A	±2%	100mV	67%
SP-150-5	5V, 0~30.0A	±2%	100mV	75%
SP-150-7.5	7.5V, 0~20.0A	±2%	100mV	79%
SP-150-12	12V, 0~12.5A	±2%	100mV	80%
SP-150-13.5	13.5V, 0~11.2A	±2%	100mV	80%
SP-150-15	15V, 0~10.0A	±2%	100mV	81%
SP-150-24	24V, 0~6.30A	±1%	150mV	83%
SP-150-27	27V, 0~5.60A	±1%	150mV	84%
SP-150-48	48V, 0~3.20A	±1%	250mV	84%

200W SP-200

Model No.	Output	Tol.	R&N	Effi.
SP-200-3.3	3.3V, 0~40.0A	±2%	100mV	65%
SP-200-5	5V, 0~40.0A	±2%	100mV	71%
SP-200-7.5	7.5V, 0~26.7A	±2%	100mV	76%
SP-200-12	12V, 0~16.7A	±2%	100mV	79%
SP-200-13.5	13.5V, 0~14.9A	±2%	100mV	80%
SP-200-15	15V, 0~13.4A	±2%	100mV	81%
SP-200-24	24V, 0~8.40A	±1%	150mV	83%
SP-200-27	27V, 0~7.50A	±1%	150mV	83%
SP-200-48	48V, 0~4.20A	±1%	250mV	84%

240W SP-240

Model No.	Output	Tol.	R&N	Effi.
SP-240-5	5V, 0~45A	±2%	150mV	79%
SP-240-7.5	7.5V, 0~32A	±2%	150mV	83%
SP-240-12	12V, 0~20A	±1%	150mV	86%
SP-240-15	15V, 0~16A	±1%	150mV	86%
SP-240-24	24V, 0~10A	±1%	150mV	87%
SP-240-30	30V, 0~8.0A	±1%	150mV	88%
SP-240-48	48V, 0~5.0A	±1%	150mV	89%



48hrs delivery—

We keep enough stock for 95% of standard models at our 2400m² warehouse. We can arrange prompt delivery within 48hrs.



■ Features

- Universal AC input / Full range
- Built-in active PFC function, PF>0.95
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Forced air cooling by built-in DC fan
- Built-in remote sense function and ON/OFF control (SP-480/500/750)
- Built-in fan speed control (SP-320)
- Built-in fan ON/OFF control (SP-500)
- With PG/PF signal output (SP-750)
- 100% full load burn-in test
- 3 years warranty

■ General Specification (Please refer to www.meanwell.com for detail spec.)

Model No.	SP-320	SP-480	SP-500	SP-750
AC input voltage range	88~264VAC	85~264VAC	88~264VAC	90~264VAC
AC inrush current (max.)	Cold start, 40A at 230VAC		Cold Start, 36A at 230VAC	Cold Start, 45A at 230VAC
DC adjustment range	±10% rated output voltage			
Overload protection	Range	105%~135%	105%~145%	105%~135%
	Type	Hiccup mode, auto-recovery	Constant current limiting, auto-recovery	Fold back current limiting, auto-recovery
Over voltage protection	115%~145%	115%~140%		
Withstand voltage	I/P - O/P: 3kVAC, I/P - FG: 1.5kVAC, O/P - FG: 0.5kVAC, 1 minute			
Working temperature	-20~+65°C	-20~+60°C	-10~+50°C	-20~+60°C
Safety standards	UL60950-1, TUV EN65950-1 approved, GB4943 approved also for SP-320			
EMC standards	EN55022 class B, EN61000-4-2,3,4,5,6,8,11, EN61000-3-2,3, ENV50204, EN61000-6-2(SP-320 / 480 / 750), GB9254 (SP-320 only)			
Connection	9P / 9.5mm pitch terminal block with cover	9P / 11mm pitch terminal block with cover	7+8P / 9.5mm pitch terminal block with cover	5P / 10mm pitch terminal block with cover for input; copper pillars for output
Dimension (LxWxH)(mm)	215x115x50	278x127x43	170x120x93	278x127x63.5
Case No.	912G	929A	910	919A
Packing	12pcs / 14.0kg	6pcs / 11.3kg	8pcs / 15.5kg	6pcs / 18.4kg

■ SP-320 Series



Model No.	Output	Tol.	R&N	Effi.
SP-320-3.3	3.3V, 0~60.0A	±1%	150mV	74%
SP-320-5	5V, 0~55.0A	±2%	150mV	79%
SP-320-5PNC	5V, 0~55.0A	±2%	150mV	80%
SP-320-7.5	7.5V, 0~40.0A	±2%	150mV	83%
SP-320-12	12V, 0~25.0A	±1%	150mV	86%
SP-320-13.5	13.5V, 0~22.0A	±1%	150mV	86%
SP-320-15	15V, 0~20.0A	±1%	150mV	86%
SP-320-24	24V, 0~13.0A	±1%	150mV	87%
SP-320-27	27V, 0~11.7A	±1%	200mV	88%
SP-320-36	36V, 0~8.80A	±1%	220mV	87%
SP-320-48	48V, 0~6.70A	±1%	240mV	89%

※SP-320-5PNC with conformal coating and high ambient temperature operation ability is suitable for LED moving sign applications

■ SP-480 Series



Model No.	Output	Tol.	R&N	Effi.
SP-480-3.3	3.3V, 0~85A	±2.0%	80mV	73%
SP-480-5	5V, 0~85A	±2.0%	80mV	79%
SP-480-12	12V, 0~43A	±1.5%	120mV	85%
SP-480-15	15V, 0~35A	±1.5%	150mV	85%
SP-480-24	24V, 0~22A	±1.0%	150mV	87%
SP-480-48	48V, 0~11A	±1.0%	240mV	89%

■ SP-500 Series



Model No.	Output	Tol.	R&N	Effi.
SP-500-12	12V, 0~40A	±1%	240mV	84.0%
SP-500-13.5	13.5V, 0~36A	±1%	240mV	84.0%
SP-500-15	15V, 0~32A	±1%	240mV	83.0%
SP-500-24	24V, 0~20A	±1%	240mV	85.5%
SP-500-27	27V, 0~18A	±1%	200mV	86.5%
SP-500-48	48V, 0~10A	±1%	300mV	87.0%

■ SP-750 Series



Model No.	Output	Tol.	R&N	Effi.
SP-750-5	5V, 0~120A	±2%	120mV	80%
SP-750-12	12V, 0~62.5A	±1%	120mV	85%
SP-750-15	15V, 0~50.0A	±1%	120mV	87%
SP-750-24	24V, 0~31.3A	±1%	120mV	89%
SP-750-27	27V, 0~27.8A	±1%	120mV	89%
SP-750-48	48V, 0~15.7A	±1%	120mV	90%



Who can provide you better services and be a trustworthy partner in the power industry?

— "MEAN WELL" tries to be —

600W with PFC and Parallel Function



CASE: 910A 170x 120x 93 mm

- Universal AC input / Full range
- PF>0.99@115VAC; >0.95@230VAC
- Protections: Short circuit / Overload / Over voltage / Over temp.
- Forced air cooling by built-in DC fan
- Built-in remote sense and ON/OFF control
- With DC OK signal output
- **Current sharing up to 2400W (3+1)**
- 3 years warranty

AC input voltage range 88~264VAC; 124~370VDC
 AC inrush current Cold start, 20A at 115VAC, 40A at 230VAC
 DC adjustment range $\pm 10\%$ rated output voltage
 Overload protection 105%~135% constant current, auto-recovery
 Over voltage protection 115%~140% rated output voltage
 Withstand voltage I/P-O/P:3kVAC, I/P-FG:1.5kVAC, 1 minute
 Working temperature -20~60°C (refer to output derating curve)
 Safety standards UL60950-1, TUV EN60950-1 approved
 EMC standards EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, ENV50204
 Connection 7+8P/ 9.5mm pitch terminal block with cover
 Packing 1.9kg ; 8pcs / 15.5kg / 1.06CUFT

Model No.	Output	Tol.	R&N	Effi.
PSP-600-5	5V, 0~80.0A	$\pm 2\%$	180mV	79%
PSP-600-12	12V, 0~50.0A	$\pm 1\%$	240mV	84%
PSP-600-13.5	13.5V, 0~44.5A	$\pm 1\%$	240mV	85%
PSP-600-15	15V, 0~40.0A	$\pm 1\%$	240mV	85%
PSP-600-24	24V, 0~25.0A	$\pm 1\%$	240mV	86%
PSP-600-27	27V, 0~22.2A	$\pm 1\%$	240mV	86%
PSP-600-48	48V, 0~12.5A	$\pm 1\%$	300mV	87%

1000W with PFC and Parallel Function



CASE: 952B 295x 127x 41 mm

- 1U low profile
- Universal AC input / Full range
- PF>0.98@115VAC; >0.95@230VAC
- Protections: Short circuit / Overload / Over voltage / Over temp.
- High power density 10.7W/in³
- Output voltage can be trimmed between 40~110% of the rated output voltage
- **Current sharing up to 4000W (3+1)**
- DC OK signal
- Built-in remote sense and ON/OFF control
- Built-in 5V/0.5A auxiliary power
- 3 years warranty

AC input voltage range 90~264VAC; 127~370VDC
 DC adjustment range $\pm 10\%$ rated output voltage
 Overload protection 105%~125% constant current, auto-recovery
 Over voltage protection 115%~135% rated output voltage
 Setup, rise, hold up time 300ms, 50ms, 16ms at full load and 230VAC
 Withstand voltage I/P-O/P:3kVAC, I/P-FG:1.5kVAC, 1 minute
 Working temperature -20~60°C (refer to output derating curve)
 Safety standards UL60950-1, TUV EN60950-1 approved
 EMC standards EN55022 Class B conducted, EN61000-3-2,3, ENV50204, EN61000-4-2,3,4,5,6,8,11, EN61000-6-2
 Packing 1.95kg ; 6pcs / 12.7kg / 0.99CUFT

Model No.	Output	Tol.	R&N	Effi.
RSP-1000-12	12V, 0~60A	$\pm 1\%$	150mV	83%
RSP-1000-15	15V, 0~50A	$\pm 1\%$	150mV	85%
RSP-1000-24	24V, 0~40A	$\pm 1\%$	150mV	88%
RSP-1000-27	27V, 0~37A	$\pm 1\%$	150mV	88%
RSP-1000-48	48V, 0~21A	$\pm 1\%$	150mV	90%

1500W with PFC and Parallel Function



CASE: 943A 278x 127x 83.5 mm

- Universal AC input / Full range
- PF>0.98@115VAC; >0.95@230VAC
- Protections: Short circuit / Overload / Over voltage / Over temp.
- Using ZVS technology to reduce power dissipation
- High power density 8.3W/in³
- Built-in 12V / 0.1A auxiliary output
- Alarm signal output
- DC output voltage adjustment 70~100% by external resistor
- Active current sharing up to 6000W (3+1)
- Built-in remote sense function
- Built-in remote ON/OFF control
- Forced air cooling by built-in DC fan
- 3 years warranty

AC input voltage range 90~264VAC; 127~370VDC
 DC adjustment range -30~+10% rated output voltage
 Overload protection 105%~135% constant current limiting, shut off after 5 sec.
 Over voltage protection 115%~140% rated output voltage
 Setup, rise, hold up time 1500ms, 100ms, 10ms at full load and 230VAC
 Withstand voltage I/P-O/P:3kVAC, I/P-FG:1.5kVAC, 1 minute
 Working temperature -20~70°C (refer to output derating curve)
 Safety standards UL60950-1, TUV EN60950-1 approved
 EMC standards EN55022 class B conducted, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, ENV50204
 Packing 3.0kg ; 4pcs / 13kg / 1.54CUFT

Model No.	Output	Tol.	R&N	Effi.
RSP-1500-5	5V, 0~240A	$\pm 2\%$	150mV	80%
RSP-1500-12	12V, 0~125A	$\pm 1\%$	150mV	87%
RSP-1500-15	15V, 0~100A	$\pm 1\%$	150mV	87%
RSP-1500-24	24V, 0~63A	$\pm 1\%$	150mV	90%
RSP-1500-27	27V, 0~56A	$\pm 1\%$	150mV	90%
RSP-1500-48	48V, 0~32A	$\pm 1\%$	200mV	91%

2000W with PFC and Parallel Function



CASE: 952B 295x 127x 41 mm

- Universal AC input / Full range
- Built-in active PFC function, PF>0.98
- Protections: Short circuit / Overload / Over voltage / Over temp. / Fan alarm
- Forced air cooling by built-in DC fan
- **Output voltage can be trimmed between 20~110% of the rated output voltage**
- High power density 21.4W/inch³
- Built-in 12V/0.8A & 5V/0.3A auxiliary output
- **Current sharing up to 3 units**
- Alarm signal output
- Built-in remote ON-OFF control
- Built-in remote sense function
- 1U low profile 41mm
- 3 years warranty

AC input voltage range 90~264VAC; 127~370VDC
 DC adjustment range $\pm 10\%$ rated output voltage
 Overload protection 105%~125% constant current limiting, auto-recovery
 Over voltage protection 120%~140% rated output voltage
 Setup, rise, hold up time 1500ms, 60ms, 16ms at full load and 230VAC
 Withstand voltage I/P-O/P:3kVAC, I/P-FG:1.5kVAC, 1 minute
 Working temperature -25~70°C (refer to output derating curve)
 Safety standards Design refer to UL60950-1, TUV EN60950-1
 EMC standards EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, ENV50204

Model No.	Output	Tol.	R&N	Effi.
RSP-2000-12	12V, 0~100A	$\pm 1\%$	150mV	86.0%
RSP-2000-24	24V, 0~80A	$\pm 1\%$	200mV	90.5%
RSP-2000-48	48V, 0~42A	$\pm 1\%$	300mV	92.0%

2400W with PFC and Parallel Function



CASE: 982B 278x 177.8x 63.5 mm

- AC input 180~264VAC only
- Built-in active PFC function, PF>0.95
- Protections: Short circuit / Overload / Over voltage / Over temp. / Fan alarm
- Forced air cooling by built-in DC with fan speed control function
- **Output voltage can be trimmed between 20~110% of the rated output voltage**
- High power density 12.5W/inch³
- **Current sharing up to 3 units**
- Alarm signal output (TTL signal & relay contact)
- Built-in 12V/0.1A auxiliary output for remote control
- Built-in remote ON-OFF control
- Built-in remote sense function
- 3 years warranty

AC input voltage range 180~264VAC; 254~370VDC
 DC adjustment range $\pm 10\%$ rated output voltage
 Overload protection 100%~112% constant current limiting, shut off after 5 sec., re-power on to recover (can adjust to continuous constant current limiting)
 Over voltage protection 115%~140% rated output voltage
 Setup, rise, hold up time 1000ms, 80ms, 12ms at full load and 230VAC
 Withstand voltage I/P-O/P: 3kVAC, I/P-FG: 1.5kVAC, 1 minute
 Working temperature -20~70°C (refer to output derating curve)
 Safety standards UL60950-1, TUV EN60950-1 approved
 EMC standards EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, ENV50204
 Packing 3.3kg ; 4pcs / 14.2kg / 1.89CUFT

Model No.	Output	Tol.	R&N	Effi.
RSP-2400-12	12V, 0~166.7A	$\pm 1\%$	150mV	87.0%
RSP-2400-24	24V, 0~100A	$\pm 1\%$	150mV	90.0%
RSP-2400-48	48V, 0~50A	$\pm 1\%$	200mV	91.5%

3000W with PFC and Parallel Function



CASE: 982B 278x 177.8x 63.5 mm

- AC input 180~264VAC only
- Built-in active PFC function, PF>0.95
- Protections: Short circuit / Overload / Over voltage / Over temp. / Fan alarm
- Forced air cooling by built-in DC with fan speed control function
- **Output voltage can be trimmed between 20~110% of the rated output voltage**
- High power density 15.6W/inch³
- **Current sharing up to 3 units**
- Alarm signal output (TTL signal & relay contact)
- Built-in 12V/0.1A auxiliary output for remote control
- Built-in remote ON-OFF control
- Built-in remote sense function
- 3 years warranty

AC input voltage range 180~264VAC; 254~370VDC
 DC adjustment range $\pm 10\%$ rated output voltage
 Overload protection 100%~112% constant current limiting, shut off after 5 sec., re-power on to recover (can adjust to continuous constant current limiting)
 Over voltage protection 115%~140% rated output voltage
 Setup, rise, hold up time 1000ms, 80ms, 10ms at full load and 230VAC
 Withstand voltage I/P-O/P: 3kVAC, I/P-FG: 1.5kVAC, 1 minute
 Working temperature -20~70°C (refer to output derating curve)
 Safety standards UL60950-1, TUV EN60950-1 approved
 EMC standards EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, ENV50204
 Packing 4kg ; 4pcs / 16kg / 1.89CUFT

Model No.	Output	Tol.	R&N	Effi.
RSP-3000-12	12V, 0~200A	$\pm 1\%$	150mV	86.0%
RSP-3000-24	24V, 0~125A	$\pm 1\%$	150mV	90.0%
RSP-3000-48	48V, 0~62.5A	$\pm 1\%$	200mV	90.5%

150W Single Output with PFC



220x 62.5x 32 mm

- Universal AC input / Full range
- Withstand 300VAC surge input for 5 seconds
- Built-in active PFC function
- **High efficiency up to 90%**
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Cooling by free air convection
- 1U low profile: 32mm
- Built-in remote sense function
- LED indicator for power on
- **Conformal coating**
- **Suitable for moving sign application**
- 3 years warranty

AC input voltage range 90~264VAC; 127~370VDC
 AC inrush current Cold start, 70A at 230VAC
 DC adjustment range $\pm 10\%$ rated output voltage
 Overload protection 105%~150% hiccup mode, auto-recovery
 Over voltage protection 115%~135% hiccup mode, auto-recovery
 Setup, rise, hold up time 2000ms, 100ms, 16ms at full load and 230VAC
 Withstand voltage I/P - O/P: 3kVAC, I/P-FG: 1.5kVAC, O/P-FG: 0.5kVAC
 Working temperature -30°C~+70°C (refer to output derating curve)
 Safety standards Design refer to UL60950-1, EN60950-1
 EMC standards Design refer to EN55022 class B, EN61000-3-2,3, ENV50204, EN61000-4-2,3,4,5,6,8,11

Model No.	Output	Tol.	R&N	Effi.
HSP-150-2.5	2.5V, 0~30A	$\pm 2\%$	50mV	80%
HSP-150-3.8	3.8V, 0~30A	$\pm 2\%$	50mV	86%
HSP-150-5	5V, 0~30A	$\pm 2\%$	50mV	90%

250W Single Output with PFC



199x 105x 41 mm

- Universal AC input / Full range
- Built-in active PFC function
- **Conformal coating**
- **High efficiency up to 87%**
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Forced air cooling by built-in DC fan
- 1U low profile: 41mm
- Built-in remote sense function
- LED indicator for power on
- **Suitable for moving sign application**
- 3 years warranty

AC input voltage range 85~264VAC; 120~370VDC
 DC adjustment range $\pm 10\%$ rated output voltage
 AC inrush current Cold start, 70A at 230VAC
 Overload protection 105%~135% hiccup mode, auto-recovery
 Over voltage protection 115%~135% shut down O/P voltage, re-power on to recover
 Setup, rise, hold up time 3000ms, 50ms, 16ms at full load and 230VAC
 Withstand voltage I/P - O/P: 3kVAC, I/P-FG: 1.5kVAC, O/P-FG: 0.5kVAC
 Working temperature -40°C~+70°C (refer to output derating curve)
 Safety standards UL60950-1, TUV EN60950-1 approved
 EMC standards EN55022 Class B, EN61000-3-2,3, EN55024, ENV50204, EN61000-4-2,3,4,5,6,8,11, EN61000-6-2
 Packing 0.97kg ; 16pcs / 16.5kg / 0.87CUFT

Model No.	Output	Tol.	R&N	Effi.
HSP-250-2.5	2.5V, 0~50A	$\pm 2\%$	100mV	79%
HSP-250-3.6	3.6V, 0~50A	$\pm 2\%$	100mV	83%
HSP-250-5	5V, 0~50A	$\pm 2\%$	100mV	87%

Enclosed-PFC Series 75~375W 3~4 Output



■ Features

- Universal AC input / Full range
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Over temperature protection (200~375W built-in, option for 100W and 150W)
- PF>0.98@115VAC; >0.95@230VAC
- Cooling by free air convection (75W / 100W)
- Forced air cooling by built-in DC fan (150W / 200W / 320W / 375W)
- 100% full load burn-in test
- 3 years warranty



(except for QP-320)

■ General Specification (Please refer to www.meanwell.com for detail spec.)

Model No.		TP-75	TP-100 QP-100	TP-150 QP-150	QP-200	QP-320	QP-375
AC input voltage range		90~264VAC; 127~370VDC					85~264VAC; 120~370VDC
AC inrush current (max.)		Cold start, 20A at 230VAC	Cold start, 40A at 230VAC		Cold start, 30A at 230VAC	Cold start, 45A at 230VAC	
DC adjustment range		CH1: -5%~+10% rated output voltage	CH1: -5%~+10% rated output voltage (CH1&2 for QP-100/150-3x, QP-100/150-D/F)		CH1&2: -5%~+10% rated output voltage		All outputs: -5%~+10% for QP-375-5, ±10% for QP-375-24
Overload protection	Range	105%~150% rated output voltage					105%~135%
	Type	Hiccup mode, auto-recovery			Constant current limiting, auto-recovery	Fold back current limiting, auto-recovery	Hiccup mode, auto-recovery
Over voltage protection		CH1: 115%~135%	115%~135% for CH1 or CH1&2				CH1: 115%~135% rated output voltage
Withstand voltage		I/P - O/P: 3kVAC, I/P - FG: 1.5kVAC, 1 minute					
Working temperature		-10°C~+60°C (refer to output derating curve)					-10°C~+70°C -10°C~+60°C
Setup, rise, hold up time		800ms, 60ms, 36ms at full load and 230VAC	800ms, 60ms, 24ms at full load and 230VAC(TP-100/150); 800ms, 50ms, 24ms at full load and 230VAC (QP-100/150)		800ms, 50ms, 24ms at full load and 230VAC	800ms, 50ms, 16ms at full load and 230VAC	800ms, 50ms, 36ms at full load and 230VAC
Safety standards		UL60950-1, TUV EN60950-1 approved					
EMC standards		EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, ENV50204					
Connection		8P / 7.62mm pitch terminal block	9P / 7.62mm pitch terminal block with cover		9P / 9.5mm pitch terminal block with cover		3P / 9.5mm pitch terminal block for input; 10P / 9.5mm pitch terminal block for output
Dimension (LxWxH)(mm)		179x 99x 33	199x 99x 50		215x 115x 50		280x 127x 63.5
Case No.		920A	916A	916B	912B	912I	927A

■ 75W — Triple Output

Model No.	Output	Tol.	R&N	Effi.	Max.
TP-75A	5V, 1.5~10A	±3%	100mV	70%	74W
	12V, 0.2~4.0A	±4%	120mV		
	-5V, 0.0~0.6A	±8%	100mV		
TP-75B	5V, 1.5~10A	±3%	100mV	70%	76W
	12V, 0.2~4.0A	±4%	120mV		
	-12V, 0.0~0.6A	±8%	120mV		
TP-75C	5V, 1.5~10A	±3%	100mV	70%	75W
	15V, 0.2~3.0A	±4%	120mV		
	-15V, 0.0~0.6A	±8%	120mV		
TP-75D	5V, 1.5~10A	±3%	100mV	70%	76W
	24V, 0.2~2.5A	±4%	120mV		
	12V, 0.0~0.6A	±8%	120mV		
TP-7503	5V, 1.5~10A	±3%	100mV	70%	75W
	3.3V, 0.2~8.0A	±4%	50mV		
	12V, 0.0~0.6A	±8%	120mV		

■ 100W — Triple Output

Model No.	Output	Tol.	R&N	Effi.	Max.
TP-100A	5V, 3.0~15A	±3%	100mV	75%	101W
	12V, 0.4~5.0A	±7%	120mV		
	-5V, 0.0~1.0A	±6%	100mV		

Model No.	Output	Tol.	R&N	Effi.	Max.
TP-100B	5V, 3.0~15A	±3%	100mV	78%	105W
	12V, 0.4~5.0A	±6%	120mV		
	-12V, 0.0~1.0A	±6%	100mV		
TP-100C	5V, 3.0~15A	±3%	100mV	77%	104W
	15V, 0.4~4.0A	+10%,-6%	150mV		
	-15V, 0.0~1.0A	±6%	100mV		
TP-100D	5V, 3.0~15A	±3%	100mV	78%	105W
	24V, 0.4~3.0A	±8%	150mV		
	12V, 0.0~1.0A	±6%	100mV		

■ 150W — Triple Output

Model No.	Output	Tol.	R&N	Effi.	Max.
TP-150A	5V, 2.0~20A	±3%	100mV	75%	150W
	12V, 0.4~7.0A	±8%	120mV		
	-5V, 0.0~1.0A	±6%	100mV		
TP-150B	5V, 2.0~20A	±3%	100mV	77%	148W
	12V, 0.4~7.0A	±8%	120mV		
	-12V, 0.0~1.0A	±6%	100mV		
TP-150C	5V, 2.0~20A	±3%	100mV	77%	152W
	15V, 0.4~6.0A	+10%,-6%	150mV		
	-15V, 0.0~1.0A	±6%	100mV		
TP-150D	5V, 2.0~20A	±3%	100mV	78%	154W
	24V, 0.4~4.0A	±8%	150mV		
	12V, 0.0~1.0A	±6%	100mV		

Enclosed-PFC Series



100W — Quad Output

Model No.	Output	Tol.	R&N	Effi.	Max.
QP-100B	5V, 2.0~10A	±3%	100mV	76%	101W
	12V, 0.3~4.0A	±6%	150mV		
	-12V, 0.15~1.0A	+10%,-6%	150mV		
QP-100C	-5V, 0.0~1.0A	±5%	100mV	77%	101W
	5V, 2.0~10A	±3%	100mV		
	15V, 0.3~3.0A	+6%,-10%	150mV		
QP-100D	-15V, 0.15~1.0A	±8%	150mV	78%	100W
	-5V, 0.0~1.0A	±5%	100mV		
	5V, 2.0~10A	±3%	120mV		
QP-100F	12V, 0.0~3.0A	±3%	150mV	78%	103W
	24V, 0.3~2.0A	±6%	200mV		
	-12V, 0.0~1.0A	±5%	150mV		
QP-100-3A	5V, 2.0~10A	±3%	100mV	74%	99W
	3.3V, 0.0~10A	±3%	100mV		
	12V, 0.3~3.0A	±6%	150mV		
QP-100-3B	-5V, 0.0~1.0A	±5%	150mV	74%	100W
	5V, 2.0~10A	±3%	100mV		
	3.3V, 0.0~10A	±3%	100mV		
QP-100-3C	12V, 0.3~3.0A	±6%	150mV	75%	101W
	-12V, 0.0~1.0A	±5%	150mV		
	5V, 2.0~10A	±3%	100mV		
QP-100-3D	3.3V, 0.0~10A	±3%	100mV	75%	105W
	15V, 0.3~2.0A	+8%,-6%	150mV		
	-15V, 0.0~1.0A	±5%	150mV		

150W — Quad Output

Model No.	Output	Tol.	R&N	Effi.	Max.
QP-150B	5V, 3.0~15A	±3%	100mV	76%	150W
	12V, 0.4~5.0A	±6%	150mV		
	-12V, 0.3~2.0A	+10%,-6%	150mV		
QP-150C	-5V, 0.0~1.0A	±5%	100mV	77%	153W
	5V, 3.0~15A	±3%	100mV		
	15V, 0.4~4.0A	+6%,-10%	150mV		
QP-150D	-15V, 0.3~2.0A	±8%	150mV	78%	150W
	-5V, 0.0~1.0A	±5%	100mV		
	5V, 3.0~15A	±3%	120mV		
QP-150F	12V, 0.0~5.0A	±3%	150mV	78%	152W
	24V, 0.4~3.0A	±6%	200mV		
	-12V, 0.0~1.0A	±5%	150mV		
QP-150-3A	5V, 3.0~15A	±3%	100mV	73%	146W
	3.3V, 0.0~15A	±3%	100mV		
	12V, 0.4~5.0A	±6%	150mV		
QP-150-3B	-5V, 0.0~1.0A	±5%	150mV	75%	150W
	5V, 3.0~15A	±3%	100mV		
	3.3V, 0.0~15A	±3%	100mV		
QP-150-3C	12V, 0.4~5.0A	±6%	150mV	74%	152W
	-12V, 0.0~1.0A	±5%	150mV		
	5V, 3.0~15A	±3%	100mV		
QP-150-3D	3.3V, 0.0~15A	±3%	100mV	76%	150W
	15V, 0.4~5.0A	+8%,-6%	150mV		
	-15V, 0.0~1.0A	±5%	150mV		

200W — Quad Output


Model No.	Output	Tol.	R&N	Effi.	Max.
QP-200D	5V, 3.0~20A	±3%	100mV	75%	203W
	12V, 0.0~7.0A	±3%	150mV		
	24V, 0.4~6.0A	+10%,-6%	150mV		
QP-200F	-12V, 0.0~1.0A	±6%	150mV	75%	203W
	5V, 3.0~20A	±3%	100mV		
	15V, 0.0~6.0A	±3%	150mV		
QP-200-3A	24V, 0.4~6.0A	+10%,-6%	150mV	72%	200W
	-15V, 0.0~1.0A	±6%	150mV		
	5V, 3.0~20A	±3%	100mV		
QP-200-3B	3.3V, 0.0~20A	±3%	100mV	72%	205W
	12V, 0.5~8.0A	+8%,-10%	150mV		
	-12V, 0.0~1.0A	±6%	150mV		
QP-200-3C	5V, 3.0~20A	±3%	100mV	72%	210W
	3.3V, 0.0~20A	±3%	100mV		
	15V, 0.5~7.0A	+10%,-6%	150mV		
QP-200-3D	-15V, 0.0~1.0A	±6%	150mV	74%	204W
	5V, 3.0~20A	±3%	100mV		
	3.3V, 0.0~20A	±3%	100mV		
QP-200-3E	24V, 0.4~6.0A	+10%,-6%	150mV	74%	206W
	-12V, 0.0~1.0A	±6%	150mV		
	5V, 3.0~20A	±3%	100mV		

320W — Quad Output

Model No.	Output	Tol.	R&N	Effi.	Max.
QP-320D	5V, 2.5~20A	±3%	100mV	83%	316W
	12V, 0.0~10A	±3%	150mV		
	24V, 0.2~5.0A	+10%,-6%	150mV		
QP-320F	-12V, 0.2~2.0A	±10%	150mV	83%	316W
	5V, 2.5~20A	±3%	100mV		
	15V, 0.0~10A	±3%	150mV		

375W — Quad Output

Model No.	Output	Tol.	R&N	Effi.	Max.
QP-375-5A	5V, 3.5~40A	±1%	100mV	77%	378W
	12V, 0.0~16A	±1%	150mV		
	±12V, 0.0~6.0A	±1%	150mV		
QP-375-5B	±12V, 0.0~3.0A	±1%	50mV	77%	357W
	5V, 3.5~40A	±1%	100mV		
	12V, 0.0~16A	±1%	120mV		
QP-375-5C	±12V, 0.0~6.0A	±1%	120mV	77%	378W
	±5V, 0.0~3.0A	±1%	50mV		
	5V, 3.5~40A	±1%	100mV		
QP-375-5D	12V, 0.0~16A	±1%	150mV	78%	378W
	±15V, 0.0~4.0A	±1%	240mV		
	±15V, 0.0~4.0A	±1%	100mV		
QP-375-5E	5V, 3.5~40A	±1%	100mV	78%	378W
	12V, 0.0~16A	±1%	120mV		
	±24V, 0.0~4.0A	±1%	120mV		
QP-375-24B	±24V, 0.0~3.0A	±1%	240mV	78%	386W
	24V, 1.0~10A	±1%	240mV		
	5V, 0.0~16A	±1%	50mV		
QP-375-24C	±12V, 0.0~4.0A	±1%	120mV	80%	410W
	±12V, 0.0~4.0A	±1%	120mV		
	24V, 1.0~10A	±1%	240mV		

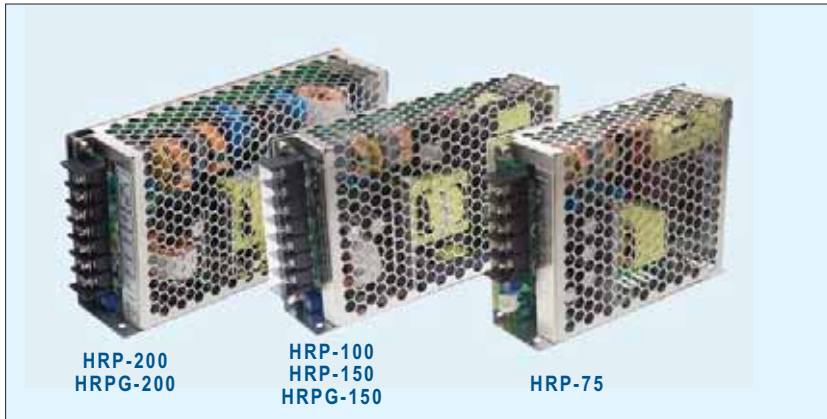

■ Features

- Universal AC input / Full range
- Withstand 300VAC surge input for 5 seconds
- Built-in active PFC function
- Protections:
Short circuit / Overload / Over voltage / Over temp. (optional for HRP-75 / HRP-100)
- Built-in constant current limiting circuit
- Built-in remote sense function (HRP□-150 / 200)
- No load power consumption<0.5W (except for HRP-150/200)
- Built-in remote ON/OFF control (except for HRP-150 / 200)
- Built-in 5V / 0.3A standby output (HRPG-150 / 200)
- Cooling by free air convection
- 1U low profile
- LED indicator for power on
- 100% full load burn-in test
- 5 years warranty

■ General Specification (Please refer to www.meanwell.com for detail spec.)



Model No.		HRP-75	HRP-100	HRP□-150	HRP□-200
AC input voltage range		85~264VAC, 120~370VDC			
AC inrush current (max.)		Cold start, 65A at 230VAC		Cold start, 70A at 230VAC	
DC adjustment range		-5%~+10% rated output voltage		±15% rated output voltage	
Overload protection	Range	105%~135%			
	Type	Constant current limiting, auto-recovery			
Over voltage protection		115%~145%			
Withstand voltage		I/P - O/P: 3kVAC, I/P - FG: 1.5kVAC, O/P - FG: 0.5kVAC			
Working temperature		-40~+70°C (refer to output derating curve)	-40~+60°C	-40~+70°C	
Safety standards		UL60950-1, TUV EN60950-1 approved			
EMC standards		EN55022 class B, EN61000-4-2,3,4,5,6,8,11, EN61000-3-2,3, ENV50204, EN61000-6-2 heavy industry level			
Connection		5P / 9.5mm pitch terminal block with cover	7P / 9.5mm pitch terminal block with cover		
Dimension (LxWxH)(mm)		129x98x38	159x97x38		199x 98x 38
Case No.		903D	901I		902E

■ 75W HRP-75

Model No.	Output	Tol.	R&N	Effi.
HRP-75-3.3	3.3V, 0~15A	±2.5%	80mV	77.0%
HRP-75-5	5V, 0~15A	±2.5%	80mV	82.5%
HRP-75-7.5	7.5V, 0~10A	±2.5%	100mV	84.0%
HRP-75-12	12V, 0~6.3A	±1.5%	120mV	87.0%
HRP-75-15	15V, 0~5A	±1.5%	150mV	88.0%
HRP-75-24	24V, 0~3.2A	±1.5%	150mV	88.5%
HRP-75-36	36V, 0~2.1A	±1.5%	200mV	89.0%
HRP-75-48	48V, 0~1.6A	±1.5%	240mV	89.0%

■ 150W HRP□-150

Model No.	Output	Tol.	R&N	Effi.
HRP□-150-3.3	3.3V, 0~30A	±2.5%	80mV	78.5%
HRP□-150-5	5V, 0~26A	±2.5%	80mV	85.0%
HRP□-150-7.5	7.5V, 0~20A	±2.5%	100mV	87.0%
HRP□-150-12	12V, 0~13A	±1.5%	120mV	88.0%
HRP□-150-15	15V, 0~10A	±1.5%	150mV	88.0%
HRP□-150-24	24V, 0~6.5A	±1.5%	150mV	88.0%
HRP□-150-36	36V, 0~4.3A	±1.5%	200mV	89.0%
HRP□-150-48	48V, 0~3.3A	±1.5%	240mV	89.0%

□=blank, G; blank: basic function, G: with 5Vsb & no load <0.5W

■ 100W HRP-100

Model No.	Output	Tol.	R&N	Effi.
HRP-100-3.3	3.3V, 0~20A	+2.5, -3.5%	80mV	78.0%
HRP-100-5	5V, 0~17A	±2.5%	80mV	83.0%
HRP-100-7.5	7.5V, 0~13.5A	±2.5%	100mV	84.0%
HRP-100-12	12V, 0~8.5A	±1.5%	120mV	87.5%
HRP-100-15	15V, 0~7A	±1.5%	150mV	88.0%
HRP-100-24	24V, 0~4.5A	±1.5%	150mV	88.5%
HRP-100-36	36V, 0~2.9A	±1.5%	200mV	89.0%
HRP-100-48	48V, 0~2.2A	±1.5%	240mV	90.0%

■ 200W HRP□-200

Model No.	Output	Tol.	R&N	Effi.
HRP□-200-3.3	3.3V, 0~40A	±2%	80mV	80.0%
HRP□-200-5	5V, 0~35A	±2%	90mV	84.0%
HRP□-200-7.5	7.5V, 0~26.7A	±2%	100mV	86.0%
HRP□-200-12	12V, 0~16.7A	±1%	120mV	88.0%
HRP□-200-15	15V, 0~13.4A	±1%	150mV	88.0%
HRP□-200-24	24V, 0~8.4A	±1%	150mV	88.0%
HRP□-200-36	36V, 0~5.7A	±1%	250mV	89.0%
HRP□-200-48	48V, 0~4.3A	±1%	250mV	89.0%

□=blank, G; blank: basic function, G: with 5Vsb & no load <0.5W



Features

- Universal AC input / Full range
- Withstand 300VAC surge input for 5 seconds
- Built-in active PFC function
- Protections: Short circuit / Overload / Over voltage / Over temp.
- Built-in constant current limiting circuit
- Built-in remote sense function
- Built-in DC OK signal
- No load power consumption<0.5W (HRPG-300 / 450)
- No load power consumption<0.75W (HRPG-600)
- Built-in remote ON/OFF control & 5V / 0.3A standby output (HRPG series)
- Built-in current sharing (HRPG-600-24 / 36 / 48)
- Forced air cooling by built-in DC fan
- 1U low profile (HRP□-300 / 450)
- 100% full load burn-in test
- 5 years warranty

General Specification (Please refer to www.meanwell.com for detail spec.)



Model No.	HRP□-300	HRP□-450	HRP□-600
AC input voltage range	85~264VAC, 120~370VDC		
AC inrush current (max.)	Cold start, 70A at 230VAC		
DC adjustment range	±15% rated output voltage		
Overload Protection	Range: 105%~135% Type: Constant current limiting, auto-recovery		
Over voltage protection	115%~145%		
Withstand voltage	I/P - O/P: 3kVAC, I/P - FG: 1.5kVAC, O/P - FG: 0.5kVAC, 1 minute		
Working temperature	-40~+70°C (refer to output derating curve)		
Safety standards	UL60950-1, TUV EN60950-1 approved		
EMC standards	EN55022 class B, EN61000-4-2,3,4,5,6,8,11, EN61000-3-2,3, ENV50204, EN61000-6-2 heavy industry level		
Connection	7P / 11mm pitch terminal block with cover	3+6P / 10&11mm pitch terminal block with cover	
Dimension (LxWxH)(mm)	199x 105x 41	218x 105x 41	218x 105x 63.5
Case No.	980A	995A	977A

300W HRP□-300

Model No.	Output	Tol.	R&N	Effi.
HRP□-300-3.3	3.3V, 0~60A	±2.5%	80mV	80.0%
HRP□-300-5	5V, 0~60A	±2.0%	90mV	82.0%
HRP□-300-7.5	7.5V, 0~40A	±2.0%	100mV	86.0%
HRP□-300-12	12V, 0~27A	±1.0%	120mV	88.0%
HRP□-300-15	15V, 0~22A	±1.0%	150mV	88.0%
HRP□-300-24	24V, 0~14A	±1.0%	150mV	87.0%
HRP□-300-36	36V, 0~9A	±1.0%	250mV	88.0%
HRP□-300-48	48V, 0~7A	±1.0%	250mV	89.0%

□ = blank, G; blank: basic function, G: with 5Vsb & no load <0.5W

600W HRP□-600

Model No.	Output	Tol.	R&N	Effi.
HRP□-600-3.3	3.3V, 0~120A	±2%	100mV	78.5%
HRP□-600-5	5V, 0~120A	±2%	100mV	82.0%
HRP□-600-7.5	7.5V, 0~80A	±2%	100mV	87.0%
HRP□-600-12	12V, 0~53A	±1%	120mV	88.0%
HRP□-600-15	15V, 0~43A	±1%	150mV	88.0%
HRP□-600-24	24V, 0~27A	±1%	150mV	88.0%
HRP□-600-36	36V, 0~17.5A	±1%	200mV	89.0%
HRP□-600-48	48V, 0~13A	±1%	240mV	89.0%

□ = blank, G; blank: basic function, G: with 5Vsb & no load <0.75W

450W HRP□-450

Model No.	Output	Tol.	R&N	Effi.
HRP□-450-3.3	3.3V, 0~90A	±2%	80mV	80.0%
HRP□-450-5	5V, 0~90A	±2%	80mV	83.0%
HRP□-450-7.5	7.5V, 0~60A	±2%	100mV	86.5%
HRP□-450-12	12V, 0~37.5A	±1%	120mV	88.0%
HRP□-450-15	15V, 0~30A	±1%	150mV	89.0%
HRP□-450-24	24V, 0~18.8A	±1%	150mV	88.0%
HRP□-450-36	36V, 0~12.5A	±1%	240mV	89.0%
HRP□-450-48	48V, 0~9.5A	±1%	240mV	89.5%

□ = blank, G; blank: basic function, G: with 5Vsb & no load <0.5W



We are a TQM (Total Quality Management) company and ISO-9001 certified since 1994.



Who can provide you better services and be a trustworthy partner in the power industry?

— "MEAN WELL" tries to be —



Best products also need best service.

We have authorized distributors all over the world. They have sufficient stock for your prompt delivery. Also they can offer you technical support & RMA services. Please contact your local distributors for more product information. You can also contact us at info@meanwell.com for information of your local distributors.



■ Features

- Universal AC input / Full range
- Built-in active PFC function, PF>0.95
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Output voltage programmable from 20~110% by 1~5.5VDC external control signal
- Forced air cooling by built-in DC fan with fan speed control (except for SPV-150)
- Cooling by free air convection (SPV-150)
- Built-in remote sense and ON/OFF control (SPV-600/1500)
- Built-in 12V/0.1A auxiliary output and current sharing up to 4500W (SPV-1500)
- 3 years warranty

■ General Specification (Please refer to www.meanwell.com for detail spec.)

Model No.	SPV-150	SPV-300	SPV-600 Under Development	SPV-1500
AC input voltage range	88~264VAC, 124~370VDC			90~264VAC, 127~370VDC
AC inrush current (max.)	Cold start, 40A at 230VAC			Cold Start, 60A at 230VAC
DC adjustment range	-15%~+10% rated output voltage		±5% rated output voltage	
Overload protection	Range	105%~150%	105%~135%	
	Type	Constant current limiting, auto-recovery		
Over voltage protection	115%~140%			120%~140%
Withstand voltage	I/P - O/P: 3kVAC, I/P - FG: 1.5kVAC, O/P - FG: 0.5kVAC, 1 minute			
Working temperature	-20~+65°C (refer to output derating curve)		-20~+60°C	-20~+70°C
Safety standards	UL60950-1, TUV EN60950-1 approved			
EMC standards	EN55022 class B, EN61000-4-2,3,4,5,6,8,11, EN61000-3-2,3, ENV50204, EN55024, light industry level, criteria A			
Connection	9P / 9.5mm pitch terminal block with cover		15P / 9.5mm pitch terminal block with cover	3P / 13mm pitch terminal block with cover for input; copper pillars for output
Dimension (LxWxH)(mm)	215x115x50		170x120x93	278x127x83.5
Case No.	912L	912G	910A	943A
Packing	12pcs / 14.0kg		8pcs / 15.5kg	4pcs / 13kg

■ 150W

Model No.	Output	Tol.	R&N	Effi.
SPV-150-12	12V, 0~12.5A	±1%	150mV	82%
SPV-150-24	24V, 0~6.25A	±1%	150mV	83%
SPV-150-48	48V, 0~3.125A	±1%	240mV	83%

■ 600W Under Development

Model No.	Output	Tol.	R&N	Effi.
SPV-600-12	12V, 0~50A	±1%	240mV	84%
SPV-600-24	24V, 0~25A	±1%	240mV	86%
SPV-600-48	48V, 0~12.5A	±1%	300mV	87%

■ 300W

Model No.	Output	Tol.	R&N	Effi.
SPV-300-12	12V, 0~25A	±1%	150mV	83.5%
SPV-300-24	24V, 0~12.5A	±1%	150mV	85.0%
SPV-300-48	48V, 0~6.25A	±1%	240mV	86.5%

■ 1500W

Model No.	Output	Tol.	R&N	Effi.
SPV-1500-12	12V, 0~125A	±1%	150mV	86.5%
SPV-1500-24	24V, 0~63A	±1%	150mV	90.0%
SPV-1500-48	48V, 0~32A	±1%	200mV	90.0%



Who can provide you better services and be a trustworthy partner in the power industry?

— "MEAN WELL" tries to be —



Customer Satisfaction —

Today's effort, tomorrow's reward. Continuously improve CQTS to satisfy customer is our goal.



We provide specification, drawing, test report and more information, please visit our website —

<http://www.meanwell.com>



48hrs delivery—

We keep enough stock for 95% of standard models at our 2400m² warehouse. We can arrange prompt delivery within 48hrs.



Best products also need best service.

We have authorized distributors all over the world. They have sufficient stock for your prompt delivery. Also they can offer you technical support & RMA services. Please contact your local distributors for more product information. You can also contact us at info@meanwell.com for information of your local distributors.



Features

- Universal AC input / Full range
- Built-in active PFC
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Output wattage:
 - USP-150: 150W convection
 - USP-225: 150W convection, 225W with 18CFM forced air
 - USP-350: 300W convection, 350W with 23.5CFM forced air
 - USP-500: 400W convection, 500W with 23.5CFM forced air
- High power density: 5.5W/in³ (USP-150); 4.7W/in³ (USP-225); 6.32W/in³ (USP-350); 6.2W/in³ (USP-500)
- U-bracket low profile: 33mm(USP-150); 38mm(USP-225/300); 41mm(USP-500)
- Built-in remote ON/OFF control, remote sense, DC OK signal (USP-500)
- Optional current sharing(1+1) for USP-500-24/48
- 3 years warranty

General Specification (Please refer to www.meanwell.com for detail spec.)

Model No.		USP-150 	USP-225	USP-350	USP-500
AC input voltage range		90~295VAC, 127~417VDC		90~264VAC, 127~370VDC	
AC inrush current (max.)		Cold start, 65A at 230VAC	15A at 115VAC, 30A at 230VAC	22A at 115VAC, 44A at 230VAC	30A at 115VAC, 50A at 230VAC
DC adjustment range		±10% rated output voltage			
Overload protection	Range	110%~160%	105%~150%	105%~130%	
	Type	Hiccup mode, auto-recovery	Constant current limiting, auto-recovery		Constant current, shut off after 3 sec.
Over voltage protection	Range	110%~135%	110%~135%	110%~140%	115%~135%
	Type	Shut off, AC recycle to re-start		Hiccup mode, auto-recovery	Shut off, AC recycle to re-start
Withstand voltage		I/P - O/P: 3kVAC, I/P - FG: 1.5kVAC, O/P - FG: 0.5kVAC, 1 minute			
Working temperature		-30~+65°C	-20~+65°C	-10~+65°C	-20~+70°C
Vibration		10~500Hz, 5G 10min./1cycle, 60min. each along X, Y, Z axes	10~500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes		
Safety standards		Design refer to UL60950-1, TUV EN60950-1	UL60950-1, TUV EN60950-1 approved		
EMC standards		EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, ENV50204			
Connection		JST: SVH-21T-P1.1, 4P/7.62mm pitch terminal block	20P/2.54mm pitch, Molex 39-29-9206	5+9P/2/3.96mm pitch, JST: B5P/B9P/2-VH	3+8P/8.5mm pitch terminal block with cover
Dimension (LxWxH)(mm)		215x 67.4x 33	202x 101.5x 38	235.2x 101.5x 38	254x 127x 41

150W



Model No.	Output	Tol.	R&N	Effi.
USP-150-12	12V, 0~12.5A	±2%	100mV	91.5%
USP-150-15	15V, 0~10.0A	±2%	150mV	91.5%
USP-150-24	24V, 0~6.30A	±2%	150mV	93.0%
USP-150-36	36V, 0~4.20A	±2%	250mV	93.0%
USP-150-48	48V, 0~3.20A	±2%	250mV	93.0%

350W



Model No.	Output	Tol.	R&N	Effi.
USP-350-3.3	3.3V, 0~70.0A	±2%	80mV	78%
USP-350-5	5V, 0~70.0A	±2%	80mV	84%
USP-350-12	12V, 0~29.2A	±2%	100mV	88%
USP-350-15	15V, 0~23.4A	±2%	100mV	88%
USP-350-24	24V, 0~14.6A	±2%	150mV	88%
USP-350-48	48V, 0~7.30A	±2%	150mV	89%

225W



Model No.	Output	Tol.	R&N	Effi.
USP-225-3.3	3.3V, 0~40.0A	±2%	100mV	72%
USP-225-5	5V, 0~40.0A	±2%	100mV	77%
USP-225-12	12V, 0~18.7A	±2%	100mV	83%
USP-225-15	15V, 0~15.0A	±2%	100mV	84%
USP-225-24	24V, 0~9.40A	±2%	150mV	85%
USP-225-48	48V, 0~4.70A	±2%	250mV	86%



500W



Model No.	Output	Tol.	R&N	Effi.
USP-500-5	5V, 0~80.0A	±2%	80mV	85%
USP-500-12	12V, 0~42.0A	±2%	100mV	90%
USP-500-15	15V, 0~33.5A	±2%	100mV	90%
USP-500-24	24V, 0~21.0A	±2%	150mV	89%
USP-500-48	48V, 0~10.5A	±2%	150mV	90%

1000W 1U Rack Power System

- Universal AC input / Full range
- Built-in 5V/0.3A standby power
- Built-in active PFC function, PF>0.96
- Protections: Short circuit / Overload / Over voltage / Over temp.
- Forced air cooling by built-in DC fan
- High power density 10.7W/in³
- 1U low profile
- Output voltage can be trimmed between 90 ~ 110% of the rated output voltage
- Active current sharing up to 3000W (3 units) in one 19" rack, 3 racks max. can be operated in parallel (up to 8 units)
- Remote control for single unit
- Built-in remote sense function
- Hot-swap operation
- Internal oring diode
- AC OK and DC OK signal output
- Optional I²C serial data bus
- 3 years warranty

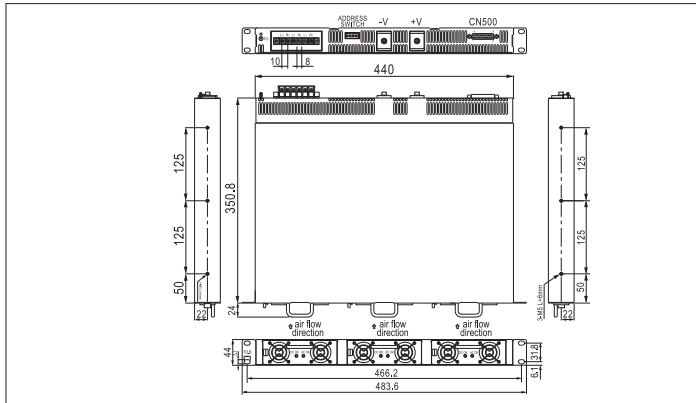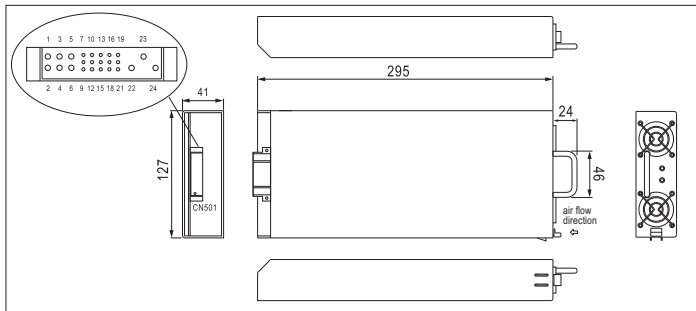


- AC input voltage range 90~264VAC
 DC adjustment range $\pm 3\%$ rated output voltage
 Overload protection 105%~125% constant current limiting, auto-recovery
 Over voltage protection 110%~135% rated output voltage
 Setup, rise, hold up time 1000ms, 60ms, 16ms at full load and 230VAC
 Withstand voltage I/P-O/P:3kVAC, I/P-FG:1.5kVAC, 1 minute
 Working temperature -20~50°C@100%, 60°C@60%
 Safety standards UL60950-1, TUV EN60950-1 approved
 EMC standards EN55022 Class B, EN61204-3, EN61000-3-2,-3, EN61000-4-2,3,4,5,6,8,11, ENV50204, EN61000-6-2 heavy industry level
 Packing 1.91kg (single unit) ; 11kg (rack with 3 units)

Model No.	Output	Tol.	R&N	Effi.
RCP-1000-12	12V, 0~60A	$\pm 1\%$	150mV	81%
RCP-1000-24	24V, 0~40A	$\pm 1\%$	200mV	87%
RCP-1000-48	48V, 0~21A	$\pm 1\%$	300mV	89%

RCP-1U□
 □= I: AC inlet ; T: terminal block

2000W 1U Rack Power System

- Universal AC input / Full range
- Withstand 300VAC surge for 5 seconds
- Built-in 5V/0.3A, 12V/0.8A auxiliary power
- Built-in active PFC function, PF>0.98
- Protections: Short circuit / Overload / Input under voltage / Over voltage / Over temperature
- Forced air cooling by built-in DC fan
- High power density 21.4W/in³
- 1U low profile
- Active current sharing up to 6000W (3 units) in one 19" rack, 3 racks max. can be operated in parallel (up to 9 units)
- Remote control for single unit
- Built-in remote sense function
- Hot-swap operation
- PMBus serial communication
- AC OK and DC OK signal, fan fail, OTP alarm signal
- 3 years warranty

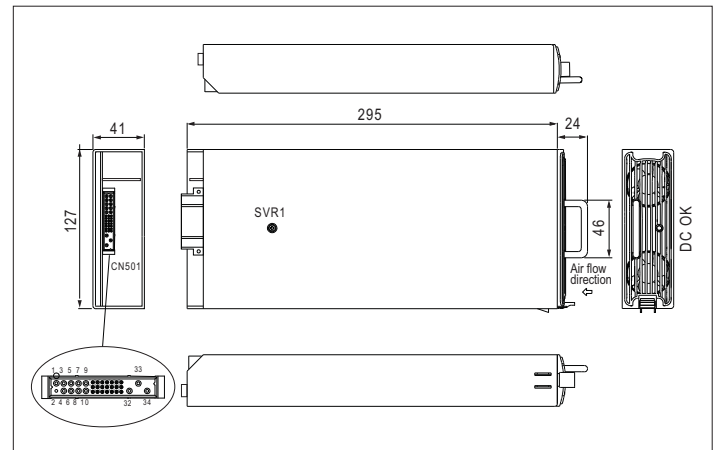

- AC input voltage range 90~264VAC
 DC adjustment range -12%~+15% rated output voltage
 Overload protection 105%~125% constant current limiting, auto-recovery
 Over voltage protection 120%~140% rated output voltage
 Setup, rise, hold up time 1500ms, 60ms, 16ms at full load and 230VAC
 Withstand voltage I/P-O/P:3kVAC, I/P-FG:1.5kVAC, 1 minute
 Working temperature -25~+70°C(refer to output derating curve)
 Safety standards UL60950-1, TUV EN60950-1 approved
 EMC standards EN55022 Class B, EN61000-3-2,-3, EN61000-4-2,3,4,5,6,8,11, ENV50204, EN61000-6-2 heavy industry level

Model No.	Output	Tol.	R&N	Effi.
RCP-2000-12	12V, 0~100A	$\pm 1\%$	150mV	86.0%
RCP-2000-24	24V, 0~80A	$\pm 1\%$	200mV	90.5%
RCP-2000-48	48V, 0~42A	$\pm 1\%$	300mV	92.0%

RKP-1U□
 □=I: AC inlet; T: terminal block

Power Control and Monitor Unit

- 1U low profile
- 19-inch rack mounting
- **I²C decoder, control and monitor up to 3 RCP-1000-□-C units**
- Suitable for all kinds of RCP output (12V, 24V, 48V)
- Digital meters for output voltage, output current, and internal temperature on front panel
- Potential meter for adjusting output voltage of RCP-1000 unit on front panel
- Relay contacts and LED indicators for AC fail, DC fail, and over temperature warning
- Removable fixing accessory
- 3 years warranty

CE



AC input voltage range 90~264VAC
 AC inrush current Cold start, 30A at 115VAC, 50A at 230VAC
 Relay contact rating 30VDC, 1A
 Working temperature -20~60°C
 Safety standards Design refer to UL60950-1, TUV EN60950-1
 Withstand voltage I/P-O/P: 3kVAC, I/P-FG: 1.5kVAC, O/P-FG: 0.5kVAC
 Isolation resistance I/P-O/P, I/P-FG, O/P-FG: 100M Ohms/500VDC
 EMC standards Compliance to EN55022, EN61000-3-2, -3, EN61000-4-2, 3, 4, 5, 6, 8, 11
 Connection Screw DIN terminal for AC input and relay contact output; D-Type right angle 25 positions for communication port

Model No.	Application
RCP-MU	Control and monitor RCP-1000 series

1U Rack Control and Monitoring Unit

- 1U low profile
- 19-inch rack mounting
- Control and monitor up to 32 RCP-2000 units
- Front panel LCD and buttons for on-site service without PC
- Alarm/event log with time and date
- Windows-based PC communication software
- USB, RS-232 or Ethernet interface for PC connection locally or remote monitoring and control via GSM modem
- Easy wire connections on rear side
- 4 user programmable relay outputs for traditional remote warning
- 3 years warranty

CE pending



DC input voltage range 10~60VDC
 DC input current 0.5A at 24VDC, 0.25A at 48VDC
 Output relay contact 4 user programmable relay
 Working temperature -25~+70°C
 Safety standards Design refer to UL60950-1, TUV EN60950-1
 Withstand voltage I/P-O/P: 1.5kVAC, I/P-FG: 1.5kVAC
 Isolation resistance I/P-O/P, I/P-FG: 100M Ohms / 500VDC / 25°C / 70%RH
 EMC standards Design refer to EN55022 Class B, EN61000-4-2, 3, 4, 6, 8

Model No.	Application
RCP-CMU-1	Control and monitor RCP-2000 series (single unit)
RCP-CMU-1-R	Control and monitor RCP-2000 series (with 19" rack)


Custom-Made 19" 2U Rack Power System

- Standard 19" 2U rack – 480 x 420 x 80mm
- Custom rack configurations available, 4500W max., up to 8 outputs
- LED indicators on front panel
- Meters for output voltage and current on front panel
- Front panel voltage adjustment
- Wide range of backplane connection option
- Choose from MEAN WELL's wide range of standard power supply
- Complete assembly and testing on your custom rack system
- Engineering support available to assist you in specifying your requirement
- 2 years warranty

Panel Type A: with power switch, LED indicators, and output adjustment potentiometers.



Panel Type B: with additional digital meters and selector switch.

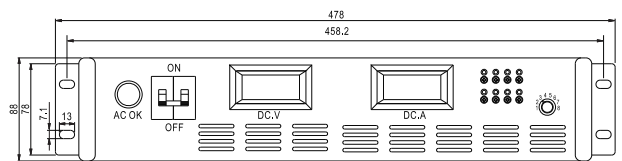

Example

❖ 12V, 4500W 2U Rack System

- RSP-1500-12 x 3pcs
- LED indicators and front panel voltage adjustment
- Output voltage and current digital meters
- I/O interface:
 - AC Input — Terminal block
 - DC Output — Copper pillars
 - Single Output — Terminal block



We provide specification, drawing, test report and more information, please visit our website — <http://www.meanwell.com>



Customer Satisfaction —

Today's effort, tomorrow's reward. Continuously improve CQTS to satisfy customer is our goal.



MP450 (450W, 5 SLOT)

MP650 (650W, 5 SLOT)

MP1K0 (1000W, 7 SLOT)



MS-75

MS-150


MS-300

MD-100


Description

Modular series are switching power supplies with modular design that consist of two stages: front-end PFC and output modules. Using ZVS (Zero Voltage Switching) technology to realize the power factor correction, the line input is rectified into high DC voltage (around 390Vdc) by the front-end PFC stage, and then the DC output modules will transfer the operating voltage into all kinds of DC output voltages from 1.6V~53V. Right now we offer 75W, 150W, 300W single output modules and 100W dual output modules to fulfill all kinds of applications up to 14 isolated outputs. There are millions of combinations available for the Modular series. Users can configure the DC outputs they need and get the fastest solution for their own power requirement with safety and EMC certificates. No more NRE / safety application charges and long period of waiting for certificates! Providing standard products as usual, MEAN WELL offer you a revolutionary standard power solution that fulfills your custom-made request!

Output Configuration Guide

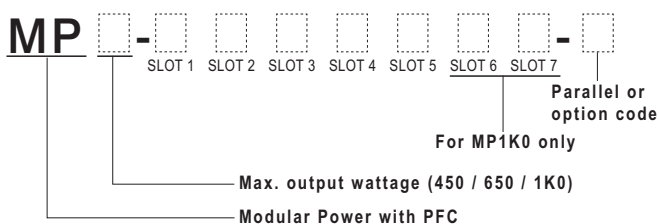

Example:

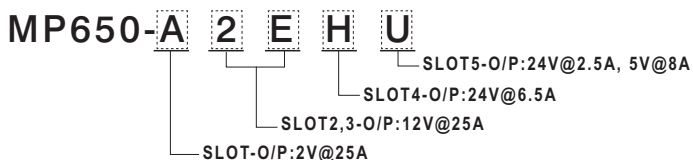

Features

- Millions of output configuration is available
- Using ZVS technology to reduce power dissipation and improve efficiency
- Universal AC input / Full range
- Built-in active PFC compliance to EN61000-3-2
- Built-in constant current limiting circuit for single output modules
- Remote control on each output module
- Remote sense on each output module (MS-75/150/300)
- Short circuit / Overload / Over voltage protections for all modules
- Built-in parallel function for MS-300(up to 3 units)
- Cooling by built-in DC fan with fan alarm function
- Additional 12V/0.1A auxiliary output for remote control
- 3 years warranty

Modular Series



General Specification (Please refer to www.meanwell.com for detail spec.)



Model No.	MP450	MP650	MP1K0
AC input voltage range	85~264VAC or 120~370VDC		
Power Factor	PF > 0.95 / 230VAC, PF > 0.98 / 115VAC at full load		
AC inrush current (max.)	Cold start, 40A at 230VAC	Cold start, 50A at 230VAC	Cold start, 40A at 230VAC
Max output voltage	450W	650W	1000W
Efficiency (typical)	83%	85%	84%
Over temperature protection	Output shutdown, auto-recovery		
Fan alarm	Output shutdown when fan malfunction		
Withstand voltage	I/P - O/P: 3kVAC, I/P - FG: 1.5kVAC, O/P - FG: 0.5kVAC, 1 minute		
Working temperature	-20~+50°C@100%, +70°C @ 50% load		
Safety standards	UL60950-1, TUV EN60950-1		
EMC standards	Compliance to EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, ENV50204, EN55024 light industry level, criteria A		
Connection	Input side: 3P/10mm pitch terminal block & JST B3B-XH		
Dimension (LxWxH)(mm)	254x 127x 63.5	278x 127x 63.5	278x 177.8x 63.5

MS-75: 1-SLOT single output (75W max.)

Item Code	Output	★Peak I	Vdc adj.	Tol.	R&N.
L	3.3V, 0~15A	17.3A	2.6~4.0V	±2%	80mV
M	5V, 0~15A	17.3A	4.0~6.0V	±2%	80mV
N	12V, 0~6.3A	7.30A	9.0~13.2V	±1%	150mV
O	15V, 0~5.0A	5.80A	13.2~16.8V	±1%	150mV
P	24V, 0~3.2A	3.70A	20.0~26.4V	±1%	150mV
Q	48V, 0~1.6A	1.80A	40.0~53.0V	±1%	250mV

MS-150: 1-SLOT single output (150W max.)

Item Code	Output	★Peak I	Vdc adj.	Tol.	R&N.
A	2V, 0~25A	30.0A	1.6~2.6V	±3%	50mV
B	3.3V, 0~25A	30.0A	2.6~4.0V	±2%	80mV
C	5V, 0~25A	30.0A	4.0~6.0V	±2%	80mV
D	7.5V, 0~18A	20.7A	6.0~9.0V	±2%	100mV
E	12V, 0~13A	15.0A	9.0~13.2V	±1%	150mV
F	15V, 0~10A	11.5A	13.2~16.8V	±1%	150mV
G	18V, 0~8.5A	9.80A	16.8~20.0V	±1%	150mV
H	24V, 0~6.5A	7.50A	20.0~26.4V	±1%	150mV
I	27V, 0~5.8A	6.70A	25.0~31.0V	±1%	150mV
J	33V, 0~4.7A	5.40A	30.0~40.0V	±1%	250mV
K	48V, 0~3.2A	3.68A	40.0~53.0V	±1%	250mV

MS-300: 2-SLOT parallelable single output (300W max.)

Item Code	Output	★Peak I	Vdc adj.	Tol.	R&N.
2A	2V, 0~50A	57.5A	1.6~2.6V	±3%	80mV
2B	3.3V, 0~50A	57.5A	2.6~4.0V	±2%	80mV
2C	5V, 0~50A	57.5A	4.0~6.0V	±2%	80mV
2D	7.5V, 0~40A	46.0A	6.0~9.0V	±2%	100mV
2E	12V, 0~25A	29.0A	9.0~13.2V	±1%	150mV
2F	15V, 0~20A	23.0A	13.2~16.8V	±1%	150mV
2G	18V, 0~16.7A	19.2A	16.8~20.0V	±1%	150mV
2H	24V, 0~12.5A	14.4A	20.0~26.4V	±1%	150mV
2I	27V, 0~11.2A	12.9A	25.0~31.0V	±1%	200mV
2J	33V, 0~9.1A	10.5A	30.0~40.0V	±1%	250mV
2K	48V, 0~6.3A	7.2A	40.0~53.0V	±1%	300mV

MD-100: 1-SLOT isolated dual output (100W max.)

Item Code	Output	Vdc adj.	Tol.	R&N.	Max.
R	5V, 2.0~10A	4.75~5.5V	±3%	100mV	90.0W
	5V, 0.0~8.0A	4.75~5.5V	±3%	100mV	
S	5V, 2.0~10A	4.75~5.5V	±3%	100mV	100.4W
	12V, 0.0~5.8A	11.4~13.2V	±3%	150mV	
T	5V, 2.0~10A	4.75~5.5V	±3%	100mV	101.0W
	15V, 0.0~4.7A	14.2~16.5V	±3%	150mV	
U	24V, 0.5~3.0A	22.8~26.4V	±3%	200mV	100.0W
	5V, 0.0~10A	4.75~5.5V	±3%	100mV	
V	24V, 0.6~3.0A	22.8~26.4V	±2%	240mV	100.8W
	12V, 0.0~4.7A	11.4~13.2V	±3%	120mV	
W	12V, 1.0~5.0A	11.4~13.2V	±2%	120mV	100.8W
	12V, 0.0~5.8A	11.4~13.2V	±3%	120mV	
X	15V, 1.0~4.7A	14.2~16.5V	±2%	150mV	100.5W
	15V, 0.0~4.7A	14.2~16.5V	±3%	150mV	

Parallel Connection Accessory

FAP-001 (For MS-300)	
-------------------------	--

Series Connection Accessory

FAS-001 (For 1-slot modules)	
FAS-002 (For 2-slot modules)	

- ★Peak I: 35% duty cycle maximum within every 10 seconds. Average output power should not exceed the rated power.
- ★Please use MP450-CNPOQ, MP650-A2EHU, MP1K0-2C2CEKL-1.....etc. as the order code. For more detail information about technical issues, please refer to the user manual.
- ★Please refer to the user manual for more detail information about parallel connection and the parallel codes. About series connection, please contact us or your local MEAN WELL distributor for more details.



Features

- Universal AC input / Full range
- Installed on DIN rail TS35 / 7.5 or 15
- Protections: Short circuit / Overload / Over voltage
- No load power consumption <0.75W (<1W for MDR-100)
- LED indicator for power on
- NEC class 2 / LPS compliant (selected models)
- Built-in active PFC and over temp. protection (MDR-100)
- DC OK signal output (MDR-10/20)
- DC OK relay contact (MDR-40/60/100)
- Cooling by free air convection
- 100% full load burn-in test
- 3 years warranty

General Specification (Please refer to www.meanwell.com for detail spec.)

Model No.	MDR-10	MDR-20	MDR-40	MDR-60	MDR-100
AC input voltage range	85~264VAC, 120~370VDC				
AC inrush current	Cold start, 35A at 115VAC, 70A at 230VAC	Cold start, 20A at 115VAC, 40A at 230VAC	Cold start, 30A at 115VAC, 60A at 230VAC		
DC adjustment range	Fixed	±10% rated output voltage	0~+20% rated output voltage		
Overload protection	>105% hiccup mode, auto-recovery	105%~160% constant current limiting, auto-recovery	105%~150% constant current limiting, auto-recovery		
Over voltage protection	115%~135% rated output voltage		125%~150% rated output voltage		
Setup, rise, hold up time	500ms, 30ms, 50ms at full load and 230VAC				3000ms, 50ms, 50ms
Withstand voltage	I/P-O/P:3kVAC, I/P-FG:1.5kVAC, 1minute				
Working temperature	-20~+70℃ (refer to output derating curve)				-10~+60℃
DC OK signal	Open collector	Open collector	Relay contact		
Safety standards	UL508, TUV EN60950-1, UL60950-1(MDR-40/60) approved, NEC class 2 compliant (MDR-10/20, MDR-40-12/24/48, MDR-60-24/48)				
EMC standards	EN55022 class B, EN61000-3-2,-3, ENV50204, EN61000-4-2,3,4,5,6,8,11, EN61204-3, EN61000-6-2 heavy industry level (MDR-40/60/100)				
Connection	I/P: 3 poles, O/P: 3 poles screw DIN terminal		IP: 3 poles, O/P: 6 poles screw DIN terminal		
Dimension (WxHxD)(mm)	22.5x 90x 100		40x 90x 100		55x 90x 100
Packing	72pcs / 13.2kg	72pcs / 14.7kg	42pcs / 13.6kg	42pcs / 14.8kg	30pcs / 13.6kg

MDR-10 Series



Model No.	Output	Tol.	R&N	Effi.
MDR-10-5	5V, 0~2.0A	±5%	80mV	77%
MDR-10-12	12V, 0~0.84A	±3%	120mV	81%
MDR-10-15	15V, 0~0.67A	±3%	120mV	81%
MDR-10-24	24V, 0~0.42A	±2%	150mV	84%

MDR-20 Series



Model No.	Output	Tol.	R&N	Effi.
MDR-20-5	5V, 0~3.0A	±2%	80mV	76%
MDR-20-12	12V, 0~1.67A	±1%	120mV	80%
MDR-20-15	15V, 0~1.34A	±1%	120mV	81%
MDR-20-24	24V, 0~1.00A	±1%	150mV	84%

MDR-40 Series



Model No.	Output	Tol.	R&N	Effi.
MDR-40-5	5V, 0~6.00A	±2%	80mV	78%
MDR-40-12	12V, 0~3.33A	±1%	120mV	86%
MDR-40-24	24V, 0~1.70A	±1%	150mV	88%
MDR-40-48	48V, 0~0.83A	±1%	200mV	88%

MDR-60 Series



Model No.	Output	Tol.	R&N	Effi.
MDR-60-5	5V, 0~10.0A	±2%	80mV	78%
MDR-60-12	12V, 0~5.00A	±1%	120mV	86%
MDR-60-24	24V, 0~2.50A	±1%	150mV	88%
MDR-60-48	48V, 0~1.25A	±1%	200mV	87%

MDR-100 Series



Model No.	Output	Tol.	R&N	Effi.
MDR-100-12	12V, 0~7.5A	±1%	120mV	85%
MDR-100-24	24V, 0~4.0A	±1%	150mV	86%
MDR-100-48	48V, 0~2.0A	±1%	200mV	88%



Energy Saving —

We care about energy saving. This logo represents that this model has "low no load power consumption"!



To satisfy our customers is our goal —

- High Quality
- Low Cost
- Prompt Delivery
- Best Service



■ Features

- Isolation Class II
- Universal AC input / Full range
- Protections: Short circuit / Overload / Over voltage
- Over temperature protection (DR-100)
- No load power consumption<1W (DR-100)
- No load power consumption<0.5W (DR-15)
- Installed on DIN rail TS35 / 7.5 or 15
- Cooling by free air convection
- LED indicator for power on
- 100% full load burn-in test
- 3 years warranty
- Suitable for building automation and control of household appliance

■ General Specification (Please refer to www.meanwell.com for detail spec.)



Model No.		DR-15 	DR-30	DR-60	DR-100 
AC input voltage range		85~264VAC, 120~370VDC			88~264VAC, 124~370VDC
AC inrush current (max.)		Cold start, 65A at 230VAC	Cold start, 30A at 230VAC	Cold start, 36A at 230VAC	Cold start, 45A at 230VAC
DC adjustment range		±10% rated output voltage			
Overload Protection	Range	105%~160%			
	Type	constant current limiting, auto-recovery			
Over Voltage Protection	Range	115%~135% rated output voltage			
	Type	Shut off, clamp by zener diode			125%~155% rated output voltage
Shut down, re-power on to recover					
Withstand voltage		I/P-O/P: 3kVAC			
Working temperature		-20°C~+60°C (refer to output load derating curve)			
Vibration		10~500Hz, 2G 10 min./1 cycle, period for 60 min. each along X, Y, Z axes			
Safety standards		UL60950-1, TUV60950-1 approved			
EMC standards		EN55022 class B, EN61000-3-2,3, EN61000-6-2, EN61000-4-2,3,4,5,6,8,11, ENV50204, EN61204-3			
Connection		I/P and O/P: 2 poles screw DIN terminal	I/P: 2 poles, O/P: 4 poles screw DIN terminal		
Dimension (WxHxD)(mm)		25x 93x 56	78x 93x 56	78x 93x 56	100x 93x 56
Case No.		985A	918B	918B	970A
Packing		140pcs / 15.0kg	48pcs / 14.0kg	48pcs / 15.4kg	36pcs / 13.6kg

■ 15W DR-15

Model No.	Output	Tol.	R&N	Effi.
DR-15-5	5V, 0~2.40A	±2%	80mV	77.0%
DR-15-12	12V, 0~1.25A	±1%	120mV	84.0%
DR-15-15	15V, 0~1.00A	±1%	120mV	83.5%
DR-15-24	24V, 0~0.63A	±1%	150mV	85.0%

■ 30W DR-30

Model No.	Output	Tol.	R&N	Effi.
DR-30-5	5V, 0~3.0A	±2%	80mV	74%
DR-30-12	12V, 0~2.0A	±1%	120mV	81%
DR-30-15	15V, 0~2.0A	±1%	120mV	82%
DR-30-24	24V, 0~1.5A	±1%	150mV	83%

■ 60W DR-60

Model No.	Output	Tol.	R&N	Effi.
DR-60-5	5V, 0~6.5A	±2%	80mV	76%
DR-60-12	12V, 0~4.5A	±1%	120mV	82%
DR-60-15	15V, 0~4.0A	±1%	120mV	83%
DR-60-24	24V, 0~2.5A	±1%	150mV	84%

■ 100W DR-100

Model No.	Output	Tol.	R&N	Effi.
DR-100-12	12V, 0~7.5A	±2%	120mV	87%
DR-100-15	15V, 0~6.5A	±1%	120mV	87%
DR-100-24	24V, 0~4.2A	±1%	150mV	89%



We provide specification, drawing, test report and more information, please visit our website —

<http://www.meanwell.com>



Energy Saving —

We care about energy saving. This logo represents that this model has "low no load power consumption"!



Features

- Universal AC input / Full range (DR-45/75, DRP-240)
AC input selectable by switch (DR-120, DRP-480S)
AC input 180~264VAC only (DRP-480)
- Built-in active PFC function, PF>0.95(DRP-240)
- Built-in passive PFC function compliance to EN61000-3-2 (480W models)
- Protections: Short circuit / Overload /
Over voltage / Over temperature
- Cooling by free air convection
- Can be installed on DIN rail TS35 / 7.5 or 15
- UL508 (industrial control equipment) listed
- 100% full load burn-in test
- LED indicator for power on
- 3 years warranty

General Specification (Please refer to www.meanwell.com for detail spec.)

Model No.		DR-45	DR-75	DR-120	DRP-240	DRP-480	DRP-480S
AC input voltage range		85~264VAC(DR-45/75, DRP-240); 90~132/180~264VAC selectable by switch (DR-120, DRP-480S); 180~264VAC only (DRP-480)					
AC inrush current (230VAC)		56A	Cold start, 40A at 230VAC		45A	40A	45A
DC adjustment range		±10%	12V: 12~14V, 24V: 24~28V, 48V: 48~53V				
Overload protection		105%~150% constant current limiting, auto-recovery					
Over voltage protection	Range	115%~142% rated output voltage			30~36V for 24V model, 54~60V for 48V model		
	Type	Shut off, AC recycle to re-start					
Over temp. protection		Shut down output voltage, recovers automatically after temperature goes down					
Withstand voltage		I/P-O/P: 3kVAC, I/P-FG: 1.5kVAC, O/P-FG: 0.5kVAC, 1 minute					
Working temperature		-10°C~+50°C	-10°C~+60°C		-10°C~+70°C	-20°C~+70°C	
Safety standards		UL508, TUV EN60950-1 approved (UL60950-1 also for DR-120, DRP-240, DRP-480, DRP-480S)					
EMC standards		EN55022 class B, EN61000-3-2,3, ENV50204, EN61000-4-2,3,4,5,6,8,11, EN61000-6-2 heavy industry level					
Connection		I/P: 3 poles, O/P: 4 poles screw DIN terminal					
Dimension (WxHxD)(mm)		78x 93x 67	55.5x 125.2x 100	65.5x 125.2x 100	125.5x 125.2x 100	227x 125.2x 100	
Case No.		918A	923	921A	922A	930	
Packing		48pcs / 16.1kg	20pcs / 13.0kg	20pcs / 16.5kg	12pcs / 15.5kg	6pcs / 15.0kg	6pcs / 16.6kg

DR-45 Series



Model No.	Output	Tol.	R&N	Effi.
DR-4505	5V, 0~5.0A	±2%	100mV	72%
DR-4512	12V, 0~3.5A	±1%	200mV	77%
DR-4515	15V, 0~2.8A	±1%	240mV	77%
DR-4524	24V, 0~2.0A	±1%	480mV	80%

DR-75 Series



Model No.	Output	Tol.	R&N	Effi.
DR-75-12	12V, 0~6.3A	±2%	100mV	76%
DR-75-24	24V, 0~3.2A	±1%	150mV	80%
DR-75-48	48V, 0~1.6A	±1%	240mV	81%

DR-120 Series



Model No.	Output	Tol.	R&N	Effi.
DR-120-12	12V, 0~10A	±2%	80mV	80%
DR-120-24	24V, 0~5.0A	±1%	80mV	84%
DR-120-48	48V, 0~2.5A	±1%	100mV	85%

DRP-240 Series



Model No.	Output	Tol.	R&N	Effi.
DRP-240-24	24V, 0~10A	±1%	80mV	84%
DRP-240-48	48V, 0~5.0A	±1%	150mV	85%

DRP-480 Series



Model No.	Output	Tol.	R&N	Effi.
DRP-480-24	24V, 0~20A	±1%	120mV	89%
DRP-480-48	48V, 0~10A	±1%	120mV	89%

DRP-480S Series



Model No.	Output	Tol.	R&N	Effi.
DRP-480S-24	24V, 0~20A	±1%	120mV	89%
DRP-480S-48	48V, 0~10A	±1%	120mV	89%



Customer Satisfaction —

Today's effort, tomorrow's reward. Continuously improve CQTS to satisfy customer is our goal.



To satisfy our customers is our goal —

- High Quality
- Low Cost
- Prompt Delivery
- Best Service



We provide specification, drawing, test report and more information, please visit our website —

<http://www.meanwell.com>



■ Features

- Input 340~550VAC, 3-phase (two phase for DRH-120)
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Built-in constant current limiting circuit
- Cooling by free air convection
- Can be installed on DIN rail TS35 / 7.5 or 15
- UL508 (industrial control equipment) listed (240~960W)
- EN61000-6-2 industrial immunity level
- Optional parallel function (1+1) (960W only)
- 100% full load burn-in test
- LED indicator for power on
- 3 years warranty

■ General Specification (Please refer to www.meanwell.com for detail spec.)

Model No.		DRH-120	DRT-240	DRT-480	DRT-960
AC input voltage range		340~550VAC, two phase 340~550VAC, 3-phase (two phase operation possible)			
AC inrush current (max.)		Cold start, 50A at 400VAC			
DC adjustment range		24V: 24~28V, 48V: 48~55V			
Overload protection	Range	105%~160%	105%~150%		105%~125%
	Type	Constant current limiting, auto-recovery			Constant current limiting, delay shut off after 3 sec.
Over voltage protection	Range	24V: 30~36V, 48V: 59~66V			
	Type	Shut off, AC recycle to re-start			
Over temperature protection		Shut down output voltage, recovers automatically after temperature goes down			
Withstand voltage		I/P - O/P: 3kVAC, I/P - FG: 1.5kVAC, O/P - FG: 0.5kVAC, 1 minute			
Working temperature		-20~+60℃	-20~+70℃		-20~+60℃
Safety standards		UL60950-1 approved	UL508, UL60950-1, TUV EN60950-1 approved		
EMC standards		EN55022 class B, EN61000-3-2,3, ENV50204, EN61000-4-2,3,4,5,6,8,11, EN61204-3, EN61000-6-2 heavy industry level			
Connection (screw DIN terminal)		I/P: 3 poles, O/P: 4 poles	I/P: 4 poles, O/P: 4 poles		I/P: 4 poles, O/P: 6 poles
Dimension (WxHxD)(mm)		65.5x 125.2x 100	125.5x 125.2x 100	227x 125.2x 100	276x 125.2x 100
Case No.		921	922A	930A	934
Packing		20pcs / 16.0kg	12pcs / 16.6kg	6pcs / 16.0kg	4pcs / 14.2kg

■ DRH-120 (Two Phase)



Model No.	Output	Tol.	R&N	Effi.
DRH-120-24	24V, 0~5.0A	±1%	80mV	85%
DRH-120-48	48V, 0~2.5A	±1%	80mV	86%

■ DRT-480 (Three Phase)



Model No.	Output	Tol.	R&N	Effi.
DRT-480-24	24V, 0~20A	±1%	80mV	89%
DRT-480-48	48V, 0~10A	±1%	80mV	90%

■ DRT-240 (Three Phase)



Model No.	Output	Tol.	R&N	Effi.
DRT-240-24	24V, 0~10A	±1%	80mV	89%
DRT-240-48	48V, 0~5.0A	±1%	80mV	89%

■ DRT-960 (Three Phase)



Model No.	Output	Tol.	R&N	Effi.
DRT-960-24	24V, 0~40A	±1%	80mV	91%
DRT-960-48	48V, 0~20A	±1%	80mV	92%



We are a TQM (Total Quality Management) company and ISO-9001 certified since 1994.



Best products also need best service.

We have authorized distributors all over the world. They have sufficient stock for your prompt delivery. Also they can offer you technical support & RMA services. Please contact your local distributors for more product information. You can also contact us at info@meanwell.com for information of your local distributors.



Products —

- One Stop Shopping
- Total Solution



Who can provide you better services and be a trustworthy partner in the power industry?

— "MEAN WELL" tries to be —



48hrs delivery—

We keep enough stock for 95% of standard models at our 2400m² warehouse. We can arrange prompt delivery within 48hrs.



■ Features

- Single and two phase wide input range 180~550VAC
- Built-in active PFC (WDR-240/480)
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Cooling by free air convection
- Built-in constant current limiting circuit
- Can be installed on DIN rail TS-35/7.5 or 15
- UL508(industrial control equipment) approved
- EN61000-6-2(EN50082-2) industrial immunity level
- Built-in DC OK relay contact
- 100% full load burn-in test
- 3 years warranty

■ General Specification (Please refer to www.meanwell.com for detail spec.)



Model No.		WDR-120	WDR-240 NEW	WDR-480 NEW
AC input voltage range		180~550VAC(single and two phase); 254~780VDC		
AC input current		0.55A / 400VAC, 1.2A / 230VAC	1A / 400VAC, 2A / 230VAC	1.6A / 400VAC, 4A / 230VAC
AC inrush current (max.)		Cold start, 50A at 400VAC		
DC adjustment range		12V: 12~15V, 24V: 24~29V, 48V: 48~58V	24V: 24~28V, 48V: 48~55V	
Overload protection		105%~130% rated output power, constant current limiting, auto-recovery	105%~130% rated output power, constant current limiting, unit will shut down after 3 sec.; auto-recovery after 1 minute if the fault condition is removed.	
Over voltage protection	Range	16~18V for 12V model (only for WDR-120), 29~33V for 24V model, 56~65V for 48V model		
	Type	Shut down o/p voltage, auto-recovery	Shut down o/p voltage, auto-recovery after 1 minute if the fault condition is removed	
Setup, rise, hold up time		2000ms, 70ms, 10ms at full load and 230VAC; 2000ms, 70ms, 50ms at full load and 400VAC	1500ms, 150ms, 18ms at full load and 230VAC; 800ms, 150ms, 18ms at full load and 400VAC	2000ms, 150ms, 16ms at full load and 230VAC; 800ms, 150ms, 18ms at full load and 400VAC
Over temperature protection	Range	100°C±5°C (TSW1 : detect on heatsink of power switch)	90°C~±5°C	95°C±5°C
	Type	Shut down output voltage, recovers automatically after temperature goes down		
Withstand voltage		I/P-O/P:3kVAC I/P-FG:1.5kVAC O/P-FG:0.5kVAC		
Isolation resistance		100MΩ(min.)@500VDC		
Working temperature		-25~+70°C (Refer to output derating curve)	-30°C~+70°C (Refer to output derating curve)	
DC OK signal		Relay Contact		
Leakage current		<3.5mA at 530VAC		
Vibration		10~500Hz, 2G, 10 minutes / 1 cycle, period of 60 minutes each along X, Y, Z axes		
Safety standards		UL508 approved ; IEC60950-1 CB approved by SIQ ; design refer to GL		
EMC standards		Compliance to EN55011(CISPR11), EN55022 Class B, EN61000-4-2,3,4,5,6,8,11, ENV50204, EN61000-6-2 (EN50082-2), EN61204-3, heavy industry level		
Connection		I/P: 3 poles, O/P: 4 poles screw DIN terminal	I/P: 3 poles, O/P: 6 poles screw DIN terminal	
Dimension (WxHxD)(mm)		40x 125.2x 113.5	63x 125.2x 113.5	85.5x 125.2x 128.5
Packing		20pcs / 14kg	12pcs / 13.7kg	8pcs / 14.6kg

■ 120W

WDR-120

Model No.	Output	Tol.	R&N	Effi.
WDR-120-12	12V, 0~10A	±1.5%	120mV	89.5%
WDR-120-24	24V, 0~5A	±1.0%	120mV	91.0%
WDR-120-48	48V, 0~2.5A	±1.0%	150mV	92.0%

■ 240W

NEW WDR-240

Model No.	Output	Tol.	R&N	Effi.
WDR-240-24	24V, 0~10A	±1.0%	150mV	91%.
WDR-240-48	48V, 0~5A	±1.0%	150mV	91%.

■ 480W

NEW WDR-480

Model No.	Output	Tol.	R&N	Effi.
WDR-480-24	24V, 0~20A	±1.0%	100mV	92%.
WDR-480-48	48V, 0~10A	±1.0%	150mV	93%.



Customer Satisfaction —

Today's effort, tomorrow's reward. Continuously improve CQTS to satisfy customer is our goal.



We provide specification, drawing, test report and more information, please visit our website —

<http://www.meanwell.com>



■ Features

- High efficiency up to 94% (SDR-240/480)
- Universal AC input / Full range
- Built-in active PFC function, PF>0.93
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Cooling by free air convection
- Can be installed on DIN rail TS-35/7.5 or 15
- UL508(industrial control equipment) approved
- EN61000-6-2(EN50082-2) industrial immunity level
- Built-in DC OK relay contact
- 150% peak load capability
- Comply with GL and SEMI F47
- **Current sharing (7+1) for SDR-480P**
- 3 years warranty

■ General Specification (Please refer to www.meanwell.com for detail spec.)



Model No.		SDR-120	SDR-240	SDR-480
AC input voltage range		88~264VAC; 124~370VDC		90~264VAC; 127~370VDC
AC inrush current (max.)		Cold start, 70A at 230VAC	Cold start, 65A at 230VAC	Cold start, 80A at 230VAC
DC adjustment range		12V: 12~14V (only for SDR-120), 24V: 24~28V, 48V: 48~55V		
Overload protection		Normally works within 110 ~ 150% rated output power for 3 seconds and then shut down output voltage with auto-recovery		
		>150% rated power or short circuit, constant current limiting with auto-recovery within 2 seconds and may cause to shut down if over 2 seconds		
Over voltage protection	Range	14~17V for 12V model(SDR-120 only), 29~33V for 24V model, 56~65V for 48V model		
	Type	Shut down o/p voltage, re-power on to recover	Shut down o/p voltage with auto-recovery	
Over temperature protection	Range	95°C±5°C (TSW : detect on heatsink of power switch)		105°C±5°C (TSW : detect on heatsink of power switch)
	Type	Shut down output voltage, recovers automatically after temperature goes down		
Withstand voltage		I/P-O/P:3kVAC I/P-FG:1.5kVAC O/P-FG:0.5kVAC O/P-DC OK:0.5kVAC		
Working temperature		-25~+70°C (Refer to output derating curve)		
Safety standards		UL508, TUV EN60950-1, GL approved		
EMC standards		Compliance to EN55022 Class B, EN61000-4-2,3,4,5,6,8,11, ENV50204, EN61000-6-2 (EN50082-2), EN61204-3, heavy industry level, SEMI F47, GL		
Connection		I/P: 3 poles, O/P: 4 poles screw DIN terminal	I/P: 3 poles, O/P: 6 poles screw DIN terminal	I/P: 3 poles, O/P: 8 poles screw DIN terminal
Dimension (WxHxD)(mm)		40x 125.2x 113.5	63x 125.2x 113.5	85.5x 125.2x 128.5

■ 120W SDR-120

Model No.	Output	Tol.	R&N	Effi.
SDR-120-12	12V, 0~10A	±1.0%	100mV	89.0%
SDR-120-24	24V, 0~ 5A	±1.0%	100mV	91.0%
SDR-120-48	48V, 0~2.5A	±1.0%	120mV	90.5%

■ 240W SDR-240

Model No.	Output	Tol.	R&N	Effi.
SDR-240-24	24V, 0~10A	±1.0%	100mV	94.0%
SDR-240-48	48V, 0~5A	±1.0%	120mV	94.0%

■ 480W SDR-480

Model No.	Output	Tol.	R&N	Effi.
SDR-480-24	24V, 0~20A	±1.2%	100mV	94.0%
SDR-480-48	48V, 0~10A	±1.0%	120mV	94.0%

□ =blank, P ; Blank: basic function, P: with parallel function



We provide specification, drawing, test report and more information, please visit our website —

<http://www.meanwell.com>

► Feature Description

SDR family is our new slim DIN rail product series targeting at the growing demand of high performance DIN rail power supply in the market. Featuring up to 94% of extreme high efficiency, they can provide 120W, 240W, or 480W continuously and 150% peak power for 3 seconds up to 60°C by only free air convection. The slim design of 40mm(SDR-120) / 63mm(SDR-240) / 85.5mm(SDR-480) in width helps save the precious space on the rail and also makes it 30.7%, 43% and 51.6% smaller in size compare to its predecessor model. To fulfill the requirements of marine and semi-conductor related usage, the SDR family complies with GL and SEMI F47 norms in addition to UL, CUL, TUV, and CE certificates.

20A Power Supply Redundant Module

CE



- Suitable for redundant operation of 24V system
- Installed on DIN rail TS35 / 7.5 or 15
- Relay contact signal output and LED indicator for input failure alarm
- Cooling by free air convection
- 3 years warranty

CASE: 923C 55.5x 125.2x 100 mm

DC input voltage range 21~28V, 20A max. x 2 channels
 Reverse voltage 30V
 DC output current 20A max.
 DC output voltage drop 0.5V max.
 Input voltage alarm When input is > 20V(±5%) or < 30V(±5%),
 relay contacts
 Relay contact rating 30VDC, 1A
 Working temperature -20~+70°C
 EMC standards EN55022 class B, EN61000-4-2,3,4,5,6,8,
 ENV50204
 Connection I/P: 4 poles, O/P: 2 poles screw DIN terminal,
 Single output: 4 poles
 Packing 0.5Kg ; 20pcs / 11Kg / 1.29CUFT


Model No.	Output	Reverse Voltage	Current
DR-RDN20	24V, 20A	30V max.	20A max.

► Feature Description

DR-RDN-20 is a 20A redundancy (decoupling) module for the 24Vdc power system. Containing 2 sets of 20A Or-ing diodes with wonderful heat dissipation deployment, DR-RDN20 offers a safe option of 1+1 redundant set-up. Not only perfectly decouple power sources from each other as well as from the load, DR-RDN-20 also provides users monitoring signals for both input channels through the built-in relays.


DR-UPS40 is a 40A max. DC UPS (battery control) module for the 24Vdc power system. Accompany with external batteries, it can back-up up to 40A of current to critical loads for certain period of time depending on the capacity of batteries. With complete monitoring signals / LED indicators for DC BUS OK, Battery Fail, Battery Discharge, and the repeated Battery Test function to check the situation of external batteries, users can customize their own DC UPS system to back up critical loads and capture the status of the whole system easily.

Block Diagram

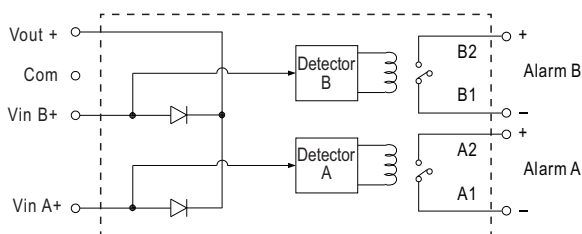

Example of Application

1+1 Redundancy :
 Using 1 more PSU as the redundant unit



40A DC UPS Module

CE




- Battery controller for DIN rail UPS system
- Parallel connected to DC BUS
- Suitable for 24V system up to 40A
- Installed on DIN Rail TS35 / 7.5 or 15
- Built-in battery test function
- Battery polarity protection
- Relay contact signal output and LED indicator for DC BUS OK, Battery Fail, and Battery Discharge
- Cooling by free air convection
- 3 years warranty

CASE: 923D 55.5x 125.2x 100 mm

DC input / DC bus 24~29V, 40A max.
 Battery input voltage 21~29V
 Battery input Current 0~40A
 Charge current (typ.) 2A
 External battery (typ.) 24V, 4AH / 7AH / 12AH
 DC bus ok Relay status : Short when DC voltage between
 21~29V(±3%), relay contacts
 LED(Green) : DC bus OK : light;
 DC bus fail : dark
 Battery fail Relay status : Short when battery failure is
 observed through the battery
 test function, relay contacts
 LED(Red) : Battery over-discharge warning or
 battery broken : light;
 Battery OK : dark
 Battery discharge Relay status : Short when battery in discharge
 condition, relay contacts
 LED(Yellow) : Battery discharging : light;
 Battery is not discharging or
 discharging current <2A : dark
 Working temperature -20~+70°C
 EMC standards EN55022 class B, EN61000-4-2,3,4,5,6,8,
 ENV50204
 Connection I/P: 2 poles, O/P: 2 poles screw DIN terminal,
 Single output: 6 poles
 Packing 0.55Kg ; 20pcs / 12Kg / 1.29CUFT


Model No.	DC BUS Voltage	DC BUS Current
DR-UPS40	24~29V	40A max.

Block Diagram

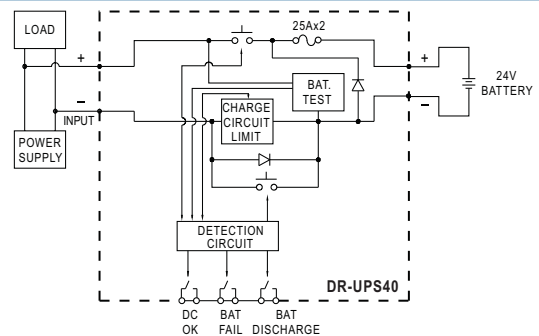

Example of Application

**Back up connection for
 AC interruption**

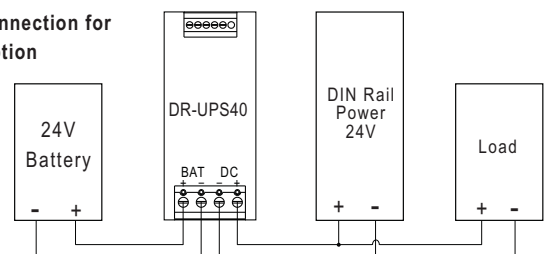



Features

- Universal AC input / Full range
- Ultra-miniature size
- Protections: Short circuit / Overload / Over voltage
- No load power consumption <0.5W (<0.75W for 20W models)
- Fully isolated plastic case
- Isolation class II (5~15W)
- Low leakage current < 200uA (20W)
- Cooling by free air convection
- Medical safety approved
- Meet industrial, IT safety requirements
- 100% full load burn-in test
- 3 years warranty



PM-05 / 10 / 15 Series				PM-20 Series	
	5W	10W	15W		
A	2.475" (62.85mm)	2.76" (70mm)	2.95" (75mm)		
B	1.85" (47mm)	2.13" (54mm)	2.441" (62mm)		
C	0.306" (7.8mm)	0.315" (8mm)	0.256" (6.5mm)		
D	1.97" (50mm)	1.97" (50mm)	2.09" (53mm)		
E	0.689" (17.5mm)	0.689" (17.5mm)	0.788" (20mm)		
F	0.295" (7.5mm)	0.295" (7.5mm)	0.256" (6.5mm)		
G	0.789" (20.04mm)	0.789" (20.04mm)	0.906" (23.01mm)		
H	0.59" (15mm)	0.59" (15mm)	0.59" (15mm)		
I	0.776" (19.7mm)	0.89" (22.7mm)	0.89" (22.7mm)		

General Specification

AC input voltage range 85~264VAC; 120~370VDC
 Frequency range 47-440Hz
 AC inrush current (max.) ... Cold start, 25A at 115VAC, 45A at 230VAC
 (PM-15: 30A at 115VAC, 50A at 230VAC)
 (PM-20: 30A at 115VAC, 65A at 230VAC)
 Overload protection >105% hiccup mode, auto recovery
 Over voltage protection 115%~135% rated output voltage, shut off,
 AC recycle to re-start
 Setup, rise, hold up time ... 1000ms, 20ms, 100ms @ 230VAC
 (PM-20: 500ms, 20ms, 50ms @ 230VAC)
 Withstand voltage I/P-O/P: 4.0kVAC, 1 minute
 Working temperature -20°C~70°C (refer to output derating curve)
 Safety standards UL60601-1, TUV EN60601-1, UL60950-1 (PM-15)
 approved
 EMC standards EN55011, EN55022 Class B, EN61000-3-2,3
 EN61000-4-2,3,4,5,6,8,11, ENV50204, EN55024,
 EN60601-1-2, EN61204-3 Medical level, criteria A
 Connection 4 industrial pins (20W: 6 industrial pins)
 Packing 0.085kg ; 120pcs / 11.2kg / 0.97CUFT(PM-05)
 0.105kg ; 120pcs / 13.6kg / 0.97CUFT(PM-10)
 0.14kg ; 120pcs / 17.8kg / 0.97CUFT(PM-15)
 0.18kg ; 90pcs / 17.2kg / 0.97CUFT(PM-20)

PM-05 Series

Model No.	Output	Tol.	R&N	Effi.
PM-05-3.3	3.3V, 0~1.25A	±3%	80mV	67%
PM-05-5	5V, 0~1.00A	±2%	80mV	71%
PM-05-12	12V, 0~0.42A	±2%	150mV	73%
PM-05-15	15V, 0~0.33A	±2%	150mV	74%
PM-05-24	24V, 0~0.23A	±2%	240mV	76%

PM-10 Series

Model No.	Output	Tol.	R&N	Effi.
PM-10-3.3	3.3V, 0~2.50A	±3%	80mV	66%
PM-10-5	5V, 0~2.00A	±2%	80mV	74%
PM-10-12	12V, 0~0.85A	±2%	150mV	78%
PM-10-15	15V, 0~0.67A	±2%	150mV	79%
PM-10-24	24V, 0~0.42A	±2%	240mV	79%

PM-15 Series

Model No.	Output	Tol.	R&N	Effi.
PM-15-3.3	3.3V, 0~3.50A	±3%	80mV	73%
PM-15-5	5V, 0~3.00A	±2%	80mV	76%
PM-15-12	12V, 0~1.25A	±2%	150mV	78%
PM-15-15	15V, 0~1.00A	±2%	150mV	79%
PM-15-24	24V, 0~0.63A	±2%	240mV	81%

PM-20 Series

Model No.	Output	Tol.	R&N	Effi.
PM-20-3.3	3.3V, 0~4.50A	±3%	80mV	71%
PM-20-5	5V, 0~4.40A	±2%	80mV	75%
PM-20-12	12V, 0~1.80A	±2%	150mV	81%
PM-20-15	15V, 0~1.40A	±2%	150mV	83%
PM-20-24	24V, 0~0.92A	±2%	240mV	84%




Energy Saving —

We care about energy saving. This logo represents that this model has "low no load power consumption"!



To satisfy our customers is our goal —

- High Quality
- Low Cost
- Prompt Delivery
- Best Service

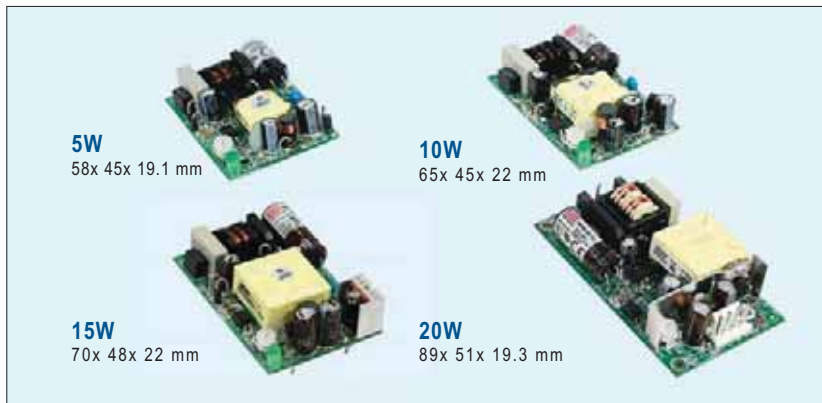


Features

- Universal AC input / Full range
- Ultra-miniature size, light weight
- Protections:
Short circuit / Overload / Over voltage / Over temp.
- No load power consumption <0.5W (<0.75W for 20W models)
- Isolation class II (5~15W)
- On-board type version available for 20W (optional)
- Low leakage current < 200uA (20W)
- Cooling by free air convection
- Medical safety approved
- Meet industrial, IT safety requirements
- 100% full load burn-in test
- 3 years warranty




NFM-05 / 10 / 15 Series

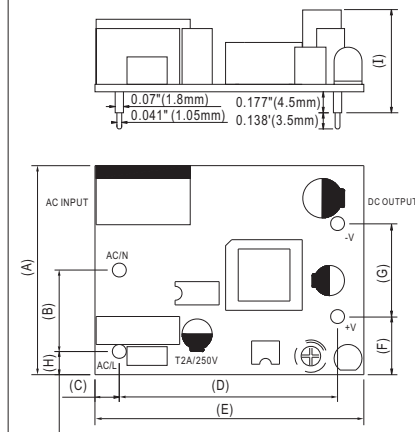

	5W	10W	15W
A	1.77" (45mm)	1.77" (45mm)	1.89" (48mm)
B	0.689" (17.5mm)	0.689" (17.5mm)	0.788" (20mm)
C	0.21" (5.33mm)	0.22" (5.5mm)	0.157" (4mm)
D	1.85" (47mm)	2.13" (54mm)	2.441" (62mm)
E	2.28" (57.9mm)	2.56" (65mm)	2.75" (69.85mm)
F	0.491" (12.47mm)	0.491" (12.47mm)	0.492" (12.5mm)
G	0.789" (20.04mm)	0.789" (20.04mm)	0.906" (23.01mm)
H	0.196" (5mm)	0.196" (5mm)	0.157" (4mm)
I	0.75" (19.1mm)	0.87" (22mm)	0.87" (22mm)

NFM-20 Series

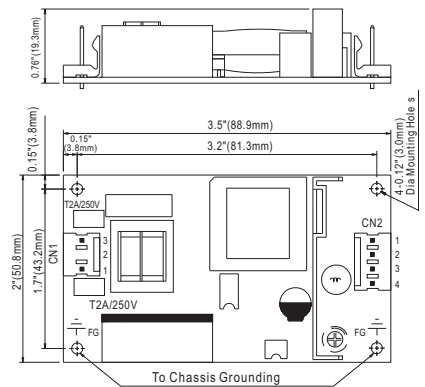

General Specification

AC input voltage range	85~264VAC; 120~370VDC
Frequency range	47-440Hz
AC inrush current (max.)	Cold start, 25A at 115VAC, 45A at 230VAC (NFM-15: 30A at 115VAC, 50A at 230VAC) (NFM-20: 30A at 115VAC, 65A at 230VAC)
DC adjustment range	±10% rated output voltage
Overload protection	>105% hiccup mode, auto recovery
Over voltage protection	115%~135% rated output voltage, shut off, AC recycle to re-start
Over temp. protection	U1,Tj: 140~160°C, power shutdown, recovers automatically after temperature goes down
Setup, rise, hold up time	1000ms, 20ms, 100ms @ 230VAC (NFM-20: 500ms, 20ms, 50ms @ 230VAC)
Withstand voltage	I/P-O/P: 4.0KVAC, 1 minute
Working temperature	-20°C~70°C (refer to output derating curve)
Safety standards	UL60601-1, TUV EN60601-1, UL60950-1 (NFM-15) approved
EMC standards	EN55011, EN55022 Class B, EN61000-3-2,3 EN61000-4-2,3,4,5,6,8,11, ENV50204, EN55024, EN60601-1-2, EN61204-3 Medical level, criteria A
Connection	4 industrial pins for 5~15W 3P / 4P / 3.96mm pitch, Molex 41791-03/04 for 20W
Packing	0.03kg ; 120pcs / 4.6kg / 0.97CUFT(NFM-05) 0.045kg ; 120pcs / 6.4kg / 0.97CUFT(NFM-10) 0.065kg ; 120pcs / 8.8kg / 0.97CUFT(NFM-15) 0.09kg ; 105pcs / 10.5kg / 0.97CUFT(NFM-20)

NFM-05 Series

Model No.	Output	Tol.	R&N	Effi.
NFM-05-3.3	3.3V, 0~1.25A	±2%	80mV	67%
NFM-05-5	5V, 0~1.00A	±2%	80mV	71%
NFM-05-12	12V, 0~0.42A	±1%	150mV	73%
NFM-05-15	15V, 0~0.33A	±1%	150mV	74%
NFM-05-24	24V, 0~0.23A	±1%	240mV	76%

NFM-10 Series

Model No.	Output	Tol.	R&N	Effi.
NFM-10-3.3	3.3V, 0~2.50A	±2%	80mV	66%
NFM-10-5	5V, 0~2.00A	±2%	80mV	74%
NFM-10-12	12V, 0~0.85A	±1%	150mV	78%
NFM-10-15	15V, 0~0.67A	±1%	150mV	79%
NFM-10-24	24V, 0~0.42A	±1%	240mV	79%

NFM-15 Series

Model No.	Output	Tol.	R&N	Effi.
NFM-15-3.3	3.3V, 0~3.50A	±2%	80mV	73%
NFM-15-5	5V, 0~3.00A	±2%	80mV	76%
NFM-15-12	12V, 0~1.25A	±1%	150mV	78%
NFM-15-15	15V, 0~1.00A	±1%	150mV	79%
NFM-15-24	24V, 0~0.63A	±1%	240mV	81%

NFM-20 Series

Model No.	Output	Tol.	R&N	Effi.
NFM-20-3.3	3.3V, 0~4.50A	±2%	80mV	71%
NFM-20-5	5V, 0~4.40A	±2%	80mV	75%
NFM-20-12	12V, 0~1.80A	±1%	150mV	81%
NFM-20-15	15V, 0~1.40A	±1%	150mV	83%
NFM-20-24	24V, 0~0.92A	±1%	240mV	84%



Energy Saving —


We care about energy saving. This logo represents that this model has "low no load power consumption"!

30W Single Output Medical Type

- Universal AC input / Full range
- Medical safety approved
- Protections: Short circuit / Overload / Over voltage / Over temp.
- Low leakage current $\leq 0.3\text{mA}$
- Compact size, low profile
- 100% full load burn-in test
- 3 years warranty



101.6x 65.8x 23.5 mm



AC input voltage range 88~264VAC; 120~370VDC
 Overload protection >105% hiccup mode, auto-recovery
 Over voltage protection ... 110%~135% rated output voltage
 Leakage current Less than 0.3mA at 264VAC
 Withstand voltage I/P-O/P: 4kVAC, I/P-FG: 1.5kVAC, 1minute
 Working temperature -10~60°C (refer to output derating curve)
 Safety standards UL2601-1, TUV EN60601-1, IEC60601-1 approved
 EMC standards EN55011 class B, EN60601-1-2, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, ENV50204
 Connection 5+4P/ 3.96mm pitch, Molex P/N: 41791-05,04
 Packing 0.16kg ; 90pcs / 15.8kg / 1.02CUFT

Model No.	Output	Tol.	R&N	Effi.
MPS-30-5	5V, 0~5.0A	$\pm 3\%$	80mV	72%
MPS-30-12	12V, 0~2.5A	$\pm 3\%$	120mV	75%
MPS-30-15	15V, 0~2.0A	$\pm 3\%$	150mV	76%
MPS-30-24	24V, 0~1.2A	$\pm 3\%$	240mV	77%
MPS-30-27	27V, 0~1.1A	$\pm 3\%$	240mV	78%
MPS-30-48	48V, 0~0.6A	$\pm 2\%$	240mV	78%

Under Development

150W/200W/300W DC-DC Railway Power Supply


- 2:1 wide input range ($\pm 40\%$): 14.4~33.6VDC / 28.8~67.2VDC / 57.6~154VDC
- 4000VDC I/O isolation
- Design refer to EN50155 railway certificate
- Cooling by free air convection
- High efficiency up to 91%
- -40°C can power on
- Built-in constant current circuit
- Protections: Short circuit / Overload / Over voltage / Over temperature / Input reverse polarity
- 1U low profile
- LED indicator for power on
- Output models: 5VDC / 12VDC / 24VDC (150W)
12VDC / 24VDC / 48VDC (200W / 300W)
- Dimension(LxWxH): 179x 73x 36 mm(150W)
189x 73x 39 mm(200W)
189x 86x 39 mm(300W)
- 3 years warranty

45W 1~3 Output Medical Type

- Universal AC input / Full range
- Medical safety approved
- Protections: Short circuit / Overload / Over voltage
- Low leakage current $\leq 0.3\text{mA}$
- Approvals: UL / CUL / TUV / CB / CE
- Fixed switching frequency at 45kHz
- 100% full load burn-in test
- 3 years warranty



127x 76x 28 mm

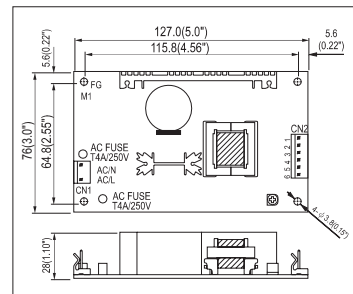

AC input voltage range 90~264VAC; 120~370VDC
 AC inrush current Cold start, 17A at 115VAC, 35A at 230VAC
 DC adjustment range CH1: $\pm 10\%$ rated output voltage
 Overload protection 53~75W hiccup mode, auto-recovery
 Over voltage protection ... CH1: 115%~135% rated output voltage
 Leakage current Less than 0.3mA at 264VAC
 Setup, rise, hold up time .. 800ms, 30ms, 50ms at full load and 230VAC
 Withstand voltage I/P - O/P: 4kVAC, I/P - FG: 1.5kVAC, 1 minute
 Working temperature -10°C~60°C (refer to output derating curve)
 Safety standards UL2601-1, TUV EN60601-1, IEC60601-1 approved
 EMC standards EN55011 class B, EN61000-4-2,3,4,5,6,8,11, EN61000-3-2,3, EN60601-1-2, ENV50204
 Connection 2P,6P/ 3.96mm pitch, Molex P/N: 5277-02, 5273-06
 Packing 0.18kg ; 72pcs/ 15.1kg / 1.35CUFT (MPS-45)
 0.20kg ; 72pcs/ 17.4kg / 1.35CUFT (MPD-45)
 0.21kg ; 72pcs/ 18.0kg / 1.35CUFT (MPT-45)

Single Output

Model No.	Output	Tol.	R&N	Effi.
MPS-45-3.3	3.3V, 0~8.0A	$\pm 3\%$	80mV	65%
MPS-45-5	5V, 0~8.0A	$\pm 3\%$	100mV	72%
MPS-45-7.5	7.5V, 0~5.4A	$\pm 3\%$	100mV	75%
MPS-45-12	12V, 0~3.7A	$\pm 2\%$	100mV	76%
MPS-45-13.5	13.5V, 0~3.3A	$\pm 2\%$	100mV	76%
MPS-45-15	15V, 0~3.0A	$\pm 2\%$	100mV	77%
MPS-45-24	24V, 0~1.9A	$\pm 2\%$	100mV	78%
MPS-45-27	27V, 0~1.7A	$\pm 2\%$	100mV	78%
MPS-45-48	48V, 0~1.0A	$\pm 2\%$	100mV	78%

Dual Output


Model No.	Output	Tol.	R&N	Effi.	Max.
MPD-45A	5V, 0.4~5.0A	$\pm 4\%$	60mV	76%	40W
	12V, 0.2~2.5A	$\pm 7\%$	120mV		
MPD-45B	5V, 0.4~5.0A	$\pm 4\%$	60mV	78%	45W
	24V, 0.2~1.8A	$\pm 7\%$	150mV		

Triple Output

Model No.	Output	Tol.	R&N	Effi.	Max.
MPT-45A	5V, 0.4~5.0A	$\pm 4\%$	60mV	73%	41W
	12V, 0.2~2.5A	$\pm 7\%$	120mV		
	-5V, 0.0~0.5A	$\pm 5\%$	60mV		
MPT-45B	5V, 0.4~5.0A	$\pm 4\%$	60mV	75%	43W
	12V, 0.2~2.5A	$\pm 7\%$	120mV		
	-12V, 0.0~0.5A	$\pm 5\%$	100mV		
MPT-45C	5V, 0.4~5.0A	$\pm 4\%$	60mV	75%	44W
	15V, 0.2~2.3A	$\pm 7\%$	120mV		
	-15V, 0.0~0.5A	$\pm 5\%$	100mV		

60W 1~3 Output Medical Type

- 4"x2" miniature size
- Universal AC input / Full range
- Medical safety approved
- Protections: Short circuit / Overload / Over voltage
- No load power consumption <0.75W (single output models only)
- Low leakage current <200uA
- 110% peak load capability
- High power density 6.57W/in³
- Cooling by free air convection
- 3 years warranty
- Suitable for medical & IT applications

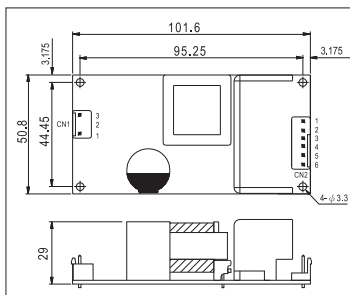

AC input voltage range90~264VAC; 127~370VDC
 AC inrush currentCold start, 30A at 115VAC, 60A at 230VAC
 DC adjustment range-5%~+10% rated output voltage (single output only)
 Overload protection115%~150% hiccup mode, auto-recovery
 Over voltage protection CH1: 110%~135% rated output voltage
 Leakage currentLess than 200uA at 264VAC
 Setup, rise, hold up time .. 500ms, 30ms, 50ms at full load and 230VAC (RPS-60)
 200ms, 15ms, 70ms at full load and 230VAC (RPD/T-60)
 Withstand voltage I/P - O/P: 4kVAC, I/P - FG: 1.5kVAC, 1 minute
 Working temperature-20°C~+70°C (RPS-60, refer to output derating curve)
 -20°C~+65°C (RPD/T-60, refer to output derating curve)
 Safety standardsUL60601-1, UL60950-1, TUV EN60601-1, EN60950-1 approved
 EMC standardsEN55011 / EN55022 class B, EN61000-3-2,-3, EN61000-4-2,3,4,5,6,8,11, ENV50204, EN61000-6-2, EN60601-1-2, EN61204-3 medical level
 Connection3,4P / 3.96mm pitch, JST P/N: B3P / B4P-VH (RPS-60)
 3,6P / 3.96mm pitch, JST P/N: B3P / B6P-VH (RPD/T-60)
 Packing0.15kg ; 96pcs / 15.4kg / 0.89CUFT

Single Output

Model No.	Output	Tol.	R&N	Effi.
RPS-60-3.3	3.3V, 0~11A	±2%	80mV	74%
RPS-60-5	5V, 0~11A	±2%	80mV	79%
RPS-60-12	12V, 0~5.5A	±2%	120mV	83%
RPS-60-15	15V, 0~4.4A	±2%	150mV	84%
RPS-60-24	24V, 0~2.75A	±1%	240mV	85%
RPS-60-48	48V, 0~1.375A	±1%	300mV	86%

Dual Output

Model No.	Output	Tol.	R&N	Effi.	Max.
RPD-60A	5V, 0.5~5.5A	+3%,-2%	80mV	78%	54W
	12V, 0.1~2.2A	±6%	80mV		
RPD-60B	5V, 0.5~3.85A	+3%,-2%	80mV	82%	59W
	24V, 0.1~1.65A	+8%,-4%	100mV		

Triple Output


Model No.	Output	Tol.	R&N	Effi.	Max.
RPT-60A	5V, 0.5~4.4A	+3%,-2%	80mV	77%	51W
	12V, 0.1~2.2A	±6%	80mV		
	-5V, 0.1~0.55A	+9%,-8%	80mV		
RPT-60B	5V, 0.5~4.4A	+3%,-2%	80mV	78%	55W
	12V, 0.1~2.2A	±6%	80mV		
	-12V, 0.1~0.55A	+10%,-6%	100mV		
RPT-60C	5V, 0.5~4.4A	+3%,-2%	80mV	79%	55W
	15V, 0.1~0.65A	±6%	100mV		
	-15V, 0.1~0.55A	±8%	150mV		
RPT-60D	5V, 0.5~3.85A	+3%,-2%	80mV	79%	52W
	24V, 0.1~1.1A	±6%	150mV		
	12V, 0.1~0.55A	±8%	80mV		
RPT-6003	3.3V, 0.5~5.5A	+3%,-2%	80mV	75%	44W
	5V, 0.3~3.3A	±8%	80mV		
	12V, 0.1~0.77A	+10%,-6%	80mV		

65W 1~3 Output Medical Type

- Universal AC input / Full range
- Medical safety approved
- Protections: Short circuit / Overload / Over voltage
- Low leakage current≤0.3mA
- Fixed switching frequency at 45kHz
- 100% full load burn-in test
- 3 years warranty



127x 76x 42 mm

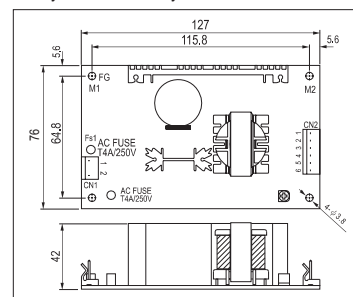

AC input voltage range 90~264VAC; 127~370VDC
 AC inrush current Cold start, 17A at 115VAC, 35A at 230VAC
 DC adjustment range CH1: ±10% rated output voltage
 Overload protection 73%~105% hiccup mode, auto-recovery
 Over voltage protection CH1: 115%~135% rated output voltage
 Leakage current Less than 0.3mA at 264VAC
 Setup, rise, hold up time .. 800ms, 30ms, 50ms at full load and 230VAC
 Withstand voltage I/P-O/P: 4kVAC, I/P-FG: 1.5kVAC, 1 minute
 Working temperature -10°C~ +60°C (refer to output derating curve)
 Safety standards UL2601-1, TUV EN60601-1, IEC60601-1 approved
 EMC standards EN55011 class B, EN61000-4-2,3,4,5,6,8,11, EN61000-3-2,3, EN60601-1-2, ENV50204
 Connection 2P, 6P/ 3.96mm pitch, Molex: 5277-02, 5273-06
 Packing 0.23kg ; 54pcs/ 14.6kg / 1.35CUFT (MPS-65)
 0.25kg ; 54pcs/ 16.0kg / 1.35CUFT (MPD-65)
 0.27kg ; 54pcs/ 16.8kg / 1.35CUFT (MPT-65)

Single Output

Model No.	Output	Tol.	R&N	Effi.
MPS-65-3.3	3.3V, 0~12A	±3%	80mV	66%
MPS-65-5	5V, 0~12A	±3%	100mV	74%
MPS-65-7.5	7.5V, 0~8.0A	±3%	100mV	76%
MPS-65-12	12V, 0~5.2A	±2%	100mV	77%
MPS-65-13.5	13.5V, 0~4.7A	±2%	100mV	78%
MPS-65-15	15V, 0~4.2A	±2%	100mV	79%
MPS-65-24	24V, 0~2.7A	±2%	100mV	80%
MPS-65-27	27V, 0~2.4A	±2%	100mV	80%
MPS-65-48	48V, 0~1.35A	±2%	100mV	80%

Dual Output

Model No.	Output	Tol.	R&N	Effi.	Max.
MPD-65A	5V, 0.4~7.0A	±4%	60mV	75%	61W
	12V, 0.2~3.2A	±7%	150mV		
MPD-65B	5V, 0.4~6.0A	±4%	60mV	78%	66W
	24V, 0.2~2.6A	±7%	150mV		

Triple Output


Model No.	Output	Tol.	R&N	Effi.	Max.
MPT-65A	5V, 0.4~7.0A	±4%	60mV	74%	60W
	12V, 0.2~3.2A	+10%,-7%	120mV		
	-5V, 0.0~0.7A	±5%	60mV		
MPT-65B	5V, 0.4~7.0A	±4%	60mV	74%	64W
	12V, 0.2~3.2A	+10%,-7%	160mV		
	-12V, 0.0~0.7A	±5%	100mV		
MPT-65C	5V, 0.4~7.0A	±4%	60mV	74%	65W
	15V, 0.2~2.6A	+10%,-7%	180mV		
	-15V, 0.0~0.7A	±5%	100mV		

75W 1~3 Output Medical Type

- Universal AC input / Full range
- Medical safety approved
- Protections: Short circuit / Overload / Over voltage
- No load power consumption <0.75W (single output models only)
- Low leakage current <200uA
- Fixed switching frequency at 65kHz
- Free air convection for 75W and 100W with 23.5CFM forced air
- 3 years warranty
- Suitable for medical & IT applications



127x 76.2x 31 mm

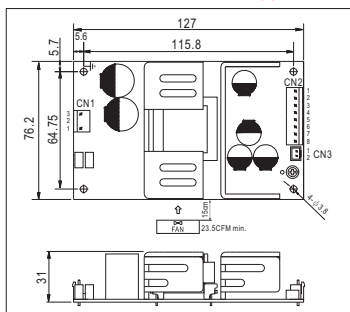

AC input voltage range 90~264VAC; 127~370VDC
 AC inrush current Cold start, 25A at 115VAC, 50A at 230VAC
 DC adjustment range CH1: -5%~+10% rated output voltage
 Overload protection 140%~180% hiccup mode, auto-recovery
 Over voltage protection CH1: 115%~135% rated output voltage
 Leakage current Less than 200uA at 264VAC
 Setup, rise, hold up time 500ms, 30ms, 80ms at full load and 230VAC
 Withstand voltage I/P-O/P: 4kVAC, I/P-FG: 1.5kVAC, 1 minute
 Working temperature -20°C ~ +70°C (refer to output derating curve)
 Safety standards UL60601-1, TUV EN60601-1 approved
 EMC standards EN55011 / EN55022 class B, EN61000-3-2,-3, EN61000-4-2,3,4,5,6,8,11, ENV50204, EN61000-6-2, EN60601-1-2, EN61204-3 medical level
 Connection 3+8P / 3.96mm pitch, JST P/N: B3P / B8P-VH
 Packing 0.26kg ; 63pcs / 16.3kg / 1.35CUFT

Single Output

Model No.	Output	Tol.	R&N	Effi.
RPS-75-3.3	3.3V, 0~20A	±2%	80mV	73%
RPS-75-5	5V, 0~18.7A	±2%	80mV	78%
RPS-75-12	12V, 0~8.3A	±1%	120mV	82%
RPS-75-15	15V, 0~6.7A	±1%	150mV	83%
RPS-75-24	24V, 0~4.2A	±1%	240mV	85%
RPS-75-36	36V, 0~2.8A	±1%	300mV	86%
RPS-75-48	48V, 0~2.1A	±1%	300mV	86%

Dual Output

Model No.	Output	Tol.	R&N	Effi.	Max.
RPD-75A	5V, 1.0~9.5A	±2%	80mV	77%	96W
	12V, 0.3~4.0A	±6%	120mV		
RPD-75B	5V, 1.0~6.8A	±2%	80mV	79%	99W
	24V, 0.2~2.7A	±6%	200mV		

Triple Output


Model No.	Output	Tol.	R&N	Effi.	Max.
RPT-75A	5V, 0.6~8.0A	±2%	80mV	76%	93W
	12V, 0.2~4.0A	±6%	120mV		
	-5V, 0.1~1.0A	±5%	120mV		
RPT-75B	5V, 0.6~8.0A	±2%	80mV	77%	100W
	12V, 0.2~4.0A	±6%	120mV		
	-12V, 0.1~1.0A	±5%	120mV		
RPT-75C	5V, 0.6~8.0A	±2%	80mV	77%	100W
	15V, 0.1~3.0A	±8%	150mV		
	-15V, 0.1~1.0A	±5%	150mV		
RPT-75D	5V, 0.6~7.0A	±2%	80mV	79%	95W
	24V, 0.1~2.0A	±8%	200mV		
	12V, 0.1~1.0A	±8%	120mV		
RPT-7503	3.3V, 0.7~7.0A	±4%	80mV	74%	81W
	5V, 0.0~8.0A	±6%	120mV		
	12V, 0.0~1.5A	+10%,-6%	120mV		

160W Medical Type with PFC Function

- Universal AC input / Full range
- Built-in active PFC function
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Free air convection for 110W and 160W with 20.5 CFM forced air (RPS-160); Free air convection for 100W and 150W with 20.5 CFM forced air (RPD / T-160)
- 5"x3" compact size
- With power good and fail signal output
- Built-in remote sense function for 5~15V (RPS-160)
- Standby 5V@0.8A (G model)
- No load power consumption under 0.75W by PS-ON control (G model)
- 3 years warranty



127x 76.2x 34.6mm

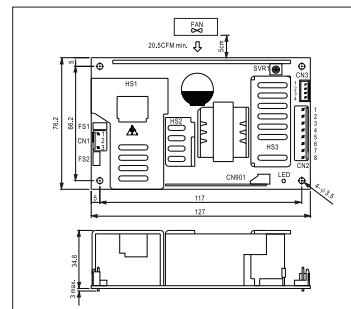

AC input voltage range 90~264VAC; 127~370VDC
 AC inrush current Cold start, 35A at 115VAC, 70A at 230VAC
 DC adjustment range RPS-160: ±10% rated output voltage
 RPD/T-160: 0~+10% for CH1
 Overload protection 105%~135% hiccup mode, auto-recovery
 Over voltage protection CH1: 115%~135% shut off, re-power on to recovery
 Leakage current Less than 300uA at 240VAC
 Setup, rise, hold up time 1200ms, 30ms, 16ms at full load and 230VAC
 Withstand voltage I/P - O/P: 4kVAC, I/P - FG: 1.5kVAC, 1 minute
 Working temperature -20°C~70°C (refer to output derating curve)
 Safety standards UL60601-1, TUV EN60601-1 approved
 EMC standards EN55011/EN55022 class B, EN61000-4-2,3,4,5,6,8,11, EN61000-3-2,3, EN60601-1-2, ENV50204, EN61000-6-2 (RPS(G)-160)
 Connection 3+8+2(4)P/3.96mm pitch JST B3P / B8P-VH, B2B (B4B)-XH

Single Output

Model No.	Output	Tol.	R&N	Effi.
RPS□-160-5	5V, 0~30.0A	±4%	100mV	85%
RPS□-160-12	12V, 0~12.9A	±3%	100mV	87%
RPS□-160-15	15V, 0~10.3A	±3%	120mV	87%
RPS□-160-24	24V, 0~6.5A	±2%	150mV	87%
RPS□-160-48	48V, 0~3.25A	±2%	250mV	88%

Dual Output

Model No.	Output	Tol.	R&N	Effi.	Max.
RPD□-160B	5V, 1.0~12A	±2.5%	80mV	84%	150W
	24V, 0.2~3.6A	±6%	200mV		

Triple Output

Model No.	Output	Tol.	R&N	Effi.	Max.
RPT□-160A	5V, 0.6~14A	±2%	100mV	84%	141W
	12V, 0.2~5.5A	±5%	120mV		
	-5V, 0.1~1.0A	-5%, +7%	120mV		
RPT□-160B	5V, 0.6~14A	±2%	100mV	84%	142W
	12V, 0.2~5.0A	±5%	120mV		
	-12V, 0.1~1.0A	-4%, +5%	120mV		
RPT□-160C	5V, 0.6~14A	±2%	100mV	83%	139W
	15V, 0.1~3.6A	±4%	150mV		
	-15V, 0.1~1.0A	-5%, +7%	150mV		
RPT□-160D	5V, 0.3~11A	±2%	100mV	83%	144W
	12V, 0.2~5.0A	±5%	120mV		
	24V, 0.15~1.2A	±4%	200mV		

□ = blank, G; blank: basic function, G: with 5Vsb/0.8A & no load power consumption < 0.75W

120 & 200W 1~4 Output Medical Type



- Universal AC input / Full range
- PF> 0.95@230VAC (200W)
- Protections: Short circuit / Overload / Over voltage / OTP (200W)
- Leakage current≤180uA
- Built-in remote sense and remote ON/OFF control (200W)
- PG / PF signal output (optional for 120W)
- 80W / 140W free air convection, 120W / 200W with 25CFM forced air
- 100% full load burn-in test
- 3 years warranty
- Suitable for medical & IT applications
- MPS/D/T/Q-120 to be discontinued. Using RPS/D/T-160 or MPS/D/T/Q-200 as replacement for any new applications is highly recommend.



120W
177.8x 108x 35.5mm



200W
177.8x 107.2x 35.5 mm



AC input voltage range 90~264VAC; 127~370VDC
 AC inrush current Cold start, 35A at 115VAC, 60A at 230VAC
 DC adjustment range CH1: -5~+10% rated output voltage
 Overload protection 110~160% hiccup mode, auto-recovery
 Over voltage protection CH1: 115%~140% rated output voltage
 Leakage current Less than 180uA at 264VAC
 Setup, rise, hold up time 1000ms, 20ms, 16ms at full load and 230VAC
 Withstand voltage I/P - O/P: 4kVAC, I/P - FG: 1.5kVAC, 1 minute
 Working temperature -20°C~70°C (refer to output derating curve)
 Safety standards UL60601-1, TUV EN60601-1, IEC60601-1 approved;
 Design refer to UL60950-1, TUV EN60950-1
 EMC standards EN55011/EN55022 class B,
 EN61000-4-2,3,4,5,6,8,11, EN61000-3-2,3,
 EN60601-1-2, ENV50204, EN61000-6-2
 Connection 5P,13P/ 3.96mm pitch, Molex 5273-05, 5273-13 (120W)
 3P, 20P / 3.96mm pitch, JST B3P/VH, Molex 5566-20 (MPS-200)
 3P, 8Px2 / 3.96mm pitch, JSTB3P / B8Px2-VH (MPD/T/Q-200)
 Packing 0.55kg ; 24pcs / 14.5kg / 1.04CUFT (120W)
 0.66kg ; 24pcs / 16.8kg / 1.04CUFT (200W)

Single Output

Model No.	Output	Tol.	R&N	Effi.
MPS-120-3.3	3.3V, 0~24A	±3%	80mV	68%
MPS-120-5	5V, 0~22A	±3%	80mV	73%
MPS-120-12	12V, 0~10A	±2%	100mV	77%
MPS-120-15	15V, 0~8.0A	±2%	100mV	79%
MPS-120-24	24V, 0~5.0A	±2%	120mV	81%
MPS-120-48	48V, 0~2.5A	±2%	120mV	82%

Model No.	Output	Tol.	R&N	Effi.
MPS-200-3.3	3.3V, 0~40A	±2%	80mV	77%
MPS-200-5	5V, 0~40A	±2%	80mV	81%
MPS-200-12	12V, 0~16.7A	±2%	100mV	84%
MPS-200-15	15V, 0~13.4A	±2%	100mV	85%
MPS-200-24	24V, 0~8.4A	±1%	150mV	86%
MPS-200-48	48V, 0~4.2A	±1%	200mV	87%

Dual Output

Model No.	Output	Tol.	R&N	Effi.	Max.
MPD-120A	5V, 2.0~12A	±2%	80mV	75%	110W
	12V, 0.5~6.0A	±7%	120mV		
MPD-120B	5V, 2.0~12A	±2%	80mV	76%	120W
	24V, 0.3~3.2A	±8%	250mV		

Dual Output

Model No.	Output	Tol.	R&N	Effi.	Max.
MPD-200A	5V, 4.0~24A	±2%	80mV	82%	196W
	12V, 0.8~9.6A	+8%, -5%	120mV		
MPD-200B	5V, 4.0~24A	±2%	80mV	83%	196W
	24V, 0.4~4.8A	±6.5%	180mV		

Triple Output

Model No.	Output	Tol.	R&N	Effi.	Max.
MPT-120A	5V, 2.0~12A	±2%	80mV	72%	111W
	12V, 0.4~5.8A	+8%, -6%	120mV		
	-5V, 0.0~1.0A	±5%	80mV		
MPT-120B	5V, 2.0~12A	±2%	80mV	73%	110W
	12V, 0.4~5.3A	±6%	120mV		
	-12V, 0.0~1.0A	±5%	80mV		
MPT-120C	5V, 2.0~11A	±2%	80mV	72%	119W
	15V, 0.4~4.4A	+6%, -7%	150mV		
	-15V, 0.0~1.0A	±5%	80mV		
MPT-120D	5V, 2.0~12A	±2%	80mV	74%	110W
	24V, 0.4~2.6A	+8%, -6%	300mV		
	12V, 0.0~1.0A	±5%	120mV		
MPT-200A	5V, 4.0~24A	±2%	80mV	80%	200W
	12V, 0.8~9.0A	±8%	120mV		
	-5V, 0.0~2.4A	±5%	80mV		
MPT-200B	5V, 4.0~24A	±2%	80mV	80%	196W
	12V, 0.6~7.2A	±8%	120mV		
	-12V, 0.0~2.4A	±5%	80mV		
MPT-200C	5V, 4.0~24A	±2%	80mV	80%	201W
	15V, 0.5~5.6A	±8%	150mV		
	-15V, 0.0~2.4A	±5%	80mV		
MPT-200D	5V, 4.0~24A	±2%	80mV	81%	196W
	24V, 0.3~3.6A	±8%	180mV		
	12V, 0.0~2.4A	±5%	80mV		

Quad Output

Model No.	Output	Tol.	R&N	Effi.	Max.
MPQ-120B	5V, 2.0~11A	±2%	80mV	71%	111W
	12V, 0.5~5.0A	±6%	120mV		
	-5V, 0.0~1.0A	±5%	80mV		
	-12V, 0.0~1.0A	±5%	80mV		
MPQ-120C	5V, 2.0~11A	±2%	80mV	71%	110W
	15V, 0.5~3.8A	+6%, -7%	150mV		
	-5V, 0.0~1.0A	±5%	80mV		
	-15V, 0.0~1.0A	±5%	80mV		
MPQ-120D	5V, 2.0~11A	±2%	80mV	74%	120W
	12V, 0.2~1.1A	+8%, -6%	150mV		
	24V, 0.3~2.3A	±8%	300mV		
	-12V, 0.0~1.0A	±5%	80mV		
MPQ-120E	5V, 2.0~11A	±2%	80mV	73%	109W
	12V, 0.5~3.3A	±6%	120mV		
	15V, 0.0~1.0A	±8%	80mV		
	24V, 0.0~1.0A	±5%	80mV		
MPQ-200B	5V, 3.0~18A	±2%	80mV	78%	193W
	12V, 0.7~8.4A	±8%	120mV		
	-5V, 0.0~2.4A	±5%	80mV		
	-12V, 0.0~2.4A	±5%	80mV		
MPQ-200C	5V, 3.0~18A	±2%	80mV	78%	190W
	15V, 0.5~6.0A	±6%	150mV		
	-5V, 0.0~2.4A	±5%	80mV		
	-15V, 0.0~2.4A	±5%	80mV		
MPQ-200D	5V, 3.0~18A	±2%	80mV	79%	195W
	24V, 0.3~3.6A	±8%	180mV		
	12V, 0.0~2.4A	±5%	80mV		
	-12V, 0.0~2.4A	±5%	80mV		
MPQ-200F	5V, 3.0~18A	±2%	80mV	81%	200W
	24V, 0.3~3.3A	±8%	180mV		
	15V, 0.0~2.4A	±5%	80mV		
	-15V, 0.0~2.4A	±5%	80mV		


5W Single Output Switching Power Supply

- Universal AC input / Full range
- Protections: Short circuit / Overload / Over voltage / Over temp.
- Cooling by free air convection
- Fixed switching frequency at 67kHz
- Low leakage current <0.5mA
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

CBCE



75x 40x 20 mm



AC input voltage range 85~264VAC; 120~370VDC
 AC inrush current Cold start, 30A at 230VAC
 Overload protection >105% hiccup mode, auto-recovery
 Over voltage protection 115%~135% rated output voltage
 Over temp. protection U1, Tj:140°C, hiccup mode, auto-recovery
 Leakage current Less than 0.5mA at 240VAC
 Withstand voltage I/P-O/P: 3kVAC, I/P-FG:1.5kVAC, 1minute
 Working temperature -10~60°C (refer to output derating curve)
 Safety standards UL60950-1 CB approval by TUV
 EMC standards EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11
 Connection 3P, 2P/ 3.96mm pitch, Molex 5285-03,5273-02
 Packing 0.05kg ; 120pcs / 6.25kg / 1.0CUFT

Model No.	Output	Tol.	R&N	Effi.
PS-05-5	5V, 0~1.0A	±2%	100mV	70%
PS-05-12	12V, 0~0.45A	±2%	120mV	75%
PS-05-15	15V, 0~0.35A	±2%	120mV	75%
PS-05-24	24V, 0~0.22A	±2%	200mV	76%
PS-05-48	48V, 0~0.11A	±1%	200mV	76%


15W Single Output Switching Power Supply

- Universal AC input / Full range
- Protections: Short circuit / Overload / Over voltage / Over temp.
- Cooling by free air convection
- Fixed switching frequency at 67kHz
- Low leakage current <0.5mA
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

CBCE



94x 49x 25 mm



AC input voltage range 85~264VAC; 120~370VDC
 AC inrush current Cold start, 40A at 230VAC
 Overload protection >105% hiccup mode, auto-recovery
 Over voltage protection 115%~135% rated output voltage
 Over temp. protection U1, Tj:140°C, hiccup mode, auto-recovery
 Leakage current Less than 0.5mA at 240VAC
 Withstand voltage I/P-O/P: 3kVAC, I/P-FG:1.5kVAC, 1minute
 Working temperature -10~60°C (refer to output derating curve)
 Safety standards EN60950-1 CB approval by TUV
 EMC standards EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11
 Connection 3P, 2P/ 3.96mm pitch, JST B3P/B2P-VH
 Packing 0.083kg ; 120pcs / 10.96kg

Model No.	Output	Tol.	R&N	Effi.
PS-15-5	5V, 0~2.80A	±2%	100mV	74%
PS-15-12	12V, 0~1.25A	±2%	120mV	77%
PS-15-15	15V, 0~1.00A	±2%	120mV	78%
PS-15-24	24V, 0~0.625A	±2%	150mV	79%
PS-15-48	48V, 0~0.313A	±2%	200mV	77%


25W 1~2 Output Switching Power Supply

- Universal AC input / Full range
- Protections: Short circuit / Overload / Over voltage / Over temp.
- Cooling by free air convection
- Fixed switching frequency at 100kHz
- Low leakage current <0.5mA
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

CBCE



107x 61x 28 mm

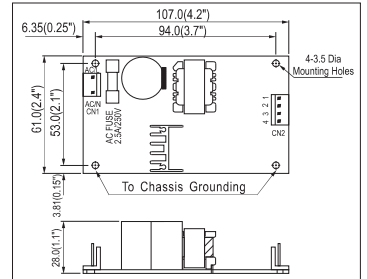

AC input voltage range 85~264VAC; 120~370VDC
 AC inrush current Cold start, 36A at 230VAC
 Overload protection >105% hiccup mode, auto-recovery
 Over voltage protection 115%~135% rated output voltage
 Over temp. protection U1, Tj:135°C, power shutdown
 Leakage current Less than 0.5mA at 240VAC
 Withstand voltage I/P-O/P: 3kVAC, I/P-FG:1.5kVAC, 1minute
 Working temperature -10~60°C (refer to output derating curve)
 Safety standards UL60950-1, TUV EN60950-1 approved
 EMC standards EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5
 Connection 3P, 4P/ 3.96mm pitch, Molex P/N: 41791-03, 04
 Packing 0.14kg ; 96pcs / 15.0kg / 1.30CUFT(PS-25)
 0.15kg ; 96pcs / 15.9kg / 1.30CUFT(PD-25)
 0.13kg ; 96pcs / 15.4kg / 1.30CUFT(PD-2503)

Single Output

Model No.	Output	Tol.	R&N	Effi.
PS-25-3.3	3.3V, 0~5.0A	±3%	80mV	66%
PS-25-5	5V, 0~5.0A	±2%	80mV	74%
PS-25-7.5	7.5V, 0~3.3A	±2%	80mV	76%
PS-25-12	12V, 0~2.1A	±2%	100mV	78%
PS-25-13.5	13.5V, 0~1.9A	±2%	100mV	78%
PS-25-15	15V, 0~1.7A	±2%	100mV	78%
PS-25-24	24V, 0~1.0A	±2%	240mV	79%
PS-25-27	27V, 0~0.9A	±2%	240mV	79%
PS-25-48	48V, 0~0.5A	±2%	350mV	79%

Dual Output

Model No.	Output	Tol.	R&N	Effi.	Max.
PD-25A	5V, 0.2~2.5A	±2%	50mV	71%	25W
	12V, 0.1~1.5A	±6%	150mV		
PD-25B	5V, 0.2~2.0A	±2%	50mV	77%	25W
	24V, 0.1~1.0A	±6%	200mV		
PD-2505	5V, 0.1~3.0A	±6%	50mV	73%	25W
	-5V, 0.1~2.5A	±6%	50mV		
PD-2512	12V, 0.1~1.2A	±4%	50mV	74%	24W
	-12V, 0.1~1.2A	±4%	50mV		
PD-2515	15V, 0.1~1.0A	±4%	50mV	75%	24W
	-15V, 0.1~1.0A	±4%	50mV		
PD-2503	3.3V, 0.2~5.0A	±2%	50mV	72%	25W
	5V, 0.1~4.0A	+5%,-8%	50mV		


35W Single Output Switching Power Supply

- 4"x2"x 0.95" compact size
- Universal AC input / Full range
- Cooling by free air convection

- Protections: Short circuit / Overload / Over voltage
- 2 years warranty



101.6x 50.8x 24 mm

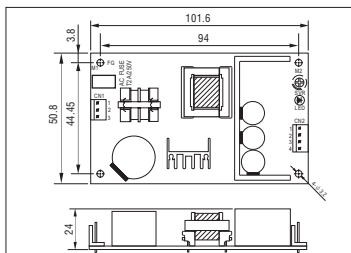

AC input voltage range	90~264VAC; 127~370VDC
DC adjustment range	±10% rated output voltage
Overload protection	105%~160% hiccup mode, auto-recovery
Over voltage protection	115%~150% rated output voltage
Withstand voltage	I/P-O/P: 3.0kVAC, I/P-FG:1.5kVAC, 1minute
Working temperature	-20°C~+65°C (refer to output derating curve)
Safety standards	UL60950-1, TUV EN60950-1 approved
EMC standards	EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11; ENV50204
Connection	3+4P / 3.96mm pitch, JST B3P/B4P-VH
Packing	0.124kg/ 96pcs / 12.9kg / 0.8CUFT

Model No.	Output	Tol.	R&N	Effi.
PS-35-3.3	3.3V, 0~6.0A	±2%	80mV	70%
PS-35-5	5V, 0~6.0A	±2%	100mV	78%
PS-35-7.5	7.5V, 0~4.7A	±2%	100mV	80%
PS-35-12	12V, 0~3.0A	±1%	120mV	81%
PS-35-13.5	13.5V, 0~2.6A	±1%	120mV	81%
PS-35-15	15V, 0~2.4A	±1%	150mV	81%
PS-35-24	24V, 0~1.5A	±1%	200mV	85%
PS-35-48	48V, 0~0.75A	±1%	240mV	84%

75W Single Output with PFC Function

- Universal AC input / Full range
- Built-in active PFC function, PF>0.95
- High efficiency up to 90%
- Protections: Short circuit / Overload / Over voltage

- No load power consumption <0.5W
- Cooling by free air convection
- LED indicator for power on
- Case available (ELP-75-x-C)
- 1U low profile
- 3 years warranty



175x 60x 27 mm

195x 68.5x 33 mm

AC input voltage range	90~264VAC; 127~370VDC
AC inrush current	Cold start, 60A at 230VAC
DC adjustment range	±10% rated output voltage
Overload protection	105%~150% hiccup mode, auto-recovery
Over voltage protection	115%~135% rated output voltage
Leakage current	Less than 1mA at 240VAC
Setup, rise, hold up time	2500ms, 50ms, 20ms at full load and 230VAC
Withstand voltage	I/P-O/P: 3kVAC, I/P-FG: 1.5kVAC, O/P-FG: 0.5kVAC
Working temperature	-30°C~+70°C (refer to output derating curve)
Safety standards	UL60905-1, TUV EN60950-1 approved
EMC standards	EN55022 class B, EN61000-3-2,-3, EN61000-4-2,3,4,5,6,8,11, ENV50204,
Connection	3+6P / 3.96mm pitch, JST B3P/B6P-VH

Model No.	Output	Tol.	R&N	Effi.
ELP-75-3.3□	3.3V, 0~15A	±3%	80mV	80%
ELP-75-5□	5V, 0~15A	±2%	80mV	82%
ELP-75-12□	12V, 0~6.25A	±2%	120mV	89%
ELP-75-15□	15V, 0~5A	±2%	150mV	90%
ELP-75-24□	24V, 0~3.15A	±1%	240mV	90%
ELP-75-36□	36V, 0~2.1A	±1%	280mV	90%
ELP-75-48□	48V, 0~1.6A	±1%	300mV	90%

□ = blank, -C ; blank: PCB type, -C: Enclosed type


45W 1~3 Output Switching Power Supply

- Universal AC input / Full range
- Protections: Short circuit / Overload / Over voltage
- Cooling by free air convection
- Fixed switching frequency at 65kHz

- Low leakage current $<0.5\text{mA}$
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty



127x 76x 28 mm

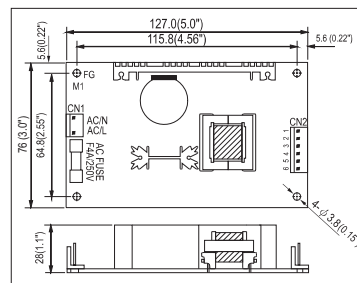

AC input voltage range	...90~264VAC; 127~370VDC
AC inrush current	Cold start, 15A at 115VAC, 30A at 230VAC
DC adjustment range	CH1: -5%~+10% rated output voltage
Overload protection	53~75W hiccup mode, auto-recovery
Over voltage protection	..CH1: 115%~135% rated output voltage
Leakage current	Less than 0.5mA at 240VAC
Withstand voltage	 I/P-O/P: 3kVAC, I/P-FG:1.5kVAC, 1minute
Working temperature	-10~60°C (refer to output derating curve)
Safety standards	 UL60950-1, TUV EN60950-1, CCC GB4943 approved
EMC standards	EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, ENV50204, GB9254
Connection	2P, 6P/ 3.96mm pitch, Molex 5277-02 / 5273-06
Packing	 0.19kg ; 72pcs / 15.6kg / 1.35CUFT(PS-45) 0.20kg ; 72pcs / 16.0kg / 1.35CUFT(PD-45) 0.21kg ; 72pcs / 17.0kg / 1.35CUFT(PT-45)

❖ Single Output

Model No.	Output	Tol.	R&N	Effi.
PS-45-3.3	3.3V, 0~8.0A	±3%	80mV	69%
PS-45-5	5V, 0~8.0A	±3%	100mV	74%
PS-45-7.5	7.5V, 0~5.4A	±3%	100mV	75%
PS-45-12	12V, 0~3.7A	±2%	100mV	76%
PS-45-13.5	13.5V, 0~3.3A	±2%	100mV	77%
PS-45-15	15V, 0~3.0A	±2%	100mV	77%
PS-45-24	24V, 0~1.9A	±2%	100mV	78%
PS-45-27	27V, 0~1.7A	±2%	100mV	78%
PS-45-48	48V, 0~1.0A	±2%	100mV	78%

❖ **Dual Output**

Model No.	Output	Tol.	R&N	Effi.	Max
PD-45A	5V, 0.4~5.0A	±4%	50mV	77%	40W
	12V, 0.2~2.5A	±7%	120mV		
PD-45B	5V, 0.4~5.0A	±4%	50mV	78%	45W
	24V, 0.2~1.8A	±7%	120mV		

❖ Triple Output

Model No.	Output	Tol.	R&N	Effi.	Max.
PT-45A	5V, 0.4~5.0A	±4%	50mV	75%	41W
	12V, 0.2~2.5A	±7%	120mV		
	-5V, 0.0~0.5A	±5%	50mV		
PT-45B	5V, 0.4~5.0A	±4%	50mV	75%	43W
	12V, 0.2~2.5A	±7%	120mV		
	-12V, 0.0~0.5A	±5%	100mV		
PT-45C	5V, 0.4~5.0A	±4%	50mV	75%	44W
	15V, 0.2~2.3A	±7%	120mV		
	-15V, 0.0~0.5A	±5%	100mV		


45 & 65W Triple Output with 3.3V Channel

- Universal AC input / Full range
- Total power for CH1+2: 35W (PT-45)
- Total power for CH1+2: 54W (PT-65)
- Protections: Short circuit / Overload / Over voltage
- Fixed switching frequency at 65kHz
- Cooling by free air convection
- 100% full load burn-in test
- 2 years warranty

UL US CB CE




PT-4503
127x 76x 28 mm

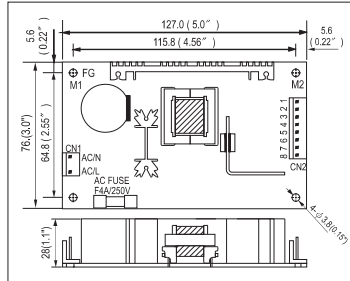

UL US CB CE



PT-6503
127x 76x 42 mm

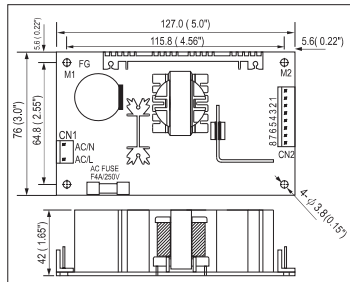

AC input voltage range 90~264VAC; 127~370VDC
 AC inrush current Cold start, 20A at 115VAC, 40A at 230VAC
 DC adjustment range 3.3V: $\pm 10\%$ rated output voltage
 Overload protection 120%~160% hiccup mode, auto-recovery
 Over voltage protection 5V: 115%~135% rated output voltage
 Leakage current Less than 1.0mA at 240VAC
 Setup, rise, hold up time 800ms, 50ms, 60ms at full load and 230VAC
 Withstand voltage I/P-O/P: 3kVAC, I/P-FG: 1.5kVAC, 1minute
 Working temperature -10~60°C (refer to output derating curve)
 Safety standards UL60950-1, TUV EN60950-1 approved
 EMC standards EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,11
 Connection 2P, 8P/ 3.96mm pitch, Molex: 5277-02, 5273-08
 Packing 0.23kg ; 72pcs / 17.6kg / 1.35CUFT(PT-4503)
 0.28kg ; 54pcs / 16.2kg / 1.35CUFT(PT-6503)

✧ Triple Output (45W)

Model No.	Output	Tol.	R&N	Effi.	Max.
PT-4503	3.3V, 0.0~5.0A	$\pm 2\%$	50mV	72%	45W
	5V, 0.2~7.0A	+4%, -2%	50mV		
	12V, 0.0~1.2A	$\pm 4\%$	100mV		


✧ Triple Output (65W)

Model No.	Output	Tol.	R&N	Effi.	Max.
PT-6503	3.3V, 0.0~7.0A	$\pm 3\%$	50mV	72%	62W
	5V, 0.2~10A	+4%, -2%	50mV		
	12V, 0.0~1.2A	$\pm 4\%$	100mV		


65W 1~3 Output Switching Power Supply

- Universal AC input / Full range
- Protections: Short circuit / Overload / Over voltage
- Cooling by free air convection
- Fixed switching frequency at 65kHz
- Low leakage current <0.5mA
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

UL US CB CE



127x 76x 42 mm

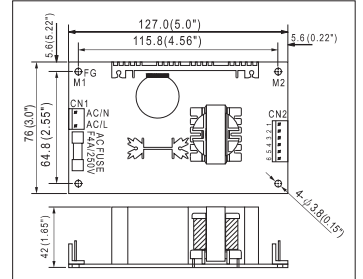

AC input voltage range 90~264VAC; 127~370VDC
 AC inrush current Cold start, 20A at 115VAC, 40A at 230VAC
 DC adjustment range CH1: -5%~+10% rated output voltage
 Overload protection 73~105W hiccup mode, auto-recovery
 Over voltage protection CH1: 115%~135% rated output voltage
 Leakage current Less than 0.5mA at 240VAC
 Setup, rise, hold up time 800ms, 20ms, 60ms at full load and 230VAC
 Withstand voltage I/P-O/P: 3kVAC, I/P-FG: 1.5kVAC, 1minute
 Working temperature 0~45°C@100%, -10°C@80%, 60°C@50% load
 Safety standards UL60950-1, TUV EN60950-1, CCC GB4943 approved

EMC standards EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, ENV50204, GB9254
 Connection 2P, 6P/ 3.96mm pitch, Molex P/N: 5277-02, 5273-06
 Packing 0.21kg ; 54pcs / 14.2kg / 1.35CUFT(PS-65)
 0.24kg ; 54pcs / 15.0kg / 1.35CUFT(PD-65)
 0.25kg ; 54pcs / 15.9kg / 1.35CUFT(PT-65)

✧ Single Output

Model No.	Output	Tol.	R&N	Effi.
PS-65-3.3	3.3V, 0~12A	$\pm 3\%$	80mV	69%
PS-65-5	5V, 0~12A	$\pm 3\%$	100mV	76%
PS-65-7.5	7.5V, 0~8.0A	$\pm 3\%$	100mV	79%
PS-65-12	12V, 0~5.2A	$\pm 2\%$	100mV	79%
PS-65-13.5	13.5V, 0~4.7A	$\pm 2\%$	100mV	79%
PS-65-15	15V, 0~4.2A	$\pm 2\%$	100mV	79%
PS-65-24	24V, 0~2.7A	$\pm 2\%$	100mV	80%
PS-65-27	27V, 0~2.4A	$\pm 2\%$	100mV	80%
PS-65-48	48V, 0~1.35A	$\pm 2\%$	100mV	80%

✧ Dual Output

Model No.	Output	Tol.	R&N	Effi.	Max.
PD-65A	5V, 0.4~7.0A	$\pm 4\%$	50mV	78%	61W
	12V, 0.2~3.2A	$\pm 7\%$	120mV		
PD-65B	5V, 0.4~6.0A	$\pm 4\%$	50mV	81%	66W
	24V, 0.2~2.6A	$\pm 7\%$	150mV		

✧ Triple Output

Model No.	Output	Tol.	R&N	Effi.	Max.
PT-65A	5V, 0.4~7.0A	$\pm 4\%$	50mV	76%	60W
	12V, 0.2~3.2A	$\pm 7\%$	120mV		
	-5V, 0.0~0.7A	$\pm 5\%$	50mV		
PT-65B	5V, 0.4~7.0A	$\pm 4\%$	50mV	77%	64W
	12V, 0.2~3.2A	$\pm 7\%$	120mV		
	-12V, 0.0~0.7A	$\pm 5\%$	100mV		
PT-65C	5V, 0.4~7.0A	$\pm 4\%$	50mV	77%	65W
	15V, 0.2~2.6A	$\pm 7\%$	120mV		
	-15V, 0.0~0.7A	$\pm 5\%$	100mV		
PT-65D	5V, 0.5~5.0A	$\pm 4\%$	50mV	79%	68W
	12V, 0.2~4.0A	$\pm 6\%$	100mV		
	24V, 0.2~1.3A	$\pm 6\%$	200mV		



We are a TQM (Total Quality Management) company and ISO-9001 certified since 1994.



We provide specification, drawing, test report and more information, please visit our website —

<http://www.meanwell.com>



To satisfy our customers is our goal —


- High Quality
- Low Cost
- Prompt Delivery
- Best Service

65W 2~3 Output Switching Power Supply

- Universal AC input / Full range
- Protections: Short circuit / Overload / Over voltage
- Cooling by free air convection
- 12V or 24V high peak current capability
- 60~65W free air convection, 77~80W with 18 CFM forced air
- Low leakage current < 1mA
- 100% full load burn-in test
- **Optional case available (RPD/RPT-65x-C)**
- 2 years warranty capability




127x 76x 28 mm



With Optional Case



130x 85x 37 mm



AC input voltage range 90~264VAC; 127~370VDC
 AC inrush current Cold start, 25A at 115VAC, 50A at 230VAC
 DC adjustment range CH1: 12V: 11.4~12.8V, 24V: 22.8~26.4V
 Overload protection 90~125W hiccup mode, auto-recovery
 Over voltage protection CH1: 115%~135% rated output voltage
 Leakage current Less than 1mA at 240VAC
 Setup, rise, hold up time 800ms, 20ms, 20ms at full load and 230VAC
 Withstand voltage I/P-O/P: 3kVAC, I/P-FG: 1.5kVAC, 1minute
 Working temperature -20~60°C (refer to output derating curve)
 Safety standards UL60950-1, TUV EN60950-1 approved
 EMC standards EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,11, ENV50204
 Connection 3P, 6P/ 3.96mm pitch, Molex P/N: 5273-03, 5273-06
 Packing 0.24kg ; 63pcs / 16.0kg / 1.35CUFT

Dual Output

Model No.	Output	Tol.	R&N	Effi.	Max.
RPD-65C □	12V, 0~5.8A	±2%	120mV	79%	60W
	5V, 0~1.5A	±5%	50mV		
RPD-65D □	24V, 0~2.9A	±2%	150mV	81%	60W
	5V, 0~1.5A	±5%	50mV		

Triple Output

Model No.	Output	Tol.	R&N	Effi.	Max.
RPT-65E □	12V, 0.18~5.8A	±2%	120mV	77%	63W
	5V, 0.0~1.5A	±5%	100mV		
	-5V, 0.0~0.7A	±5%	120mV		
RPT-65F □	12V, 0.18~5.8A	±2%	150mV	77%	66W
	5V, 0.0~1.5A	±5%	100mV		
	-12V, 0.0~0.7A	±5%	150mV		
RPT-65G □	24V, 0.09~2.9A	±2%	150mV	81%	66W
	5V, 0.0~1.5A	±5%	50mV		
	12V, 0.0~0.7A	±5%	100mV		


□ = blank, -C ; blank: PCB Type, -C: Enclosed Type

100~110W 2, 4 Output Switching Power Supply


- Universal AC input / Full range
- Power good signal output (option)
- Protections: Short circuit / Overload / Over voltage
- Cooling by free air convection
- Fixed switching frequency at 45kHz
- 100% full load burn-in test
- Leakage current < 1mA@ 240VAC
- 2 years warranty



PD-110
178x 108x 46 mm

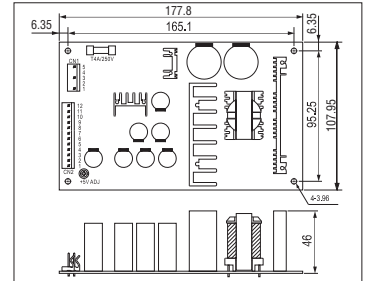

PQ-100
178x 108x 46 mm

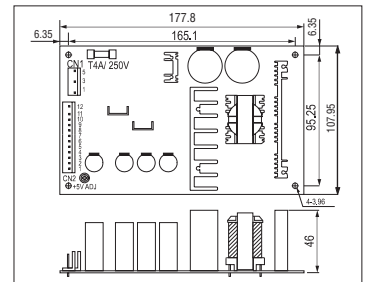

AC input voltage range .. 90~264VAC; 127~370VDC
 AC inrush current Cold start, 50A at 230VAC
 DC adjustment range CH1: -5%~+10% rated output voltage
 Overload protection 105%~135% hiccup mode, auto-recovery
 Over voltage protection .. CH1: 115%~135% rated output voltage
 Withstand voltage I/P-O/P: 3kVAC, I/P-FG: 1.5kVAC, 1minute
 Working temperature -10°C~60°C (refer to output derating curve)
 Safety standards UL60950-1, TUV EN60950-1 approved
 EMC standards EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,11, ENV50204
 Connection 5+12P/ 3.96mm pitch, Molex: 5273-05,12(PD-110)
 5+6+7P/ 3.96mm pitch, Molex: 5273-05,06,07(PQ-100)
 Packing 0.51kg ; 24pcs / 13.1kg / 1.19CUFT (PD-110)
 0.56kg ; 24pcs / 14.5kg / 1.19CUFT (PQ-100)

Dual Output

Model No.	Output	Tol.	R&N	Effi.	Max.
PD-110A	5V, 0.5~5.0A	±2%	100mV	75%	103W
	12V, 0.5~6.5A	±6%	150mV		
PD-110B	5V, 0.5~5.0A	±2%	100mV	78%	109W
	24V, 0.5~3.5A	±6%	200mV		

Quad Output


Model No.	Output	Tol.	R&N	Effi.	Max.
PQ-100B	5V, 2.0~10A	±3%	80mV	72%	101W
	12V, 0.5~4.5A	±12%	250mV		
	-5V, 0.0~1.0A	±6%	80mV		
	-12V, 0.0~1.0A	±6%	120mV		
PQ-100C	5V, 2.0~8.0A	±2%	80mV	74%	103W
	15V, 0.5~4.0A	±6%	150mV		
	-5V, 0.0~1.0A	±6%	80mV		
	-15V, 0.0~1.0A	±6%	150mV		
PQ-100D	5V, 2.0~5.0A	±2%	80mV	77%	103W
	12V, 0.5~4.5A	±6%	120mV		
	24V, 0.4~2.0A	±10%	180mV		
	-12V, 0.0~1.0A	±6%	120mV		
PQ-100E	5V, 2.0~8.0A	±2%	80mV	74%	99W
	12V, 0.5~3.0A	±6%	120mV		
	15V, 0.0~1.0A	±6%	150mV		
	24V, 0.0~1.0A	±6%	120mV		

100W Quad Output with PFC Function

- Universal AC input / Full range
- PF>0.98@115VAC; >0.95@230VAC
- Protections: Short circuit / Overload / Over voltage
- Cooling by free air convection
- 100% full load burn-in test
- 3 years warranty



178x 108x 38 mm

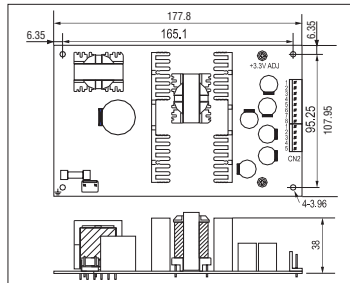

AC input voltage range .. 90~264VAC; 127~370VDC

AC inrush current Cold start, 40A at 230VAC

DC adjustment range CH1: -5%~+10% (PPQ-1003: CH1&2 -5%~+10%)

Overload protection 105%~135% hiccup mode, auto-recovery (PPQ-100)
105%~135% constant current, auto-recovery (PPQ-1003)

Over voltage protection ... 3.6V~4.3V for 3.3V ; 5.75V~6.75V for 5.0V

Leakage current Less than 3.5mA at 240VAC (PPQ-1003: <1mA)

Setup, rise, hold up time .. 800ms, 50ms, 18ms at full load and 230VAC

Withstand voltage I/P-O/P: 3kVAC, I/P-FG: 1.5kVAC, 1minute

Working temperature -10°C~60°C (refer to output derating curve)

Safety standards UL60950-1, TUV EN60950-1 approved

EMC standards EN55022 class B, EN61000-3-2,3,
EN61000-4-2,3,4,5,6,8,11, ENV50204

Connection 5P+5P+8P/ 3.96mm pitch, P/N:JST B5/5/8P-VH (PPQ-100)
3P+5P+8P/ 3.96mm pitch, P/N:JST B3/5/8P-VH (PPQ-1003)

Packing 0.62kg ; 24pcs / 15.5kg / 1.34CUFT (PPQ-1003)
0.62kg ; 24pcs / 15.9kg / 1.34CUFT (PPQ-100)


Model No.	Output	Tol.	R&N	Effi.	Max.
PPQ-1003A	3.3V, 0.0~15A	±3%	100mV	72%	109W
	5V, 2.0~15A	±3%	100mV		
	12V, 0.2~3.0A	±6%	150mV		
	-5V, 0.0~1.0A	±6%	100mV		
PPQ-1003B	3.3V, 0.0~15A	±3%	100mV	72%	111W
	5V, 2.0~15A	±3%	100mV		
	12V, 0.2~3.0A	±6%	150mV		
	-12V, 0.0~1.0A	±6%	120mV		
PPQ-1003C	3.3V, 0.0~15A	±3%	100mV	72%	110W
	5V, 2.0~15A	±3%	100mV		
	15V, 0.2~3.0A	+10%, -5%	180mV		
	-15V, 0.0~1.0A	±6%	150mV		
PPQ-1003D	3.3V, 0.0~15A	±3%	100mV	72%	114W
	5V, 2.0~15A	±3%	100mV		
	12V, 0.2~3.0A	±6%	150mV		
	24V, 0.0~1.0A	±6%	150mV		
PPQ-100B	5V, 2.0~15A	±3%	100mV	75%	101W
	12V, 0.3~4.0A	±8%	150mV		
	-12V, 0.0~1.0A	±5%	100mV		
	-5V, 0.0~1.0A	±5%	100mV		
PPQ-100C	5V, 2.0~15A	±3%	100mV	76%	101W
	15V, 0.3~4.0A	-6%, +10%	150mV		
	-15V, 0.0~1.0A	±5%	100mV		
	-5V, 0.0~1.0A	±5%	100mV		
PPQ-100D	5V, 2.0~10A	±3%	100mV	78%	102W
	24V, 0.3~4.0A	±8%	200mV		
	12V, 0.0~1.0A	±5%	100mV		
	-12V, 0.0~1.0A	±5%	100mV		

125W 1,3 Output with PFC Function

- Universal AC input/ Full range
- PF>0.98@115VAC, >0.93@230VAC
- High power density 6.117W/in³
- 3"x5" miniature size
- Protections: Short circuit / Overload / Over voltage
- Built-in remote sense for PPS-125
- LED indicator for power on
- Free air convection for 100W and 125W with 18 CFM forced air
- 100% full load burn-in test
- 3 years warranty



127x 76.2x 34.6 mm

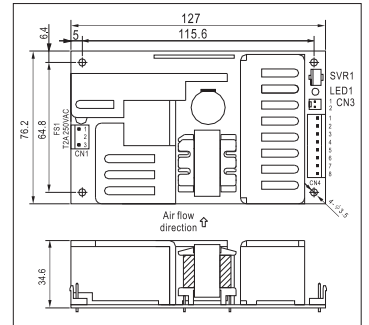

AC input voltage range 90~264VAC; 127~370VDC

AC inrush current Cold start, 24A at 230VAC

DC adjustment range CH1: ±5% rated output voltage

Overload protection 130%~160% fold back current limiting, auto-recovery

Over voltage protection CH1: 110%~135% rated output voltage

Leakage current Less than 2.0 mA at 240VAC

Setup, rise, hold up time 1000ms, 30ms, 24ms at full load and 230VAC

Withstand voltage I/P-O/P: 3kVAC, I/P-FG: 1.5kVAC, 1minute

Working temperature -20°C~70°C (refer to output derating curve)

Safety standards UL60950-1, TUV EN60950-1 approved

EMC standards EN55022 class B, EN61000-3-2,3,
EN61000-4-2,3,4,5,6,8,11, ENV50204

Connection 3+8P /3.96mm pitch, JST: B3P/B8P-VH (PPS-125)
3+5Px2 /3.96mm pitch, JST: B3P/B5Px2-VH (PPT-125)

Packing 0.37kg; 36pcs / 14.3kg / 0.79CUFT

Single Output

Model No.	Output	Tol.	R&N	Effi.
PPS-125-3.3	3.3V, 0~25A	±2%	100mV	70%
PPS-125-5	5V, 0~25A	±2%	100mV	79%
PPS-125-12	12V, 0~10.5A	±2%	100mV	80%
PPS-125-13.5	13.5V, 0~9.3A	±2%	100mV	80%
PPS-125-15	15V, 0~8.4A	±2%	100mV	80%
PPS-125-24	24V, 0~5.2A	±1%	150mV	83%
PPS-125-27	27V, 0~4.6A	±1%	150mV	83%
PPS-125-48	48V, 0~2.6A	±1%	250mV	84%

Triple Output


Model No.	Output	Tol.	R&N	Effi.	Max
PPT-125A	3.3V, 1.0~12.5A	±3%	100mV	75%	99W
	5V, 0.8~10.0A	±5%	100mV		
	12V, 0.05~0.63A	±6%	120mV		
PPT-125B	5V, 1.0~14.38A	±3%	100mV	78%	124W
	12V, 0.3~3.75A	±5%	120mV		
	-12V, 0.05~0.63A	±6%	120mV		
PPT-125C	5V, 1.0~13.75A	±3%	100mV	78%	125W
	15V, 0.25~3.13A	±5%	150mV		
	-15V, 0.05~0.63A	±6%	150mV		
PPT-125D	5V, 1.0~8.75A	±3%	100mV	78%	126W
	24V, 0.25~3.13A	±5%	240mV		
	12V, 0.05~0.63A	±6%	120mV		

150W Single Output with PFC Function

- Universal AC input / Full range
- PF>0.98@115VAC; >0.95@230VAC
- Protections: Short circuit / Over load / Over voltage / Over temp.
- Cooling by free air convection
- High power density 8.4W/in³
- No load power consumption<1W
- 100% full load burn-in test
- 3 years warranty



169x 60.7x 28.5 mm

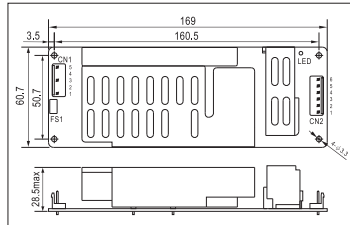

AC input voltage range 90~264VAC; 127~370VDC
 DC adjustment range Can be modified between $\pm 10\%$ rated output voltage by factory
 Overload protection 105%~135% hiccup mode, auto-recovery
 Over voltage protection 110%~135% rated output voltage
 Withstand voltage I/P-O/P: 4.25kVDC, I/P-FG: 1.5kVAC, 1minute
 Working temperature -20~+60°C (refer to output derating curve)
 Safety standards UL60950-1 approved
 EMC standards EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, ENV50204
 Connection 5+6P / 3.96mm pitch, JST P/N :B5P / B6P-VH
 Packing 0.32kg; 48pcs / 15.8kg / 0.79CUFT


Model No.	Output	Tol.	R&N	Effi.
ASP-150-12	12V, 0~11A	$\pm 2\%$	150mV	88%
ASP-150-15	15V, 0~9.5A	$\pm 2\%$	180mV	88%
ASP-150-20	20V, 0~7.5A	$\pm 1\%$	200mV	90%
ASP-150-24	24V, 0~6.3A	$\pm 1\%$	240mV	90%
ASP-150-48	48V, 0~3.2A	$\pm 1\%$	240mV	89%

200W Single Output with PFC Function

- Universal AC input / Full range
- High efficiency up to 90%
- PF>0.98@115VAC; >0.93@230VAC
- Protections: Short circuit / Over load / Over voltage / Over temp.
- High power density 9.78W/inch³
- 5"x3" compact size
- ZVS technology to reduce power dissipation
- Built-in remote sense function
- Free air convection for 150W and 200W with 20.5 CFM forced air
- 3 years warranty



127x 76.2x 34.6 mm



AC input voltage range 90~264VAC; 127~370VDC
 DC adjustment range $\pm 10\%$ rated output voltage
 Overload protection 105%~135% hiccup mode, auto-recovery
 Over voltage protection 115%~135% rated output voltage
 Withstand voltage I/P-O/P: 3kVAC, I/P-FG: 1.5kVAC, 1minute
 Working temperature -20°C~70°C (refer to output derating curve)
 Safety standards UL60950-1, TUV EN60950-1 approved
 EMC standards EN55022 class B, EN61000-3-2,3 EN61000-4-2,3,4,5,6,8,11, ENV50204
 Connection 3+8P / 3.96mm pitch, JST B3P / B8P-VH
 Packing 0.37kg; 36pcs / 14.3kg / 0.79CUFT


Model No.	Output	Tol.	R&N	Effi.
PPS-200-5	5V, 0~36.0A	$\pm 4\%$	100mV	86%
PPS-200-12	12V, 0~16.6A	$\pm 3\%$	100mV	89%
PPS-200-15	15V, 0~13.3A	$\pm 3\%$	100mV	89%
PPS-200-24	24V, 0~8.30A	$\pm 2\%$	150mV	89%
PPS-200-27	27V, 0~7.40A	$\pm 2\%$	150mV	89%
PPS-200-48	48V, 0~4.167A	$\pm 2\%$	250mV	90%

250W Isolated Dual Output with PFC Function


- Universal AC input / Full range
- Isolated output & GND for CH1,CH2
- PF>0.97@115VAC; >0.92@230VAC
- Protections: Short circuit / Overload / Over voltage / Over temp.
- Optional case available
- Cooling by free air convection
- Remote control function for CH1
- Peak load 170% for 10 sec. (CH1)
- 100% full load burn-in test
- 3 years warranty



222x 95x 40 mm

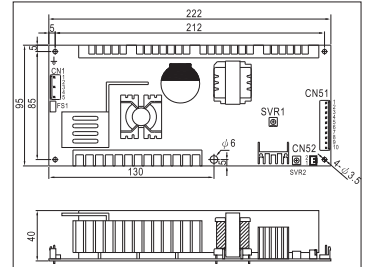

250x 105.4x 53 mm

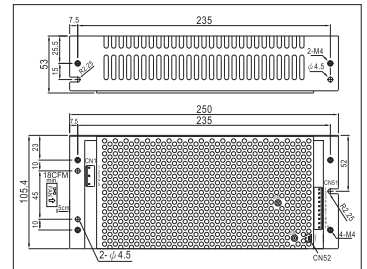

AC input voltage range 90~264VAC; 127~370VDC
 AC inrush current Cold start, 58A at 230VAC
 Leakage current Less than 3.5mA at 240VAC
 DC adjustment range $\pm 10\%$ for CH1; $\pm 5\%$ for CH2
 Overload protection(CH1) 105%~170% normally operation, shut off after 10 sec.; >180%, constant current, shut off after 10 sec.
 (CH2) 101%~150% hiccup mode, auto-recovery
 Over voltage protection CH1: 115%~140%, CH2: 110%~135%
 Setup, rise, hold up time 1200ms, 60ms, 30ms at full load and 230VAC
 Withstand voltage I/P-O/P: 3.0kVAC, I/P-FG: 1.5kVAC, 1minute
 Working temperature -20°C~+70°C (refer to output derating curve)
 Safety standards UL60950-1, TUV EN60950-1 approved
 EMC standards EN55022 class B, EN61000-3-2,-3 EN61000-4-2,3,4,5,6,8,11, ENV50204
 Connection 5+10+2P/3.96mm pitch JST B5P/B10P-VH, B2B-XH
 Packing 0.74Kg; 18pcs / 14.3Kg / 0.88CUFT

Model No.	Output	Tol.	R&N	Effi.
PID-250A	12V, 0~15A	$\pm 3\%$	120mV	83%
PID-250B	5V, 0~5.0A	$\pm 2\%$	50mV	
PID-250B	24V, 0~9.4A	$\pm 2\%$	150mV	86%
PID-250C	5V, 0~5.0A	$\pm 2\%$	50mV	
PID-250C	36V, 0~6.3A	$\pm 2\%$	200mV	86%
PID-250D	5V, 0~5.0A	$\pm 2\%$	50mV	
PID-250D	48V, 0~4.7A	$\pm 2\%$	200mV	86%
PID-250D	5V, 0~5.0A	$\pm 2\%$	50mV	

Feature Description

PID-250 series is suitable for motor-based equipment with logic control circuit. CH1 with high peak power capability can provide the required surge loading while starting up the motor. The isolated 5V/5A CH2 is good for logic control usage and can still work properly even CH1 is malfunction or at any protection modes. The isolated design between CH1 and CH2 can significantly prevent noise of the motor action from entering control circuits and hence secure the accurate operation of the end equipment.



Features

- Universal AC input / Full range
- Built-in active PFC function (LPP-100/150)
- Protections: Short circuit / Overload / Over voltage
- Optional over temperature protection for LPP-150
- Built-in remote ON/OFF control (LPS-50/75)
- Cooling by free air convection
- 100% full load burn-in test
- 2 years warranty for LPS series
- 3 years warranty for LPP series

LPS-50	LPS-75	LPS/LPP-100	LPP-150

General Specification (Please refer to www.meanwell.com for detail spec.)



Model No.		LPS-50	LPS-75	LPS-100	LPP-100	LPP-150
AC input voltage range		90~264VAC		115/230 auto switch	85~264VAC	
AC inrush current (230VAC)		35A	36A	60A	30A	40A
DC adjustment range		±10% rated output voltage			-5%~+10% rated output voltage	
Overload protection	Range	122%~160%	115%~150%	105%~140%	105%~150% rated output power	
	Type	Hiccup mode, auto recovery			Constant current limiting, auto recovery	
Over voltage protection	Range	110%~135% of rated output voltage				Shut off, AC recycle to re-start
	Type	Hiccup mode, auto recovery				
Withstand voltage		I/P-O/P: 3kVAC, I/P-FG:1.5kVAC, O/P-FG: 0.5kVAC, 1 minute				
Working temperature		-20~+70°C (refer to output derating curve)		-10~+60°C (refer to output derating curve)		
Safety standards		UL60950-1, TUV EN60950-1 approved				
EMC standards		EN55022 class B, EN61000-3-2,3, ENV50204, EN61000-4-2,3,4,5,6,8,11 (EN61000-6-2 heavy industry level for LPS-50/75 only)				
Connection		JST B5P / B4P-VH	JST B5P / B6P-VH	5P+8P/3.96mm pitch, JST B5P / B8P-VH		JST B5P / B6Px2-VH
Dimension (L*W*H)(mm)		195x 55x 23	222x 55x 30	222x 62x 32		222x 75x 41
Packing		48pcs / 12.5kg	48pcs / 15.6kg	24pcs / 12.5kg	24pcs / 13.9kg	24pcs / 16.6kg

50W LPS-50

Model No.	Output	Tol.	R&N	Effi.
LPS-50-3.3	3.3V, 0~10A	±3%	50mV	75%
LPS-50-5	5V, 0~10A	±3%	50mV	81%
LPS-50-12	12V, 0~4.2A	±2%	80mV	82%
LPS-50-15	15V, 0~3.4A	±2%	80mV	84%
LPS-50-24	24V, 0~2.1A	±1%	80mV	85%
LPS-50-48	48V, 0~1.1A	±1%	100mV	86%

75W LPS-75

Model No.	Output	Tol.	R&N	Effi.
LPS-75-3.3	3.3V, 0~15A	±3%	80mV	69%
LPS-75-5	5V, 0~15A	±3%	80mV	77%
LPS-75-12	12V, 0~6.2A	±2%	100mV	80%
LPS-75-15	15V, 0~5.0A	±2%	100mV	81%
LPS-75-24	24V, 0~3.2A	±2%	120mV	83%
LPS-75-48	48V, 0~1.56A	±2%	120mV	83%

100W LPS-100

Model No.	Output	Tol.	R&N	Effi.
LPS-100-3.3	3.3V, 0~20A	±3%	150mV	69%
LPS-100-5	5V, 0~20A	±3%	100mV	77%
LPS-100-7.5	7.5V, 0~13.3A	±2%	100mV	77%
LPS-100-12	12V, 0~8.4A	±2%	100mV	79%
LPS-100-13.5	13.5V, 0~7.5A	±2%	100mV	79%
LPS-100-15	15V, 0~6.7A	±2%	100mV	80%

LPS-100-24	24V, 0~4.2A	±1%	150mV	80%
LPS-100-27	27V, 0~3.8A	±1%	150mV	81%
LPS-100-48	48V, 0~2.1A	±1%	200mV	81%

100W (with PFC Function) LPP-100

Model No.	Output	Tol.	R&N	Effi.
LPP-100-3.3	3.3V, 0~20A	±2%	100mV	69%
LPP-100-5	5V, 0~20A	±2%	100mV	75%
LPP-100-7.5	7.5V, 0~13.5A	±2%	100mV	76%
LPP-100-12	12V, 0~8.5A	±2%	100mV	79%
LPP-100-13.5	13.5V, 0~7.5A	±2%	100mV	79%
LPP-100-15	15V, 0~6.7A	±2%	100mV	80%
LPP-100-24	24V, 0~4.2A	±1%	150mV	83%
LPP-100-27	27V, 0~3.8A	±1%	150mV	83%
LPP-100-48	48V, 0~2.1A	±1%	250mV	83%

150W (with PFC Function) LPP-150


Model No.	Output	Tol.	R&N	Effi.
LPP-150-3.3	3.3V, 0~30A	±2%	150mV	66%
LPP-150-5	5V, 0~30A	±2%	100mV	72%
LPP-150-7.5	7.5V, 0~20A	±2%	100mV	76%
LPP-150-12	12V, 0~12.5A	±2%	100mV	79%
LPP-150-13.5	13.5V, 0~11.2A	±2%	100mV	80%
LPP-150-15	15V, 0~10A	±2%	100mV	80%
LPP-150-24	24V, 0~6.3A	±1%	150mV	83%
LPP-150-27	27V, 0~5.6A	±1%	150mV	83%
LPP-150-48	48V, 0~3.2A	±1%	250mV	83%



PCB Type: 144x 90x 35 mm
External Case Type: 180x 96x 49 mm

Power Factor
Correction Choke

115 / 230
Selectable

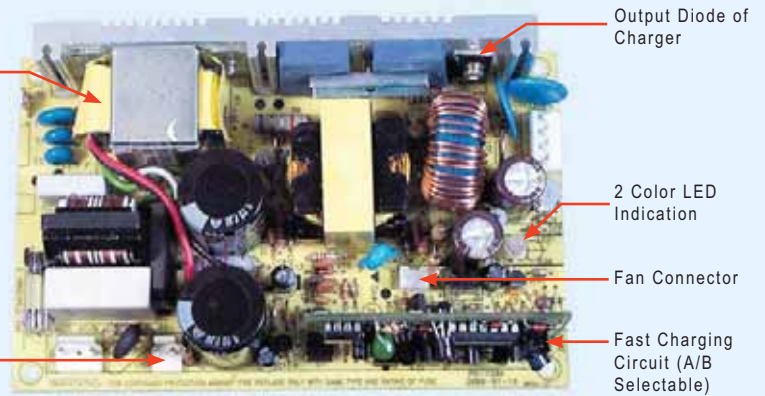


Output Diode of
Charger

2 Color LED
Indication


Fan Connector

Fast Charging
Circuit (A/B
Selectable)

P.C.B. Dimension

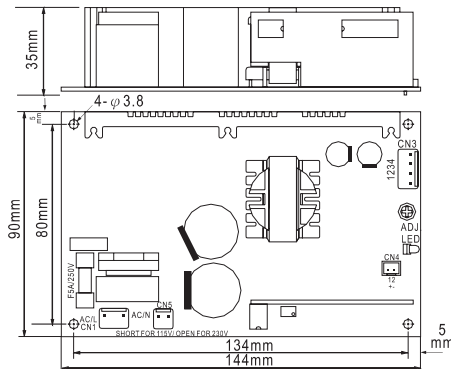

Case Drawing

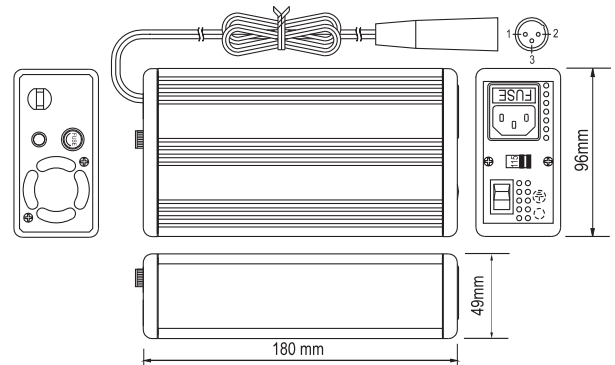

Features


- AC input range selectable by switch
- Passive PFC, PF> 0.65(option)
- Protection for deeply discharged battery
- Protections: Short circuit / Overload / Over voltage / Over temp.
- Charger for lead-acid batteries
- Built-in ON/OFF power switch
- 3 poles AC inlet with fuse holder
- Charging type can be selected (option)
- 2 color LED loading indicator
- EN60335 approved
- Low cost, high reliability
- Open frame models available (without safety approval)
- 2 years warranty

General Specification


AC input voltage range 88~132VAC/ 176~264VAC selectable by switch
AC inrush current (max.) Cold start, 25A at 115VAC, 50A at 230VAC
Overload protection 90%~110% constant current limiting ,auto-recovery (PS-120: 105~150% hiccup mode, auto recovery)
Over voltage protection 108%~127% rated output voltage
Setup, rise, hold up time 1000ms, 50ms, 16ms at full load and 230VAC
Withstand voltage I/P-O/P: 3kVAC, I/P-FG: 1.5kVAC, O/P-FG: 0.5kVAC, 1 minute
Working temperature -10°C~45°C, derating curve may vary for different models (PS-120: -10~60°C)
Safety standards UL60950-1, TUV EN60950-1, EN60335, EN60335-1, EN60335-2-29(except for 55.2V) approved
EMC standards EN55022 class B, EN61000-4-2,3,4,5,6,8,11, EN61000-3-2,3, ENV50204
DC output cable 6 ft. of SPT-2, 18AWGx2C
Standard output connector ... MIC 3P, male type(standard type)
Packing 1.1kg ; 16pcs / 17.9kg / 1.47CUFT (without PFC)
1.24kg ; 16pcs / 20.1kg / 1.47CUFT (with PFC)

Model No.	Output	Tol.	R&N	Effi.
P□-120□-13□	13.8V, 0~7.2A	±3~±8.5%	150mV	73%
P□-120□-27□	27.6V, 0~4.3A	±1~±8.0%	200mV	79%
P□-120□-54□	55.2V, 0~2.2A	±1~±7.5%	250mV	79%

Charging Curve

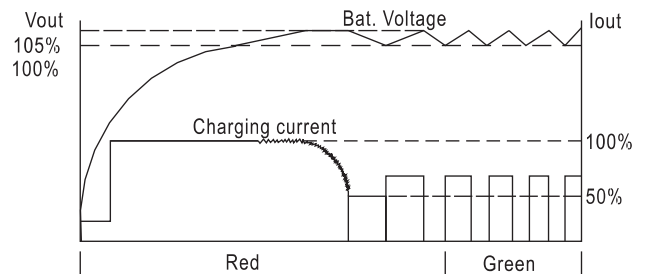

Type A: pulse charger (detect on bat. voltage)

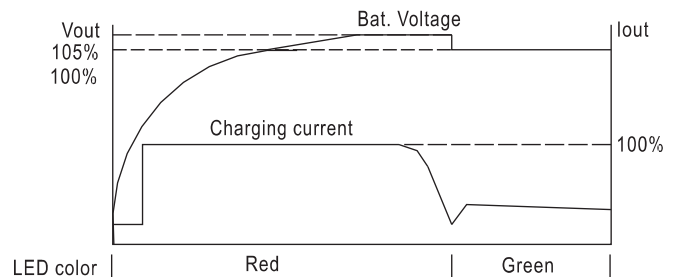

Type B: 2 section voltage charger (detect on charging current)

Order Information

P **A** - 120 P - 13 C

S: Power supply
A: Pulse charge
B: 2 section voltage charge
P: With PFC
N: None PFC

P : Open P.C.B.
C : With case
13: 13.8V
27: 27.6V
54: 55.2V

108W Desktop Power Supply or Charger



CASE: 909 150x 140x 75 mm

- AC input range selectable by switch
- Protections: Short circuit / Overload / Over voltage / Over temp.
- 3 color LED loading indicator
- Battery under / over voltage and polarity protection (ESC only)
- Cooling by free air convection
- Fixed switching frequency at 25kHz
- 2 years warranty

AC input voltage range 88~132VAC / 176~264VAC selectable by switch
 AC inrush current Cold start, 40A at 230VAC
 DC adjustment range 13.5V: 12~15V, 27V: 24~30V, 54V: 48~56V
 Overload protection 105%~135% fold back current limiting, auto-recovery
 Over voltage protection 115%~135% rated output voltage
 Setup, rise, hold up time ... 200ms, 100ms, 36ms at full load and 230VAC
 Withstand voltage I/P-O/P: 3kVAC, I/P-FG: 1.5kVAC, 1minute
 Working temperature 0~35°C@100%, -10°C@80%, 60°C@60% load
 Safety standards CSA 61010-1 approved
 EMC standards EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4, ENV50204
 Packing 1.38kg ; 8pcs / 12.0kg / 1.1CUFT

Model No.	Output	Tol.	R&N	Effi.
ESC-120-13.5	13.5V, 0~8A	±2%	120mV	81%
ESC-120-27	27V, 0~4A	±1%	150mV	83%
ESC-120-54	54V, 0~2A	±1%	400mV	84%
ESP-120-13.5	13.5V, 0~8A	±2%	120mV	81%
ESP-120-27	27V, 0~4A	±1%	150mV	83%
ESP-120-54	54V, 0~2A	±1%	400mV	84%

216W Desktop Power Supply or Charger



CASE: 909 150x 140x 75 mm

- AC input range selectable by switch
- Protections: Short circuit / Overload / Over voltage / Over temp.
- 3 color LED loading indicator
- Battery under / over voltage and polarity protection (ESC only)
- Built-in DC fan with fan ON/OFF auto control at 50°C
- Fixed switching frequency at 25kHz
- 2 years warranty

AC input voltage range 88~132VAC / 176~264VAC selectable by switch
 AC inrush current Cold start, 40A at 230VAC
 DC adjustment range 13.5V: 12~15V, 27V: 24~30V, 54V: 48~56V
 Overload protection 105%~135% fold back current limiting, auto-recovery
 Over voltage protection 115%~135% rated output voltage
 Setup, rise, hold up time ... 200ms, 100ms, 30ms at full load and 230VAC
 Withstand voltage I/P-O/P: 3kVAC, I/P-FG: 1.5kVAC, 1minute
 Working temperature 0~40°C@100%, -10°C@80%, 60°C@60% load
 Safety standards CSA 61010-1 approved
 EMC standards EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4, ENV50204
 Packing 1.5kg ; 8pcs / 13.0kg / 1.1CUFT

Model No.	Output	Tol.	R&N	Effi.
ESC-240-13.5	13.5V, 0~16A	±2%	120mV	81%
ESC-240-27	27V, 0~8A	±1%	150mV	84%
ESC-240-54	54V, 0~4A	±1%	400mV	85%
ESP-240-13.5	13.5V, 0~16A	±2%	120mV	81%
ESP-240-27	27V, 0~8A	±1%	150mV	84%
ESP-240-54	54V, 0~4A	±1%	400mV	85%

230W Single Output Battery Charger



(PB-230-xxAD1)



190x 96x 49 mm

- 3 stage charging
- Universal AC input / Full range
- Built-in active PFC function, PF>0.95
- Protections: Short circuit / Over voltage / Over temperature
- 2 color LED loading indicator
- Built-in remote ON-OFF control
- Fan ON/OFF control
- Low cost, high reliability
- 2 years warranty

AC input voltage range 90~264VAC; 127~370VDC
 AC inrush current (max.) .. Cold start, 50A at 230VAC
 Over voltage protection 102%~125% shut off, re-power on to recover
 Withstand voltage I/P-O/P: 3kVAC, I/P-FG: 1.5kVAC, O/P-FG: 0.5kVAC
 Working temperature -20°C~+50°C (refer to output derating curve)
 Safety standards UL1012(PB-230xx-AD1 only), EN60950-1 approved
 EMC standards EN55022 class B, EN61000-4-2,3,4,5,6,8,11, EN61000-3-2,3, ENV50204
 Packing 1.21Kg ; 12pcs / 15.5Kg / 1.29CUFT


Model No.	Output	Effi.
PB-230-12□	14.4V, 0~16A	81.5%
PB-230-24□	28.8V, 0~8A	85.5%
PB-230-48□	57.6V, 0~4A	86.0%

□ = Blank, AD1; Blank= 4 pin power din, AD1= Anderson connector

300W Single Output Battery Charger



(except for 48V) (P type only)



CASE: 801B 253x 135x 48.5 mm

- Optimal 3 stage charging characteristic
- AC input range selectable by switch
- Passive PFC compliance to EN61000-3-2 class A (option)
- Protections: Reverse polarity / Short circuit / Over voltage / Over temperature
- Charger for lead-acid batteries
- Built-in ON/OFF power switch
- 3 poles AC inlet (IEC 320-C14)
- 2 color LED loading indicator
- Built-in remote ON/OFF control
- Cooling by free air convection
- 3 years warranty

AC input voltage range 90~132VAC / 180~264VAC selectable by switch
 AC inrush current (max.) .. Cold start, 60A at 230VAC
 Over voltage protection 108%~125% rated output voltage
 Withstand voltage I/P-O/P: 3kVAC, I/P-FG: 1.5kVAC, 1 minute
 Working temperature -10°C~+50°C (refer to output derating curve)
 Safety standards IEC60335-2-29 CB approval by TUV (except for 48V), UL60950-1 approved
 EMC standards EN55022 class B, EN61000-4-2,3,4,5,6,8,11, EN61000-3-2,3 (P type), ENV50204
 Packing 1.45kg ; 6pcs / 9.7kg / 0.95CUFT

Model No.	Output (20 min.) / (Continuous at 25°C)	Effi.
PB-300□-12	14.4V, 20.85A / 12.5A	85%
PB-300□-24	28.8V, 10.50A / 6.25A	86%
PB-300□-48	57.6V, 5.3A / 3.20A	88%

□ = P: with PFC; N: non PFC

360W Single Output Battery Charger

UL c CB CE (except for 48V) (P type only)



CASE: 801A 253x 135x 48.5 mm

- Optimal 3 stage charging characteristic
- AC input range selectable by switch
- Passive PFC compliance to EN61000-3-2 class A (option)
- Protections: Reverse polarity / Short circuit / Over voltage / Over temperature
- Charger for lead-acid batteries
- Built-in ON/OFF power switch
- 3 poles AC inlet (IEC 320-C14)
- 2 color LED loading indicator
- Built-in remote ON/OFF control
- Cooling by built-in DC fan
- 3 years warranty

AC input voltage range 90~132VAC / 180~264VAC selectable by switch

AC inrush current (max.) .. Cold start, 60A at 230VAC

Over voltage protection 108%~125% rated output voltage

Withstand voltage I/P-O/P: 3kVAC, I/P-FG: 1.5kVAC, 1 minute

Working temperature -20°C~+60°C (refer to output derating curve)

Safety standards IEC60335-2-29 CB approval by TUV (except for 48V), UL60950-1 approved

EMC standards EN55022 class B, EN61000-4-2,3,4,5,6,8,11, EN61000-3-2,3 (P type), ENV50204

Packing 1.5kg ; 6pcs / 10kg / 0.95CUFT

Model No.	Output	Effi.
PB-360□-12	14.4V, 24.3A	85%
PB-360□-24	28.8V, 12.5A	86%
PB-360□-48	57.6V, 6.25A	87%

□ = P: with PFC; N: non PFC

600W Single Output Battery Charger

UL c CB CE



CASE: 805C 230x 158x 67 mm

- 2/3/8 stage smart charger for lead-acid batteries
- Microprocessor controlled power management
- Universal AC input / Full range
- Built-in active PFC function, PF>0.95
- Protections: Reverse polarity / Short circuit / Over voltage / Over temperature
- Built-in temp. compensation function
- Status signal sent by relay contacts
- 3 color LED loading indicator
- Built-in remote ON-OFF control
- Fan speed control (depend on charging current)
- Charging curve can be modified for different battery applications (optional)
- 3 years warranty

AC input voltage range 90~264VAC; 127~370VDC

AC inrush current (max.) .. Cold start, 50A at 230VAC

Over voltage protection 112%~125% shut off, re-power on to recover

Withstand voltage I/P-O/P: 3kVAC, I/P-FG: 1.5kVAC, O/P-FG: 0.5kVAC

Working temperature -20°C~+60°C (refer to output derating curve)

Safety standards TUV EN60335-1, EN60335-2-29(except for 48V), EN60950-1(48V only), UL1012 approved

EMC standards EN55022 class B conducted, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, ENV50204

Connection IEC inlet for input; copper pillars for output

Model No.	Output	Effi.
PB-600-12	14.4V, 0~40.0A	86%
PB-600-24	28.8V, 0~21.0A	87%
PB-600-48	57.6V, 0~10.5A	89%

1000W Single Output Battery Charger

UL c CB CE



CASE: 804B 300x 184x 70 mm

- 2/3/8 stage smart charger for lead-acid batteries
- Microprocessor controlled power management
- Universal AC input / Full range
- Built-in active PFC function PF>0.95
- Protections: Reverse polarity / Short circuit / Over voltage / Over temperature
- Built-in temp. compensation function
- Can be connected to 2 battery banks
- Status signal sent by relay contacts
- 3 color LED loading indicator
- Built-in remote ON-OFF control
- Fan speed control
- Charging curve can be modified for different battery applications (optional)
- 3 years warranty

AC input voltage range 90~264VAC / 127~370VDC

AC inrush current (max.) Cold start, 50A at 230VAC

Over voltage protection 110%~125% shut off, re-power on to recover

Withstand voltage I/P-O/P: 3kVAC, I/P-FG: 1.5kVAC, 1 minute

Working temperature -20°C~+60°C (refer to output derating curve)

Safety standards UL60950-1, TUV EN60950-1 approved

EMC standards EN55022 class B conducted, ENV50204, EN61000-4-2,3,4,5,6,8,11, EN61000-3-2,3


Connection IEC inlet for input; copper pillars for output

Packing 3.5kg ; 4pcs / 15kg / 1.83CUFT


Model No.	Output	Effi.
PB-1000-12	14.4V, 60.0A	85%
PB-1000-24	28.8V, 34.7A	88%
PB-1000-48	57.6V, 17.4A	89%

Built-in Charging Curves for PB-600 and PB-1000


2 Stage Charging Curve

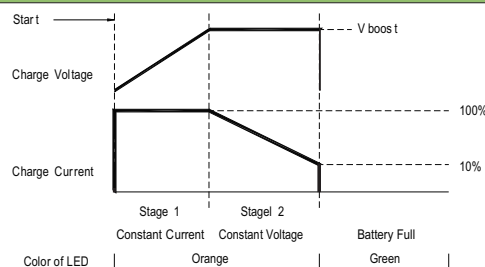

3 Stage Charging Curve

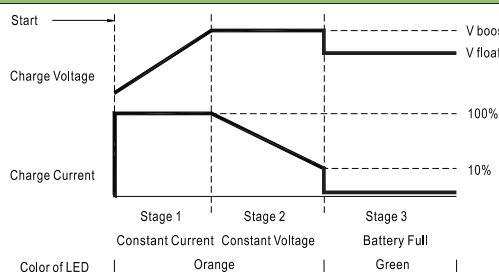

8 Stage Charging Curve

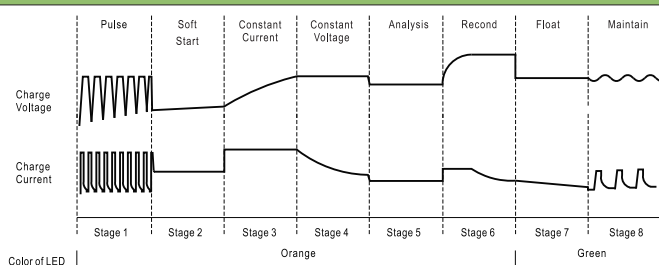

30W Green Adaptor with Charging Function

- Universal AC input/ Full range
- Class II power (without earth pin)
- **No load power consumption < 1W**
- Constant current and voltage (CC, CV mode)
- High reliability
- Suitable for high surge current equipment
- Protections: Short circuit / Overload / Over voltage / Over temp.
- 2 color LED indicator for charging status
- Fully enclosed plastic case
- 2 years warranty



AC input voltage range 90~264VAC; 127~370VDC
 Overload protection 90%~110% constant current mode and over 300% pulsing mode
 Over voltage protection 110%~135% rated output voltage, clamp by Zener diode
 Withstand voltage I/P-O/P: 4242VDC, 1minute
 Working temperature 0~+40°C @ 100% load, 50°C @ 70% load
 Safety standards UL60950-1, CSA 22.2, TUV EN60950-1
 EMC standards EN55014-1, EN61000-3-2,3, EN61000-4-2,3,4,5,6,11
 Length of output cable 180cm of UL1185, 18AWG
 Standard DC plug P1J: 2.1øx5.5øx11mm / C+, tuning fork type

Model No.	Output	R&N	Effi.
GC30□-0P1J	4.2V, 0~4.00A	50mV	55%
GC30□-1P1J	5.6V, 0~3.99A	50mV	70%
GC30□-11P1J	7.2V, 0~3.00A	80mV	74%
GC30□-2P1J	8.4V, 0~3.00A	80mV	76%
GC30□-4P1J	14.3V, 0~2.09A	100mV	78%
GC30□-5P1J	16.8V, 0~1.60A	100mV	78%
GC30□-6P1J	28.6V, 0~1.04A	150mV	80%

□ = B, U, E; B: IEC320-C8, U: US type plug, E: European type plug

160W Green Adaptor with Charging Function



- Universal AC input/ Full range
- **No load power consumption < 1W**
- High efficiency up to 94%
- Built-in active PFC function, PF>0.94
- 3 pole AC inlet IEC320-C14
- Class I power (with earth pin)
- Protections: Short circuit / Overload / Over voltage / Over temp.
- Fully enclosed plastic case
- 2 color LED indicator for charging status
- 2 years warranty

AC input voltage range 85~264VAC; 120~370VDC
 Overload protection 90%~110% constant current, auto-recovery
 Over voltage protection 105%~135% rated output voltage, re-power on to recover
 Withstand voltage I/P-O/P: 3kVAC
 Working temperature -30~+70°C (refer to derating curve)
 Safety standards UL1012(GC160Axx-AD1 only), EN60950-1 approved
 EMC standards EN55022 class B, FCC part 15 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11
 Length of output cable 120cm of UL2464, 18AWGx 4C
 Standard DC plug Power DIN 4P with lock type (R7B)

Model No.	Output	Effi.
GC160A12-□	13.6V, 10.0A	89.0%
GC160A24-□	27.2V, 5.89A	92.5%
GC160A48-□	54.4V, 2.95A	94.0%

□ = R7B, AD1; R7B= 4 pin power din, AD1= Anderson connector

218W Green Adaptor with Charging Function



- Universal AC input/ Full range
- **No load power consumption < 1W**
- High efficiency up to 93%
- Built-in active PFC function, PF>0.91
- Cooling by free air convection
- 3 pole AC inlet IEC320-C14
- Class I power (with earth pin)
- Protections: Short circuit / Overload / Over voltage / Over temp.
- Fully enclosed plastic case
- 2 color LED indicator for charging status
- 2 years warranty

AC input voltage range 90~264VAC; 127~370VDC
 Overload protection 90%~110% constant current, auto-recovery after fault condition is removed
 Over voltage protection 105%~135% rated output voltage, re-power on to recover
 Withstand voltage I/P-O/P: 3kVAC
 Working temperature -30~+60°C (refer to derating curve)
 Safety standards TUV EN60950-1, UL1012 (GC220Axx-AD1 only) approved
 EMC standards EN55022 class B, FCC part 15 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11
 Length of output cable 100cm of UL2464, 16AWGx 4C
 Standard DC plug Power DIN 4P with lock type (R7B)

Model No.	Output	Effi.
GC220A12-□	13.6V, 13.5A	89.0%
GC220A24-□	27.2V, 8A	92.5%
GC220A48-□	54.4V, 4A	93.0%

□ = R7B, AD1; R7B= 4 pin power din, AD1= Anderson connector

120W Green Adaptor with Charging Function



- Universal AC input/ Full range
- **No load power consumption < 0.5W**
- Built-in active PFC function, PF>0.97
- High efficiency up to 91%
- 3 pole AC inlet IEC320-C14
- Class I power (with earth pin)
- Protections: Short circuit / Overload / Over voltage / Over temp.
- Fully enclosed plastic case
- 2 color LED indicator for charging status
- 2 years warranty

AC input voltage range 85~264VAC; 120~370VDC
 Overload protection 90~110% constant current, auto-recovery
 Over voltage protection 105%~135% rated output voltage, re-power on to recover
 Withstand voltage I/P-O/P: 3kVAC
 Working temperature -30~+70°C (refer to derating curve)
 Safety standards UL1012(GC120Axx-AD1 only), EN60950-1 approved
 EMC standards EN55022 class B, FCC part 15 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11
 Length of output cable 120cm of UL2464, 18AWGx 4C
 Standard DC plug Power DIN 4P with lock type (R7B)

Model No.	Output	Effi.
GC120A12-□	13.6V, 7.5A	86.5%
GC120A24-□	27.2V, 4.42A	90.0%
GC120A48-□	54.4V, 2.21A	91.0%

□ = R7B, AD1; R7B= 4 pin power din, AD1= Anderson connector

6W Green Power Adaptor

- Universal AC input/ Full range
- No load power consumption < 0.3W
- **ErP step 2 compliant**
- **Meet EISA 2007 (Energy Independence and Security Act)**
- 2 pole US / European type plug
- Class II power (without earth pin)
- Full output 5~48V safety approved
- Protections: Short circuit / Overload / Over voltage
- Pass LPS
- Fully enclosed plastic case
- 2 years warranty



AC input voltage range 90~264VAC, 127~370VDC
 AC inrush current(max.) ... Cold start, <30A peak at 115VAC or <50A peak at 230VAC
 Overload protection Hiccup mode, auto-recovery
 Over voltage protection ... Clamp by zener diode > 120%
 Withstand voltage I/P-O/P: 4242VDC, 1minute
 Working temperature 0~40°C @ 100% load, 50°C @ 70% load
 Safety standards UL60950-1, CSA 22.2, TUV EN60950-1
 EMC standards EN55022-B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,11
 Length of output cable 180cm of UL1185, 20AWG

Model No.	Output	Tol.	R&N	Effi.
GS06□-1P1J	5V, 0~1.00A	±5%	50mV	68%
GS06□-11P1J	7.5V, 0~0.80A	±5%	80mV	74%
GS06□-2P1J	9V, 0~0.66A	±5%	80mV	75%
GS06□-3P1J	12V, 0~0.50A	±3%	100mV	77%
GS06□-4P1J	15V, 0~0.40A	±3%	120mV	78%
GS06□-5P1J	18V, 0~0.33A	±3%	150mV	78%
GS06□-6P1J	24V, 0~0.25A	±2%	180mV	82%
GS06□-8P1J	48V, 0~0.125A	±2%	200mV	84%

□ = U: American 2P ; E: European 2P

12W Green Power Adaptor

- Universal AC input/ Full range
- No load power consumption < 0.3W
- **ErP step 2 compliant**
- **Meet EISA 2007 (Energy Independence and Safety Act)**
- 2 pole US / European type plug
- Class II power (without earth pin)
- Full output 5~24V safety approved
- Protections: Short circuit / Overload / Over voltage / Over temp.
- Pass LPS
- Fully enclosed plastic case
- 2 years warranty



AC input voltage range 90~264VAC, 127~370VDC
 AC inrush current(max.) ... Cold start, <25A peak at 115VAC or 45A peak at 230VAC
 Overload protection Hiccup mode, auto-recovery
 Over voltage protection ... 115%~135% clamp by zener diode
 Withstand voltage I/P-O/P: 3KVAC, 1minute
 Working temperature 0~40°C @ 100% load, 50°C @ 70% load
 Safety standards UL60950-1, CSA 22.2, TUV EN60950-1
 EMC standards EN55022-B, EN61204-3, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, FCC part15 class B

Model No.	Output	Tol.	R&N	Effi.
GS12□05-P1I	5V, 0~2.00A	±5%	75mV	76.0%
GS12□07-P1I	7.5V, 0~1.60A	±4%	90mV	78.5%
GS12□09-P1I	9V, 0~1.33A	±4%	90mV	78.5%
GS12□12-P1I	12V, 0~1.00A	±3%	120mV	78.5%
GS12□15-P1I	15V, 0~0.80A	±3%	150mV	80.0%
GS12□18-P1I	18V, 0~0.67A	±3%	180mV	80.0%
GS12□24-P1I	24V, 0~0.50A	±3%	200mV	80.5%

□ = U: American 2P ; E: European 2P

15W Green Power Adaptor

- Universal AC input/ Full range
- No load power consumption < 0.3W
- **ErP step 2 compliant**
- **Meet EISA 2007 (Energy Independence and Security Act)**
- Full output 3~48V safety approved
- Protections: Short circuit / Overload / Over voltage
- Pass LPS
- Fully enclosed plastic case
- 2 years warranty



AC input voltage range 90~264VAC
 AC inrush current(max.) Cold start, <30A peak at 115VAC or <50A peak at 230VAC
 Overload protection Hiccup mode, auto-recovery
 Over voltage protection Clamp by zener diode > 120%
 Withstand voltage I/P-O/P: 3kVAC, I/P-FG: 1.5kVAC, 1 minute
 Working temperature 0~40°C @ 100% load, 50°C @ 70% load
 Safety standards UL60950-1, CSA 22.2, TUV EN60950-1 approved
 EMC standards EN55022-B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,11
 Length of output cable 180cm of UL1185, 18AWG (150cm length for 3.3V output)
 Standard DC plug P1J: 2.1øx5.5øx11mm / C+, tuning fork type (refer to page 55 for DC plug list)

Order No.	Output	Tol.	R&N	Effi.
GS15□-1P1J	5.0V, 0~2.40A	±5%	50mV	75%
GS15□-11P1J	7.5V, 0~1.60A	±5%	80mV	78%
GS15□-2P1J	9.0V, 0~1.66A	±5%	80mV	80%
GS15□-3P1J	12V, 0~1.25A	±3%	80mV	80%
GS15□-4P1J	15V, 0~1.00A	±3%	100mV	80%
GS15□-5P1J	18V, 0~0.83A	±3%	120mV	81%
GS15□-6P1J	24V, 0~0.62A	±2%	150mV	83%
GS15□-8P1J	48V, 0~0.31A	±2%	240mV	85%


□ = A: IEC320-C14 ; B: IEC320-C8

E: European 2P ; U: American 2P


► Special Models Suitable for High Surge Current

GS06 and GS15 also have models with "constant current limiting" instead of "hiccup type" as the overload protection which are suitable for peak load usage. Please refer to the overload curves that specify the output voltage / output current characteristics of these two overload protection types. If you are interested in the models with "constant current limiting" function, please contact with your sales representative for details!

Constant Current Limiting



Hiccup mode current limiting



Green Adaptor 12~24W Single Output and Interchangeable Type



■ Features

- Interchangeable AC plugs (plug kit sold separately)
- Universal AC input / Full range
- No load power consumption <0.3W
- ErP step 2 compliant
- Meet EISA 2007 (Energy Independence and Security Act)
- Class II power (without earth pin)
- Protections: Short circuit / Over voltage / Overload
- Fully enclosed plastic case
- LED indicator for power on
- Pass LPS
- Approvals:
UL / CUL / TUV / CCC / CB / FCC / CE / C-Tick
- 2 years warranty

■ General Specification (Please refer to www.meanwell.com for detail spec.)



AC input voltage range	90~264VAC / 0.4A for GE12; 90~264VAC / 0.7A for GE18/24
AC inrush current (max.)	Cold start, <40A peak at 100VAC; Cold start, <80A peak at 230VAC
Overload protection	Hiccup mode, auto-recovery
Over voltage protection	115%~135% rated output voltage
Setup, rise, hold up time	4000ms, 100ms, 30ms at 230VAC input
Withstand voltage	I/P-O/P:4242VDC, 1 minute
Working temperature	0~30°C @ 100% load, 40°C @ 75% load, 50°C @ 50% load
Safety standards	UL60950-1, CSA22.2, EN60950-1, GB4943 approved
EMC standards	EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, FCC part15 class B, GB9254
Length of output cable	150cm of UL2468, 20AWG for GE12; 150cm of UL2468, 18AWG for GE18/24
Standard DC plug	P1J: 2.1øx5.5øx11mm / C+, tuning fork type (refer to page 55 for DC plug list)

■ Wall-mounted (Interchangeable Type)—12W

Order No. (Main body)	Output	Tol.	R&N	Effi.
GE12I05-P1J	5V, 0~2.00A	±5%	50mV	74%
GE12I07-P1J	7.5V, 0~1.33A	±5%	75mV	77%
GE12I09-P1J	9V, 0~1.33A	±5%	100mV	79%
GE12I12-P1J	12V, 0~1.00A	±3%	120mV	81%
GE12I15-P1J	15V, 0~0.80A	±3%	150mV	82%
GE12I18-P1J	18V, 0~0.83A	±3%	180mV	83%
GE12I24-P1J	24V, 0~0.625A	±3%	240mV	83%

■ Wall-mounted (Interchangeable Type)—24W

Order No. (Main body)	Output	Tol.	R&N	Effi.
GE24I05-P1J	5V, 0~3.00A	±5%	50mV	76.5%
GE24I07-P1J	7.5V, 0~2.00A	±5%	75mV	79.5%
GE24I09-P1J	9V, 0~2.22A	±5%	100mV	81.5%
GE24I12-P1J	12V, 0~2.00A	±3%	120mV	82.5%
GE24I15-P1J	15V, 0~1.60A	±3%	150mV	84.0%
GE24I18-P1J	18V, 0~1.33A	±3%	180mV	84.0%
GE24I24-P1J	24V, 0~1.00A	±3%	240mV	85.0%
GE24I48-P1J	48V, 0~0.50A	±3%	300mV	85.0%

■ Wall-mounted (Interchangeable Type)—18W

Order No. (Main body)	Output	Tol.	R&N	Effi.
GE18I05-P1J	5V, 0~2.40A	±5%	50mV	75%
GE18I07-P1J	7.5V, 0~1.73A	±5%	75mV	79%
GE18I09-P1J	9V, 0~2.00A	±5%	100mV	81%
GE18I12-P1J	12V, 0~1.50A	±3%	120mV	82%
GE18I15-P1J	15V, 0~1.20A	±3%	150mV	84%
GE18I18-P1J	18V, 0~1.00A	±3%	180mV	84%
GE18I24-P1J	24V, 0~0.75A	±3%	240mV	85%
GE18I48-P1J	48V, 0~0.375A	±3%	300mV	85%

► Interchangeable AC Inlet Plug

AC Plug Type		
	Australian Type	U.K. Type
AC Plug Order No.	AC Plug-AU	AC Plug-UK
AC Plug Type		
	European Type	U.S. Type
AC Plug Order No.	AC Plug-EU	AC Plug-US

Note: Main body unit and AC plug should be ordered separately; The main body needs to be used along with any of the AC plug.



GS18/25A

93x 54x 36 mm



GS18/25B

79x 54x 33 mm



GS18/25U

79x 54x 33 mm



GS18/25E

79x 54x 33 mm

Features

- Universal AC input / Full range
- No load power consumption < 0.3W
- ErP step 2 compliant
- Meet EISA 2007 (Energy Independence and Security Act)
- 2 pole USA / EURO plug or IEC320-C14/C8
- Class I power (with earth pin) only for IEC320-C14
- Full output 5~48V safety approved
- Protections: Short circuit / Overload / Over voltage
- Fully enclosed plastic case
- LED indicator for power on
- Pass LPS
- Approvals:
 - UL / CUL / TUV / BSMI / PSE (A Type only) / CCC / CB / FCC / CE for desktop type
 - TUV / CB / CE for European type plug
 - UL / CUL / BSMI / CB / FCC for US type plug
- 2 years warranty

General Specification (Please refer to www.meanwell.com for detail spec.)

AC input voltage range	90~264VAC / 0.5A for 18W; 90~264VAC / 0.7A for 25W
AC inrush current (max.)	Cold start, <25A peak at 115VAC; Cold start, <50A peak at 230VAC
Overload protection	Hiccup mode, auto-recovery
Over voltage protection	105%~135% rated output voltage
Setup, rise, hold up time	500ms, 20ms, 50ms@ 230VAC input
Withstand voltage	I/P - O/P: 4242VDC, 1 minute
Working temperature	0~40°C @ 100% load, 50°C @ 70% load
Safety standards	UL60950-1, CSA 22.2, EN60950-1, BSMI CNS14336, J60950-1(GS18A/GS25A-5V~28V only), CCC GB4943 (A/B type only) approved
EMC standards	EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, FCC part 15 class B, GB9254
Length of output cable	180cm of UL1185, 18AWG for 15~48V or 120cm, 16AWG for 5V~12V output
Standard DC plug	P1J: 2.1øx5.5øx11mm / C+, tuning fork type (refer to page 55 for DC plug list)

Desktop—18W



Order No.	Output	Tol.	R&N	Effi.
GS18□05-P1J	5V, 0~3.00A	±5%	50mV	79.5%
GS18□07-P1J	7.5V, 0~2.00A	±5%	80mV	82.0%
GS18□09-P1J	9V, 0~2.00A	±5%	80mV	83.0%
GS18□12-P1J	12V, 0~1.50A	±3%	80mV	85.0%
GS18□15-P1J	15V, 0~1.20A	±3%	100mV	85.0%
GS18□18-P1J	18V, 0~1.00A	±3%	150mV	85.0%
GS18□24-P1J	24V, 0~0.75A	±2%	180mV	86.0%
GS18□28-P1J	28V, 0~0.64A	±2%	240mV	86.5%
GS18□48-P1J	48V, 0~0.375A	±2%	240mV	87.0%

□ = A/B ; A: IEC 320-C14 / Class I, B: IEC 320-C8 / Class II

Desktop—25W



Order No.	Output	Tol.	R&N	Effi.
GS25□05-P1J	5V, 0~4.00A	±5%	50mV	78.5%
GS25□07-P1J	7.5V, 0~2.93A	±5%	80mV	81.5%
GS25□09-P1J	9V, 0~2.77A	±5%	80mV	82.5%
GS25□12-P1J	12V, 0~2.08A	±3%	80mV	84.5%
GS25□15-P1J	15V, 0~1.66A	±3%	100mV	84.5%
GS25□18-P1J	18V, 0~1.38A	±3%	150mV	84.5%
GS25□24-P1J	24V, 0~1.04A	±2%	180mV	85.5%
GS25□28-P1J	28V, 0~0.89A	±2%	240mV	85.5%
GS25□48-P1J	48V, 0~0.52A	±2%	240mV	87.0%

□ = A/B ; A: IEC 320-C14 / Class I, B: IEC 320-C8 / Class II

Wall-mounted—18W



Order No.	Output	Tol.	R&N	Effi.
GS18□05-P1J	5V, 0~3.00A	±5%	50mV	79.5%
GS18□07-P1J	7.5V, 0~2.00A	±5%	80mV	82.0%
GS18□09-P1J	9V, 0~2.00A	±5%	80mV	83.0%
GS18□12-P1J	12V, 0~1.50A	±3%	80mV	85.0%
GS18□15-P1J	15V, 0~1.20A	±3%	100mV	85.0%
GS18□18-P1J	18V, 0~1.00A	±3%	150mV	85.0%
GS18□24-P1J	24V, 0~0.75A	±2%	180mV	86.0%
GS18□28-P1J	28V, 0~0.64A	±2%	240mV	86.5%
GS18□48P1J	48V, 0~0.375A	±2%	240mV	87.0%

□ = U/E ; U: US type plug, E: European type plug

Wall-mounted—25W



Order No.	Output	Tol.	R&N	Effi.
GS25□05-P1J	5V, 0~4.00A	±5%	50mV	78.5%
GS25□07-P1J	7.5V, 0~2.93A	±5%	80mV	81.5%
GS25□09-P1J	9V, 0~2.77A	±5%	80mV	82.5%
GS25□12-P1J	12V, 0~2.08A	±3%	80mV	84.5%
GS25□15-P1J	15V, 0~1.66A	±3%	100mV	84.5%
GS25□18-P1J	18V, 0~1.38A	±3%	150mV	84.5%
GS25□24-P1J	24V, 0~1.04A	±2%	180mV	85.5%
GS25□28-P1J	28V, 0~0.89A	±2%	240mV	85.5%
GS25□48-P1J	48V, 0~0.52A	±2%	240mV	87.0%

□ = U/E ; U: US type plug, E: European type plug



■ Features

- Universal AC input / Full range
- No load power consumption <0.3W for GS40/60; <0.5W for GS90/120
- ErP step 2 compliant
- Meet EISA 2007 (Energy Independence and Security Act) for full series
- Built-in active PFC function, PF >0.91 (GS90) & PF>0.95 (GS120)
- 3 pole AC inlet IEC320-C14
- Class I power (with earth pin)
- Protections: Short circuit / Over voltage / Overload / Over temp. (except for GS40)
- Fully enclosed plastic case
- LED indicator for power on
- Pass LPS (except for GS120)
- 2 years warranty

■ General Specification (Please refer to www.meanwell.com for detail spec.)



(except for 48V)

Order No.		GS40	GS60	GS90	GS120
AC input voltage range		90~264VAC / 1.0A	90~264VAC / 1.4A	90~264VAC / 2.0A	85~264VAC / 2.0A
AC inrush current (max.)		Cold start, <65A peak at 230VAC		Cold start, <90A peak at 230VAC	
Overload protection	Range	105%~150% rated output power		110%~150%	105%~160%
	Type	Hiccup mode, auto-recovery			
Over voltage protection		105%~135% rated output voltage			
Setup, rise, hold up time		1000ms, 30ms, 50ms at 230VAC input		1000ms, 20ms, 20ms at 230VAC input	2000ms, 30ms, 20ms at 230VAC input
Withstand voltage		I/P-O/P:3kVAC, I/P-FG: 1.5kVAC			I/P-FG: 3kVAC
Working temperature		-30~+60℃	-30~+50℃		-30~+70℃
Safety standards		UL60950-1, EN60950-1, BSMI CNS14336, CCC GB4943, J60950-1(except for 48V) approved			
EMC standards		EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, CNS13438, GB9254, FCC part15 class B			
Length of output cable		100cm of UL2464, 16AWG for 5~9V; 100cm of UL1185, 16AWG for 12~15V; 180cm of UL1185, 18AWG for 18~48V		100cm of UL1185, 14AWG for 12~15V; 120cm of UL1185, 16AWG for 19~48V	120cm of UL2464, 18AWGx4C
Standard DC plug (refer to page 55 for DC plug list)		P1J: 2.1øx5.5øx11mm / C+, tuning fork type		P1M: 2.5øx5.5øx11mm / C+, tuning fork type	R7B: Power DIN 4P with lock type P1M: 2.5øx5.5øx11mm/C+, tuning fork type (20~48V only)

■ Desktop (IEC 320-C14 / Class I) — 40W

Order No.	Output	Tol.	R&N	Effi.
GS40A05-P1J	5V, 0~5.00A	±5%	100mV	80.5%
GS40A07-P1J	7.5V, 0~5.34A	±5%	100mV	85.5%
GS40A09-P1J	9V, 0~4.45A	±5%	100mV	85.0%
GS40A12-P1J	12V, 0~3.34A	±3%	100mV	89.0%
GS40A15-P1J	15V, 0~2.67A	±3%	100mV	89.5%
GS40A18-P1J	18V, 0~2.22A	±3%	150mV	90.0%
GS40A24-P1J	24V, 0~1.67A	±2.5%	180mV	91.0%
GS40A48-P1J	48V, 0~0.84A	±2.5%	240mV	92.0%

■ Desktop (IEC 320-C14 / Class I) — 90W

Order No.	Output	Tol.	R&N	Effi.
GS90A12-P1M	12V, 0~6.67A	±5%	80mV	88.0%
GS90A15-P1M	15V, 0~6.00A	±5%	100mV	89.0%
GS90A19-P1M	19V, 0~4.74A	±4%	150mV	89.0%
GS90A24-P1M	24V, 0~3.75A	±3%	180mV	89.5%
GS90A48-P1M	48V, 0~1.87A	±2%	240mV	91.0%

■ Desktop (IEC 320-C14 / Class I) — 60W

Order No.	Output	Tol.	R&N	Effi.
GS60A05-P1J	5V, 0~6.00A	±5%	100mV	81.0%
GS60A07-P1J	7.5V, 0~6.00A	±5%	100mV	85.5%
GS60A09-P1J	9V, 0~6.00A	±5%	100mV	87.5%
GS60A12-P1J	12V, 0~5.00A	±3%	100mV	88.0%
GS60A15-P1J	15V, 0~4.00A	±3%	100mV	88.5%
GS60A18-P1J	18V, 0~3.33A	±3%	150mV	88.5%
GS60A24-P1J	24V, 0~2.50A	±3%	180mV	90.0%
GS60A48-P1J	48V, 0~1.25A	±2.5%	240mV	92.0%

■ Desktop (IEC 320-C14 / Class I) — 120W

Order No.	Output	Tol.	R&N	Effi.
GS120A12-R7B	12V, 0~8.5A	±5%	80mV	87.5%
GS120A15-R7B	15V, 0~7.0A	±5%	120mV	89.0%
GS120A20-□	20V, 0~6.0A	±5%	150mV	89.0%
GS120A24-□	24V, 0~5.0A	±3%	180mV	90.0%
GS120A48-□	48V, 0~2.5A	±2%	240mV	91.0%
□= P1M, R7B				

160W Green Power Adaptor



- Universal AC input / Full range
- No load power consumption < 0.5W
- ErP step 2 compliant
- Meet EISA 2007(Energy Independence and Security Act)
- Built-in active PFC function, PF>0.95
- 3 pole AC inlet IEC320-C14
- Class I power (with earth pin)
- Protections: Short circuit / Overload
Over voltage / Over temp.
- Fully enclosed plastic case
- LED indicator for power on
- 2 years warranty

AC input voltage range 85~264VAC or 120~370VDC
 Overload protection 105%~135% rated output power, hiccup mode,
 auto-recovery
 Over voltage protection 105%~135% rated output voltage (typical)
 Hold up time 20ms at full load
 Withstand voltage I/P-O/P: 3kVAC, 1 minute
 Working temperature -30~+70°C (refer to output derating curve)
 Safety standards UL60950-1, TUV EN60950-1, BSMI CNS14336,
 CCC GB4943, J60950-1(except for 48V) approved
 EMC standards EN55022 class B, EN61000-3-2,3,
 EN61000-4-2,3,4,5,6,8,11, FCC part 15 class B,
 GB9254-1 classB, CNS13438 classB
 Length of output cable 120cm of UL2464, 18AWGx4C
 Standard DC plug Power DIN 4P with lock type (R7B)

Order No.	Output	Tol.	R&N	Effi.
GS160A12-R7B	12V, 0~11.5A	±5%	80mV	89.0%
GS160A15-R7B	15V, 0~9.6A	±5%	100mV	90.0%
GS160A20-R7B	20V, 0~8.0A	±4%	150mV	92.0%
GS160A24-R7B	24V, 0~6.67A	±3%	180mV	92.5%
GS160A48-R7B	48V, 0~3.34A	±3%	240mV	94.0%

220W Green Power Adaptor



- Universal AC input / Full range
- No load power consumption < 0.5W
- ErP step 2 compliant
- Meet EISA 2007(Energy Independence and Security Act)
- Built-in active PFC function, PF>0.91
- 3 pole AC inlet IEC320-C14
- Class I power (with earth pin)
- Protections: Short circuit / Overload
Over voltage / Over temp.
- Fully enclosed plastic case
- LED indicator for power on
- 2 years warranty

AC input voltage range 90~264VAC or 127~370VDC
 Overload protection 105%~135% rated output power, hiccup mode,
 auto-recovery
 Over voltage protection 105%~135% rated output voltage (typical)
 Hold up time 20ms at full load
 Withstand voltage I/P-O/P: 3kVAC, 1 minute
 Working temperature -30~+60°C (refer to output derating curve)
 Safety standards UL60950-1, TUV EN60950-1, BSMI CNS14336,
 CCC GB4943 approved
 EMC standards EN55022 class B, EN61000-3-2,3,
 EN61000-4-2,3,4,5,6,8,11,
 FCC part 15 class B, GB9254 class B,
 CNS13438 class B
 Length of output cable 100cm of UL2464, 16AWGx4C
 Standard DC plug Power DIN 4P with lock type (R7B)

Order No.	Output	Tol.	R&N	Effi.
GS220A12-R7B	12V, 0~15.0A	±5%	80mV	90.0%
GS220A15-R7B	15V, 0~13.4A	±5%	100mV	90.0%
GS220A20-R7B	20V, 0~11.0A	±4%	150mV	92.0%
GS220A24-R7B	24V, 0~9.20A	±3%	180mV	93.5%
GS220A48-R7B	48V, 0~4.60A	±2%	240mV	94.5%

5W Green USB Adaptor



- Universal AC input / Full range
- No load power consumption < 0.3W
- Meet EISA 2007(Energy Independence and Security Act)
- 2 pole US type plug
- Class II power (without earth pin)
- Protections: Short circuit / Overload
Over voltage / Over temp.
- Compact size
- 100% full load burn-in test
- Fully enclosed plastic case
- Low cost, high reliability
- 2 years warranty

AC input voltage range 90~264VAC or 127~370VDC
 Overload protection 105%~135% rated output power, hiccup mode,
 auto-recovery
 Over voltage protection 105%~140% rated output voltage (typical)
 Hold up time 15ms at full load
 Withstand voltage I/P-O/P: 4242VDC, 1 minute
 Working temperature -20~+50°C (refer to output derating curve)
 Safety standards UL60950-1, CSA22.2 approved
 EMC standards FCC part15
 Standard DC plug USB Type A

Order No.	Output	Tol.	R&N	Effi.
GS05U-USB	5V, 0~1A	±4%	60mV	70%

Compliance List of ErP & EISA 2007

Series	Regulation	ErP	EISA 2007
		Step 2	
GS05U-USB		-----	•
GS06		•	•
GS12		•	•
GE12		•	•
GS15		•	•
GS18		•	•
GE18		•	•
GE24		•	•
GS25		•	•
GS40		•	•
GS60		•	•
GS90		•	•
GS120		•	•
GS160		•	•
GS220		•	•



Best products also need best service.

We have authorized distributors all over the world. They have sufficient stock for your prompt delivery. Also they can offer you technical support & RMA services. Please contact your local distributors for more product information. You can also contact us at info@meanwell.com for information of your local distributors.

25W AC-DC Triple Output

- Universal AC input / Full range
- Protections: Short circuit / Overload / Over voltage / Over temp.
- Fully enclosed plastic case
- Fixed switching frequency and regulation
- Topology: Top switch circuit
- LED indicator for power on
- 1 year warranty



AC input voltage range 90~264VAC / 0.8A
 AC inrush current(max.) Cold start, <60A peak at 230VAC
 Overload protection Hiccup mode, auto-recovery
 Over voltage protection 110~140% of +5V output
 Setup, rise, hold up time ... 200ms, 50ms, 16ms at full load
 Withstand voltage I/P-O/P:3kVAC, I/P-FG:1.5kVAC, 1 minute
 Working temperature 0~+40°C (refer to output load derating curve)
 Safety standards UL1950, CSA 22.2, TUV EN60950-1 approved
 EMC standards EN55022 class B, EN61000-3-2,3, ENV50204, EN61000-4-2,3,4,5,6,11
 Standard output cable 150cm of UL2464
 Length of output cable R1B: DIN 5P

♦ 25W — Triple output (IEC 320-C14 / Class I)

Order No.	Output	Tol.	R&N	Effi.	Max.
P25A13D-R1B	5V, 0.5~2.5A	±5%	50mV	72%	25W
	12V, 0.1~0.8A	±5%	100mV		
	-12V, 0.1~0.3A	±3%	100mV		
P25A14E-R1B	5V, 0.5~2.5A	±5%	50mV	74%	25W
	15V, 0.1~0.5A	±5%	100mV		
	-15V, 0.1~0.3A	±3%	100mV		

♦ 25W — Triple output (IEC 320-C8 / Class II)

Order No.	Output	Tol.	R&N	Effi.	Max.
P25B13D-R1B	5V, 0.5~2.5A	±5%	50mV	72%	25W
	12V, 0.1~0.8A	±5%	100mV		
	-12V, 0.1~0.3A	±3%	100mV		
P25B14E-R1B	5V, 0.5~2.5A	±5%	50mV	74%	25W
	15V, 0.1~0.5A	±5%	100mV		
	-15V, 0.1~0.3A	±3%	100mV		



To Satisfy our customers is our goal —

- High Quality
- Low Cost
- Prompt Delivery
- Best Service



Best products also need best service.

We have authorized distributors all over the world. They have sufficient stock for your prompt delivery. Also they can offer you technical support & RMA services. Please contact your local distributors for more product information. You can also contact us at info@meanwell.com for information of your local distributors.

50W AC-DC Triple Output







- 3 pole AC inlet IEC320-C14
- Class I power (with earth pin)
- Protections: Short circuit / Overload / Over voltage
- Fully enclosed plastic case
- LED indicator for power on
- 1 year warranty

AC input voltage range 90~264VAC / 1.6A
 AC inrush current(max.) Cold start, <40A at 230VAC
 Overload protection Hiccup mode, auto-recovery
 Over voltage protection 110~140% for +5V output
 Hold up time 12ms at full load
 Withstand voltage I/P-O/P:3kVAC, I/P-FG:1.5kVAC, 1 minute
 Working temperature 0~+40°C (refer to output load derating curve)
 Safety standards UL1950, TUV EN60950-1 approved
 EMC standards EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,11, ENV50204
 Length of output cable 120cm of UL2464
 Standard DC plug..... R1B: DIN 5P

Pin Assignment	
PIN1: COM	
PIN2: COM	
PIN3: +5VDC	
PIN4: -Vout	
PIN5: +Vout	

Order No.	Output	Tol.	R&N	Effi.	Max.
P50A13D-R1B	5V, 0.5~4.0A	±6%	50mV	72%	50W
	12V, 0.5~2.0A	±10%	100mV		
	-12V, 0.1~0.5A	±12%	100mV		
P50A14E-R1B	5V, 0.5~4.0A	±6%	50mV	74%	50W
	15V, 0.5~1.5A	±10%	100mV		
	-15V, 0.1~0.5A	±12%	100mV		

Optional DC Plug List

Tuning Fork Style	Type	A	B	C
		OD	ID	L
	P1I	5.5	2.1	9.5
	P1J	5.5	2.1	11.0
	P1L	5.5	2.5	9.5
	P1M	5.5	2.5	11.0
Barrel Style	Type	A	B	C
		OD	ID	L
	P2I	5.5	2.1	9.5
	P2J	5.5	2.1	11.0
	P2L	5.5	2.5	9.5
	P2M	5.5	2.5	11.0
DIN 5 Pin	Type	Pin Assignment		
	R1B	Single		Triple
		1	COM	COM
		2	COM	COM
		3	Vout	+5V
		4	COM	-Vout
		5	Vout	+Vout
DIN 4 Pin with lock	Type	Pin Assignment		
	R7B	PIN No.		Output
		1	+Vout	
		2	GND	
		3	GND	
		4	+Vout	

► Minimum order quantity is varied for different models.



■ Features

- Universal AC input / Full range
- Full output 3~48V safety approved
- Protections: Short circuit / Over voltage / Overload / Over temp.
- Fully enclosed plastic case
- Fixed switching frequency and regulation
- Topology: Top switch circuit
- Low leakage current $\leq 0.3\text{mA}$
- LED indicator for power on
- Medical safety approved
- 2 years warranty

■ General Specification (Please refer to www.meanwell.com for detail spec.)



Order No.	MES30A	MES30C	MES50A	MES30B
AC input voltage range	90~264VAC / 0.8~0.4A			
AC inrush current (max.)	Cold start, <35A peak at 230VAC			
Overload protection	Hiccup mode, auto-recovery			
Over voltage protection	110%~140% rated output voltage		110%~150% rated output voltage	110%~140% rated output voltage
Setup, rise, hold up time	300ms, 50ms, 16ms at full load			
Withstand voltage	I/P-O/P:5656VDC, I/P-FG:2828VDC, 1 minute			I/P-O/P:5656VDC, 1 minute
Working temperature	0~+65°C (refer to output load derating curve)			
Safety standards	UL60601-1, TUV EN60601-1, IEC601-1 approved			
EMC standards	EN55011 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11 (EN60601-1-2)			
Standard output cable	180cm of UL1185,18AWG for 9~48V output ; 120cm of SPT-2,16AWG for 3~7.5V output			
Standard output plug	P1J: 2.1øx5.5øx11mm / C+, tuning fork type (refer to page 55 for DC plug list)			

■ Desktop (IEC 320-C14 / Class I)— 30W

Order No.	Output	Tol.	R&N	Effi.
MES30A-0P1J	3.3V, 0~5.00A	±8%	30mV	56%
MES30A-1P1J	5V, 0~5.00A	±5%	30mV	70%
MES30A-1-1P1J	7.5V, 0~3.33A	±4%	40mV	72%
MES30A-2P1J	9V, 0~3.33A	±4%	50mV	74%
MES30A-3P1J	12V, 0~2.50A	±3%	50mV	76%
MES30A-4P1J	15V, 0~2.00A	±2%	60mV	78%
MES30A-5P1J	18V, 0~1.66A	±2%	70mV	78%
MES30A-6P1J	24V, 0~1.25A	±2%	80mV	80%
MES30A-7P1J	28V, 0~1.07A	±2%	100mV	80%
MES30A-8P1J	48V, 0~0.62A	±2%	100mV	82%

■ Desktop (IEC 320-C6 / Class I)— 30W

Order No.	Output	Tol.	R&N	Effi.
MES30C-0P1J	3.3V, 0~5.00A	±8%	30mV	56%
MES30C-1P1J	5V, 0~5.00A	±5%	30mV	70%
MES30C-1-1P1J	7.5V, 0~3.33A	±4%	40mV	72%
MES30C-2P1J	9V, 0~3.33A	±4%	50mV	74%
MES30C-3P1J	12V, 0~2.50A	±3%	50mV	76%
MES30C-4P1J	15V, 0~2.00A	±2%	60mV	78%
MES30C-6P1J	24V, 0~1.25A	±2%	80mV	80%
MES30C-8P1J	48V, 0~0.62A	±2%	100mV	82%

■ Desktop (IEC 320-C8 / Class II)— 30W

Order No.	Output	Tol.	R&N	Effi.
MES30B-0P1J	3.3V, 0~5.00A	±8%	30mV	56%
MES30B-1P1J	5V, 0~5.00A	±5%	30mV	70%
MES30B-1-1P1J	7.5V, 0~3.33A	±4%	40mV	72%
MES30B-2P1J	9V, 0~3.33A	±4%	50mV	74%
MES30B-3P1J	12V, 0~2.50A	±3%	50mV	76%
MES30B-4P1J	15V, 0~2.00A	±2%	60mV	78%
MES30B-6P1J	24V, 0~1.25A	±2%	80mV	80%
MES30B-8P1J	48V, 0~0.62A	±2%	100mV	82%

■ Desktop (IEC 320-C14 / Class I)— 50W

Order No.	Output	Tol.	R&N	Effi.
MES50A-0R1B	3.3V, 0~7.50A	±10%	50mV	60%
MES50A-1R1B	5V, 0~7.50A	±6%	50mV	67%
MES50A-1-1R1B	7.5V, 0~5.33A	±5%	75mV	70%
MES50A-2P1J	9V, 0~5.00A	±5%	90mV	72%
MES50A-3P1J	12V, 0~4.16A	±3%	100mV	74%
MES50A-4P1J	15V, 0~3.33A	±3%	100mV	75%
MES50A-5P1J	18V, 0~2.77A	±3%	150mV	78%
MES50A-6P1J	24V, 0~2.08A	±2%	150mV	78%
MES50A-7P1J	28V, 0~1.78A	±2%	150mV	80%
MES50A-8P1J	48V, 0~1.04A	±2%	200mV	80%

35W, 50W, 75W Single Output

- Universal AC input / Full range
- Protections: Short circuit / Overload / Over voltage / Battery polarity (by fuse)
- Cooling by free air convection
- LED indicator for power on
- **No load power consumption <0.75W**
- Temperature compensation function (by external thermistor)
- 100% full load burn-in test
- 2 years warranty

UL CB CE



AC input voltage range 85~264VAC/ 120~370VDC
 AC inrush current Cold start, 45A
 DC adjustment range 95%~115% rated output voltage
 Overload protection 120%~165%, hiccup mode, auto-recovery
 Over voltage protection 120%~140%, rated output voltage
 Setup, rise, hold up time 500ms, 1200ms, 50ms at full load and 230VAC
 Withstand voltage I/P-O/P: 3kVAC, I/P-FG: 1.5kVAC, 1minute
 Working temperature -20~60°C (refer to output derating curve)
 Safety standards UL60950-1 approved
 EMC standards EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, ENV50204, EN55024, EN61000-6-1
 Connection I/P: 3 poles, O/P: 2 poles screw terminal
 Packing 0.37Kg ; 45pcs / 17.7Kg / 1CUFT (SCP-35)
 0.45Kg ; 30pcs / 14.5Kg / 0.95CUFT (SCP-50)
 0.5Kg ; 30pcs / 16.0Kg / 1CUFT (SCP-75)

SCP-35 Series

Model No.	Output	Tol.	R&N	Effi.	Max.
SCP-35-12	13.8V, 0~2.6A	±2%	120mV	83%	36W
SCP-35-24	27.6V, 0~1.4A	±1%	200mV	86%	39W

SCP-50 Series

Model No.	Output	Tol.	R&N	Effi.	Max.
SCP-50-12	13.8V, 0~3.6A	±2%	120mV	81%	50W
SCP-50-24	27.6V, 0~1.8A	±1%	200mV	85%	50W

SCP-75 Series

Model No.	Output	Tol.	R&N	Effi.	Max.
SCP-75-12	13.8V, 0~5.4A	±2%	120mV	81%	75W
SCP-75-24	27.6V, 0~2.7A	±1%	200mV	85%	75W

60W Single Output with Battery Charger (UPS Function)

UL CB CE



- Universal AC input / Full range
- 4"x 2" compact size
- Protections: Short circuit / Overload / Over voltage
- Battery low protection / Battery reverse polarity protection by fuse
- Alarm signal for AC OK and Battery low
- Cooling by free air convection
- 100% full load burn-in test
- **Case available(PSC-60x-C)**
- 2 years warranty

AC input voltage range 90~264VAC; 127~370VDC
 AC inrush current Cold start, 30A at 115VAC, 60A at 230VAC
 DC adjustment range CH1, 13.8V: 12~15V; 27.6V: 24~29V
 Overload protection 105%~150% hiccup mode, auto-recovery
 Over voltage protection CH1: 105%~135% rated output voltage
 Withstand voltage I/P-O/P: 3kVAC, I/P-FG: 1.5kVAC, 1minute
 Working temperature -20~+70°C (refer to output derating curve)
 Safety standards UL60950-1, TUV EN60950-1 approved
 EMC standards EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, ENV50204
 Connection 3+6P/ 3.96mm pitch, JST: B3P/B6P-VH
 Packing 0.13kg ; 96pcs / 13.5kg / 0.89CUFT (PCB)
 0.29kg ; 45pcs / 14.0kg / 0.67CUFT (case)

Model No.	Output	Tol.	R&N	Effi.	Max.
PSC-60A□	13.8V, 0~4.3A	±1%	120mV	84%	59W
	13.8V, 0~1.50A	(Charger)			
PSC-60B□	27.6V, 0~2.15A	±1%	240mV	84%	59W
	27.6V, 0~0.75A	(Charger)			

□ = blank, -C ; Blank: PCB Type, -C: Enclosed Type

100W Single Output with Battery Charger (UPS Function)

UL CB CE



- Universal AC input / Full range
- 5"x3" compact size
- Protections: Short circuit / Overload / Over voltage
- Battery low protection / Battery reverse polarity protection by fuse
- Relay contact signal for AC OK and battery low
- Cooling by free air convection
- 100% full load burn-in test
- **Case available(PSC-100x-C)**
- 2 years warranty

AC input voltage range 90~264VAC; 127~370VDC
 AC inrush current Cold start, 35A at 115VAC, 70A at 230VAC
 DC adjustment range CH1, 13.8V: 12~15V; 27.6V: 24~29V
 Overload protection 105%~150% hiccup mode, auto-recovery
 Over voltage protection CH1: 105%~135% rated output voltage
 Withstand voltage I/P-O/P: 3kVAC, I/P-FG: 1.5kVAC, 1minute
 Working temperature -20~+70°C (refer to output derating curve)
 Safety standards UL60950-1, TUV EN60950-1 approved
 EMC standards EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, ENV50204
 Connection 3+8P/ 3.96mm pitch, 4P/2.5mm pitch, JST: B3P/B8P-VH, B4B-XH
 Packing 0.23kg ; 63pcs / 15.5kg / 1.35CUFT (PCB)
 0.44kg ; 32pcs / 15.0kg / 0.64CUFT (case)

Model No.	Output	Tol.	R&N	Effi.	Max.
PSC-100A□	13.8V, 0~7.0A	±1%	100mV	86%	100W
	13.8V, 0~2.5A	(Charger)			
PSC-100B□	27.6V, 0~3.50A	±1%	100mV	88%	101W
	27.6V, 0~1.25A	(Charger)			

□ = blank, -C ; Blank: PCB Type, -C: Enclosed Type




We provide specification, drawing, test report and more information, please visit our website —
<http://www.meanwell.com>



Best products also need best service.

We have authorized distributors all over the world. They have sufficient stock for your prompt delivery. Also they can offer you technical support & RMA services. Please contact your local distributors for more product information. You can also contact us at info@meanwell.com for information of your local distributors.

55W 1~2 Output with Battery Charger



CASE: 901 159x 97x 38 mm

- Universal AC input / Full range
- Protections: Short circuit / Overload / Over voltage
- Battery low protection (except for ADS series)
- DC alarm signal (optional)
- Cooling by free air convection
- Fixed switching frequency at 45kHz
- Approvals: UL / CUL / TUV / CB / CE
- 100% full load burn-in test
- 2 years warranty

AC input voltage range 88~264VAC; 124~370VDC
 AC inrush current Cold start, 20A at 115VAC, 40A at 230VAC
 DC adjustment range 12V, 24V: $\pm 10\%$
 13.8V: 12~14.5V; 27.6V: 24~29V
 Overload protection 105%~150% hiccup mode, auto-recovery
 Over voltage protection CH1: 105%~135% rated output voltage
 Setup, rise, hold up time 800ms, 50ms, 80ms at full load and 230VAC
 Withstand voltage I/P-O/P: 3kVAC, I/P-FG: 1.5kVAC, 1minute
 Working temperature -10~60°C (refer to output derating curve)
 Safety standards UL60950-1, TUV EN60950-1 approved
 EMC standards EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, ENV50204
 Connection 8P/ 8.25mm pitch terminal block
 Packing 0.57kg ; 24pcs / 13.7kg / 0.75CUFT

Single Output with 5V, 4A DC-DC Converter

Model No.	Output	Tol.	R&N	Effi.	Max.
ADS-5512	12V, 0~4.0A	$\pm 1\%$	100mV	76%	51W
	5V, 0~4.0A	$\pm 3\%$	100mV		
ADS-5524	24V, 0~2.5A	$\pm 1\%$	100mV	79%	58W
	5V, 0~4.0A	$\pm 3\%$	100mV		


Single Output with Battery Charger (UPS Function)

Model No.	Output	Tol.	R&N	Effi.	Max.
AD-55A	13.8V, 0~4.0A	$\pm 1\%$	100mV	71%	51W
	13.4V, 0~0.23A	(Charger)			
AD-55B	27.6V, 0~2.0A	$\pm 1\%$	100mV	74%	54W
	26.5V, 0~0.16A	(Charger)			

Dual Output with Battery Charger (UPS Function)

Model No.	Output	Tol.	R&N	Effi.	Max.
ADD-55A	13.8V, 0~3.50A	$\pm 1\%$	100mV	71%	53W
	5V, 0~4.00A	$\pm 3\%$	100mV		
	13.4V, 0~0.23A	(Charger)			
ADD-55B	27.6V, 0~2.00A	$\pm 1\%$	150mV	74%	55W
	5V, 0~4.00A	$\pm 3\%$	150mV		
	26.5V, 0~0.16A	(Charger)			

Block Diagram

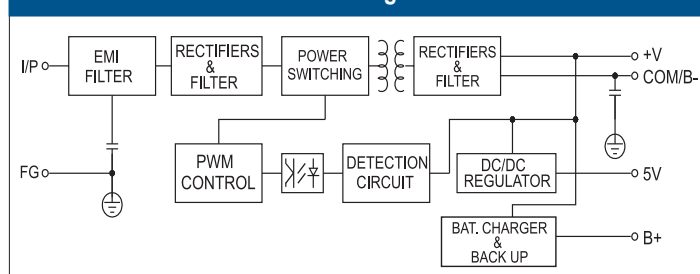

155W 1~2 Output with Battery Charger and PFC Function



CASE: 906B 199x 110x 50 mm

- Universal AC input / Full range
- PF>0.92@230VAC and full load
- Protections: Short circuit / Overload / Over voltage
- Battery low protection (except for ADS series)
- Cooling by free air convection
- Fixed switching frequency at 134kHz
- Approvals: UL / CUL / TUV / CB / CE
- 100% full load burn-in test
- 2 years warranty

AC input voltage range 88~264VAC; 124~370VDC
 AC inrush current Cold start, 20A at 115VAC, 40A at 230VAC
 DC adjustment range 12V, 24V, 48V: $\pm 10\%$
 13.8V: 12~14.5V; 27.6V: 24~29V; 54V: 48~58V
 Overload protection CH1,2: 105%~135%, charger: 0.51~0.9A; constant current limiting, auto-recovery
 Over voltage protection CH1: 115%~135% rated output voltage
 Setup, rise, hold up time 1000ms, 90ms, 24ms at full load and 230VAC
 Withstand voltage I/P-O/P: 3kVAC, I/P-FG: 1.5kVAC, 1minute
 Working temperature With fan: -10~50°C@100%, 60°C@80% load
 Without fan: -10~50°C@70%, 60°C@50% load
 Safety standards UL60950-1, TUV EN60950-1 approved
 EMC standards EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, ENV50204
 Connection 8P/ 9.5mm pitch terminal block
 Packing 1.0kg ; 16pcs / 16.0kg / 0.95CUFT

Single Output with 5V, 3A DC-DC Converter

Model No.	Output	Tol.	R&N	Effi.	Max.
ADS-15512	12V, 0~12.5A	$\pm 2\%$	150mV	77%	153W
	5V, 0~3.00A	$\pm 3\%$	100mV		
ADS-15524	24V, 0~6.50A	$\pm 1\%$	150mV	82%	154W
	5V, 0~3.00A	$\pm 3\%$	100mV		
ADS-15548	48V, 0~3.20A	$\pm 1\%$	240mV	82%	154W
	5V, 0~3.00A	$\pm 5\%$	100mV		

Single Output with Battery Charger (UPS Function)

Model No.	Output	Tol.	R&N	Effi.	Max.
AD-155A	13.8V, 0~11.5A	$\pm 2\%$	150mV	80%	152W
	13.3V, 0~0.50A	(Charger)			
AD-155B	27.6V, 0~5.50A	$\pm 1\%$	150mV	84%	152W
	27.1V, 0~0.50A	(Charger)			
AD-155C	54.0V, 0~2.70A	$\pm 1\%$	240mV	84%	157W
	53.5V, 0~0.50A	(Charger)			

Dual Output with Battery Charger (UPS Function)

Model No.	Output	Tol.	R&N	Effi.	Max.
ADD-155A	13.8V, 0~10.5A	$\pm 1\%$	150mV	78%	153W
	5V, 0~3.00A	$\pm 3\%$	100mV		
	13.3V, 0~0.50A	(Charger)			
ADD-155B	27.6V, 0~5.00A	$\pm 1\%$	200mV	81%	153W
	5V, 0~3.00A	$\pm 3\%$	100mV		
	27.1V, 0~0.50A	(Charger)			
ADD-155C	54.0V, 0~2.50A	$\pm 1\%$	240mV	81%	150W
	5V, 0~3.00A	$\pm 5\%$	100mV		
	53.5V, 0~0.20A	(Charger)			

104W AC-DC Triple Output for Video Game



- AC input range selectable by switch
- Protections: Short circuit / Overload
- 2 color LED display for 602A, 606A
- Cooling by free air convection
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

AC input voltage range 88~132VAC/ 176~264VAC selectable by switch
 DC adjustment range CH1: -5%~+10% rated output voltage
 Overload protection 105%~135% shut off, AC recycle to re-start
 Setup, rise, hold up time 200ms, 50ms, 16ms at full load and 230VAC
 Withstand voltage I/P-O/P: 1.5kVAC, I/P-FG:1.5kVAC, 1minute
 Working temperature 0~40°C@100%, -10°C@80%, 60°C@60% load
 Safety standards UL60950-1, TUV EN60950-1 for MWP-606
 TUV EN60950-1 for MWP-608
 EMC standards EN55022 class B, EN61000-4-2,3,4
 EN60555-2,3 for MWP-606/608 series
 Packing 0.9kg ; 16pcs / 15.4kg / 0.95CUFT

♦ MWP-602 Series

Model No.	Output	Tol.	R&N	Effi.	Max.
MWP-602	5V, 3.0~15A	±2%	50mV	75%	104W
	12V, 0.2~3.0A	±8%	120mV		
	-5V, 0.1~1.0A	±10%	60mV		
MWP-602A	5V, 3.0~15A	±2%	50mV	75%	104W
	12V, 0.2~3.0A	±8%	120mV		
	-5V, 0.1~1.0A	±10%	60mV		

♦ MWP-606 Series

Model No.	Output	Tol.	R&N	Effi.	Max.
MWP-606	5V, 3.0~15A	±2%	50mV	75%	104W
	12V, 0.2~4.0A	±8%	120mV		
	-5V, 0.1~1.0A	±10%	60mV		
MWP-606A	5V, 3.0~15A	±2%	50mV	75%	104W
	12V, 0.2~4.0A	±8%	120mV		
	-5V, 0.1~1.0A	±10%	60mV		

♦ MWP-608 Series

Model No.	Output	Tol.	R&N	Effi.	Max.
MWP-608	5V, 3.0~15A	±2%	50mV	80%	104W
	12V, 0.2~4.0A	±8%	120mV		
	24V, 0.2~4.0A	-5%, +10%	150mV		

304W AC-DC Triple Output for Video Game

CE (MWP-610P only)



- AC input range selectable by switch for MWP-610
- 230VAC input only for MWP-610P
- Built-in passive PFC for MWP-610P, PF>0.7
- Power ON/OFF switch
- Forced air cooling by built-in DC fan
- Protections: Short circuit / Overload / Over voltage / Over temp.
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

AC input voltage range 200~264VAC for MWP-610P;
 100~132VAC/200~264VAC selectable by switch for MWP-610
 DC adjustment range ±5% rated output voltage
 Overload protection 105%~200% shut off, AC recycle to re-start
 Over voltage protection 105%~140% rated output voltage
 Hold up time 12ms at full load
 Withstand voltage I/P-O/P: 1.5kVAC, I/P-FG:1.5kVAC, 1minute
 Working temperature -10~50°C(refer to output derating curve)
 EMC standards EN55022 class B, EN61000-3-2,3,
 EN61000-4-2,3,4,5,6,8,11 for MWP-610P

Model No.	Output(10min.) / (Continuous)	Tol.	R&N	Effi.	Max.
MWP-610□	5V, 1.5~8A / 5V, 1.5~8A	±5%	80mV	76%	244W (cont.)
	12V, 1~12A / 12V, 1~8A	±5%	150mV		
	24V, 0.5~5A / 35V, 0.5~4.5A	±5%	200mV		304W (10 mins.)

□ = P: 230VAC only and with passive PFC function
 Blank: 115V/ 230V selectable by switch and without PFC function

100W AC-DC ATX Power

CE CBCE



- Universal AC input / Full range
- No load power consumption < 1W @240VAC
- 3 pole AC inlet IEC320-C14
- Built-in active PFC function, PF>0.95
- Class I power (with earth pin)
- Protections: Short circuit / Overload / Over voltage / Over temp.
- Power on LED indicator
- Fully enclosed plastic case
- 2 years warranty

Setup, rise, hold up time3000ms, 80ms, 40ms at full load and 230VAC
 Overload protection140%~200% load, shut off
 Over voltage protection 110%~130% rated output voltage (CH1,2,3)
 Withstand voltage I/P-O/P:3kVAC
 Working temperature 0~+40°C@100%, 50°C@80% load
 Safety standards IEC60950-1 CB approved by TUV
 EMC standards EN55022 class B, EN61000-3-2,3, EN61204-3,
 EN61000-4-2,3,4,5,6,8,11, ENV50204
 Length of output cable65cm of UL rated, 18AWGx20C
 Standard DC plug Molex 39-01-2200 or equivalent

Order No.	Output	Tol.	R&N	Effi.	Max.
ATX-100	3.3V, 0~6.0A	±5%	100mV	80%	100W (cont.)
	5V, 0~8.0A	±5%	100mV		
	12V, 1~7.0A	±5%	120mV		125W (7 min.)
	-12V, 0~0.5A	±10%	120mV		150W (3 min.)
	5VSB, 0~2.0A	±5%	100mV		



Who can provide you better services and be a trustworthy partner in the power industry?

— "MEAN WELL" tries to be —



We provide specification, drawing, test report and more information, please visit our website —

<http://www.meanwell.com>



Best products also need best service.

We have authorized distributors all over the world. They have sufficient stock for your prompt delivery. Also they can offer you technical support & RMA services. Please contact your local distributors for more product information. You can also contact us at info@meanwell.com for information of your local distributors.

200~300W Industrial ATX PC Power Supply



- 240x 83x 40 mm (200 / 250W)
- 260x 83x 40 mm (300W)

- Universal AC input / Full range
- Low profile for 1U/2U rack system
- Built-in active PFC function, PF>0.94
- Protections: Short circuit / Overload / Over voltage
- With power good and fail signal output
- Forced air cooling by built-in DC fan
- Remote sense on CH1, CH2
- PS-ON signal input
- 24V/3A output with 7A peak capability (IPC-300B)
- 2 years warranty

Hold up time 16ms min. at full load and 115Vac
 Overload protection 105%~150% shut off, AC recycle to re-start
 Over voltage protection 110%~140% rated output voltage for CH1~CH3
 Withstand voltage I/P-O/P, I/P-FG:1.5kVAC, 1minute
 Working temperature -10~60°C (refer to output derating curve)
 Safety standards UL60950-1, TUV EN60950-1 approved
 EMC standards EN55022 class B, EN61000-3-2,-3
 EN61000-4-2,3,4,5,6,8,11

Model No.	Output	Tol.	R&N	Effi.	Max.
IPC-200	3.3V, 0~15A	±5%	50mV	75%	200W
	5V, 1~25A	±5%	50mV		
	12V, 1~13A	±7%	120mV		
	-5V, 0~0.5A	±8%	100mV		
	-12V, 0.1~1.0A	±10%	120mV		
IPC-250	5VSB, 0~2.0A	±5%	50mV		
	3.3V, 0~20A	±5%	50mV	75%	250W
	5V, 1~25A	±5%	50mV		
	12V, 1~15A	±7%	120mV		
	-5V, 0~0.5A	±8%	100mV		
IPC-300A	-12V, 0.1~1.0A	±10%	120mV		
	5VSB, 0~2.0A	±5%	50mV		
	3.3V, 0~20A	±5%	50mV	75%	300W
	5V, 1~30A	±5%	50mV		
	12V, 1~18A	±7%	120mV		
IPC-300B	-5V, 0~0.5A	±8%	100mV		
	-12V, 0.1~1.0A	±10%	120mV		
	5VSB, 0~2.0A	±5%	50mV		
	24V, 0~3.0A	±5%	240mV	80%	300W
	5V, 1~30A	±5%	50mV		
	12V, 1~18A	±7%	120mV		
	-5V, 0~0.5A	±8%	100mV		
	-12V, 0.1~1.0A	±10%	120mV		
	5VSB, 0~2.0A	±5%	50mV		

250~350W ATX PC Power Supply

- Universal AC input for YP-350J
- AC input 230VAC only for YP-350A/400A/450A-EU
- AC input range selectable by switch for YP-350A/ 400A / 450A-AA
- Built-in passive PFC for YP-350A/400A/450A-EU
- Built-in active PFC function, PF>0.95 for YP-350J
- Built-in passive PFC function, PF>0.65 for YP-350A/400A/450A-EU
- Protections: Short circuit / Overload

- Power good / fail signal
- Forced air cooling by built-in DC fan
- 100% full load burn-in test
- Low cost, high reliability
- Approvals: YP-350A / 400A / 450A-AA: FCC YP-350A / 400A / 450A-EU: TUV / CB / CE
- 2 years warranty for YP-350J
- 1 year warranty for YP-350A/400A/450A



171x 150x 86 mm



150x 140x 86 mm

Hold up time 8ms min. at full load (YP-350A / 400A / 450A), 10ms min. at full load (YP-350J)
 Overload protection 105%~180% shut off, AC recycle to re-start
 Withstand voltage I/P-O/P, I/P-FG:1.5kVAC, 1minute
 Working temperature -10~40°C at full load and 230VAC (typical)
 Safety standards UL60950-1(YP-350J only), EN60950-1 approved

※ 103~132VAC / 206~264VAC selectable or 206~264VAC only

Model No.	Output	Tol.	R&N	Effi.	Max.
YP-350A-□	3.3V, 2.0~17A	±5%	50mV	70%	250W
	5V, 2.0~18A	±5%	50mV		
	12V ₁ , 1.0~8.0A	±5%	120mV		
	12V ₂ , 1.0~14A	±5%	120mV		
	-5V, 0.1~0.3A	±10%	50mV		
YP-400A-□	-12V, 0.1~0.8A	±10%	120mV		
	5VSB, 0~2.0A	±5%	50mV		
	3.3V, 2.0~20A	±5%	50mV	70%	300W
	5V, 2.0~20A	±5%	50mV		
	12V ₁ , 1.0~8.0A	±5%	120mV		
YP-450A-□	12V ₂ , 1.0~14A	±5%	120mV		
	-5V, 0.1~0.3A	±10%	50mV		
	-12V, 0.1~0.8A	±10%	120mV		
	5VSB, 0~2.0A	±5%	50mV		
	3.3V, 2.0~22A	±5%	50mV	70%	350W
	5V, 2.0~21A	±5%	50mV		
	12V ₁ , 1.0~10A	±5%	120mV		
	12V ₂ , 1.0~15A	±5%	120mV		
	-5V, 0.1~0.3A	±10%	50mV		
	-12V, 0.1~0.8A	±10%	120mV		
	5VSB, 0~2.0A	±5%	50mV		

□=AA (115/230VAC selectable and without PFC function), EU (230VAC only and with passive PFC function)

※ 24V Output and Active PFC>0.95 (100~264VAC Input)

Model No.	Output	Tol.	R&N	Effi.	Max.
YP-350J-AA	3.3V, 0.3~14A	±5%	50mV	70%	350W
	5V, 0.1~21A	±5%	50mV		
	12V, 0~15A	-2%, +8%	120mV		
	24V, 0~5.0A	-2%, +8%	150mV		
	-5V, 0~0.3A	±5%	100mV		
	-12V, 0~0.8A	±10%	120mV		
	5VSB, 0~2.0A	±5%	50mV		



Customer Satisfaction —

Today's effort, tomorrow's reward. Continuously improve CQTS to satisfy customer is our goal.



48hrs delivery—

We keep enough stock for 95% of standard models at our 2400m² warehouse. We can arrange prompt delivery within 48hrs.

0.5W DC-DC Regulated Single Output



0.89"x 0.39"x 0.33"

- 1000VDC I/O isolation
- Internal SMD technology
- Built-in EMI filter
- Protection: Short circuit
- Cooling by free air convection
- Non-conductive plastic case
- Dual in line package
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

Mechanism	Pin Configuration										
	<table border="1"> <thead> <tr> <th>Pin No.</th><th>Output</th></tr> </thead> <tbody> <tr> <td>1 & 16</td><td>+Vin</td></tr> <tr> <td>6 & 11</td><td>-Vout</td></tr> <tr> <td>7 & 10</td><td>+Vout</td></tr> <tr> <td>8 & 9</td><td>-Vin</td></tr> </tbody> </table>	Pin No.	Output	1 & 16	+Vin	6 & 11	-Vout	7 & 10	+Vout	8 & 9	-Vin
Pin No.	Output										
1 & 16	+Vin										
6 & 11	-Vout										
7 & 10	+Vout										
8 & 9	-Vin										

Voltage set point accuracy... $\pm 2\%$ (typical)
 Line regulation $\pm 1\%$ (max.)
 Load regulation $\pm 1\%$ (max.)@10~100% load
 Input reflected ripple 120mVp-p
 Efficiency 60% (typical)
 Short circuit protection continuous, auto-recovery
 Switching frequency 50kHz (min.)
 I/O isolation voltage 1000VDC (min.)
 I/O isolation resistance 100M Ω (min.)@ 500VDC
 Isolation capacitance 80pF (max.)
 Working temperature -25°C to +60°C (no derating), +71°C@80% load
 Storage temperature -25°C to +105°C
 Temp. Coefficient $\pm 0.03\%$ / °C (max.)
 Case material non-conductive plastic

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
SRS-0505	5 $\pm 10\%$	5	100	100
SRS-0509	5 $\pm 10\%$	9	56	100
SRS-0512	5 $\pm 10\%$	12	42	100
SRS-0515	5 $\pm 10\%$	15	34	100
SRS-1205	12 $\pm 10\%$	5	100	100
SRS-1209	12 $\pm 10\%$	9	56	100
SRS-1212	12 $\pm 10\%$	12	42	100
SRS-1215	12 $\pm 10\%$	15	34	100
SRS-2405	24 $\pm 10\%$	5	100	100
SRS-2409	24 $\pm 10\%$	9	56	100
SRS-2412	24 $\pm 10\%$	12	42	100
SRS-2415	24 $\pm 10\%$	15	34	100
SRS-4805	48 $\pm 10\%$	5	100	100
SRS-4809	48 $\pm 10\%$	9	56	100
SRS-4812	48 $\pm 10\%$	12	42	100
SRS-4815	48 $\pm 10\%$	15	34	100

1W DC-DC Unregulated Single Output



0.89"x 0.39"x 0.33"

- 1000VDC I/O isolation
- Internal SMD technology
- Built-in EMI filter
- Protection: Short circuit
- Cooling by free air convection
- Non-conductive plastic case
- Dual in line package
- SIP package is available
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

Mechanism	Pin Configuration										
	<table border="1"> <thead> <tr> <th>Pin No.</th><th>Output</th></tr> </thead> <tbody> <tr> <td>1 & 16</td><td>+Vin</td></tr> <tr> <td>6 & 11</td><td>-Vout</td></tr> <tr> <td>7 & 10</td><td>+Vout</td></tr> <tr> <td>8 & 9</td><td>-Vin</td></tr> </tbody> </table>	Pin No.	Output	1 & 16	+Vin	6 & 11	-Vout	7 & 10	+Vout	8 & 9	-Vin
Pin No.	Output										
1 & 16	+Vin										
6 & 11	-Vout										
7 & 10	+Vout										
8 & 9	-Vin										

Voltage set point accuracy ... $\pm 2\%$ (max.)
 Line regulation $\pm 1.2\%$ (max.) for 1% input variation
 Load regulation $\pm 8\%$ (max.)@20~100% load
 Input reflected ripple 120mVp-p
 Efficiency 83% (typical)
 Short circuit protection Momentary
 Switching frequency 50kHz (min.)
 I/O isolation voltage 1000VDC (min.)
 I/O isolation resistance 100M Ω (min.)@ 500VDC
 Isolation capacitance 80pF (max.)
 Working temperature -25°C to +60°C (no derating), +71°C@80% load
 Storage temperature -25°C to +105°C
 Temp. Coefficient $\pm 0.03\%$ / °C (max.)
 Case material non-conductive plastic

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
SUS01L-05	5 $\pm 10\%$	5	200	100
SUS01L-09	5 $\pm 10\%$	9	111	100
SUS01L-12	5 $\pm 10\%$	12	84	100
SUS01L-15	5 $\pm 10\%$	15	67	100
SUS01M-05	12 $\pm 10\%$	5	200	100
SUS01M-09	12 $\pm 10\%$	9	111	100
SUS01M-12	12 $\pm 10\%$	12	84	100
SUS01M-15	12 $\pm 10\%$	15	67	100
SUS01N-05	24 $\pm 10\%$	5	200	100
SUS01N-09	24 $\pm 10\%$	9	111	100
SUS01N-12	24 $\pm 10\%$	12	84	100
SUS01N-15	24 $\pm 10\%$	15	67	100
SUS01O-05	48 $\pm 10\%$	5	200	100
SUS01O-09	48 $\pm 10\%$	9	111	100
SUS01O-12	48 $\pm 10\%$	12	84	100
SUS01O-15	48 $\pm 10\%$	15	67	100

1W DC-DC Unregulated Single Output



0.50"x 0.30"x 0.24"

- 1000VDC I/O isolation
- Internal SMD technology
- Protection: Short circuit
- Cooling by free air convection
- Non-conductive plastic case
- SMD package style
- 100% full load burn-in test
- Low cost, high reliability
- 1 year warranty

Mechanism	Pin Configuration																		
	<table border="1"> <thead> <tr> <th>Pin No.</th><th>Output</th></tr> </thead> <tbody> <tr><td>1</td><td>-Vin</td></tr> <tr><td>2</td><td>+Vin</td></tr> <tr><td>3</td><td>NC</td></tr> <tr><td>4</td><td>-Vout</td></tr> <tr><td>5</td><td>+Vout</td></tr> <tr><td>6</td><td>NC</td></tr> <tr><td>7</td><td>NC</td></tr> <tr><td>8</td><td>NC</td></tr> </tbody> </table>	Pin No.	Output	1	-Vin	2	+Vin	3	NC	4	-Vout	5	+Vout	6	NC	7	NC	8	NC
Pin No.	Output																		
1	-Vin																		
2	+Vin																		
3	NC																		
4	-Vout																		
5	+Vout																		
6	NC																		
7	NC																		
8	NC																		

Voltage set point accuracy $\pm 8\%$ (max.)
 Line regulation $\pm 1.2\%$ (max.) for 1% input variation
 Load regulation $\pm 8\%$ (max.)@20~100% load
 Input reflected ripple 100mVp-p
 Efficiency 75% (typical)
 Short circuit protection Momentary
 Switching frequency 100kHz (typical)
 I/O isolation voltage 1000VDC (min.)
 I/O isolation resistance 100M Ω (min.)@ 500VDC
 Working temperature -40°C to +85°C
 Storage temperature -40°C to +105°C
 Temp. Coefficient $\pm 0.03\%$ / °C (max.)
 Case material non-conductive plastic
 Safety standards UL60950-1 approved

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
SBT01L-05	5 $\pm 10\%$	5	200	100
SBT01L-09	5 $\pm 10\%$	9	111	100
SBT01L-12	5 $\pm 10\%$	12	84	100
SBT01L-15	5 $\pm 10\%$	15	67	100
SBT01M-05	12 $\pm 10\%$	5	200	100
SBT01M-09	12 $\pm 10\%$	9	111	100
SBT01M-12	12 $\pm 10\%$	12	84	100
SBT01M-15	12 $\pm 10\%$	15	67	100

1W DC-DC Unregulated Single and Dual Output



0.60"x 0.30"x 0.24"

- 3000VDC I/O isolation
- Internal SMD technology
- Protection: Short circuit
- Cooling by free air convection
- Non-conductive plastic case
- SMD package style
- 100% full load burn-in test
- Low cost, high reliability
- 1 year warranty

Mechanism	Pin Configuration
Unit: mm(inch)	

Voltage set point accuracy $\pm 8\%$ (max.)
 Line regulation $\pm 1.2\%$ (max.) for 1% input variation
 Load regulation $\pm 8\%$ (max.)@20~100% load
 Efficiency 79% (typical)
 Short circuit protection Momentary
 Switching frequency 100kHz (typical)
 I/O isolation voltage 3000VDC (min.)
 I/O isolation resistance 100M Ω (min.)@ 500VDC
 Working temperature -40°C to +85°C
 Storage temperature -40°C to +105°C
 Temp. Coefficient $\pm 0.03\%$ / °C (max.)
 Case material non-conductive plastic
 Safety standards UL60950-1, CSA C22.2 approved

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
SFT01L-05	5 $\pm 10\%$	5	200	100
SFT01L-09	5 $\pm 10\%$	9	111	100
SFT01L-12	5 $\pm 10\%$	12	84	100
SFT01L-15	5 $\pm 10\%$	15	67	100
SFT01M-05	12 $\pm 10\%$	5	200	100
SFT01M-09	12 $\pm 10\%$	9	111	100
SFT01M-12	12 $\pm 10\%$	12	84	100
SFT01M-15	12 $\pm 10\%$	15	67	100

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
DET01L-05	5 $\pm 10\%$	± 5	± 100	100
DET01L-09	5 $\pm 10\%$	± 9	± 56	100
DET01L-12	5 $\pm 10\%$	± 12	± 42	100
DET01L-15	5 $\pm 10\%$	± 15	± 33	100
DET01M-05	12 $\pm 10\%$	± 5	± 100	100
DET01M-09	12 $\pm 10\%$	± 9	± 56	100
DET01M-12	12 $\pm 10\%$	± 12	± 42	100
DET01M-15	12 $\pm 10\%$	± 15	± 33	100



To Satisfy our customers is our goal —

- High Quality
- Low Cost
- Prompt Delivery
- Best Service



Best products also need best service.

We have authorized distributors all over the world. They have sufficient stock for your prompt delivery. Also they can offer you technical support & RMA services. Please contact your local distributors for more product information. You can also contact us at info@meanwell.com for information of your local distributors.

1W DC-DC Regulated Single Output



0.77"x 0.28"x 0.4"

- 1000VDC I/O isolation
- Internal SMD technology
- Built-in EMI filter
- Protection: Short circuit
- Cooling by free air convection
- Non-conductive plastic case
- Single in line package
- DIP package is available
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

Mechanism	Pin Configuration										
Unit: mm(inch) FRONT VIEW BOTTOM VIEW	<table border="1"> <thead> <tr> <th>Pin No.</th><th>Output</th></tr> </thead> <tbody> <tr> <td>1</td><td>+Vout</td></tr> <tr> <td>2</td><td>-Vin</td></tr> <tr> <td>4</td><td>-Vout</td></tr> <tr> <td>6</td><td>+Vout</td></tr> </tbody> </table>	Pin No.	Output	1	+Vout	2	-Vin	4	-Vout	6	+Vout
Pin No.	Output										
1	+Vout										
2	-Vin										
4	-Vout										
6	+Vout										

Voltage set point accuracy ... $\pm 2\%$ (typical)

Line regulation $\pm 0.5\%$ (max.)

Load regulation $\pm 0.5\%$ (max.)@10~100% load

Efficiency 80% (typical)

Short circuit protection Continuous, auto-recovery

Switching frequency 100kHz (min.)

I/O isolation voltage 1000VDC (min.)

I/O isolation resistance 100M Ω (min.)

Isolation capacitance 80pF (max.)

Working temperature -25°C to +60°C (no derating), +71°C@80% load

Storage temperature -25°C to +105°C


Temp. Coefficient $\pm 0.03\%$ / °C (max.)

Case material non-conductive plastic

EMI Compliance to EN55022 Class B, FCC part15 Class B

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
SPR01L-05	5 $\pm 10\%$	5	200	100
SPR01L-09	5 $\pm 10\%$	9	100	100
SPR01L-12	5 $\pm 10\%$	12	84	100
SPR01L-15	5 $\pm 10\%$	15	67	100
SPR01M-05	12 $\pm 10\%$	5	200	100
SPR01M-09	12 $\pm 10\%$	9	100	100
SPR01M-12	12 $\pm 10\%$	12	84	100
SPR01M-15	12 $\pm 10\%$	15	67	100
SPR01N-05	24 $\pm 10\%$	5	200	100
SPR01N-09	24 $\pm 10\%$	9	100	100
SPR01N-12	24 $\pm 10\%$	12	84	100
SPR01N-15	24 $\pm 10\%$	15	67	100
SPR01O-05	48 $\pm 10\%$	5	200	100
SPR01O-09	48 $\pm 10\%$	9	100	100
SPR01O-12	48 $\pm 10\%$	12	84	100
SPR01O-15	48 $\pm 10\%$	15	67	100

1W DC-DC Unregulated Single Output



0.5"x 0.4"x 0.28"

- 1500VDC I/O isolation
- Operating temperature range -40~85°C without derating
- Internal SMD technology
- Built-in EMI filter
- Protection: Short circuit
- Cooling by free air convection
- Non-conductive plastic case
- Dual in line package for SMA01
- SIP package for SMU01
- 100% full load burn-in test
- Industry standard pinout
- 2 years warranty

Mechanism	Pin Configuration																								
Unit: mm(inch) FRONT VIEW BOTTOM VIEW SIDE VIEW	<table border="1"> <thead> <tr> <th colspan="2">SMU01</th></tr> <tr> <th>Pin No.</th><th>Output</th></tr> </thead> <tbody> <tr> <td>1</td><td>-Vin</td></tr> <tr> <td>2</td><td>+Vin</td></tr> <tr> <td>3</td><td>-Vout</td></tr> <tr> <td>4</td><td>+Vout</td></tr> </tbody> </table> <table border="1"> <thead> <tr> <th colspan="2">SMA01</th></tr> <tr> <th>Pin No.</th><th>Output</th></tr> </thead> <tbody> <tr> <td>1</td><td>-Vin</td></tr> <tr> <td>4</td><td>+Vin</td></tr> <tr> <td>5</td><td>+Vout</td></tr> <tr> <td>7</td><td>-Vout</td></tr> </tbody> </table>	SMU01		Pin No.	Output	1	-Vin	2	+Vin	3	-Vout	4	+Vout	SMA01		Pin No.	Output	1	-Vin	4	+Vin	5	+Vout	7	-Vout
SMU01																									
Pin No.	Output																								
1	-Vin																								
2	+Vin																								
3	-Vout																								
4	+Vout																								
SMA01																									
Pin No.	Output																								
1	-Vin																								
4	+Vin																								
5	+Vout																								
7	-Vout																								

Voltage set point accuracy $\pm 2\%$ (max.)

Line regulation $\pm 1.2\%$ (max.) for 1% input variation

Load regulation $\pm 8\%$ (max.)@20~100% load

Input reflected ripple 100mVp-p

Efficiency 80% (typical)

Short circuit protection Momentary

Switching frequency 100kHz (min.)

I/O isolation voltage 1500VDC (min.)

I/O isolation resistance 100M Ω (min.)@ 500VDC

Isolation capacitance 80pF (max.)

Working temperature -40°C to +85°C (no derating)

Storage temperature -40°C to +105°C

EMI Compliance to EN55022 Class B, FCC part15 Class B

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
SMU01L-05	5 $\pm 10\%$	5	200	100
SMU01L-09	5 $\pm 10\%$	9	110	100
SMU01L-12	5 $\pm 10\%$	12	84	100
SMU01L-15	5 $\pm 10\%$	15	67	100
SMU01M-05	12 $\pm 10\%$	5	200	100
SMU01M-09	12 $\pm 10\%$	9	110	100
SMU01M-12	12 $\pm 10\%$	12	84	100
SMU01M-15	12 $\pm 10\%$	15	67	100
SMU01N-05	24 $\pm 10\%$	5	200	100
SMU01N-09	24 $\pm 10\%$	9	110	100
SMU01N-12	24 $\pm 10\%$	12	84	100
SMU01N-15	24 $\pm 10\%$	15	67	100

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
SMA01L-05	5 $\pm 10\%$	5	200	100
SMA01L-09	5 $\pm 10\%$	9	110	100
SMA01L-12	5 $\pm 10\%$	12	84	100
SMA01L-15	5 $\pm 10\%$	15	67	100
SMA01M-05	12 $\pm 10\%$	5	200	100
SMA01M-09	12 $\pm 10\%$	9	110	100
SMA01M-12	12 $\pm 10\%$	12	84	100
SMA01M-15	12 $\pm 10\%$	15	67	100
SMA01N-05	24 $\pm 10\%$	5	200	100
SMA01N-09	24 $\pm 10\%$	9	110	100
SMA01N-12	24 $\pm 10\%$	12	84	100
SMA01N-15	24 $\pm 10\%$	15	67	100

2W DC-DC Unregulated Single Output



0.77"x 0.28"x 0.4"

- 3000VDC I/O isolation
- Internal SMD technology
- Built-in EMI filter
- Protection: Short circuit
- Cooling by free air convection
- Non-conductive plastic case
- Single in line package
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

Mechanism	Pin Configuration										
Unit: mm(inch) FRONT VIEW BOTTOM VIEW	<table border="1"> <thead> <tr> <th>Pin No.</th><th>Output</th></tr> </thead> <tbody> <tr> <td>1</td><td>+Vin</td></tr> <tr> <td>2</td><td>-Vin</td></tr> <tr> <td>5</td><td>-Vout</td></tr> <tr> <td>7</td><td>+Vout</td></tr> </tbody> </table>	Pin No.	Output	1	+Vin	2	-Vin	5	-Vout	7	+Vout
Pin No.	Output										
1	+Vin										
2	-Vin										
5	-Vout										
7	+Vout										

Voltage set point accuracy ... $\pm 2\%$ (max.)

Line regulation $\pm 1.2\%$ (max.) for 1% input variation

Load regulation $\pm 8\%$ (max.) @20~100% load

Efficiency 83% (typical)

Short circuit protection Momentary

Switching frequency 100kHz (min.)

I/O isolation voltage 3000VDC (min.)

I/O isolation resistance 100M Ω (min.)

Isolation capacitance 80pF (max.)

Working temperature -40°C to +60°C (no derating), +71°C@80% load

Storage temperature -40°C to +105°C

Temp. Coefficient $\pm 0.03\%$ / °C (max.)

Case material non-conductive plastic

EMI Compliance to EN55022 Class B, FCC part15 Class B

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
SPU02L-05	5 $\pm 10\%$	5	400	100
SPU02L-12	5 $\pm 10\%$	12	167	100
SPU02L-15	5 $\pm 10\%$	15	133	100
SPU02M-05	12 $\pm 10\%$	5	400	100
SPU02M-12	12 $\pm 10\%$	12	167	100
SPU02M-15	12 $\pm 10\%$	15	133	100
SPU02N-05	24 $\pm 10\%$	5	400	100
SPU02N-12	24 $\pm 10\%$	12	167	100
SPU02N-15	24 $\pm 10\%$	15	133	100

2~3W DC-DC Regulated Single Output



0.86"x 0.36"x 0.44"

- 2:1 wide input range
- 4:1 wide input range (option) for SPA02
- 1000VDC I/O isolation
- 3000VDC I/O isolation (option) for SPA02
- Built-in remote ON/OFF control
- Built-in EMI filter
- Protection: Short circuit / Overload
- Cooling by free air convection
- Non-conductive plastic case
- Single in line package
- 100% full load burn-in test
- Modified models available: output 3.3V / 9V
- 2 years warranty

Mechanism	Pin Configuration																
Unit: mm(inch) FRONT VIEW BOTTOM VIEW	<table border="1"> <thead> <tr> <th>Pin No.</th><th>Output</th></tr> </thead> <tbody> <tr> <td>1</td><td>-Vin</td></tr> <tr> <td>2</td><td>+Vin</td></tr> <tr> <td>3</td><td>R.C.</td></tr> <tr> <td>5</td><td>N.C.</td></tr> <tr> <td>6</td><td>+Vout</td></tr> <tr> <td>7</td><td>-Vout</td></tr> <tr> <td>8</td><td>N.C.</td></tr> </tbody> </table>	Pin No.	Output	1	-Vin	2	+Vin	3	R.C.	5	N.C.	6	+Vout	7	-Vout	8	N.C.
Pin No.	Output																
1	-Vin																
2	+Vin																
3	R.C.																
5	N.C.																
6	+Vout																
7	-Vout																
8	N.C.																

Voltage set point accuracy $\pm 2\%$ (max.)

Line regulation $\pm 0.5\%$ (max.)

Load regulation $\pm 0.5\%$ (max.) @10~100% load

Efficiency 82% (typical)

Short circuit protection Continuous, auto-recovery

Overload protection 150%~250%, auto-recovery

Switching frequency 100kHz (min.)

I/O isolation voltage 1000VDC (min.)

I/O isolation resistance 100M Ω (min.)

Isolation capacitance 80pF (max.)

Working temperature -40°C to +70°C (no derating), +85°C@50% load

Storage temperature -40°C to +105°C

Temp. Coefficient $\pm 0.03\%$ / °C (max.)

Case material non-conductive plastic

EMI Compliance to EN55022 Class B, FCC part15 Class B

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
SPA02E-05	4.5~9	5	400	60
SPA02E-12	4.5~9	12	150	60
SPA02E-15	4.5~9	15	120	60
SPA02A-05	9~18	5	400	60
SPA02A-12	9~18	12	167	60
SPA02A-15	9~18	15	133	60
SPA02B-05	18~36	5	400	60
SPA02B-12	18~36	12	167	60
SPA02B-15	18~36	15	133	60
SPA02C-05	36~72	5	400	60
SPA02C-12	36~72	12	167	60
SPA02C-15	36~72	15	133	60

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
SPB03E-05	4.5~9	5	600	50
SPB03E-12	4.5~9	12	250	60
SPB03E-15	4.5~9	15	200	60
SPB03A-05	9~18	5	600	50
SPB03A-12	9~18	12	250	60
SPB03A-15	9~18	15	200	60
SPB03B-05	18~36	5	600	50
SPB03B-12	18~36	12	250	60
SPB03B-15	18~36	15	200	60
SPB03C-05	36~72	5	600	50
SPB03C-12	36~72	12	250	60
SPB03C-15	36~72	15	200	60



Who can provide you better services and be a trustworthy partner in the power industry?

— "MEAN WELL" tries to be —



Products —

• One Stop Shopping

• Total Solution

3W DC-DC Regulated Single and Dual Output



1.25"x 0.8"x 0.48"

- 2:1 wide input range
- 4:1 wide input range (option)
- 1000VDC I/O isolation
- 3000VDC I/O isolation (option)
- Built-in EMI filter
- Protection: Short circuit / Overload
- Cooling by free air convection
- Five-sided shield metal case
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

Mechanism	Pin Configuration														
Unit: mm(inch) 20.3(0.80) 4.6(0.18) 0.6+0.1/-0(0.024) 3.8(0.15) 23 2 22 3 BOTTOM VIEW 16 90 14 11 15.2(0.60) 31.8(1.25) 17.8(0.70) 2.54(0.1) 5.08(0.2) 12.2(0.48)	<table border="1"> <thead> <tr> <th>Pin No.</th><th>Output</th></tr> </thead> <tbody> <tr> <td>2&3</td><td>-Vin -Vin</td></tr> <tr> <td>9</td><td>NC COM</td></tr> <tr> <td>11</td><td>NC -Vout</td></tr> <tr> <td>14</td><td>+Vout +Vout</td></tr> <tr> <td>16</td><td>-Vout COM</td></tr> <tr> <td>22&23</td><td>+Vin +Vin</td></tr> </tbody> </table>	Pin No.	Output	2&3	-Vin -Vin	9	NC COM	11	NC -Vout	14	+Vout +Vout	16	-Vout COM	22&23	+Vin +Vin
Pin No.	Output														
2&3	-Vin -Vin														
9	NC COM														
11	NC -Vout														
14	+Vout +Vout														
16	-Vout COM														
22&23	+Vin +Vin														

Voltage set point accuracy $\pm 2\%$ (max.)

Line regulation $\pm 0.5\%$ (max.)

Load regulation $\pm 0.5\%$ (max.)@10~100% load

Efficiency 82% (typical)

Short circuit protection Continuous, auto-recovery

Overload protection 160%~250%, auto-recovery

I/O isolation voltage 1000VDC (min.)

I/O isolation resistance 100M Ω (min.)@ 500VDC

Isolation capacitance 80pF (max.)

Working temperature -40°C to +60°C (no derating),
+71°C@80% load

Storage temperature -40°C to +105°C

Temp. Coefficient $\pm 0.03\%$ / °C (max.)

Case material Five-sided shield metal case

EMI Compliance to EN55022 Class B,
FCC part15 Class B

Single Output

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
SCW03A-05	9~18	5	600	50
SCW03A-12	9~18	12	250	60
SCW03A-15	9~18	15	200	60
SCW03B-05	18~36	5	600	50
SCW03B-12	18~36	12	250	60
SCW03B-15	18~36	15	200	60
SCW03C-05	36~72	5	600	50
SCW03C-12	36~72	12	250	60
SCW03C-15	36~72	15	200	60

Dual Output

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
DCW03A-05	9~18	± 5	± 300	50
DCW03A-12	9~18	± 12	± 125	60
DCW03A-15	9~18	± 15	± 100	60
DCW03B-05	18~36	± 5	± 300	50
DCW03B-12	18~36	± 12	± 125	60
DCW03B-15	18~36	± 15	± 100	60
DCW03C-05	36~72	± 5	± 300	50
DCW03C-12	36~72	± 12	± 125	60
DCW03C-15	36~72	± 15	± 100	60

5~6W DC-DC Regulated Single and Dual Output



1.25"x 0.8"x 0.48"

- 2:1 wide input range
- 4:1 wide input range(option)
- 1000VDC I/O isolation
- 3000VDC I/O isolation(option)
- Built-in EMI filter
- Protection: Short circuit / Overload
- Cooling by free air convection
- Five-sided shield metal case
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

Mechanism	Pin Configuration														
Unit: mm(inch) 20.3(0.80) 4.6(0.18) 0.6+0.1/-0(0.024) 3.8(0.15) 23 2 22 3 BOTTOM VIEW 16 90 14 11 15.2(0.60) 31.8(1.25) 17.8(0.70) 2.54(0.1) 5.08(0.2) 12.2(0.48)	<table border="1"> <thead> <tr> <th>Pin No.</th><th>Output</th></tr> </thead> <tbody> <tr> <td>2&3</td><td>-Vin -Vin</td></tr> <tr> <td>9</td><td>NC COM</td></tr> <tr> <td>11</td><td>NC -Vout</td></tr> <tr> <td>14</td><td>+Vout +Vout</td></tr> <tr> <td>16</td><td>-Vout COM</td></tr> <tr> <td>22&23</td><td>+Vin +Vin</td></tr> </tbody> </table>	Pin No.	Output	2&3	-Vin -Vin	9	NC COM	11	NC -Vout	14	+Vout +Vout	16	-Vout COM	22&23	+Vin +Vin
Pin No.	Output														
2&3	-Vin -Vin														
9	NC COM														
11	NC -Vout														
14	+Vout +Vout														
16	-Vout COM														
22&23	+Vin +Vin														

Voltage set point accuracy $\pm 2\%$ (max.)

Line regulation $\pm 0.5\%$ (max.)

Load regulation $\pm 0.5\%$ (max.)@20~100% load

Efficiency 85% (typical)

Short circuit protection continuous, auto-recovery

Overload protection 150%~250%, auto-recovery

I/O isolation voltage 1000VDC (min.)

I/O isolation resistance 100M Ω (min.)@ 500VDC

Isolation capacitance 80pF (max.)

Working temperature -40°C to +60°C (no derating),
+71°C@80% load

Storage temperature -40°C to +105°C

Temp. Coefficient $\pm 0.03\%$ / °C (max.)

Case material Five-sided shield metal case

EMI Compliance to EN55022 Class B,
FCC part15 Class B

Single Output

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
SCW05A-05	9~18	5	1000	50
SCW05A-09	9~18	9	556	60
SCW05A-12	9~18	12	470	60
SCW05A-15	9~18	15	400	60
SCW05B-05	18~36	5	1000	50
SCW05B-09	18~36	9	556	60
SCW05B-12	18~36	12	470	60
SCW05B-15	18~36	15	400	60
SCW05C-05	36~72	5	1000	50
SCW05C-09	36~72	9	556	60
SCW05C-12	36~72	12	470	60
SCW05C-15	36~72	15	400	60

Dual Output

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
DCW05A-05	9~18	± 5	± 500	50
DCW05A-12	9~18	± 12	± 230	60
DCW05A-15	9~18	± 15	± 190	60
DCW05B-05	18~36	± 5	± 500	50
DCW05B-12	18~36	± 12	± 230	60
DCW05B-15	18~36	± 15	± 190	60
DCW05C-05	36~72	± 5	± 500	50
DCW05C-12	36~72	± 12	± 230	60
DCW05C-15	36~72	± 15	± 190	60

5W DC-DC Regulated Single and Dual Output



2"x 1"x 0.44"

- 2:1 wide input range
- 4:1 wide input range(option)
- 1000VDC I/O isolation
- 3000VDC I/O isolation(option)
- Built-in EMI filter
- Protection: Short circuit / Overload
- Cooling by free air convection
- Six-sided shield metal case
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

Mechanism	Pin Configuration
Unit: mm(inch)	

Voltage set point accuracy ... $\pm 2\%$ (max.)
 Line regulation $\pm 0.2\%$ (max.)
 Load regulation $\pm 0.5\%$ (max.)@10~100% load
 Efficiency 85% (typical)
 Short circuit protection continuous, auto-recovery
 Overload protection 160%~250%, auto-recovery
 I/O isolation voltage 1000VDC (min.)
 I/O isolation resistance 100M Ω (min.)@ 500VDC
 Working temperature -25°C to +60°C (no derating), +71°C@80% load
 Storage temperature -25°C to +105°C
 Temp. Coefficient $\pm 0.03\%$ / °C (max.)
 Case material Six-sided shield metal case
 EMI Compliance to EN55022 Class B, FCC part15 Class B

Single Output

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
SLW05A-05	9~18	5	1000	50
SLW05A-09	9~18	9	556	60
SLW05A-12	9~18	12	417	60
SLW05A-15	9~18	15	333	60
SLW05B-05	18~36	5	1000	50
SLW05B-09	18~36	9	556	60
SLW05B-12	18~36	12	417	60
SLW05B-15	18~36	15	333	60
SLW05C-05	36~72	5	1000	50
SLW05C-09	36~72	9	556	60
SLW05C-12	36~72	12	417	60
SLW05C-15	36~72	15	333	60

Dual Output

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
DLW05A-05	9~18	± 5	± 500	50
DLW05A-12	9~18	± 12	± 208	60
DLW05A-15	9~18	± 15	± 167	60
DLW05B-05	18~36	± 5	± 500	50
DLW05B-12	18~36	± 12	± 208	60
DLW05B-15	18~36	± 15	± 167	60
DLW05C-05	36~72	± 5	± 500	50
DLW05C-12	36~72	± 12	± 208	60
DLW05C-15	36~72	± 15	± 167	60

8W DC-DC Regulated Single and Dual Output



1.25"x 0.8"x 0.48"

- 2:1 wide input range
- 1000VDC I/O isolation
- Built-in EMI filter
- Protection: Short circuit / Overload
- Cooling by free air convection
- Five-sided shield metal case
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

Mechanism	Pin Configuration																							
Unit: mm(inch) 20.3 (0.80) 4.6 (0.18) 0.6+0.1/-0 (0.024) 3.8 (0.15) 31.8 (1.25) 17.8 (0.70) 2.54 (0.1) 5.08 (0.2) 12.2 (0.48) 15.2 (0.60) Bottom View Pin locations: 20, 30, 16, 90, 14, 110	<table><tr><th rowspan="2">Pin No.</th><th colspan="2">Output</th></tr><tr><th>Single</th><th>Dual</th></tr><tr><td>2&3</td><td>-Vin</td><td>-Vin</td></tr><tr><td>9</td><td>NC</td><td>COM</td></tr><tr><td>11</td><td>NC</td><td>-Vout</td></tr><tr><td>14</td><td>+Vout</td><td>+Vout</td></tr><tr><td>16</td><td>-Vout</td><td>COM</td></tr><tr><td>22&23</td><td>+Vin</td><td>+Vin</td></tr></table>	Pin No.	Output		Single	Dual	2&3	-Vin	-Vin	9	NC	COM	11	NC	-Vout	14	+Vout	+Vout	16	-Vout	COM	22&23	+Vin	+Vin
Pin No.	Output																							
	Single	Dual																						
2&3	-Vin	-Vin																						
9	NC	COM																						
11	NC	-Vout																						
14	+Vout	+Vout																						
16	-Vout	COM																						
22&23	+Vin	+Vin																						

Voltage set point accuracy $\pm 2\%$ (max.)
 Line regulation $\pm 0.5\%$ (max.)
 Load regulation $\pm 0.5\%$ (max.)@20~100% load
 Efficiency 81% (typical)
 Short circuit protection continuous, auto-recovery
 Overload protection 110%~250%, auto-recovery
 I/O isolation voltage 1000VDC (min.)
 I/O isolation resistance 100M Ω (min.)@ 500VDC
 Isolation capacitance 250pF (max.)
 Working temperature -40°C to +60°C (no derating), +71°C@80% load
 Storage temperature -40°C to +105°C
 Temp. Coefficient $\pm 0.03\%$ / °C (max.)
 Case material Five-sided shield metal case
 EMI Compliance to EN55022 Class B, FCC part15 Class B

Single Output

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
SCW08A-05	9~18	5	1600	50
SCW08A-12	9~18	12	670	60
SCW08A-15	9~18	15	533	60
SCW08B-05	18~36	5	1600	50
SCW08B-12	18~36	12	670	60
SCW08B-15	18~36	15	533	60
SCW08C-05	36~72	5	1600	50
SCW08C-12	36~72	12	670	60
SCW08C-15	36~72	15	533	60

Dual Output

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
DCW08A-05	9~18	± 5	± 800	50
DCW08A-12	9~18	± 12	± 335	60
DCW08A-15	9~18	± 15	± 267	60
DCW08B-05	18~36	± 5	± 800	50
DCW08B-12	18~36	± 12	± 335	60
DCW08B-15	18~36	± 15	± 267	60
DCW08C-05	36~72	± 5	± 800	50
DCW08C-12	36~72	± 12	± 335	60
DCW08C-15	36~72	± 15	± 267	60

DC/DC Converter

10~12W Module Type



10W DC-DC Regulated Single and Dual Output



2"x 1"x 0.44"

- 2:1 wide input range
- 4:1 wide input range(option)
- 1000VDC I/O isolation
- 3000VDC I/O isolation (option)
- Built-in EMI filter
- Protection: Short circuit / Overload
- Cooling by free air convection
- Six-sided shield metal case
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

Mechanism	Pin Configuration																				
Unit: mm(inch) Bottom View Dimensions: 15.3, 20.3, 15.2, 11.27 (0.44), 2.5, 10.2, 10.2, 2.5, 5.8, 25.4 (1.00), 10.2, 15.1, 10.1, 50.8 (2.00)	<table><tr><th rowspan="2">Pin No.</th><th colspan="2">Output</th></tr><tr><th>Single</th><th>Dual</th></tr><tr><td>1</td><td>+Vin</td><td>+Vin</td></tr><tr><td>2</td><td>-Vin</td><td>-Vin</td></tr><tr><td>3</td><td>+Vout</td><td>+Vout</td></tr><tr><td>4</td><td>No Pin</td><td>COM</td></tr><tr><td>5</td><td>-Vout</td><td>-Vout</td></tr></table>	Pin No.	Output		Single	Dual	1	+Vin	+Vin	2	-Vin	-Vin	3	+Vout	+Vout	4	No Pin	COM	5	-Vout	-Vout
Pin No.	Output																				
	Single	Dual																			
1	+Vin	+Vin																			
2	-Vin	-Vin																			
3	+Vout	+Vout																			
4	No Pin	COM																			
5	-Vout	-Vout																			

Voltage set point accuracy ... $\pm 2\%$ (max.)
 Line regulation $\pm 0.3\%$ (max.)
 Load regulation $\pm 0.5\%$ (max.)@10~100% load
 Efficiency 85% (typical)
 Short circuit protection continuous, auto-recovery
 Overload protection 160%~250%, auto-recovery
 I/O isolation voltage 1000VDC (min.)
 I/O isolation resistance 100M Ω (min.)@ 500VDC
 Working temperature -25°C to +60°C (no derating), +71°C@80% load
 Storage temperature -25°C to +105°C
 Temp. Coefficient $\pm 0.03\%$ / °C (max.)
 Case material Six-sided shield metal case
 EMI Compliance to EN55022 Class B,
 FCC part15 Class B

Single Output

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
SKE10A-05	9~18	5	2000	50
SKE10A-12	9~18	12	840	60
SKE10A-15	9~18	15	666	60
SKE10A-24	9~18	24	420	80
SKE10B-05	18~36	5	2000	50
SKE10B-12	18~36	12	840	60
SKE10B-15	18~36	15	666	60
SKE10B-24	18~36	24	420	80
SKE10C-05	36~72	5	2000	50
SKE10C-12	36~72	12	840	60
SKE10C-15	36~72	15	666	60
SKE10C-24	36~72	24	420	80

Dual Output

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
DKE10A-05	9~18	± 5	± 1000	50
DKE10A-12	9~18	± 12	± 420	60
DKE10A-15	9~18	± 15	± 333	60
DKE10A-24	9~18	± 24	± 210	80
DKE10B-05	18~36	± 5	± 1000	50
DKE10B-12	18~36	± 12	± 420	60
DKE10B-15	18~36	± 15	± 333	60
DKE10B-24	18~36	± 24	± 210	80
DKE10C-05	36~72	± 5	± 1000	50
DKE10C-12	36~72	± 12	± 420	60
DKE10C-15	36~72	± 15	± 333	60
DKE10C-24	36~72	± 24	± 210	80

12W DC-DC Regulated Single and Dual Output



1.25"x 0.8"x 0.48"

- 2:1 wide input range
- 1500VDC I/O isolation
- Built-in remote ON/OFF control
- Built-in EMI filter
- Protection: Short circuit / Overload
- Cooling by free air convection
- Five-sided shield metal case
- 100% full load burn-in test
- Low cost, high reliability
- Modified models available:
output 2.5V / 3.3V
- 2 years warranty

Mechanism

Unit: mm(inch)

20.3 (0.80)

4.6 (0.18)

0.6+0.1/-0 (0.024)

3.8 (0.15)

Unit: mm(inch)

31.8 (1.25)

17.8 (0.70)

2.54 (0.1)

5.08 (0.2)

12.2 (0.48)

15.2 (0.60)

11.0

1.0

2.0

3.0

BOTTOM VIEW

9.0

1.0

2.0

3.0

Pin Configuration

Pin No.	Output	
	Single	Dual
1	R.C	R.C
2&3	-Vin	-Vin
9	NC	COM
11	NC	-Vout
14	+Vout	+Vout
16	-Vout	COM
22&23	+Vin	+Vin

Voltage set point accuracy ... $\pm 2\%$ (max.)
 Line regulation $\pm 0.5\%$ (max.)
 Load regulation $\pm 0.5\%$ (max.)@20~100% load
 Efficiency 83% (typical)
 Short circuit protection continuous, auto-recovery
 Overload protection 110%~180%, auto-recovery
 I/O isolation voltage 1500VDC (min.)
 I/O isolation resistance 100M Ω (min.)@ 500VDC
 Working temperature -40°C to +60°C (no derating), +71°C@60% load
 Storage temperature -40°C to +105°C
 Temp. Coefficient $\pm 0.03\%$ / °C (max.)
 Case material Five-sided shield metal case
 EMI Compliance to EN55022 Class A,
 FCC part15 Class A

Single Output

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
SCW12A-05	9~18	5	2400	50
SCW12A-12	9~18	12	1000	60
SCW12A-15	9~18	15	800	60
SCW12B-05	18~36	5	2400	50
SCW12B-12	18~36	12	1000	60
SCW12B-15	18~36	15	800	60
SCW12C-05	36~72	5	2400	50
SCW12C-12	36~72	12	1000	60
SCW12C-15	36~72	15	800	60

Dual Output

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
DCW12A-05	9~18	± 5	± 1200	50
DCW12A-12	9~18	± 12	± 500	60
DCW12A-15	9~18	± 15	± 400	60
DCW12B-05	18~36	± 5	± 1200	50
DCW12B-12	18~36	± 12	± 500	60
DCW12B-15	18~36	± 15	± 400	60
DCW12C-05	36~72	± 5	± 1200	50
DCW12C-12	36~72	± 12	± 500	60
DCW12C-15	36~72	± 15	± 400	60

15W DC-DC Regulated Single Output



- 2:1 wide input range
- 1500VDC I/O isolation
- **High efficiency up to 88%**
- Built-in remote ON/OFF control
- Built-in EMI filter
- Trimming output ($\pm 10\%$)
- Protections: Short circuit / Overload / Over voltage
- Cooling by free air convection
- Compact size
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

Mechanism	Pin Configuration														
Unit: mm Unit: mm 1.0 DI A (0.04±0.005) Bottom View: 25.04 (1.00), 20.32 (0.80), 10.16 (0.40), 12.7 (0.50), 10.16 (0.40), 2.54 (0.10), 7.62 (0.30), 2.54 (0.10), 5.08 (0.20), 25.4 (1.00) Side View: 5.8 (0.23), 9.9 (0.39)	<table border="1"> <thead> <tr> <th>Pin No.</th><th>Output</th></tr> </thead> <tbody> <tr> <td>1</td><td>+Vin</td></tr> <tr> <td>2</td><td>-Vin</td></tr> <tr> <td>3</td><td>R.C</td></tr> <tr> <td>4</td><td>-Vout</td></tr> <tr> <td>5</td><td>Trim</td></tr> <tr> <td>6</td><td>+Vout</td></tr> </tbody> </table>	Pin No.	Output	1	+Vin	2	-Vin	3	R.C	4	-Vout	5	Trim	6	+Vout
Pin No.	Output														
1	+Vin														
2	-Vin														
3	R.C														
4	-Vout														
5	Trim														
6	+Vout														

Voltage set point accuracy ... $\pm 2\%$ (max.)

Line regulation $\pm 0.5\%$ (max.)

Load regulation $\pm 0.5\%$ (max.) @10%~full load

Overload protection 110%~180%, auto-recovery

Over voltage protection Clamp by TVS Diode

Efficiency 88% (typical)

I/O isolation voltage 1500VDC(min.)

I/O isolation resistance 100M Ω (min.) @500VDC

Working temperature -40°C to +80°C(refer to output derating curve)

Storage temperature -55°C to 100°C

Case Material Five-sided shield metal case

EMI Compliance to EN55022 class A, FCC part15 classA

Model No.	Input (VDC)	Output (VDC)	Current (A)	R&N (mVp-p)
SKM15A-05	9~18	5	3.00	50
SKM15A-12	9~18	12	1.25	60
SKM15A-15	9~18	15	1.00	60
SKM15B-05	18~36	5	3.00	50
SKM15B-12	18~36	12	1.25	60
SKM15B-15	18~36	15	1.00	60
SKM15C-05	36~75	5	3.00	50
SKM15C-12	36~75	12	1.25	60
SKM15C-15	36~75	15	1.00	60

15W DC-DC Regulated Single and Dual Output



- 2:1 wide input range
- 4:1 wide input range(option)
- 1000VDC I/O isolation
- 3000VDC I/O isolation (option)
- Built-in EMI filter
- Protection: Short circuit / Overload
- Cooling by free air convection
- Six-sided shield metal case
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

Mechanism	Pin Configuration																				
Unit: mm(inch) Unit: mm(inch) Bottom View	<table><tr><th rowspan="2">Pin No.</th><th colspan="2">Output</th></tr><tr><th>Single</th><th>Dual</th></tr><tr><td>1</td><td>+Vin</td><td>+Vin</td></tr><tr><td>2</td><td>-Vin</td><td>-Vin</td></tr><tr><td>3</td><td>+Vout</td><td>+Vout</td></tr><tr><td>4</td><td>No Pin</td><td>COM</td></tr><tr><td>5</td><td>-Vout</td><td>-Vout</td></tr></table>	Pin No.	Output		Single	Dual	1	+Vin	+Vin	2	-Vin	-Vin	3	+Vout	+Vout	4	No Pin	COM	5	-Vout	-Vout
Pin No.	Output																				
	Single	Dual																			
1	+Vin	+Vin																			
2	-Vin	-Vin																			
3	+Vout	+Vout																			
4	No Pin	COM																			
5	-Vout	-Vout																			

Voltage set point accuracy ... $\pm 2\%$ (max.)

Line regulation $\pm 0.2\%$ (max.)

Load regulation $\pm 0.5\%$ (max.)@10~100% load

Efficiency 82% (typical)

Short circuit protection continuous, auto-recovery

Overload protection 110%~250%, auto-recovery

I/O isolation voltage 1000VDC (min.)

I/O isolation resistance 100M Ω (min.)@ 500VDC

Working temperature -40°C to +60°C (no derating), +71°C@80% load

Storage temperature -40°C to +105°C

Temp. Coefficient $\pm 0.03\%$ / °C (max.)

Case material Six-sided shield metal case

EMI Compliance to EN55022 Class B, FCC part15 Class B

Single Output

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
SKA15A-033	9~18	3.3	3000	50
SKA15A-05	9~18	5	3000	50
SKA15A-12	9~18	12	1250	60
SKA15A-15	9~18	15	1000	60
SKA15B-033	18~36	3.3	3000	50
SKA15B-05	18~36	5	3000	50
SKA15B-12	18~36	12	1250	60
SKA15B-15	18~36	15	1000	60
SKA15C-033	36~72	3.3	3000	50
SKA15C-05	36~72	5	3000	50
SKA15C-12	36~72	12	1250	60
SKA15C-15	36~72	15	1000	60

Dual Output

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
DKA15A-05	9~18	± 5	± 1500	50
DKA15A-12	9~18	± 12	± 625	60
DKA15A-15	9~18	± 15	± 500	60
DKA15B-05	18~36	± 5	± 1500	50
DKA15B-12	18~36	± 12	± 625	60
DKA15B-15	18~36	± 15	± 500	60
DKA15C-05	36~72	± 5	± 1500	50
DKA15C-12	36~72	± 12	± 625	60
DKA15C-15	36~72	± 15	± 500	60



To Satisfy our customers is our goal —

- High Quality
- Low Cost
- Prompt Delivery
- Best Service

15W DC-DC Regulated Single and Dual Output



2" x 2" x 0.43"

- 2:1 wide input range
- 4:1 wide input range(option)
- 1000VDC I/O isolation
- 3000VDC I/O isolation(option)
- Built-in EMI filter
- Protections: Short circuit / Overload
- Cooling by free air convection
- Six-sided shield metal case
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

Mechanism	Pin Configuration												
	<table border="1"> <thead> <tr> <th>Pin No.</th><th>Output</th></tr> </thead> <tbody> <tr> <td>1</td><td>+Vin +Vin</td></tr> <tr> <td>2</td><td>-Vin -Vin</td></tr> <tr> <td>3</td><td>+Vout +Vout</td></tr> <tr> <td>4</td><td>No Pin COM</td></tr> <tr> <td>5</td><td>-Vout -Vout</td></tr> </tbody> </table>	Pin No.	Output	1	+Vin +Vin	2	-Vin -Vin	3	+Vout +Vout	4	No Pin COM	5	-Vout -Vout
Pin No.	Output												
1	+Vin +Vin												
2	-Vin -Vin												
3	+Vout +Vout												
4	No Pin COM												
5	-Vout -Vout												

Voltage set point accuracy ... $\pm 2\%$ (max.)
 Line regulation $\pm 0.3\%$ (max.)
 Load regulation $\pm 0.5\%$ (max.)@10~100% load
 Efficiency 85% (typical)
 Short circuit protection continuous, auto-recovery
 Overload protection 160%~250%, auto-recovery
 I/O isolation voltage 1000VDC (min.)
 I/O isolation resistance 100M Ω (min.)@ 500VDC
 Working temperature -25°C to +60°C (no derating), +71°C@80% load
 Storage temperature -25°C to +105°C
 Temp. Coefficient $\pm 0.03\%$ / °C (max.)
 Case material Six-sided shield metal case
 EMI Compliance to EN55022 Class B, FCC part15 Class B

Single Output

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
SKE15A-05	9~18	5	3000	50
SKE15A-12	9~18	12	1250	60
SKE15A-15	9~18	15	1000	60
SKE15A-24	9~18	24	625	80
SKE15B-05	18~36	5	3000	50
SKE15B-12	18~36	12	1250	60
SKE15B-15	18~36	15	1000	60
SKE15B-24	18~36	24	625	80
SKE15C-05	36~72	5	3000	50
SKE15C-12	36~72	12	1250	60
SKE15C-15	36~72	15	1000	60
SKE15C-24	36~72	24	625	80

Dual Output

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
DKE15A-05	9~18	± 5	± 1500	50
DKE15A-12	9~18	± 12	± 625	60
DKE15A-15	9~18	± 15	± 500	60
DKE15A-24	9~18	± 24	± 313	80
DKE15B-05	18~36	± 5	± 1500	50
DKE15B-12	18~36	± 12	± 625	60
DKE15B-15	18~36	± 15	± 500	60
DKE15B-24	18~36	± 24	± 313	80
DKE15C-05	36~72	± 5	± 1500	50
DKE15C-12	36~72	± 12	± 625	60
DKE15C-15	36~72	± 15	± 500	60
DKE15C-24	36~72	± 24	± 313	80

25~30W DC-DC Regulated Dual and Triple Output



2" x 2" x 0.82"

- 2:1 wide input range
- 4:1 wide input range(option)
- 1000VDC I/O isolation
- Built-in remote ON/OFF control
- Built-in EMI filter
- Trimming output ($\pm 10\%$) for dual output
- Protections: Short circuit / Overload
- Cooling by free air convection
- Six-sided shield metal case
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

Mechanism	Pin Configuration																		
	<table border="1"> <thead> <tr> <th>Pin No.</th><th>Output</th></tr> </thead> <tbody> <tr> <td>1</td><td>Dual R.C Triple R.C</td></tr> <tr> <td>2</td><td>No Pin No Pin</td></tr> <tr> <td>3</td><td>-Vin -Vin</td></tr> <tr> <td>4</td><td>+Vin +Vin</td></tr> <tr> <td>5</td><td>+Vout +Vout</td></tr> <tr> <td>6</td><td>COM +5V</td></tr> <tr> <td>7</td><td>-Vout COM</td></tr> <tr> <td>8</td><td>TRIM -Vout</td></tr> </tbody> </table>	Pin No.	Output	1	Dual R.C Triple R.C	2	No Pin No Pin	3	-Vin -Vin	4	+Vin +Vin	5	+Vout +Vout	6	COM +5V	7	-Vout COM	8	TRIM -Vout
Pin No.	Output																		
1	Dual R.C Triple R.C																		
2	No Pin No Pin																		
3	-Vin -Vin																		
4	+Vin +Vin																		
5	+Vout +Vout																		
6	COM +5V																		
7	-Vout COM																		
8	TRIM -Vout																		

Voltage set point accuracy $\pm 2\%$ (max.)
 Line regulation $\pm 0.5\%$ (max.) for dual output;
 $\pm 1\%$ (max.) for triple output
 Load regulation $\pm 0.5\%$ (10%~full load)(Dual)
 $\pm 5\%$ (20%~full load)(Triple)
 Efficiency 83% (typical)
 Short circuit protection continuous, auto-recovery
 Overload protection 110%~250%, auto-recovery
 I/O isolation voltage 1000VDC (min.)
 I/O isolation resistance 100M Ω (min.)@ 500VDC
 Working temperature -40°C to +71°C (no derating), +85°C@60% load
 Storage temperature -40°C to +105°C
 Temp. Coefficient $\pm 0.03\%$ / °C (max.)
 Case material Six-sided shield metal case
 EMI Compliance to EN55022 Class B, FCC part15 Class B


Dual Output

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
DKA30A-05	9~18	± 5	± 2500	100
DKA30A-12	9~18	± 12	± 1250	100
DKA30A-15	9~18	15	± 1000	100
DKA30B-05	18~36	± 5	± 2500	100
DKA30B-12	18~36	± 12	± 1250	100
DKA30B-15	18~36	± 15	± 1000	100
DKA30C-05	36~72	± 5	± 2500	100
DKA30C-12	36~72	± 12	± 1250	100
DKA30C-15	36~72	± 15	± 1000	100

Triple Output

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
TKA30A-B	9~18	+5 / ± 12	3500 / ± 310	100
TKA30A-C	9~18	+5 / ± 15	3500 / ± 250	100
TKA30B-B	18~36	+5 / ± 12	3500 / ± 310	100
TKA30B-C	18~36	+5 / ± 15	3500 / ± 250	100
TKA30C-B	36~72	+5 / ± 12	3500 / ± 310	100
TKA30C-C	36~72	+5 / ± 15	3500 / ± 250	100

30W DC-DC Regulated Single Output



2"x 2"x 0.63"


- 2:1 wide input range
- 1000VDC I/O isolation
- Built-in remote ON/OFF control
- Built-in EMI filter
- Trimming output ($\pm 10\%$)
- Protections: Short circuit / Overload / Over voltage
- Cooling by free air convection
- Compact size, high efficiency
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

40W DC-DC Regulated Single Output



2"x 2"x 0.43"

- 2:1 wide input range
- 1500VDC I/O isolation
- High efficiency up to 92%
- Built-in remote ON/OFF control
- Built-in remote sense
- Built-in EMI filter
- Trimming output ($\pm 10\%$)
- Protections: Short circuit / Overload / Over voltage
- Cooling by free air convection
- Compact size
- 100% full load burn-in test
- Low cost, high reliability
- Output 3.3V / 9V models available
- 2 years warranty

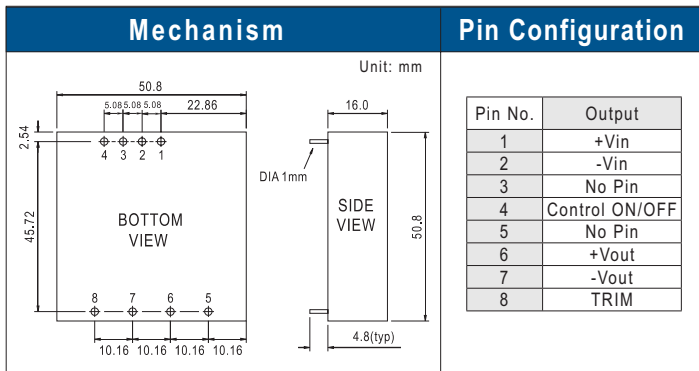

Voltage set point accuracy ... $\pm 2\%$ (max.) ($\pm 3\%$ for 3.3VDC models)

Line regulation $\pm 1\%$ (max.)

Load regulation $\pm 1\%$ (max.) @10%~full load

Overload protection Over 105% power limiting, auto-recovery

Over voltage protection 115%~150% rated output voltage

Efficiency (typical) 80% for 12V input
83% for 24V input
85% for 48V input

I/O isolation voltage 1000VDC(min.)

I/O isolation resistance 100M Ω (min.) @500VDC

Working temperature -25°C to +85°C(refer to output derating curve)

Storage temperature -25°C to 85°C


Safety standards Design refer to UL1950, TUV EN60950

Case Material Six-sided shield metal case

EMI Compliance to EN55022 class B

Packing 0.1kg ; 150pcs / 15.8kg / 0.97CUFT

Model No.	Input (VDC)	Output (VDC)	Current (A)	R&N (mVp-p)
SDM30-12S3	9~18	3.3	5.0	75
SDM30-12S5	9~18	5	5.0	75
SDM30-12S12	9~18	12	2.1	100
SDM30-12S15	9~18	15	1.7	100
SDM30-24S3	18~36	3.3	5.0	75
SDM30-24S5	18~36	5	5.0	75
SDM30-24S12	18~36	12	2.5	100
SDM30-24S15	18~36	15	2.0	100
SDM30-48S3	36~72	3.3	5.0	75
SDM30-48S5	36~72	5	5.0	75
SDM30-48S12	36~72	12	2.5	100
SDM30-48S15	36~72	15	2.0	100

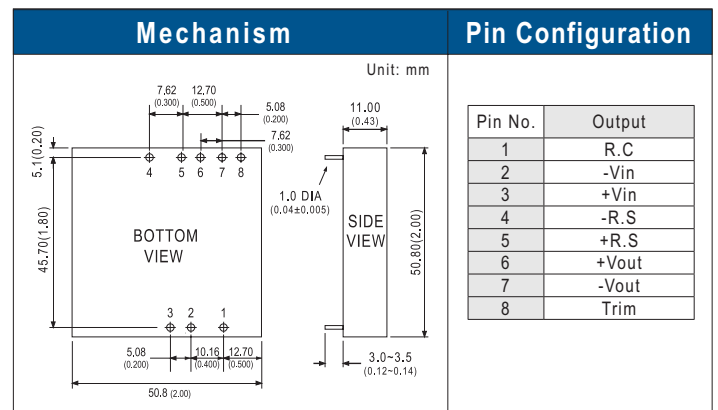

Voltage set point accuracy ... $\pm 2\%$ (max.)

Line regulation $\pm 0.5\%$ (max.)

Load regulation $\pm 0.5\%$ (max.) @10%~full load

Overload protection 110%~180%, auto-recovery

Over voltage protection Clamp by TVS Diode

Efficiency 92% (typical)

I/O isolation voltage 1500VDC(min.)

I/O isolation resistance 100M Ω (min.) @500VDC

Working temperature -40°C to +80°C(refer to output derating curve)

Storage temperature -40°C to 85°C

Case Material Six-sided shield metal case

EMI Compliance to EN55022 class A, FCC part15 classA

Model No.	Input (VDC)	Output (VDC)	Current (A)	R&N (mVp-p)
SKA40A-05	9~18	5	7.00	60
SKA40A-12	9~18	12	3.33	80
SKA40A-15	9~18	15	2.67	100
SKA40B-05	18~36	5	7.00	60
SKA40B-12	18~36	12	3.33	80
SKA40B-15	18~36	15	2.67	100
SKA40C-05	36~75	5	7.00	60
SKA40C-12	36~75	12	3.33	80
SKA40C-15	36~75	15	2.67	100

5W DC-DC Regulated Single Output

CBCE



1.6" x 1" x 0.327"

- 4:1 wide input range
- 1000VDC I/O isolation
- Built-in EMI filter
- Protections: Short circuit / Overload / Over voltage
- Built-in remote ON/OFF control
- Cooling by free air convection
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

Mechanism	Pin Configuration												
Unit: mm(inch)	<table border="1"> <thead> <tr> <th>Pin No.</th><th>Output</th></tr> </thead> <tbody> <tr> <td>1</td><td>+INPUT</td></tr> <tr> <td>2</td><td>-INPUT(GND)</td></tr> <tr> <td>3</td><td>+Vout</td></tr> <tr> <td>4</td><td>-Vout</td></tr> <tr> <td>5</td><td>CONTROL</td></tr> </tbody> </table>	Pin No.	Output	1	+INPUT	2	-INPUT(GND)	3	+Vout	4	-Vout	5	CONTROL
Pin No.	Output												
1	+INPUT												
2	-INPUT(GND)												
3	+Vout												
4	-Vout												
5	CONTROL												

Voltage set point accuracy ... $\pm 2.0\%$ (max.)
 Line regulation $\pm 1.0\%$ (max.)
 Load regulation $\pm 1 \sim \pm 2\%$ (max.) @10%~full load
 Efficiency 85% (typical)
 Short circuit protection continuous, auto-recovery
 Overload protection over 105% power limiting, auto-recovery
 I/O isolation voltage 1000VDC
 I/O isolation resistance 100M Ω (min.) @ 500VDC, 25°C 70% RH
 Working temperature -25°C to +70°C (refer to output derating curve)
 Storage temperature -40°C to +85°C
 Temp. Coefficient $\pm 0.03\%$ / °C (0~60°C)
 Safety standards IEC60950-1 CB approved by TUV
 EMC standards EN55022 Class B, EN61000-4-2,3,4,5,6,8
 Packing 0.007kg ; 700pcs / 5.9kg / 0.97CUFT

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
NSD05-12S3	9.2~36	3.3	1200	75
NSD05-12S5	9.2~36	5	1000	75
NSD05-12S12	9.2~36	12	420	75
NSD05-12S15	9.2~36	15	330	75
NSD05-48S3	18~72	3.3	1200	75
NSD05-48S5	18~72	5	1000	75
NSD05-48S12	18~72	12	420	75
NSD05-48S15	18~72	15	330	75


10W DC-DC Regulated Single and Dual Output

ULUSCE



2"x 1"x 0.394"

- 4:1 wide input range
- 1000VDC I/O isolation
- Protections: Short circuit / Overload / Over voltage
- Built-in EMI filter
- Built-in remote ON/OFF control
- Cooling by free air convection
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

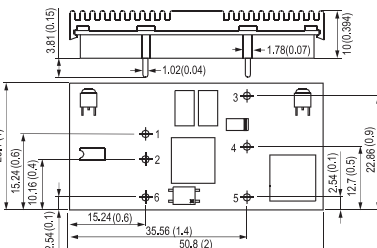Mechanism	Pin Configuration																							
Unit: mm(inch) 	<table><tr><th rowspan="2">Pin No.</th><th colspan="2">Output</th></tr><tr><th>Single</th><th>Dual</th></tr><tr><td>1</td><td>+INPUT</td><td>+INPUT</td></tr><tr><td>2</td><td>-INPUT (GND)</td><td>-INPUT (GND)</td></tr><tr><td>3</td><td>+OUT</td><td>+OUT</td></tr><tr><td>4</td><td>NC</td><td>COMMON</td></tr><tr><td>5</td><td>-OUT</td><td>-OUT</td></tr><tr><td>6</td><td>CONTROL</td><td>CONTROL</td></tr></table>	Pin No.	Output		Single	Dual	1	+INPUT	+INPUT	2	-INPUT (GND)	-INPUT (GND)	3	+OUT	+OUT	4	NC	COMMON	5	-OUT	-OUT	6	CONTROL	CONTROL
Pin No.	Output																							
	Single	Dual																						
1	+INPUT	+INPUT																						
2	-INPUT (GND)	-INPUT (GND)																						
3	+OUT	+OUT																						
4	NC	COMMON																						
5	-OUT	-OUT																						
6	CONTROL	CONTROL																						

Voltage set point accuracy $\pm 2\%$ (max.)
 Line regulation $\pm 1\%$ @10%~full load
 Load regulation $\pm 1 \sim \pm 3\%$ @10%~full load
 Efficiency 80% (typical)
 Short circuit protection continuous, auto-recovery
 Over voltage protection clamp@115~150%
 Shutdown idle current 20mA
 I/O isolation voltage 1000VDC
 I/O isolation resistance 100M Ω (min.) @500VDC
 Working temperature -25~+70°C
 Storage temperature -40~+85°C
 Temp. coefficient $\pm 0.03\%$ / °C (0~60°C)
 Safety standards UL60950-1 approved
 EMC standards EN55022 Class B, EN61000-4-2,3,4,6,8
 Packing 0.02kg ; 300pcs / 7.0kg / 0.97CUFT

Single Output

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
NSD10-12S3	9.8~36	3.3	2500	75
NSD10-12S5	9.8~36	5	2000	75
NSD10-12S9	9.8~36	9	1100	75
NSD10-12S12	9.8~36	12	830	75
NSD10-12S15	9.8~36	15	670	75
NSD10-48S3	22~72	3.3	2500	75
NSD10-48S5	22~72	5	2000	75
NSD10-48S9	22~72	9	1100	75
NSD10-48S12	22~72	12	830	75
NSD10-48S15	22~72	15	670	75

Dual Output

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
NSD10-12D5	9.8~36	± 5	$\pm 50 \sim 1000$	75
NSD10-12D12	9.8~36	± 12	$\pm 20 \sim 420$	75
NSD10-12D15	9.8~36	± 15	$\pm 16 \sim 330$	75
NSD10-48D5	22~72	± 5	$\pm 50 \sim 1000$	75
NSD10-48D12	22~72	± 12	$\pm 20 \sim 420$	75
NSD10-48D15	22~72	± 15	$\pm 16 \sim 330$	75



We provide specification, drawing, test report and more information, please visit our website — <http://www.meanwell.com>



48hrs delivery—

We keep enough stock for 95% of standard models at our 2400m² warehouse. We can arrange prompt delivery within 48hrs.

15W DC-DC Regulated Single and Dual Output



2"x 1.5"x 0.387"

- 4:1 wide input range
- 1500VDC I/O isolation
- Protections: Short circuit / Overload / Over voltage
- Built-in EMI filter
- Output voltage trimming function
- Built-in remote ON/OFF control
- Cooling by free air convection
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

Mechanism	Pin Configuration
Unit: mm(inch) Dimensions (mm/inch): - Overall Width: 50.8 (2) - Overall Height: 38.1 (1.5) - Pin 1 to Pin 8 spacing: 10.16 (0.4) - Pin 1 to Pin 2 spacing: 6.35 (0.25) - Pin 2 to Pin 3 spacing: 10.16 (0.4) - Pin 3 to Pin 4 spacing: 10.16 (0.4) - Pin 4 to Pin 5 spacing: 10.16 (0.4) - Pin 5 to Pin 6 spacing: 10.16 (0.4) - Pin 6 to Pin 7 spacing: 10.16 (0.4) - Pin 7 to Pin 8 spacing: 10.16 (0.4) - Pin 8 to Pin 9 spacing: 10.16 (0.4) - Pin 9 to Pin 10 spacing: 10.16 (0.4) - Pin 10 to Pin 11 spacing: 10.16 (0.4) - Pin 11 to Pin 12 spacing: 10.16 (0.4) - Pin 12 to Pin 13 spacing: 10.16 (0.4) - Pin 13 to Pin 14 spacing: 10.16 (0.4) - Pin 14 to Pin 15 spacing: 10.16 (0.4) - Pin 15 to Pin 16 spacing: 10.16 (0.4) - Pin 16 to Pin 17 spacing: 10.16 (0.4) - Pin 17 to Pin 18 spacing: 10.16 (0.4) - Pin 18 to Pin 19 spacing: 10.16 (0.4) - Pin 19 to Pin 20 spacing: 10.16 (0.4) - Pin 20 to Pin 21 spacing: 10.16 (0.4) - Pin 21 to Pin 22 spacing: 10.16 (0.4) - Pin 22 to Pin 23 spacing: 10.16 (0.4) - Pin 23 to Pin 24 spacing: 10.16 (0.4) - Pin 24 to Pin 25 spacing: 10.16 (0.4) - Pin 25 to Pin 26 spacing: 10.16 (0.4) - Pin 26 to Pin 27 spacing: 10.16 (0.4) - Pin 27 to Pin 28 spacing: 10.16 (0.4) - Pin 28 to Pin 29 spacing: 10.16 (0.4) - Pin 29 to Pin 30 spacing: 10.16 (0.4) - Pin 30 to Pin 31 spacing: 10.16 (0.4) - Pin 31 to Pin 32 spacing: 10.16 (0.4) - Pin 32 to Pin 33 spacing: 10.16 (0.4) - Pin 33 to Pin 34 spacing: 10.16 (0.4) - Pin 34 to Pin 35 spacing: 10.16 (0.4) - Pin 35 to Pin 36 spacing: 10.16 (0.4) - Pin 36 to Pin 37 spacing: 10.16 (0.4) - Pin 37 to Pin 38 spacing: 10.16 (0.4) - Pin 38 to Pin 39 spacing: 10.16 (0.4) - Pin 39 to Pin 40 spacing: 10.16 (0.4) - Pin 40 to Pin 41 spacing: 10.16 (0.4) - Pin 41 to Pin 42 spacing: 10.16 (0.4) - Pin 42 to Pin 43 spacing: 10.16 (0.4) - Pin 43 to Pin 44 spacing: 10.16 (0.4) - Pin 44 to Pin 45 spacing: 10.16 (0.4) - Pin 45 to Pin 46 spacing: 10.16 (0.4) - Pin 46 to Pin 47 spacing: 10.16 (0.4) - Pin 47 to Pin 48 spacing: 10.16 (0.4) - Pin 48 to Pin 49 spacing: 10.16 (0.4) - Pin 49 to Pin 50 spacing: 10.16 (0.4) - Pin 50 to Pin 51 spacing: 10.16 (0.4) - Pin 51 to Pin 52 spacing: 10.16 (0.4) - Pin 52 to Pin 53 spacing: 10.16 (0.4) - Pin 53 to Pin 54 spacing: 10.16 (0.4) - Pin 54 to Pin 55 spacing: 10.16 (0.4) - Pin 55 to Pin 56 spacing: 10.16 (0.4) - Pin 56 to Pin 57 spacing: 10.16 (0.4) - Pin 57 to Pin 58 spacing: 10.16 (0.4) - Pin 58 to Pin 59 spacing: 10.16 (0.4) - Pin 59 to Pin 60 spacing: 10.16 (0.4) - Pin 60 to Pin 61 spacing: 10.16 (0.4) - Pin 61 to Pin 62 spacing: 10.16 (0.4) - Pin 62 to Pin 63 spacing: 10.16 (0.4) - Pin 63 to Pin 64 spacing: 10.16 (0.4) - Pin 64 to Pin 65 spacing: 10.16 (0.4) - Pin 65 to Pin 66 spacing: 10.16 (0.4) - Pin 66 to Pin 67 spacing: 10.16 (0.4) - Pin 67 to Pin 68 spacing: 10.16 (0.4) - Pin 68 to Pin 69 spacing: 10.16 (0.4) - Pin 69 to Pin 70 spacing: 10.16 (0.4) - Pin 70 to Pin 71 spacing: 10.16 (0.4) - Pin 71 to Pin 72 spacing: 10.16 (0.4) - Pin 72 to Pin 73 spacing: 10.16 (0.4) - Pin 73 to Pin 74 spacing: 10.16 (0.4) - Pin 74 to Pin 75 spacing: 10.16 (0.4) - Pin 75 to Pin 76 spacing: 10.16 (0.4) - Pin 76 to Pin 77 spacing: 10.16 (0.4) - Pin 77 to Pin 78 spacing: 10.16 (0.4) - Pin 78 to Pin 79 spacing: 10.16 (0.4) - Pin 79 to Pin 80 spacing: 10.16 (0.4) - Pin 80 to Pin 81 spacing: 10.16 (0.4) - Pin 81 to Pin 82 spacing: 10.16 (0.4) - Pin 82 to Pin 83 spacing: 10.16 (0.4) - Pin 83 to Pin 84 spacing: 10.16 (0.4) - Pin 84 to Pin 85 spacing: 10.16 (0.4) - Pin 85 to Pin 86 spacing: 10.16 (0.4) - Pin 86 to Pin 87 spacing: 10.16 (0.4) - Pin 87 to Pin 88 spacing: 10.16 (0.4) - Pin 88 to Pin 89 spacing: 10.16 (0.4) - Pin 89 to Pin 90 spacing: 10.16 (0.4) - Pin 90 to Pin 91 spacing: 10.16 (0.4) - Pin 91 to Pin 92 spacing: 10.16 (0.4) - Pin 92 to Pin 93 spacing: 10.16 (0.4) - Pin 93 to Pin 94 spacing: 10.16 (0.4) - Pin 94 to Pin 95 spacing: 10.16 (0.4) - Pin 95 to Pin 96 spacing: 10.16 (0.4) - Pin 96 to Pin 97 spacing: 10.16 (0.4) - Pin 97 to Pin 98 spacing: 10.16 (0.4) - Pin 98 to Pin 99 spacing: 10.16 (0.4) - Pin 99 to Pin 100 spacing: 10.16 (0.4) - Pin 100 to Pin 101 spacing: 10.16 (0.4) - Pin 101 to Pin 102 spacing: 10.16 (0.4) - Pin 102 to Pin 103 spacing: 10.16 (0.4) - Pin 103 to Pin 104 spacing: 10.16 (0.4) - Pin 104 to Pin 105 spacing: 10.16 (0.4) - Pin 105 to Pin 106 spacing: 10.16 (0.4) - Pin 106 to Pin 107 spacing: 10.16 (0.4) - Pin 107 to Pin 108 spacing: 10.16 (0.4) - Pin 108 to Pin 109 spacing: 10.16 (0.4) - Pin 109 to Pin 110 spacing: 10.16 (0.4) - Pin 110 to Pin 111 spacing: 10.16 (0.4) - Pin 111 to Pin 112 spacing: 10.16 (0.4) - Pin 112 to Pin 113 spacing: 10.16 (0.4) - Pin 113 to Pin 114 spacing: 10.16 (0.4) - Pin 114 to Pin 115 spacing: 10.16 (0.4) - Pin 115 to Pin 116 spacing: 10.16 (0.4) - Pin 116 to Pin 117 spacing: 10.16 (0.4) - Pin 117 to Pin 118 spacing: 10.16 (0.4) - Pin 118 to Pin 119 spacing: 10.16 (0.4) - Pin 119 to Pin 120 spacing: 10.16 (0.4) - Pin 120 to Pin 121 spacing: 10.16 (0.4) - Pin 121 to Pin 122 spacing: 10.16 (0.4) - Pin 122 to Pin 123 spacing: 10.16 (0.4) - Pin 123 to Pin 124 spacing: 10.16 (0.4) - Pin 124 to Pin 125 spacing: 10.16 (0.4) - Pin 125 to Pin 126 spacing: 10.16 (0.4) - Pin 126 to Pin 127 spacing: 10.16 (0.4) - Pin 127 to Pin 128 spacing: 10.16 (0.4) - Pin 128 to Pin 129 spacing: 10.16 (0.4) - Pin 129 to Pin 130 spacing: 10.16 (0.4) - Pin 130 to Pin 131 spacing: 10.16 (0.4) - Pin 131 to Pin 132 spacing: 10.16 (0.4) - Pin 132 to Pin 133 spacing: 10.16 (0.4) - Pin 133 to Pin 134 spacing: 10.16 (0.4) - Pin 134 to Pin 135 spacing: 10.16 (0.4) - Pin 135 to Pin 136 spacing: 10.16 (0.4) - Pin 136 to Pin 137 spacing: 10.16 (0.4) - Pin 137 to Pin 138 spacing: 10.16 (0.4) - Pin 138 to Pin 139 spacing: 10.16 (0.4) - Pin 139 to Pin 140 spacing: 10.16 (0.4) - Pin 140 to Pin 141 spacing: 10.16 (0.4) - Pin 141 to Pin 142 spacing: 10.16 (0.4) - Pin 142 to Pin 143 spacing: 10.16 (0.4) - Pin 143 to Pin 144 spacing: 10.16 (0.4) - Pin 144 to Pin 145 spacing: 10.16 (0.4) - Pin 145 to Pin 146 spacing: 10.16 (0.4) - Pin 146 to Pin 147 spacing: 10.16 (0.4) - Pin 147 to Pin 148 spacing: 10.16 (0.4) - Pin 148 to Pin 149 spacing: 10.16 (0.4) - Pin 149 to Pin 150 spacing: 10.16 (0.4) - Pin 150 to Pin 151 spacing: 10.16 (0.4) - Pin 151 to Pin 152 spacing: 10.16 (0.4) - Pin 152 to Pin 153 spacing: 10.16 (0.4) - Pin 153 to Pin 154 spacing: 10.16 (0.4) - Pin 154 to Pin 155 spacing: 10.16 (0.4) - Pin 155 to Pin 156 spacing: 10.16 (0.4) - Pin 156 to Pin 157 spacing: 10.16 (0.4) - Pin 157 to Pin 158 spacing: 10.16 (0.4) - Pin 158 to Pin 159 spacing: 10.16 (0.4) - Pin 159 to Pin 160 spacing: 10.16 (0.4) - Pin 160 to Pin 161 spacing: 10.16 (0.4) - Pin 161 to Pin 162 spacing: 10.16 (0.4) - Pin 162 to Pin 163 spacing: 10.16 (0.4) - Pin 163 to Pin 164 spacing: 10.16 (0.4) - Pin 164 to Pin 165 spacing: 10.16 (0.4) - Pin 165 to Pin 166 spacing: 10.16 (0.4) - Pin 166 to Pin 167 spacing: 10.16 (0.4) - Pin 167 to Pin 168 spacing: 10.16 (0.4) - Pin 168 to Pin 169 spacing: 10.16 (0.4) - Pin 169 to Pin 170 spacing: 10.16 (0.4) - Pin 170 to Pin 171 spacing: 10.16 (0.4) - Pin 171 to Pin 172 spacing: 10.16 (0.4) - Pin 172 to Pin 173 spacing: 10.16 (0.4) - Pin 173 to Pin 174 spacing: 10.16 (0.4) - Pin 174 to Pin 175 spacing: 10.16 (0.4) - Pin 175 to Pin 176 spacing: 10.16 (0.4) - Pin 176 to Pin 177 spacing: 10.16 (0.4) - Pin 177 to Pin 178 spacing: 10.16 (0.4) - Pin 178 to Pin 179 spacing: 10.16 (0.4) - Pin 179 to Pin 180 spacing: 10.16 (0.4) - Pin 180 to Pin 181 spacing: 10.16 (0.4) - Pin 181 to Pin 182 spacing: 10.16 (0.4) - Pin 182 to Pin 183 spacing: 10.16 (0.4) - Pin 183 to Pin 184 spacing: 10.16 (0.4) - Pin 184 to Pin 185 spacing: 10.16 (0.4) - Pin 185 to Pin 186 spacing: 10.16 (0.4) - Pin 186 to Pin 187 spacing: 10.16 (0.4) - Pin 187 to Pin 188 spacing: 10.16 (0.4) - Pin 188 to Pin 189 spacing: 10.16 (0.4) - Pin 189 to Pin 190 spacing: 10.16 (0.4) - Pin 190 to Pin 191 spacing: 10.16 (0.4) - Pin 191 to Pin 192 spacing: 10.16 (0.4) - Pin 192 to Pin 193 spacing: 10.16 (0.4) - Pin 193 to Pin 194 spacing: 10.16 (0.4) - Pin 194 to Pin 195 spacing: 10.16 (0.4) - Pin 195 to Pin 196 spacing: 10.16 (0.4) - Pin 196 to Pin 197 spacing: 10.16 (0.4) - Pin 197 to Pin 198 spacing: 10.16 (0.4) - Pin 198 to Pin 199 spacing: 10.16 (0.4) - Pin 199 to Pin 200 spacing: 10.16 (0.4) - Pin 200 to Pin 201 spacing: 10.16 (0.4) - Pin 201 to Pin 202 spacing: 10.16 (0.4) - Pin 202 to Pin 203 spacing: 10.16 (0.4) - Pin 203 to Pin 204 spacing: 10.16 (0.4) - Pin 204 to Pin 205 spacing: 10.16 (0.4) - Pin 205 to Pin 206 spacing: 10.16 (0.4) - Pin 206 to Pin 207 spacing: 10.16 (0.4) - Pin 207 to Pin 208 spacing: 10.16 (0.4) - Pin 208 to Pin 209 spacing: 10.16 (0.4) - Pin 209 to Pin 210 spacing: 10.16 (0.4) - Pin 210 to Pin 211 spacing: 10.16 (0.4) - Pin 211 to Pin 212 spacing: 10.16 (0.4) - Pin 212 to Pin 213 spacing: 10.16 (0.4) - Pin 213 to Pin 214 spacing: 10.16 (0.4) - Pin 214 to Pin 215 spacing: 10.16 (0.4) - Pin 215 to Pin 216 spacing: 10.16 (0.4) - Pin 216 to Pin 217 spacing: 10.16 (0.4) - Pin 217 to Pin 218 spacing: 10.16 (0.4) - Pin 218 to Pin 219 spacing: 10.16 (0.4) - Pin 219 to Pin 220 spacing: 10.16 (0.4) - Pin 220 to Pin 221 spacing: 10.16 (0.4) - Pin 221 to Pin 222 spacing: 10.16 (0.4) - Pin 222 to Pin 223 spacing: 10.16 (0.4) - Pin 223 to Pin 224 spacing: 10.16 (0.4) - Pin 224 to Pin 225 spacing: 10.16 (0.4) - Pin 225 to Pin 226 spacing: 10.16 (0.4) - Pin 226 to Pin 227 spacing: 10.16 (0.4) - Pin 227 to Pin 228 spacing: 10.16 (0.4) - Pin 228 to Pin 229 spacing: 10.16 (0.4) - Pin 229 to Pin 230 spacing: 10.16 (0.4) - Pin 230 to Pin 231 spacing: 10.16 (0.4) - Pin 231 to Pin 232 spacing: 10.16 (0.4) - Pin 232 to Pin 233 spacing: 10.16 (0.4) - Pin 233 to Pin 234 spacing: 10.16 (0.4) - Pin 234 to Pin 235 spacing: 10.16 (0.4) - Pin 235 to Pin 236 spacing: 10.16 (0.4) - Pin 236 to Pin 237 spacing: 10.16 (0.4) - Pin 237 to Pin 238 spacing: 10.16 (0.4) - Pin 238 to Pin 239 spacing: 10.16 (0.4) - Pin 239 to Pin 240 spacing: 10.16 (0.4) - Pin 240 to Pin 241 spacing: 10.16 (0.4) - Pin 241 to Pin 242 spacing: 10.16 (0.4) - Pin 242 to Pin 243 spacing: 10.16 (0.4) - Pin 243 to Pin 244 spacing: 10.16 (0.4) - Pin 244 to Pin 245 spacing: 10.16 (0.4) - Pin 245 to Pin 246 spacing: 10.16 (0.4) - Pin 246 to Pin 247 spacing: 10.16 (0.4) - Pin 247 to Pin 248 spacing: 10.16 (0.4) - Pin 248 to Pin 249 spacing: 10.16 (0.4) - Pin 249 to Pin 250 spacing: 10.16 (0.4) - Pin 250 to Pin 251 spacing: 10.16 (0.4) - Pin 251 to Pin 252 spacing: 10.16 (0.4) - Pin 252 to Pin 253 spacing: 10.16 (0.4) - Pin 253 to Pin 254 spacing: 10.16 (0.4) - Pin 254 to Pin 255 spacing: 10.16 (0.4) - Pin 255 to Pin 256 spacing: 10.16 (0.4) - Pin 256 to Pin 257 spacing: 10.16 (0.4) - Pin 257 to Pin 258 spacing: 10.16 (0.4) - Pin 258 to Pin 259 spacing: 10.16 (0.4) - Pin 259 to Pin 260 spacing: 10.16 (0.4) - Pin 260 to Pin 261 spacing: 10.16 (0.4) - Pin 261 to Pin 262 spacing: 10.16 (0.4) - Pin 262 to Pin 263 spacing: 10.16 (0.4) - Pin 263 to Pin 264 spacing: 10.16 (0.4) - Pin 264 to Pin 265 spacing: 10.16 (0.4) - Pin 265 to Pin 266 spacing: 10.16 (0.4) - Pin 266 to Pin 267 spacing: 10.16 (0.4) - Pin 267 to Pin 268 spacing: 10.16 (0.4) - Pin 268 to Pin 269 spacing: 10.16 (0.4) - Pin 269 to Pin 270 spacing: 10.16 (0.4) - Pin 270 to Pin 271 spacing: 10.16 (0.4) - Pin 271 to Pin 272 spacing: 10.16 (0.4) - Pin 272 to Pin 273 spacing: 10.16 (0.4) - Pin 273 to Pin 274 spacing: 10.16 (0.4) - Pin 274 to Pin 275 spacing: 10.16 (0.4) - Pin 275 to Pin 276 spacing: 10.16 (0.4) - Pin 276 to Pin 277 spacing: 10.16 (0.4) - Pin 277 to Pin 278 spacing: 10.16 (0.4) - Pin 278 to Pin 279 spacing: 10.16 (0.4) - Pin 279 to Pin 280 spacing: 10.16 (0.4) - Pin 280 to Pin 281 spacing: 10.16 (0.4) - Pin 281 to Pin 282 spacing: 10.16 (0.4) - Pin 282 to Pin 283 spacing: 10.16 (0.4) - Pin 283 to Pin 284 spacing: 10.16 (0.4) - Pin 284 to Pin 285 spacing: 10.16 (0.4) - Pin 285 to Pin 286 spacing: 10.16 (0.4) - Pin 286 to Pin 287 spacing: 10.16 (0.4) - Pin 287 to Pin 288 spacing: 10.16 (0.4) - Pin 288 to Pin 289 spacing: 10.16 (0.4) - Pin 289 to Pin 290 spacing: 10.16 (0.4) - Pin 290 to Pin 291 spacing: 10.16 (0.4) - Pin 291 to Pin 292 spacing: 10.16 (0.4) - Pin 292 to Pin 293 spacing: 10.16 (0.4) - Pin 293 to Pin 294 spacing: 10.16 (0.4) - Pin 294 to Pin 295 spacing: 10.16 (0.4) - Pin 295 to Pin 296 spacing: 10.16 (0.4) - Pin 296 to Pin 297 spacing: 10.16 (0.4) - Pin 297 to Pin 298 spacing: 10.16 (0.4) - Pin 298 to Pin 299 spacing: 10.16 (0.4) - Pin 299 to Pin 300 spacing: 10.16 (0.4) - Pin 300 to Pin 301 spacing: 10.16 (0.4) - Pin 301 to Pin 302 spacing: 10.16 (0.4) - Pin 302 to Pin 303 spacing: 10.16 (0.4) - Pin 303 to Pin 304 spacing: 10.16 (0.4) - Pin 304 to Pin 305 spacing: 10.16 (0.4) - Pin 305 to Pin 306 spacing: 10.16 (0.4) - Pin 306 to Pin 307 spacing: 10.16 (0.4) - Pin 307 to Pin 308 spacing: 10.16 (0.4) - Pin 308 to Pin 309 spacing: 10.16 (0.4) - Pin 309 to Pin 310 spacing: 10.16 (0.4) - Pin 310 to Pin 311 spacing: 10.16 (0.4) - Pin 311 to Pin 312 spacing: 10.16 (0.4) - Pin 312 to Pin 313 spacing: 10.16 (0.4) - Pin 313 to Pin 314 spacing: 10.16 (0.4) - Pin 314 to Pin 315 spacing: 10.16 (0.4) - Pin 315 to Pin 316 spacing: 10.16 (0.4) - Pin 316 to Pin 317 spacing: 10.16 (0.4) - Pin 317 to Pin 318 spacing: 10.16 (0.4) - Pin 318 to Pin 319 spacing: 10.16 (0.4) - Pin 319 to Pin 320 spacing: 10.16 (0.4) - Pin 320 to Pin 321 spacing: 10.16 (0.4) - Pin 321 to Pin 322 spacing: 10.16 (0.4) - Pin 322 to Pin 323 spacing: 10.16 (0.4) - Pin 323 to Pin 324 spacing: 10.16 (0.4) - Pin 324 to Pin 325 spacing: 10.16 (0.4) - Pin 325 to Pin 326 spacing: 10.16 (0.4) - Pin 326 to Pin 327 spacing: 10.16 (0.4) - Pin 327 to Pin 328 spacing: 10.16 (0.4) - Pin 328 to Pin 329 spacing: 10.16 (0.4) - Pin 329 to Pin 330 spacing: 10.16 (0.4) - Pin 330 to Pin 331 spacing: 10.16 (0.4) - Pin 331 to Pin 332 spacing: 10.16 (0.4) - Pin 332 to Pin 333 spacing: 10.16 (0.4) - Pin 333 to Pin 334 spacing: 10.16 (0.4) - Pin 334 to Pin 335 spacing: 10.16 (0.4) - Pin 335 to Pin 336 spacing: 10.16 (0.4) - Pin 336 to Pin 337 spacing: 10.16 (0.4) - Pin 337 to Pin 338 spacing: 10.16 (0.4) - Pin 338 to Pin 339 spacing: 10.16 (0.4) - Pin 339 to Pin 340 spacing: 10.16 (0.4) - Pin 340 to Pin 341 spacing: 10.16 (0.4) - Pin 341 to Pin 342 spacing: 10.16 (0.4) - Pin 342 to Pin 343 spacing: 10.16 (0.4) - Pin 343 to Pin 344 spacing: 10.16 (0.4) - Pin 344 to Pin 345 spacing: 10.16 (0.4) - Pin 345 to Pin 346 spacing: 10.16 (0.4) - Pin 346 to Pin 347 spacing: 10.16 (0.4) - Pin 347 to Pin 348 spacing: 10.16 (0.4) - Pin 348 to Pin 349 spacing: 10.16 (0.4) - Pin 349 to Pin 350 spacing: 10.16 (0.4) - Pin 350 to Pin 351 spacing: 10.16 (0.4) - Pin 351 to Pin 352 spacing: 10.16 (0.4) - Pin 352 to Pin 353 spacing: 10.16 (0.4) - Pin 353 to Pin 354 spacing: 10.16 (0.4) - Pin 354 to Pin 355 spacing: 10.16 (0.4) - Pin 355 to Pin 356 spacing: 10.16 (0.4) - Pin 356 to Pin 357 spacing: 10.16 (0.4) - Pin 357 to Pin 358 spacing: 10.16 (0.4) - Pin 358 to Pin 359 spacing: 10.16 (0.4) - Pin 359 to Pin 360 spacing: 10.16 (0.4) - Pin 360 to Pin 361 spacing: 10.16 (0.4) - Pin 361 to Pin 362 spacing: 10.16 (0.4) - Pin 362 to Pin 363 spacing: 10.16 (0.4) - Pin 363 to Pin 364 spacing: 10.16 (0.4) - Pin 364 to Pin 365 spacing: 10.16 (0.4) - Pin 365 to Pin 366 spacing: 10.16 (0.4) - Pin 366 to Pin 367 spacing: 10.16 (0.4) - Pin 367 to Pin 368 spacing: 10.16 (0.4) - Pin 368 to Pin 369 spacing: 10.16 (0.4) - Pin 369 to Pin 370 spacing: 10.16 (0.4) - Pin 370 to Pin 371 spacing: 10.16 (0.4) - Pin 371 to Pin 372 spacing: 10.16 (0.4) - Pin 372 to Pin 373 spacing: 10.16 (0.4) - Pin 373 to Pin 374 spacing: 10.16 (0.4) - Pin 374 to Pin 375 spacing: 10.16 (0.4) - Pin 375 to Pin 376 spacing: 10.16 (0.4) - Pin 376 to Pin 377 spacing: 10.16 (0.4) - Pin 377 to Pin 378 spacing: 10.16 (0.4) - Pin 378 to Pin 379 spacing: 10.16 (0.4) - Pin 379 to Pin 380 spacing: 10.16 (0.4) - Pin 380 to Pin 381 spacing: 10.16 (0.4) - Pin 381 to Pin 382 spacing: 10.16 (0.4) - Pin 382 to Pin 383 spacing: 10.16 (0.4) - Pin 383 to Pin 384 spacing: 10.16 (0.4) - Pin 384 to Pin 385 spacing: 10.16 (0.4) - Pin 385 to Pin 386 spacing: 10.16 (0.4) - Pin 386 to Pin 387 spacing: 10.16 (0.4) - Pin 387 to Pin 388 spacing: 10.16 (0.4) - Pin 388 to Pin 389 spacing: 10.16 (0.4) - Pin 389 to Pin 390 spacing: 10.16 (0.4) - Pin 390 to Pin 391 spacing: 10.16 (0.4) - Pin 391 to Pin 392 spacing: 10.16 (0.4) - Pin 392 to Pin 393 spacing: 10.16 (0.4) - Pin 393 to Pin 394 spacing: 10.16 (0.4) - Pin 394 to Pin 395 spacing: 10.16 (0.4) - Pin 395 to Pin 396 spacing: 10.16 (0.4) - Pin 396 to Pin 397 spacing: 10.16 (0.4) - Pin 397 to Pin 398 spacing: 10.16 (0.4) - Pin 398 to Pin 399 spacing: 10.16 (0.4) - Pin 399 to Pin 400 spacing: 10.16 (0.4) - Pin 400 to Pin 401 spacing: 10.16 (0.4) - Pin 401 to Pin 402 spacing: 10.16 (0.4) - Pin 402 to Pin 403 spacing: 10.16 (0.4) - Pin 403 to Pin 404 spacing: 10.16 (0.4) - Pin 404 to Pin 405 spacing: 10.16 (0.4) - Pin 405 to Pin 406 spacing: 10.16 (0.4) - Pin 406 to Pin 407 spacing: 10.16 (0.4) - Pin 407 to Pin 408 spacing: 10.16 (0.4) - Pin 408 to Pin 409 spacing: 10.16 (0.4) - Pin 409 to Pin 410 spacing: 10.16 (0.4) - Pin 410 to Pin 411 spacing: 10.16 (0.4) - Pin 411 to Pin 412 spacing: 10.16 (0.4) - Pin 412 to Pin 413 spacing: 10.16 (0.4) - Pin 413 to Pin 414 spacing: 10.16 (0.4) - Pin 414 to Pin 415 spacing: 10.16 (0.4) - Pin 415 to Pin 416 spacing: 10.16 (0.4) - Pin 416 to Pin 417 spacing: 10.16 (0.4) - Pin 417 to Pin 418 spacing: 10.16 (0.4) - Pin 418 to Pin 419 spacing: 10.16 (0.4) - Pin 419 to Pin 420 spacing: 10.16 (0.4) - Pin 420 to Pin 421 spacing: 10.16 (0.4) - Pin 421 to Pin 422 spacing: 10.16 (0.4) - Pin 422 to Pin 423 spacing: 10.16 (0.4) - Pin 423 to Pin 424 spacing: 10.16 (0.4) - Pin 424 to Pin 425 spacing: 10.16 (0.4) - Pin 425 to Pin 426 spacing: 10.16 (0.4) - Pin 426 to Pin 427 spacing: 10.16 (0.4) - Pin 427 to Pin 428 spacing: 10.16 (0.4) - Pin 428 to Pin 429 spacing: 10.16 (0.4) - Pin 429 to Pin 430 spacing: 10.16 (0.4) - Pin 430 to Pin 431 spacing: 10.16 (0.4) - Pin 431 to Pin 432 spacing: 10.16 (0.4) - Pin 432 to Pin 433 spacing: 10.16 (0.4) - Pin 433 to Pin 434 spacing: 10.16 (0.4) - Pin 434 to Pin 435 spacing: 10.16 (0.4) - Pin 435 to Pin 436 spacing: 10.16 (0.4) - Pin 436 to Pin 437 spacing: 10.16 (0.4) - Pin 437 to Pin 438 spacing: 10.16 (0.4) - Pin 438 to Pin 439 spacing: 10.16 (0.4) - Pin 439 to Pin 440 spacing: 10.16 (0.4) - Pin 440 to Pin 441 spacing: 10.16 (0.4) - Pin 441 to Pin 442 spacing: 10.16 (0.4) - Pin 442 to Pin 443 spacing: 10.16 (0.4) - Pin 443 to Pin 444 spacing: 10.16 (0.4) - Pin 444 to Pin 445 spacing: 10.1	

Voltage set point accuracy	±2% (max.)
Line regulation	±1% @10%~full load
Load regulation	±1~±3% @10%~full load
Efficiency	85% (typical)
Short circuit protection	continuous, auto-recovery
Over voltage protection	clamp@115~150%
Shutdown idle current	20mA
I/O isolation voltage	1500VDC
I/O isolation resistance	100MΩ (min.) @500VDC
Working temperature	-25~+70°C
Storage temperature	-40~+85°C
Temp. coefficient	±0.03% / °C(0~50°C)
Safety standards	UL60950-1 approved
EMC standards	EN55022 Class B, EN61000-4-2,3,4,6,8
Packing	0.03kg ; 180pcs / 6.4kg / 0.97CUFT

Single Output


Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
NSD15-12S3	9.4~36	3.3	3750	100
NSD15-12S5	9.4~36	5	3000	75
NSD15-12S12	9.4~36	12	1250	75
NSD15-12S15	9.4~36	15	1000	75
NSD15-48S3	18~72	3.3	3750	100
NSD15-48S5	18~72	5	3000	75
NSD15-48S12	18~72	12	1250	75
NSD15-48S15	18~72	15	1000	75

Dual Output

Model No.	Input (VDC)	Output (VDC)	Current (mA)	R&N (mVp-p)
NSD15-12D5	9.4~36	±5	±70~1500	100
NSD15-12D12	9.4~36	±12	±30~620	100
NSD15-12D15	9.4~36	±15	±20~500	100
NSD15-48D5	18~72	±5	±70~1500	100
NSD15-48D12	18~72	±12	±30~620	100
NSD15-48D15	18~72	±15	±20~500	100

12.5~60W Single Output Non-isolated DC-DC Converter

- Non-isolated, fix-frequency at 250kHz
- 3:1 wide input range for 5~15V output
- ±2% output voltage accuracy
- **High efficiency up to 96%**
- Built-in remote ON/OFF control
- Compact size
- Cooling by free air convection
- **Economical open frame design**
- Protections: Short circuit / Overload / Over voltage
- 2 years warranty

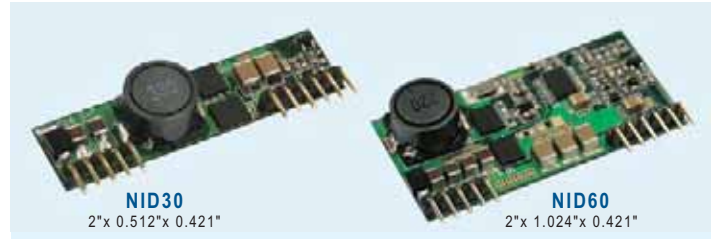

NID30
2"x 0.512"x 0.421"

NID60
2"x 1.024"x 0.421"

NID30 Series

Mechanism	Pin Configuration												
Unit: mm(inch)	<table> <tr> <th>Pin No.</th><th>Output</th></tr> <tr> <td>1,2,3,4</td><td>+Vout</td></tr> <tr> <td>5,6</td><td>COM</td></tr> <tr> <td>7,8</td><td>+Vin</td></tr> <tr> <td>9,10</td><td>N.C.</td></tr> <tr> <td>11</td><td>R.C.</td></tr> </table>	Pin No.	Output	1,2,3,4	+Vout	5,6	COM	7,8	+Vin	9,10	N.C.	11	R.C.
Pin No.	Output												
1,2,3,4	+Vout												
5,6	COM												
7,8	+Vin												
9,10	N.C.												
11	R.C.												

NID60 Series

Mechanism	Pin Configuration												
Unit: mm(inch)	<table> <tr> <th>Pin No.</th><th>Output</th></tr> <tr> <td>1,2,3,4</td><td>+Vout</td></tr> <tr> <td>5,6</td><td>COM</td></tr> <tr> <td>7,8</td><td>+Vin</td></tr> <tr> <td>9,10</td><td>N.C.</td></tr> <tr> <td>11</td><td>R.C.</td></tr> </table>	Pin No.	Output	1,2,3,4	+Vout	5,6	COM	7,8	+Vin	9,10	N.C.	11	R.C.
Pin No.	Output												
1,2,3,4	+Vout												
5,6	COM												
7,8	+Vin												
9,10	N.C.												
11	R.C.												

Voltage set point accuracy	±2% (max.)
Line regulation	±0.5%
Load regulation	±0.5% @ 10~100% load
Efficiency	96% (typical)
Short circuit protection	Continuous, auto-recovery
Overload protection	120%~300%, auto-recovery
Over voltage protection	Clamp by TVS Diode
Working temperature	-40~+65°C (refer to derating curve)
Storage temperature	-40~+105°C
Temp. coefficient	±0.03% / °C(0~50°C)

NID30 Series

Model No.	Input	Output	R&N	Effi
NID30S24-05	20~53V	5V, 0~2.50A	100mV	91%
NID30S24-12	20~53V	12V, 0~2.50A	120mV	95%
NID30S24-15	20~53V	15V, 0~2.00A	150mV	96%
NID30S48-24	30~53V	24V, 0~1.25A	200mV	93%

NID60 Series


Model No.	Input	Output	R&N	Effi
NID60S24-05	20~53V	5V, 0~4.0A	100mV	90%
NID60S24-12	20~53V	12V, 0~4.0A	120mV	95%
NID60S24-15	20~53V	15V, 0~4.0A	150mV	96%
NID60S48-24	30~53V	24V, 0~2.5A	200mV	95%

5W Single Output DC-DC Converter

- 2:1 wide input range
- 2000VAC I/O isolation
- Protections: Short circuit / Overload / Over voltage / Over temp.
- Built-in EMI filter, low ripple noise
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty



75x 40x 20 mm

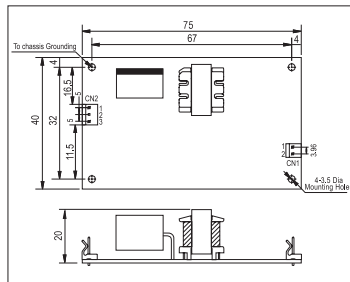

Line and load regulation ... $\pm 1.0\%$ (max.)
 Overload protection >105% fold back current limiting, auto-recovery
 Over voltage protection 115%~135% rated output voltage
 Withstand voltage I/P-O/P: 2kVAC, I/P-FG: 1.5kVAC, 1 minute
 Isolation resistance 100M Ω (min.) @500VDC
 Working temperature -10°C to +60°C (refer to output derating curve)
 Safety standards Meet LVD
 EMC standards EN55022 class B, EN61000-4-2,3,4,6,8, ENV50204
 Connection 3P, 2P / 3.96mm pitch, Molex 5285-03, 5273-02
 Packing 0.05kg ; 120pcs / 6.25kg / 1.0CUFT


Model No.	Input	Output	R&N	Effi.
PSD-05-5	36~72V	5V, 0~1.0A	50mV	75%
PSD-05-12	36~72V	12V, 0~0.45A	100mV	78%
PSD-05-24	36~72V	24V, 0~0.22A	150mV	78%

15W Single Output DC-DC Converter

- 2:1 wide input range
- 2000VAC I/O isolation
- Protections: Short circuit / Overload / Over voltage / Polarity
- Built-in EMI filter, low ripple noise
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty



94x 49x 25 mm

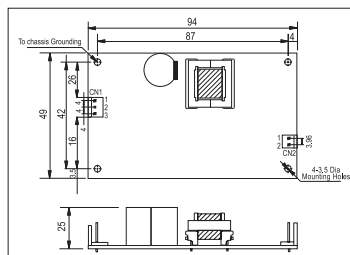

Line and load regulation $\pm 1.0\%$ (max.)
 Overload protection 105%~150% hiccup mode, auto-recovery
 Over voltage protection 115%~135% rated output voltage
 Withstand voltage I/P-O/P: 2kVAC, I/P-FG: 1.5kVAC, 1 minute
 Isolation resistance 100M Ω (min.) @500VDC
 Working temperature -10°C to +60°C (refer to output derating curve)
 Safety standards Meet LVD
 EMC standards EN55022 class B, EN61000-4-2,3,4,6,8, ENV50204
 Connection 3P, 2P / 3.96mm pitch, JST B3P/B2P-VH
 Packing 0.081kg ; 120pcs / 10.72kg

Model No.	Input	Output	R&N	Effi.
PSD-15A-5	9.2~18V	5V, 0~3.0A	50mV	74%
PSD-15A-12	9.2~18V	12V, 0~1.25A	100mV	67%
PSD-15A-24	9.2~18V	24V, 0~0.6A	100mV	72%
PSD-15B-5	18~36V	5V, 0~3.0A	50mV	78%
PSD-15B-12	18~36V	12V, 0~1.25A	100mV	78%
PSD-15B-24	18~36V	24V, 0~0.6A	100mV	78%
PSD-15C-5	36~72V	5V, 0~3.0A	50mV	78%
PSD-15C-12	36~72V	12V, 0~1.25A	100mV	78%
PSD-15C-24	36~72V	24V, 0~0.6A	100mV	79%

30W Single Output DC-DC Converter



101.6x 50.8x 30 mm

- 2:1 wide input range
- Protections: Short circuit / Overload / Over voltage / Reverse polarity
- 1500VAC I/O isolation
- Cooling by free air convection
- Built-in EMI filter, low ripple noise
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

DC adjustment range 5V: 4.5~5.5V, 12V: 11~13.5V, 24V: 22~26V
 Line and load regulation ... $\pm 1\%$ (max.)
 Overload protection 105%~150% fold back current limiting, auto-recovery
 Over voltage protection ... 115%~135% rated output voltage
 Withstand voltage I/P-O/P: 1.5kVAC, I/P-FG: 1.5kVAC, 1 minute
 Working temperature -20~55°C (refer to output derating curve)
 EMC standards EN55022 class B, EN61000-4-2,3,4,6,8, EN55024
 Connection 3P, 4P / 3.96mm pitch, JST B3P/B4P-VH-B

Model No.	Input	Output	R&N	Effi.
PSD-30A-05	9~18V	5V, 0~5.0A	100mV	77%
PSD-30A-12	9~18V	12V, 0~2.5A	120mV	77%
PSD-30A-24	9~18V	24V, 0~1.25A	150mV	78%
PSD-30B-05	18~36V	5V, 0~5.0A	100mV	79%
PSD-30B-12	18~36V	12V, 0~2.5A	120mV	80%
PSD-30B-24	18~36V	24V, 0~1.25A	150mV	83%
PSD-30C-05	36~72V	5V, 0~5.0A	100mV	80%
PSD-30C-12	36~72V	12V, 0~2.5A	120mV	82%
PSD-30C-24	36~72V	24V, 0~1.25A	150mV	83%

45W Single Output DC-DC Converter




127x 76x 30 mm

- 2:1 wide input range
- Protections: Short circuit / Overload / Over voltage / Reverse polarity
- Cooling by free air convection
- Built-in EMI filter, low ripple noise
- 100% full load burn-in test
- Fixed switching frequency at 96kHz
- Low cost
- 2 years warranty

DC adjustment range 5V: 4.5~5.5V, 12V: 10.8~13.2V, 24V: 21.6~26.4V
 Line and load regulation $\pm 1\%$ (max.)
 Overload protection 105%~160% shut down, re-power on to recover
 Over voltage protection 115%~135% rated output voltage
 Withstand voltage I/P-O/P: 1.5kVAC, I/P-FG: 1.5kVAC, 1 minute
 Working temperature -10~60°C (refer to output derating curve)
 Safety standards EN60950-1 CB approved by TUV
 EMC standards EN55022 class B, EN61000-4-2,3,4,6,8, EN55024
 Connection 2P, 6P / 3.96mm pitch, Molex 5277-02, 5273-06
 Packing 0.19kg ; 72pcs / 15.6kg / 1.35CUFT

Model No.	Input	Output	R&N	Effi.
PSD-45A-05	9.2~18V	5V, 0~6.0A	100mV	74%
PSD-45A-12	9.2~18V	12V, 0~2.5A	120mV	79%
PSD-45A-24	9.2~18V	24V, 0~1.25A	150mV	80%
PSD-45B-05	18~36V	5V, 0~9.0A	100mV	77%
PSD-45B-12	18~36V	12V, 0~3.75A	120mV	82%
PSD-45B-24	18~36V	24V, 0~1.875A	150mV	85%
PSD-45C-05	37~72V	5V, 0~9.0A	100mV	80%
PSD-45C-12	37~72V	12V, 0~3.75A	120mV	83%
PSD-45C-24	37~72V	24V, 0~1.875A	150mV	86%

15W Single Output DC-DC Converter



- 2:1 wide input range
- 2000VAC I/O isolation
- Cooling by free air convection
- Protections: Short circuit / Over load / Over voltage
- Built-in EMI filter, low ripple noise
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

CASE: 931A 78x 51x 28 mm

DC adjustment range 5V: 4.75~5.5V, 12V: 10.8~13.2V,
24V: 21.6~26.4V

Line and load regulation $\pm 0.5\%$ (max.)

Overload protection 105%~160% hiccup mode, auto-recovery

Over voltage protection 115%~135% rated output voltage

Withstand voltage I/P-O/P: 2kVAC, I/P-FG: 1.5kVAC, 1 minute

Working temperature -10~+60°C (refer to output derating curve)

Safety standard Meet LVD

EMC standards EN55022 class B, EN61000-4-2,3,4,6,8,
ENV50204

Packing 0.18kg ; 60pcs / 11.8kg

Model No.	Input	Output	R&N	Effi.
SD-15A-5	9.2~18V	5V, 0~3.0A	100mV	68%
SD-15A-12	9.2~18V	12V, 0~1.25A	120mV	72%
SD-15A-24	9.2~18V	24V, 0~0.625A	150mV	70%
SD-15B-5	18~36V	5V, 0~3.0A	100mV	76%
SD-15B-12	18~36V	12V, 0~1.25A	120mV	76%
SD-15B-24	18~36V	24V, 0~0.625A	150mV	77%
SD-15C-5	36~72V	5V, 0~3.0A	100mV	75%
SD-15C-12	36~72V	12V, 0~1.25A	120mV	79%
SD-15C-24	36~72V	24V, 0~0.625A	150mV	78%

25W Single Output DC-DC Converter



- 2:1 wide input range
- 1500VAC I/O isolation
- Protections: Short circuit / Overload / Over voltage
- Built-in EMI filter, low ripple noise
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

CASE: 905 99x 97x 36 mm

DC adjustment range 5V: 4.5~5.5V, 12V: 11~16V, 24V: 23~30V

Line and load regulation $\pm 0.5\%$ (max.)

Overload protection 105%~150% fold back current limiting, auto-recovery

Over voltage protection 115%~165% rated output voltage

Withstand voltage I/P-O/P: 2kVAC, I/P-FG: 1.5kVAC, 1 minute

Isolation resistance 100M Ω (min.) @500VDC

Working temperature -10°C to +60°C (refer to output derating curve)

Safety standards Meet LVD

EMC standards EN55022 class B, EN61000-4-2,3,4,6,8,
ENV50204

Packing 0.38kg ; 45pcs / 17.8kg / 0.9CUFT

Model No.	Input	Output	R&N	Effi.
SD-25A-5	9.2~18V	5V, 0~5.0A	100mV	71%
SD-25A-12	9.2~18V	12V, 0~2.1A	120mV	72%
SD-25A-24	9.2~18V	24V, 0~1.1A	150mV	75%
SD-25B-5	19~36V	5V, 0~5.0A	100mV	72%
SD-25B-12	19~36V	12V, 0~2.1A	120mV	75%
SD-25B-24	19~36V	24V, 0~1.1A	150mV	78%
SD-25C-5	36~72V	5V, 0~5.0A	100mV	74%
SD-25C-12	36~72V	12V, 0~2.1A	120mV	78%
SD-25C-24	36~72V	24V, 0~1.1A	150mV	81%

50W Single Output DC-DC Converter



- 2:1 wide input range
- 1500VAC I/O isolation
- Protections: Short circuit / Over load / Over voltage
- Built-in EMI filter, low ripple noise
- Cooling by free air convection
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

CASE: 901 159x 97x 38 mm

DC adjustment range 5V: 4.5~5.5V, 12V: 11~16V, 24V: 23~30V

Line and load regulation $\pm 0.5\%$ (max.)

Overload protection 105%~150% fold back current limiting, auto-recovery

Over voltage protection 115%~165% rated output voltage

Withstand voltage I/P-O/P: 1.5kVAC, I/P-FG: 1.5kVAC, 1 minute

Isolation resistance 100M Ω (min.) @500VDC

Working temperature -10°C to +60°C (refer to output derating curve)


Safety standard Meet LVD

EMC standards EN55022 class B, EN61000-4-2,3,4,6,8, ENV50204

Packing 0.53kg ; 24pcs / 12.7kg / 0.75CUFT

Model No.	Input	Output	R&N	Effi.
SD-50A-5	9.2~18V	5V, 0~10A	100mV	70%
SD-50A-12	9.2~18V	12V, 0~4.2A	120mV	72%
SD-50A-24	9.2~18V	24V, 0~2.1A	150mV	74%
SD-50B-5	19~36V	5V, 0~10A	100mV	73%
SD-50B-12	19~36V	12V, 0~4.2A	120mV	75%
SD-50B-24	19~36V	24V, 0~2.1A	150mV	80%
SD-50C-5	36~72V	5V, 0~10A	100mV	76%
SD-50C-12	36~72V	12V, 0~4.2A	120mV	78%
SD-50C-24	36~72V	24V, 0~2.1A	150mV	83%

100W Single Output DC-DC Converter



- 2:1 wide input range
- 1500VAC I/O isolation
- Protections: Short circuit / Overload / Over voltage
- Built-in EMI filter, low ripple noise
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

CASE: 902 199x 98x 38 mm

DC adjustment range 5V: 4.5~5.5V, 12V: 11~16V, 24V: 23~30V

Line regulation $\pm 0.5\%$ (max.)

Load regulation $\pm 0.5\%$ (max.)

Overload protection 105%~135% fold back current limiting, auto-recovery

Over voltage protection 115%~165% rated output voltage

Withstand voltage I/P-O/P: 1.5kVAC, I/P-FG: 1.5kVAC, 1 minute

Isolation resistance 100M Ω (min.) @500VDC

Working temperature -10°C to +60°C (refer to output derating curve)

Safety standards Meet LVD, EN60950-1 CB approved by TUV (D type only)

EMC standards EN55022 class B, EN61000-4-2,3,4,6,8, ENV50204

Packing 0.65kg ; 20pcs / 13.8kg / 0.8CUFT

Model No.	Input	Output	R&N	Effi.
SD-100B-5	19~36V	5V, 0~20A	100mV	74%
SD-100B-12	19~36V	12V, 0~8.5A	120mV	75%
SD-100B-24	19~36V	24V, 0~4.2A	150mV	78%
SD-100C-5	36~72V	5V, 0~20A	100mV	75%
SD-100C-12	36~72V	12V, 0~8.5A	120mV	77%
SD-100C-24	36~72V	24V, 0~4.2A	150mV	81%
SD-100D-5	72~144V	5V, 0~20A	100mV	76%
SD-100D-12	72~144V	12V, 0~8.5A	120mV	80%
SD-100D-24	72~144V	24V, 0~4.2A	150mV	83%

150W Single Output DC-DC Converter



CASE: 912B 199x 110x 50 mm

- 2:1 wide input range
- 1500VAC I/O isolation
- Protections: Short circuit / Over load / Over voltage
- Built-in EMI filter, low ripple noise
- Cooling by free air convection
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty

DC adjustment range 12V: 11~16V, 24V: 23~30V
 Line regulation $\pm 0.5\%$ (max.)
 Load regulation $\pm 0.5\%$ (max.)
 Overload protection 105%~135% fold back current limiting, auto-recovery
 Over voltage protection 130%~165% rated output voltage
 Withstand voltage I/P-O/P: 1.5kVAC, I/P-FG: 1.5kVAC, 1 minute
 Isolation resistance 100M Ω (min.) @500VDC
 Working temperature -10°C ~ +60°C (refer to output derating curve)
 Safety standards Meet LVD, EN60950-1 CB approved by TUV (D type only)
 EMC standards EN55022 class B, EN61000-4-2,3,4,6,8, ENV50204
 Packing 0.86kg ; 16pcs / 14.5kg / 0.95CUFT

Model No.	Input	Output	R&N	Effi.
SD-150B-12	19~36V	12V, 0~12.5A	120mV	75%
SD-150B-24	19~36V	24V, 0~6.3A	150mV	77%
SD-150C-12	36~72V	12V, 0~12.5A	120mV	77%
SD-150C-24	36~72V	24V, 0~6.3A	150mV	80%
SD-150D-12	72~144V	12V, 0~12.5A	120mV	79%
SD-150D-24	72~144V	24V, 0~6.3A	150mV	82%

200W Single Output DC-DC Converter



CASE: 912B 215x 115x 50 mm

- 2:1 wide input range
- 1500VAC I/O isolation
- Protections: Short circuit / Overload / Over voltage / Over temp.
- Cooling by free air convection
- 100% full load burn-in test
- 2 years warranty

DC adjustment range 5V: 4.5~5.5V, 12V: 11~16V, 24V: 23~30V, 48V: 43~53V
 Voltage tolerance $\pm 2\%$ (max.)
 Overload protection 105%~135% shut off, re-power on to recover
 Over voltage protection 110%~167% rated output voltage
 Withstand voltage I/P-O/P: 1.5kVAC, I/P-FG: 1.5kVAC, 1 minute
 Working temperature -20°C to +60°C (refer to output derating curve)
 Safety standards Meet LVD, EN60950-1 CB approved by TUV (D type only)
 EMC standards EN55022 class B, EN61000-4-2,3,4,6,8, ENV50204
 Packing 1.1kg ; 12pcs / 14.4kg / 0.92CUFT

Model No.	Input	Output	R&N	Effi.
SD-200B-5	19~36V	5V, 0~34.0A	100mV	79%
SD-200B-12	19~36V	12V, 0~16.7A	120mV	82%
SD-200B-24	19~36V	24V, 0~8.40A	150mV	85%
SD-200B-48	19~36V	48V, 0~4.20A	200mV	86%
SD-200C-5	36~72V	5V, 0~40.0A	100mV	81%
SD-200C-12	36~72V	12V, 0~16.7A	120mV	84%
SD-200C-24	36~72V	24V, 0~8.40A	150mV	86%
SD-200C-48	36~72V	48V, 0~4.20A	200mV	86%
SD-200D-5	72~144V	5V, 0~40.0A	100mV	82%
SD-200D-12	72~144V	12V, 0~16.7A	120mV	82%
SD-200D-24	72~144V	24V, 0~8.40A	150mV	84%
SD-200D-48	72~144V	48V, 0~4.20A	200mV	90%

350W Single Output DC-DC Converter



CASE: 912B 215x 115x 50 mm

- 2:1 wide input range
- 1500VAC I/O isolation
- Protections: Short circuit / Over load / Over voltage / Over temp.
- Forced air cooling by built-in DC fan
- 100% full load burn-in test
- 2 years warranty

DC adjustment range 5V: 4.5~5.5V, 12V: 11~16V, 24V: 23~30V, 48V: 43~53V
 Voltage tolerance $\pm 2\%$ (max.)
 Overload protection 105%~135% shut off, re-power on to recover
 Over voltage protection 110%~167% rated output voltage
 Withstand voltage I/P-O/P: 1.5kVAC, I/P-FG: 1.5kVAC, 1 minute
 Working temperature -20°C ~ +60°C (refer to output derating curve)
 Safety standards Meet LVD, EN60950-1 CB approved by TUV (D type only)
 EMC standards EN55022 class B, EN61000-4-2,3,4,6,8, ENV50204
 Packing 1.1kg ; 12pcs / 14.4kg / 0.92CUFT

Model No.	Input	Output	R&N	Effi.
SD-350B-5	19~36V	5V, 0~57.0A	100mV	74%
SD-350B-12	19~36V	12V, 0~27.5A	120mV	80%
SD-350B-24	19~36V	24V, 0~14.6A	150mV	80%
SD-350B-48	19~36V	48V, 0~7.30A	200mV	84%
SD-350C-5	36~72V	5V, 0~60.0A	100mV	76%
SD-350C-12	36~72V	12V, 0~27.5A	120mV	81%
SD-350C-24	36~72V	24V, 0~14.6A	150mV	81%
SD-350C-48	36~72V	48V, 0~7.30A	200mV	82%
SD-350D-5	72~144V	5V, 0~60.0A	100mV	78%
SD-350D-12	72~144V	12V, 0~29.2A	120mV	83%
SD-350D-24	72~144V	24V, 0~14.6A	150mV	87%
SD-350D-48	72~144V	48V, 0~7.30A	200mV	89%

500W Single Output DC-DC Converter



CASE: 912A 215x 115x 50 mm

- 4:1 & 2:1 DC input range
- DC input active surge current limiting
- Protections: Short circuit / Overload / Over voltage / Over temp. / Input polarity
- 2000VAC I/O Isolation
- Forced air cooling by built-in DC fan with fan speed control function
- Output OK signal
- Built-in remote ON-OFF control
- Built-in remote sense function
- 3 years warranty

DC adjustment range 12V: 11~15V, 24V: 23~30V, 48V: 46~60V
 Line regulation $\pm 0.5\%$ (max.)
 Load regulation $\pm 0.5\%$ (max.)
 Overload protection 105%~125% constant current limiting, shut off after 5 sec., re-power on to recover
 Over voltage protection 130%~160% rated output voltage
 Withstand voltage I/P-O/P: 2kV, I/P-FG: 1.5kV, 1 minute
 Isolation resistance 100M Ω (min.) @500VDC
 Working temperature -20°C ~ +60°C (refer to output derating curve)
 Safety standards IEC60950-1 CB approved by TUV
 EMC standards EN55022 class B, EN61000-4-2,3,4,6,8, ENV50204
 Packing 1.15kg ; 12pcs / 14.8kg / 0.92CUFT

Model No.	Input	Output	R&N	Effi.
SD-500L-12	19~72V	12V, 0~40A	150mV	86%
SD-500L-24	19~72V	24V, 0~21A	150mV	88%
SD-500L-48	19~72V	48V, 0~10.5A	150mV	89%
SD-500H-12	72~144V	12V, 0~40A	150mV	87%
SD-500H-24	72~144V	24V, 0~21A	150mV	89%
SD-500H-48	72~144V	48V, 0~10.5A	150mV	90%

1000W Single Output DC-DC Converter

CBCE



CASE: 952B 295x 127x 41 mm

- 4:1 & 2:1 wide input range
- 2000VAC I/O Isolation
- Protections: Short circuit / Overload / Over voltage / Over temp.
- Forced air cooling by built-in DC fan
- High power density 10.7W/inch³
- 1U low profile 41mm
- Output OK signal
- 12V / 0.25A auxiliary output
- Built-in remote ON/OFF control
- Built-in remote sense function
- 3 years warranty

DC adjustment range 12V: 11~15V, 24V: 23~30V, 48V: 46~60V
 Line regulation $\pm 0.5\%$ (max.)
 Load regulation $\pm 0.5\%$ (max.)
 Overload protection 105%~125% constant current limiting, shut off after 5 sec., re-power on to recover
 Over voltage protection 130%~160% rated output voltage
 Withstand voltage I/P-O/P: 2kV, I/P-FG: 1.5kV, 1 minute
 Isolation resistance 100M Ω (min.) @500VDC
 Working temperature -20~+60°C (refer to output derating curve)
 Safety standards IEC60950-1 CB approved by TUV
 EMC standards EN55022 class B, EN61000-4-2,3,4,6,8, ENV50204
 Packing 1.94kg ; 6pcs / 12.6kg / 0.99CUFT

Model No.	Input	Output	R&N	Effi.
SD-1000L-12	19~72V	12V, 0~60A	150mV	84%
SD-1000L-24	19~72V	24V, 0~40A	150mV	88%
SD-1000L-48	19~72V	48V, 0~21A	150mV	90%
SD-1000H-12	72~144V	12V, 0~60A	150mV	85%
SD-1000H-24	72~144V	24V, 0~40A	150mV	89%
SD-1000H-48	72~144V	48V, 0~21A	150mV	92%

100W Railway Single Output DC-DC Converter

CE



161x 68x 36 mm

- **Comply with EN50155 railway certificate**
- 2:1 wide input range
- 4000VDC I/O isolation
- Protections: Short circuit / Overload / Over voltage / Input reverse polarity
- Cooling by free air convection
- Built-in constant current limiting circuit
- 1U low profile 36mm
- All using 105°C long life electrolytic capacitors
- 100% full load burn-in test
- 3 years warranty

Line regulation $\pm 0.5\%$ (max.)
 Load regulation $\pm 1\%$ (max.)
 Overload protection 105%~135% constant current limiting, recovers automatically after fault condition is removed
 Over voltage protection 115%~135% Shut down o/p voltage, re-power on to recover
 Withstand voltage I/P-O/P: 4kVDC, I/P-FG: 2.5kVDC, O/P-FG: 2.5kVDC
 Isolation resistance 100M Ω (min.) @500VDC
 Working temperature -40~+70°C (refer to output derating curve)
 Safety standards Design refer to UL60950-1, TUV EN60950-1, EN50155
 EMC standards Compliance to EN55022 class B, EN50121-3-2, EN61000-4-2,3,4,6,8; ENV50204

Model No.	Input	Output	R&N	Effi.
RSD-100B	14.4~33.6V	5V, 0~20A	100mV	88.0%
	14.4~33.6V	12V, 0~8.4A	120mV	89.0%
	14.4~33.6V	24V, 0~4.2A	150mV	89.0%
RSD-100C	28.8~67.2V	5V, 0~20A	100mV	89.0%
	28.8~67.2V	12V, 0~8.4A	120mV	91.0%
	28.8~67.2V	24V, 0~4.2A	150mV	91.0%
RSD-100D	57.6~144V	5V, 0~20A	100mV	89.5%
	57.6~144V	12V, 0~8.4A	120mV	91.0%
	57.6~144V	24V, 0~4.2A	150mV	90.0%

500W DC/AC Modified Sine Wave Inverter with MPPT Solar Charger

FCC/CE pending



205x 158x 67 mm

- Output waveform: Modified sine wave
- **Built-in MPPT solar charger**
- High surge power up to 1000W
- High efficiency up to 88%
- High frequency design
- Cooling fan ON-OFF control
- AC output voltage regulation: $\pm 10\%$
- Protections:
 - Battery low alarm / Battery low shutdown / Overload / Over temp. / Output short / Input polarity reverse
- Power ON-OFF switch
- LED indicator for operation status
- Modified models available:
 - 100/115/120VAC or 200/220/240VAC
- 2 years warranty

DC input rated voltage 12VDC, 24VDC or 48VDC
 AC output voltage/Frequency 110VAC/60Hz or 230VAC/50Hz
 Rated output power 500W (350W for 12VDC input)
 Maximum output power (30 cycles) 1000W (700W for 12VDC input)
 AC output regulation (Typ.) $\pm 10\%$
 No load dissipation (Typ.) $\leq 10W$ @no load
 Bat. low alarm 11 ± 0.5 VDC, 22 ± 1 VDC or 44 ± 2 VDC
 Bat. lot shutdown 10.5 ± 0.5 VDC, 21 ± 1 VDC or 42 ± 2 VDC
 Overload protection Shutdown O/P voltage, re-power on to recover
 AC output short protection Shut-off
 Over temperature protection Shutdown O/P voltage, re-power on to recover
 DC input polarity reverse By internal fuse
 Working temperature -20~+60°C (refer to output derating curve)
 LDV standard Design refer to EN60950-1
 EMC standard Design refer to FCC part 15 class A, EN55022 class A, EN61000-4-2,3,8; EN50204
 Solar panel input range 20~40V, 35~80V or 70~160V
 Solar panel short circuit current... 15A
 Solar charger output 14.5V / 20.5A, 29V / 17A, 58V / 8.5A

Model No.	Continue Power (W)	Input (VDC)	Output (VAC / Hz)	Output socket	Effi.
ISI-500-112□	350W	10.5~15	110 / 60	TYPE-A	85%
ISI-500-124□	500W	21~30	110 / 60	TYPE-A	87%
ISI-500-148□	500W	42~60	110 / 60	TYPE-A	87%
ISI-500-212□	350W	10.5~15	230 / 50	TYPE-B	86%
ISI-500-224□	500W	21~30	230 / 50	TYPE-B	88%
ISI-500-248□	500W	42~60	230 / 50	TYPE-B	88%

□ = A, B (standard model), C, D, E, U (optional model)

AC Output Receptacle (optional for ISI-500 series)

TYPE-A	TYPE-B	TYPE-C	TYPE-D	TYPE-E	TYPE-U
USA	Europe	Australia	U.K.	Japan	Universal

▲ Please consult Mean Well for other kinds of optional output socket.



48hrs delivery—

We keep enough stock for 95% of standard models at our 2400m² warehouse. We can arrange prompt delivery within 48hrs.



Features

- High frequency design
- Input protections:
Reverse polarity /
Over and under voltage /
Battery low alarm and shutdown
- Output protections:
Short circuit / Overload / Over temp.
- With power ON/OFF switch and LED indicator
- Built-in remote ON/OFF control for 1000~2500W (optional)
- Built-in USB interface and without fan for 100W
- Input and output fully isolation
- Low power consumption (standby)
- LVD meet EN60950-1 and e13 mark
- EMC meet EN61000-4-2,3, EN55022
- 1 year warranty

Output Socket (option)

			◀Please consult Mean Well for other kinds of optional output socket.
TYPE-2	TYPE-3	TYPE-4	
USA	EUROPE	UNIVERSAL	

General Specification (Please refer to www.meanwell.com for detail spec.)



Model Name	A301	A302
DC input rated voltage	12.5VDC	25.0VDC
AC output voltage / Frequency	110VAC(rms) / 60Hz or 230VAC(rms) / 50Hz	
Max. output power	100W, 150W, 300W, 600W, 1000W, 1500W, 2500W	
USB output power	5Vdc / 500mA (100W only)	
AC output regulation	±10% of rated output voltage	
Bat. low alarm	10±0.5VDC	20.5±1.0VDC
Bat. low shut down	9.5±0.5VDC	19.5±1.0VDC
I/P over voltage protection	15~17VDC	30~32VDC
Working temperature	0~30°C (0~25°C for 2500W)	
LVD	Compliance to EN60950-1	
EMC	Compliance to EN55014-1, EN61000-3-2,3, EN61000-4-2,3	

100W

Model Name	Continue power	Input VDC	Output VAC / Hz	Output socket	Effi.
A301-100-F3	100W	10-15	230 / 50	TYPE-3	90%
A302-100-F3	100W	21-30	230 / 50	TYPE-3	90%

150W

Model Name	Continue power	Input VDC	Output VAC / Hz	Output socket	Effi.
A301-150-B2	150W	10-15	110 / 60	TYPE-2	78%
A301-150-F3	150W	10-15	230 / 50	TYPE-3	78%
A302-150-B2	150W	21-30	110 / 60	TYPE-2	82%
A302-150-F3	150W	21-30	230 / 50	TYPE-3	82%

300W

Model Name	Continue power	Input VDC	Output VAC / Hz	Output socket	Effi.
A301-300-B2	300W	10-15	110 / 60	TYPE-2	82%
A301-300-F3	300W	10-15	230 / 50	TYPE-3	82%
A302-300-B2	300W	21-30	110 / 60	TYPE-2	85%
A302-300-F3	300W	21-30	230 / 50	TYPE-3	85%

600W

Model Name	Continue power	Input VDC	Output VAC / Hz	Output socket	Effi.
A301-600-B2	600W	10-15	110 / 60	TYPE-2	82%
A301-600-F3	600W	10-15	230 / 50	TYPE-3	82%
A302-600-B2	600W	21-30	110 / 60	TYPE-2	85%
A302-600-F3	600W	21-30	230 / 50	TYPE-3	85%

1000W

Model Name	Continue power	Input VDC	Output VAC / Hz	Output socket	Effi.
A301-1K0-B2	1000W	10-15	110 / 60	TYPE-2	82%
A301-1K0-F3	1000W	10-15	230 / 50	TYPE-3	82%
A302-1K0-B2	1000W	21-30	110 / 60	TYPE-2	85%
A302-1K0-F3	1000W	21-30	230 / 50	TYPE-3	85%

1500W

Model Name	Continue power	Input VDC	Output VAC / Hz	Output socket	Effi.
A301-1K7-B2	1500W	10-15	110 / 60	TYPE-2	82%
A301-1K7-F3	1500W	10-15	230 / 50	TYPE-3	82%
A302-1K7-B2	1500W	21-30	110 / 60	TYPE-2	85%
A302-1K7-F3	1500W	21-30	230 / 50	TYPE-3	85%

2500W

Model Name	Continue power	Input VDC	Output VAC / Hz	Output socket	Effi.
A301-2K5-B4	2500W	10-15	110 / 60	TYPE-4	82%
A301-2K5-F3	2500W	10-15	230 / 50	TYPE-3	82%
A302-2K5-B4	2500W	21-30	110 / 60	TYPE-4	85%
A302-2K5-F3	2500W	21-30	230 / 50	TYPE-3	85%



TS-200
205x 158x 59 mm



TS-400
205x 158x 67 mm



TS-700
295x 184x 70 mm

Features

- True sine wave output (THD<3%)
- 2 times high surge power for motor related application
- Advanced digital control by microprocessor
- Output voltage / frequency adjustable
- High efficiency up to 91%
- Conformal coating for TS-700
- Standby saving mode to conserve energy (TS-700)
- Built-in fan ON/OFF control function (TS-400/700)
- Fanless design, cooling by free air convection (TS-200)
- Front panel indicator for load / battery / operation status
- High frequency design
- Input protections:
Bat. low alarm / Bat. low shutdown / reverse polarity / over voltage
- Output protections:
Short circuit / Overload / Over temperature
- Applications:
Home appliance, power tools, office and portable equipment, vehicle and yacht...etc.
- 3 years warranty



General Specification (Please refer to www.meanwell.com for detail spec.)

Model Name	TS-200	TS-400	TS-700
Rated output power	200W	400W	700W
Maximum output power	230W for 3 minutes; 300W for 10 sec.	460W for 3 minutes; 600W for 10 sec.	800W for 3 minutes; 1050W for 10 sec.
Output surge rating (30 cycles.)	400W	800W	1400W
DC input rated voltage	12VDC, 24VDC or 48VDC		
AC output voltage	100 / 110 / 115 / 120VAC; 200 / 220 / 230 / 240VAC selectable by setting button		
Output frequency	50Hz / 60Hz selectable by setting button		
AC output waveform	True sine wave, THD<3.0%		
AC output regulation	±3% of rated output voltage		
No load dissipation (Typ.)	≤15W		≤ 6W @ standby saving mode
Working temperature	-10~+35°C@100% load (112/124/148), 60°C@50% load -10~+40°C@100% load (212/224/248), 60°C@50% load	-10~+40°C@100% load, 60°C@50% load	0~+40°C@100% load, 60°C@50% load
Safety standards	110V	Design refer to UL458	
	230V	Compliance to EN60950-1	
EMC standards	110V	Compliance to FCC part 15 class A	
	230V	Compliance to EN55022 class A, E-Mark, EN61000-4-2,3,8, ENV50204	

200W

Model Name	Continue power	Input VDC	Output VAC / Hz	Output socket	Effi.
TS-200-112[A]	200W	10.5-15	110 / 60	TYPE-A	86.0%
TS-200-124[A]	200W	21.0-30	110 / 60	TYPE-A	87.5%
TS-200-148[A]	200W	42.0-60	110 / 60	TYPE-A	88.0%
TS-200-212[B]	200W	10.5-15	230 / 50	TYPE-B	86.0%
TS-200-224[B]	200W	21.0-30	230 / 50	TYPE-B	87.5%
TS-200-248[B]	200W	42.0-60	230 / 50	TYPE-B	88.0%

□ = A, B (standard model), C, D, E or F (optional model)

400W

Model Name	Continue power	Input VDC	Output VAC / Hz	Output socket	Effi.
TS-400-112[A]	400W	10.5-15	110 / 60	TYPE-A	84.5%
TS-400-124[A]	400W	21.0-30	110 / 60	TYPE-A	86.0%
TS-400-148[A]	400W	42.0-60	110 / 60	TYPE-A	87.0%
TS-400-212[B]	400W	10.5-15	230 / 50	TYPE-B	86.0%
TS-400-224[B]	400W	21.0-30	230 / 50	TYPE-B	87.5%
TS-400-248[B]	400W	42.0-60	230 / 50	TYPE-B	88.5%

□ = A, B (standard model), C, D, E or F (optional model)

700W

Model Name	Continue power	Input VDC	Output VAC / Hz	Output socket	Effi.
TS-700-112[A]	700W	10.5-15	110 / 60	TYPE-A	86%
TS-700-124[A]	700W	21.0-30	110 / 60	TYPE-A	88%
TS-700-148[A]	700W	42.0-60	110 / 60	TYPE-A	89%
TS-700-212[B]	700W	10.5-15	230 / 50	TYPE-B	89%
TS-700-224[B]	700W	21.0-30	230 / 50	TYPE-B	90%
TS-700-248[B]	700W	42.0-60	230 / 50	TYPE-B	91%

□ = A, B (standard model), C, D, E or F (optional model)

AC Output Receptacle (optional for TN/TS series)

TYPE-A	TYPE-B	TYPE-C	TYPE-D	TYPE-E	TYPE-F
USA	Europe	Australia	U.K.	Japan	GFCI

▲ Please consult Mean Well for other kinds of optional output socket.



TS-1000
345x 184x 70 mm



TS-1500
420x 220x 88 mm



TS-3000
466.8x 283.5x 100 mm

NEW

Inverter Remote Control



▲ IRC1



▲ IRC2

Description:
IRC1/IRC2 is the monitoring and control unit used for the inverter series. It can decode the RS-232 signal sent by inverter series and display through digital meters. IRC1/IRC2 can also turn ON/OFF of inverter remotely that make the basic control more easily.

Features

- True sine wave output (THD<3%)
- 2 times high surge power for motor related application
- Advanced digital control by microprocessor
- High efficiency up to 92%
- Conformal coating
- Standby saving mode to conserve energy
- Built-in fan ON/OFF control function
- Output voltage / frequency adjustable
- Front panel indicator for load / battery / operation status
- High frequency design
- Input protections:
Bat. low alarm / Bat. low shutdown / reverse polarity / over voltage
- Output protections:
Short circuit / Overload / Over temperature
- Applications:
Home appliance, power tools, office and portable equipment, vehicle and yacht...etc.
- 3 years warranty

General Specification (Please refer to www.meanwell.com for detail spec.)



Model Name	TS-1000	TS-1500	TS-3000 NEW
Rated output power	1000W	1500W	3000W
Maximum output power	1150W for 3 minutes; 1500W for 10 sec.	1725W for 3 minutes; 2250W for 10 sec.	3450W for 3 minutes; 4500W for 10 sec.
Output surge rating (30 cycles.)	2000W	3000W	6000W
DC input rated voltage	12VDC, 24VDC or 48VDC		
AC output voltage	100 / 110 / 115 / 120VAC or 200 / 220 / 230 / 240VAC selectable by setting button		
Output frequency	50Hz/60Hz selectable by setting button		
AC output waveform	True sine wave, THD<3.0%		
AC output regulation	±3% of rated output voltage		
No load dissipation (Typ.)	≤6W @ standby saving mode	≤18W @ standby saving mode	≤10W @ standby saving mode
Working temperature	0 ~ +40°C @ 100% load, 60°C @ 50% load		
Safety standards	110V	Compliance to UL458 (except for 48V and only for GFCI receptacle)	
	230V	Compliance to EN60950-1	
EMC standards	110V	Compliance to FCC part 15 class A	
	230V	Compliance to EN55022 class A (class B for TS-1500), E-Mark, EN61000-4-2,3,8, ENV50204	

1000W

Model Name	Continue power	Input VDC	Output VAC / Hz	Output socket	Effi.
TS-1000-112[A]	1000W	10.5-15	110 / 60	TYPE-A	88%
TS-1000-124[A]	1000W	21.0-30	110 / 60	TYPE-A	89%
TS-1000-148[A]	1000W	42.0-60	110 / 60	TYPE-A	90%
TS-1000-212[B]	1000W	10.5-15	230 / 50	TYPE-B	90%
TS-1000-224[B]	1000W	21.0-30	230 / 50	TYPE-B	91%
TS-1000-248[B]	1000W	42.0-60	230 / 50	TYPE-B	92%

□ = A, B (standard model), C, D, E or F (optional model)

1500W

Model Name	Continue power	Input VDC	Output VAC / Hz	Output socket	Effi.
TS-1500-112[A]	1500W	10.5-15	110 / 60	TYPE-A	87%
TS-1500-124[A]	1500W	21.0-30	110 / 60	TYPE-A	89%
TS-1500-148[A]	1500W	42.0-60	110 / 60	TYPE-A	90%
TS-1500-212[B]	1500W	10.5-15	230 / 50	TYPE-B	88%
TS-1500-224[B]	1500W	21.0-30	230 / 50	TYPE-B	90%
TS-1500-248[B]	1500W	42.0-60	230 / 50	TYPE-B	91%

□ = A, B (standard model), C, D, E or F (optional model)

3000W NEW

Model Name	Continue power	Input VDC	Output VAC / Hz	Output socket	Effi.
TS-3000-112[A]	3000W	10.5-15	110 / 60	TYPE-A	88%
TS-3000-124[A]	3000W	21.0-30	110 / 60	TYPE-A	90%
TS-3000-148[A]	3000W	42.0-60	110 / 60	TYPE-A	91%
TS-3000-212[B]	3000W	10.5-15	230 / 50	TYPE-B	89%
TS-3000-224[B]	3000W	21.0-30	230 / 50	TYPE-B	91%
TS-3000-248[B]	3000W	42.0-60	230 / 50	TYPE-B	92%

□ = A, B (standard model), C, D, E or F (optional model)

► Features (IRC1 & IRC2)

- Wall-mounted and control panel assembly acceptable
- Built-in ON/OFF button
- LED indicators for remote ON/OFF, abnormal and power saving mode
- Equipped with 10FT cable, optional for 25FT or 50FT
- Connect directly to the remote socket of inverter; no power supply needed
- Suitable series:
IRC1: TS-700 / 1000 / 1500 / 3000 , TN-1500 / 3000
IRC2: TS-700 / 1000 / 1500 / 3000
- 3 years warranty



TN-1500
420x 220x 88 mm



TN-3000
466.8x 283.5x 100 mm

NEW

■ Inverter Remote Control



▲ IRC3
75x 55x 21 mm

Description:
IRC3 is the monitoring and control unit used for the inverter series. It can decode the RS-232 signal sent by inverter series and display through digital meters. IRC3 can also turn ON/OFF of inverter remotely that make the basic control more easily.

■ Features

- True sine wave output (THD<3%)
- **2 times high surge power for motor related application**
- Advanced digital control by microprocessor
- High efficiency up to 92%
- **Conformal coating**
- Standby saving mode to conserve energy
- Built-in fan ON/OFF control function
- Output voltage / frequency adjustable
- Front panel indicator for load / battery / operation status
- High frequency design
- **Selectable UPS and energy saving mode**
- **AC by pass, built-in AC and solar charger**
- Fast transfer time under 10ms
- Solar input current up to 30A max.
- Input protections:
Bat. low alarm / Bat. low shutdown / reverse polarity / over voltage

- Output protections:
Short circuit / Overload / Over temperature / AC circuit breaker
- **Optional monitoring software and connection cable**
(MW order No.: DS-TN-1500 for 1500W and 3000W)
- Applications: Home appliance, power tools, office and portable equipment, vehicle and yacht...etc.
- 3 years warranty

► Features (IRC3)

- Wall-mounted and control panel assembly acceptable
- Built-in ON/OFF button
- LED indicators for remote ON/OFF, abnormal and power saving mode
- Equipped with 10FT cable, optional for 25FT or 50FTT
- Connect directly to the remote socket of inverter;
no power supply needed
- Suitable series: TN-1500 / 3000
- 3 years warranty

■ General Specification (Please refer to www.meanwell.com for detail spec.)



Model Name	TN-1500	TN-3000 NEW
Rated output power	1500W	3000W
Maximum output power	1725W for 3 minutes ; 2250W for 10 seconds	3450W for 3 minutes ; 4500W for 10 seconds
Output surge rating (30 cycles.)	3000W	6000W
DC input rated voltage	12VDC, 24VDC or 48VDC	
AC output voltage	100 / 110 / 115 / 120VAC or 200 / 220 / 230 / 240VAC selectable by setting button	
Output frequency	50Hz/60Hz selectable by setting button	
AC output waveform	True sine wave, THD<3.0%	
AC output regulation	±3% of rated output voltage	
No load dissipation (Typ.)	≤18W @ standby saving mode	≤10W @ standby saving mode
Transfer time (Typ.)	≤10ms inverter mode ↔ by pass mode	
Working temperature	0 ~ +40°C @ 100% load, 60°C @ 50% load	
Safety standards	110V	Compliance to UL458 (except for 48V and only for GFCI receptacle)
	230V	Compliance to EN60950-1
EMC standards	110V	Compliance to FCC part 15 class A
	230V	Compliance to EN55022 class A (class B for TN-1500), E-Mark, EN61000-4-2,3,4,5,6,8,11, ENV50204

■ 1500W (Inverter with AC & Solar Charger)

Model Name	Continue power	Input VDC	Output VAC / Hz	Output socket	Effi.
TN-1500-112[A]	1500W	10.5-15	110 / 60	TYPE-A	87%
TN-1500-124[A]	1500W	21.0-30	110 / 60	TYPE-A	89%
TN-1500-148[A]	1500W	42.0-60	110 / 60	TYPE-A	90%
TN-1500-212[B]	1500W	10.5-15	230 / 50	TYPE-B	88%
TN-1500-224[B]	1500W	21.0-30	230 / 50	TYPE-B	90%
TN-1500-248[B]	1500W	42.0-60	230 / 50	TYPE-B	91%

□ = A, B (standard model), C, D, E or F (optional model)

■ 3000W (Inverter with AC & Solar Charger)

Model Name	Continue power	Input VDC	Output VAC / Hz	Output socket	Effi.
TN-3000-112[A]	3000W	10.5-15	110 / 60	TYPE-A	88%
TN-3000-124[A]	3000W	21.0-30	110 / 60	TYPE-A	90%
TN-3000-148[A]	3000W	42.0-60	110 / 60	TYPE-A	91%
TN-3000-212[B]	3000W	10.5-15	230 / 50	TYPE-B	89%
TN-3000-224[B]	3000W	21.0-30	230 / 50	TYPE-B	91%
TN-3000-248[B]	3000W	42.0-60	230 / 50	TYPE-B	92%

□ = A, B (standard model), C, D, E or F (optional model)



After 5 years of endeavor to develop LED power supplies for various LED applications, MEAN WELL's LED power family has become the second largest product line. In order to make users easily get the product information they need and considering the sales channel might be different, since this edition, we split LED power family from this catalog and put the product information on a separate LED catalog. Please contact with our sales representative to request for our new LED catalog if you are looking for the most complete LED power solution.



HLG series 40W~320W

- 95% high efficiency / PFC / IP65~67 / 277VAC / 4KV surge / 3-in-1 dimming
- Suitable for LED street lighting, outdoor LED lighting, LED display



CLG series 60W~150W

- 91% high efficiency / PFC / IP65~67 / 277VAC / 4KV surge
- Suitable for LED street lighting, outdoor LED lighting, LED display



CEN series 60W~96W

- 91% high efficiency / PFC / IP66 / 277VAC / 4KV surge / Class 2
- Suitable for LED street lighting and outdoor LED lighting



PLN/HLN series 20W~96W

- PFC / 277VAC / IP64 / Class 2
- 3-in-1 dimming (HLN)
- Suitable for LED lighting (built-in type)



PLC series 30W~96W

- 90% high efficiency / PFC / Class 2
- Suitable for indoor LED lighting, LED display
- Screw terminal style of I/O



LPF series 40W~90W

- 91% high efficiency / PFC / IP67 / 277VAC / Class II input / 3-in-1 dimming / Class 2
- Suitable for indoor LED lighting, LED display



LP/AP series 12W~100W

- IP67(LP) / Class II input / Class 2 (12~60W)
- Suitable for LED-based decorative and architectural lighting, LED display



PLP/HLP series 20W~80W

- PFC / PCB type / 277VAC / 3-in-1 dimming (HLP)
- Suitable for LED lighting (built-in type)



ULP series 150W


- PFC / U-bracket type
- Suitable for LED street lighting (built-in lighting fixture)
- 1U low profile




PCD series 16W/25W

- PFC / AC phase-cut dimming / Work with leading edge and trailing edge TRIAC dimmers
- Suitable for indoor LED lighting


905

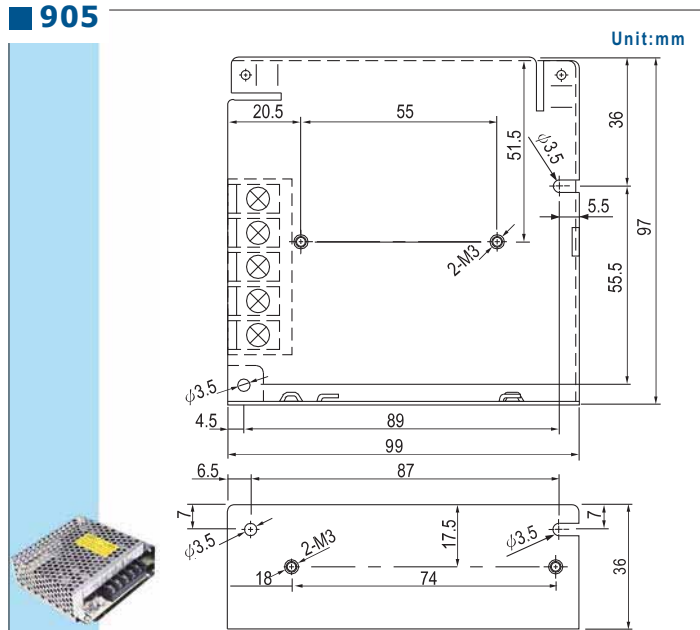

906

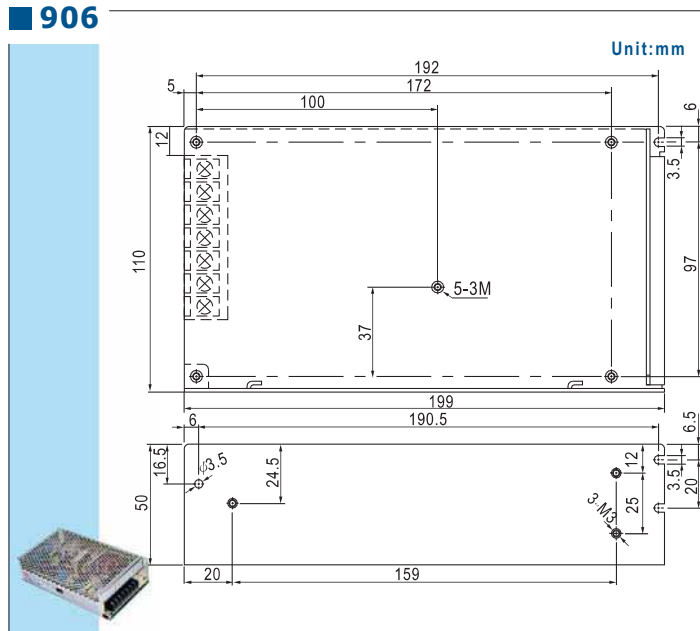


907

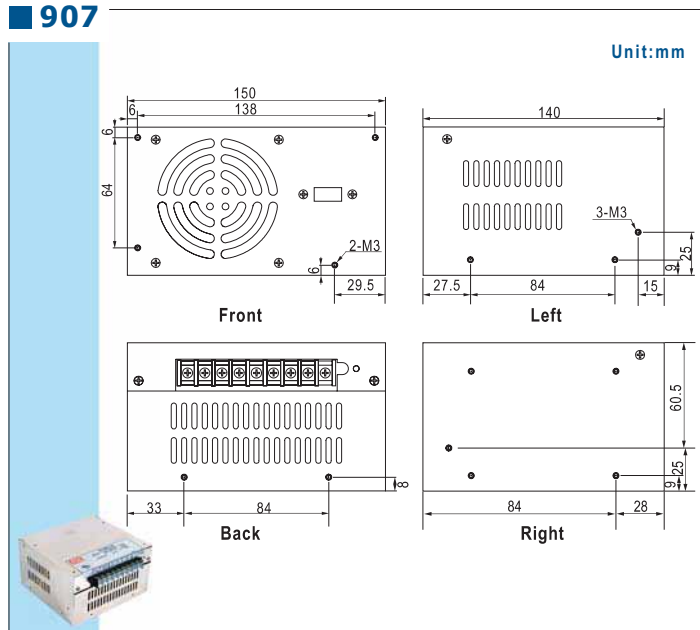


Case Drawing


910

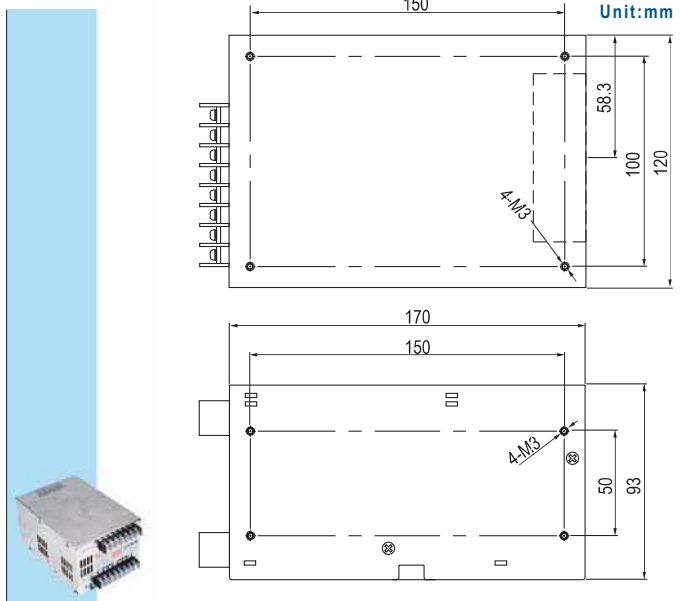


916A 916B

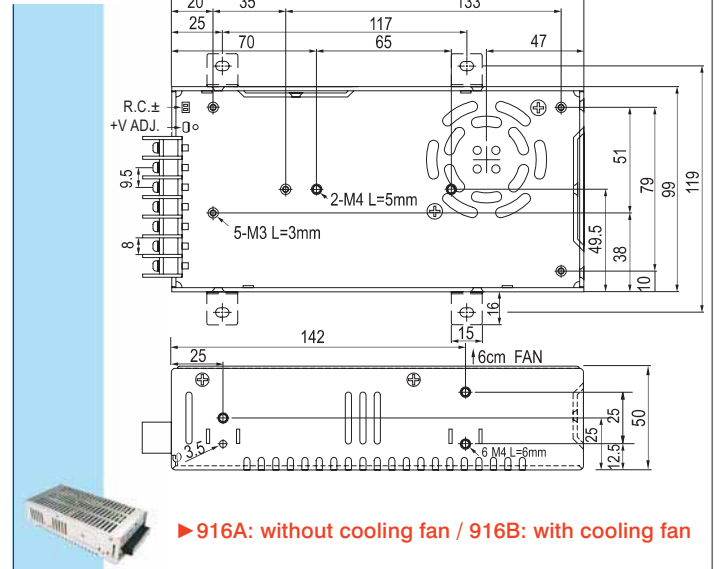


912 912B

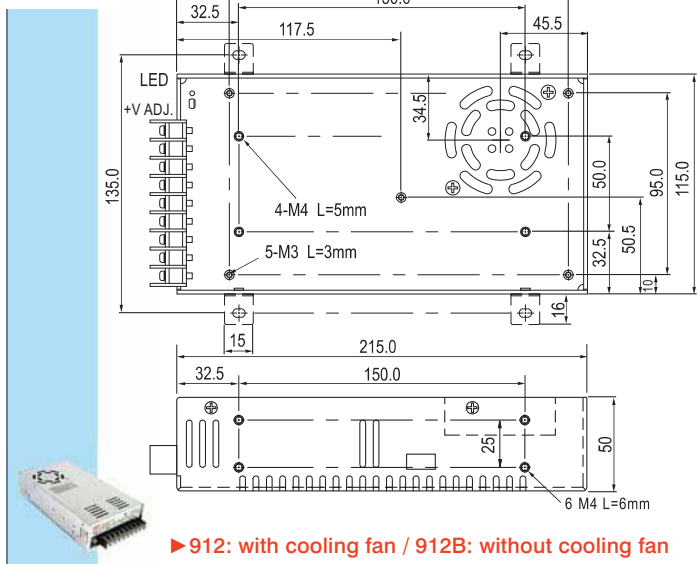


919

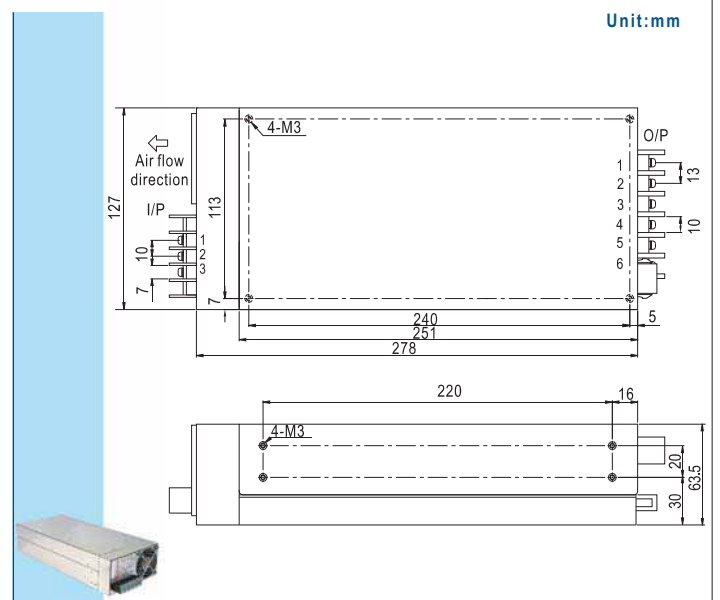

915A

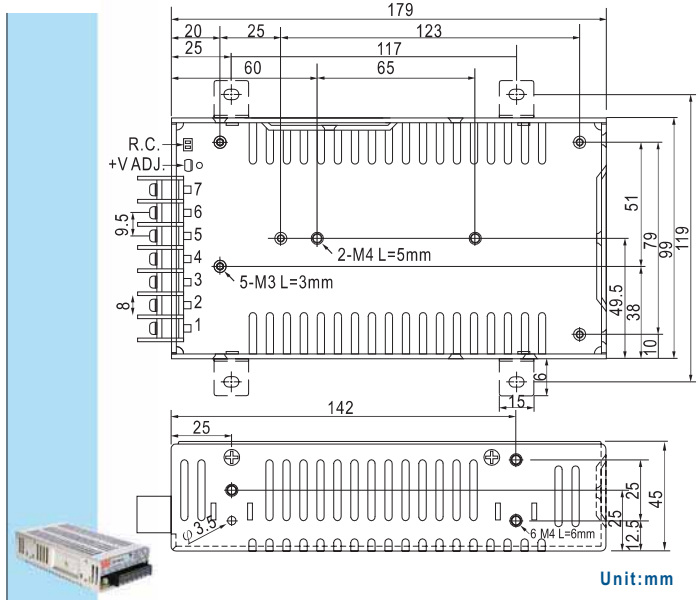


920A

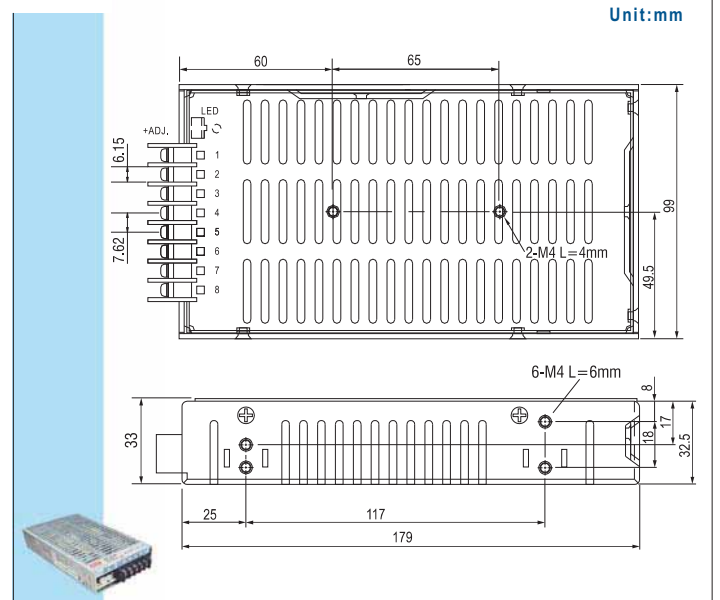


Case Drawing


■ 926

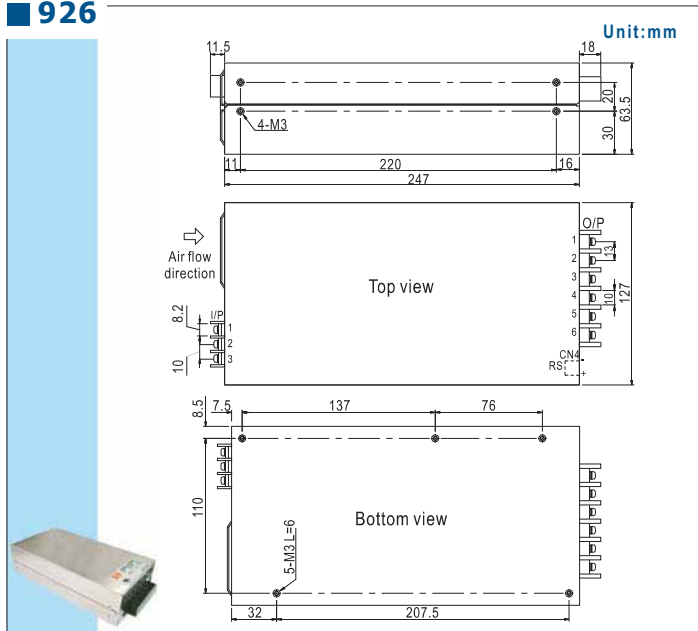


■ 929

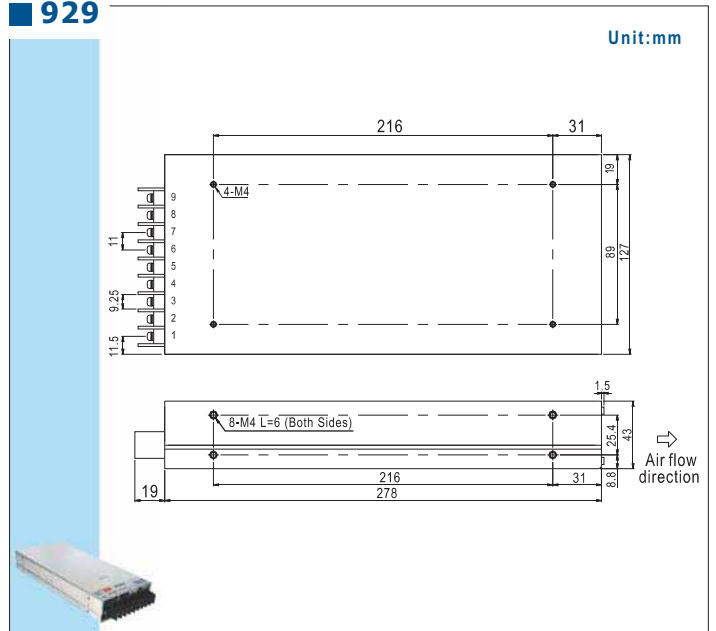


■ 927

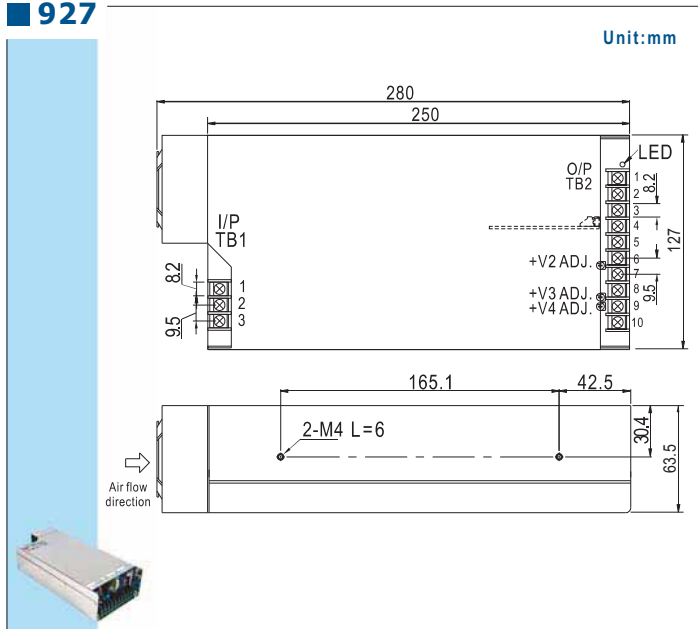


■ 931

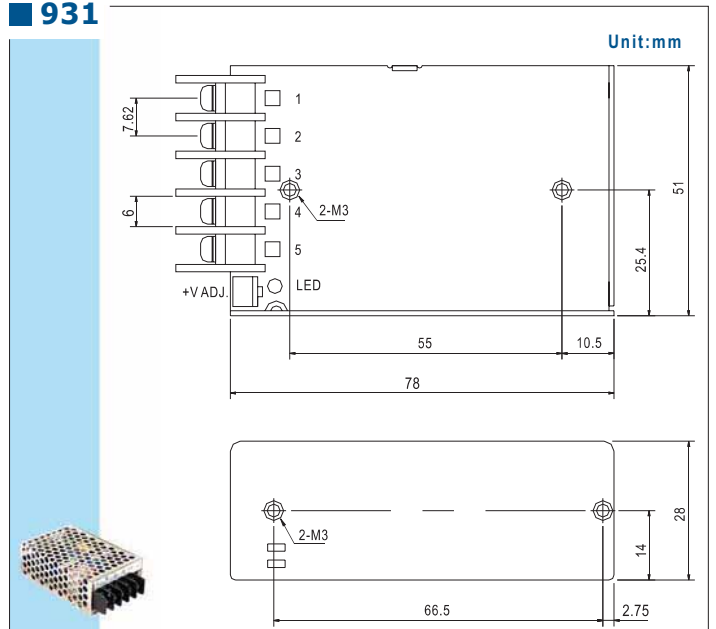

■ 928

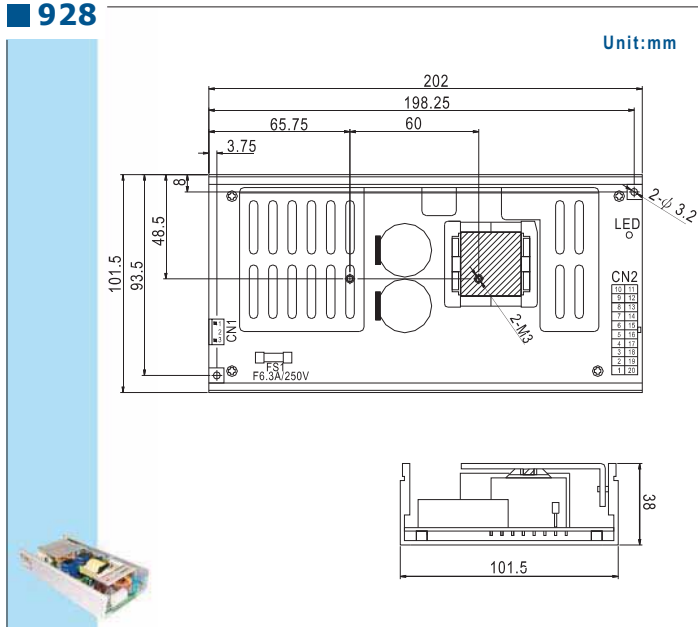


■ 932

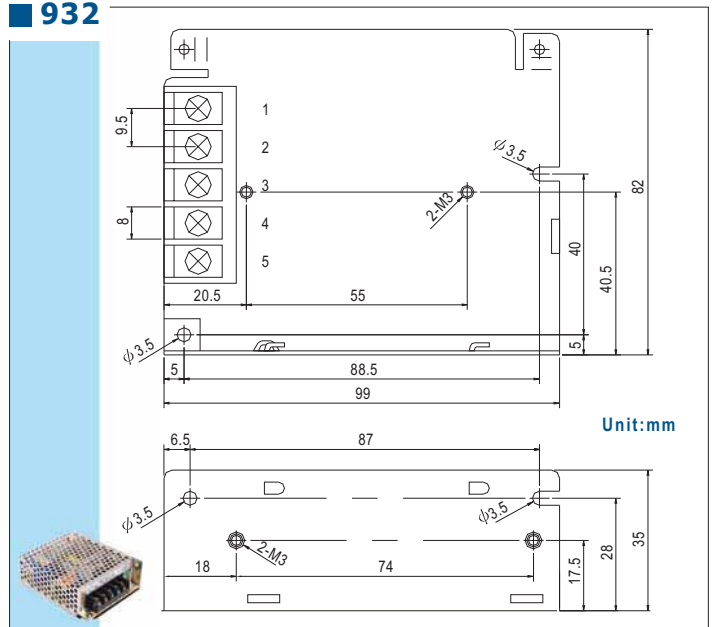

Case Drawing


■ 935

Unit:mm

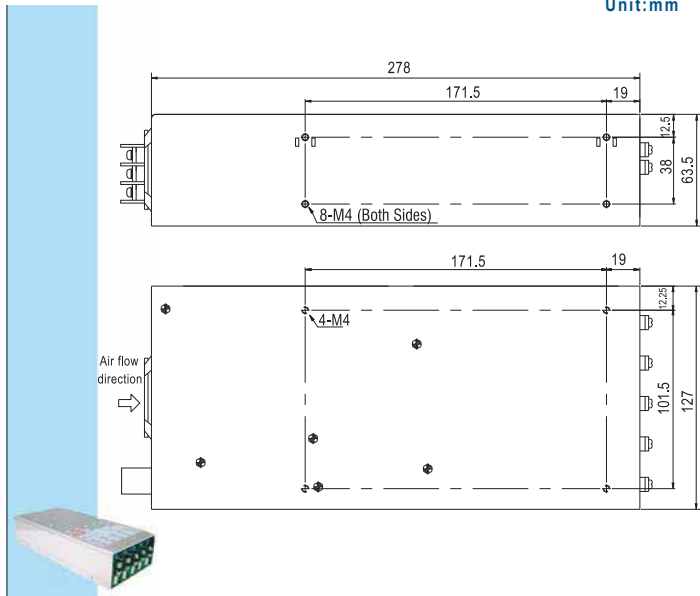


■ 941

Unit:mm

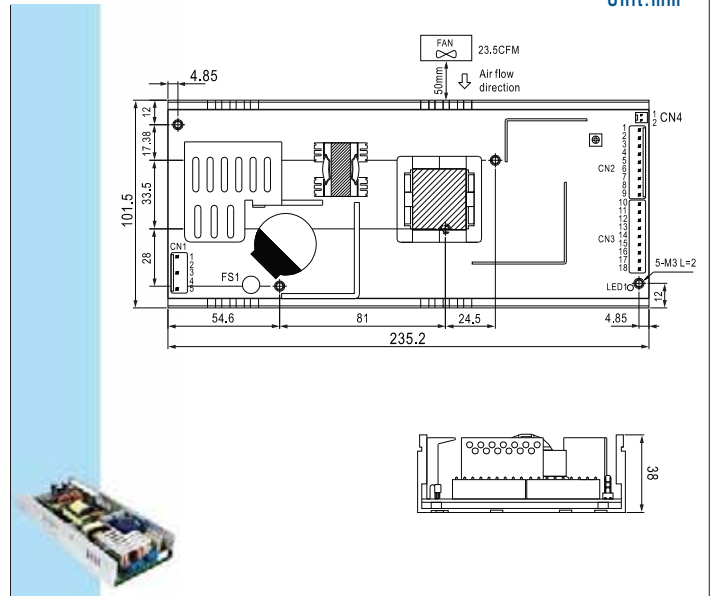


■ 939

Unit:mm

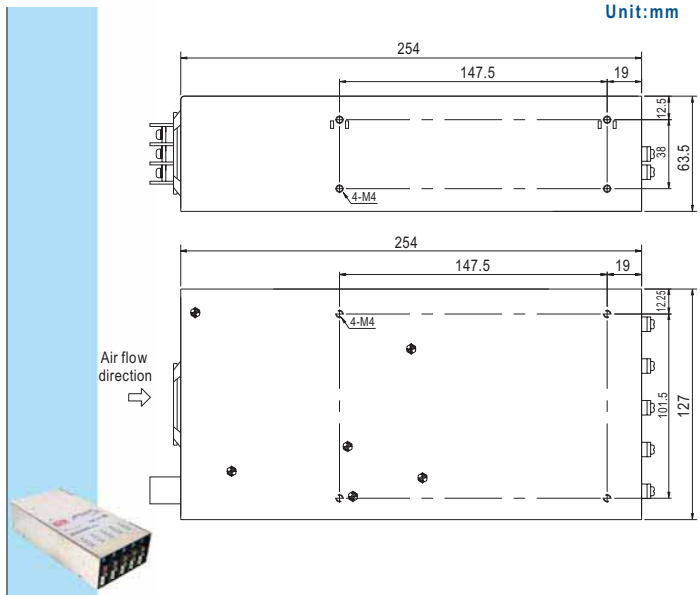


■ 943

Unit:mm

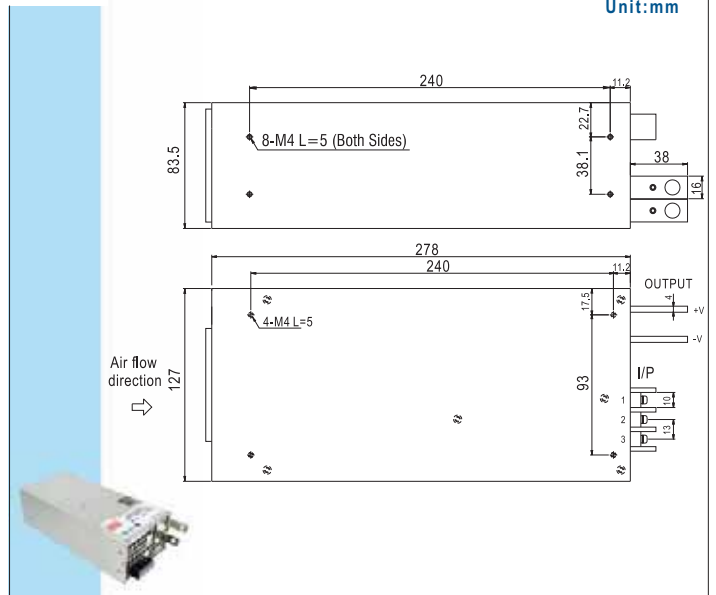


■ 940

Unit:mm

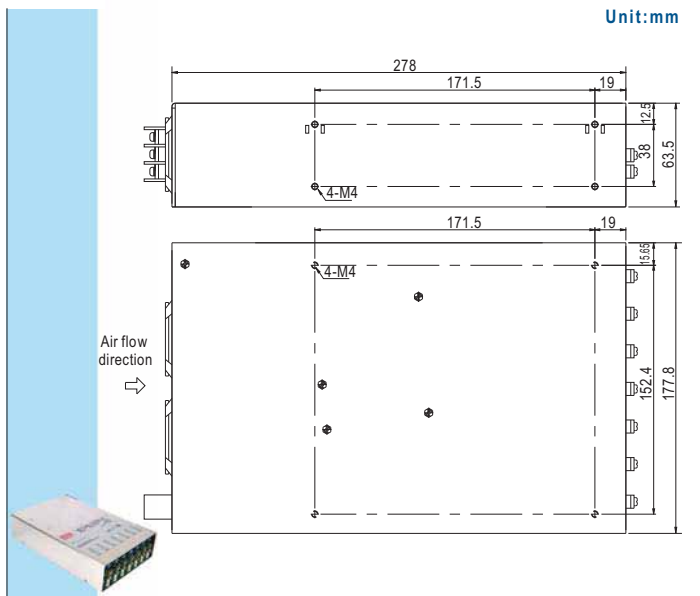


■ 946A


Unit:mm

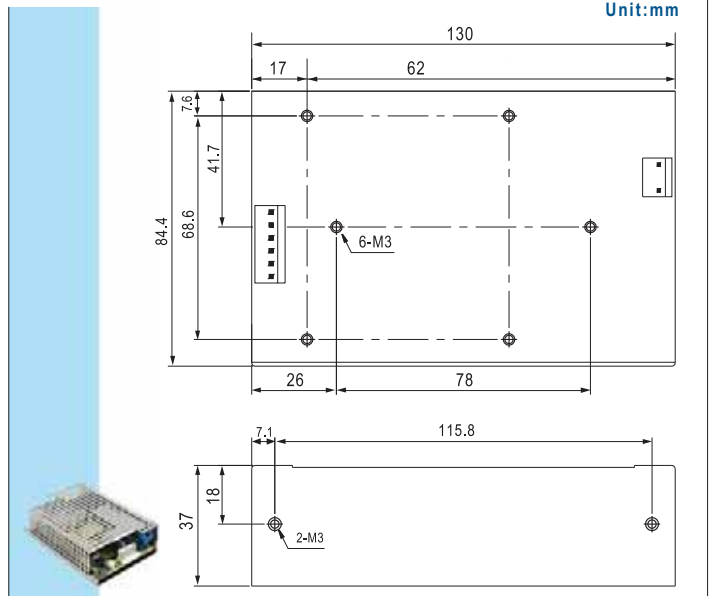


Unit:mm

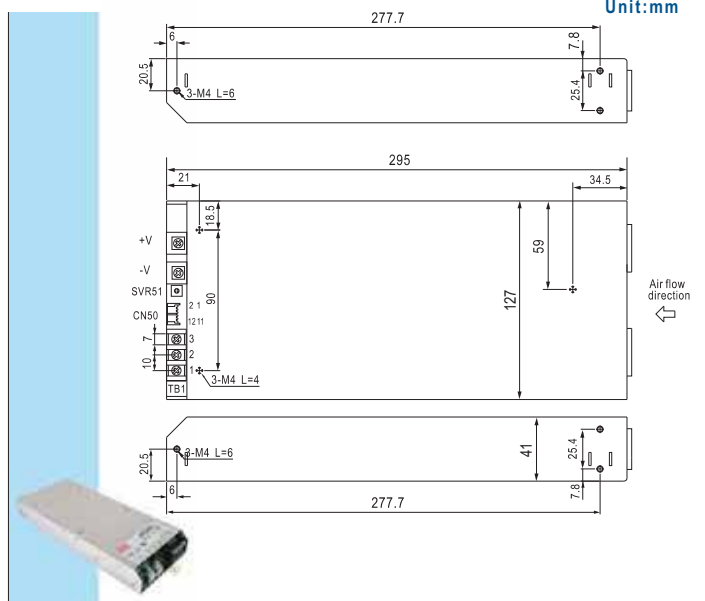


Unit:mm

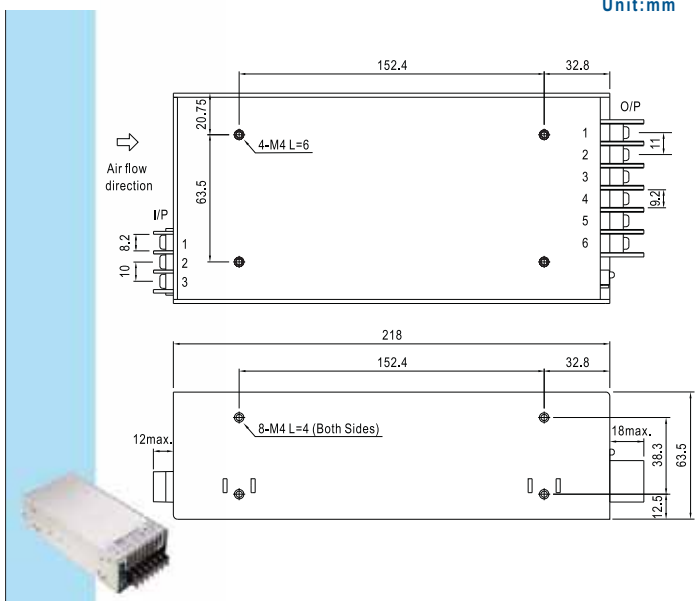


Unit:mm

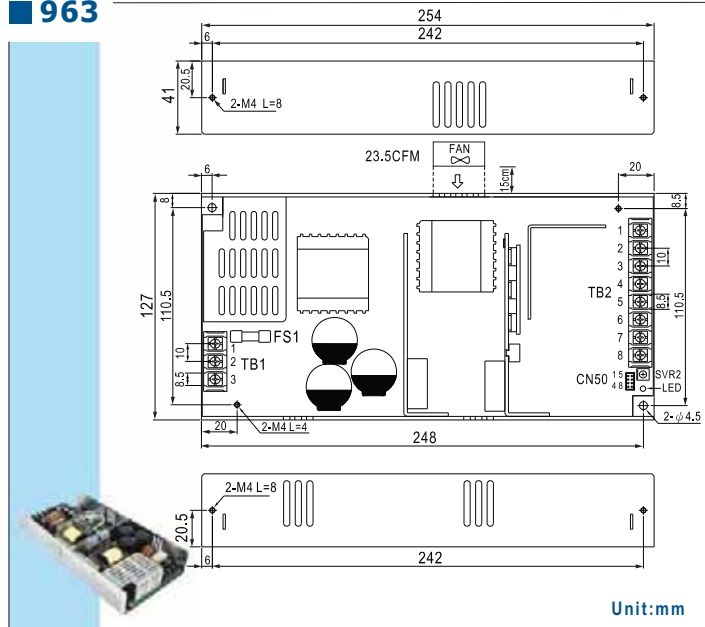


Unit:mm

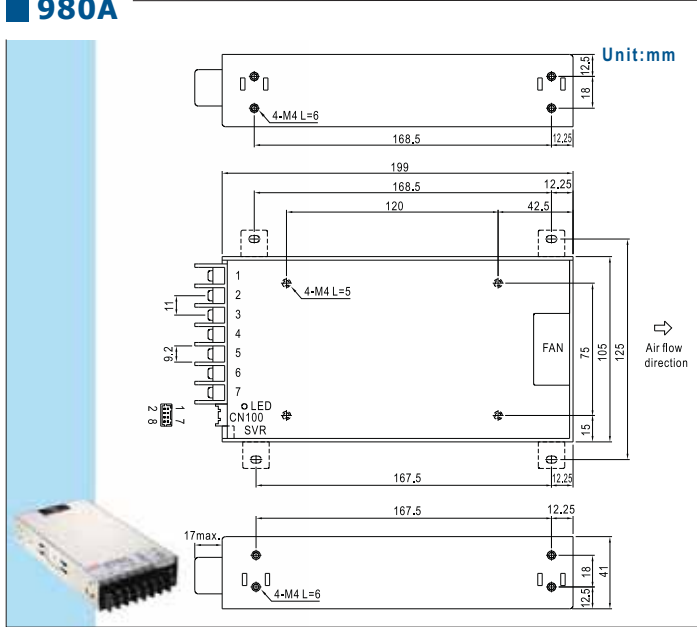

Unit:mm

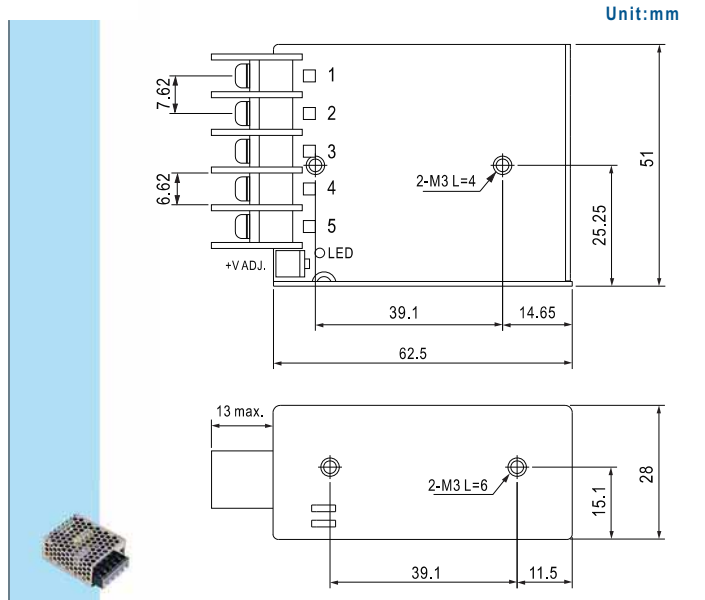

Unit:mm

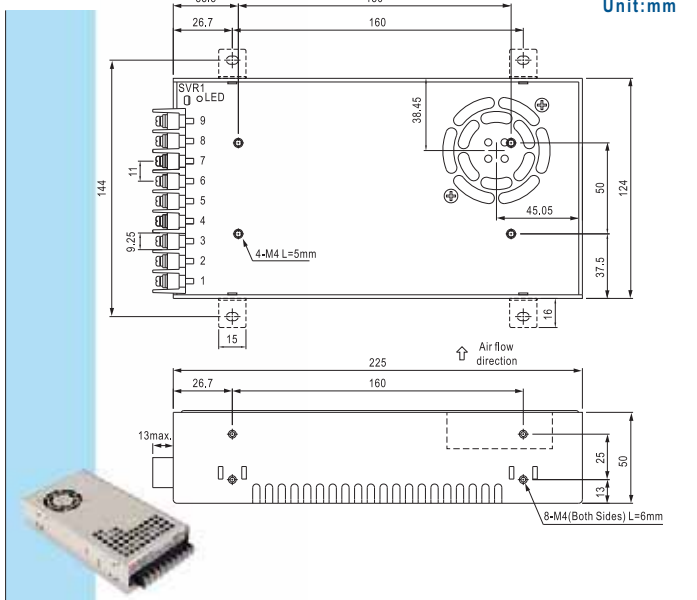


MW
MEAN WELL


Unit:mm





DIN Rail Accessories

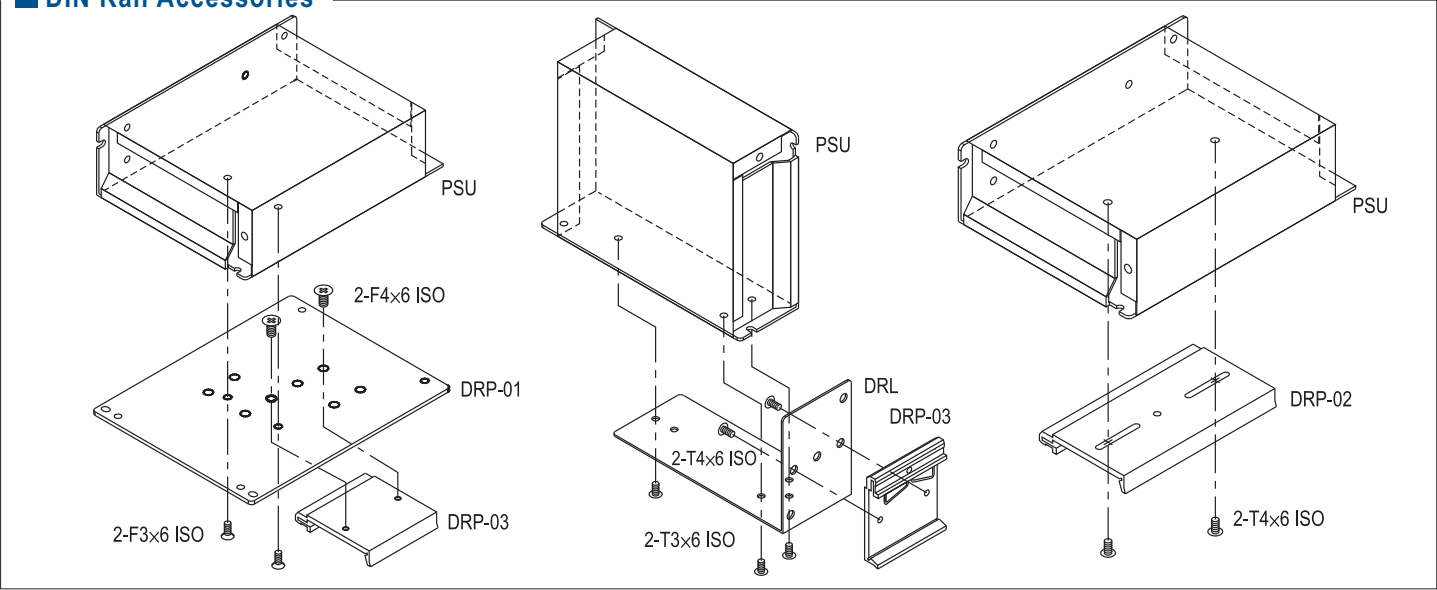

Mounting Accessories

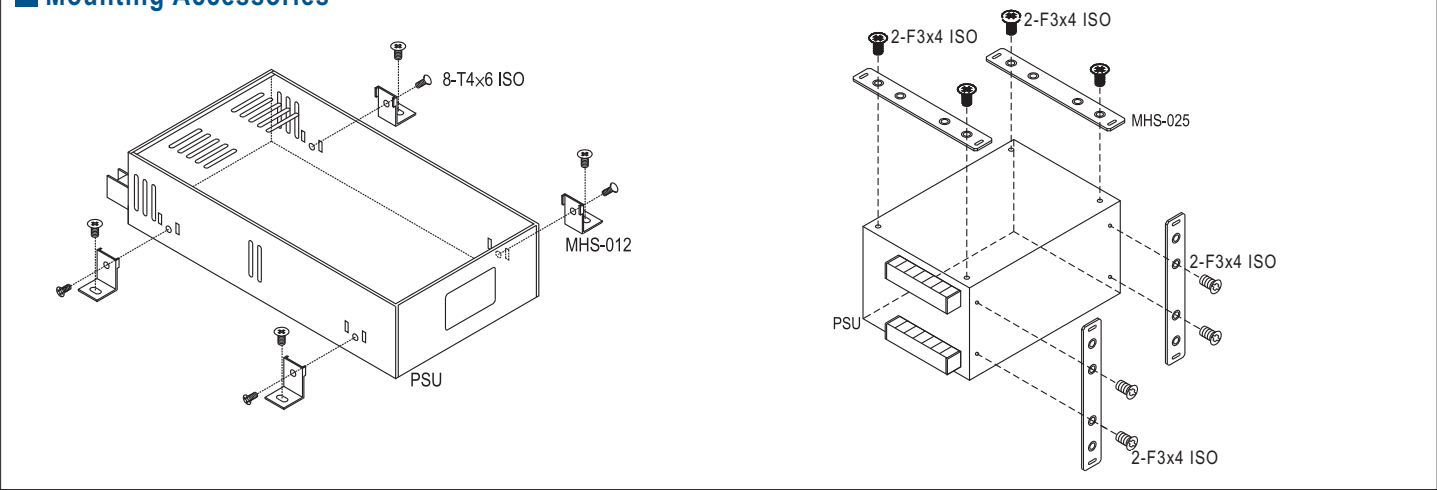

ITEM	Order No.	Case	Model
	DRL-01	903 905 931 932 971	S-40, D-30, T-30, S-15, S-25, RS-25, NES-15 RS-35, NES-25 RS-15
	DRL-02	901 902 906 915 916 920	S-50, S-60, D-60, S-100, S-100F, SD-100, S-150, SD-150, D-120, SP-100, SP-150, SP-200, SP-75,
	DRL-03	911 912	S-240, S-320, SP-320,
	DRL-03A	980 987	SP-240, HRP(G)-300
	DRP-01	901, 902 903, 906 931, 932	All models
	DRP-02	905 / 915 916 / 920 928	S-15, S-25, ... / SP-100, ... SP-150, SP-200, ... / SP-75, ... USP-225,
	DRP-03	DRP-01 DRL-01~03	All models

ITEM	Order No.	Case	Model
	MHS012	912, 915 916, 935 939, 940 977, 980 982B 986, 987	S-201, S-320, S-350, SP-100, SP-150, SP-200, SP-320, SE-450/1000, MP450/650/1000, SP-240, HRP-300/600, RSP-2400/3000
	MHS013	919 926	PSP-500, SP-750, SE-600
	MHS014	952	RSP-1000, SD-1000
	MHS025	910	SP-500, PSP-600.....
	MHS026	943	RSP-1500
	MHS027	971A 931	RS-15 RS-25
	TBC-05	901 903 905 932	SD-50, S-60 S-40, NES-50, RS-75 S-25, SD-25, NES-35, RS-50 NES-25, RS-35
	TBC-07	901 902 902A 903 905 906	D/ID-60, NED/T-75, RD-85, NES-100, RS-100, T-60 S-100F, RD-125, NES-150, RS-150, SD-100 HRP-200 NED/T-50, RD/RID-65, T-40 NED/T-35, RD-50 S-150, SC-150, SD-150
	TBC-08	901 906	AD-155, ADD/ADS-155 D/T/Q-120

General Information



Quotation

- Most of our standard products are available and in stock through our global authorized distributors. Please contact your local distributor for prompt service. Please let us know if you are unable to find Mean Well's distributor information in your local area.
- Written quotations are valid for 60 days from the date quoted unless otherwise specified. Customers are responsible for all banking related charges outside of Taiwan.

Order

- Orders must be placed to Mean Well by mail, e-mail, or fax. Please do not place your order by phone. For international business, Mean Well will provide order confirmations with scheduled delivery dates. If you fail to receive an order confirmation within 2 working days, please reconfirm your order.
- Minimum order amounts per shipment are determined by our local distributor's stock capability. Please contact our sales representative for details.
- We encourage customers to place long-term orders. However, order cancellations or reschedules must be made 45 days prior to the scheduled shipping date.

Delivery

- For our standard products, Mean Well usually keeps around 2-8 weeks safety stock (based on the past 3 months sales record) for prompt delivery of small / medium quantity orders. For large quantity or new product orders, 3-5 weeks lead-time is needed.

Return

- All returned goods must have a RMA (return material authorization) number marked on each carton. Contact Mean Well for a RMA number. All goods must be shipped as "freight prepaid" unless confirmed by our sales representatives.

Warranty

- Products found to be defective within 30 days from the date of receipt can be returned for credit or exchange. After the initial 30 days, Mean Well will repair the goods according to our warranty period. Contact Mean Well for further information on credit or a RMA number. Goods should be shipped as "freight prepaid" to Mean Well and Mean Well will repair and return the defective units (freight prepaid) within 7 working days. If the warranty period has expired, a repair charge (20% of original purchase price or min. USD 5.00/pc) will be charged.
- If customers do the repair by themselves, Mean Well can provide reasonable quantity of free components for repair purpose.

Attention

- We make every effort to ensure the accuracy of information in the catalog. If there is any discrepancy between the data presented in our catalog and the SPEC, the SPEC sheets should take precedence (please refer to www.meanwell.com for the latest SPEC information). We cannot take any responsibility of any consequence arising due to error or change in specification. We suggest customers conduct a sample test for evaluation and approval before placing a formal order.
- For continuing product improvement, Mean Well reserves the right to revise any information in this catalog without further notification.

The EMC directive applies to component power supplies

- Mean Well ensures that all of the power supplies with CE declaration are designed to meet EMC directives and are verified by an independent certified lab agent with a test report prepared. However, there are 2 categories for power supplies: One is a stand-alone power supply, such as laboratory power supplies which can be tested under EMC individually. The other category is a component power supply such as an enclosed power supply and open PCB power supply. These power supplies are considered a component which will be installed into a final equipment. Since EMC performance is affected by the final installation of a product, Mean Well cannot guarantee that the final equipment will meet EMC directives. Final product manufacturers must re-confirm that their product meets EMC directives.

RoHS Announcement

- To minimize the environmental impact and take more responsibility to the earth we live, MEAN WELL applies manufacturing that complies with Directive 2002/95/EC of the European Parliament - RoHS (Restriction of Hazardous Substances) since Sep. 2005. Please refer to the declaration on our web site for more detail information.



Taiwan

明緯企業股份有限公司

MEAN WELL ENTERPRISES CO., LTD.

248 新北市五股區五權三路28號

No.28, Wuquan 3rd Rd., Wugu Dist.,

New Taipei City 248, Taiwan (R.O.C.)

統一編號 : 34491075

Tel : +886-2-2299-6100(rep.)

Fax: +886-2-2299-6200(rep.)

+886-2-2298-0818(sales)

E-mail:info@meanwell.com

<http://www.meanwell.com>

China

明緯(廣州)電子有限公司

MEAN WELL (GUANGZHOU) ELECTRONICS CO., LTD.

廣州市天河區東圃鎮黃村大道粵安工業園A棟2樓

2nd Floor, No. A Building, Yuean Ind. Park,

Dongpu Town, Tianhe District,

Guangzhou, China

Tel : +86-20-2887-1200

Fax: +86-20-8201-0507

E-mail:info@meanwell.com.cn

<http://www.meanwell.com.cn>

蘇州明緯科技有限公司

SUZHOU MEAN WELL TECHNOLOGY CO., LTD.

江蘇省蘇州市相城區黃埭鎮潘陽工業園東橋健民路77號

No.77, Jian-Ming Rd. Dong-Qiao, Pan-Yang Ind. Park,

Huang-Dai Town, Xiang-Cheng District,

Suzhou, Jiang-Su, China

Tel : +86-512-6508-8600

Fax: +86-512-6508-8700

E-mail:info@meanwell.cc

<http://www.meanwell.cc>

U.S.A.

MEAN WELL USA, INC.

44030 Fremont Blvd., Fremont,

CA 94538, U.S.A.

Tel : +1-510-683-8886

Fax: +1-510-683-8899

E-mail:info@meanwellusa.com

<http://www.meanwellusa.com>

Europe

MEAN WELL EUROPE B.V.

Spinnerij 73-75, 1185 ZS Amstelveen,

the Netherlands

Tel : +31-20-345-3795

Fax: +31-20-640-3547

E-mail:info@meanwell.eu

<http://www.meanwell.eu>

Please Contact Your Local Distributor

www.meanwell.com