


SERIES SPL/RPL LIGHT DUTY PLATE

Capacities to 150 lbs.

Standard Features

- Exceeds I.C.M. Standards
- **Load Bearing** - Two full independent rows of hardened and polished ball bearings

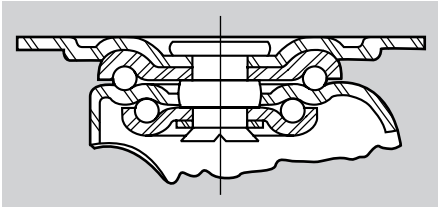

- **Case Hardened Raceways**
- **All Metal Parts Are Stress Relieved**
- **Finish** - Corrosion resistant zinc



SPL-SRP-4

Optional Features

- **Tread Contact Brake** - (Suffix -WB)
- **Thread Guards** - (Suffix -TG)
- **Grease Seals** - (Suffix -GS)
- **NSF Approved**

APPLICATIONS:
Light duty stock carts and mobile equipment of all types.





RPL-SRP-4



Tread Contact Brake

Wheel Specifications						Caster Specifications						Part Number	
Dia. "A" Inches (mm)	Tread Inches (mm)	Wheel Composition	Ref. to Page	Bearing Type	Axle Dia. Inches (mm)	Load Capacity lbs. (KGS)	Overall Height "B" Inches (mm)	Swivel Radius Inches (mm)	Attach. Bolt Inches (mm)	Approx. Shipping Wt.		Swivel Caster	Rigid Caster
										Swivel lbs. (KGS)	Rigid lbs. (KGS)		
3 (76)	13/16 (21)	Soft Rubber	73	Celcon	1/4 (6)	90 (40.5)	3 3/4 (95)	2 3/4 (70)	5/16 (8)	1.0 (.45)	1.0 (.45)	SPL-SRP-3	RPL-SRP-3
		Hard Rubber	84	Celcon		100 (45.0)				1.0 (.45)	1.0 (.45)	SPL-HRP-3	RPL-HRP-3
		Polyolefin	81	Plain		110 (49.5)				1.0 (.45)	1.0 (.45)	SPL-PBP-3	RPL-PBP-3
		Santoprene (Polyolefin Core)	72	Plain		100 (45.0)				1.0 (.45)	1.0 (.45)	SPL-SPP-3	RPL-SPP-3
		Polyurethane (Polyolefin Core)	80	Plain		100 (45.0)				1.0 (.45)	1.0 (.45)	SPL-PPP-3	RPL-PPP-3
4 (102)	15/16 (24)	Soft Rubber	73	Celcon	5/16 (8)	115 (51.2)	4 13/16 (122.2)	3 5/16 (84)	5/16 (8)	1.4 (.6)	1.2 (.5)	SPL-SRP-4	RPL-SRP-4
		Hard Rubber	84	Celcon		125 (56.2)				1.6 (.7)	1.4 (.6)	SPL-HRP-4	RPL-HRP-4
		Polyolefin	81	Plain		140 (63.0)				1.4 (.6)	1.2 (.5)	SPL-PBP-4	RPL-PBP-4
		Santoprene (Polyolefin Core)	72	Plain		125 (56.2)				1.4 (.6)	1.2 (.5)	SPL-SPP-4	RPL-SPP-4
		Polyurethane (Polyolefin Core)	80	Plain		125 (56.2)				1.4 (.6)	1.2 (.5)	SPL-PPP-4	RPL-PPP-4
5 (127)	15/16 (24)	Soft Rubber	73	Celcon	5/16 (8)	125 (56.2)	5 13/16 (147.5)	3 15/16 (99)	5/16 (8)	2.2 (1.0)	1.8 (.8)	SPL-SRP-5	RPL-SRP-5
		Hard Rubber	84	Celcon		135 (61.0)				2.2 (1.0)	1.8 (.8)	SPL-HRP-5	RPL-HRP-5
		Polyolefin	81	Plain		150 (67.5)				2.0 (.9)	1.6 (.7)	SPL-PBP-5	RPL-PBP-5
		Santoprene (Polyolefin Core)	72	Plain		135 (61.0)				2.0 (.9)	1.6 (.7)	SPL-SPP-5	RPL-SPP-5
		Polyurethane (Polyolefin Core)	80	Plain		135 (61.0)				2.0 (.9)	1.6 (.7)	SPL-PPP-5	RPL-PPP-5

Standard Top Plate



SERIES TL LIGHT DUTY THREADED STEM


Capacities to 135 lbs.

Standard Features

- Exceeds I.C.M. Standards
- **Load Bearing** - Two full independent rows of hardened and polished ball bearings
- **Case Hardened Stamped Steel Construction**
- **All Metal Parts Are Stress Relieved**
- **Finish** - Corrosion resistant zinc

Optional Features

- **Stem Lengths** - Specific stem lengths cut and deburred to order
- **Tread Contact Brake** - (Suffix -WB)
- **Thread Guards** - (Suffix -TG)
- **Grease Seals** - (Suffix -GS)
- **Rigid Casters Available**
- **Special Finishes Available**
- **NSF Approved**



TL-SRP-3-32

TL-SRP-3-32-WB




Tread Contact Brake 3", 4" & 5"



TL-SRP-2-32-WB

Cam Action Brake 2" & 2 1/2"

Stem Selections



Threaded Stem Size Diameter & Length	Stem Suffix
5/16" - 18" x 1"	-51
5/16" - 18" x 1 1/2"	-52
3/8" - 16" x 1"	-31
3/8" - 16" x 1 1/2"	-32
7/16" - 14" x 1 1/2"	-72
7/16" - 14" x 2 1/8"	-78
1/2" - 13" x 1 1/2"	-12

Add the Stem Suffix to the swivel caster part number.

Example TL-SRP-2-51


Wheel Specifications						Caster Specifications				Part Number	
Dia. "A" Inches (mm)	Tread Inches (mm)	Wheel Composition	Ref. to Page	Bearing Type	Axle Dia. Inches (mm)	Load Capacity lbs. (KGS)	Overall Height "B" Inches (mm)	Swivel Radius Inches (mm)	Approx. Shipping Weight lbs. (KGS)	Caster	Stem Suffix
2 (50)	7/8 (22)	Soft Rubber	73	Celcon	7/32	70 (32)	2 17/32 (64)	1 5/8 (41)	.25 (.11)	TL-SRP-2 . . .	-51, -52, -31, -32
		Hard Rubber	84	Celcon	(5)	90 (41)				TL-HRP-2 . . .	
2 1/2 (60)	13/16 (21)	Soft Rubber	73	Celcon	1/4 (6)	80 (36)	3 1/32 (77)	2 1/4 (57)	.36 (.16)	TL-SRP-25 . . .	-51, -52, -31, -32
		Hard Rubber	84	Celcon		90 (41)				TL-HRP-25 . . .	
		Polyolefin	81	Celcon		90 (41)				TL-PBP-25 . . .	
3 (76)	13/16 (21)	Soft Rubber	73	Celcon	1/4 (6)	90 (41)	3 1/2 (89)	2 3/4 (70)	.63 (.28)	TL-SRP-3 . . .	-51, -52, -31, -32 -72, -78
		Hard Rubber	84	Celcon		100 (45)				TL-HRP-3 . . .	
		Santoprene (Polyolefin Core)	72	Plain		100 (45)				TL-SPP-3 . . .	
		Polyolefin	81	Plain	5/16 (8)	100 (45)				TL-PBP-3 . . .	
		Soft Rubber	73	Celcon		115 (52)				TL-SRP-4 . . .	
4 (102)	15/16 (24)	Hard Rubber	84	Celcon	5/16 (8)	125 (56)	4 11/16 (119)	3 5/16 (84)	1.3 (.59)	TL-HRP-4 . . .	-32, -72, -78, -12
		Santoprene (Polyolefin Core)	72	Plain		125 (56)				TL-SPP-4 . . .	
		Polyolefin	81	Plain		125 (56)				TL-PBP-4 . . .	
		Soft Rubber	73	Celcon	5/16 (8)	125 (56)				TL-SRP-5 . . .	
		Hard Rubber	84	Celcon		135 (61)				TL-HRP-5 . . .	
5 (127)	15/16 (24)	Santoprene (Polyolefin Core)	72	Plain	5/16 (8)	135 (61)	5 23/32 (145)	3 15/16 (99)	1.7 (.77)	TL-SPP-5 . . .	-32, -72, -78, -12
		Polyolefin	81	Plain		135 (61)				TL-PBP-5 . . .	
		Soft Rubber	73	Celcon		125 (56)				TL-SRP-5 . . .	
		Hard Rubber	84	Celcon		135 (61)				TL-HRP-5 . . .	
		Santoprene (Polyolefin Core)	72	Plain		135 (61)				TL-SPP-5 . . .	

SERIES G2 LIGHT DUTY GRIP RING


Capacities to 300 lbs.

Standard Features

- **Load Bearings** - Independent double ball bearing construction

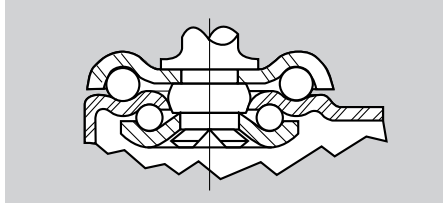

- **Finish** - Corrosion resistant zinc
- **Stem Dimensions** -



G2-SRP-3

Optional Features

- **Tread Contact Brake** - (Suffix -WB)
Not available in 2" and 2 1/2" sizes
- **Sockets Available for Various Sizes**
(page 68)
- **NSF Approved**


APPLICATIONS:

This series offers a broad selection of wheel materials suitable for the hospital, office, and institutional environment.

Like the G03 series, these casters will adapt to the sockets shown on page 68.



Tread Contact Brake (Suffix -WB)





Wheel Specifications						Caster Specifications				Part Number
Dia. "A" Inches (mm)	Tread Inches (mm)	Wheel Composition	Ref. to Page	Bearing Type	Axle Dia. Inches (mm)	Load Capacity lbs. (KGS)	Overall Height "B" Inches (mm)	Swivel Radius Inches (mm)	Approx. Shipping Weight lbs. (KGS)	Caster
2 (50)	7/8 (22)	Soft Rubber	73	Self Lube	1/4 (6)	80 (36)	2 17/32 (64)	2 3/4 (70)	0.5 (.2)	G2-SRP-2
2 1/2 (63)	13/16 (21)	Soft Rubber	73	Self Lube	1/4 (6)	80 (36)	3 1/32 (90)	2 3/4 (70)	0.5 (.2)	G2-SRP-25
		Santoprene (Polyolefin Core)	72	Plain		100 (45)			0.5 (.2)	G2-SPP-25
		Polyurethane (Polyolefin Core)	80	Plain		100 (45)			0.5 (.2)	G2-PPP-25
3 (76)	15/16 (24)	Soft Rubber	73	Celcon	5/16 (8)	90 (40.5)	3 1/2 (89)	2 3/4 (70)	.63 (.28)	G2-SRP-3
		Hard Rubber	84	Celcon		100 (45)			.63 (.28)	G2-HRP-3
		Polyolefin	81	Plain		110 (49.5)			.63 (.28)	G2-PBP-3
		Santoprene (Polyolefin Core)	72	Plain		100 (45)			.63 (.28)	G2-SPP-3
		Polyurethane (Polyolefin Core)	80	Plain		100 (45)			.63 (.28)	G2-PPP-3
4 (102)	15/16 (24)	Soft Rubber	73	Celcon	5/16 (8)	115 (52)	4 11/16 (119)	3 5/16 (84)	1.18 (.53)	G2-SRP-4
		Hard Rubber	74	Celcon		125 (56)			1.18 (.53)	G2-HRP-4
		Polyolefin	81	Plain		140 (63)			1.18 (.53)	G2-PBP-4
		Santoprene (Polyolefin Core)	72	Plain		125 (56)			1.18 (.53)	G2-SPP-4
		Polyurethane (Polyolefin Core)	80	Plain		125 (56)			1.18 (.53)	G2-PPP-4
5 (127)	15/16 (24)	Soft Rubber	73	Celcon	5/16 (8)	125 (56)	5 23/32 (145)	3 15/16 (99)	1.68 (.89)	G2-SRP-5
		Hard Rubber	84	Celcon		135 (61)			1.68 (.89)	G2-HRP-5
		Polyolefin	81	Plain		150 (68)			1.68 (.89)	G2-PBP-5
		Santoprene (Polyolefin Core)	72	Plain		135 (61)			1.68 (.89)	G2-SPP-5
		Polyurethane (Polyolefin Core)	80	Plain		135 (61)			1.68 (.89)	G2-PPP-5

SERIES XL LIGHT DUTY EXPAND. STEM

Capacities to 150 lbs.

XL-SPP-5-150

Expandable
Stem

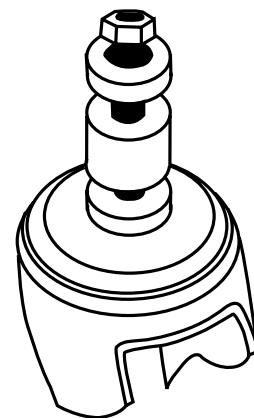


Standard Features

- **3 Piece Socket Expands Into Tubing**
- **Exceeds I.C.M. Standards**
- **Load Bearing** - Two full independent rows of hardened and polished ball bearings
- **Stamped And Formed Construction**
- **All Metal Parts Are Stress Relieved**
- **Finish** - Corrosion resistant zinc

Optional Features

- **Tread Contact Brake** - (Suffix -WB)
- **Grease Seals** - (Suffix -GS)
- **Thread Guards** - (Suffix -TG)
- **NSF Approved**



Tread Contact Brake

Stem Selections

Inside Diameter of Tubing	Stem Suffix
3/4" - 15/16" Round or Square	-100
1" - 1 3/16" Round or Square	-125
1 1/4" - 1 1/2" Round or Square	-150
1 9/16" - 1 3/4" Round or Square	-175

Add the Stem Code Suffix to the swivel caster part number.

Example XL-SRP-3-**100**

Wheel Specifications						Caster Specifications				Part Number	
Dia. "A" Inches (mm)	Tread Inches (mm)	Wheel Composition	Ref. to Page	Bearing Type	Axle Dia. Inches (mm)	Load Capacity lbs. (KGS)	Overall Height "B" Inches (mm)	Swivel Radius Inches (mm)	Approx. Shipping Weight lbs. (KGS)	Caster	Stem Code Suffix
3 (76)	13/16 (21)	Soft Rubber	73	Celcon	1/4 (6)	90 (40.5)	3 1/2 (89)	2 3/4 (70)	.63 (.28)	XL-SRP-3 . . .	-100, -125, -150, -175
		Hard Rubber	84	Celcon		100 (45)			.63 (.28)	XL-HRP-3 . . .	
		Polyolefin	81	Plain		110 (49.5)			.63 (.28)	XL-PBP-3	
		Santoprene (Polyolefin Core)	72	Plain		100 (45)			.63 (.28)	XL-SPP-3 . . .	
		Polyurethane (Polyolefin Core)	80	Plain		100 (45)			.63 (.28)	XL-PPP-3 . . .	
4 (102)	15/16 (24)	Soft Rubber	73	Celcon	5/16 (8)	115 (52)	4 11/16 (119)	3 5/16 (84)	1.18 (.53)	XL-SRP-4 . . .	-100, -125, -150, -175
		Hard Rubber	84	Celcon		125 (56)			1.18 (.53)	XL-HRP-4 . . .	
		Polyolefin	81	Plain		140 (63)			1.18 (.53)	XL-PBP-4	
		Santoprene (Polyolefin Core)	72	Plain		125 (56)			1.18 (.53)	XL-SPP-4 . . .	
		Polyurethane (Polyolefin Core)	80	Plain		125 (56)			1.18 (.53)	XL-PPP-4 . . .	
5 (127)	15/16 (24)	Soft Rubber	73	Celcon	5/16 (8)	125 (56)	5 23/32 (145)	3 15/16 (99)	1.68 (.89)	XL-SRP-5 . . .	-100, -125, -150, -175
		Hard Rubber	84	Celcon		135 (61)			1.68 (.89)	XL-HRP-5 . . .	
		Polyolefin	81	Plain		150 (68)			1.68 (.89)	XL-PBP-5	
		Santoprene (Polyolefin Core)	72	Plain		135 (61)			1.68 (.89)	XL-SPP-5 . . .	
		Polyurethane (Polyolefin Core)	80	Plain		135 (61)			1.68 (.89)	XL-PPP-5 . . .	