







Welcome! E. L. Mustee & Sons, Inc. manufactures products designed to add luxury, convenience, functionality and greater livability to your home. Here you'll find products that present unique design options whether your plans are for building new or remodeling.

Mustee also offers many quality products for commercial, institutional and industrial applications.

Since 1932, Mustee brand products have stood for the best in quality, design, innovation and durability. We invite you to discover what decades of customers already know about Mustee products...they look great, and last.

TABLE OF CONTENTS

- **2–3.)** TOPAZ™ Fiberglass Bathtubs
- 4-7.) DURAWALL®, DURABASE® & STYLEMATE® Shower Ensembles
- 8-10.) DURAWALL® & VARISTONE™ Shower Walls
- 11.) STYLEMATE® Shower Enclosures
- 12-13.) DURABASE® Shower Floors
- **14–15.)** SHOWERTUB™ Shower Floor & CareGiver® ADA Easy-Access Showers
- **16–17.)** CareGiver® Grab Bars & Fold-Down Seats

- **18–19.)** Vector[™] & Utility Sinks
- **20–24.)** UTILATUB®, UTILATUB® Combo, UTILATWIN®, DURATUB® Laundry Tubs, BIGTUB™ Utility Tub & Accessories
- **24.)** DURAPAN™ Washer & Water Heater Pans
- 25.) DURASTALL® Shower Stalls
- **26-29.)** TOPAZ[™], VARISTONE[™], DURAWALL[®] Bathtub Walls & DURATRIM[™] Window Kits
- **30–31.)** Mop Service Basins & Accessories

COMPANY PROFILE



mil Lawrence Mustee would be proud. The company he founded in 1932 to produce "side arm" water heaters, hot plates and incinerators, has grown to become a category leader in many of

the product lines it produces.

When it came to his business, E. L. Mustee insisted that any product bearing his name must deliver the highest quality and service life. We are proud to state that our founder's passion for quality, functionality and dependability is a part of every product that leaves our plants and warehouses.

Much has changed in the E. L. Mustee & Sons, Inc. product line which testifies to the company's ability to envision new product designs or enhancements to existing products. The company's expertise for molding fiberglass, thermoplastics and other materials has driven Mustee's product line growth and diversification.

E. L. Mustee & Sons' quality, innovation, durability and performance serves countless loyal customers in the residential, commercial, healthcare, institutional and industrial markets.

A New Standard of Measure in Bathtub Design Excellence... Exclusively from E. L. Mustee & Sons



TOPAZ...

TOPAZ™ premium fiberglass bathtubs bring together classic design, exceptional features, premium construction and of course, legendary E. L. Mustee & Sons quality. Besides offering the state-of-the-art in bathtub design & construction, TOPAZ™ bathtubs are the perfect way to create a look of elegance in any bathtub alcove you are planning to create.

Companion Products

- TOPAZ[™] bathtubs and TOPAZ[™]660 direct-to-stud wall systems (page 27) can be easily combined to create a handsome 4-piece bathtub and wall ensemble
- TOPAZ™ bathtubs can also be used with any DURAWALL® or VARISTONE™ adhesive-mount wall system (pages 9, 26–29) and tile.



TOPAZ™FIBERGLASS BATHTUBS

Features

- Precision molded from Mustee's premium VARISTONE™ fiberglass
- Apron supported by 2 molded fiberglass brackets
- Structural ribbed bottom and sides to prevent sagging
- Ergonomically contoured back with a 40° lumbar slope
- Proprietary finish creates a deep, long lasting shine and scratchresistant surface
- Slip-resistant bottom surface
- One piece molded, with matched metal molds
- Fits standard 30"x 60" alcove
- Available right hand & left hand with an 8½" x 14½" drain offset
- Suitable for use with all popular finished wall treatments
- Easy to clean

Code Accepted

TOPAZ™Bathtubs meet or exceed performance requirements:


- International Association of Plumbing and Mechanical Officials (IAPMO®)
- American National Standards Institute (ANSI) - Specification Z 124.1.2






Specifications


T6030 TOPAZ™ Fiberglass Bathtubs





Extra-strong ribbed bottom and sides for unmatched strength & stability.

Model	Color	Description
T6030L	White	30" x 60" Bathtub, Left hand drain
T6030LBN	Bone	30" x 60" Bathtub, Left hand drain
T6030LBT	Biscuit	30" x 60" Bathtub, Left hand drain
T6030R	White	30" x 60" Bathtub, Right hand drain
T6030RBN	Bone	30" x 60" Bathtub, Right hand drain
T6030RBT	Biscuit	30" x 60" Bathtub, Right hand drain

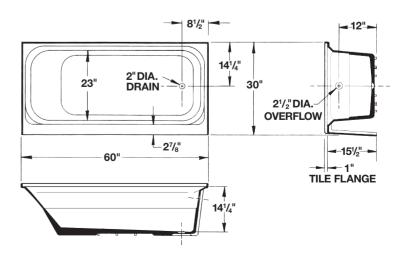

General: Furnish and install as shown on plans, E.L. Mustee & Sons, Inc. TOPAZ™ Fiberglass Bathtub 30" x 60" right or left-handed Model: Construction shall be molded, reinforced fiberglass using matched metal molds under extreme heat and pressure. Shall meet ANSI Specification Z 124.1.2. Color: (White, Bone, Biscuit). Install in compliance with local codes.



DURAWALL®, DURABASE®, STYLEMATE® _ FIBERGLASS SHOWER ENSEMBLES

When looking to put together the perfect shower ensemble for any bathroom design or décor, choose the products "Preferred by the Pros"...from E. L. Mustee & Sons.

DURAWALL® fiberglass wall systems, DURABASE® fiberglass shower floors and STYLEMATE® enclosures are recognized for classic design, high quality, innovative features, ease of installation and long service life.

A great addition to the DURAWALL® product line is the premium quality 760T-30WHT Shower wall system that features a distinctive embossed tile pattern across the back and side walls.

So let your bathroom design ideas run wild! Mustee's DURAWALL®, DURABASE® and STYLEMATE® products will help you create the bathroom shower space of your dreams.



Tongue-andgroove fit



Direct to stud


Features

- DURAWALL® shower walls feature convenient direct-to-stud mounting, innovative leak-proof, tongue-and-groove panels
- DURAWALL® shower wall systems feature multiple, molded-in shelves and a deep gloss, mildew/stain-resistant finish
- Sturdy DURABASE® floors feature a slip resistant Starburst® floor design and a ribbed underbody for strength & support. All popular sizes are available including NEO-ANGLE and corner units...See pages 12 and 13 for complete DURABASE® features
- STYLEMATE® enclosures are available in numerous styles and configurations, utilize tempered safety glass and handsome polished chrome or gold frames. See complete features on page 11

Code Accepted

Fiberglass shower walls meet or exceed performance requirements:














Unlike bulky one-piece molded showers. Mustee's shower ensembles are packed in three to four cartons and easily carried through narrow hall/ stairways. Installation can be done within a confined area by one person.

Specifications



36" Corner Showers — Double Threshold

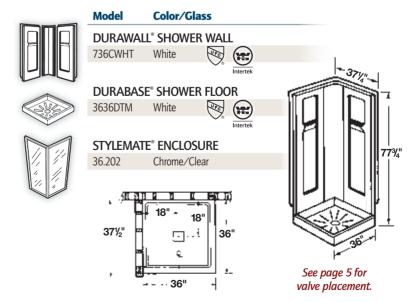


General: Furnish and install as shown on plans, a Corner Shower Ensemble, as manufactured by E. L. Mustee & Sons, Inc., consisting of:

DURAWALL* Shower Walls - Model 736CWHT shall be semi-gloss, 3-piece wall. Panels are molded fiberglass, using matched metal molds under extreme heat and pressure with a minimum uniform thickness of 125 mils and mount direct-to-studwalls. Include corner panel and two side panels with molded-in shelf. Self-aligning panels interlock using a tongueand-groove connection. Shall meet ANSI Specification Z 124.1.2. Color: White.

DURABASE® Shower Floor — Model 3636DTM, refer to page 13 for specifications.

STYLEMATE® Enclosure - Model 36.202, refer to page 11 for specifications.


SQUARE SHOWERS




Shower Size	A	В	c	D	E	F	
32" x 32"	32"	32"	33½"	16"	16"	331/4"	
36" x 36"	36"	36"	37½"	18"	18"	371/4"	
					1		

Shower shown with optional StyleMate® Pivot Door. See available models below.







Valve Placement **Dimensions**

Specifications

32"x 32" Showers



Color/Glass











36" x 36" Showers



Color/Glass

DURAWALL® SHOWER WALLS

736WHT 736BN

White Bone







DURABASE® SHOWER FLOOR

3232M	
รวรวธท	

732BN

White Bone

White

Bone





DURABASE® SHOWER FLOOR

3636M	
3636BN	











STYLEMATE® PIVOT DOOR - Height 65"

32.705	Chrome/Clear
32.706	Oil-Rubbed Bronze/Clear

STYLEMATE® PIVOT DOOR - Height 65"

36.403	Chrome/Clear
36.404	Oil-Rubbed Bronze/Clear

General: Furnish and install as shown on plans, a Shower Ensemble, as manufactured by E. L. Mustee & Sons, Inc., consisting of:


DURAWALL® Shower Walls — Model: _ (732 or 736) shall be semi-gloss, 3-piece wall. Panels are molded fiberglass, using matched metal molds under extreme heat and pressure with a minimum uniform thickness of 125 mils and mount direct-to-studwalls. Include center panel with molded-in shelf and two side panels, each with molded-in shelf. Self-aligning panels using a tongue-and-groove connection. Shall meet ANSI Specification Z 124.1.2. Color: __ (White, Bone).

DURABASE® Shower Floors — Model: _ ___ refer to page 12 & 13 for specifications.

STYLEMATE® Pivot Door Enclosures — Model: ____ refer to page 11 for specifications.




RECTANGULAR SHOWERS



Shower Size	Α	В	С	D	Е	F
32" x 48"	48"	32"	33½"	24"	16"	331/4"
34" x 48"	48"	34	35½"	24"	17"	351/4"

Shower shown with optional StyleMate® By-Pass Door. See available models below.





valve placement.

Specifications

32"x 48" Showers

Color/Glass Model

DURAWALL® SHOWER WALLS

748-32WHT 748-32BN

White Bone



34" x 48" Showers

Model Color/Glass

DURAWALL® SHOWER WALLS

748-34WHT 748-34BN

White Bone





DURABASE® SHOWER FLOOR

3248M 3248BN Bone





DURABASE® SHOWER FLOOR

3448M White 3448BN Bone







STYLEMATE® BY-PASS ENCLOSURE - Height 69" Framed design

48.403 Chrome/Clear Brushed Nickel/Clear 48.404 48.405 Oil-Rubbed Bronze/Clear Frameless design 48.406 Chrome/Clear Brushed Nickel/Clear 48.407 48.408 Oil-Rubbed Bronze/Clear

STYLEMATE® BY-PASS ENCLOSURE — Height 69"

Framed design 48.403

48.404	Brushed Nickel/Clear
48.405	Oil-Rubbed Bronze/Clear
Frameless design	
48.406	Chrome/Clear
48.407	Brushed Nickel/Clear
18 108	Oil-Rubbed Bronze /Clear

Chrome/Clear

General: Furnish and install as shown on plans, a Shower Ensemble, as manufactured by E. L. Mustee & Sons, Inc., consisting of:

(748-32 or 748-34) shall be semi-gloss, 3-piece wall. Panels are molded fiberglass, using matched metal molds under extreme heat and DURAWALL® Shower Walls - Model: _ pressure with a minimum uniform thickness of 125 mils and mount direct-to-studwalls. Include center panel with molded-in shelf and two side panels, each with molded-in shelf. Selfaligning panels using a tongue-and-groove connection. Shall meet ANSI Specification Z 124.1.2. Color: ___ (White, Bone).

DURABASE® Shower Floors — Model: ___ refer to page 12 & 13 for specifications. STYLEMATE® By-Pass Enclosures – Model: ______ refer to page 11 for specifications.




NEO-ANGLE SHOWERS



Shower			
Size	A	В	C
36"	37½"	18"	371/4"
38"	39½"	20"	391/4"
42"	431/2"	24	431/4"

Shower shown with optional StyleMate Enclosure. See available models below.





See page 5 for valve placement.

Specifications

36" Showers

Model Color/Glass



DURAWALL® SHOWER WALLS

736CWHT White 736CBN Bone





38" Showers

Model Color/Glass

DURAWALL® SHOWER WALLS

738CWHT

White



42" Showers

Model Color/Glass

DURAWALL® SHOWER WALLS

742CWHT 1742CBN I

White Bone





DURABASE® SHOWER FLOOR

3636CM 3636CBN White Bone



DURABASE® SHOWER FLOOR

3838CM

White



DURABASE® SHOWER FLOOR

4242CM 4242CBN White Bone







STYLEMATE® NEO-ANGLE ENCLOSURE — Height 70"

LIVELOSOI	L Height 70
36.750	Chrome/Obscure
36.761	Chrome/Clear
36.762	Brushed Nickel/Clear
36.763	Oil-Rubbed Bronze/Clear

STYLEMATE® NEO-ANGLE ENCLOSURE — Height 70"

38.750	Chrome/Obscure
38.751	Chrome/Clear
38.752	Brushed Nickel/Clear
38.753	Oil-Rubbed Bronze/Clear

STYLEMATE® NEO-ANGLE FNCLOSURE — Height 70"

LINCLOSUIL — Height 70				
42.750	Chrome/Obscure			
42.751	Chrome/Clear			
42.752	Brushed Nickel/Clear			
42.753	Oil-Rubbed Bronze/Clear			

General: Furnish and install as shown on plans, NEO-ANGLE Shower Ensembles, as manufactured by E. L. Mustee & Sons, Inc., consisting of:

DURAWALL* Shower Walls — Model: ______ (736C, 738C or 742C) shall be semi-gloss, 3-piece wall. Panels are molded fiberglass, using matched metal molds under extreme heat and pressure with a minimum uniform thickness of 125 mils and mount direct-to-studwalls. Include comer panel and two side panels with molded-in shelf. Self-aligning panels using a tongue-and-groove connection. Shall meet ANSI Specification Z 124.1.2. Color: ______ (White, Bone).

DURABASE® Shower Floors — Model: ______ refer to page 13 for specifications.

STYLEMATE® NEO-ANGLE Enclosures — Model: ______ refer to page 11 for specifications.

Photo shows ShowerTub shower floor and STYLEMATE® By-Pass Enclosure.





 Reverse side of center panel has clips for securing to bathtub.



■ 1¹/₄" flanges fasten direct-to-studwalls with screws, drywall conceals flanges.

760T-30WHT & 760T-34WHT DURAWALL® FIBERGLASS SHOWER WALLS FOR 30" x 60" & 34" x 60" SHOWER ENSEMBLES

Features

- Produced from high-grade, reinforced, molded fiberglass for optimum strength and impact resistance using matched metal molds under heat and pressure.
- Fits 60" x 30" alcove...same footprint as a standard bathtub.
- Embossed large-tile pattern on back and side panels
- Five-panel wall system with interlocking tongue-and-groove seams that assemble quickly to create a watertight wall surround.
- Mounts direct-to-stud with mounting flanges hidden behind drywall or other wall treatment.
- Available in white.
- Smooth, colorfast deep gloss finish, resists scuffs.
- Mold and mildew-resistant...easy to clean.



D"



Model	Shower Size	A	В	C	D	E
760T-30WHT	30" x 60"	73-1/4"	25-1/4"	48"	6"	6"
760T-34WHT	34" x 60"	73-1/4"	25-1/4"	48"	6"	10"

572.300 VARISTONE™Shelves. See page 9 for information.

Specifications

30"x 60" Showers

Model Color/Glass





760T-30WHT White



SHOWERTUB™ SHOWER FLOORS

White 3060L

60.408







Drain locations: R = Right Hand I = Left Hand

STYLEMATE® BY-PASS ENCLOSURES Framed design

//	//	
1	1/4	
19	1	

60.4	403	Chrome/Clear
60.4	404	Brushed Nickel/Clear
60.4	405	Oil-Rubbed Bronze/Clear
Fra	meless c	lesign
CO	100	Cl /Cl

60.406 Chrome/Clear 60.407 Brushed Nickel/Clear Oil-Rubbed Bronze/Clear



ENTRY RAMP 12" x 60" 360.100 White

30"x 60" Showers

760T-30WHT White

SHOWER FLOORS

Color/Glass

DURAWALL® SHOWER WALLS

CAREGIVER® BARRIER-FREE

White

White Drain locations: R = Right Hand L = Left Hand

Model

360R

CAREGIVER® GRAB BARS

See page 16 for Grab Bar options

CAREGIVER® FOLD-DOWN **SHOWER SEAT**

See page 17 for Fold-Down Seat options.

34"x 60" Showers

Model Color/Glass

DURAWALL® SHOWER WALLS

760T-34WHT White Available August, 2012.

DURABASE® SHOWER FLOORS



STYLEMATE® BY-PASS ENCLOSURES

Framed design

60.403	Chrome/Clear
60.404	Brushed Nickel/Clear
60.405	Oil-Rubbed Bronze/Clear
Frameless d	lesign
60.406	Chrome/Clear
60.407	Pruchod Nickel /Clear

Brushed Nickel/Clear 60.408 Oil-Rubbed Bronze/Clear

- See Grab Bars & Shower Seat options on pages 16 & 17. -

General: Furnish and install as shown on plans, a Shower Ensemble, as manufactured by E. L. Mustee & Sons, Inc., consisting of:

__ (760T-30WHT, 760T-34WHT). Shall be semi-gloss 5-piece wall. Panels are molded fiberglass, using matched metal molds under extreme DURAWALL® Shower Wall Model: heat and pressure with a minimum uniform thickness of 125 mils and mount direct-to-studwalls. Includes center panel and two corner and side panels. Self-aligning panels using an interlocking tongue-and-groove seam. Shall meet ANSI Specification Z 124.1.2. Color: White.

SHOWERTUB™ Shower Floors — Model: ___ __ see page 14 for specifications. CAREGIVER® Barrier-Free Shower Floors — Model: ____ ___ see page 14 for specifications. STYLEMATE® By-Pass Enclosures — Model: ____ ___ see page 11 for specifications.

CAREGIVER® Grab Bars - Model: ____ __ see page 16 for specifications. ____, see page 17 for specifications. CAREGIVER® Fold-Down Shower Seat — Model: ____ DURABASE® Shower Floors — Model: ______ see pages 14 & 15 for specifications.



572T VARISTONE™SHOWER/BATHTUB FIBERGLASS WALLS

Mustee's VARISTONE™ premium fiberglass, Model 572T combines classic elegance, quality construction and easy installation to make it the preferred choice.

Model 572T walls with their distinctive embossed tile pattern, fit perfectly with Mustee's DURABASE® shower floors and STYLEMATE® shower enclosures. CareGiver™ grab bars and seats can be easily installed as well. Also fits perfectly with Mustee's TOPAZ™ bathtubs and other 30" x 60" and 32" x 60" bathtubs.

Features

- Embossed 85/8" x 93/4" tile pattern on side and back panels
- Seamless corner panels are overlapped by the side and back panel and create a high-quality, watertight wall system
- Adhesive-mounts to drywall or like surfaces
- Colorfast, mold & mildew-resistant finish
- Easily trimmed for out-of-plumb alcoves or to install DURATRIM™ window trim kits
- 5 panel, package...two corners, two side walls and one back panel
- Designed to fit a maximum alcove range up to 39" wide by 42" deep... or up to 60" wide and by 34" deep
- 12" x 7" VARISTONE™ shelves can be used to create handy storage
- Available in white, bone and biscuit





All of the alcoves above feature Mustee's 572T VARISTONE™ walls.

572.300 VARISTONE[™] – Shelves (Order Separately)

572.300	White	
572.300BN	Bone	
572.300BT	Biscuit	

Order desired number of shelves separately. Sturdy shelf is easy to install. Carton is $12" \times 7 \frac{1}{4}" \times 4"$ and weighs 2.5 lbs.





shelves easily mount to the 760T-30 shower wall at any location on the wall. Order multiple shelves to best meet your personal preference.

These self-draining 12" x 7"

General: Furnish and install as shown on plans, VARISTONE™ Shower/Bathtub Shelf Model: ______ (572.300, White; 572.300BN, Bone; 572.300BT, Biscuit), as manufactured by E. L. Mustee & Sons, Inc. Shall be semi-gloss, 1-piece molded shelf using matched metal molds under extreme heat and pressure. Shall meet ANSI Specification Z 124.1.2.

Code Accepted

VARISTONE™ Shower/Bathtub Walls meet or exceed performance requirements:


American National Standards Institute (ANSI) — Specification Z 124.1.2 (ANSI)


Specifications

572T VARISTONE™ – Shower/Bathtub Walls

Carton contains two side, one center, two corner panels and easy to follow, illustrated installation instructions. Carton is 7.5% x 32" x 76" and weighs 110 lbs.

Model	Color
572TWHT	White
572TBN	Bone





General: Furnish and install as shown on plans, fiberglass VARISTONE™ Shower/Bathtub Walls Model 572T as manufactured by E.L. Mustee & Sons, inc. Shall be semi-gloss, 5-piece wall system. Panels are molded using matched metal molds under extreme heat and pressure with a minimum thickness of 125 mils. Shall meet ANSI Specifications Z 124.1.2 Colors: ______ (White, Bone)

DURAWALL® SHOWER WALLS

There's nothing like a new shower to dress up a bathroom and make the most of your available floor space. Whatever your plan, Mustee's Model 247, 260 and 265 square & rectangular shower wall systems and the Model 237 NEO-ANGLE/Corner Shower Wall System, give you the freedom to put your design ideas into motion.


Features

- High quality, thermoplastic construction
- Easily adhesive-mounts to drywall or like surfaces
- Six molded-in shelves...Models 247/260; three molded-in shelves...Model 237
- Available in color-fast white and bone
- High gloss, mold & mildew-resistant surface finish
- Trimmable flat panels
- Easily to install and clean
- Adjust for out-of-square walls

Specifications



247 DURWALL® – Square and Rectangular




Model	Color	Width	Side	Shelves
247WHT	White	Up to 48"	Up to 42"	Six

General: Furnish and install as shown on plans, DURAWALL* Shower Wall Model 247 as manufactured by E. L. Mustee & Sons, Inc. Thermoplastic wall system shall be 5-piece construction with six formed shelves and overlapping corner panels. Uniform color throughout entire thickness of each panel. Color: White.



260 DURAWALL® - Square and Rectangular




260WHT	White	Up to 60"	Up to 40"	Six	
260BN	Bone	Up to 60"	Up to 40"	Six	

General: Furnish and install as shown on plans, DURAWALL* Shower Wall Model 260 as manufactured by E. L. Mustee & Sons, Inc. Thermoplastic wall system shall be 5-piece construction with six formed shelves, seamless, overlapping corner panels. Uniform color throughout entire thickness of each panel. Color: ______ (White, Bone).



265 DURAWALL® - Square and Rectangular




265WHT Wh	ite Up to 71"	Up to 41½"	
-----------	---------------	------------	--

General: Furnish and install as shown on plans, DURAWALL* Shower Wall Model 265 as manufactured by E. L. Mustee & Sons, Inc. Thermoplastic wall system shall be 5-piece construction with seamless, overlapping corner panels. Uniform color throughout entire thickness of each panel. Color: White.



237 DURAWALL® – Neo-Angle/Corner



237WHT	White	Up to 42"	Three	
237BN	Bone	Up to 42"	Three	

General: Furnish and install as shown on plans, DURAWALL*
Shower Wall Model 237 as manufactured by E. L. Mustee & Sons, Inc.
Thermoplastic wall system shall be 3-piece construction with three formed shelves, seamless, overlapping corner panel. Uniform color throughout entire thickness of each panel. Color: ______ (White, Bone).









STYLEMATE SHOWER ENCLOSURES & DOORS

Looking for the best way to finish off your Mustee shower? That's easy...select one of our many decorative STYLEMATE® doors and enclosures to add that finishing touch.

Features

- Rolling doors include rollers with long-life bearings for years of smooth operation
- Chrome, brushed-nickel or oil-rubbed bronze frames are constructed from high-quality engineered aluminum
- Tempered safety glass options include clear or obscure glass
- Pivot doors feature magnetic catch
- Easy to install and clean
- Frameless by-pass doors available



Code Accepted

STYLEMATE® Enclosures meet or exceed performance requirements:

American National Standards Institute (ANSI) Specification Z 97.1



Specifications



Pivot Doors – Height 65"

Model	Opening	Finish	Glass
32.705	29"-31"	Chrome	Clear
32.706	29"-31"	Oil-Rubbed Bronze	Clear
36.403	34"-351/2"	Chrome	Clear
36.404	34"-35 1/3"	Oil-Rubbed Bronze	Clear

General: Furnish and install as shown on plans, a STYLEMATE® Pivot Door, as manufactured by E. L. Mustee & Sons, Inc. Model: shall be a swing style door with a bright (Chrome, Oil-Rubbed Bronze) finish aluminum frame and clear tempered safety glass panel. Continuous-pull handle with magnetic seal. Out-of-plumb conditions up to 1" can be adjusted at latch jamb. Can be installed for right or left opening. Shall meet ANSI Specification Z 97.1.



By-Pass Doors – Height 69"

Framea	l design		
48.403	47"	Chrome	Clear
48.404	47"	Brushed Nickel	Clear
48.405	47"	Oil-Rubbed Bronze	Clear
Framel	ess design		
48.406	47"	Chrome	Clear
48.407	47"	Brushed Nickel	Clear
48.408	47"	Oil-Rubbed Bronze	Clear
Framea	l design		
<i>Framea</i> 60.403	design 59"	Chrome	Clear
		Chrome Brushed Nickel	Clear Clear
60.403	59"		
60.403 60.404 60.405	59" 59"	Brushed Nickel Oil-Rubbed Bronze	Clear
60.403 60.404 60.405	59" 59" 59"	Brushed Nickel Oil-Rubbed Bronze	Clear
60.403 60.404 60.405 <i>Framelo</i>	59" 59" 59" ess design	Brushed Nickel Oil-Rubbed Bronze	Clear Clear

General: Furnish and install as shown on plans, a STYLEMATE® By-Pass Enclosure, as manufactured by E. L. Mustee & Sons, Inc. Model: _ ____ with bright _ Brushed Nickel, Oil-Rubbed Bronze) finish. Shall be by-pass style with aluminum frame and clear tempered safety glass. Out-of-plumb conditions up to 1" can be adjusted. Shall meet ANSI Specification Z 97.1.



Neo-Angle Enclosures – Height 70"

Model	Fits	Finish	Glass
36.750	36" Neo	Chrome	Obscure
36.761	36" Neo	Chrome	Clear
36.762	36" Neo	Brushed Nickel	Clear
36.763	36" Neo	Oil-Rubbed Bronze	Clear
38.750	38" Neo	Chrome	Obscure
38.751	38" Neo	Chrome	Clear
38.752	38" Neo	Brushed Nickel	Clear
38.753	38" Neo	Oil-Rubbed Bronze	Clear
42.750	42" Neo	Chrome	Obscure
42.751	42" Neo	Chrome	Clear
42.752	42" Neo	Brushed Nickel	Clear
42.753	42" Neo	Oil-Rubbed Bronze	Clear

General: Furnish and install as shown on plans, NEO-ANGLE Shower Ensemble, as manufactured by E. L. Mustee & Sons, Inc., consisting of: STYLEMATE® Enclosure - Model: _ (Chrome, Brushed Nickel, Oil-Rubbed Bronze) finish. Safety glass panels shall be obscure or clear. Side-wall jambs adjust 3/4" for out-of-plumb walls. Reversible pivot door with continuouspull handle integrally extruded and magnetic seal. Door can be hung to open left or right. Shall meet ANSI Specification Z 97.1.




Double-Threshold Enclosures – Height 70"

General: Furnish and install as shown on plans, Double Threshold Shower Ensemble, as manufactured by E. L. Mustee & Sons, Inc., consisting of: STYLEMATE® Enclosure Model 36.202 with bright Chrome finish aluminum frame. Safety glass panels shall be clear. Side-wall jambs adjust 3/4" for out-of-plumb walls. Reversible pivot door with continuous-pull handle integrally extruded and magnetic seal. Door can be hung to open left or right. Shall meet ANSI Specification Z 97.1.



The real strength of a quality shower begins with the floor. Mustee's line of DURABASE® & SHOWERTUB™ shower floors are solid, stable, quality-constructed and exceed expectations.

Mustee engineers devoted time and energy perfecting the support structure of DURABASE® & SHOWERTUB™shower floors. Add to that Mustee's decades of fiberglass molding experience and the net result is a handsome DURABASE® Square, Rectangle, NEO-ANGLE, Corner and SHOWERTUB™ units that will look great, provide virtually unlimited design options and also deliver years of dependable service.



Specifications

Nom. Size

32" x 32"

34" x 34"

36" x 36"

42" x 42"

Square - Single Threshold

Model


3232M

3434M

3636M

4242M







merten			
Α	В		
32"	16"		
34"	17"		
36"	18"		

21"

When Ordering Color Models — include suffix BN for Bone or BT for Biscuit (eg. 4242CBN, 3448BT)

Colors

White

White

White, Bone

White, Bone, Biscuit

Nom. Size	Model	Colors	Α	В	C	
Drain Sec	als – For	DURABASE® Shower	Floors			
	32.403	For 2" soil pipe/ser. wt.				
	32.404	For 2" copper pipe				
	32.405	For 11/2" ABS/PVC pipe				

Rectangular – Single Threshold



						intertex
Nom. Size	Model	Colors	A	В	C	D
32" x 48"	3248M	White, Bone, Biscuit	48"	32"	16"	24"
32" x 54"	3254M	White	54"	32"	16"	27"
32" x 60"	3260M	White	60"	32"	16"	30"
34" x 42"	3442M	White, Bone, Biscuit	42"	34"	17"	21"
34" x 48"	3448M	White, Bone, Biscuit	48"	34"	17"	24"
34" x 54"	3454M	White, Bone	54"	34"	17"	27"
34" x 60"	3460M	White, Bone, Biscuit	60"	34"	17"	30"
42" x 36"*	4236M	White	36"	42"	21"	18"

THRESHOLD

ShowerTub[™] – Shower Floors

30" x 60"	3060L	White	60"	30"	15"	30"	
30" x 60"	3060LBN	Bone	60"	30"	15"	30"	
30" x 60"	3060R	White	60"	30"	15"	30"	
30" x 60"	3060RBN	Bone	60"	30"	15"	30"	

Drain location see page 14, drain not included

^{*} Threshold on 36" side.

Features

- Study, one-piece compression molded fiberglass with structural underbody
- Integrally molded drain with seal and removable strainer, except Model 3060R/L
- Slip-resistant Starburst® floor design
- Designed for connection to 2" (Sch. 40) ABS, PVC or iron DWV sanitary pipe
- Available in all popular sizes for square, rectangular, NEO-ANGLE and corner units
- Engineered to fit all Mustee wall systems (See pages 3 through 9) as well as tile
- Easy to clean, mold/mildew-resistant surface finish

Code Accepted

DURABASE® and SHOWERTUB™ Shower Floors meet or exceed performance requirements:

International Association of Plumbing and Mechanical Officials (IAPMO®)




American National Standards Institute (ANSI) — Specification Z 124.1.2



■ Warnock Hersey® (Canada) Listed — CSA test standards: Shower Floor




■ American Society of Testing and Materials (ASTM) — D 635 E-84 and E-162



ShowerTub™ Model 3060 , as manufactured by E. L. Mustee & Sons, Inc. Floor to be one-piece, molded fiberglass, made with ith the flow of water. Size: _______"x ______". Shoulder will be no less than 3" high or less than **General:** Furnish and install as shown on plans, DURABASE® Shower Floor Model: _ __". Shoulder will be no less than 3" high or less than matched metal molds. Surface to be slip-resistant Starburst® design that does not interfere with the flow of water. Size: 1" wide. Tiling flange will extend not less than 1" higher than the threshold which provides an integral molded water barrier. Threshold will be not less than 4½" high. Molded-in drain and drain seal for installation of 2" iron DWV (Sch. 40) PVC or ABS sanitary drain pipe. Removable strainer. Shall meet ANSI Specification Z 124.1.2. Color: __ (White, Bone, Biscuit).

Neo-Angle – Corner Threshold








Intertek
intertek

Nom. Size	Model	Colors	Α	В	C
36" x 36"	3636CM	White, Bone, Biscuit	36"	12"	18"
		Center lin	es: 17½"	x 24¾"	x 17½"
38" x 38"	3838CM	White, Bone, Biscuit	38"	12"	20"
		Center lin	es: 19½"	x 24¾"	x 19½"
42" x 42"	4242CM	White, Bone	42"	12"	24"
		Center line	es: 231/2" >	x 243/ ₈ "	x 23½"

Center line varies based upon thickness of side walls.

Corner – Double Threshold









Nom. Size	Model	Colors	A	В
34" x 34"	3434DTM	White	34"	17"
36" x 36"	3636DTM	White	36"	18"

Strainers – For DURABASE® Shower Floors

34.301	Stainless steel
42.326	Plastic/Chrome Plated
42.327	Plastic/Gold Plated



GapSeal-Pro[™] – For all shower floors and bathtubs

The flexible PVC GapSeal-Pro™ features a strong adhesive strip that allows it to be easily positioned to "extend" tile flange and effectively seal the gap between drywall or like-surfaces on shower floors or bathtubs. Patent pending.

Model	Size
60.320A	132" long x 2" tall






Scan to access more details.

SHOWERTUB™ SHOWER FLOOR REPLACES 30" x 60" BATHTUB



Specifications



Model	Color	Drain
3060R	White	Right Hand
3060RBN	Bone	Right Hand
3060L	White	Left Hand
3060LBN	Bone	Left Hand



Optional Drain Kit — use with 3060R/L to replace tub waste and connect to existing pipe.

Model	Color
60.300A	White
60.300ABN	Bone

Features

- Fits the same footprint as a standard 30" x 60" bathtub
- High quality molded fiberglass construction
- Drain location offset 8½" x 15"
- Right and left-hand models
- Accommodates standard 2" drain or 60.300 Drain Kit
- Available in white and bone matched finishes with Mustee wall systems, see pages 7 and 9; as well as tile or like finish




Accessories — Grab Bars • Fold-Down Seats • See pages 16-17.

General: Furnish and install as shown on plans, ShowerTub™ Model: _____ as manufactured by E. L. Mustee & Sons, Inc. Floor to be one-piece, molded fiberglass, using matched metal molds under extreme heat and pressure. Surface to be slip-resistant design that does not interfere with flow of water. Size: 30" x 60". Flood level rim will not be less than 3" high. Tiling flange will extend not less than 1" higher than the threshold which is an integral molded water barrier. Threshold will be 4½" high. Drain hole offset 8½" by 15" to accept drain kit for 2" PVC, ABS or iron DWV pipe, available left or right hand. Color: _____ (White, Bone).

رائي

Barrier-Free Shower Floor 30"X 60" and Entry Ramp







BARRIER-FREE SHOWER FLOOR

30 X 00		
360R	White	Right Hand
360RBN	Bone	Right Hand
360L	White	Left Hand
360LBN	Bone	Left Hand

ENTRY RAMP 12" X 60"


360.100	White
360.100BN	Bone

360.210 Continuous Water Barrier Kit – Creates an effective water barrier for the shower threshold that easily collapses for wheelchairs or walkers then instantly reforms to keep water from escaping.

ADA Accepted — See page 15. **Accessories** — Grab Bars • Fold-Down Seats • See pages 16–17.

General: Furnish and install as shown on plans DURABASE" Shower Floor Model: ______, as manufactured by E.L. Mustee & Sons, Inc. Floor to be one piece, molded fiberglass made with matched metal molds. Surface to be slip-resistant that does not interfere with the flow of water. Size 30" x 60". Shoulder will be no less than 3" higher or less than 1" wide. Tiling flange will extend not less than 1" high to provide an integral water barrier. Shall meet ADA, ASTM D635, E-84 and D635, and Code of Federal Regulation July 1, 1997. Color: ______ (White, Bone).

360.100 Entry Ramp — Furnish and install as shown on plans DURABASE* Shower Floor Entry Ramp Model: ______, as manufactured by E. L. Mustee & Sons, Inc. Ramp to be one piece, molded fiberglass made with matched metal molds. Size 12" x 60". Color: ______ (White, Bone).



CareGiver EASY-ACCESS SHOWER FLOORS

The CareGiver® product line of Easy-Access Shower Floors provides quality-built, engineered solutions that enable safe, effortless shower access to those with limited or assisted mobility. Companion products

include Fold-down Shower Seats and Grab Bars (See pages 16–17)

Features

- Slip-resistant surfaces...stain, mildew and mold resistant finish
- High quality molded fiberglass construction
- Uses standard 2" drain
- Available in white & bone matched finishes with Mustee wall systems (See page 10)
- Easy to install and clean
- Meets ADA requirements as specified

ADA Accepted

- Americans with Disabilities Act (ADA)
- Code of Federal Regulations July 1, 1997 (ADA)
- American Society of Testing & Materials (ASTM) D 635 Flammability, E-84 Flame Spread, E-162 Fire Retardancy



Specifications



Model	Color	Drain	
TRANSFER SHOW		R FLOOR	
3739M	White	Center Drain	
3739BN	Bone	Center Drain	


ADA Accepted — See above. Accessories — Grab Bars • Fold-Down Seats • See pages 16–17. 360.210 Water Barrier Kit — See page 14.

General: Furnish and install as shown on plans Transfer Shower Floor Model: ______, as manufactured by E. L. Mustee & Sons, Inc. Floor to be one piece, molded fiberglass made with matched metal molds. Surface to be slip-resistant Starburst* design that does not interfere with the flow of water. Size 37"x 39". Shoulder will be no less than 3" higher or less than 1" wide. Tiling flange will extend not less than 1" high to provide an integral water barrier. Threshold will be ½" high. Molded-in drain and drain seal for installation of 2" iron DWV (Sch. 40) PVC or ABS Sanitary drain pipe. Removable strainer. Shall meet ADA, ASTM D635, E-84 and D635, and Code of Federal Regulation July 1, 1997 and July 1, 2007. Color: _______ (White, Bone).

_...d

Barrier-Free Shower Floor 38"X 65" and Entry Ramp






BARRIER-FREE SHOWER FLOOR 38" X 65"

3865 White Center Drain

Entry ramp 12" x 60" 360.100 White






Drain Assembly — (Order Separately)

Model	Description
42.317A	Drain assembly
42.320	Optional drain for 2" copper (DWV)
42.321	Optional drain seal for 2" soil pipe (SW)

ADA Accepted — See above. **Accessories** — Grab Bars • Fold-Down Seats • See pages 16—17. **360.210 Water Barrier Kit** — See page 14.

General: Furnish and install as shown on plans Barrier-Free Shower Floor Model 3865, as manufactured by E. L. Mustee & Sons, Inc. Floor to be one piece, molded fiberglass made with matched metal molds. Surface to be slip-resistant Starburst* design that does not interfere with the flow of water. Size 38" x 65". Shoulder will be no less than 3" higher or less than 1" wide. Tiling flange will extend not less than 1" high to provide an integral water barrier. Threshold will be ½" high. Shall meet ADA, ASTM D635, E-84 and D635, and Code of Federal Regulation July 1, 1997 and July 1, 2007. Color: White.

CAREGIVER® GRAB BARS



TWIST-LOCK CONCEALED FLANGE — locking tabs on the flange cover plate. Turn 15 degrees under the matching wedges on the mounting flange.



GRAB BARS — stainless steel, concealed twist-lock flanges

concealed twist-lock flanges

Grab bars benefit those needing extra stability and support when showering. What is not so readily obvious is the difference in quality from one make to another. Mustee's reputation for excellence in both design features and quality, make the company's CareGiver line of Grab Bars the preferred choice of both healthcare professionals and home owners alike.

Featuring exceptional strength and rigidity, CareGiver grab bars are manufactured to meet or exceed the most stringent industry and government requirements. Produced from heavy gauge stainless steel, Mustee's straight or angled Grab Bars truly are the industry standard for quality, features, performance and dependability.

Features

- Smooth stainless steel, 18-gauge tubing, satin finish, 1½" diameter
- Exclusive "Twist-Lock" concealed flange-snaps into place for a secure, tamper-proof mounting
- All bars have a nominal offset distance of 1½" (38 mm)
- Bar can't separate from flange
- Flat contact surface won't cut wall surfaces bar remains stable without further tightening
- 304 Stainless steel mounting flange 14 gauge
- Tested to withstand 500 lbs. of downward load when properly installed
- Meets or exceeds HUD, FHA, VA, ADA and other Federal/Local codes

11/2" Straight - Safety Grab Bars

Size		Model
18"	457 mm	390.305
24"	610 mm	390.301
36"	915 mm	390.306
42"	1067 mm	390.307
48"	1220 mm	390.302



General: Furnish and install as shown on plans, Straight Safety Grab Bar Model: ______, as provided by E. L. Mustee & Sons, Inc. Grab bar with Twist-Lock concealed flange shall be 1½" diameter, 18 gauge, type 304 satin-finish stainless steel tubing. 14-gauge stainless steel mounting flange shall be Heliarc welded to the tube to form a single structural unit. Grab bar shall comply with applicable building codes. Meets ANSI A117.1.

11/2" **Angled** – Safety Grab Bars

	A — Size — B	С	Model
* A	24" 610 mm 16" 430 mm	90°	390.308
5 B	32" 813 mm 16" 430 mm	90°	390.309
A	24" 610 mm 16" 430 mm	90°	390.310
B (125 mm)	32" 813 mm 16" 430 mm	90°	390.311
A *	30" 762 mm	90°	390.312
C° A	12" 305 mm No Corner Flange	120°	390.313
Rotate for RH or LH use	16" 430 mm	120°	390.314
C° A - A	24" 610 mm	120°	390.315
Inside Corner Styl	les		
18"	2/1" 863 mm 19" 457 mm	90°	390 304



General: Furnish and install as shown on plans, Angled Safety Grab Bar Model: ______, as provided by E. L. Mustee & Sons, Inc. Grab bar with Twist-Lock concealed flange shall be $1\frac{1}{2}$ " diameter, 18 gauge, type 304 satin-finish stainless steel tubing. 14-gauge stainless steel mounting flange shall be Heliarc welded to the tube to form a single structural unit. Grab bar shall comply with applicable building codes. Meets ANSI A117.1.

CAREGIVER® FOLD-DOWN SEATS





Strong, sturdy and quality built, Mustee offers the most popular seat configurations and styles in both self-supporting and seats with legs.

Besides being a necessity for those who are unsteady on their feet and require assistance in the shower, many others enjoy Mustee premium fold-down shower seats for the convenience and comfort.

CareGiver old-down seats are the ideal solution for creating a comfortable and sturdy sit space in showers of all types.



Features

- Popular sizes & shapes
- Fire & mildew resistant
- When properly installed, wall-mount units can support up to 400 lbs., and leg-supported units can support up to 500 lbs.
- White cushion filled with high-resilience, high-density foam to maintain original shape
- Smooth cushion edges without corded piping eliminates discomfort for pressure-sensitive bathers
- Rust-resistant stainless steel hardware
- Easy to install & clean stain-resistant surface

Left-Hand Seat - Wall Mount 141/2" A 12" B	Size (A x B) 26" x 21" 32" x 21"	Model 390.402 390.404	Right-Hand Seat - Wall Mount A 14½" 12"	Size (A x B) 26" x 21" 32" x 21"	Model 390.401 390.403
Left-Hand Seat - With Legs 141/2" A 12" B	26" x 21" 32" x 21"	390.405 390.406	Right-Hand Seat - With Legs B 14'/2" 12"	26" x 21" 32" x 21"	390.407 390.408
Rectangular Seat - Wall Mount A B	23" x 14½" 26" x 14½" 32" x 14½"	390.413 390.409 390.410	Rectangular Seat - With Legs	26" x 14½" 32" x 14½"	390.411 390.412

WALL MOUNTED UNITS:

General: Furnish and install as shown on plans, Fold-down Wall Mounted Shower Seat Model: ______ as provided by E. L. Mustee & Sons, Inc. Shower seat tubing shall be one-inch diameter, 18 gauge, type 304 stainless steel with #4 satin finish. Mounting brackets shall be 12-gauge type 304 stainless steel. Padded vinyl cushion shall have 1½" high density, high-resilience foam, covered with fire and mildew resistant, UV inhibited, marine-grade Naugahyde. White cushion shall have no external piping. Shower seat unit shall comply with applicable building codes. Meets ANSI A117.1.

LEG SUPPORTED UNITS:

General: Furnish and install as shown on plans, Fold-down Leg-Supported Shower Seat Model: ______, as provided by E. L. Mustee & Sons, Inc. Shower seat tubing shall be one-inch diameter, 18 gauge, type 304 stainless steel with #4 satin finish. Shall include a fold-down mechanism with four support legs. Mounting brackets shall be 12-gauge type 304 stainless steel. Padded vinyl cushion shall have 1½" high density, high-resilience foam, covered with fire and mildew resistant, UV inhibited, marine-grade Naugahyde. White cushion shall have no external piping. Shower seat unit shall comply with applicable building codes. Meets ANSI A117.1.



UTILITY FIBERGLASS SINKS

The new generation of Mustee Utility Sinks are not just for laundry rooms anymore...and when they look as good as Mustee utility sinks, it's easy to envision these great looking sinks in craft or work rooms or at home bars.

Mustee designs the unbeatable combination of performance, practicality and premier finish into each to deliver the best in form, function and features.

Features

- Molded fiberglass construction
- Self-rimming, easy to install and clean
- Stain-resistant, colorfast surface finish
- Multiple pilot holes to install single or dual handle faucet with 4" or 8" center, soap dispensers or sprayers

Code Accepted

Utility Sinks meet or exceed performance requirements:

 International Association of Plumbing and Mechanical Officials (IAPMO*)




- Warnock Hersey® (Canada) meets CSA #B45.0 and B.45.5
- American National Standards Institute (ANSI) Specification Z 124.6




Specifications

25 VECTOR™ Multi-Task Sink – Includes 1½" Drain for 1½" P-Trap with Stopper ®








Dimensions LxWxD* Overall 22" x 25" x 12¾" Inside (top) 15½" x 22"

Overall 22" x 25" x
Inside (top) 15½" x 22"
Inside (shelf) 15½" x 3½"
Cutout 21" x 24"

Model	Color	
25	White	
25BT	Biscuit	
25TW	Twilight	
25PD	Prairie Drift	

12-Gallon Capacity

25 Vector Colors (check for availability)



General: Furnish and install as shown on plans, a Countertop Sink Model 25 as manufactured by E. L. Mustee & Sons, Inc. Material composition shall be molded fiberglass, using matched metal molds under extreme heat and pressure. One-piece, seamless construction with self-rimming edge and complete 1½" drain assembly. Shall meet ANSI Specification Z.124.6 Overall size 22" length x 25" width x 12³/₄" depth, weight 16 lbs. Color: _______(White, Biscuit, Twilight, Prairie Drift).

Accessories

Optional Utility Rack – Model 25.300



The optional Utility Rack is the perfect way to realize all the functionality that the VECTOR™ Multi-Task Sink has to offer.

Overall $14\frac{1}{2}$ " x 21"

25.300 White


Designed to rest on the shelf and opposite ledge, this strong, VECTOR™ utility rack creates a work surface ideal for rinsing, watering, craft work or drying...the options are endless!

White plastic coated steel wire rack will support up to 40 lbs.





10 Utility Sink – Includes $1\frac{1}{2}$ " Drain for $1\frac{1}{2}$ " P-Trap, with Stopper





Color

White

Bone


Model

10BN

17-Gallon Capacity

10






General: Furnish and install as shown on plans, a Countertop Sink Model 10 as manufactured by E. L. Mustee & Sons, Inc. Shall be molded fiberglass, using matched metal molds under extreme heat and pressure. One-piece molded construction with self-rimming edge. Complete drain assembly. Overall size: 22" x 25" x 13³/₄". Shall meet ANSI Specification Z 124.6. Color: _ (White, Bone).

11 Utility Sink - 3 1/2" Opening







Overall 20" x 17" x 10" 15" x 14" x 9½' Inside Bowl Cutout 181/3" x 151/3"

11 White 11BN Rone 11BT Biscuit

7-Gallon Capacity

General: Furnish and install as shown on plans, a Countertop Sink Model 11 as manufactured by E. L. Mustee & Sons, Inc. Material composition shall be molded fiberglass, using matched metal molds under extreme heat and pressure. One-piece seamless construction with self-rimming edge. 3 1/2" drain opening. Overall size: 20" x 17" x 10". Shall meet ANSI Specification Z 124.6. Color: (White, Bone, Biscuit).


20 Bar Sink $-3\frac{1}{2}$ " Opening











15" x 15" x 73// Overall Inside Bowl 10" x 12" x 7" Cutout 13½" x 13½"

20 White **20BN** Bone 20BT Biscuit **20SG** Sage Granite


3-Gallon Capacity

General: Furnish and install as shown on plans, a Countertop Sink Model 20 as manufactured by E. L. Mustee & Sons, Inc. Shall be molded fiberglass, using matched metal molds under extreme heat and pressure. One-piece construction with self-rimming edge. 3 ½" drain opening. Overall size: 15" x 15" x 7¾". Shall meet ANSI Specification Z 124.6. Color: (White, Bone, Biscuit, Sage Granite).

10C Utility Sink - 3 1/2" Opening







Overall Inside Bowl Cutout


22" x 25" x 13¾" 15¾" x 21¾" x 13¼" 21" x 24"

10C White 10CBT **Biscuit**

17-Gallon Capacity

General: Furnish and install as shown on plans, a Countertop Sink Model 10C as manufactured by E. L. Mustee & Sons, Inc. Shall be molded fiberglass, using matched metal molds under extreme heat and pressure. One-piece molded construction with self-rimming edge. $3\frac{1}{2}$ " drain opening. Overall size: 22" x 25" x $13\frac{3}{4}$ ". Shall meet ANSI Specification Z 124.6. Color: ______ (White, Biscuit).

Available Sink Colors (check for availability)







UTILATUB® & UTILATWIN® LAUNDRY TUBS

Without question, the standard of excellence in single and double bowl laundry tubs is UTILATUB® and UTILATWIN®...exclusively from E. L. Mustee & Sons, Inc.

Decades of continual product innovation and development have positioned the very popular UTILATUB® and UTILATWIN® laundry/utility tubs as the brand the pro's specify and install for the best in sizing/selection, features, quality construction and most importantly, user

Mustee tubs are molded using premier DURASTONE® structural fiberglass and Co-PolyPure™ polypropylene. There's a size and style to fit in virtually any setting from the smallest home to the largest commercial installation.


Features

- Extra deep tubs help retain water...capacities range from 18 to 23 gallons per bowl
- High strength, impact resistant construction
- All models hook up to standard 11/2" P-Trap
- Floor-mount models feature heavy gauge steel legs with self-levelers
- Wall-mount models feature a heavy gauge steel mounting bracket and hardware
- Stain and mildew-resistant surface, easy to clean
- Twin drain assembly included with all UTILATWIN® models

Specifications

Premier Thermoplastic Laundry Tubs






Model	Mount	Length*	Width*
27F/W U	JTILATWIN° I	_AUNDRY TU	JB
27F	Floor	24"	40"
27W	Wall	24"	40"
38-Gallon Ca	pacity		Intertek

General: Furnish and install as shown on plans, UTILATWIN® Laundry/Utility Tub Model: _ __ (27F, 27W), as manufactured by E. L. Mustee & Sons, Inc. Unit shall be one-piece molded construction using cellular structural thermoplastic with matched metal molds under extreme heat and pressure. Complete drain assembly, twin drain waste coupling, recessed divider wall between tubs and floor or wall mounting hardware. Shall meet ANSI Specification Z 124.6. Color: White.











231

23"


UTILATOP™ Top Cover Available (See page 22)

General: Furnish and install as shown on plans, UTILATUB® Laundry/Utility Tub Model: (19F, 19W), as manufactured by E. L. Mustee & Sons, Inc. Tub shall be one-piece molded construction using structural thermoplastic with matched metal molds under extreme heat and pressure. Tub to include integrally molded drain assembly, stopper and floor or wall mounting hardware. Shall meet ANSI Specification Z 124.6. Color: White



* Length (front to back);

Width (left to right).





	10
71/2"	15
+	15
231/2"	15
	19-0
11/2"-	

5F/W UTILATUB® LAUNDRY TUB Floor 23 "

Wall

Gallon Capacity



Built-in scrub board

23 "

General: Furnish and install as shown on plans, UTILATUB® Laundry/Utility Tub Model: (15F, 15W), as manufactured by E. L. Mustee & Sons, Inc. Tub shall be one-piece molded construction using structural thermoplastic with matched metal molds under extreme heat and pressure. Tub to include built-in scrub board, integrally molded drain assembly, stopper and floor or wall mounting hardware. Shall meet ANSI Specification Z 124.6. Color: White.

Features (Continued)

- All Mustee laundry tubs accommodate 4" center set faucets. Model 18F/W, 27F/W and 26F/W can also accommodate 8" center set and single-lever faucets
- Sturdy, one-piece molded design
- Extra deep molded tubs minimize overflow risk
- Leakproof, integrally molded-in drain with stopper



Sturdy, steel legs



LITH ATWING twin drain



Ample shelf



LITH ATLIR® molded drain

Code Accepted

UTILATUB® and UTILATWIN® Laundry/Utility Tubs meet or exceed performance requirements as listed:

- International Association of Plumbing and Mechanical Officials (IAPMO®)
- Warnock Hersey® (Canada) Listed CSA test standards: Laundry Tray #B45.0 and #B45.5, Drain #B125
- American National Standards Institute (ANSI) Specification Z 124.6 (ANSI)






additional counter space. Supports up to 40 lbs. White, stain resistant finish.


Fits UTILATUB® Models 19F, 19W, 18F and 18W.

Specifications

Premier DURASTONE® Laundry Tubs









Model	Mount	Length	* Width*
26F/W	UTILATWIN®	LAUNDRY	TUB
26F	Floor	24"	40"
26W	Wall	24"	40"
38-Gallon Ca	apacity		Intertek

General: Furnish and install as shown on plans, UTILATWIN® Laundry/Utility Tub Model: (26F, 26W), as manufactured by E. L. Mustee & Sons, Inc. Unit shall be one-piece molded construction using natural crushed stone with polyester resin, complete drain assembly, twin drain waste coupling, recessed divider wall between tubs and floor or wall mounting hardware. Shall meet ANSI Specification Z 124.6. Color: White with marbleized finish.








18F/W UTILATUB® LAUNDRY TUB 18F 24" 20" 18W Wall 24" 20" 18-Gallon Capacity


UTILATOP™ Top Cover Available (See page 22)

General: Furnish and install as shown on plans, UTILATUB® Laundry/Utility Tub Model: (18F, 18W), as manufactured by E. L. Mustee & Sons, Inc. Tub shall be one-piece molded construction using natural crushed stone with polyester resin. Tub to include integrally molded drain assembly, stopper and floor or wall mounting hardware. Shall meet ANSI Specification Z 124.6. Color: White with marbleized finish.



* Length (front to back); Width (left to right).





17F/W UTILATUB® LAUNDRY TUB Floor 231/2" 17F

17W Wall 231/3" 19-Gallon Capacity



Built-in scrub board


General: Furnish and install as shown on plans, UTILATUB® Laundry/Utility Tub Model: (17F, 17W), as manufactured by E. L. Mustee & Sons, Inc. Tub shall be one-piece molded construction using natural crushed stone with polyester resin. Tub to include built-in scrub board, integrally molded drain assembly, stopper and floor or wall mounting hardware. Shall meet ANSI Specification Z 124.6. Color: White with marbleized finish.

23"

23"

Specifications







-11½"-	7" -1 25"
	1

6 9"	7" -1 23½"
18"	

Model	Mount	Width*	Length*	
14 UTII	LATUB®			
14	Floor	23"	25"	

20-Gallon Capacity

General: Furnish and install as shown on plans, UTILATUB® Laundry/ Utility Tub Model 14 as manufactured by E. L. Mustee & Sons, Inc. Model 14 shall be one-piece molded Co-PolyPure[™] tub complete with drain and floor hardware. Color: White with satin finish.

12 UTILATUB®

12	Floor	18"	231/2"	

18-Gallon Capacity

General: Furnish and install as shown on plans, UTILATUB® Laundry/ Utility Tub Model 12 as manufactured by E. L. Mustee & Sons, Inc. Model 12 shall be one-piece molded Co-PolyPure™ tub complete with drain and floor hardware. Color: White with satin finish.

CABINET LAUNDRY TUB



91 and 94 DURATUB®

- Cabinet Laundry Tub


If you're looking to reduce the visual clutter in your laundry or utility room, then Mustee's unique DURATUB® cabinet laundry tub will definitely meet your needs. This laundry tub in an attractive cabinet will create additional storage and counter space.

Features

- Narrow 19 1/4" width
- Large concealed shelf for storage
- Steel cabinet with enamel finish
- Extra deep, 19 gallon tub
- Top cover creates additional counter space
- Integral mounted drain for standard 1½"

- Leg levelers and stopper
- Available in white, almond or biscuit

Specifications



Model	Color		
91	White		
91AL	Almond		
91BT	Biscuit		
19-Gallon Capacity			
94	White		
19-Gallon Capacity			



General: Furnish and install as shown on plans, a DURATUB* Laundry Cabinet Model: ______, as manufactured by E. L. Mustee & Sons, Inc. Model 91 – 28" length, 19 ½" width, 35 ½" height with electro-galvanized steel cabinet with baked-on enamel finish, molded top rim and top cover, molded-in drain. Color: ____ (White, Almond, Biscuit). Model 94 – same features as Model 91, plus HANDIFLO® water discharge fitting. Color: White.

Accessories

19.204A UTILATOP™

Laundry Tub Top Cover



Conceals tub interior and provides additional counter space. Heavy-duty, molded UTILATOP™ fits Mustee's 19F (floor), 19W (wall), 18F (floor) and 18W (wall) UTILATUB® Laundry Tubs. White, colorfast surface is easy to clean.

93.600

Laundry Tub Faucet



Chrome-finish, 4" center set, 6" swing spout with aerator and hose-end.





20.600

Faucet Block



Deluxe molded faucet block mounts to laundry tub when using a clamp-on faucet with overhead water supply.


UTILATUB® & UTILATWIN® COMBO LAUNDRY TUBS


One convenient box...everything you need to install a Mustee laundry tub



Specifications








Model Style Width (A) Length (B) Drain (C) 19CFT UTILATUB® COMBO WITH TOP COVER 19CFT Single 20" 24" 10" 18-Gallon Capacity Interrek

Includes Top Cover 19.204A (See page 22)

General: Furnish and install as shown on plans, UTILATUB® Laundry/Utility Tub Model 19CF as manufactured by E. L. Mustee & Sons, Inc. Model 19C shall be one piece molded construction using structural thermoplastic with matched metal molds under extreme heat and pressure. Tub to include integrally molded drain assembly, stopper, floor hardware, faucet, supply lines, P-Trap, top cover and Teflon® tape. Shall meet ANSI Specification Z-124.6 Color: White.







12C/1	4CP UTI	LATUB®	COMBO		
12C	Single	18"	231/2"	9"	
18-Gallon	Capacity				
14CP	Single	23"	25"	111/2"	
20-Gallon Capacity					

General: Furnish and install as shown on plans, UTILATUB® Laundry/Utility Tub Model 12C/14CP as manufactured by E.L. Mustee & Sons, Inc. Model 12C/14CP—shall be one-piece molded Co-PolyPure™ tub, complete with drain, faucet, supply lines, P-Trap, Teflon® tape. Color: White with satin finish.







22C/2	4C UTIL	ATWIN [®] CON	ИВО		
22C	Double	36"	231/2"	18"	
31-Gallon (Capacity				
24C	Double	46"	25"	23"	
41-Gallon Capacity					

General: Furnish and install as shown on plans, UTILATWIN® Laundry/Utility Tub Model 22C/24C, as manufactured by E. L. Mustee & Sons, Inc. Model 22C/24C consists of molded Co-PolyPure™ dual tub, joined by molded bracket, complete with twin drain, faucet, supply lines, P-Trap, Teflon® tape and floor hardware. Color: White with satin finish.

28CF Bigital UTILATUB COMBO UTILITY TUB


TIN UTILATUB UTILITY TUB







- Combo Kit Includes...
 - One-piece molded tub of impact-resistant polypropylene with heavy gauge steel legs, with adjustable levelers
 - Swivel faucet with 24" long pull-out spout and lever handles
 - Two 20" flexible braided supply lines











- Large, self-draining back shelf directs water run-off into the tub
- Mold and mildew-resistant construction



Specifications



Model	Mounting		Outside HxWxD	Inside HxWxD	
28CF	Floor	Combo	34" x 40" x 24"	12 ½" x 36 ½" x 17 ½"	
28F	Floor	Tub only	34" x 40" x 24"	12 ½" x 36 ½" x 17 ½"	V _s

 $\textbf{General:} \ \text{Furnish and install as shown on plans, BIGTUB}^{\texttt{m}} \ \text{UTILATUB}^{\texttt{n}} \ \text{Utility Tub Model} \ _$ manufactured by E.L. Mustee & Sons, Inc. Tub shall be one-piece molded polypropylene with matched metal molds. 28CF Combo kit to include: Swivel faucet with 24" long pull-out spout and lever handles; 1 " P-trap with 12" tailpiece; and two flexible, 20" long braided supply lines. 28CF & 28F to include steel legs with adjustable levelers; a 1 " Molded-in drain and Drain stopper. 36-Gallon capacity. Shall meet ANSI Specification Z 124.6 Color: White. Weight: 23 lbs.

DURAPAN™WASHER AND WATER HEATER PANS

Protects your belongings from water damage due to an overflowing clothes washer or hot water heater.

Features

99 and 98 Fiberglass DURAPAN™



Model 99-center drain for installation directly over 2" ABS, PVC (Sch. 40) or iron drain pipe. Model 98-furnished outlet fitting may be installed on bottom or any side for connection to 1" PVC drain pipe.

- Removable aluminum front to simplify washer placement
- Reinforced design provides strength
- Securable to the floor to prevent movement
- Mold and mildew-resistant, easy to clean

96 Co-PolyPure[™] DURAPAN[™]




Model 96furnished outlet fitting may be installed on bottom or any side for connection to 1" PVC drain pipe leading to drain.

- Extra large for larger washing machines
- Mold and mildew-resistant
- Easy to clean
- Co-PolyPure[™] thermoplastic

Specifications







JP0







Model	Drain	Overall LxWxH*	Inside LxWxI	Н*
99	Centered	30" x 32" x 2 ¹ / ₂ "	28" x 29" x 2"	F
98	Side	30" x 32" x 2 ¹ / ₂ "	28" x 29" x 2"	(

Model	Drain	Overall LxWxH*	Inside LxWxH*
96	Side or Bottom	31" x 33 ¹ / ₂ " x 2 ¹ / ₈ "	29" x 31 ¹ / ₂ " x 2"

* L=Length (left to right); W=Width (front to back); H=Height (from floor surface)

General: Furnish and install as shown on plans, DURAPAN™ Model: , as manufactured by E. L. Mustee & Sons, Inc. Models 99 and 98-one-piece compression molded fiberglass, using matched metal molds under extreme heat and pressure. Size: 30"x32". Shoulder will be no less than 21/2" high. Removable aluminum threshold with water tight seal secured by stainless steel screws into threaded brass inserts. Mounting screws and anchors furnished to secure base to floor. Model 99 shall include IAPMO® Listed drain assembly for installation of 2" iron, PVC or ABS DWV (Schedule 40) sanitary waste pipe. Model 98 shall include 1" DWV 90° elbow fitting. Shall meet ASTM D 635, E-84 and E-162. Color: White




Features

- Standard components include...
- Slip-resistant floor with drain
- Shower valve
- Curtain
- Safety railing with molded in soap dish and shampoo holder



- Bases include a PVC drain for connection to a 2" (Sch. 40) ABS, PVC or iron DWV pipe
- Knock-down construction makes portability extremely easy
- Shower stall materials are mold & mildew-resistant



DURASTALL® FREE-STANDING SHOWER STALL

Few could argue about the benefits of having an extra shower at home, in a cabin, pool side, etc. ...but, only Mustee free-standing shower stall delivers the best in features, benefits, durability and quality!

So wherever you need to add the convenience of an extra shower, make the smart money buy and specify a high quality Mustee shower stall. Available in 30" x 30", 32" x 32" and 36" x 36" sizes.



Specifications

80, 82, 140, 142 DURASTALL®

Model	Nom. Size	Type Base	A	В	C	D	
80	32" x 32"	Standard	32 5/8"	75 ³ / ₈ "	165/16"	24"	
82	32" x 32"	Extended	32 5/8"	77	165/16"	24"	
140	36" x 36"	Standard	365/8"	75 3/8"	185/16"	28"	
142	36" x 36"	Extended	365/8"	77 ⁷ / ₈ "	185/16"	28"	


General: Furnish and install as shown on plans, a free-standing DURASTALL* Shower Stall Model: _______, as manufactured by E. L. Mustee & Sons, Inc. Consist of three, white high-gloss thermoplastic walls, molded top frame, rigid aluminum front supports, one-piece wrap-around railing with built-in soap dish and container. Skid-resistant floor with drain assembly, shower head and valve, shower curtain and rod, plus assembly hardware.

30, 68, 70 DURASTALL®

30	30" x 30"	Standard	30"	73"	15"	24"
68	32" x 32"	Standard	32 5/8"	743/4"	165/16"	24"
70	32" x 32"	Standard	32 5/8"	75 ³ / ₈ "	165/16"	24"

General: Furnish and install as shown on plans, a free-standing DURASTALL* Shower Stall Model: _______, as manufactured by E. L. Mustee & Sons, Inc. Consist of three, white, high-gloss thermoplastic walls, molded top frame, rigid thermoplastic front supports, one-piece, wrap-around railing with built-in soap dish and container. Skid-resistant floor with drain assembly, shower head and valve, shower curtain and rod, plus assembly hardware.





Extended bases eliminate the need to position the base directly over the floor drain. This offset allows for greater freedom in positioning the shower



Shower Doors – Install to Open from Either Side

Shower doors are available, featuring aluminum frames with magnetic latch mount to open left or right.

Model	Opening	Height	Fits DURASTALL® Models		
GLASS DOOR	– obscure, tempe	ered safety glass	panel with aluminum frame		
88.700	24"	64"	80, 82		
48.700	28"	64"	140, 142		
STANDARD DOOR — obscure, crystal styrene panel with aluminum frame					
85.700	24"	64"	30, 68, 70, 80, 82		



TOPAZ, VARISTONE, DURAWALL, BATHTUB WALLS & DURATRIM WINDOW KITS

Premium fiberglass and thermoplastic bathtub walls from E.L. Mustee & Sons, Inc. never looked so good...or installed so easily!

Combining great design features, premium materials/finishes and a multitude of configurations and sizes, the Mustee line of bathtub walls provide you with virtually unlimited bathroom design options. So go ahead and design your dream bathroom... odds are, there is a Mustee bathtub wall that will perfectly compliment your plans.



All TOPAZ[™], VARISTONE[™] and DURAWALL[®] bathtub walls will fit any standard 30" x 60" bathtub. Select Mustee bathtub wall systems are also available for other bathtub sizes such as...

- 572T VARISTONE™ fits bathtubs up to 60" wide by 34" deep
- 56 DURAWALL® fits whirlpool bathtubs up to 72" wide x 42" deep
- 557 DURAWALL® VARISTONE™ fits 60" wide by 32" deep bathtubs

Features

- Adhesive mount and direct-to-stud mount styles available...see product descriptions
- Ample, easy-to-reach molded-in shelves
- Seamless corner panels with overlapping edges on adhesive mount
- Trimmable DURAWALL® panels simplify installation in out-of-plumb alcoves or for installing DURATRIM™ window kits
- All models available in color-fast white and bone
- Biscuit also available on the Model 350BT and 660BT
- Semi-gloss, mold/mildew resistant surface finish
- Easy to follow installation instructions

Code Accepted

TOPAZ™, VARISTONE™ and DURAWALL® fiberglass bathtub walls meet or exceed performance requirements as indicated:

- American Society of Testing and Materials (ASTM) D 635, E-84 and E-162
- American National Standards Institute (ANSI) Specification Z 124.1.2
- Inhalation Toxicity Test to evaluate inhalation health hazards with combustible products
- CAN/ULC S102-07 Burn and Smoke Test

TOPAZ™PREMIUM FIBERGLASS BATHTUBS



The Perfect Compliment to Mustee's TOPAZ™, DURAWALL® and VARISTONE™ Bathtub Walls

Shopping for one of Mustee's many premium bathtub wall packages? Then you'll also want to put Mustee's premium fiberglass TOPAZ™ bathtubs on the shopping list as well.

Mustee bathtubs bring together classic design, exceptional features, premium construction and of course, legendary E.L. Mustee & Sons quality. Besides offering the state-of-the-art in bathtub design & construction, TOPAZ™ bathtubs are the perfect way to create a look of elegance in any bathtub alcove you are planning to create.

TOPAZ™ bathtubs fit all VARISTONE™ and DURAWALL® bathtub walls as well as walls produced by other manufacturers.

660 TOPAZ™ Premium Fiberglass Bathtub Walls — Direct-To-Stud Mounted, Code Accepted (See page 26)



Features

- Produced from high-grade, reinforced, molded fiberglass for optimum strength and impact resistance using matched metal molds under heat and pressure
- Fits all Topaz[™] Fiberglass Bathtubs, as well as standard 30" x 60" bathtubs of other manufacturers
- Includes a large, moldedin, self-draining shelf
- Three panel wall system with tongue-and-groove seams to create a watertight wall surround
- Mounts direct-to-stud with mounting flanges hidden behind drywall
- Smooth, colorfast semigloss finish, resists scuffs
- Mold and mildewresistant...easy to clean



 Panels with tongueand-groove seams.



 Reverse side of center panel has clips for securing to bathtub.




11/₄" flanges fasten direct-to-studwalls with screws, drywall conceals flanges.

Model 660 bathtub walls shown with optional bathtub, shower head and valve.










Model	Color	
660WHT	White	
660BN	Bone	
660BT	Biscuit	
Fits 30" x 60" TOPAZ™ Bathtub		

General: Furnish and install as shown on plans, 660 TOPAZ™ bathtub walls as manufactured by E.L. Mustee & Sons, Inc. Shall be semi-gloss, three-piece wall. Panels are molded fiberglass using matched metal molds under extreme heat and pressure with a uniform thickness of 125 mils and mount direct-to-studwalls. Includes center panel with molded-in shelf and two side panels. Self-aligning panels interlock using a tongue-and-groove connection. Shall meet ANSI Specification Z-124.1.2. Color: _______(White, Bone, Biscuit). Install in compliance with local codes.

Specifications

572T VARISTONE™ Tall Premium Fiberglass Bathtub Walls — Adhesive Mount, Code Accepted (See page 26)






572TWHT	White	
572TBN	Bone	
572TBT	Biscuit	

Fits Up to 60" Wide by 34" Deep

General: Furnish and install as shown on plans, fiberglass VARISTONE™ Bathtub Walls Model 572T as manufactured by E.L. Mustee & Sons, inc. Shall be semi-gloss, 5-piece wall system. Panels are molded using matched metal molds under extreme heat and pressure with a minimum thickness of 125 mils. Shall meet ANSI Specifications Z 124.1.2 Colors: ______(White, Bone. Biscuit)

Premium Fiberglass Bathtub Walls - Adhesive Mount, Code Accepted (See page 26)






Model	Color
350WHT	White
350BN	Bone
350BT	Biscuit

Fits 30" x 60" Bathtub Caulking and adhesive provided

General: Furnish and install as shown on plans, DURAWALL* Bathtub Walls Model 350, as manufactured by E. L. Mustee & Sons, Inc. The wall system shall be three-piece construction with molded-in shelf. Panels shall include 20% fiberglass reinforced composite material and be manufactured with matched metal molds under extreme heat and pressure with a uniform thickness of 85 mils. Shall be semi-gloss, scuff-resistant surface. Unit shall meet ANSI Specification Z 124.1.2. Color: _______ (White, Bone, Biscuit).



500 DURAWALL®




500WHT	White	
SUUVVHI	vvriite	
500BN	Bone	

Fits 30" x 60" Bathtub

General: Furnish and install as shown on plans, DURAWALL* Bathtub Walls Model 500, as manufactured by E. L. Mustee & Sons, Inc. The wall system shall be five-piece construction with three molded-in shelves. Panels shall include 20% fiberglass reinforced composite material and be manufactured with matched metal molds under extreme heat and pressure with a uniform thickness of 85 mils. Shall be semi-gloss, scuff-resistant surface. Unit shall meet ANSI Specification Z 124.1.2. Color: _______ (White, Bone).



557 DURAWALL®



557WHT	White	
557BN	Bone	

Fits 30" x 60" and 32" x 60" Bathtubs


General: Furnish and install as shown on plans, DURAWALL® Bathtub Walls Model 557, as manufactured by E. L. Mustee & Sons, Inc. The wall system shall be five-piece construction with four molded-in shelves. Panels shall include 20% fiberglass reinforced composite material and be manufactured with matched metal molds under extreme heat and pressure with a uniform thickness of 75 mils. Shall be matte finish, scuff-resistant surface. Unit shall meet ANSI Specification Z 124.1.2. Color: (White, Bone).

Specifications

300.600 DURATRIM™ Fiberglass Window Kit – Code Accepted



Protect window above bathtub. Adhesive-mounted 5-piece fiberglass panels fit windows up to 36" wide with 8" sill depth. May be cut to fit sill and side moldings, easy to install.



	300.600W	White	
	300.600BN	Bone	
,	Adhesive provided		

General: Furnish and install as shown on plans, DURATRIM[™] Window Trim Kit Model 300.600, as manufactured by E. L. Mustee & Sons, Inc. Made of fiberglass, consists of three 36" by 8" panels and two 8" by 1" corner molding pieces. Adhesive provided. Shall meet ANSI Specification Z 124.1.2. Color: _______ (White, Bone).

Deluxe Thermoplastic Bathtub Walls - Adhesive Mount






58

Nide	Model	Color
	56WHT	White
	56BN	Bone
	Fit 42" x 72"	Bathtub

General: Furnish and install as shown on plans, DURAWALL® Bathtub Wall Model 56, as manufactured by E. L. Mustee & Sons, Inc. The himpact thermoplastic wall system shall be 5-piece construction with six formed shelves. One-piece, seamless comer panels with overlapping edges. Uniform color throughout entire thickness of each panel. Color: ______ (White, Bone).



53 DURAWALL®




53WHT	White
53BN	Bone

Fit 30"x 60" Bathtub

General: Furnish and install as shown on plans, DURAWALL® Bathtub Wall Model 53, as manufactured by E. L. Mustee & Sons, Inc. The hi-impact thermoplastic wall system shall be 5-piece construction with four formed shelves. One-piece, seamless comer panels with overlapping edges. Uniform color throughout entire thickness of each panel. Color: _______ (White, Bone).



952 DURAWALL®




952WHT White

Fit 30" x 60" Bathtub

General: Furnish and install as shown on plans, DURAWALL* Bathtub Wall Model 952, as manufactured by E. L. Mustee & Sons, Inc. The hi-impact thermoplastic wall system shall be 5-piece construction with four formed shelves. One-piece, seamless comer panels with overlapping edges. Uniform color throughout entire thickness of each panel. Color: White.

950 DURAWALL°



950WHT White

Fit 30" x 60" Bathtub


General: Furnish and install as shown on plans, DURAWALL* Bathtub Wall Model 950, as manufactured by E. L. Mustee & Sons, Inc. The white thermoplastic wall system shall be 5-piece construction with four formed shelves. One-piece, seamless comer panels with overlapping edges. Uniform color throughout entire thickness of each panel. Color: White.

Specifications

52.600W DURATRIM™ Thermoplastic Window Trim Kit




Protect window above bathtub. Adhesive mounted, 3-piece thermoplastic panels fit windows up to 36" wide with 8" sill depth. May be cut to fit sill and side moldings, easy to install.



52.600W	White	
Adhesive provided		

General: Furnish and install as shown on plans, DURATRIM™ Window Trim Kit Model 52.600W, as manufactured by E. L. Mustee & Sons, Inc. Made of white, high-impact thermoplastic, consists of three 36" by 8" panels. Color: White.

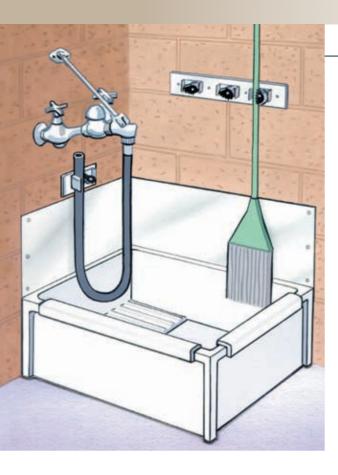

MOP SERVICE BASINS

Mustee's extra-tough mop service basins and companion products have long been the preferred choice of specifying architects and engineers.

Whether installed in a factory, hospital, school, office building or even in a garage, work room or basement, Mustee's line of Mop Service Basins include the features users appreciate most. The rugged, easy to install and perfectly functional...Mustee's line of Mop Service Basins will deliver years of service.







Features

- One-piece molded from high impact resistant DURASTONE® fiberglass
- Elevated, self-draining shelf (Model 65M) and removable strainer
- Integral molded-in drain with seal for 3" ABS, PVC (Sch. 80) or cast iron
- Available drain seals for connecting 2" pipe or 3" soil pipe
- Numerous mop basin accessories are also available

Code Accepted

Mustee's Mop Service Basins meet or exceed performance requirements:

- International Association of Plumbing and Mechanical Officials (IAPMO®) Listed
- Warnock Hersey® (Canada) Listed CSA Test Standards: Mop Basins #B45.0
- American National Standards Institute (ANSI) Specification Z 124.6
- American Society of Testing and Materials (ASTM) D 635 E-84 and E-162
- CAN/ULC S102-07 Burn and Smoke Test







Specifications











Model Length* Width* 63M 24" 24"


65M Mop Basin – Elevated Shelf, 24" x 36" x 10"








62M Mop Basin - 24" x 24" x 81/4"





62M	24"	24"	


* Length (front to back); Width (left to right).

General: Furnish and install as shown on plans, Mop Service Basin Model: _______, as manufactured by E. L. Mustee & Sons, Inc. Unit to be one-piece molded construction by matched metal molds under extreme heat and pressure using fused natural crushed stone with polyester resin. Models shall have integrally molded drain assembly with drain seal and strainer for connection to 2" or 3" iron, ABS or PVC pipe.

Model 62M-81/4" high with 3/4" wide shoulder, drain accommodates 3" pipe.

Model 63M-10" high with 1" wide shoulder, drain accommodates 3" pipe.

Model 65M—10" high with 1" wide shoulder and integrally molded self-draining shelf, drain accommodates 3" pipe.

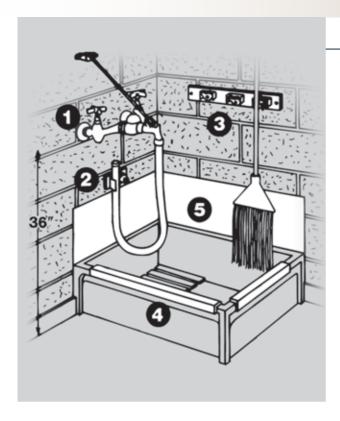

6 OPTIONAL SEALS — For installations with following pipe, order separately.

65.308 — for 2" PVC, ABS and iron

65.309 - for 3" PVC, ABS and iron, included with mop basin

65.311 — for 3" soil pipe (no hub)

MOP SERVICE BASIN ACCESSORIES


To complete a commercial or residential mop service basin installation, specify and install Mustee's mop service faucet and companion products listed below.

Specifications

63.600A SERVICE FAUCET – Chrome plated brass service sink faucet, ½" pipe eccentric inlets on 8"



centers. V₂" pipe eccentric inlets on 8" centers. Vacuum breaker integral stops, chrome plated (H&C) handles, ³/₄" hose end spout with pail hook, top reinforcing



bar and mounting bracket. Shall meet ANSI Specifications A112.1.1, Section 2.9 and A112.18.1M, CSA Listed. (ANSI

65.700 HOSE and HOSE HOLDER — Heavy-duty 5/8" diameter, reinforced 31" rubber hose with brass couplings on one end. Spring loaded, molded rubber hose holder mounts on stainless steel wall plate.



3 65.600 MOP HANGER — Three spring-loaded rubber holders mounted to 3" x 22" stainless steel wall plate. Wall anchors and mounting screws included.

4 BUMPER GUARDS — Protect rims, snap-on

High impact resistant vinyl

 $62.401 - 21\frac{1}{2}$ long white, fits Model 62M

 $63.401 - 20^{3}$ /₄" long white, fits Models 63M and 65M

 $65.403 - 32^{3}$ '' long white, fits Model 65M

Stainless steel

 $63.403 - 20\frac{3}{4}$ " long, fits Models 63M and 65M

65.404 – 32 ³/₄" long, fits Model 65M

DURAGUARD™ WALL GUARDS — Protect wall surfaces, 12" height, 20 gauge, #304 stainless steel

67.2424 - two panels and bracket for 24"x 24" corner

67.2436 - two panels and bracket for 24"x 36" corner


67.24C – one 24" panel and corner bracket

67.36C - one 36" panel and corner bracket

16 SERVICE MOP SINK

Wall-mounted mop sink installs anywhere, including the utility room, basement, garage or outdoors. Ideal for cleaning large utensils. Molded-in drain assembly for standard 11/2" trap.

Specifications



 Model
 Length*
 Width*

 16
 16³¼"
 22"

12-Gallon Capacity

* Length (front to back); Width (left to right).







Quality Products for Residential, Commercial, Healthcare & Institutional Applications

The E.L. Mustee & Sons, Inc. product line meets numerous applications within four broad markets...residential, commercial, healthcare and institutional. We invite you to review the complete line of Mustee products from bathtubs, shower walls and bases to laundry/utility tubs, safety grab bars, and mop service basins.



Residential - from new single-family and cluster homes to older homes and apartment bath renovations.



Healthcare includes hospitals, health care facilities. adult communities, assisted living facilities, apartments and more.



Commercial includes offices, industrial buildings, hotels and motels.



Institutional includes schools, colleges, libraries, laboratories and more.



E. L. Mustee & Sons, Inc.

5431 West 164th St. Brook Park, OH 44142

Phone: 216-267-3100 Fax: 216-267-9997

Email: info@mustee.com

Visit us on the web at: **WWW.mustee.com**

Use this QR code to access our website with your smart phone.



Code Compliance

Code Compliance as indicated, most Mustee products are listed by: International Association of Plumbing and

Mechanical Officials (IAPMO*) – United States



Warnock Hersey® – Canada

