




Empowering the
Mobile workforce




Make Your **Embedded**
Dreams Work



Intelligent **Surveillance**,
Envision the Future

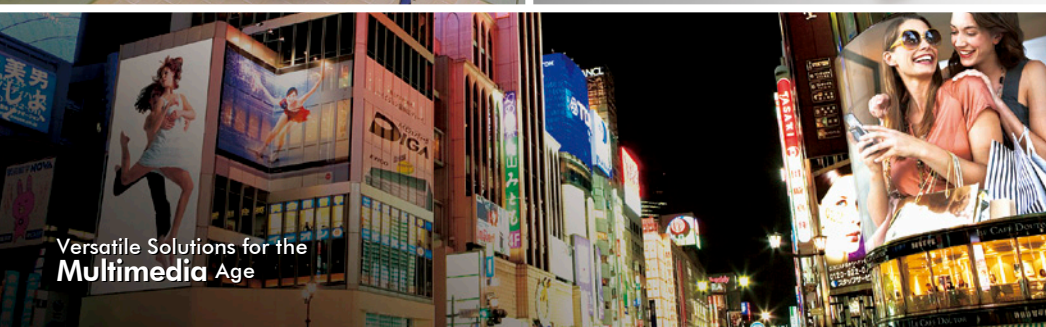

Versatile Solutions for the
Multimedia Age

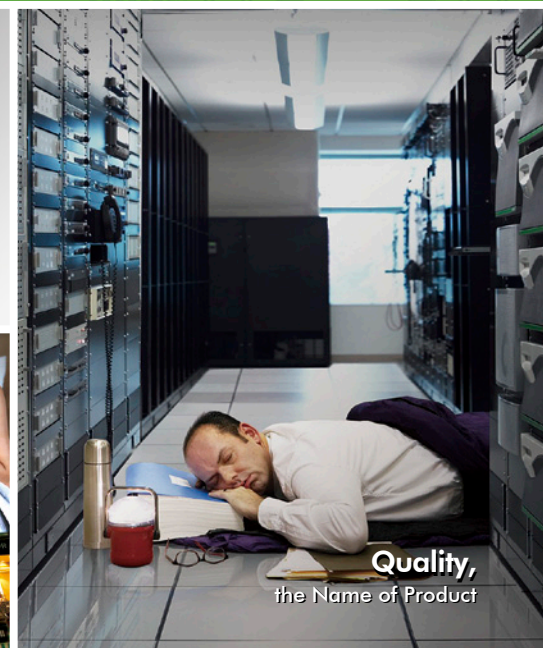

Quality,
the Name of Product

2012

Network and Communication Solutions

- Desktop Appliance
- Entry Level Appliance
- Mainstream Appliance
- Performance Appliance

NCS

Network and Communication Solutions

Network and Communication Security

Corporate Information

About NEXCOM 04

Vertical Industry Applications

Network Application Appliance 12

Network Security Appliance 13

New Product Highlights

2012 New Products 14

Product Selection Guide

Network Security Appliance 16

Network Security Appliance

NSA 7110W + LAN Module 20

NSA 1083/ NSA 1043 22

NSA 5110 23

NSA 5120 + LAN Module 24

NSA 5130 + LAN Module 26



NSA 5131	28	DNA 1110	38
NSA 1110	29	DNA 1120	39
NSA 1120	30	DNA 1500/ 1501/ 1505	40
NSA 3110	31	DNA 2120	41
NSA 3111	32	OSA 5130	42
NSA 3130	34		
DNA 110/ 110A	35		
DNA 940	36		
DNA 950	37		

About NEXCOM

Reliable Partner for Building the Digital Infrastructure

Founded in 1992 and headquartered in Taipei, Taiwan, NEXCOM is committed to being your trustworthy partner in building the digital infrastructure. To surpass customers' expectations, NEXCOM makes the difference by utilizing its decades of industrial computing experience, a highly talented R&D team, and by providing exceptional levels of customer service. With these core strengths, NEXCOM has enabled its customers to win key projects in a diverse range of industries.

With its focus on delivering these core values to better serve customers, NEXCOM integrates its capabilities and operates four global businesses, which are Multi-Media Solutions (MMS), Mobile Computing Solutions (MCS), Industrial Computing Solutions (ICS), and Network and Communication Solutions (NCS). This strategic deployment enables NEXCOM to offer time-

to-market, time-to-solution products and service without compromising cost.

In addition, the service-to-market business model gives NEXCOM core competence to build a strong world-class service network by providing customized service, global logistics, local access, and real-time support. Operating seven subsidiaries, from China, France, Germany, Italy, Japan, the United States, to the United Kingdom, NEXCOM is able to better facilitate customers' requirements as well as closely work with global partners in different regions.

Partners should also be assured that NEXCOM's Taiwan based Headquarters and subsidiary offices in China, UK and USA have obtained ISO 9001:2008 Certification.



ICS

- EBC:** Industrial Computing (Embedded Computer, Single Board Computer)
- PPC:** Panel PC (Applied Panel PC, Multimedia Panel PC, Factory Panel PC, Healthcare Panel PC, Industrial Panel PC, In-Wall Panel PC)
- NISE:** Industrial Fanless Computing (Fanless Computer)
- NViS:** Video Analytic (Surveillance)
- POS:** Point of Services

MCS

- MCS:** Mobile Computing Solutions (Rugged Computer Devices, Rugged Mobile Computer)
- VTC:** Vehicle Telematics Computer (Car PC, Train PC)

MMS

- MMS:** Multi-Media Solutions (Digital Signage, MOD, Streaming Server)

NCS

- NCS:** Network and Communication Solutions (Network Security, VoIP, IPTV, HCP, ATCA)

Corporate Mission

- An Innovative Supplier in Vertical Application Markets
- A Quality Partner in Engineering, Manufacturing, and Services

Corporate Vision

To become the industrial leader in building the digital infrastructure, NEXCOM utilizes its industry leading technology, localized customer support and worldwide logistics services. This will be achieved by

- Great Team Work
- Cooperation with trusted partners
- Growth through innovation.

Business Strategy

Aim to better support the activities of all its partners, NEXCOM divides its sales force into four dedicated business units to target rapidly expanding vertical markets. This enhances each business unit concentrating on strategic channel accounts and on repeat order business. Moreover, NEXCOM's business units have been set up to serve the requirements of key project accounts, where product ODM and project support are frequently required.


NEXCOM is working with embedded computing solution providers to envision new opportunities for growth. We'll help you deliver reliable vertical industry platform (VIP) solutions, optimized for the next wave of low power, small footprint embedded applications.

Research and Development

Speed, Quality, Innovation and One-stop Service

Over a decade ago, NEXCOM successfully launched the PEAK series of Single Board Computers onto the IPC market, and in doing so, gained a solid reputation for product quality and innovation. In subsequent years, NEXCOM has enhanced its reputation for R&D excellence with a multitude of high-end technology products, which has cemented NEXCOM as one of the industry leaders for R&D and innovation.

The mission of NEXCOM R&D team is to design exceptional products that meet the stringent requirements of today's global markets. In order to achieve this goal, we have recruited hundreds of talented engineers who have the knowledge and expertise to make NEXCOM's products stand out in this highly competitive market.

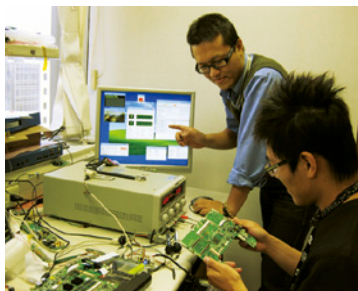

In 2012, NEXCOM R&D will develop solutions within the following categories, fanless computers, Panel PCs, video analytic, self-service platform, vehicle telematics computers, rugged mobile tablet computers, digital signage platform solutions, and ATCA platforms for telecommunications. The team is encouraged to "Think with New Ideas" and "Know how to make it and do it right first time". In addition, the size of NEXCOM's R&D team has been expanded to over 130 members and remains as one of core competences of the company.

Versatile Design Capabilities

- Leading industrial fanless computer
- High availability network security platform, blade, and cPCI

- Rugged tablet computer and car PC
- Ultra small footprint computer-on-module
- High speed networking
- Isolated and non-isolated power system
- Isolated and non-isolated industrial I/O
- Wide range of operating temperature

24/7 Production Line

Optimal Manufacturing Efficiency


The manufacturing of delicate products requires a high-level technology, craftsmanship, standards and time-to-market efficiency. Over years continual investment in advanced manufacturing equipment and systemic training programs has enabled NEXCOM to obtain optimal manufacturing efficiency.

To fulfill the increasing market demand for NEXCOM's products, the company has opened a 24/7 production line. This investment not only furthers the quality of products, but also reduces production lead-time for all global customers.



Quality Assurance

Under a strict Quality Assurance System, product design and reliability are controlled to support all critical solutions, and ensure Total Quality Assurance (TQA) implementation for all NEXCOM products and service. Furthermore, NEXCOM technical support team aims to provide feedback within 24 hours to ensure technical issues are resolved in the shortest possible time.

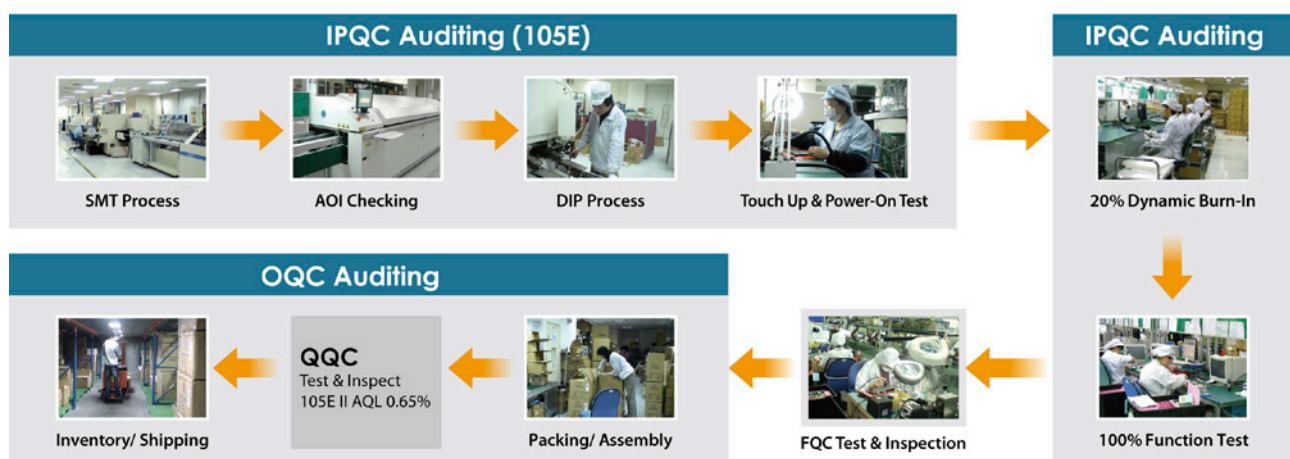

Closed-Loop Quality Assurance System

Green Policy

As a global citizen, NEXCOM is committed to providing green products and services, which are compliant with WEEE and RoHS legislation. NEXCOM continues to proactively work with industry peers and suppliers, to clarify standards, and identify compatible technologies and practices that help reduce hazardous substances from our products and manufacturing processes.



NEXCOM has invested heavily to establish operational infrastructures, including advanced equipment and facilities, not only at its global headquarters but also at subsidiary offices. Today, each of our service centers, with ISO 9001:2008 certification, has a purpose built assembly line, RMA/ DOA center and warehouse storage capability.

Global Fulfillment Service

Product delivery and customer support are always more effective when delivered locally. NEXCOM localizes support and provides a global customer service network to handle all aspects of global business, from presales, order taking, and system assembly to logistics. For expeditious product delivery, NEXCOM has established four regional service centers: Taiwan (for Asia), USA (for North America and South America), the United Kingdom (for Europe) and China. Therefore, NEXCOM customers benefit from quality assured product assembly and four service centers.



NEXCOM Global Service Network

Assembly Line Operation

NEXCOM offers custom-built products based on customers' specific requirements through the build-to-order services. A dedicated 24/7 assembly line and Quality Assurance System are installed in the services center to ensure exceptional production efficiency and superb product performance and reliability.



Service Pledge and Connection

As a reliable industrial computing platform provider for vertical markets, NEXCOM provides the very best products and the most expeditious service to help customers build the digital infrastructure. Comprehensive types of service are provided to promptly satisfy varying requirements. In addition to the headquarters in Taiwan, seven subsidiaries and distributors in strategic worldwide locations are at your service.



Service Types



Quotation



Project Consultant



Technical Support



Solution Alliance



RMA/DOA



Assembly/ Test



Global Logistics



Customization




ODM
Original Design
Manufacturing

Your Truly Global Information Resource

www.nexcom.com

www.nexcom.com is your one-stop platform for the latest information on all NEXCOM products and services. The rejuvenated website not only contains product relevant information and data, solutions/ products demo, up-to-date news, but incorporates online downloads, publications, and technical service supports, such as RMA/ DOA centre. Furthermore to localize service and support, seven NEXCOM sister websites remain to serve visitors in diverse geographical regions.

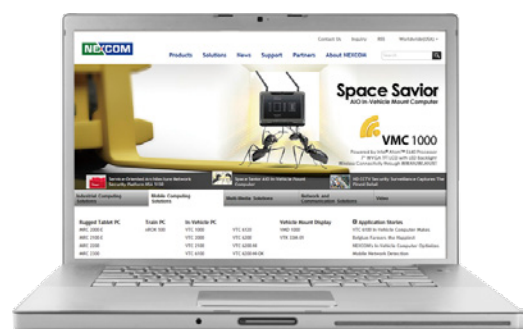

Get the Latest Updates Anytime, Anywhere

m.nexcom.com

At the end of the year 2011, NEXCOM launches its mobile site, m.nexcom.com. The site aims to cross time and space boundaries by allowing users to access the latest innovation and information of NEXCOM via smartphones. On this website, users will easily find our latest products, news, application stories, white papers, and videos. The mobile site now supports iOS and Android system. Please visit us at m.nexcom.com.

Design and Manufacturing Services (DMS)

Customized Service for Tailor-Made Solutions

NEXCOM provides cost-effective and time-to-market Design and Manufacturing Services (DMS). The DMS offers product customization from core modular designs to finished products based on customers' specifications in all kinds of industrial field. The levels of the service include manufacturing new CPU boards and system based products to fulfill customers' unique applications.

Unique DMS Features

With vast experience, the know-how, leading technology and innovative design capabilities, NEXCOM DMS incorporates the following features:

Prompt Time-to-Market




NEXCOM possesses a dedicated project management team to monitor and ensure each DMS project is delivered on schedule. Thus, a quick time-to-market solution can be offered with time-scales varying from one-three months for the design phase, with an average six month period from design to market.

Flexible Design and Manufacturing



NEXCOM possesses a complete R&D team to design and engineer the latest industrial grade products. As R&D engineers grouped into small cross-functional teams, they can develop more reliable products with flexible designs and quicker response to customers' requirements. In addition to our R&D capabilities, the state of art manufacturing facility and production lines enables NEXCOM to offer a flexible manufacturing with highly skilled factory staff.

Rigid Quality Control

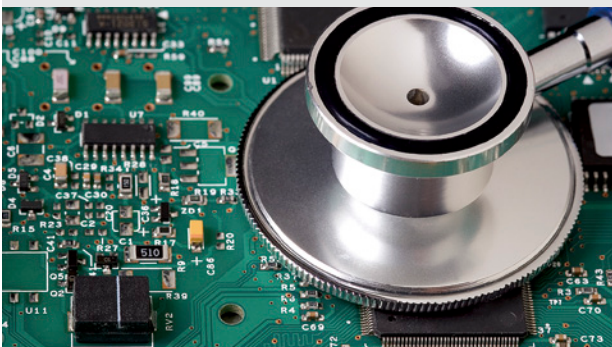

NEXCOM is pledged to deliver high quality products, from design to manufacture, and safeguard against defective products by implementing a rigid Quality Assurance System. In this system, at the end of each process, NEXCOM performs various tests to ensure that the product passes the industrial standard before it enters into next stage. Finally, additional tests are performed to ensure all board and system level products function correctly. Tests include "Failure Mode and Effects Analysis", "Vibration test", "Burn-in Chambers", "Drop test", and "AC power source test".

Extensive DMS Experience



We set higher standards! NEXCOM surpasses your tailor-made product requirements with extensive DMS experiences. We are specialized in X86 architecture and have accumulated invaluable experience and know-how in real working environments. Moreover, with a superb reputation, NEXCOM has under its belt many ODM projects in diverse fields, such as gaming, medical, POS, network security, transportation, marine, blade servers, and Linux BIOS etc.


Scope of DMS Work

■ Original Design Manufacturing Service (ODMS)

NEXCOM offers a complete ODM Service starting from the brand new product design right through to the finished product. We can design products based on the customer's unique specifications and application requirements.

■ Customization to Order Service (CTOS)

NEXCOM also provides CTOS, which is a quick-to-market solution by modifying the existing products to fit your business requirements, such as BIOS setting, component change by using current PCM layout, chassis color change, and packing accessories etc.

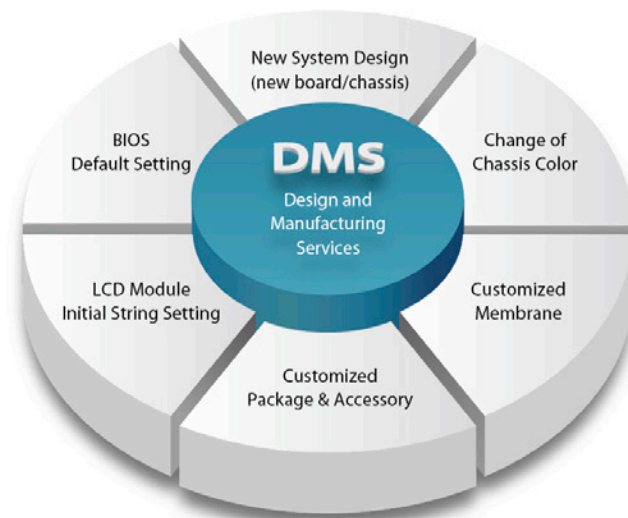

Service of DMS

With decades of industrial computing experience, NEXCOM has the capability to provide different levels of customized service to manufacture innovative products with exceptional high quality. We can assist you to differentiate from competitors, and save significant time and efforts.

Level 1	Logo Re-brand	➡ We provide the service to change the membrane to re-brand the company logo on the front panel. Customers need to provide Membrane drawing with all color pantone number. There is a service charge involved.
Level 2	Customerized Build	➡ Customers can change the membrane and chassis color to re-brand the packing. NEXCOM can offer dedicated part numbers and BOM. MOQ and service charge are required.
Level 3	Manufacturing Service	➡ Contract manufacturing. The service scope includes system assembly & burn-in, software loading & testing. MOQ and manufacturing service charge are required.
Level 4	New Project	➡ The design of new board & system is available. NRE and quantity commitment are required.

Professional Conformal Coating Solution

Get Ruggedized with NEXCOM Cost-Effective Conformal Coating Service for Harsh Environment Protection

Prompt Time-to-Market

NEXCOM recognizes the harsh reality that many embedded systems find themselves operating in unusual hostile environments. When conformal coating is required to protect your application against substantial humidity, dust, chemicals or temperature extremes, we can help!

Cost Effective Service to Apply Coating Solution in Vertical Market Segments

In addition to the usual military and harsh industrial environments that demand conformal coating, NEXCOM expand our conformal coating to Vehicle Telematic Computing, outdoor traffic control/surveillance, and off-shore Marine applications. These applications demand embedded computing performance with increased reliability through conformal coating process.

To support a wide range of applications in vertical markets, NEXCOM has engineered a diverse range of platforms, which incorporate the latest.

"State of the Art" Conformal Coating Line

NEXCOM uses automated Conformal Coater equipment for applications that require a high level of accuracy and repeatability in moderate to high volume manufacturing environments. "State of the Art" coating line is a closed-loop robotic platform featuring optical encoder feedback on all axes.



Smart Masking Technology

Our smart masking technology can pin point specific area on the PCBA for coating. The green, programmable conformal coater equipment allow user to only coat the area selected, which save labor/ material costs.



De-Flux Cleaning

To prepare a PCB for conformal coating, the circuits need to be cleaned. NEXCOM uses automatic defluxing and cleanliness testing systems. The deflux system is equipped with an automatic chemical management system that automatically doses and mixes defluxing chemicals at the turn of a keyed switch.

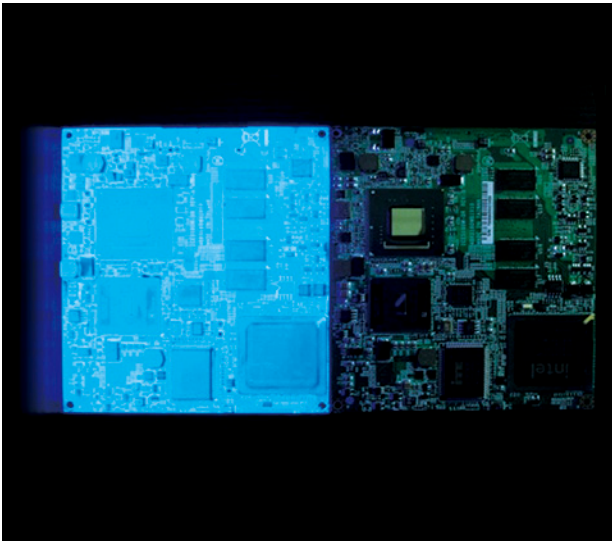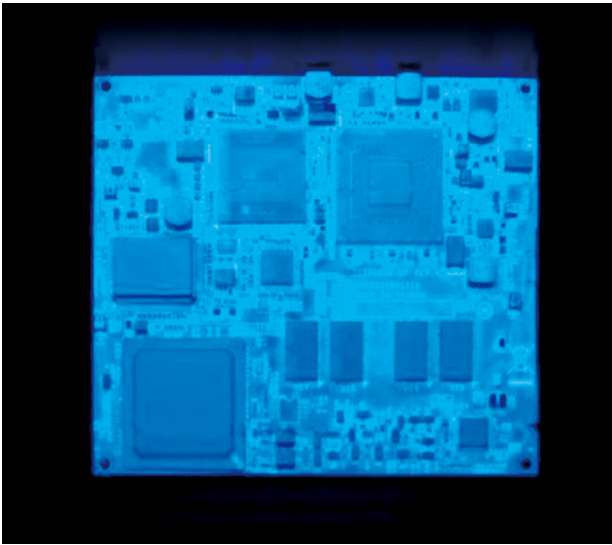

Real Time Cleanliness Testing


NEXCOM's deflux cleaning system is also equipped with an onboard cleanliness testing system which allows a user to program a desired cleanliness level. This assures that cleanliness levels will be consistent batch after batch.

De-Coating RMA Service

NEXCOM offer De-Coating RMA service upon request. This new service allows you to further cost down and generate higher ROI.


Quality Assurance Policy and Consistency Guarantee

Conformal coating inspection is a critical factor in determining successful coating application and long term reliability of PCBs. Using the IPC standards allows the coating operator to monitor the coating application performance. NEXCOM offers 100% manual screening by examining the PCB under white and UVA light and Thickness Gauge.

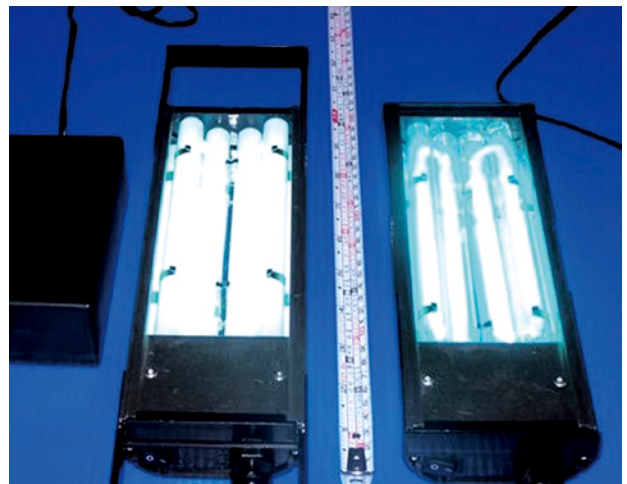

NEXCOM follows IPC-A 610, IPC-CC-830, IPC J-STD-001E regulations to generate consistent, adjustable coating thickness and cleanliness.

Network Application Appliances

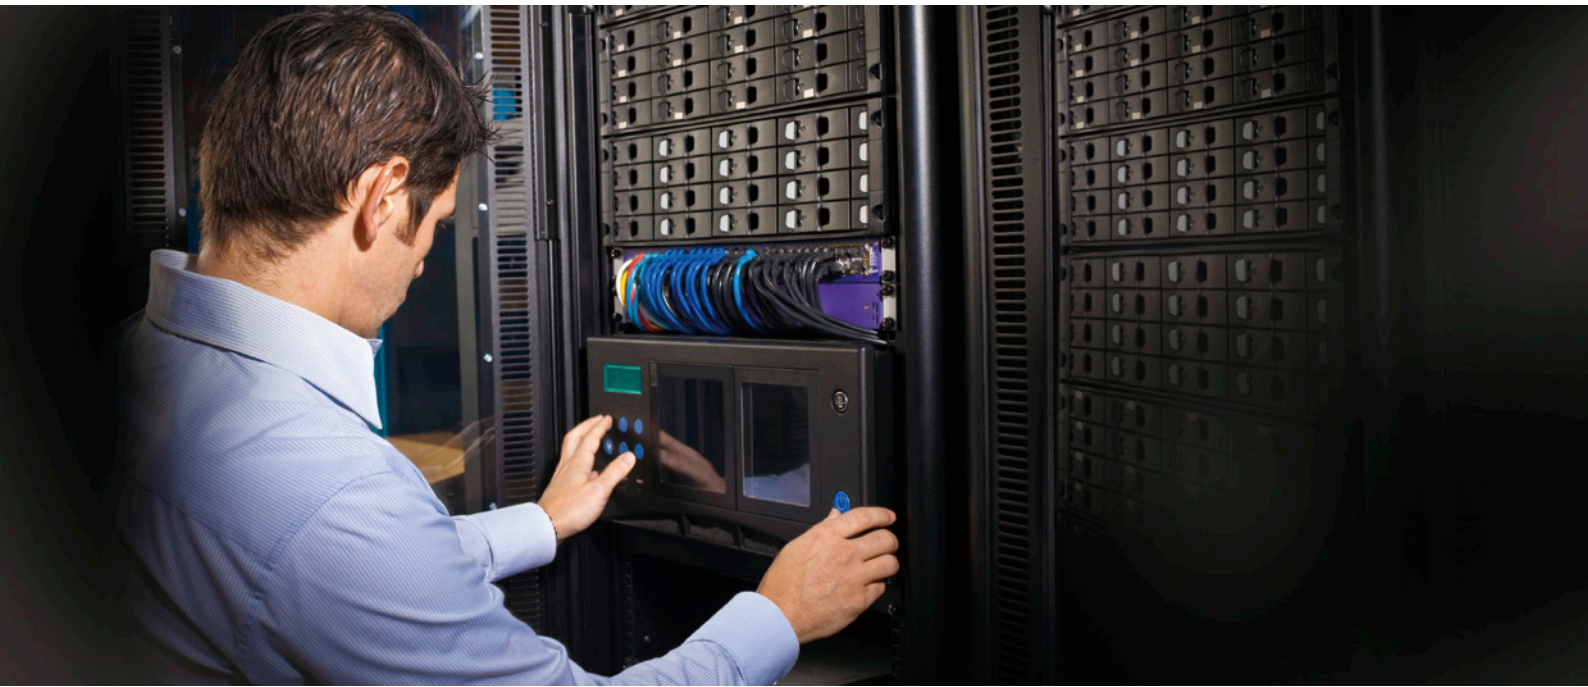

The Diversify Network Application Solutions


As consumers demand more sophisticated services over increasingly advanced networks, managing complexity is becoming more challenging. While enterprises and service providers alike may dream of simply replacing existing networks, the reality is that most legacy installations still work beautifully, forcing networks from various generations to co-exist and interconnect seamlessly for the foreseeable future.

NEXCOM offers a media appliance that interconnects different types of media streams to create a transparent end-to-end path

for voice, video, and data in corporations and service provider environments. Available in a range of functionality and sizes, these gateways may also include premier bandwidth and codec optimization that can reduce costs significantly in the access and core portions of the network.

Rising to this interwork challenge, NEXCOM supplies a full suite of products ready to deliver video calls, text messaging, and location-based services and many other high-demand services over mobile, VoIP, and traditional networks. Whatever the need—from switching to transport—NEXCOM supplies the technology to create, manage and security control, voice, video, and data sessions simultaneously to meet your business.

VoIP Application Diagram

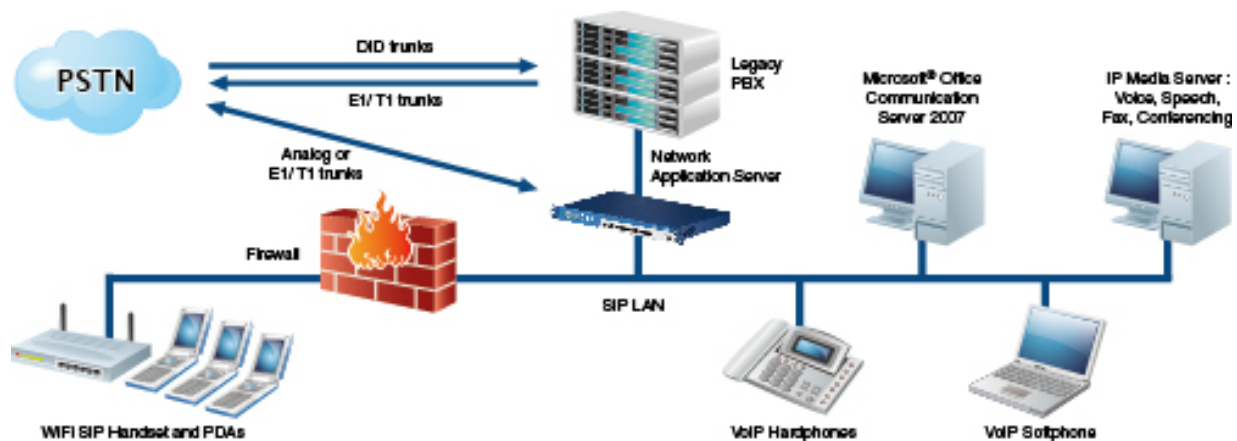

Network Security Appliance




Is Your Info Protected?

The invention of the Internet has broken down geographic barriers and created numerous business opportunities, however the Internet has also exposed businesses to the catastrophic danger of web attack. In the e-business generation, a company's daily operation relies on the Internet. Without proper Internet and network protection, an organization operation could be severely damaged by Internet attack, such as malicious hacking and security breach. Where a security breach occurs, the true cost of the incident is often difficult to measure, but could include the cost of server down time, stolen or lost data and subsequent loss of an organizations reputation.

The Most Trustworthy Network Security Solutions

To protect all of your valuable investments, NEXCOM offers a full range of network security platforms. Designed to fit various Network environments, NEXCOM's Network Security Appliances are designed to act as the solid foundation on which to host Virtual Private Network (VPN) as well as load balancing and Intrusion Detection System/ Intrusion Prevention System (IDS/IPS). NEXCOM's network security solutions provide highly secure platforms to ensure the normal operation of your critical business systems.

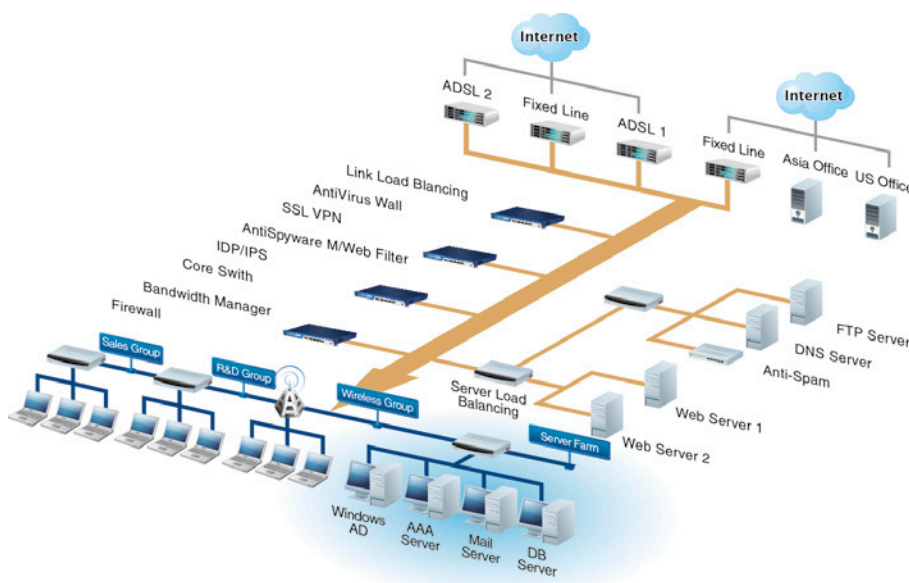

Applications

- SSL VPN
- Link Load Balancing
- IDP/IPS
- Bandwidth Management
- Firewall
- Anti-Spyware
- UTM
- Network Access Control
- Web Filter
- AntiVirus Wall
- Core Switch
- Server Load Balancing
- IM Filter (Instant Message)
- Anti-Spam
- AAA Server

2012 New Products



NSA 5130

Mainstream Platform

- 1U rackmount network platform
- 2nd generation Intel® Core™ processor family/ Intel® Xeon® E3 family
- Support up to 16GB of 1066/1333 DDR3 SDRAM memory
- 8 GbE LAN ports
- Support one LAN module
- Support one PCIe x8 expansion
- Internal one 3.5" HDD bay/ two 2.5" HDD bay (optional)
- Support redundant power supply (optional)

NSA 3130

Entry Platform

- 1U rackmount network platform
- 2nd generation Intel® Core™ processor family
- Support up to 8GB of 1066/1333 DDR3 SDRAM memory
- 8 GbE LAN ports
- Support one PCIe x8 expansion
- Internal one 3.5" HDD bay/ two 2.5" HDD bay (optional)

Coming Soon



DNA 110

Desktop Platform

- Fanless desktop network platform
- On-board Intel® Atom™ E620 CPU
- Intel® EG20T chipset
- On-board 512MB DDR2 667/800 memory, up to 1GB
- 3 GbE LAN ports
- One mini-PCIe Expansion for Wi-Fi
- One SATA 2.5" SSD/ one SATA-DOM

OSA 5130

VoIP/ Network Security Platform

- 1U rackmount network platform
- 2nd generation Intel® Core™ processor family/ Intel® Xeon® E3 family
- Support up to 16GB of 1066/1333 DDR3 SDRAM memory
- Support two PCIe x8 expansion
- Internal one 3.5" HDD bay/ two 2.5" HDD bay (optional)
- Support redundant power supply (optional)



Product Selection Guide

Gateway to Communication









NEXCOM delivers the trusted and reliable platforms for network security appliances. Building upon the standard x86 architecture, our products allow network security software vendors to create their own professional appliances easier without additional efforts in BIOS and drivers. With the integration of leading technology from x86 CPU, PCI-Express and I/O accelerations, the security and performance of customers' applications are greatly improved.

Features and Benefits

- RoHS compliance: commit to produce green products and services compliant with EU RoHS directive 2002/95/EU.
- PCIe based GbE LAN: our PCIe based network security appliances can be enhanced to utilize 10 Gigabit networks to boost network performance.
- Dual/ quad core processors with I/O acceleration: greatly improve CPU computing bandwidth in complex and intensive security computing. With sufficient processing power, they are appropriate for connection/ control-oriented and threat management-oriented network security appliances.
- Modular design platforms: can cope with diverse connection types from copper to fiber or from 2 ports to multi port. Security software vendors can focus on per port performance or increased connectivity with high port density.
- LAN bypass: enable connection fault tolerance for appliances, which act as the transparent bridges among networks. Users will hardly sense the network inaccessible when the appliances stops working due to hardware or software detects.







Applications and Market Focus

-  Firewall/ VPN
-  Anti-Virus/ Anti-Spyware
-  Voice & Data Convergence
-  E-mail Filtering & Anti-Spam
-  Traffic Load Balance
-  Unified Threat Management
-  Intrusion Detection & Prevention
-  Bandwidth Management

Full Range of Product Coverage

	Model	3-port	4-port	6-port	8-port	10-port	12-port
Performance	NSA 7110W		v	v	v	v	v
	NSA 2189N8		v	v	v	v	v
Mainstream	NSA 5110		v		v		
	NSA 5120		v		v	v	v
	NSA 5130		v		v	v	v
	OSA 5130		v		v		
Entry Level	NSA 3111		v		v	v	v
	NSA 3110		v		v		
	NSA 3130		v		v		
	NSA 1120		v				
	NSA 1110		v				
Desktop Level	DNA 110	v					
	DNA 1110		v				
	DNA 1120		v				
	DNA 2120		v	v			




Network Security Appliance

Model				
	NSA 7110W	NSA 2189N8	NSA 5110	NSA 5120
CPU	Support Intel® Xeon™ 5500/5600 series processors QPI speed series processors with up to 6.4GT/s 1066/1333 MHz FSB	Support Intel® 5100/5200/5300/5400 series processors with 1066/1333 MHz FSB	Support Intel® Xeon™/ Core™ 2 Duo/ Pentium® D with 1066/1333 MHz FSB	Support Intel® Xeon™ 3400, i7/i5/i3 series processors
RAM	6 x DDR3 800/1066 UDIMM and RDIMM, up to 24GB	4 x DDR2 533/ 667/800 Fully Buffered DIMM (FB-DIMM), up to 8GB	4 x DDR2 667/800 DIMM, up to 8GB	4 x DDR3 1066/1333 DIMM , up to 16GB
Chipset	Intel® 5520 + Intel® ICH10R	Intel® 5000P + ESB2	Intel® 3210 + ICH9R	Intel® 3450 PCH
LAN Chip	Intel® 82574L, 82575EB, 82580EB, 82598EB, 82599EB	Intel® 82575EB Intel® 82598EB	Intel® 82574L Intel® 82575EB	Intel® 82574L
GbE	Max 26 ports	Max 24 ports	8 ports	Max 8 + 8 ports
HDD	3.5" HDD Bay x 4	3.5" HDD Bay x 2	3.5" HDD Bay x 1 or 2.5" HDD x 2 (Option)	3.5" HDD Bay x 1 or 2.5" HDD x 2 (Option)
CF	1	1	1	1
DOM	SATA DOM x 1	SATA DOM x 1	SATA DOM x1	SATA DOM x1
Serial	1 at front (RJ-45 Connector)	1 at front (RJ-45 connector)	1 at front (RJ-45 connector)	1 at front (RJ-45 connector)
IDE/SATA	0/6	1/2	0/3	0/4
USB	2 at front	2 at front	2 at front	2 at front
Expansion	PCIe slot x 1 LAN Module Bay x 3	PCI-X slot x 1 LAN Module Bay x 3	PCIe slot x 1	PCIe slot x 1 LAN Module Bay x 1
LCM Module	2 x 16, PIO	2 x 16, PIO	2 x 16, PIO	2 x 16, PIO
Indicators	Power, HDD, Bypass LED, GPIO LED	Power, HDD, Bypass LED	Power, HDD, Bypass LED, GPIO LED	Power, HDD, Bypass LED, GPIO LED
Power	460W ATX redundant power supply	460W ATX redundant power supply	250W ATX power supply	250W ATX power supply
Form Factor	2U	2U	1U	1U
Dimensions (mm)	426 x 580 x 88	426 x 600 x 88	426 x 458 x 44	426 x 450 x 44








NSA 5130	OSA 5130	NSA 3110	NSA 3111
2 nd generation Intel® Core™ processor family/ Intel® Xeon® E3 family	2 nd generation Intel® Core™ processor family/ Intel® Xeon® E3 family	Support Intel® Core™ 2 Quad/ Core™ 2 Duo/ Pentium® Dual-Core/Celeron® processors, LGA775 socket, 800/1066/1333 MHz FSB	Support Intel® Core™ 2 Quad/ Core™ 2 Duo/ Pentium® Dual-Core/Celeron® processors, LGA775 socket, 800/1066/1333 MHz FSB
4 x DDR3 1066/1333 DIMM, up to 16GB	4 x DDR3 1066/1333 DIMM, up to 16GB	2 x DDR3 1066 DIMM, up to 4GB	2 x DDR2 667/800 DIMM, up to 4GB
Intel® C206 PCH	Intel® C206 PCH	Intel® G41 + ICH7R	Intel® G41 + ICH7R
Intel® 82583V	Intel® 82583V	Intel® 82574L	Intel® 82574L
Max 8 + 8 ports	8 ports	8 ports	Max 6 + 8 ports
3.5" HDD Bay x 1 or 2.5" HDD x 2 (Option)	3.5" HDD Bay x 1 or 2.5" HDD x 2 (Option)	3.5" HDD Bay x 1 or 2.5" HDD x 2 (Option)	2.5" HDD Bay x 1
1	1	1	1
SATA DOM x 1	SATA DOM x 1	SATA DOM x 1	SATA DOM x 1
1 at front (RJ-45 Connector)	1 at front (RJ-45 Connector)	1 at front (RJ-45 Connector)	1 at front (RJ-45 Connector)
0/3	0/3	0/3	0/3
2 at front	2 at front	2 at front	2 at front
PCIe slot x 1 LAN Module Bay x 1	PCIe slot x 2	PCIe slot x 1 Mini-PCI slot x 1	PCI slot x 1 LAN Module Bay x 1 Mini-PCI slot x 1
2 x 16, PIO	2 x 16, PIO	2 x 16, PIO	2 x 16, PIO
Power, HDD, Bypass LED, GPIO LED	Power, HDD, Bypass LED, GPIO LED	Power, HDD, Bypass LED, GPIO LED	Power, HDD, Bypass LED, GPIO LED
200W ATX power supply, 200W ATX redundant power supply (Option)	200W ATX power supply, 200W ATX redundant power supply (Option)	200W ATX power supply	200W ATX power supply
1U	1U	1U	1U
426 x 450 x 44	426 x 450 x 44	426 x 365 x 44	426 x 450 x 44

Network Security Appliance

Model	Coming Soon			
	NSA 3130	NSA 1083/ 1043	NSA 1110	NSA 1120
CPU	2 nd generation Intel® Core™ processor family	Support Intel® Core™ 2 Duo/ Pentium 4/ Celeron® D processors	Intel® Atom™ D510/D410 processor	Intel® Atom™ D525/ D425 processors
RAM	2 x DDR3 1066/1333 DIMM, up to 8 GB	2 x DDR2 533/ 667/800 DIMM, up to 4GB	1 x DDR2 667/800 DIMM, up to 2GB	1 x DDR3 800 SO-DIMM, up to 2GB
Chipset	Intel® H61 PCH	Intel® Q965 + ICH8	Intel® ICH8M	Intel® ICH8M
LAN Chip	Intel® 82583V	Intel® 82573L Intel® 82541PI	Intel® 82583V	Intel® 82583V
GbE	8 ports	8/4 ports	6 ports	6 ports
HDD	3.5" HDD Bay x 1 or 2.5" HDD x 2 (Option)	3.5" HDD Bay x 1 or 2.5" HDD x 2 (Option)	3.5" HDD Bay x 1 or 2.5" HDD x 2 (Option)	3.5" HDD Bay x 1 or 2.5" HDD x 2 (Option)
CF	1	1	1(Option)	1(Option)
DOM	SATA DOM x 1	N/A	SATA DOM x 1	SATA DOM x 1
Serial	1 at front (RJ-45 Connector)	1 at front (RJ-45 connector)	1 at front (RJ-45 connector)	1 at front (RJ-45 connector)
IDE/SATA	0/3	1/2	1/2	1/2
USB	2 at front	2 at front	2 at front	2 at front
Expansion	PCIe slot x 1	PCI-X slot x 1	PCI slot x 1	PCI slot x 1
LCM Module	2 x 16, PIO	2 x 16, PIO	2 x 16, PIO	2 x 16, PIO
Indicators	Power, HDD, Bypass LED, GPIO LED	Power, HDD, Bypass, Programmable LED	Power, HDD, Bypass LED, GPIO LED	Power, HDD, Bypass LED, GPIO LED
Power	200W ATX power supply	350W ATX power supply	100W ATX power supply	100W ATX power supply
Form Factor	1U	1U	1U	1U
Dimensions (mm)	426 x 365 x 44	426 x 458 x 44	426 x 238 x 44	426 x 238 x 44

Model					
	DNA 110	DNA 1110	DNA 1120	DNA 2120	DNA 1501
CPU	Intel® Atom™ E620 CPU	Intel® Atom™ D510/D410 processors	Intel® Atom™ D525/ D425 processor	Intel® Atom™ D525/ D425 processor	RMI XLS208 600MHz, Dual cores
RAM	On-board 512MB DDR2 667/800 memory, up to 1GB	1 x DDR2 667/800 DIMM, up to 2GB	1 x DDR3 800 SO-DIMM, up to 2GB	On-board 2GB DDR3 667/800 memory, 1 x DDR3 800 DIMM, up to 4GB	1 x DDR2 533/667 SO-DIMM, up to 1GB
Chipset	Intel® EG20T chipset	Intel® ICH8M	Intel® ICH8M	Intel® ICH8M	Netlogic SOC integrated
LAN Chip	Intel® 82583V	Intel® 82583V	Intel® 82583V	Intel® 8253V	Marvell® 88E1111 x 1 for WAN, 5 Port Marvell® 88E616110/ 100/1000 GbE switch x 1
GbE	3 ports	4 ports	4 ports	6 ports	5 ports
HDD	N/A	2.5" HDD Bay x 1	2.5" HDD Bay x 1	2.5" HDD Bay x 1	N/A
CF	N/A	1	1	1	1
DOM	SATA DOM x 1	SATA DOM x 1	SATA DOM x 1	SATA DOM x 1	N/A
Serial	1 at rear (RJ-45 Connector)	1 at rear (RJ-45 connector)	1 at rear (RJ-45 connector)	1 at rear (RJ-45 connector)	1 at rear (RJ-45 connector)
IDE/SATA	0/2	0/2	0/2	0/2	0/0
USB	2 at rear	2 at rear	2 at rear	2 at rear	2 at rear
Expansion	Mini-PCle slot x 1	PCI Slot x 1, Mini-PCI slot x1	PCI Slot x 1, Mini-PCI slot x1	Mini-PCle slot x 1	Mini-PCI slot x 1
LCM Module	N/A	N/A	N/A	N/A	N/A
Indicators	Power, GPIO LED	Power, HDD, Bypass LED, GPIO LED	Power, HDD, Bypass LED, GPIO LED	Power, HDD, Bypass LED, GPIO LED	Power, Flash, LAN
Power	40W power adaptor	45W power adaptor	45W power adaptor	40W power adaptor	60W power adaptor
Form Factor	Desktop	Desktop	Desktop	Desktop	Desktop
Dimensions (mm)	179.9 x 111.9 x 37.5	272 x 195 x 44	272 x 195 x 44	250 x 194 x 40	330 x 220 x 44

Continued

Model					
	NSA 1041N7	NSA 1042N8	DNA 950	DNA 940	DNA 840
Chipset	VIA C7/ Eden V4+ CN700	Intel® 915GME + ICH6M	Intel® EP80579	Intel® 915GME + ICH6M	VIA C7 +CN700
Form Factor	1U Rack mount	1U Rack mount	Desktop	Desktop	Desktop
Ethernet	4GbE	4GbE	4GbE	4GbE	4 x 10/100 FE
Bypass	Yes	Yes	Yes	Yes	Yes



Main Features

- Ultra High Performance with Quad-Core Processors and IOAT3 Function
- Support DDR3 800/1066 ECC & REG/ Non-ECC Memory, up to 24GB
- Modular Design Support 3 PCIe LAN Modules
- Support 10G XFP/ SFP+, 1GbE Copper/SFP LAN
- Support PCIe EM Ethernet Card
- Support PCI-X and PCIe x8 Expansion Slot
- On-board CF Socket
- Four Swappable 3.5" Support SATA/SAS HDD
- Support (1 + 1) Redundant Power Supply
- Support LCD Module

Specifications

Main Board

- NSB 7110W
- Support Intel® Xeon™ 5500/5600 series processors, LGA1366 socket
- Support 4.8/5.86/6.4 GT/s QPI speed
- Intel® 5520 and ICH10R chipset

Main Memory

- 6 x 240-pin DDR3 800/1066 DIMM slots, up to 24GB ECC® and non-ECC SDRAM

LAN Features

- Swappable LAN modules
- LAN chip: Intel® 82574L/ 82575EB/ 82580EB/ 82598EB/ 82599EB
- Support 10/100/1000/10G link speed
- LAN Bypass: ** Please see LAN module list information

Expansion

- 1 x PCIe x8 slot (Default)
- 2 x PCIe x4 slot (Optional)
- 2 x PCI-X slot (Optional)

I/O Interface-Front

- Support 2 x 16 characters LCD module, PIO interface
- Power status/ HDD status/ LAN status/ Bypass status LEDs
- 4 x 3.5" HDD swappable bays
- 3 x LAN module bays
- 2 x USB 2.0 ports
- 1 x RJ45 type console port
- 1 x software button
- 1 x management LAN ports

I/O Interface-Rear

- 2 x swappable system FANs
- 1 x expansion slot for PCIe x8
- 2 x expansion slots for PCI-X (Optional)

- 2 x expansion slots for PCIe x4 (Optional)
- 1 x VGA Port

Devices

- 1 x on-board CompactFlash socket
- 1 x SATA-DOM device space

Power Input

- 460W 1+1 ATX redundant power supply

Chassis Dimensions

- Chassis dimension: 430mm x 580mm x 88mm
- Carton dimension: 640mm x 800mm x 310mm

Weight

- Without packing: 19kg
- With packing: 25kg

Certifications

- CE approval
- FCC Class A
- UL

Ordering Information


Barebone

• NSA 7110W (P/N:10S00711002X0)

Support Intel® Xeon™ 5500/5600 series processors, 6 DDR3 memory slots, Max. 25 Gigabit LAN ports, CompactFlash socket, VGA, USB port, one PCIe x8 expansion slot


NSK 5175-C8

PCIe GbE module with 8 copper ports base on Intel® 82575EB chipset and 2 pairs dual latch Bypass




NSK 5175-F8

PCIe GbE module with 8 SFP ports base on Intel® 82575EB chipset



NSK 5175-C4F4

PCIe GbE module with 4 copper and 4 SFP ports base on Intel® 82575EB chipset and 2 pairs dual latch Bypass



NSK 5198-F2

PCIe 10G module with 2 XFP ports base on Intel® 82598EB chipset



	P/N	Controller	Interface Type	Port number	Bypass/segment	Expansion Slot	Location Slot
NSK 5176-C4	10SK0517601X0	Intel® 82576EB	PCIe x8	4 Copper	Dual Latch/2	None	All Slot
NSK 5176-F4	10SK0517603X0	Intel® 82576EB	PCIe x8	4 SFP	None	None	All Slot
NSK 5175-C8	10SK0517509X0	Intel® 82575EB	PCIe x8	8 Copper	Dual Latch/2	None	All Slot
NSK 5175-F8	10SK0517510X0	Intel® 82575EB	PCIe x8	8 SFP	None	None	All Slot
NSK 5175-C4F4	10SK0517511X0	Intel® 82575EB	PCIe x8	4 Copper/4 SFP	Dual Latch/2	None	All Slot
NSK 5198-F2	10SK0519803X0	Intel® 82598EB	PCIe x8	2 XFP	None	None	All Slot
NSK 5198-EMB	10SK0519804X0	Intel® 82575EB	PCIe x8	2 fiber on board	1	None	All Slot
NSK5180-C8	10SK0518000X0	Intel® 82580EB	PCIe x8	8 Copper	Dual Latch/2	None	All Slot
NSK5180-F8	10SK0518001X0	Intel® 82580EB	PCIe x8	8 SFP	None	None	All Slot
NSK5180-C4F4	10SK0518002X0	Intel® 82580EB	PCIe x8	4 Copper/4 SFP	Dual Latch/2	None	All Slot
NSK5199-F2	10SK0519900X0	Intel® 82599EB	PCIe x8	2 SFP+	None	None	All Slot
NIO 1101	10SK0110100X0	Aspeed	NEXCOM	1 for IPMI	None	None	IPMI Slot
NSK 3100-1 (PCIe Riser) Default	20SK0310000X0	None	PCIe x8	None	None	1 x PCIe x8	Riser Card
NSK 3102 (PCIe Riser)	20SK0310200X0	None	PCIe x8	None	None	2 x PCIe x4	Riser Card
NSK 3201-2 (PCI-X Riser)	20SK0320101X1	PERICOM	PCIe x8	None	None	2 x PCI-X	Riser Card

NSA 1083/1043

Intel® Core™ 2 Quad/ Core™ 2 Duo Series Processors

1U Rackmount with 8/4 PCIe GbE LAN

NSA 1083



NSA 1043



Main Features

- ♦ 1U Rackmount Network Platform
- ♦ Intel® Core™ 2 Quad/Core™ 2 Duo/Pentium® Dual-Core/Celeron® 400 Series Processors
- ♦ Support DDR2 533/667/800 Memory, up to 4GB
- ♦ 8/4 x GbE LAN ports
- ♦ One PCI-X Expansion Slot
- ♦ On-board CF Socket
- ♦ Internal one 3.5" HDD Bay/two 2.5" HDD Bay (Optional)
- ♦ Support LCD Module

Specifications

Main Board

- ♦ NSB 1083/ 1043
- ♦ Support Intel® Core™ 2 Quad/Core™ 2 Duo/Pentium® Dual-Core/Celeron® 400 Series Processor, LGA775 socket
- ♦ Support 800/1066 MHz FSB
- ♦ Intel® Q965 and ICH8 Chipset

Main Memory

- ♦ 2 x 240-pin DDR2 533/667/800 DIMM slots, up to 4GB Non-ECC SDRAM

LAN Features

- ♦ LAN Chip: Intel® 82573L/ 82541PI
- ♦ Support 10/100/1000 link speed
- ♦ LAN Bypass: 3 pairs

Expansion

- ♦ 1 x Mini-PCI Slot
- ♦ 1 x PCI-X Slot

I/O Interface-Front

- ♦ Support 2 x 16 Characters LCD module, PIO interface
- ♦ Power status/HDD status/LAN status/Bypass status LEDs
- ♦ 2 x USB 2.0 ports
- ♦ 1 x RJ45 type Console port
- ♦ 1 x software button
- ♦ 8 x Copper LAN ports

I/O Interface-Rear

- ♦ 1 x Expansion slot
- ♦ 1 x USB 2.0 port
- ♦ 1 x VGA port

Devices

- ♦ 1 x on-board CompactFlash socket
- ♦ 1 x Internal 3.5" HDD bay

Power Input

- ♦ 350W ATX Power Supply

Chassis Dimensions

- ♦ Chassis Dimension: 426mm x 458mm x 44mm
- ♦ Carton Dimension: 560mm x 620mm x 190mm

Weight

- ♦ Without Packing: 8kg
- ♦ With Packing: 11.5kg

Certifications

- ♦ CE approval
- ♦ FCC Class A
- ♦ UL

Ordering Information

Barebone

♦ NSA 1083L (P/N: 10S01083L00X0)

Support Intel® Core™ 2 Quad/Core™ 2 Duo/Pentium® Dual-Core/Celeron®, 2 DDR2 memory slots, 8 Gigabit LAN ports, CompactFlash Socket, VGA, USB port, One PCI-X Expansion Slot

♦ NSA 1043L (P/N: 10S01043L00X0)

Support Intel® Core™ 2 Quad/Core™ 2 Duo/Pentium® Dual-Core/Celeron®, 2 DDR2 memory slots, 4 Gigabit LAN ports, CompactFlash Socket, VGA, USB port, One PCI-X Expansion Slot



Main Features

- ♦ 1U Rackmount Network Platform
- ♦ Intel® UP Xeon™/Core™ 2 Quad/Core™ 2 Duo/Pentium® Dual Core/Celeron® with 800/1066/1333 MHz FSB
- ♦ Supports DDR2 667/800 Memory, up to 8GB
- ♦ Support one PCIe x8 Expansion
- ♦ Internal one 3.5" HDD Bay
- ♦ Support LCD Module

Specifications

Main Board

- ♦ NSB 5110
- ♦ Supports Intel® Xeon™/Core™ 2 Duo/Pentium® Dual-Core/Celeron® Processors, LGA775 socket, max 95w
- ♦ Support 800/1066/1333 MHz FSB
- ♦ Intel® 3210 and ICH9R Chipset

Main Memory

- ♦ 4 x 240-pin DDR2 667/800 DIMM slots, up to 8GB ECC/ Non-ECC SDRAM

LAN Features

- ♦ LAN Chip: Intel® 82574L and 82575EB
- ♦ Support 10/100/1000 link speed
- ♦ LAN Bypass: 4 pairs

Expansion

- ♦ 1 x PCIe x8 Slot

I/O Interface-Front

- ♦ Support 2 x 16 Characters LCD module, PIO interface
- ♦ Power status/HDD status/LAN status/Bypass status LEDs
- ♦ 2 x USB 2.0 ports
- ♦ 1 x RJ45 type Console port
- ♦ 1 x software button
- ♦ 8 x Copper LAN ports

I/O Interface-Rear

- ♦ 1 x Expansion slot
- ♦ 1 x USB 2.0 port
- ♦ 1 x VGA port

Devices

- ♦ 1 x on-board CompactFlash socket
- ♦ 1 x Internal 3.5" HDD bay
- ♦ 1 x SATA-DOM device space

Power Input

- ♦ 250W ATX Power Supply

Chassis Dimensions

- ♦ Chassis Dimension: 426mm x 457mm x 44mm
- ♦ Carton Dimension: 560mm x 620mm x 190mm

Weight

- ♦ Without Packing: 8kg
- ♦ With Packing: 12kg

Certifications

- ♦ CE approval
- ♦ FCC Class A
- ♦ UL

Ordering Information

Barebone

♦ NSA 5110 (P/N: 10S00511000X0)

Support Intel® Xeon™/Core™ 2 Duo/Pentium® Dual-Core/Celeron®, 4 DDR2 memory slots, 8 Gigabit LAN ports, CompactFlash Socket, VGA, USB port, One PCIe x8 Expansion Slot

♦ NSA 5110-C6F2 (P/N: 10S00511002X0)

Support Intel® Xeon™/Core™ 2 Duo/Pentium® Dual-Core/Celeron®, 4 DDR2 memory slots, 6 Copper Ports and 2 Fiber Ports, CompactFlash Socket, VGA, USB port, One PCIe x8 Expansion Slot



Main Features

- 1U Rackmount Network Platform
- Intel® Xeon™ 3400/i7/i5/i3 Processors
- Support DDR3 1066/1333 Memory, up to 16GB
- Support One LAN Module, One PCIe x8 Expansion
- Internal one 3.5" HDD Bay/two 2.5" HDD Bay (Optional)
- Support LCD Module (Optional)

Specifications

Main Board

- NSB 5120
- Support Intel® Xeon™ 3400/i7/i5/i3 series Processors, Max 95watt
- Intel® 3450 PCH

Main Memory

- 4 x 240-pin DDR3 1066/1333MHz DIMM slots, Up to 16GB ECC/ Non-ECC SDRAM

LAN Features

- LAN Chip: Intel® 82574L
- Support 10/100/1000 link speed
- LAN Bypass: 4 pairs
- LAN module (Optional)

Expansion

- 1 x PCIe x8 Slot

I/O Interface-Front

- Support 2 x 16 Characters LCD Module, PIO interface (Optional)
- Power status/HDD status/LAN status/Bypass status LED
- 2 x USB 2.0 Ports
- 1 x software button
- 1 x RJ45 type Console Port
- 8 x Copper LAN Ports
- 1x LAN Module Support (Optional)

I/O Interface-Rear

- 1 x Expansion Slot
- 2 x USB 2.0 Ports
- 1 x VGA Port

Devices

- 1 x On-board CompactFlash Socket
- 1 x Internal 3.5" HDD bay
- 1 x SATA-DOM device space

Power Input

- 200W ATX Power Supply

Dimensions

- Chassis Dimension: 426mm x 450mm x 44mm
- Carton Dimension: 560mm x 620mm x 190mm

Weight

- Without Packing: 8Kg
- With Packing: 12Kg

Certifications

- CE approval
- FCC Class A
- UL

Ordering Information

Barebone

- **NSA 5120 (P/N: 10S00512000X0)**


Support Intel® Xeon™ 3400/i7/i5/i3 series processors, 4 DDR3 memory slots, 8 PCIe GbE LAN ports, CompactFlash Socket, USB ports, VGA port, One PCIe x8 Expansion Slot, w/o LCM

Options

- **NSA 5120 LCM & MEMBRANE (P/N: 88S00512000X0)**


NSK 5275-C8

PCIe GbE module with 8 copper ports base on Intel® 82575EB chipset and 2 pairs dual latch bypass




NSK 5275-F8

PCIe GbE module with 8 SFP ports base on Intel® 82575EB chipset



NSK 5275-C4F4

PCIe GbE module with 4 copper and 4 SFP ports base on Intel® 82575EB chipset and 2 pairs dual latch bypass



NSK 5298-F2

PCIe 10G module with 2 XFP ports base on Intel® 82598EB chipset



	P/N	Controller	Interface Type	Port number	Bypass/segment
NSK5275-C4	10SK0527500X0	Intel® 82575EB	PCIe x8	4 Copper	Dual Latch/2
NSK5275-F4	10SK0527501X0	Intel® 82575EB	PCIe x8	4 SFP	None
NSK5276-C2	10SK0527600X0	Intel® 82576EB	PCIe x8	2 Copper	Dual Latch/1
NSK5276-F2	10SK0527601X0	Intel® 82576EB	PCIe x8	2 SFP	None
NSK5275-F8	10SK0527503X0	Intel® 82575EB	PCIe x8	8 SFP	None
NSK5275-C4F4	10SK0527505X0	Intel® 82575EB	PCIe x8	4 Copper/ 4 SFP	Dual Latch/2
NSK5298-C2	10SK0529800X0	Intel® 82598EB	PCIe x8	2 CX4	None
NSK5298-F2	10SK0529801X0	Intel® 82598EB	PCIe x8	2 XFP	None



Main Features

- ♦ 2nd Generation Intel® Core™ Processor Family/ Intel® Xeon® E3 Family
- ♦ Support 1066/1333 DDR3 SDRAM , up to 16GB
- ♦ Support One PCIe x8 Expansion
- ♦ Internal One 3.5" HDD Bay/ Two 2.5" HDD Bay (Optional)

Specifications

Main Board

- ♦ NSB 5130
- ♦ Support 2nd generation Intel® Core™ processor family/ Intel® Xeon® E3 family, Max 95watt
- ♦ Intel® C206

Main Memory

- ♦ 4 x 240-pin DDR3 1066/1333MHz DIMM slots, up to 16GB

LAN Features

- ♦ LAN Chip: Intel® 82583V
- ♦ Support 10/100/1000M/10G link speed
- ♦ LAN Bypass: 4 pairs
- ♦ LAN module (optional)

Expansion

- ♦ 1 x PCIe x8 Slot

I/O Interface-Front

- ♦ Power status/ HDD status/ LAN status/ Bypass status LED
- ♦ 2 x USB 2.0 ports
- ♦ 1 x RJ45 type console port
- ♦ 8 x Copper LAN ports
- ♦ 1 x LAN module (Option)

I/O Interface-Rear

- ♦ 1 x expansion slot
- ♦ 2 x USB 2.0 ports (option)
- ♦ 1 x VGA port (option)

Devices

- ♦ 1 x on-board CompactFlash socket
- ♦ 1 x internal 3.5" HDD bay/ two 2.5" HDD Bay (optional)
- ♦ 1 x SATA-DOM device space

Power Input

- ♦ 200W ATX Power Supply

Dimensions

- ♦ Chassis Dimension: 426mm x 450mm x 44mm
- ♦ Carton Dimension: 560mm x 620mm x 190mm

Weight

- ♦ Without Packing: 8Kg
- ♦ With Packing: 12Kg

Certifications

- ♦ CE approval
- ♦ FCC Class A
- ♦ UL

Ordering Information

Barebone

♦ NSA 5130 (P/N: 10S00513000X0)

Support 2nd generation Intel® Core™ processor family/ Intel® Xeon® E3 family, 4 DDR3 memory slots, 8 PCIe GbE LAN ports, CompactFlash socket, USB ports, VGA port, one PCIe x8 expansion slot, w/o LCM

♦ NSA 5130HA (P/N: TBD)


Support 2nd generation Intel® Core™ processors, 4 DDR3 memory slots, 8 PCIe GbE LAN ports, CompactFlash socket, USB ports, VGA port, one PCIe x8 expansion slot, w/o LCM, 200W 1+1 redundant power supply

Option

♦ NSA 5130 LCM & MEMBRANE (P/N: 88S00513003X0)

NSK 5380-C8

PCIe GbE module with 8 copper ports base on Intel® NH82580EB chipset and 2 pairs dual latch bypass




NSK 5380-F8

PCIe GbE module with 8 SFP ports base on Intel® NH82580EB chipset



NSK 5399-F2

PCIe GbE module with 2 SFP+ ports base on Intel® JL82599ES chipset



	P/N	Controller	Interface Type	Port number	Bypass / segment
NSK5380-C8	10SK0538000X0	INTEL® 82580EB	PCIe x8	8 Copper	Dual Latch/2
NSK5380-F8	10SK0538001X0	INTEL® 82580EB	PCIe x8	8 SFP	None
NSK5380-C4F4	10SK0538002X0	INTEL® 82580EB	PCIe x8	4 Copper/ 4 SFP	Dual Latch/2
NSK5380-F4	10SK0538003X0	INTEL® 82580EB	PCIe x8	4 SFP	None
NSK5399-F2	10SK0539900X0	INTEL® 82599EB	PCIe x8	2 SFP+	None

Coming Soon

Main Features

- ♦ 1U Rackmount Network Platform
- ♦ 2nd Generation Intel® Core™ Processor Family/ Intel® Xeon® E3 Family
- ♦ Support DDR3 1066/1333 Memory, up to 16GB
- ♦ 8 x GbE LAN Ports
- ♦ Support One PCIe x8 Expansion
- ♦ Internal One 3.5" HDD Bay/ Two 2.5" HDD Bay (Optional)

Specifications

Main Board

- ♦ NSB 5131
- ♦ Support 2nd generation Intel® Core™ processor family, Max 95watt
- ♦ Intel® C206

Main Memory

- ♦ 4 x 240-pin DDR3 1066/1333MHz DIMM slots, up to 16GB ECC/ non-ECC SDRAM

LAN Features

- ♦ LAN Chip: Intel® 82576V
- ♦ Support 10/100/1000 link speed
- ♦ LAN Bypass: 2 pairs

I/O Interface-Front

- ♦ Power status/ HDD status/ LAN status/ Bypass status LED
- ♦ 2 x USB 2.0 ports
- ♦ 1 x RJ45 type console port
- ♦ 6 x copper LAN ports
- ♦ 2 x fiber LAN ports

I/O Interface-Rear

- ♦ 2 x USB 2.0 ports
- ♦ 1 x VGA port

Devices

- ♦ 1 x internal 3.5" HDD bay
- ♦ 3 x SATA device space

Power Input

- ♦ 200W ATX power supply

Dimensions

- ♦ Chassis Dimension: 426mm x 450mm x 44mm
- ♦ Carton Dimension: 560mm x 620mm x 190mm

Weight

- ♦ Without Packing: 8Kg
- ♦ With Packing: 12Kg

Certifications

- ♦ CE approval
- ♦ FCC Class A
- ♦ UL

Ordering Information

Barebone

- ♦ **NSA 5131 (P/N: 10S00513100X2)**
Support 2nd generation Intel® Core™ processor family/ Intel® Xeon® E3 Family, 4 DDR3 memory slots, 8 PCIe GbE LAN ports, USB ports, VGA port, w/o LCM

Option

- ♦ **NSA 5131 LCM & MEMBRANE (P/N: 88S00513100X0)**



Main Features

- 1U Rackmount Network Platform
- Intel® Atom™ D510 Dual Core/D410 Single Core 1.66 GHz Processor
- Support DDR2 667/800 Memory, up to 2GB
- 6 x GbE LAN Ports
- Support LAN Bypass
- Internal one 3.5" HDD Bay/ two 2.5" HDD Bay (Optional)
- Support LCD Module (Optional)

Specifications

Main Board

- NSB 1110
- Support Intel® Atom™ D510 Dual Core/D410 Single Core 1.66GHz Processor
- Intel® ICH8M Chipset

Main Memory

- 1 x 240-pin DDR2 667/800 DIMM slot, up to 2GB Non-ECC SDRAM

LAN Features

- LAN Chip: Intel® 82583V
- Support 10/100/1000 link speed
- LAN Bypass: 2 pairs

Expansion

- 1 x PCI Slot (Optional)

I/O Interface-Front

- Support 2 x 16 Characters LCD Module, PIO interface (Optional)
- Power status/HDD status/LAN status/Bypass status LED
- 2 x USB 2.0 Ports
- 1 x RJ45 type Console Port
- 1 x software button
- 6 x Copper LAN Ports
- 1 x PCI Expansion (Optional)

I/O Interface-Rear

- 2 x USB 2.0 Ports
- 1 x VGA Port

Devices

- 1 x CompactFlash Socket (Optional)
- 1 x Internal 3.5" HDD bay
- 1 x SATA-DOM device space

Power Input

- 100W ATX Power supply

Dimensions

- Chassis Dimension: 426mm x 238mm x 44mm
- Carton Dimension: 556mm x 384mm x 185 mm

Weight

- Without Packing: 5.6kg
- With Packing: 8kg

Certifications

- CE approval
- FCC Class A

Ordering Information

Barebone

• NSA 1110 (P/N: 10S00111000X0)

Intel® Atom™ D410 Single Core 1.66GHz Processor, 1 DDR2 memory slot, 6 Gigabit LAN ports with two pairs bypass, VGA, USB port, w/o LCM

• NSA 1110A (P/N: 10S00111001X0)

Intel® Atom™ D510 Dual Core 1.66GHz Processor, 1 DDR2 memory slot, 6 Gigabit LAN ports with two pairs bypass, VGA, USB port, w/o LCM

• NSA 1110-C4 (P/N: 10S00111002X0)

Intel® Atom™ D410 Single Core 1.66GHz Processor, 1 DDR2 memory slot, 4 Gigabit LAN ports with two pairs bypass, VGA, USB port, w/o LCM

• NSA 1110A-C4 (P/N: 10S00111003X0)

Intel® Atom™ D510 Dual Core 1.66GHz Processor, 1 DDR2 memory slot, 4 Gigabit LAN ports with two pairs bypass, VGA, USB port, w/o LCM

Options

• NSA 1110/ NSA1110A LCM & MEMBRANE (P/N: 88S00111000X0)

• NSA 1110-C4/ NSA 1110A-C4 LCM & MEMBRANE (P/N: 88S00111001X0)

NSA 1120

Intel® Atom™ D525 Dual Core/ D425 Single Core 1.8GHz Processor

1U Rackmount with 6 PCIe GbE LAN Ports



Main Features

- ♦ 1U Rackmount Network Platform
- ♦ Intel® Atom™ D525 Dual Core/ D425 Single Core 1.8GHz Processor
- ♦ Support DDR3/800 Memory, up to 2GB
- ♦ 6 x GbE LAN Ports
- ♦ Support LAN Bypass
- ♦ Internal one 3.5" HDD Bay/ two 2.5" HDD Bay (Optional)
- ♦ Support LCD Module (Optional)

Specifications

Main Board

- ♦ NSB 1120
- ♦ Support Intel® Atom™ D525 Dual Core/ D425 Single Core 1.8GHz Processor
- ♦ Intel® ICH8M Chipset

Main Memory

- ♦ 1 x 204-pin DDR3 800 SO-DIMM slot, up to 2GB Non-ECC SDRAM

LAN Features

- ♦ LAN Chip: Intel® 82583V
- ♦ Support 10/100/1000 link speed
- ♦ LAN Bypass: 2 pairs

Expansion

- ♦ 1 x PCI Slot (Optional)

I/O Interface-Front

- ♦ Support 2 x 16 Characters LCD Module, PIO interface (Optional)
- ♦ Power status/HDD status/LAN status/Bypass status LED
- ♦ 2 x USB 2.0 Ports
- ♦ 1 x RJ45 type Console Port
- ♦ 1 x software button
- ♦ 6 x Copper LAN Ports
- ♦ 1 x PCI Expansion (Optional)

I/O Interface-Rear

- ♦ 2 x USB 2.0 Ports
- ♦ 1 x VGA Port

Devices

- ♦ 1 x CompactFlash Socket (Optional)
- ♦ 1 x Internal 3.5" HDD bay
- ♦ 1 x SATA-DOM device space

Power Input

- ♦ 100W ATX Power supply

Dimensions

- ♦ Chassis Dimension: 426mm x 238mm x 44mm
- ♦ Carton Dimension: 556mm x 384mm x 185 mm

Weight

- ♦ Without Packing: 5.6kg
- ♦ With Packing: 8kg

Certifications

- ♦ CE approval
- ♦ FCC Class A
- ♦ UL

Ordering Information

Barebone

- ♦ **NSA 1120 (P/N: 10S00112000X0)**
Intel® Atom™ D425 Single Core 1.8 GHz Processor, 1 DDR3 memory slot, 6 Gigabit LAN ports with two pairs bypass, VGA, USB port, w/o LCM
- ♦ **NSA 1120A (P/N: 10S00112001X0)**
Intel® Atom™ D525 Dual Core 1.8 GHz Processor, 1 DDR3 memory slot, 6 Gigabit LAN ports with two pairs bypass, VGA, USB port, w/o LCM
- ♦ **NSA 1120-C4 (P/N: 10S00112002X0)**
Intel® Atom™ D425 Single Core 1.8 GHz Processor, 1 DDR3 memory slot, 4 Gigabit LAN ports with two pairs bypass, VGA, USB port, w/o LCM
- ♦ **NSA 1120A-C4 (P/N: 10S00112003X0)**
Intel® Atom™ D525 Dual Core 1.8 GHz Processor, 1 DDR3 memory slot, 4 Gigabit LAN ports with two pairs bypass, VGA, USB port, w/o LCM

Options

- ♦ **NSA 1120/ NSA 1120A LCM & MEMBRANE (P/N: 88S00112000X0)**
- ♦ **NSA 1120-C4/ NSA 1120A-C4 LCM & MEMBRANE (P/N: 88S0011201X0)**



Main Features

- 1U Rackmount Network platform
- Supports Intel® Core™ 2 Quad/Core™ 2 Duo/Pentium® Dual Core/ Celeron® Processor
- Supports DDR3 1066 Memory, up to 4GB
- 8 x GbE LAN ports
- One PCIe 8x Expansion
- Internal one 3.5" HDD Bay/two 2.5" HDD Bay (Optional)
- Support LCD Module (Optional)

Specifications

Main Board

- NSB 3110
- Support Intel® Core™ 2 Quad/Core™ 2 Duo/Pentium® Dual-Core/ Celeron® Processors, LGA775 socket
- Support 800/1066/1333 MHz FSB
- Intel® G41 and ICH7R Chipset

Main Memory

- 2 x 240-pin DDR3 1066 DIMM slots, up to 4GB Non-ECC SDRAM

LAN Features

- LAN Chipset: Intel® 82574L
- Support 10/100/1000 link speed
- LAN Bypass: 4 pairs

Expansion

- 1 x PCIe x8 Slot
- 1 x Mini-PCI Slot

I/O Interface-Front

- Support 2 x 16 Characters LCD module, PIO interface (Optional)
- HDD status/Power/LAN status/Bypass status LEDs
- 2 x USB 2.0 ports
- 1 x RJ45 type Console port
- 1 x Software button
- 8 x Copper LAN ports

I/O Interface-Rear

- 1 x Expansion slot
- 1 x VGA port

Devices

- 1 x On-board CompactFlash Socket
- 1 x Internal 3.5" HDD bay

Power Input

- 200W ATX Power Supply

Dimensions

- Chassis Dimension: 426mm x 365mm x 44mm
- Carton Dimension: 560mm x 570mm x 190mm

Weight

- Without packing: 6.5kg
- With packing: 10kg

Certifications

- CE approval
- FCC Class A
- UL

Ordering Information

Barebone

• NSA 3110 (P/N: 10S00311000X0)

Support Intel® Core™ 2 Quad/Core™ 2 Duo/Pentium® Dual-Core/ Celeron®, 2 DDR3 memory slots, 8 Gigabit LAN ports, Compactflash Socket, VGA, USB port, One PCIe x8 Expansion slot, w/o LCM

• NSA 3110-C4 (P/N: 10S00311003X0)

Support Intel® Core™ 2 Quad/Core™ 2 Duo/Pentium® Dual-Core/ Celeron®, 2 DDR3 memory slots, 4 Gigabit LAN ports, Compactflash Socket, VGA, USB port, One PCIe x8 Expansion slot, w/o LCM

Options

• NSA 3110 LCM & MEMBRANE (P/N: 88S00311000X0)

• NSA 3110-C4 LCM & MEMBRANE (P/N: 88S00311001X0)

NSA 3111

Intel® Core™ 2 Duo/ Pentium® Dual-Core/ Celeron®
1U Rackmount with 4/6+8 PCIe GbE LAN

NSA 3111-C6



NSA 3111-C4



Main Features

- ♦ 1U Rackmount Network Platform
- ♦ Supports Intel® Core™ 2 Duo/Pentium® Dual Core/Celeron® Processor
- ♦ Supports DDR2 667/800 Memory, up to 4GB
- ♦ 4/6 GbE LAN Ports
- ♦ Support one LAN Module, one PCI Expansion Slot
- ♦ Internal one 2.5" HDD Bay

Specifications

Main Board

- ♦ NSB 3111
- ♦ Support Intel® Core™ 2 Duo/Pentium® Dual-Core/Celeron® Processors, LGA775 socket
- ♦ Support 800/1066/1333 MHz FSB
- ♦ Intel® G41 and ICH7R Chipset

Main Memory

- ♦ 2 x 240-pin DDR2 667/800 DIMM slots, up to 4GB Non-ECC SDRAM

LAN Features

- ♦ Lan Chipset: Intel® 82574L
- ♦ Support 10/100/1000 link speed
- ♦ LAN Bypass: 2 pairs

Expansion

- ♦ 1 x PCI Slot
- ♦ 1 x Mini-PCI Slot

I/O Interface-Front

- ♦ HDD status/Power/GPIO status LEDs
- ♦ 2 x USB 2.0 ports
- ♦ 1 x RJ45 type Console port
- ♦ 1 x software button
- ♦ 4~6 Copper LAN ports
- ♦ 1 x LAN Module Support (Optional)

I/O Interface-Rear

- ♦ 1 x Expansion slot

Devices

- ♦ 1 x on-board CompactFlash socket
- ♦ 1 x Internal 2.5" HDD bay
- ♦ 1 x Internal 44 pin IDE interface

Power Input

- ♦ 200W ATX Power Supply

Dimensions

- ♦ Chassis Dimension: 426mm x 450mm x 44mm
- ♦ Carton Dimension: 560mm x 640mm x 200mm

Certifications

- ♦ CE approval
- ♦ FCC Class A

Ordering Information

Barebone

♦ NSA 3111-C6 (P/N: 10S00311101X0)

Support Intel® Core™ 2 Duo/Pentium® Dual-Core/Celeron®, 2 DDR2 memory slots, 6 Gigabit LAN ports, Compactflash Socket, VGA, USB port, One PCI Expansion slot, One LAN Modular, w/o LCM & Membrane

♦ NSA 3111-C4 (P/N: 10S00311100X0)

Support Intel® Core™ 2 Duo/Pentium® Dual-Core/Celeron®, 2 DDR2 memory slots, 4 Gigabit LAN ports, Compactflash Socket, VGA, USB port, One PCI Expansion slot, One LAN Modular, w/o LCM & Membrane

	Controller	Interface Type	Port number	Bypass / segment
NSK5175-C8	Intel® 82575EB	PCIe x8	8 Copper	Dual latch / 2
NSK5175-F8	Intel® 82575EB	PCIe x8	8 SFP	None

Coming Soon

Main Features

- 1U Rackmount Network Platform
- 2nd Generation Intel® Core™ Processor Family
- Support DDR3 1066/1333 Memory, up to 8GB
- 8 x GbE LAN Ports
- Support One PCIe x8 Expansion
- Internal One 3.5" HDD Bay/ Two 2.5" HDD Bay (Optional)

Specifications

Main Board

- NSB 3130
- Support 2nd generation Intel® Core™ processor family
- Intel® H61

Main Memory

- 2 x 240-pin DDR3 1066/1333MHz DIMM slots, up to 8GB ECC/ non-ECC SDRAM

LAN Features

- LAN Chip: Intel® 82583V
- Support 10/100/1000 link speed
- LAN Bypass: 4 pairs

Expansion

- 1 x PCIe x 8 Slot

I/O Interface-Front

- Power status/ HDD status/ LAN status/ bypass status LED
- 2 x USB 2.0 ports
- 1 x RJ45 type console port
- 8 x Copper LAN ports

I/O Interface-Rear

- 1 x expansion slot
- 2x USB 2.0 ports
- 1x VGA port

Devices

- 1 x internal 3.5" HDD bay/ Two 2.5" HDD Bay (Optional)
- 1 x SATA-DOM device space
- 1 x CFast socket/ 1x CompactFlash Socket

Power Input

- 200W ATX power supply

Dimensions

- Chassis Dimension: 426mm x 365mm x 44mm
- Carton Dimension: 560mm x 570mm x 190mm

Certifications

- CE approval
- FCC Class A
- UL

Ordering Information

Barebone

• NSA 3130 (P/N: TBD)

Support 2nd generation Intel® Core™ processor family, 2 DDR3 memory slots, 8 PCIe GbE LAN ports, CompactFlash socket, CFast socket, USB ports, VGA port, one PCIe x8 expansion slot, w/o LCM

Option

• NSA 3130 LCM & MEMBRANE (P/N: TBD)

DNA 110/ 110A

Desktop Intel® Atom™ E620 CPU
with 3 GbE LAN



Main Features

- Desktop Network Platform
- On-board Intel® Atom™ E620 CPU
- Intel® EG20T Chipset
- On-board 512MB DDR2 667/800 Memory, up to 1GB
- Support 3 GbE LAN Ports
- One Mini-PCle Expansion for WiFi
- One SATA 2.5"SSD/ One SATA-DOM
- Fanless Design

Specifications

Main Board

- DNA110
- Support Intel® Atom™ E600 series processor
- Intel® EG20T chipset

Main Memory

- On-board 512MB/1GB DDR2 667/800 memory

LAN Features

- LAN Chip: Intel® 82583V
- Support 10/100/1000 link speed

Expansion

- 1 x Mini-PCle Slot

I/O Interface-Front

- 2 x GPIO LEDs

I/O Interface-Rear

- 1 x software reset button
- 1 x RJ45 type console port
- 2 x USB 2.0 ports
- 3 x RJ45 ports
- 2 x hole for wireless antenna

Devices

- 1 x SATA 2.5" SSD space
- 1 x SATA-DOM device space

Power Input

- 40W power adapter

Chassis Dimensions

- Chassis dimension: 179.9mm x 111.9mm x 37.5mm
- Carton dimension: 235mm x 200mm x 100mm

Weight

- Without packing: 1kg
- With packing: 2kg

Certifications

- CE approval
- FCC Class A
- UL

Ordering Information

Barebone

• DNA110 (P/N: 10L00011000X0)

Intel® Atom™ E620 processor, on-board 512MB DDR2 667/ 800 memory, 3 Gigabit LAN ports with one Mini-PCle expansion for Wi-Fi, USB port

• DNA110A (P/N: 10L00011002X0)

Intel® Atom™ E620 processor, on-board 1GB DDR2 667/ 800 memory, 3 Gigabit LAN ports with one Mini-PCle expansion for Wi-Fi, USB port

DNA 940

Desktop Intel® Celeron® M Processor with 4 PCIe GbE LAN



Main Features

- ♦ Desktop Network Platform
- ♦ Intel® Celeron® M 600MHz Processor
- ♦ Supports DDR2 400/533 Memory, up to 2GB
- ♦ 4 x GbE LAN ports
- ♦ Support LAN Bypass
- ♦ One mini-PCI Expansion
- ♦ On-board CF Socket
- ♦ Internal one 2.5" HDD Bay

Specifications

Main Board

- ♦ DNB 940
- ♦ On-board Intel® Celeron® M 600MHz Processor
- ♦ Intel® 910GME and ICH6M Chipset

Main Memory

- ♦ 1 x 240-pin DDR2 400/533 DIMM slot, up to 2GB Non-ECC SDRAM

LAN Features

- ♦ LAN Chip: Intel® 82573L
- ♦ Support 10/100/1000 link speed
- ♦ LAN Bypass: 1 pair

Expansion

- ♦ 1 x Mini-PCI Slot

I/O Interface-Front

- ♦ Power status/HDD status/LAN status LEDs

I/O Interface-Rear

- ♦ 1 x Power button
- ♦ 1 x RJ45 type Console port
- ♦ 2 x USB 2.0 ports
- ♦ 4 x Copper LAN ports
- ♦ 2 x Reserved holes for wireless antenna

Devices

- ♦ 1 x on-board CompactFlash socket
- ♦ 1 x Internal 2.5" HDD bay

Power Input

- ♦ 60W Power Adaptor

Chassis Dimensions

- ♦ Chassis Dimension: 272mm x 195mm x 44mm
- ♦ Carton Dimension: 430mm x 300mm x 170mm

Weight

- ♦ Without Packing: 2kg
- ♦ With Packing: 4kg

Certifications

- ♦ CE approval
- ♦ FCC Class B
- ♦ UL

Ordering Information

Barebone

♦ DNA 940 (P/N: 10L00094000X0)

Intel® Celeron® M 600MHz, 1 DDR2 memory slot, 4 Gigabit LAN ports with one pair bypass, CompactFlash Socket, VGA, USB port, One Mini-PCI Expansion Slot

♦ DNA 940-RB (P/N: 10L00094001X0)

Intel® Celeron® M 600MHz, 1 DDR2 memory slot, 4 Gigabit LAN ports without bypass, CompactFlash Socket, VGA, USB port, One Mini-PCI Expansion Slot



Main Features

- ♦ Desktop Network Platform
- ♦ Intel® EP80579 integrated 600MHz Processor
- ♦ Support DDR2 533/667/800 Memory up to 2GB
- ♦ 4 x GbE LAN ports
- ♦ Support LAN Bypass
- ♦ One Mini-PCle Expansion
- ♦ On-board CF Socket

Specifications

Main Board

- ♦ DNB 950
- ♦ On Board Intel® EP80579 integrated 600MHz Processor
- ♦ Support 600MHz/1.2GHz CPU with Acceleration (Optional)
- ♦ Intel® SOC integrated MCH and ICH

Main Memory

- ♦ 1 x 240-pin DDR2 533/667/800 DIMM slot, up to 2GB Non-ECC SDRAM

LAN Features

- ♦ LAN Chip: 1 x Intel® 82573L and 3 x GbE by integrated by Intel® EP80579
- ♦ Support 10/100/1000 link speed
- ♦ LAN Bypass: 1 pair

Expansion

- ♦ 1 x Mini-PCle Slot

I/O Interface-Front

- ♦ Power status/HDD status/LAN status LEDs

I/O Interface-Rear

- ♦ 1 x Power button
- ♦ 1 x RJ45 type Console port
- ♦ 2 x USB 2.0 ports
- ♦ 4 x Copper LAN ports
- ♦ 2 x Reserved holes for wireless antenna

Devices

- ♦ 1 x on-board CompactFlash socket
- ♦ 1 x Internal 2.5" HDD bay

Power Input

- ♦ 60W Power Adapter

Chassis Dimensions

- ♦ Chassis Dimension: 272mm x 195mm x 44mm
- ♦ Carton Dimension: 430mm x 300mm x 170mm

Weight

- ♦ Without Packing: 2kg
- ♦ With Packing: 4kg

Certifications

- ♦ CE approval
- ♦ FCC Class B
- ♦ UL

Ordering Information

Barebone

♦ DNA 950 (P/N: 10L00095000X0)

Intel® SOC 600MHz without Acceleration, 1 DDR2 memory slots, 4 Gigabit LAN ports with one pair Bypass, CompactFlash Socket, USB port, One Mini-PCle Expansion Slot


♦ DNA 950-RB (P/N: 10L00095003X0)

Intel® SOC 600MHz without Acceleration, 1 DDR2 memory slots, 4 Gigabit LAN ports without Bypass, CompactFlash Socket, USB port, One Mini-PCle Expansion Slot

DNA 1110

Desktop Intel® Atom™ D510 Dual Core/ D410 Single Core

1.66GHz Processor with 4 PCIe GbE LAN

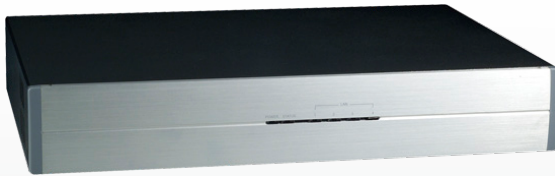

Main Features

- ♦ Desktop Network Platform
- ♦ Intel® Atom™ D510 Dual Core/D410 Single Core 1.66GHz Processor
- ♦ Support DDR2 667/800 Memory up to 2GB
- ♦ 4 x GbE LAN Ports
- ♦ Support LAN Bypass
- ♦ One PCI Expansion
- ♦ On-board CF Socket
- ♦ Internal one 2.5" HDD Bay

Specifications

Main Board

- ♦ DNB 1110
- ♦ On board Intel® Atom™ D510 Dual Core/D410 Single Core 1.66GHz Processor
- ♦ Intel® ICH8M Chipset

Main Memory

- ♦ 1 x 240-pin DDR2 667/800 DIMM slot, up to 2GB Non-ECC SDRAM

LAN Features

- ♦ LAN Chip: Intel® 82583V
- ♦ Support 10/100/1000 link speed
- ♦ LAN Bypass: 1 pair

Expansion

- ♦ 1 x PCI Slot
- ♦ 1 x Mini-PCI Slot

I/O Interface-Front

- ♦ Power status/HDD status/LAN status LEDs

I/O Interface-Rear

- ♦ 1 x Power button
- ♦ 1 x RJ45 type Console port
- ♦ 2 x USB 2.0 ports
- ♦ 4 x Copper LAN ports
- ♦ 1 x PCI Expansion Slot

Devices

- ♦ 1 x on-board CompactFlash socket
- ♦ 1 x Internal 2.5" HDD bay

Power Input

- ♦ 45W Power Adaptor

Dimensions

- ♦ Chassis Dimension: 272mm x 195mm x 44mm
- ♦ Carton Dimension: 430mm x 300mm x 170mm

Weight

- ♦ Without Packing: 2kg
- ♦ With Packing: 4kg

Certifications

- ♦ CE approval
- ♦ FCC Class B
- ♦ UL

Ordering Information

Barebone

♦ DNA 1110 (P/N: 10L00111000X0)

Intel® Atom™ D410 Single Core 1.66GHz Processor, 1 DDR2 memory slot, 4 Gigabit LAN ports with one pair bypass, CompactFlash Socket, VGA, USB port, One Mini-PCI Slot, one PCI expansion slot

♦ DNA 1110A (P/N: 10L00111001X0)

Intel® Atom™ D510 Dual Core 1.66GHz Processor, 1 DDR2 memory slot, 4 Gigabit LAN ports with one pair bypass, CompactFlash Socket, VGA, USB port, One Mini-PCI Slot, one PCI expansion slot

DNA 1120

Desktop Intel® Atom™ D525 Dual Core/ D425 Single Core

1.8 GHz Processor with 4 PCIe GbE LAN



Main Features

- ♦ Desktop Network Platform
- ♦ Intel® Atom™ D525 Dual Core/ D425 Single Core 1.8GHz Processor
- ♦ Support DDR3 800 Memory up to 2GB
- ♦ 4 x GbE LAN Ports
- ♦ Support LAN Bypass
- ♦ One PCI Expansion
- ♦ On-board CF Socket
- ♦ Internal one 2.5" HDD Bay

Specifications

Main Board

- ♦ DNB 1120
- ♦ On board Intel® Atom™ D525 Dual Core/ D425 Single Core 1.8 GHz Processor
- ♦ Intel® ICH8M Chipset

Main Memory

- ♦ 1 x 204-pin DDR3 800 SO-DIMM slot, up to 2GB Non-ECC SDRAM

LAN Features

- ♦ LAN Chip: Intel® 82583V
- ♦ Support 10/100/1000 link speed
- ♦ LAN Bypass: 1 pair

Expansion

- ♦ 1 x PCI Slot
- ♦ 1 x Mini-PCI Slot
- ♦ 1x PCI-e Slot (Optional)
- ♦ 1x mini-PCIe Slot (Optional)

I/O Interface-Front

- ♦ Power status/HDD status/LAN status LEDs

I/O Interface-Rear

- ♦ 1 x Power button
- ♦ 1 x RJ45 type Console port
- ♦ 2 x USB 2.0 ports
- ♦ 4 x Copper LAN ports
- ♦ 1 x PCI Expansion Slot

Devices

- ♦ 1 x on-board CompactFlash socket
- ♦ 1 x Internal 2.5" HDD bay
- ♦ 1 x SATA DOM device

Power Input

- ♦ 45W Power Adaptor

Dimensions

- ♦ Chassis Dimension: 272mm x 195mm x 44mm
- ♦ Carton Dimension: 430mm x 300mm x 170mm

Weight

- ♦ Without Packing: 2kg
- ♦ With Packing: 4kg

Certifications

- ♦ CE approval
- ♦ FCC Class B
- ♦ UL

Ordering Information

Barebone

♦ DNA 1120 (P/N: 10L00112000X0)

Intel® Atom™ D425 Single Core 1.8GHz Processor, one DDR3 memory slot, 4 Gigabit LAN ports with one pair bypass, CompactFlash Socket, VGA, USB port, One Mini-PCI Slot, one PCI expansion slot

♦ DNA 1120A (P/N: 10L00112001X0)

Intel® Atom™ D525 Dual Core 1.8GHz Processor, one DDR3 memory slot, 4 Gigabit LAN ports with one pair bypass, CompactFlash Socket, VGA, USB port, One Mini-PCI Slot, one PCI expansion slot

♦ DNA 1120E (P/N: 10L00112002X0)

Intel® Atom™ D425 Single Core 1.8GHz Processor, one DDR3 memory slot, 4 Gigabit LAN ports with one pair bypass, CompactFlash socket, VGA, USB port, one mini-PCIe Slot, one PCIe expansion slot

♦ DNA 1120AE (P/N: 10L00112003X0)

Intel® Atom™ D525 Dual Core 1.8GHz Processor, one DDR3 memory slot, 4 Gigabit LAN ports with one pair bypass, CompactFlash socket, VGA, USB port, one mini-PCIe slot, one PCIe expansion slot

DNA 1500/1501/1505

Desktop Netlogic XLS 108/ 208 Processors
with WAN x 1, Switch LAN x 5



Main Features

- Desktop Network Platform
- Netlogic XLS 108 750MHz/XLS 208 600 MHz Processors
- Support DDR2 SO-DIMM
- 6 x GbE LAN ports
- Switch LAN: 5 ports GbE
- Support LAN Bypass
- On-board CF Socket
- Support Mini-PCIe Interface

Specifications

Main Board

- DNB 1500/DNB 1501
- On Board Netlogic XLS 108 750MHz/On Board Netlogic XLS 208 Dual Core 600 MHz Processors

Main Memory

- 1 x 200-pin DDR2 SO-DIMM slot, up to 1GB SO-DIMM

LAN Features

- LAN Chip: 1 x Marvell 88E1111, 1 x Marvell 7395
- Support 10/100/1000 link speed
- LAN Bypass: 1 pair

Expansion

- 2 x Mini-PCIe Slot

I/O Interface-Front

- Power status/HDD status/LAN status LEDs

I/O Interface-Rear

- 1 x Power button
- 1 x RJ45 type Console port
- 2 x USB 2.0 ports
- 6 x Copper LAN ports

Devices

- 1 x on-board CompactFlash socket
- 1 x on-board 128MB flash memory

Power Input

- 60W ATX Power Supply

Certifications

- CE approval
- FCC Class B

Chassis Dimensions

- Chassis Dimension: 330mm x 220mm x 44mm
- Carton Dimension: 430mm x 300mm x 170mm

Weight

- Without Packing: 2kg
- With Packing: 4kg

Ordering Information

Barebone

- **DNA 1500 (P/N: 10L00150000X0)**

Desktop Netlogic XLS 108 750MHz, GbE WAN x 1,
GbE Switch LANs x 5

- **DNA 1501 (P/N: 10L00150100X0)**

Desktop Netlogic XLS 208 Dual Core 600 MHz, GbE WAN x 1,
GbE Switch LANs x 5

DNA 2120

Desktop Intel® Atom™ D525 Dual Core/ D425 Single Core
1.8GHz Processor with 6 PCIe GbE LAN Ports



Main Features

- Desktop Network Platform
- Intel® Atom™ D525 Dual Core/ D425 Single Core 1.8GHz Processor
- 2GB on board DDR3 800 Memory, and one DDR3 DO-DIMM up to 4GB
- 6 x Intel 82583V GbE LAN Ports
- Support LAN Bypass
- Internal one 2.5" HDD Bay/ one SATA DOM (Optional)
- Fanless design

Specifications

Main Board

- DNB 2120
- Support Intel® Atom™ D525 Dual Core/ D425 Single Core 1.8GHz Processor
- Intel® ICH8M Chipset

Main Memory

- Onboard 2GB DDR3 800 Memory (Default)
- 1 x 204-pin DDR3 800 SO-DIMM slot, up to 4GB Non-ECC SDRAM

LAN Features

- LAN Chip: Intel® 82583V
- Support 10/100/1000 link speed
- LAN Bypass: 1 pairs

Expansion

- 1 Mini-PCie Slot (Option)

I/O Interface-Front

- Power status/LAN status/Bypass status LED

I/O Interface-Rear

- 1 x Power button
- 1 x RJ45 type Console Port
- 2 x USB 2.0 Ports
- 6 x Copper LAN Port
- 2 x holes for Wireless Antenna

Devices

- 1 x CompactFlash Socket (Optional)
- 1 x 2.5" HDD bay
- 1 x SATA-DOM device space

Power Input

- 40W Power Adapter

Dimensions

- Chassis Dimension: 250mm x 194mm x 40mm
- Carton Dimension: 430mm x 300mm x 170mm

Weight

- Without Packing: 2kg
- With Packing: 3.3kg

Certifications

- CE approval
- FCC Class B
- UL

Ordering Information

Barebone

- **DNA 2120 (P/N: 10L00212000X0)**
Intel® Atom™ D425 Single Core 1.8 GHz Processor, 1 DDR3 SO-DIMM memory slot, 6 Gigabit LAN ports with two pairs bypass, USB port
- **DNA 2120A (P/N: 10L00212001X0)**
Intel® Atom™ D525 Dual Core 1.8 GHz Processor, 1 DDR3 SO-DIMM memory slot, 6 Gigabit LAN ports with two pairs bypass, USB port

OSA 5130

2nd Generation Intel® Core™ Processor Family/ Intel® Xeon®

E3 Family 1U Rackmount with 8 PCIe GbE LAN



Main Features

- 1U Rackmount Network Platform
- 2nd Generation Intel® Core™ Processor Family/ Intel® Xeon® E3 Family
- Support DDR3 1066/1333 SDRAM Memory, up to 16GB
- Support Two PCIe x8 Expansion
- Internal One 3.5" HDD Bay/ Two 2.5" HDD Bay (Optional)
- Support Redundant Power Supply (Optional)

Specifications

Main Board

- OSB 5130
- Support 2nd generation Intel® Core™ processor family/ Intel® Xeon® E3 family
- Intel® C206

Main Memory

- 4 x 240-pin DDR3 1066/1333MHz DIMM slots, up to 16GB

LAN Features

- LAN Chip: Intel® 82583V
- Support 10/100/1000 link speed
- LAN Bypass: 4 pairs

Expansion

- 2 x PCIe x8 Slot

I/O Interface-Front

- Power status/HDD status/LAN status/Bypass status LED
- 2 x USB 2.0 ports
- 1 x RJ45 type console port
- 8 x Copper LAN ports

I/O Interface-Rear

- 2 x expansion slots
- 2 x USB 2.0 ports (option)
- 1 x VGA port (option)

Devices

- 1 x On-board CompactFlash socket
- 1 x internal 3.5" HDD bay/ two 2.5" HDD Bay (optional)
- 1 x SATA-DOM device space

Power Input

- 200W ATX power supply/ 200W 1+1 redundant power supply (optional)

Dimensions

- Chassis Dimension: 426mm x 450mm x 44mm
- Carton Dimension: 560mm x 620mm x 190mm

Weight

- Without Packing: 8Kg
- With Packing: 12Kg

Certifications

- CE approval
- FCC Class A
- UL

Ordering Information

Barebone

• OSA 5130 (P/N: 10SV0513000X0)

Support Intel® 2nd generation Core™ processors, 4 DDR3 memory slots, 8PCIe GbE LAN ports, CompactFlash socket, USB ports, , two PCIe X8 expansion slot, w/o LCM, 200W ATX power supply

• OSA 5130 HA (P/N: TBD)

Support Intel® 2nd generation Core™ processors, 4 DDR3 memory slots, 8PCIe GbE LAN ports, CompactFlash socket, USB ports, ,two PCIe X8 expansion slot, w/o LCM, 200W 1+1 redundant power supply

Option

• OSA 5130 LCM & MEMBRANE (P/N: 88SV0513000X0)

2012

Network and Communication Solutions

Headquarters

NEXCOM International Co., Ltd.

15F, No. 920, Chung-Cheng Rd., ZhongHe District., New Taipei City, 23586, Taiwan, R.O.C.
Tel: +886-2-8226-7786
Fax: +886-2-8226-7782
www.nexcom.com.tw

America

USA

NEXCOM USA

3758 Spinnaker Court Fremont,
CA, 94538, USA
Tel: +1-510-656-2248
Fax: +1-510-656-2158
Email: sales@nexcom.com
www.nexcom.com

Asia

Japan

NEXCOM Japan

9F, Tamachi Hara Bldg.,
4-11-5, Shiba Minato-ku,
Tokyo, 108-0014, Japan
Tel: +81-3-5419-7830
Fax: +81-3-5419-7832
Email: sales@nexcom-jp.com
www.nexcom-jp.com

China

NEXCOM China

Room 301, Block E, Power Creative Bldg.,
No.1 Shangdi East Rd., Haidian Dist.,
Beijing, 100085, China
Tel: +86-10-5885-6655
Fax: +86-10-5885-1066
Email: sales@nexcom.cn
www.nexcom.cn

Shanghai Office

Room 1505, Greenland He Chuang Bldg.,
No. 450 Caoyang Rd.,
Shanghai, 200062, China
Tel: +86-21-6150-8008
Fax: +86-21-3251-6358
Email: sales@nexcom.cn
www.nexcom.cn

Nanjing Office

Hall C, Block 17, Tian Xing Cui Lang Bldg.,
No. 49 Yunnan North Rd.,
Nanjing, 210018, China
Tel: +86-25-8315-3486
Fax: +86-25-8315-3489
Email: sales@nexcom.cn
www.nexcom.cn

Shenzhen Office

Western Room 708, Block 210,
Tairan Industry & Trading Place, Futian Area,
Shenzhen, 518040, China
Tel: +86-755-833 7203
Fax: +86-755-833 7213
Email: sales@nexcom.cn
www.nexcom.cn

Europe

France

NEXCOM France

Z.I. des Amandiers
17, Rue des entrepreneurs,
78420 Carrières sur Seine, France
Tel: +33 (0)1 71 51 10 20
Fax: +33 (0)1 71 51 10 21
Email: sales.fr@nexcom.eu
www.nexcom.eu

Germany

NEXCOM GmbH

Leopoldstraße Business Centre,
Leopoldstraße 244,
80807 Munich, Germany
Tel: +49-89-208039-278
Fax: +49-89-208039-279
Email: sales.de@nexcom.eu
www.nexcom.eu

Italy

NEXCOM ITALIA S.r.l

Via Gaudenzio Ferrari 29,
21047 Saronno (VA), Italia
Tel: +39 02 9628 0333
Fax: +39 02 9619 8846
Email: sales.it@nexcom.eu
www.nexcom.eu

United Kingdom

NEXCOM EUROPE

10 Vincent Avenue,
Crownhill Business Centre,
Milton Keynes, Buckinghamshire
MK8 0AB, United Kingdom
Tel: +44-1908-267121
Fax: +44-1908-262042
Email: sales.uk@nexcom.eu
www.nexcom.eu



Please verify specifications before quoting. This guide is intended for reference purpose only.

All product specifications and information are subject to change without notice.

No part of this publication may be reproduced in any form or by any means without prior written permission of the publisher.

All brand and product names are registered trademarks of their respective companies.

©NEXCOM International Co., Ltd. 2012