


FlexTherm® Pipe Insulation



Made in America

Designed for the Plumbing Industry

Flexible Closed Cell Insulation

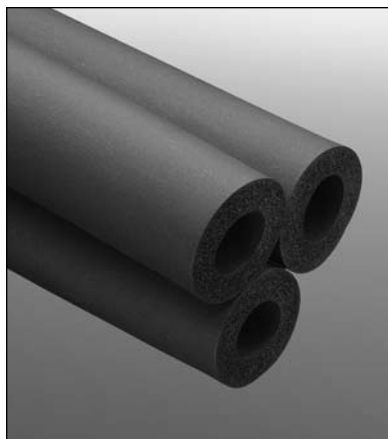

INSTALLATION

With a factory-applied coating of talc on the smooth inner surface, FlexTherm® Pipe Insulation slides easily over pipe or tubing for quick installation. When applied to existing lines, tubing is slit lengthwise and fitted into place. (Slitting can be done on the job with a sharp knife or pre-slit FlexTherm® Pipe Insulation is available on request.) All seams and butt joints should be sealed with an approved contact adhesive, making sure both surfaces to be joined are coated with adhesive. Fittings are fabricated from miter-cut tubular sections and cover, flanges, etc., from FlexTherm® Sheet Insulation.

DESCRIPTION

FlexTherm® Pipe Insulation is an environmentally friendly, CFC-free, flexible elastomeric thermal insulation. It is black in color, and identified as FlexTherm® Pipe Insulation, and is available in unslit tubular form in wall thicknesses of 3/8", 1/2", 3/4", 1", and 1-1/2" in sizes ranging from 3/8" I.D. to 4" IPS. FlexTherm® Pipe is non-porous, non-fibrous and resists mold growth.

APPLICATIONS

FlexTherm® Pipe Insulation is used to retard heat gain and prevent condensation on cold water plumbing. It also retards heat loss for hot water plumbing. FlexTherm® Pipe Insulation is designed for the Plumbing industry.

FlexTherm® Pipe Insulation is recommended for applications ranging from -70°F to 220°F (-57°C to 104°C). The expanded closed cell structure makes FlexTherm® Pipe Insulation an efficient insulator and provides effective moisture vapor resistance.

FlexTherm® Pipe Insulation has a very tough skin which withstands tearing, rough handling, and severe environmental conditions, and yet is quite flexible for easy installation. FlexTherm® Pipe Insulation has superior cold weather flexibility. FlexTherm® Pipe can be used with heat tracing/heat tapes.

OUTDOOR APPLICATIONS

FlexTherm® Pipe Insulation is made from a UV resistant elastomeric blend. For moderate UV exposure, no additional protective coating is needed. However, for severe UV exposure (rooftop applications) or where optimum performance is required, R-374 Protective Coating or approved jacketing or cladding should be used. *For more detailed information refer to the Installation Guidelines.*

UNDERGROUND

For buried lines above the water table, use a clean fill such as sand (3"-5" layer) to protect FlexTherm® Pipe Insulation before backfilling. It is recommended that materials to be buried are properly sealed at all seams and butt joints with an approved contact adhesive. For optimum performance, the lines should be encased in a conduit to protect them from problems associated with ground water and compaction.

RESISTANCE TO MOISTURE VAPOR FLOW

The closed-cell structure and unique formulation of FlexTherm® Pipe Insulation effectively retards the flow of moisture vapor, and is considered a low transmittance vapor retarder. For most indoor applications, FlexTherm® Pipe Insulation needs no additional protection.

Additional vapor barrier protection may be necessary for FlexTherm® Pipe Insulation when installed on low temperature surfaces that are exposed to continuous high humidity.

FLAME AND SMOKE RATING

FlexTherm® Pipe Insulation in wall thicknesses of 1-1/2" (38 mm) and below has a flame spread rating of 25 or less and a smoke development rating of 50 or less as tested by ASTM E 84 Method of Testing entitled: "Surface Burning Characteristics of Building Materials." FlexTherm® Pipe Insulation is acceptable for use in duct/plenum applications meeting the requirements of NFPA 90A/B.

Numerical flammability ratings alone may not define the performance of products under actual fire conditions. They are provided only for us in the selection of products to meet limits specified, when compared to a known standard.

SPECIFICATION COMPLIANCE

ASTM C 534 Type 1 (Tubing), Grade 1
ASTM D 1056-00-2C1
New York City MEA 186-86-M Vol. IV
USDA Requirements

UL 94-5V Flammability Classification
(Recognition No. E300774)
ASTM E 84 1-1/2" 25/50-tested
according to UL 723 and NFPA 255
Complies with requirements of
CAN/ULC S102-03

FMRC 2006 Approval Guide
Chapter 14 Pipe Insulation
NFPA No. 101 Class A Rating
Meets requirements of NFPA 90A
Sect. 2.3.3 for Supplementary
Materials for Air Distribution Systems
Meets requirements of ASTM C 411
(Test Method for Hot Surface
Performance of High Temperature
Thermal Insulation)

Meets requirements of UL 181
sections 11.0 and 16.0
(Mold Growth/Air Erosion)

FlexTherm® Pipe Insulation

PRODUCT DATA

Physical Properties		FlexTherm® Pipe Insulation	Test Methods
Thermal Conductivity (K)	90°F (32°C) Mean Temp	.270 (.039)	ASTM C 177/C 518
BTU - in/hr - Ft² = °F (W/mK)	75°F (24°C) Mean Temp	.250 (.036)	ASTM C 177/C 518
	50°F (10°C) Mean Temp	.260 (.037)	ASTM C 177/C 518
Operating Temperature Range	Upper	200°F (93°C)	
Flexible to -40 °F (-40°C)	Lower	-70°F (-57°C)	
Water Vapor Permeability Dry Cup. Perm-In		<0.06	ASTM E 96
Water Absorption %		<0.20 by volume	ASTM C 209
Flame Spread (up to 1" wall)		Not greater than 25	ASTM E 84
Smoke Developed (up to 1" wall)		Not greater than 50	ASTM E 84
Ozone Resistance		Pass	ASTM D 1171
Chemical/Solvent Resistance		Good	
Mildew Resistance/Air Erosion		Pass	UL 181

Thickness Recommendations* - To Control Condensation

Pipe Size	Line Temp 50°F 10°C		Line Temp 35°F 2°C		Line Temp 0°F -18°C		Line Temp -20°F -29°C	
Normal Conditions (Max 85°F, 29°C - 70% R.H.)								
3/8" I.D. thru 1-3/8"	3/8"	10 mm	1/2"	13 mm	3/4"	19 mm	1"	25 mm
Over 1-3/8" thru 3" IPS	3/8"	10 mm	1/2"	13 mm	1"	25 mm	1"	25 mm
Over 3" IPS thru 4" IPS	1/2"	13 mm	1/2"	13 mm	1"	25 mm	1-1/2"	38 mm
Mild Conditions (Max 80°F, 26°C - 50% R.H.)								
3/8" I.D. thru 2-1/8" I.D.	3/8"	10 mm	3/8"	10 mm	1/2"	13 mm	1/2"	13 mm
Over 2-1/8" thru 3" IPS	3/8"	10 mm	3/8"	10 mm	1/2"	13 mm	3/4"	19 mm
Over 3" IPS thru 4" IPS	1/2"	13 mm	1/2"	13 mm	3/4"	19 mm	3/4"	19 mm
Severe Conditions (Max 90°F, 32°C - 80% RH)								
3/8" I.D. thru 1-1/8" I.D.	3/4"	19 mm	3/4"	19 mm	1-1/2"	38 mm	1-1/2"	38 mm
Over 1-1/8" I.D. thru 4" IPS	3/4"	19 mm	1"	25 mm	1-1/2"	38 mm	1-1/2"	38 mm

*FlexTherm® Pipe Insulation in thickness noted within the specified temperature ranges will prevent condensation in indoor piping under design conditions defined below. Thickness recommendations above 1-1/2" can be sleeved to achieve thickness desired. Subject to compliance with applicable code requirements

Normal: Maximum severity of indoor conditions seldom exceed 85°F and 79% R.H. in United States.

Mild: Typical conditions are most air-conditioned spaces and arid climates.

Severe: Generally found in areas where excessive moisture is introduced or in poorly ventilated areas where the temperature may be depressed below the ambient.

Under conditions of higher humidity, additional thickness of insulation may be required.

Note: Thickness recommendations calculate using 0.2575 K-factor (0.25 plus 3% test error allowance)

FlexTherm® Pipe Insulation "R" Values						
Pipe O.D. or Nominal Insulation I.D.	R Value 3/8" (10 mm) Wall	R Value 1/2" (13 mm) Wall	R Value 3/4" (19 mm) Wall	R Value 1" (25 mm) Wall	R Value 1-1/2" (25 mm) Wall	
3/8" 10 mm	2.6	3.5	5.5	—	—	
1/2" 13 mm	2.5	3.3	5.2	—	—	
5/8" 16 mm	2.4	3.2	5.3	7.4	12.5	
3/4" 19 mm	2.3	3.0	5.3	7.3	11.8	
7/8" 22 mm	2.2	3.1	5.3	7.0	11.3	
1-1/8" 29 mm	2.3	3.1	5.5	7.1	10.8	
1-3/8" 35 mm	2.1	3.1	5.2	7.2	10.0	
1-5/8" 41 mm	2.5	3.1	5.2	7.1	9.8	
1-1/2" IPS 48 mm	2.4	3.0	5.0	6.7	9.3	
2-1/8" 54 mm	2.5	3.2	5.0	6.8	9.3	
2" IPS 60 mm	2.5	3.1	4.9	6.6	9.1	
2-1/2" IPS 64 mm	2.5	3.2	4.8	6.4	8.7	
2-5/8" 67 mm	2.4	3.2	4.8	6.5	8.8	
3-1/8" 79 mm	—	3.1	4.6	6.2	8.4	
3" IPS 89 mm	—	3.3	4.7	6.2	8.4	
3-5/8" 92 mm	—	3.2	4.6	6.0	8.2	
4-1/8" 105 mm	—	3.1	4.6	5.9	8.0	
4" IPS 114 mm	—	3.2	4.6	5.9	7.9	

Note: "R" factors were calculated using a K factor of 0.2575 (0.25 plus 3% test error allowance at 75°F, 24°C mean temp.) and nominal wall thickness in each case. Lower operating temperatures will result in improved R values. Contact Technical Services for specific recommendations.



3006 Anaconda Road | Tarboro, NC 27886 | p 866-876-2684 | f 866-876-2688
www.nomacoinsulation.com

©September 2009 FlexTherm is a registered trademark of Nomaco Insulation. The GREENGUARD INDOOR AIR QUALITY CERTIFIED® Mark is a registered certification mark used under license through the GREENGUARD Environmental Institute



NI-0017-PS-0909